



- (51) International Patent Classification:  
B04C 3/04 (2006.01)
- (21) International Application Number:  
PCT/US2012/044094
- (22) International Filing Date:  
25 June 2012 (25.06.2012)
- (25) Filing Language:  
English
- (26) Publication Language:  
English
- (30) Priority Data:  
61/500,630 24 June 2011 (24.06.2011) US
- (71) Applicant (for all designated States except US): SYN-  
THESIS ENERGY SYSTEMS, INC. [US/US]; Three  
Riverway, Suite 300, Houston, TX 77056 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): LAU, Francis  
[US/US]; 1821 Kelly Court, Darien, IL 60561 (US).  
SHENG, Tsung-Yao, Robert [US/US]; 434 South Quincy  
Street, Hinsdale, IL 60521 (US).
- (74) Agent: LI, Kening; Pinsent Masons LLP, c/o PM-IP USA,  
LLC, P. O. Box 341426, West Bethesda, MD 20827 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: FINES CAPTURE AND RECYCLE SYSTEM AND USES THEREOF

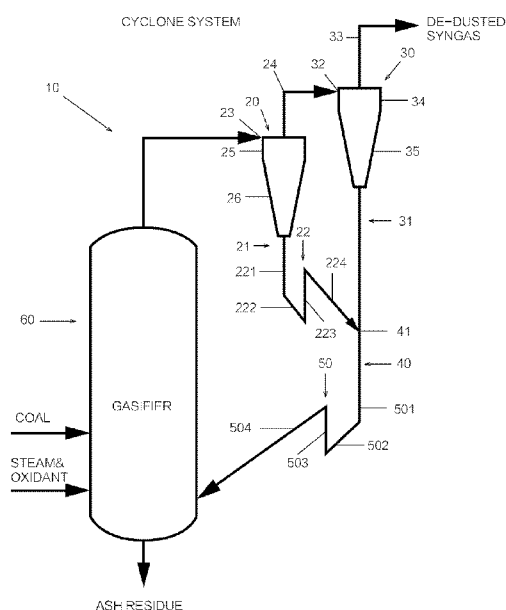


Figure 1. Overall Arrangement of Gasifier, Cyclones and Diplegs

(57) Abstract: A cyclone system for a gasifier having two or more cyclones arranged in series. The cyclone system comprises a first stage cyclone, a first dipleg, a first loopseal, a second stage cyclone, a second dipleg, a combined dipleg, and a combined loopseal. The first stage cyclone has a first inlet and a first outlet. The first inlet is in fluid communication with the gasifier and receives a first gas-solid mixture from the gasifier. The first dipleg is connected to the first stage cyclone for collecting a first solid particle fraction separated from the first gas-solid mixture. The first loopseal is connected to the first dipleg for receiving the first solid particle fraction. The second stage cyclone has a second inlet and a second outlet. The second inlet is in fluid communication with the first outlet and receives a second gas-solid mixture from the first stage cyclone. The second dipleg is connected to the second stage cyclone for collecting a second solid particle fraction separated from the second gas-solid mixture. The combined dipleg is connected to both the first loopseal and the second dipleg. The combined loopseal is connected to the combined dipleg for receiving a mixture of the first and second solid particle fractions, and to the gasifier for feeding the mixture of the first and second solid particle fractions back to the gasifier. Also disclosed is a method for capturing and recycling fines with the cyclone system.

WO 2012/178213 A2

## **FINES CAPTURE AND RECYCLE SYSTEM AND USES THEREOF**

### **FIELD OF THE INVENTION**

[0001] The present invention relates to coal gasification using fluidized bed reactor. More specifically, the invention relates to a method and apparatus of capturing solids from syngas stream emanating from fluidized bed reactor and then returning the solids to the fluidized bed reactor.

### **BACKGROUND OF THE INVENTION**

[0002] Coal gasification is the process to convert coal into syngas primarily containing carbon monoxide (CO) and hydrogen (H<sub>2</sub>). The major types of gasifier are: moving bed gasifier, entrained flow gasifier, and fluidized bed gasifier. The crude syngas leaving the gasifier contains carbon monoxide, hydrogen, water vapor, solids, and hydrocarbons in varying amounts depending on the feedstock material, and type and operating conditions of the gasifier.

[0003] In a fluidized bed gasifier, the bed contains a certain amount of small solid particles or “fines”, the amount of which depends primarily on the amount of fines contained in feedstock material and the operating conditions of the gasifier such as the temperature, pressure, velocity and gas/solids contact, etc. A certain portion of the fines is inevitably entrained or carried out by the crude syngas leaving the gasifier. These fines contain unconverted carbon and therefore are a “loss” to the gasifier.

[0004] Most fluidized bed gasifiers operate at temperatures somewhat below the ash fusion temperatures to avoid clinker formation in the gasifier which will defluidize the beds and result in involuntary shutdown. The relatively low operating temperatures, and consequently, the non-slugging mode of operation of fluidized bed gasifiers eliminate many design and operating problems commonly associated with slugging entrained flow gasifiers resulting from molten ash at high operating temperatures. The low operating temperatures, however, also limit the carbon conversion of fluidized bed gasifiers. To increase the carbon conversion of fluidized bed gasifiers, the amount of fines loss from the gasifiers must be kept as low as possible, so the fines entrained by the crude syngas must be captured and returned to the gasifiers for more gasification reactions.

[0005] Increasing gas and solids residence time in fluidized bed gasifier and/or decreasing the superficial velocity of crude syngas leaving the gasifier will decrease the amount of fines carried over by the crude syngas. However these methods will also significantly increase the costs of the gasifier. A more feasible method to increase the overall carbon conversion of fluidized bed gasifier is to capture and recycle the carried-over fines to the gasifier.

[0006] Cyclone systems have been commercially used to capture solids particles entrained by effluent gas from fluidized bed reactors and then return the captured solids to the reactors. However, the solids entrained by the crude syngas from fluidized bed gasifiers often contain very small (e.g. less than 20  $\mu$  m in diameter) and light solids particles or fines which are difficult to be captured by the conventional cyclones. Furthermore, these fines are often difficult to flow through or discharge from a cyclone dipleg causing frequent solids bridging or plugging problems and ultimately involuntary shutdown of the gasifier and cyclone systems. Different devices and methods using pneumatic and/or mechanical conveyors, valves, eductors, or rotary feeders, for example, have been tried to resolve these problems for fluidized bed reactors operated at high temperatures and pressures. However, the current devices and methods do not work well to provide a reliable long term solution for these problems.

[0007] The objective of the present invention therefore resides in providing an apparatus and a method for capturing and recycling small fines for fluidized bed reactors or gasifiers operated at high temperatures and pressures in a more reliable and simpler manner.

#### **SUMMARY OF THE INVENTION**

[0008] This invention is based, at least in part, upon the unexpected discovery that in a two stage cyclones in series, combining the first stage fines with the second stage fines offers a simple solution without any need of a rotating or moving device to efficiently capture fines carried over by crude syngas leaving a fluidized bed gasifier and recycle the fines to the gasifier.

[0009] Accordingly, in one aspect, the invention features a cyclone system for a gasifier having two or more cyclones arranged in series. The cyclone system comprises a first stage cyclone, a first dipleg, a first loopseal, a second stage cyclone, a second dipleg, a combined dipleg, and a combined loopseal. The first stage cyclone has a first inlet and a first outlet. The first inlet is in fluid communication with the gasifier and receives a first gas-solid mixture from the gasifier. The first dipleg is connected to the first stage cyclone for collecting a first solid particle fraction separated from the first gas-solid mixture. The first loopseal is connected to the first dipleg for receiving the first solid particle fraction. The second stage cyclone has a second inlet and a second outlet. The second inlet is in fluid communication with the first outlet and receives a second gas-solid mixture from the first stage cyclone. The second dipleg is connected to the second stage cyclone for collecting a second solid particle fraction separated from the second gas-solid mixture. The combined dipleg is connected to both the first loopseal and the second dipleg. The combined loopseal is connected to the combined dipleg for receiving a mixture of the first and second solid particle fractions, and to the gasifier for feeding the mixture of the first and second solid particle fractions back to the gasifier.

[0010] In another aspect, the invention features a gasifier system. The gasifier system comprises a gasifier and a cyclone system of the invention.

[0011] The gasifier may be a fluidized bed gasifier. The first inlet may be a half-volute inlet, while the second inlet may be a tangential inlet.

[0012] In some embodiments, the first loopseal comprises a first vertical downcomer connected to the first dipleg for receiving the first solid particle fraction, a first downwardly inclined segment downstream of the first vertical downcomer, a first riser downstream of the first downwardly inclined segment, and a second downwardly inclined segment downstream of the first riser. The combined dipleg can be connected at a branch point of the combined dipleg to the second dipleg and the second downwardly inclined segment of the first loopseal.

[0013] In some embodiments, the combined loopseal comprises a second vertical downcomer for receiving a mixture of the first and second solid particle fractions, a third

downwardly inclined segment downstream of the second vertical downcomer, a second riser downstream of the third downwardly inclined segment, and a fourth downwardly inclined segment downstream of the second riser and connected back to the gasifier.

**[0014]** The invention also features methods for capturing and recycling fines. One of the methods comprises delivering a first gas-solid mixture from a gasifier to a first inlet of a first stage cyclone, separating the first gas-solid mixture into a second gas-solid mixture and a first solid particle fraction in the first stage cyclone, feeding the second gas-solid mixture from a first outlet of the first stage cyclone to a second inlet of a second stage cyclone and collecting the first solid particle fraction sequentially through a first dipleg connected to the first stage cyclone and a first loopseal connected to the first dipleg, separating from the second gas-solid mixture a second solid particle fraction in the second stage cyclone, collecting the second solid particle fraction through a second dipleg connected to the second stage cyclone, collecting a mixture of the first solid particle fraction from the first loopseal and the second solid particle fraction from the second dipleg sequentially through a combined dipleg connected to both the first loopseal and the second dipleg and a combined loopseal connected to both the combined dipleg and the gasifier, and feeding the mixture of the first and second solid particle fractions from the combined loopseal back to the gasifier.

**[0015]** Another method of the invention comprises the steps of generating a first gas-solid mixture in a gasifier, delivering the first gas-solid mixture from the gasifier to a first inlet of a first stage cyclone, separating the first gas-solid mixture into a second gas-solid mixture and a first solid particle fraction in the first stage cyclone, feeding the second gas-solid mixture from a first outlet of the first stage cyclone to a second inlet of a second stage cyclone and collecting the first solid particle fraction sequentially through a first dipleg connected to the first stage cyclone and a first loopseal connected to the first dipleg, separating from the second gas-solid mixture a second solid particle fraction in the second stage cyclone, collecting the second solid particle fraction through a second dipleg connected to the second stage cyclone, collecting a mixture of the first solid particle fraction from the first loopseal and the second solid particle fraction from the second dipleg sequentially through a combined dipleg connected to both the first loopseal

and the second dipleg and a combined loopseal connected to both the combined dipleg and the gasifier, and feeding the mixture of the first and second solid particle fractions from the combined loopseal back to the gasifier.

**[0016]** The above-mentioned and other features of this invention and the manner of obtaining and using them will become more apparent, and will be best understood, by reference to the following drawing and description.

#### **BRIEF DESCRIPTION OF THE DRAWING**

**[0017]** Figure 1 shows an exemplary overall arrangement of the gasifier, cyclones, and diplegs according to the present invention.

#### **DETAILED DESCRIPTION OF THE INVENTION**

**[0018]** This invention deals with the effective capture and recycle of fines carried over from reactors, such as gasifiers or combustors, and thus improves the collection efficiencies of reactors and improves the overall system performance. In particular, this configuration of cyclones and diplegs enables the recycle of very fine fines back to the reactor. The specific configuration combines the cyclones and diplegs in such manner that the very fine fines from a second stage cyclone can be handled and recycled back to the reactor without the use of mechanical moving devices.

**[0019]** Cyclones and diplegs are commonly used in the prior art, and the combination of two stages of cyclones was also common. However, the present invention is the first to combine the diplegs of the two serially-arranged stages of cyclones to accomplish the surprisingly advantageous effects. These advantageous effects include the prevention of formation of a solid and immobile or slow-moving fines column in the downcomer of the second dipleg, while at the same time preventing gasshort-circuiting (i.e. gas/solids mixture from the first stage cyclone entering the second stage cyclone from the bottom via the first dipleg) which will dramatically decrease the efficiency of the second stage cyclone, or cause it to fail completely. Specifically, through various experimentation, it was determined that the specific configuration (i.e. connecting the downwardly inclined segment 224 of the first dipleg into the downcomer of the second stage dipleg (see below), or "connecting the first into

the second") is highly desirable, because other alternatives(e.g. "connecting the second into the first" or "combining the first with the second") do not have the technical advantages of the present invention. This effectively allows the higher volume and higher flow rate gas/solid steam from the first dipleg to push or carry the fines from the second stage cyclone back into the gasifier.

**[0020]** Furthermore, the downwardly inclined segment 224 of the first dipleg is connected to the downcomer of the second stage dipleg at a location in the lean phase region (generally near or at the upper portion of the downcomer). In addition, the diameter and length of the downcomer of the second stage dipleg is selected according to the flow rate and solids content of the gas/solid mixture entering the first inlet 23 of the first cyclone, and the amount of aerating gases throughout the entire system, especially throughout the first dipleg, is determined such that the gas short-circuiting into the second stage cyclone is eliminated or minimized, while no immobile solid column is formed in the second dipleg.

**[0021]** More specifically, referring to Figure 1, the present invention provides a cyclone system **10** with two or more cyclones arranged in series. The cyclone system **10** has a first stage cyclone **20**, a first dipleg **21**, a first loopseal **22**, a second stage cyclone **30**, a second dipleg **31**, a combined dipleg **40**, and a combined loopseal **50**. Figure 1 shows an exemplary overall arrangement of the gasifier, cyclones, and diplegs.

**[0022]** A first stage cyclone is the first cyclone that receives the output syngas (i.e., a first gas-solid mixture) from a reactor, separates the syngas into a first gas fraction and a first solid particle fraction, and delivers to downstream equipments for further processing.

**[0023]** Referring to Figure 1, the first stage cyclone **20** has a first inlet **23** for receiving the first gas-solid mixture from the gasifier **60**, and a first outlet **24** for delivering the first gas fraction to a second stage cyclone **30**. In a preferred configuration, the first inlet **23** is a half-volute inlet. The body of the first stage cyclone **20** includes a first barrel portion **25** and a first cone portion **26**. A first dipleg **21** is connected to the

first cone portion **26** for collecting the first solid particle fraction. The first solid particle fraction then passes through a first loopseal **22** connected to the first dipleg **21**.

[0024] Preferably, the first loopseal **22** has a first vertical downcomer **221** connected to the first dipleg **21** for receiving the first solid particle fraction. Subsequently, the first solid particle fraction passes through a first downwardly inclined segment **222**, a first riser **223**, and a second downwardly inclined segment **224** connected to a combined dipleg **40**.

[0025] A second stage cyclone is a cyclone that receives the first gas fraction (i.e., a second gas-solid mixture) from the first stage cyclone, further separates the mixture into a second gas fraction and a second solid particle fraction (containing solid particles, e.g., in the range of 50, 40, 30, 20, or 10 microns or less), and delivers to downstream equipments for more processing or discharges the gas and solid particle fractions.

[0026] Referring to Figure 1, similar to the first stage cyclone **20**, the second stage cyclone **30** has a second inlet **32** for receiving the second gas-solid mixture from the first stage cyclone **20**, and a second outlet **33** for delivering to downstream equipments for further processing or discharges the second gas fraction. In a preferred configuration, the second inlet **32** is a tangential inlet. The body of the second stage cyclone **30** includes a second barrel portion **34** and a second cone portion **35**. A second dipleg **31** is connected to the second cone portion **35** for collecting the second solid particle fraction. The second solid particle fraction then passes through to the combined dipleg **40** connected to the second dipleg **31**.

[0027] Referring to Figure 1, the combined dipleg **40** is connected (e.g., at a branch point **41** of the combined dipleg **40**) to both the first loopseal **22** (e.g., downstream of the second downwardly inclined segment **224**) and the second dipleg **31**. The mixture of the first and second solid particle fractions then passes through a combined loopseal **50** and returns to the gasifier **60**. As shown in Figure 1, the combined loopseal **50** is connected to the combined dipleg **40** and to the gasifier **60**.

[0028] Preferably, the combined loopseal **50** has a second vertical downcomer **501** for receiving the mixture of the first and second solid particle fractions, followed by

a third downwardly inclined segment **502**, a second riser **503**, and a fourth downwardly inclined segment **504** connected back to the gasifier **60**.

[0029] Furthermore, the invention provides a gasifier system including the gasifier **60** and the cyclone system **10** as described above.

[0030] The cyclone and gasifier systems of the invention and the like can be used to more readily and efficiently capture and recycle very fine fines.

[0031] Accordingly, a method of the invention involves use of a cyclone system of the invention to capture and recycle fines. In this method, a first gas-solid mixture is delivered from the gasifier **60** to the first inlet **23**, and separated into a second gas-solid mixture and a first solid particle fraction in the first stage cyclone **20**. The second gas-solid mixture passes from the first outlet **24** to the second inlet **32**, while the first solid particle fraction is collected through the first dipleg **21** and then the first loopseal **22**. A second solid particle fraction is separated from the second gas-solid mixture in the second stage cyclone **30**, and collected through the second dipleg **31**. Both the first solid particle fraction from the first loopseal **22** and the second solid particle fraction from the second dipleg **31** are then collected through the combined dipleg **40**. The mixture of the first and second solid particle fractions passes through the combined loopseal **50** and returns back to the gasifier **60**.

[0032] Another method of the invention involves use of a gasifier system of the invention to capture and recycle fines. In this method, a first gas-solid mixture (e.g., crude syngas from coal gasification) is generated in the gasifier **60** and delivered from the gasifier **60** to the first stage cyclone **20** via the first inlet **23**. The first gas-solid mixture then passes through the cyclone system **10** and is processed as described above.

[0033] The solids particles or fines captured by the first and second stage cyclones contain unconverted carbon and must be returned to the gasifier for more gasification reactions to improve the overall carbon conversion of the gasifier. The gasifier is operated at higher pressure than that in the cyclones. Special design and operating features are required to return captured fines from lower pressure to higher pressure. This has always been challenging in fluidized bed reactors especially for

fluidized bed gasifiers having a wide particle size distribution of feed materials. The solids particles captured by the first stage cyclone are relatively coarse, heavy and in large mass quantity, and therefore, returning these solids to the gasifier is not as difficult as the second stage fines.

**[0034]** The fines captured by the second stage cyclone are smaller and lighter and in much lower mass quantity than the first stage fines. These fines often exhibit a cohesive behavior and tend to form solids bridges or plugs in the pipes resulting in frequent flowing and discharging problems. A small and long pipe or “dipleg” is required to return the second stage fines to the gasifier to seal against a higher back pressure, which is the differential pressure between the gasifier and second stage cyclone, especially with low solids mass flow rate. This required long and small dipleg further aggravates the flowing and discharge problems of the second stage fines.

**[0035]** Aeration along the dipleg with inert or reacting gases has been used to assist the flowing and discharge of solids particles. It is difficult to aerate or fluidize the second stage fines because the interparticle forces are greater than those resulting from the action of gas. If the dipleg is over aerated or if the aeration gas channeled in the dipleg, the aeration gas will hinder the flowing of solids particles causing blockages and shutdown of the fines recirculation system.

**[0036]** The fines recirculation problems described above have often been the root cause of the failures of many cyclones and diplegs systems for fluidized bed reactors and gasifiers. As mentioned above, the fines recirculation problems will be much more severe for the second stage fines. As mentioned in “BACKGROUND OF THE INVENTION”, many methods and devices have tried to mitigate this problem with poor results.

**[0037]** The present invention combines the second stage fines with particles whose diameters are up to two orders of magnitude smaller than those of the first stage fines without using any mechanical or rotating devices, which are commonly used in fluidization industry with poor and unreliable results, to eliminate the problems associated with the second stage fines as mentioned above.

**[0038]** The fines captured in the first stage cyclone are discharged by the first stage dipleg and loopseal to the lean phase of the second stage dipleg. The first stage fines are then mixed with the second stage fines in the combined dipleg. The combined solids mixture flows through the combined dipleg and then re-injected to the gasifier by the combined loopseal. The mass flow rate of the first stage fines are about two orders of magnitude higher than that of the second stage fines. Therefore the combined solids mixture will behave as the coarser and heavier first stage fines. This will completely eliminate the problems associated with the second stage fines due to their cohesive nature, and being difficult to aerate or fluidize in a long and small-diameter dipleg, etc.

**[0039]** Another important feature of the present invention is that the loopseals are equipped with inclined legs comparing to the horizontal legs commonly used in conventional loopseals. The inclined legs will reduce the aeration gas flow rates and facilitate the solids flow. This is more important for the first stage loopseal as the aeration gas fed to the loopseal needs to be minimized so as not to have any adverse impact on the performance of the second stage cyclone.

**[0040]** Aeration gas such as carbon dioxide or steam may be used for the loopseals and diplegs to promote the gasification reactions of the aeration gas and the unconverted carbon in the fines before the fines are returned to the gasifier.

**What is claimed is:**

1. A cyclone system for a gasifier having two or more cyclones arranged in series, wherein the cyclone system comprises:

a first stage cyclone having a first inlet and a first outlet, wherein the first inlet is in fluid communication with the gasifier and receives a first gas-solid mixture from the gasifier;

a first dipleg connected to the first stage cyclone for collecting a first solid particle fraction separated from the first gas-solid mixture;

a first loopseal connected to the first dipleg for receiving the first solid particle fraction;

a second stage cyclone having a second inlet and a second outlet, wherein the second inlet is in fluid communication with the first outlet and receives a second gas-solid mixture from the first stage cyclone;

a second dipleg connected to the second stage cyclone for collecting a second solid particle fraction separated from the second gas-solid mixture;

a combined dipleg connected to both the first loopseal and the second dipleg; and

a combined loopseal connected to the combined dipleg for receiving a mixture of the first and second solid particle fractions, and to the gasifier for feeding the mixture of the first and second solid particle fractions back to the gasifier.

2. The cyclone system of claim 1, wherein the gasifier is a fluidized bed gasifier.

3. The cyclone system of claim 1, wherein the first inlet is a half-volute inlet.

4. The cyclone system of claim 1, wherein the second inlet is a tangential inlet.

5. The cyclone system of claim 1, wherein the first loopseal comprises a first vertical downcomer connected to the first dipleg for receiving the first solid particle fraction, a first downwardly inclined segment downstream of the first vertical downcomer, a first

riser downstream of the first downwardly inclined segment, and a second downwardly inclined segment downstream of the first riser.

6. The cyclone system of claim 5, wherein the combined dipleg is connected at a branch point of the combined dipleg to the second dipleg and the second downwardly inclined segment of the first loopseal.

7. The cyclone system of claim 1, wherein the combined loopseal comprises a second vertical downcomer for receiving a mixture of the first and second solid particle fractions, a third downwardly inclined segment downstream of the second vertical downcomer, a second riser downstream of the third downwardly inclined segment, and a fourth downwardly inclined segment downstream of the second riser and connected back to the gasifier.

8. A method for capturing and recycling fines, comprising:

delivering a first gas-solid mixture from a gasifier to a first inlet of a first stage cyclone;

separating the first gas-solid mixture into a second gas-solid mixture and a first solid particle fraction in the first stage cyclone;

feeding the second gas-solid mixture from a first outlet of the first stage cyclone to a second inlet of a second stage cyclone and collecting the first solid particle fraction sequentially through a first dipleg connected to the first stage cyclone and a first loopseal connected to the first dipleg;

separating from the second gas-solid mixture a second solid particle fraction in the second stage cyclone;

collecting the second solid particle fraction through a second dipleg connected to the second stage cyclone;

collecting a mixture of the first solid particle fraction from the first loopseal and the second solid particle fraction from the second dipleg sequentially through a combined

dipleg connected to both the first loopseal and the second dipleg and a combined loopseal connected to both the combined dipleg and the gasifier; and

feeding the mixture of the first and second solid particle fractions from the combined loopseal back to the gasifier.

9. A gasifier system, comprising:

a gasifier, and

a cyclone system having two or more cyclones arranged in series, wherein the cyclone system comprises:

a first stage cyclone having a first inlet and a first outlet, wherein the first inlet is in fluid communication with the gasifier and receives a first gas-solid mixture from the gasifier;

a first dipleg connected to the first stage cyclone for collecting a first solid particle fraction separated from the first gas-solid mixture;

a first loopseal connected to the first dipleg for receiving the first solid particle fraction;

a second stage cyclone having a second inlet and a second outlet, wherein the second inlet is in fluid communication with the first outlet and receives a second gas-solid mixture from the first stage cyclone;

a second dipleg connected to the second stage cyclone for collecting a second solid particle fraction separated from the second gas-solid mixture;

a combined dipleg connected to both the first loopseal and the second dipleg;  
and

a combined loopseal connected to the combined dipleg for receiving a mixture of the first and second solid particle fractions, and to the gasifier for feeding the mixture of the first and second solid particle fractions back to the gasifier.

10. The gasifier system of claim 9, wherein the gasifier is a fluidized bed gasifier.
11. The gasifier system of claim 9, wherein the first inlet is a half-volute inlet.
12. The gasifier system of claim 9, wherein the second inlet is a tangential inlet.
13. The gasifier system of claim 9, wherein the first loopseal comprises a first vertical downcomer connected to the first dipleg for receiving the first solid particle fraction, a first downwardly inclined segment downstream of the first vertical downcomer, a first riser downstream of the first downwardly inclined segment, and a second downwardly inclined segment downstream of the first riser.
14. The gasifier system of claim 13, wherein the combined dipleg is connected at a branch point of the combined dipleg to the second dipleg and the second downwardly inclined segment of the first loopseal.
15. The gasifier system of claim 9, wherein the combined loopseal comprises a second vertical downcomer for receiving a mixture of the first and second solid particle fractions, a third downwardly inclined segment downstream of the second vertical downcomer, a second riser downstream of the third downwardly inclined segment, and a fourth downwardly inclined segment downstream of the second riser and connected back to the gasifier.
16. A method for capturing and recycling fines, comprising:
  - generating a first gas-solid mixture in a gasifier,
  - delivering the first gas-solid mixture from the gasifier to a first inlet of a first stage cyclone;
  - separating the first gas-solid mixture into a second gas-solid mixture and a first solid particle fraction in the first stage cyclone;
  - feeding the second gas-solid mixture from a first outlet of the first stage cyclone to a second inlet of a second stage cyclone and collecting the first solid particle fraction

sequentially through a first dipleg connected to the first stage cyclone and a first loopseal connected to the first dipleg;

separating from the second gas-solid mixture a second solid particle fraction in the second stage cyclone;

collecting the second solid particle fraction through a second dipleg connected to the second stage cyclone;

collecting a mixture of the first solid particle fraction from the first loopseal and the second solid particle fraction from the second dipleg sequentially through a combined dipleg connected to both the first loopseal and the second dipleg and a combined loopseal connected to both the combined dipleg and the gasifier; and

feeding the mixture of the first and second solid particle fractions from the combined loopseal back to the gasifier.

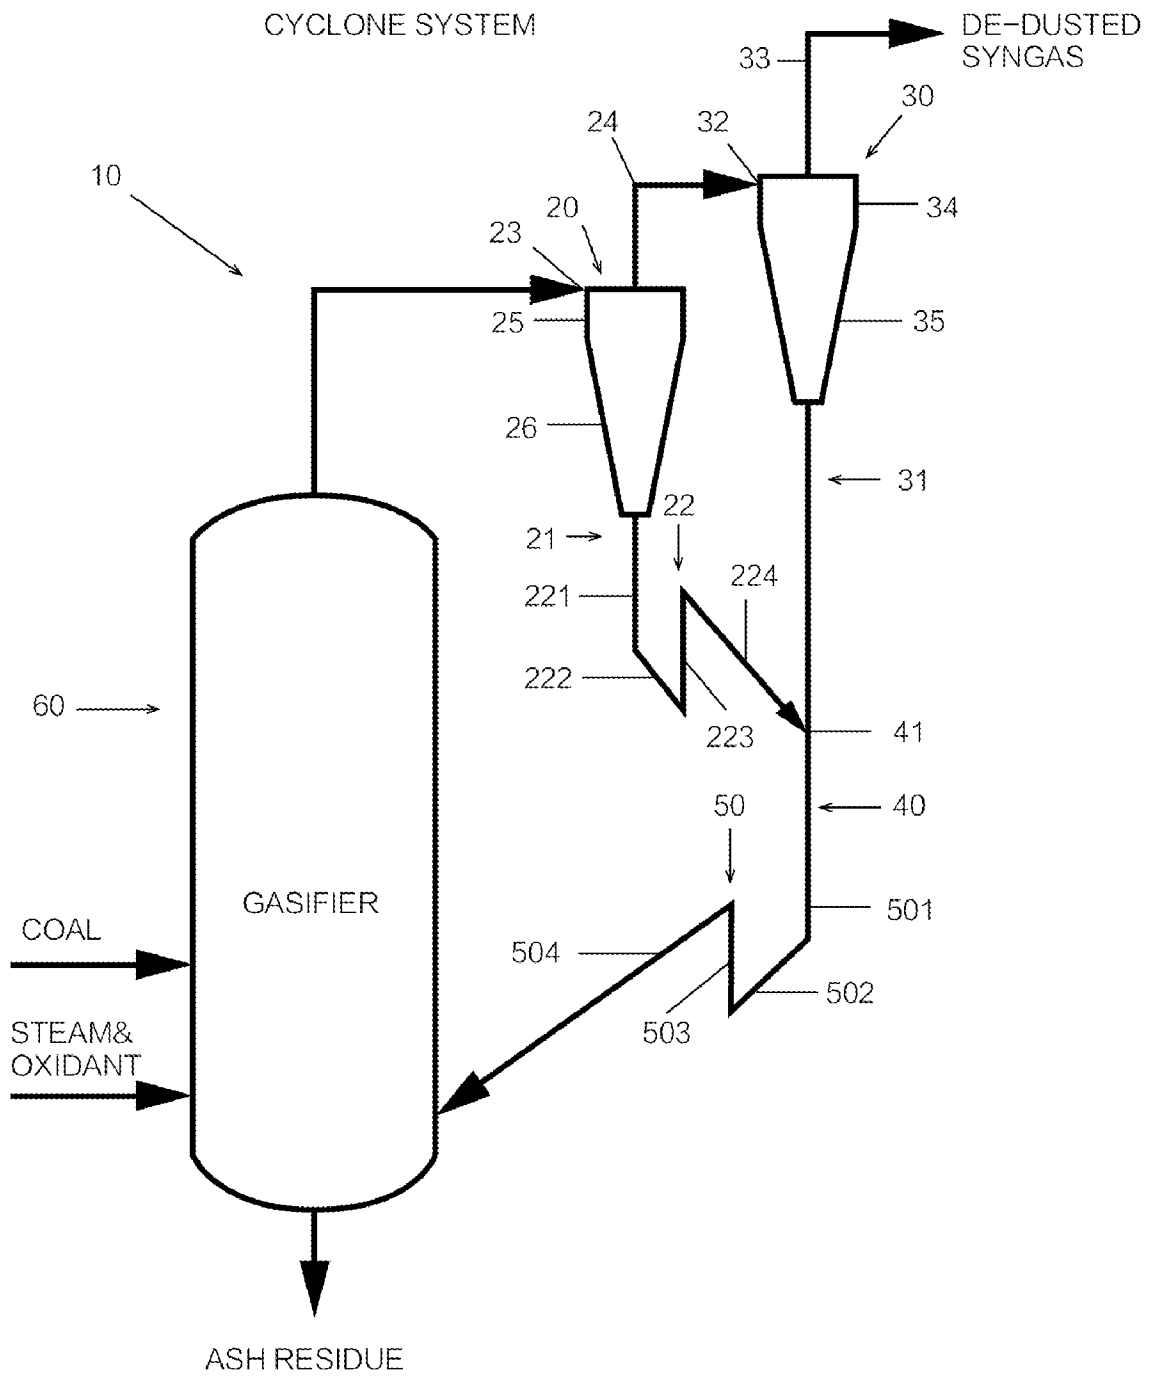


Figure 1. Overall Arrangement of Gasifier, Cyclones and Diplegs