

(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2011/08/01
(87) Date publication PCT/PCT Publication Date: 2012/02/09
(85) Entrée phase nationale/National Entry: 2013/01/29
(86) N° demande PCT/PCT Application No.: US 2011/046094
(87) N° publication PCT/PCT Publication No.: 2012/018713
(30) Priorité/Priority: 2010/08/02 (US61/369,855)

(51) Cl.Int./Int.Cl. *B29C 65/00* (2006.01),
A62C 35/68 (2006.01), *B32B 1/08* (2006.01),
B32B 15/08 (2006.01), *F16L 47/02* (2006.01)

(71) Demandeur/Applicant:
LUBRIZOL ADVANCED MATERIALS, INC., US

(72) Inventeurs/Inventors:
SILLASEN, KEVIN M., US;
DAUGHERTY, KEVIN B., US

(74) Agent: NORTON ROSE CANADA
S.E.N.C.R.L./S.R.L./LLP

(54) Titre : ENSEMBLE DE MANIPULATION DE FLUIDE COMPORTANT UN INSERT SOLIDE
(54) Title: A FLUID HANDLING ASSEMBLY HAVING A ROBUST INSERT

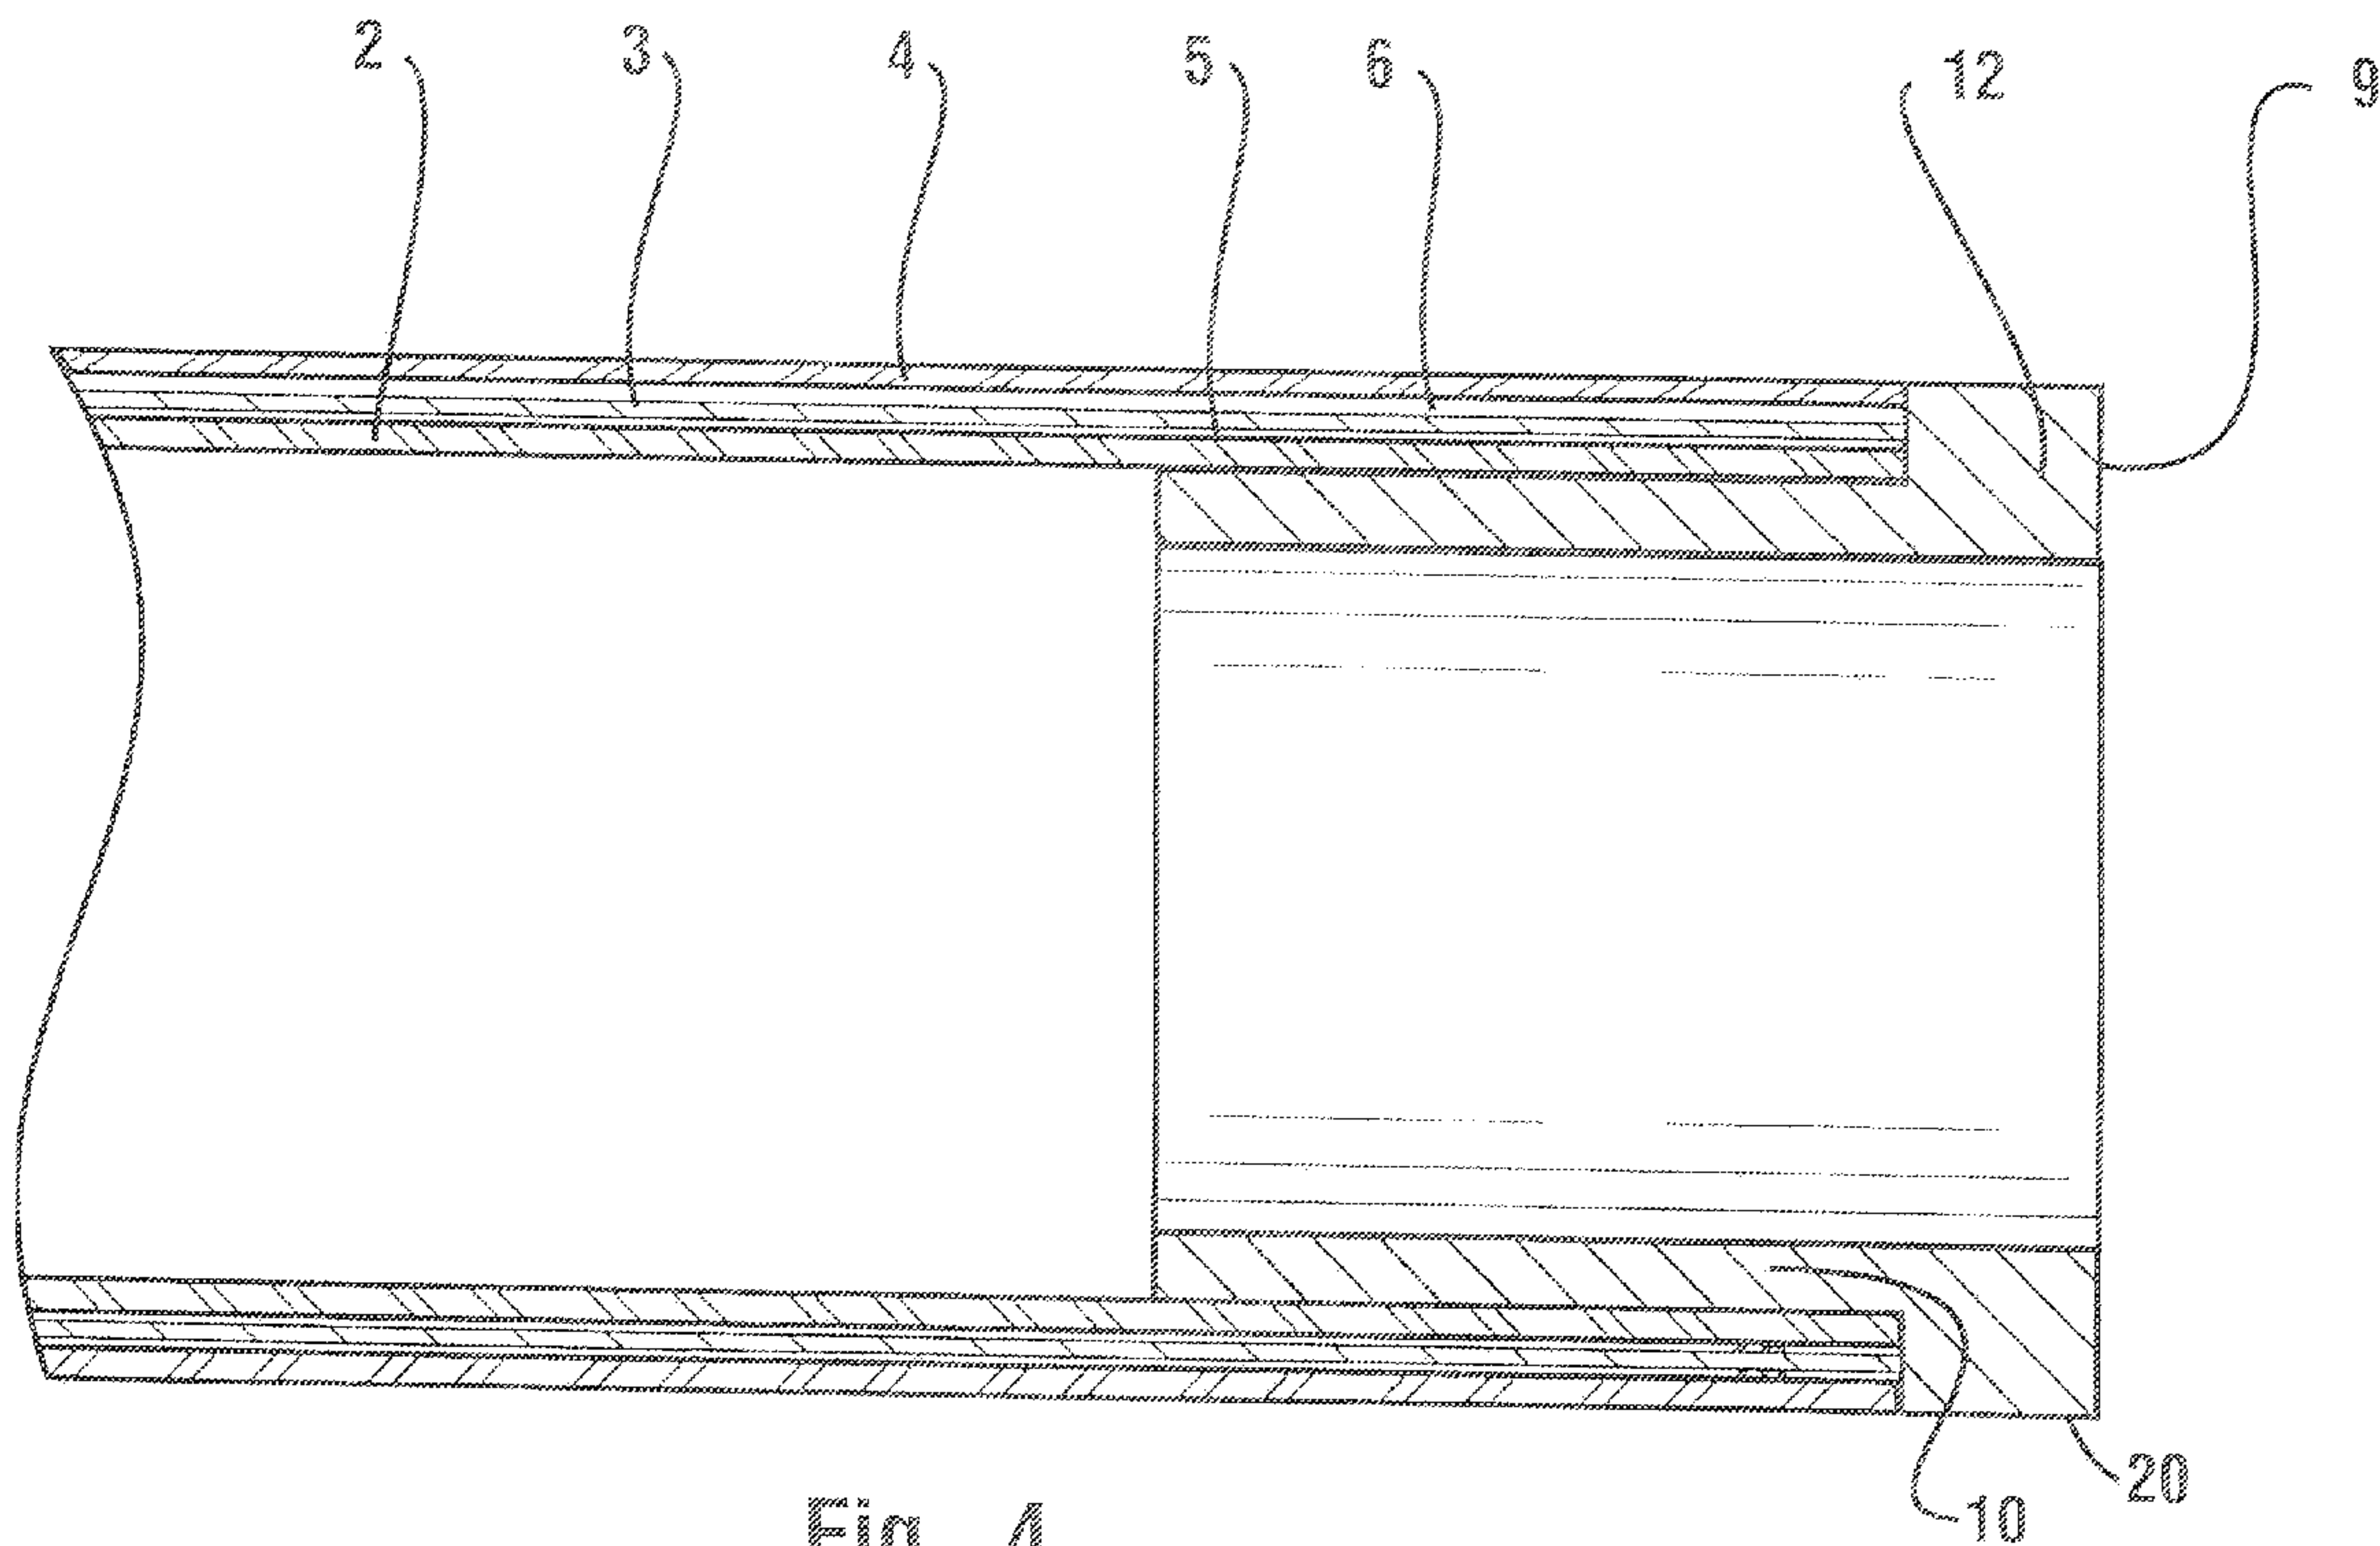


Fig. 4

(57) **Abrégé/Abstract:**

A fluid handling assembly provides conduits that deliver fluids therethrough. The fluid conduits include pipes, having an inner annular layer (2) of CPVC material, an intermediate annular layer (3) of metallic material and an outer annular layer (4) of CPVC material. Pipes are joined using inserts (9) that are engaged in cemented relation with a coupling. The inserts are configured to resist deformation at relatively high pressures that reduces the risk of separation of the layers of the pipe due to fluid infiltration between such layers.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 February 2012 (09.02.2012)

PCT

(10) International Publication Number
WO 2012/018713 A1

(51) International Patent Classification:

B29C 65/00 (2006.01) *B32B 1/08* (2006.01)
F16L 47/02 (2006.01) *B32B 15/08* (2006.01)
A62C 35/68 (2006.01)

(21) International Application Number:

PCT/US2011/046094

(22) International Filing Date:

1 August 2011 (01.08.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/369,855 2 August 2010 (02.08.2010) US

(71) **Applicant** (for all designated States except US): **LUBRI-ZOL ADVANCED MATERIALS, INC.** [US/US]; 9911 Brecksville Road, Cleveland, Ohio 44141-3247 (US).

(72) Inventors; and

(75) **Inventors/Applicants** (for US only): **SILLASEN, Kevin, M.** [US/US]; 2030 Columbia Road, Valley City, Ohio 44280 (US). **DAUGHERTY, Kevin, B.** [US/US]; 2979 Woodcrest Drive, Fairlawn, Ohio 44333 (US).

(74) **Agents**: **DEMAS, Christopher, P.** et al.; Legal Department, Mail Drop 022B, 29400 Lakeland Blvd., Wickliffe, Ohio 44092-2298 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) **Title**: A FLUID HANDLING ASSEMBLY HAVING A ROBUST INSERT

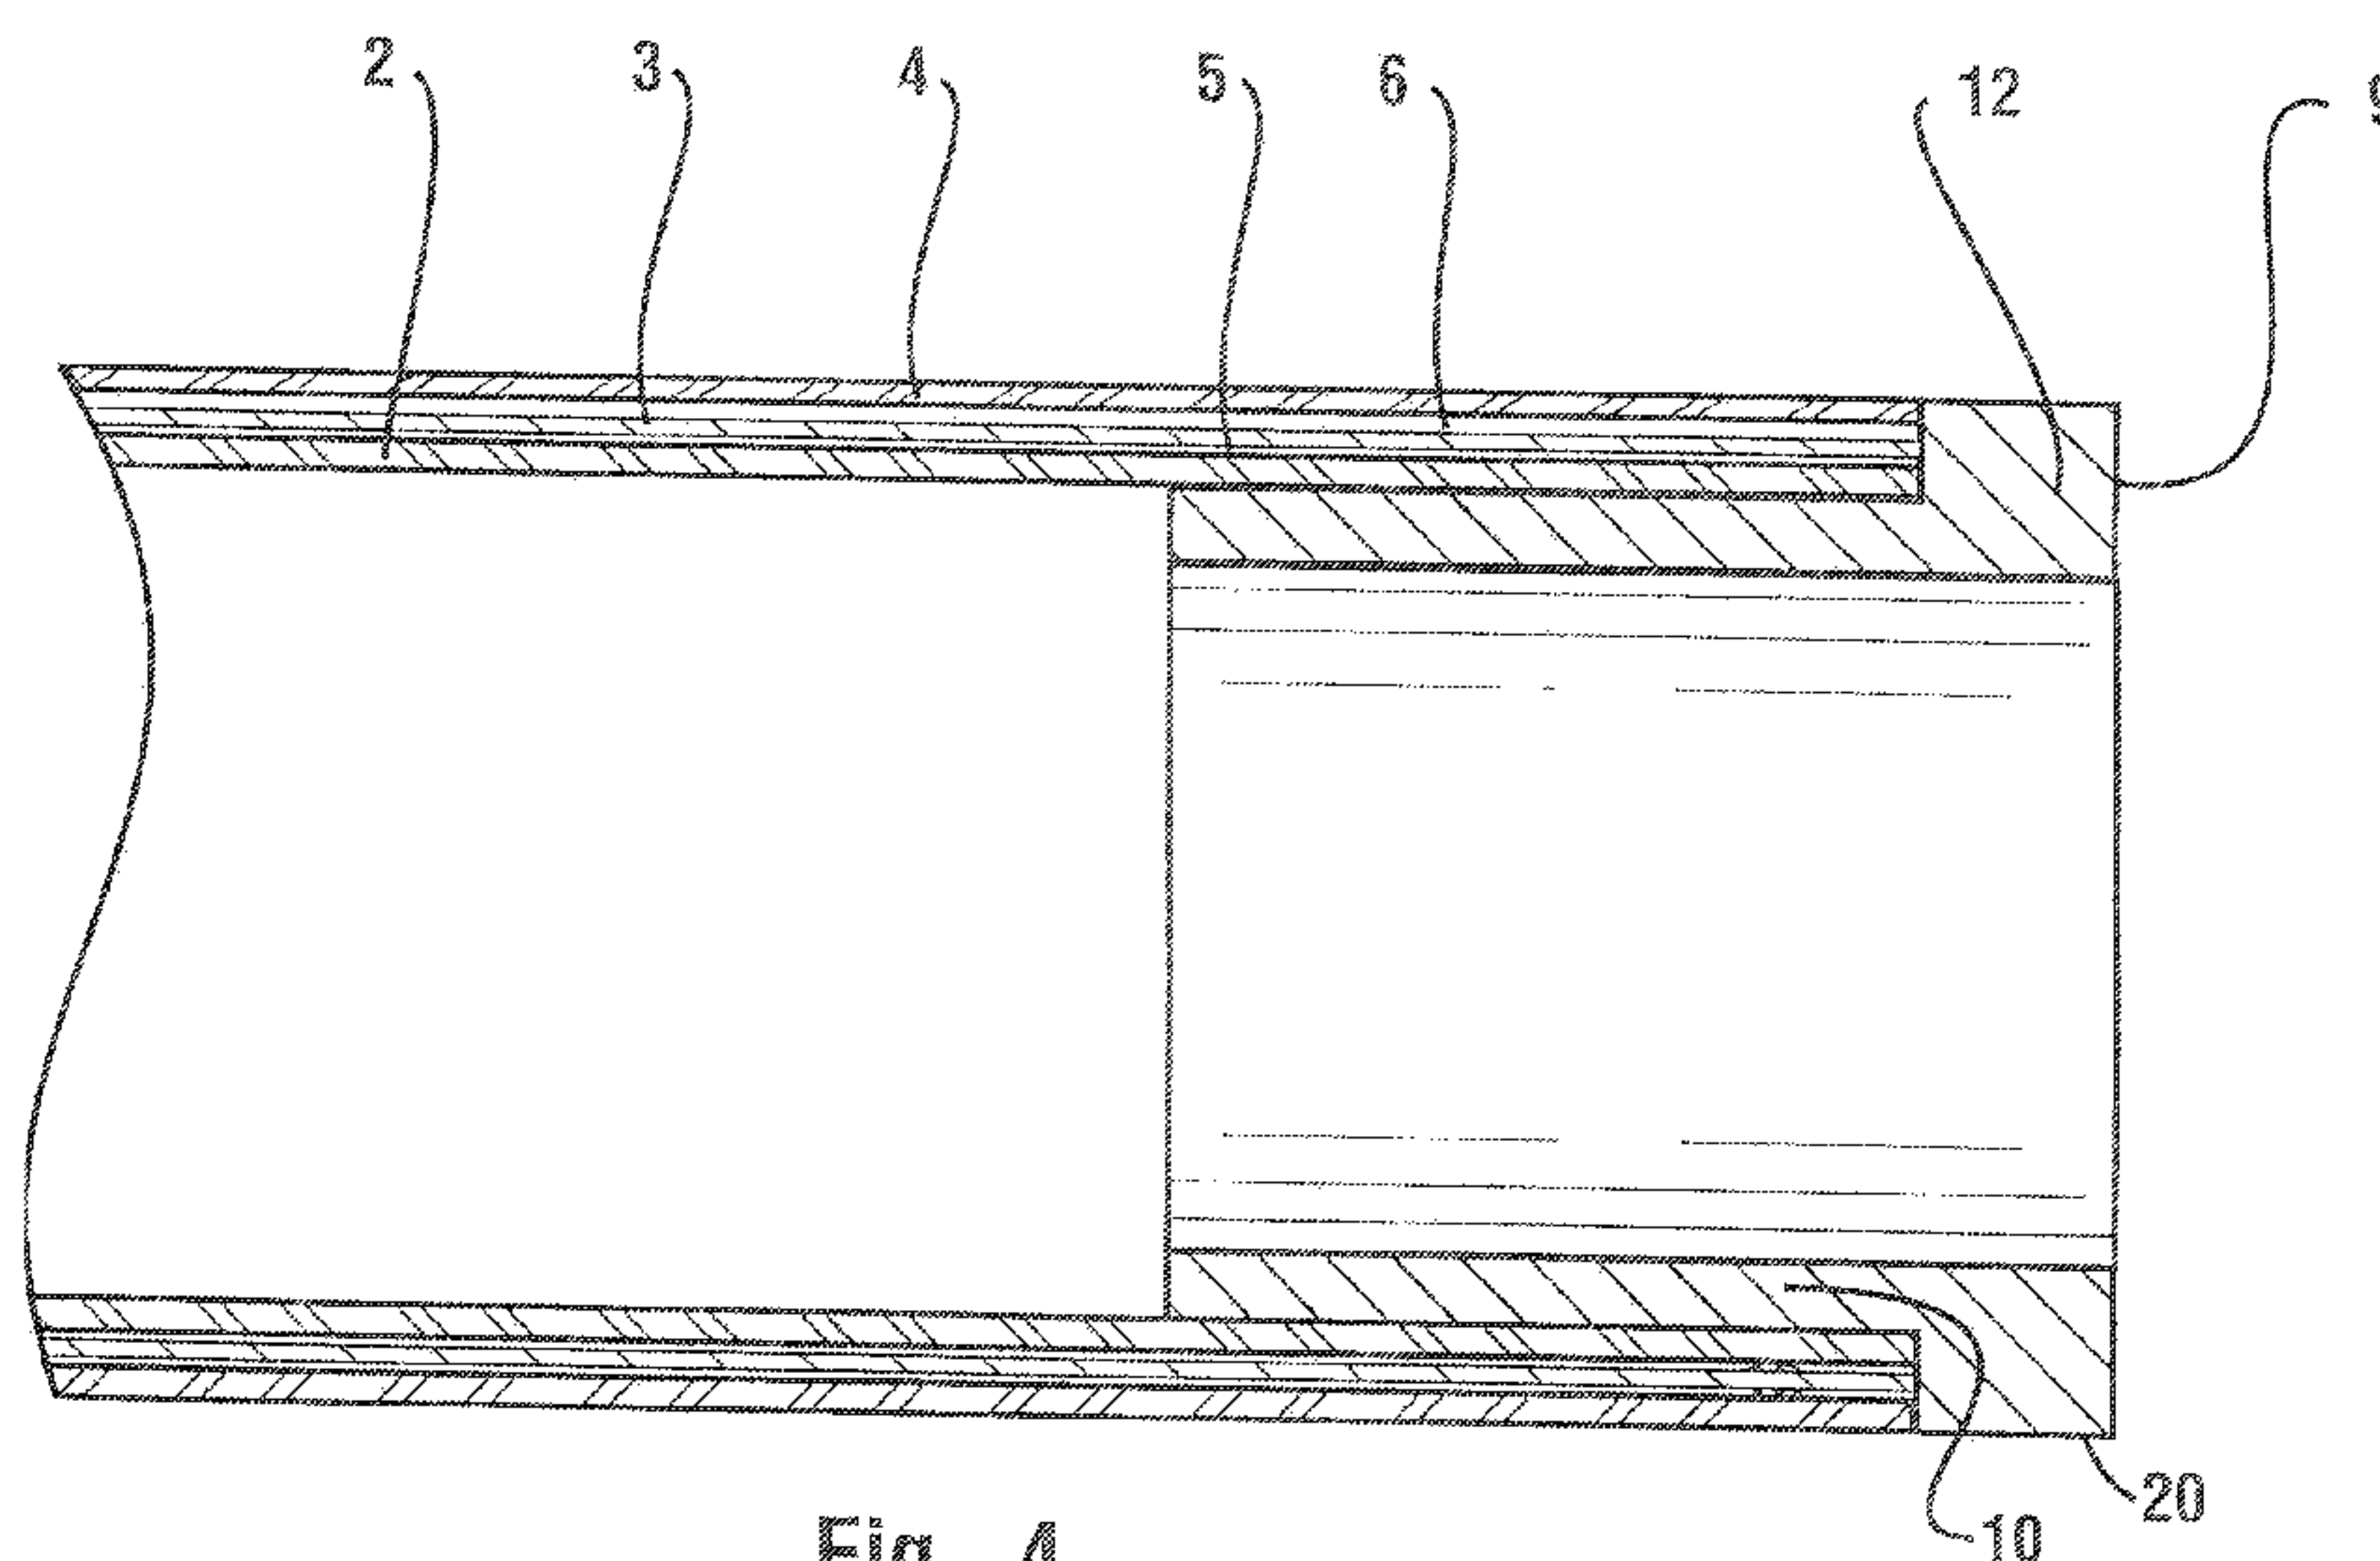


Fig. 4

(57) **Abstract**: A fluid handling assembly provides conduits that deliver fluids therethrough. The fluid conduits include pipes, having an inner annular layer (2) of CPVC material, an intermediate annular layer (3) of metallic material and an outer annular layer (4) of CPVC material. Pipes are joined using inserts (9) that are engaged in cemented relation with a coupling. The inserts are configured to resist deformation at relatively high pressures that reduces the risk of separation of the layers of the pipe due to fluid infiltration between such layers.

-1-

A FLUID HANDLING ASSEMBLY HAVING A ROBUST INSERT

TECHNICAL FIELD

[0001] The invention relates generally to a fluid handling assembly having a robust insert configured to be fitted in a CPVC pipe.

BACKGROUND

[0002] Many buildings are required by code to have fire suppression sprinkler systems. Further, residential structures are increasingly being provided with fire suppression systems. Chlorinated polyvinyl chloride ("CPVC") piping systems are ideally suited for fire sprinkler system applications because of their resistance to corrosion, the lightness of material, ease of installation, and other desirable properties. CPVC pipes may be in the form of a multilayer composite pipe. Fig. 8 illustrates a fluid handling assembly 29 that includes multilayer composite pipes 30. Each multilayer composite pipe 30 may comprise an inner layer 32 of CPVC, an intermediate layer 34 of metal that at least partly surrounds the inner layer 32, and an outer layer 36 of CPVC that at least partly surrounds the intermediate layer 34. Preferably, the intermediate layer 34 of metal completely surrounds the inner layer 32 and the outer layer 36 completely surrounds layer 34. This multilayer composite pipe 30 balances the properties of a metal pipe and a CPVC pipe that includes only CPVC. The CPVC piping system may also include fittings 38, 39 that connect the multilayer composite pipes together end to end. The fittings may comprise inserts which are alternatively referred to herein as bushings 38. Each insert 38 may include an open ended hollow body that is inserted into one of the multilayer composite pipes and a flange 40 that radially extends outwardly and surrounds the edge of the open end of the multilayer composite pipe 30.

[0003] When fluid is flowing at high pressure through pipes 30, the deformation of the flange 40 allows pressure to get behind the flange 40. This pressure may infiltrate between the layers and delaminate the outer layer 36 of CPVC and also push the other layers of the multilayer composite pipe 30 downstream relative to the outer layer 36, creating an undesirable delaminated bubbled area 42 on the pipe as seen in Fig. 8. Thus, a need exists for a durable fluid handling assembly having a fitting that is configured to connect a plurality of multilayer composite pipes together that can avoid this problem.

-2-

ASPECTS OF EXEMPLARY EMBODIMENTS

[0004] An exemplary embodiment includes a fluid handling assembly comprising a first pipe. The first pipe comprises an inner layer comprising a CPVC composition, an intermediate layer comprising a metal at least partially, and preferably completely, surrounding the inner layer, and an outer layer comprising a CPVC composition at least partially, and preferably completely, surrounding the intermediate layer. The fluid handling assembly further comprises a first insert having an open ended hollow cylindrical body with an extending flange which radiates outwardly from an end of the open ended hollow cylindrical body. The body has an outer diameter less than an inner diameter of the first pipe such that the insert fits inside the first pipe. The flange is configured to be non-deformable when a fluid pressure acting in the first pipe is at 551 psi, or less.

[0005] In another aspect of the exemplary embodiment, a fluid handling apparatus comprises an insert having an open ended hollow cylindrical body with an extending flange which extends radially outward from the end of the open ended hollow cylindrical body. The body has an outer diameter less than an inner diameter of a pipe such that the insert can be extended inside the pipe. The insert (bushing) preferably has an outer diameter which is slightly tapered such that the outer diameter near the flange is larger than the outer diameter further away from the flange. The taper will normally be from about 0.4° to 4° to the horizontal. The taper facilitates the adhering of the bushing into the pipe as the taper keeps the adhesive from being wiped away when the bushing is inserted into the pipe. The pipe comprises an inner layer comprising a CPVC composition and an intermediate layer comprising a metal at least partially, preferably completely, surrounding the inner layer. The pipe further comprises an outer layer comprising a CPVC composition at least partially, preferably completely, surrounding the intermediate layer. The flange is configured to be non-deformable when fluid flows pressure in the pipe is at about 551 psi or less.

[0006] Other aspects of exemplary embodiments will be made apparent in the following detailed description of exemplary embodiments and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The foregoing summary, as well as the following detailed description of exemplary embodiments, will be better understood when read in conjunction with the

-3-

appended drawings. For the purpose of illustration, there is shown in the drawings certain exemplary embodiments. It should be understood, however, that the invention is not limited to the precise arrangements and instrumentalities shown in the drawings or described herein:

[0008] FIG. 1 is a sectional view of the composite pipe of the fluid handling assembly of an exemplary embodiment;

[0009] FIG. 1A is a sectional view of a composite pipe of the fluid handling assembly of the exemplary embodiment which is bent;

[0010] FIG. 2 is a depiction of the fluid handling assembly showing the multilayer composite pipe without an insert and the fitting joined together;

[0011] FIGS. 3A, 3B, and 3C are schematic views of the insert bushing of the fluid handling assembly that is used to join the multilayer composite pipe with the fittings;

[0012] FIG. 4 is a cross sectional view of the insert bushing and the multilayer composite pipe as joined together;

[0013] FIG. 5 is a schematic view of one possible embodiment to manufacture the multilayer composite pipe;

[0014] FIGS. 6A and 6B are cross sectional views of a modified fitting which can be used;

[0015] FIG. 7 is a cross sectional view of the fluid handling assembly showing multilayer composite pipes, a fitting, and inserts of the exemplary embodiment; and

[0016] FIG. 8 is a cross sectional view of a prior art fluid handling system.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

[0017] Turning now to the drawings, the exemplary embodiment is a fluid handling assembly 11 as seen in FIG. 7 that comprise a multilayer composite pipe 1, a fitting 7, and an insert or bushing 9. The multilayer composite pipe 1, as shown in FIG. 1, comprises an inner layer 2 formed into hollow conduit, a metallic intermediate layer 3, which surrounds the inner layer 2, and an outer layer 4 composed of an amorphous thermoplastic polymer surrounding the metallic intermediate layer. An adhesive layer 5 extends between the outer surface of the inner layer 2 and the inner surface of the metallic intermediate layer 3. A second adhesive layer 6 extends between the outer surface of the metallic intermediate layer 3 and the inner surface of the outer layer 4.

-4-

[0018] The hollow inner conduit is formed by a hollow length of a pipe having a completely closed tubular outer surface and an opposing closed tubular inner surface. The hollow inner conduit can be made either from a rigid semi-crystalline thermoplastic plastic or a rigid amorphous thermoplastic.

[0019] A rigid amorphous thermoplastic material is a thermoplastic material which can be stretched beyond its yield point. A rigid amorphous thermoplastic as used herein is a thermoplastic material having a modulus of elasticity, either in flexure or in tension, greater than 300,000 psi at 23°C. and 50% relative humidity when tested in accordance with ASTM Test Methods D790, D638, or D882. Generally, amorphous polymers have less than 15 percent crystallinity. Further information on amorphous thermoplastic polymers can be found in Alfrey, Jr., Mechanical Behavior of High Polymers, John Wiley & Sons, Inc., (New York, 1965), pp. 510-515.

[0020] Examples of some suitable amorphous thermoplastics which can be used to form the first layers as defined herein include chlorinated polyvinyl chloride ("CPVC"), polyvinyl chloride ("PVC"), polyvinylidene fluoride ("PVDF"), polyether sulfone and polyphenyl sulfide, polycarbonate, acrylics such as methyl methacrylate, and styrenics such as acrylonitrile styrene butadiene polymers ("ABS"). The most preferred amorphous thermoplastic is CPVC.

[0021] Generally, the thickness of the inner hollow conduit will be dependent upon the desired final thickness of the thermoplastic composite pipe. Preferably, the outer diameter of inner hollow conduit should be greater than the bore of the pipe by at least 0.1 mm. The most preferred amorphous thermoplastic used to form the hollow inner conduit is CPVC. In one exemplary embodiment, the CPVC is one to two times as thick as the metallic intermediate layer. In the most preferred embodiment, the CPVC layer is 1.5 times as thick as the metallic intermediate layer. In the most preferred embodiment, the CPVC forming the hollow inner conduit has a thickness of approximately 0.6 mm. The hollow inner conduit is preferably formed by an extrusion process although any other suitable process may be used to form the hollow conduit.

[0022] The first adhesive layer used between the outer surface of the inner layer 2 and the inner surface of the metallic intermediate layer 3 is any suitable bonding agent that can be used to permanently bond the thermoplastic polymer forming the inner hollow conduit to the metallic intermediate layer 3. The adhesive is necessary since the

-5-

thermoplastic material of the inner hollow conduit itself generally will not bond to the metallic inner layer. Preferably, the bonding agent can adapt to different coefficients of thermal expansion due to the differences in the materials between the two layers. The adhesive can be sprayed, extruded, brushed or applied in any manner to the outer surface of the inner hollow conduit. If the adhesive is sprayed, the adhesive can be diluted if so recommended by the manufacturer. The first adhesive is preferably applied to the entire outer surface of the inner layers. Alternatively, the first adhesive layer can be applied as a series of rings evenly spaced around the outer surface of the inner layers. Generally, the first adhesive is applied to yield a layer having a thickness of about 0.01 mm to about 0.5 mm. The preferred thickness of the first adhesive layer is about 0.1 mm. The most preferred method to apply the adhesive is to coat both sides of the metallic intermediate layer 3 with the adhesive prior to the metallic intermediate layer 3 contacting inner layer 2 or outer layer 4.

[0023] The first adhesive can be any suitable adhesive material. Examples of suitable adhesives include polyvinyl chloride and polyvinyl chloride copolymers, polyurethanes or other isocyanide based polymers, chloroprene and its copolymers, epoxides, acrylates, polyethylene copolymers. If polyethylene copolymers are used, it is preferred that the co-monomer is a vinyl acetate or maleic anhydride. The preferred adhesive layer when used in conjunction with a CPVC inner hollow conduit is an adhesive applied to both sides of the metallic layer. The adhesive is commercially available from Mercurial Corp. of Colmar, France and is known as CIRE-10B. The adhesive is believed to be a bilayer adhesive selected from (i) a thermosetting epoxy with a high molecular weight polyester adhesive for a primer layer, and a heat-activatable, crosslinkable polyurethane top coat, (ii) an acetophenone-formaldehyde resin, optionally modified with epoxy, and (iii) an anti-corrosion primer based on an epoxy-modified high molecular weight copolyester-urethane polymer along with a top coat based on a high molecular weight crosslinked copolyester-urethane polymer. The bilayer adhesive on the metallic layer is dried to form a solvent free dry adhesive before being used in the construction of the composite pipe. The adhesive has a thickness of from about 10 to about 50 micrometers. The adhesive is heat activated by heating to a temperature above 48.9°C (120°F). The heat activation occurs during the process of producing the pipe.

-6-

[0024] The intermediate layer 3 of the multilayer composite pipe can be formed from any suitable metallic material, provided that it has a tensile strength that is greater than the tensile strength of the plastic. Examples of suitable metallic intermediate layers include ferrous materials, copper, stainless steel, brass, and aluminum materials. In addition, alloys can be used so long as they provide support to the thermoplastic materials used to form the inner and the outer layers of the composite pipe structure.

[0025] The metallic intermediate layer 3 is preferably made from a smooth metallic material. Generally, the thickness of the metallic intermediate layer should be in the range of 0.01-40 mm. Preferably, the thickness can be in the range of 0.1 to 4.0 mm and with a thickness of about 0.3 to about 1.5 being more preferable. The value of about 0.4mm being the most preferred for aluminum. For a steel metallic layer, the thickness of about 1.0mm is preferred. The metallic intermediate layer can be in the form of a conduit with open ends which surrounds the inner hollow conduit. Alternatively, as described below in further detail, the metallic intermediate layer can be formed from metal sheeting wrapped around the inner hollow conduit. The sheeting material can be joined together by a method such as welding. When it is desired to make a pipe which is bendable, the most preferred material used as the metallic intermediate layer is aluminum. For non-bendable pipe, such as fire sprinkler pipe, steel is the preferred metal used. If the metallic layer is not welded, it may be overlapped when placed around the inner layer 2. The metallic intermediate layer can overlap due to wrapping of the metal at an angle or just plain overlapping of the metal in which opposing sides of the material abut each other. Preferably, when aluminum is used, the thickness is in the range of 0.5 to 5.0% of the outer diameter of the multi-layer composite pipe. In the most preferred embodiment, the aluminum layer is about 0.4 mm thick, and the steel layer is about 1.0mm thick.

[0026] A second adhesive layer is used in the multilayer composite pipe and is placed on the outer surface of the intermediate layer 3. This adhesive used in the intermediate layer can be any suitable bonding agent that can be used to permanently bond the outer surface of the metallic intermediate layer to the inner surface of the outer thermoplastic layer 4. Preferably, the bonding agent can adapt to different coefficients of thermal expansion due to the differences in the materials between the two layers. The adhesive can be sprayed, brushed, extruded, or applied in any manner to the surface. The

-7-

adhesive can be applied to the entire outer surface of the intermediate layer 3.

Alternatively, the adhesive layer can be applied as a series of rings evenly spaced around the outer surface of a second material. The adhesive is applied generally to a thickness of about 0.01 to about 0.5 mm, preferably, about 0.1 mm. The most preferred method is to apply the adhesive to both sides of the metal layer as described above for the first adhesive layer.

[0027] This second layer of adhesive is preferably the same as the first layer of the adhesive used between the outer surface of the inner hollow conduit and the inner surface of the second layer. Alternatively, the adhesive can also be different so long as a bond is established between the outer surface of the metallic intermediate layer and inner surface of the third layer. Examples of suitable adhesives include polyvinyl chloride and polyvinyl chloride copolymers, polyurethanes or other isocyanate based polymers, chloroprene and its copolymers, epoxides, acrylates. The preferred adhesive layer when the third layer is chlorinated polyvinyl chloride is the CIRE-10B from Mercurial Corp. as described above for the first adhesive layer. The methods of application as well as the thickness used for this second adhesive layer are as described above with respect to the first adhesive layer.

[0028] The outer layer of the multilayer composite pipe is formed from a rigid plastic, as defined above. Preferably, the outer layer is comprised of a rigid plastic which is an amorphous thermoplastic polymer. Suitable amorphous thermoplastics which can be used to form the outer layer of the multilayer composite pipe as defined herein include chlorinated polyvinyl chloride ("CPVC"), polyvinyl chloride ("PVC"), polyvinylidene fluoride ("PVDF"), polyether sulfone and polyvinylidene sulfide polycarbonate, acrylics such as methyl methacrylate, and styrenics such as acrylonitrile styrene butadiene ("ABS"). In one exemplary embodiment, the outer layer of the multilayer composite pipe can be made from the same material as the inner hollow conduit. Alternatively, in some embodiments the outer layer can be made from a different amorphous thermoplastic material than the inner layer forming the hollow conduit if the inner layer is made from an amorphous thermoplastic material. However, care must be taken in choosing the materials to ensure that the multilayer composite pipes can be joined together to form a composite system. Generally, the thickness of the outer layer will be dependent upon the desired final thickness of the multilayer

-8-

composite pipe. Preferably, the outer layer will have a thickness as compared to the metallic intermediate layer in the range of 1:5 to 5:1. Preferably, thickness of the outer layer when compared to the metallic intermediate layer is in the ratio of 1:3 to 3:1. In the most preferred embodiment of the multilayer composite pipe, the outer layer is formed from CPVC. In the most preferred embodiment, the CPVC outer layer and inner layer each has a thickness of approximately 0.6 mm. If the composite pipe is intended to be bendable the inner and outer layer of CPVC should not be greater than about 3.18mm (0.125") CPVC which is thicker than about 3.18mm has a tendency to crack in the radius of the bend. Also, the thickness of the inner and outer layer should not be less than about 0.6mm as a thickness thinner than about 0.6mm is too thin to be reliably solvent cemented. If the composite pipe is not intended to be bendable, such as a fire sprinkler pipe using a steel metal layer, the inner and outer layer of CPVC can be thicker than with a bendable pipe. A minimum thickness is still necessary to assure good solvent cementable pipe, as stated above.

[0029] Preferably, the multilayer fluid conduit is provided with outer diameters conforming to nominal piping or tubing outer dimensions, which can be copper tube sizes (CTS) or iron pipe sizes (IPS), such as, for example, Schedule 40 and/or 80 as defined in ASTM F438 or SDR 11 or defined in ASTM D2846 or other ASTM standards or DIN 8063, and 8079 standards and/or BS 7291 standards. This is preferred so that fittings can be used in a multilayer fluid conduit system of the exemplary embodiment. Pipe and tubing are normally sized by specified outer diameters. The fittings with which they are used are sized internally in relation to the standard outer diameters specified for the pipes to be received in the fittings. The only limitation in size of the multilayer composite pipe of the exemplary embodiment is the ability to bend the pipe, if such a bend is desired. That means that the diameter of the composite pipe cannot be so large that the composite pipe structure cannot be bent. A schematic example of a bent pipe of the exemplary embodiment is shown in FIG. 1A. However, all the layers should be sufficiently thick to provide the strength and rigidity needed for a safe, leak proof system for the intended uses composite pipe in a fluid conduit system, whether the fluid is a gas or a liquid, or a slurry.

[0030] An exemplary embodiment comprises a multilayer composite pipe in which the inner layer 2 forming the hollow conduit is made from CPVC. The metallic

-9-

intermediate layer 3 is aluminum foil, and the outer layer 4 is also CPVC. The thickness of the aluminum layer is equal to about 1 to about 5 percent of the outer diameter of the multilayer composite pipe. The chart listed below illustrates the various pipe sizes. The measurement of the layers as well as the total measurement is listed in mm. The pipe sizes are based on the DIN 8079 Standard.

Pipe Size (diameter)	CPVC inner layer thickness	Aluminum layer thickness	CPVC outer layer thickness	Total wall thickness
16	0.6	0.4	0.6	1.6
20	0.6	0.4	0.6	1.6
25	0.6	0.4	0.6	1.6
32	0.6-1.0	0.4-0.8	0.6-1.0	1.6-2.8
40	0.6-1.0	0.4-0.8	0.6-1.0	1.6-2.8
50	0.6-1.5	0.4-0.8	0.6-1.5	1.6-3.8
63	0.6-1.5	0.4-0.8	0.6-1.5	1.6-3.8

[0031] Most preferably, the aluminum layer is 1.5% of the outer diameter of the pipe. The ratio of the thickness of either CPVC layer to the thickness of aluminum in the pipe is 1:5 to 3:1. Most preferably, the ratio of the thickness of the CPVC to the thickness of aluminum in the preferred multilayer composite pipe is 3:2. The adhesive used in this exemplary embodiment on both sides of the metallic intermediate layer is an adhesive compatible with CPVC such as CIRE-10B, available from Mercurial Corp., as described above in further detail.

[0032] FIG. 2 diagrammatically depicts a portion of a fluid conduit system of the exemplary embodiment incorporating a multilayer composite pipe. A plurality of the multilayer composite pipes of the exemplary embodiment is connected end to end by a plurality of joints and/or fittings 7. These joints and/or fittings include, but are not limited to, adapters, straight couplings, elbows, bushings, crosses, caps, plugs, flanges, and/or unions.

[0033] In one exemplary embodiment, fittings or mechanical joints can be used to join the multilayer composite pipe. Examples of mechanical joints which can be used include push fit fittings to provide a leak proof joint or to provide a leak proof assembly.

-10-

Examples of suitable push fit fittings include the Universal fitting from Genova Plastics, Part PI from John Guest as well as Straight Coupling TI part from IMI Yorkshire fittings.

[0034] With the non-mechanical types of fittings, solvent cements can be used. Any solvent cement applicable to the particular materials used to form the multilayer composite pipe and the fitting can be used. Alternatively, a heat fusion bonding system can be used to join the fitting with the multilayer composite pipe. Such systems are described in the ASTM F412, under the definition of heat fused joints. Any suitable heat fusion bonding method can be used. The fitting 7 shown in Figs. 2 and 7 generally includes a hollow cylindrical body 14 having a continuous annular land 16 formed on an inner surface 18 of the body that extends radially inwardly.

[0035] In another exemplary embodiment, as shown in FIGS. 6A and 6B, the fittings can be modified to contain a lip portion 8 that extends axially out from the interior of the fitting to matingly join the inner surface of the hollow tube conduit which forms the inner layer. A solvent cement material can be used to join this type of fitting to the multilayer composite pipe. Although this type of fitting can be used, it is not the preferred fitting for solvent cementing because the hydraulics of the solvent cement may prevent the pipe from completely entering the joint (weakening the resulting cemented joint).

[0036] FIGS. 3A, 3B and 3C illustrate the exemplary insert or bushing 9 which is used to join the multilayer composite pipe and fittings (either conical or cylindrical). The insert 9 comprises an open ended, hollow cylindrical body 10 with a radially extending flange 12 which radiates outwardly from the end of the body 10. The outer diameter of the inner hollow body 10 of the insert 9 should be slightly less than the inner diameter of the multilayer composite pipe 1, provided, however, that the difference in the outer diameter of the pipe 1 and the inner diameter of the pipe 1 does not exceed that suggested in ASTM D2846.

[0037] The exemplary flange 12 is configured to have the same outer diameter as the multilayer composite pipe 1. An adhesive can be used to permanently bond the inner surface of the multilayer composite pipe to the outer surface of the hollow cylindrical body 10 of the insert 9. Preferably, this insert 9 is made from the same material as the inner hollow conduit 2. The flange 12 of this insert 9 has a minimum thickness greater than 0.056 inch, and preferably greater than 0.1 inch, in the axial direction for a 2 inch

-11-

IPS fire sprinkler pipe. The preferred thickness of flange 12 as shown by line A in FIG. 3A is about 0.25 inch or more for pipe sizes up to 4 inches in diameter. For larger diameter pipes, the thickness of flange 12 may need to be thicker to withstand the force exerted, especially if high pressure is present in the piping system, as can be well understood by those skilled in the art. For example, for a 4 inch diameter pipe (and intermediate sizes up to less than 6 inches), the thickness of flange 12 (line A) should be about 0.25 to about 0.5 inch. For a 6 inch diameter pipe (and intermediated sizes less than 8 inches), the thickness of flange 12 should be about 0.3 to 0.6 inch and for an 8 inch diameter pipe (and intermediate sizes less than 12 inches), the thickness of flange 12 should be about 0.4 to 0.8 inches. The thickness of flange 12 is very much dependent on the pressure the pipe is designed to carry and on the diameter of the pipe. The thickness of flange 12 should be sufficient to prevent deformation at the designed pressure the pipe needs to withstand.

[0038] FIG. 7 illustrates the exemplary fluid handling assembly 11 comprising first and second inserts 9, the fitting 7, and multilayer composite first and second pipes 1 assembled together. The body 10 of the first insert 9 is inserted into the first pipe 1 until the flange 12 abuts the annular edge of the open end of the first pipe 1. Likewise, the body 10 of the second insert 9 is inserted into the second pipe 1 until the flange 12 abuts the annular edge of the open end of the second pipe 1. Adhesive such as a solvent cement may be applied between the inner hollow conduit 2 of the first and second pipes 1 and the hollow cylindrical body 10 of the inserts 9 to bond the inserts 9 to their respective pipes 1 as previously mentioned. The coupling fitting 7 is secured, such as with solvent cement, to the first and second pipes 1 to join them together. The land 16 of the fitting 7 is positioned between the flange 12 of the first insert 9 and the flange 12 of the second insert 9. Each flange 12 has an outer surface 20 at the peripheral edge of the flange 12 that abuts the inner surface 18 of the fitting 7. Adhesive such as solvent cement may be applied between the flanges 12 and fitting 7 to secure the inserts 9 to the fitting 7.

[0039] A flow test performed on this fluid handling assembly 11 using a 2 inch IPS size fire sprinkler pipe assembly which used a 1.0mm steel layer revealed that for each of the first and second flanges 12 (having a thickness of 0.25 inch), the flange 12 did not longitudinally deform when a fluid pressure was applied in the first and second pipes at

-12-

about 551 psi for six minutes. Another flow test performed on this fluid handling assembly 11 revealed that for each of the first and second flanges 12 (having a thickness of 0.25 inch), the flange 12 did not longitudinally deform when a fluid pressure was applied in the first and second pipes 1 at about 403 psi for four hours. A comparative test was performed with a flange 12 having a thickness of 0.05 inch (prior art) and the flange 12 did longitudinally deform and caused delamination in the pipe to create a bubble 42 as shown in FIG. 8.

[0040] This exemplary configuration insert 9 significantly reduces the likelihood of the above-mentioned delamination of the outer layer 4 of the pipe 1 and movement of the other layers of the pipe longitudinally downstream relative to the outer layer 4 under the above-mentioned high fluid pressure conditions. This is due to the configuration which includes the relatively high axial thickness of the flange 12 which makes the flange not readily deformable. Further, the relatively high axial thickness of the flange 12 presents a substantial surface area about the periphery of the flange 12 that can be bonded to the inner surface 18 of the fitting 7. This relatively large surface area reduces the risk of an occlusion that would allow the pressure to migrate backwards and delaminate the outer layer 4 and move the other layers of the pipe 1 downstream.

[0041] The solvent cement used in exemplary embodiments to bond the inner layer 2 forming the hollow conduit with the hollow cylindrical body 10 of the insert 9 can be any suitable bonding agent that can be used to permanently bond them together. The solvent cement can be sprayed, brushed or applied in any manner to the outer surface of the insert. Alternatively, the solvent cement can be applied to the inner surface of the hollow inner conduit. Any solvent cement can be used provided a suitably strong bond is established between the desired surfaces. The preferred adhesive layer complies with the requirements of ASTM F493 if the first and third layers of the multilayer composite pipe are CPVC. Examples of suitable solvent cements are CPVC solvent cements available from IPS, Oatey, Verhagen and/or Henkel. The multilayer composite pipe with an insert may be joined with a fitting with the use of a bonding agent as shown in the cross sectional view of FIG. 4.

[0042] Any type of bonding agent suitable for thermoplastic materials can be used to join the multilayer composite pipe containing an optional insert with a fitting provided that the bonding agent permanently bonds the surface of the multilayer composite pipe to

-13-

the surface of the fitting and provides for a leak-free joint. For CPVC pipe, exemplary bonding agents include one-step solvent cements and two-step solvents cements.

Examples of suitable bonding agents for multilayer composite pipes that contain CPVC include those which comply with the requirements of ASTM F493 and remain leak proof. The bonding agents are applied directly and are suitable for ambient temperature use (0°F. (-18°C.) to 210°F. (99°C.)).

[0043] In an exemplary embodiment, the multilayer composite pipe using aluminum as the metal layer can be bent anywhere from 1° to 180°. The degree of bonding for the composite pipe of this invention is dependent on the size of the pipe (diameter), the thickness of the metal layer, and the thickness of the inner and outer CPVC layers. For a 0.75 inch diameter pipe with a 0.4mm aluminum layer and 0.6mm CPVC inner and outer layer, the pipe can be easily bent to 90° with a radius of the bend of 4.5 inches. The multilayer composite pipe can be bent by any means which can be used to form a small radius bend so long as such means does not cause the pipe to kink. Preferably, a tube bender is used to bend the multilayer composite pipe structure. A tube bender available to those in the art for bending metal pipe can generally be used. For example, Tube Bender H824 from the Lakeland Manufacturing Company, as well as a Greenlee 181 Conduit Bender from the Greenlee Company can be used. A bent composite pipe is shown in FIG. 1A.

[0044] In an alternative exemplary embodiment, the multilayer composite pipe, as well as, the insert is heat fused to the fitting. That is, the thermoplastic layers are heated to a temperature above those at which the material softens. The layers of the composite pipe (as well as the insert) are then joined to the fitting. Various known suitable heat fusion technique can be used. U.S. Patent Application 2009/0139661 A1 shows in detail the preferred process for making the composite pipe, and is incorporated by reference herein in its entirety.

[0045] FIG. 5 depicts in block form the exemplary steps of one method for fabricating the multilayer composite pipe. Machines that perform these steps are commercially available from Nexane Deutschland GmbH.

[0046] Referring to FIG. 5, there is diagrammatically illustrated the preferred process for making the multilayer composite pipe 1 using CPVC and a metal inner layer. The other components of the fluid handling assembly 11, such as inserts (bushings), fittings,

-14-

and the like are made by conventional injection molding with appropriately configured dies.

[0047] Except for the step of trimming the edges of an adhesive-coated metal strip, coated on both sides, which step may be undertaken independently of the other processing steps, provided the strip is trimmed just prior to feeding it to a metal forming and welding step, the process steps are sequential, and are as follows:

[0048] Extruding the inner layer of CPVC:

[0049] Powder or pellets of CPVC composition are fed from a hopper into a twin screw extruder operating at a temperature in the range from 193°C to 204°C (280°F to 420°F) to produce an extrudate having the desired thickness and outside diameter.

[0050] Cooling the inner layer of CPVC.

[0051] The hot inner layer is vacuum sized in a sizing die and sleeve to control the outside diameter of the inner layer within the desired limits, and extruding through a pipe die to produce a thin walled pipe. The sized inner layer is then cooled to a temperature in the range from 21°C to 37.74°C (70°F to 100°F). Preferably, the cooled inner layer is drawn through a dancing roll to control the diameter and thickness before the inner layer is fed to a metal forming and welding machine.

[0052] Feeding the metal strip to a trimmer.

[0053] The edges of the metal strip, coated on both sides with an adhesive, preferably a bilayer adhesive which is dried to form a thin dry layer having a thickness in the range from 10 to 50 micrometers, are freshly trimmed to the desired width. The trimming of the metal sheet is for the purpose of removing any oxidized metal from the edges, which are to be welded together. Thus, the trimming step should occur within 10 minutes, preferably no longer than 1 minute, before being formed around the inner layer of CPVC. Oxidation at the edges can result in poor welds.

[0054] Forming and welding the metal strip to form the intermediate metal layer.

[0055] The trimmed metal strip is fed immediately beneath the inner layer conduit of CPVC as it enters the forming and welding machine. The metal strip is formed around the inner layer of CPVC so that the trimmed edges provide a gap, about 0.25mm (0.010 inch), small enough to allow a laser of appropriate intensity to continuously butt-weld the metal strip longitudinally, so as to form a completely closed metal layer around the inner layer of CPVC. The intensity of the laser is chosen so as not to damage the

-15-

polymer of the inner layer by overheating the inner layer of CPVC, yet provide a weld that completely penetrates the metal thickness.

[0056] Compacting the composite of the inner layer of CPVC and the intermediate metal layer.

[0057] To insure that the outside diameter of the composite of the inner layer of CPVC and the intermediate metal layer is maintained within the desired tolerance, it is circumferentially compacted between each of a succession of oppositely disposed grooved rollers.

[0058] Heating the compacted composite of the inner layer of CPVC and the intermediate metal layer.

[0059] The compacted composite of the inner layer of CPVC and the intermediate metal layer is heated in an inductance heater to a temperature in the range from about 149°C to 171°C (300°F to 340°F) to activate the adhesive and to preheat the metal surface to a temperature at which the metal is to be coated with the outer layer of CPVC.

[0060] Extruding the outer layer of CPVC.

[0061] The heated composite of the inner layer of CPVC and the intermediate metal layer is fed into the sealed antechamber of a crosshead die where vacuum is exerted just prior to having the outer layer of CPVC extruded onto the heated adhesive-coated metal. A vacuum in the range of from 31-56cm (12 to 22 inches) of mercury, creates a negative pressure around the metal layer so that the CPVC extruded onto it is forcefully sucked onto the adhesive-coated metal, ensuring activation of the adhesive and a cohesive bond when the CPVC coats the adhesive at a temperature in the range from 193°C to 204°C (300°F to 450°F). The die ensures that the thickness of the outer layer of CPVC is controlled within the desired range.

[0062] Cooling the completed composite pipe.

[0063] The hot composite pipe from the crosshead die is cooled in a cooling water tank to room temperature before it is either cut into lengths or rolled into coils of pipe. The steps described above represent the preferred method to make the composite pipe. Other methods could be used as well as variations to the steps described in the preferred method.

[0064] Alternatively in some embodiments, a preformed rigid thermoplastic pipe can be coated with an adhesive. A metallic intermediate layer can be placed on the adhesive

-16-

coated layer. A second layer of adhesive is then applied to the outer side of the metallic intermediate layer. An outer layer can then be extruded on top of the metallic intermediate layer. Optionally, the second adhesive layer, as well as, the thermoplastic layer can be coextruded in a single step using a coextrusion die.

[0065] The multilayer composite pipe of exemplary embodiments has the advantages of plastic pipe of the comparable plastic and additional desirable properties. For example, the multilayer composite pipe can be cut to any length in the field using common wheel cutters. The cut end is preferably deburred, and the thermoplastic layer(s) may be chamfered for the ease of assembly. No threading or grooving or other disruption of the pipe ends is required. A bonding agent is simply applied around the end of the conduit on the exposed thermoplastic layer and/or on the exposed innermost surface of the fitting which is formed by an exposed thermoplastic layer. The pieces are joined by inserting the multilayer composite pipe and with the insert in the fitting open end and twisting to distribute the bonding agent. The resulting bonded joint will cure and be pressure supportive within minutes using the bonding agents preferred.

[0066] The multilayer composite pipe and conduit system of exemplary embodiments offer significant benefits in ease of use over other known metal, plastic or composite pipe systems. The multilayer composite pipe offers greater strength and rigidity at reduced wall thickness than plastic pipe made of comparable material. Additionally, one exemplary embodiment of the multilayer composite pipe can be easily bent around a tight radius with a pipe bender thereby decreasing the number of joints that need to be used in the fluid conduit system. Furthermore, the multilayer composite pipe can be coupled into a fluid conduit system very easily with less skilled labor and without the expense of threading equipment, flaring equipment, torches, or crimping systems or other expensive mechanical fitting coupling systems.

[0067] There are many uses of the exemplary multilayer composite pipe. For example, the multilayer composite pipe can be used in fluid conduit system, including, but not limited to, water heaters, fire sprinkler systems, underslab installations for hot and cold water, central heating systems, pressurized air systems, plumbing systems, gas transportation, underfloor heating, industrial fluid systems, and underslab heating systems.

-17-

EXAMPLES

[0068] The examples are presented to compare a fluid handling assembly using an insert (bushing) of this invention (Example 1) with the same fluid handling assembly using a prior art insert (comparative Example 2). The fluid handling system used in both examples was a fire sprinkler system using a 2 inch diameter (IPS size) composite pipe, made by the preferred process described above. The metal intermediate layer was 1.0mm thick steel and the metal was coated on both sides with a bilayer adhesive identified as CIRE-10B from Mercural Corp. the inner and outer layers of CPVC were a standard CPVC pipe composition from Lubrizol Advanced Materials available under the name TempRite®. The thickness of the inner and outer CPVC layers each was 0.6 mm. The pipe, fitting and insert were joined with a standard CPVC solvent cement. The fluid handling assembly was tested at a pressure of 551 psi for 6 minuets and for 403 psi for 4 hours using water as the fluid.

EXAMPLE 1

[0069] This example used an insert (bushing) that had a flange thickness of 0.248 inch thick in the fluid handling assembly. The fluid handling assembly passed the test after exposure to a pressure of 551 psi for 6 minuets and for 403 psi for 4 hours according to ASTM D2846. No delamination was observed on the composite pipe. The pipe was cut lengthwise in the area of the fitting for a closer examination for delamination and none was found.

EXAMPLE 2 (COMPARATIVE)

[0070] This comparative example was the same as Example 1, except an insert (bushing) was used which had a flange thickness of 0.056 inch. After subjecting the system to the same pressure test as in Example 1, a bubble or lump was observed on the exterior of the composite just past the fitting as shown by 42 in FIG. 7. Upon cutting the pipe lengthwise, it was discovered that the bubble was the result of delamination at the adhesive bond between the metal layer and the outer CPVC layer. The flange of the insert was distorted and no longer was perpendicular to the hollow body of the insert. This allowed the pressurized water to migrate from the flange area long the bond between the metal and the outer CPVC layer. The thinner flanged insert failed the

-18-

prescribed test. This example shows that the flange of the insert must have a thickness greater than 0.056 inch.

[0071] In the foregoing description, certain terms have been used for brevity, clarity and understanding, however, no unnecessary limitations are to be implied therefrom, because such terms are used for descriptive purposes and are intended to be broadly construed. Moreover, the descriptions and illustrations herein are by way of examples and the exemplary embodiment is not limited to the exact details shown and described.

[0072] In the following claims, any feature described as a means for performing a function shall be construed as encompassing any means known to those skilled in the art to be capable of performing the recited function, and shall not be limited to the features and structures shown herein or mere equivalents thereof. The description of the exemplary embodiment included in the Abstract included herewith shall not be deemed to limit the invention to features described therein.

[0073] Having described the features, discoveries and principles of the invention, the manner in which it is constructed and operated, and the advantages and useful results attained; the new and useful structures, devices, elements, arrangements, parts, combinations, systems, equipment, operations, methods and relationships are set forth in the appended claims.

-19-

CLAIMS:

What is claimed is:

1. A fluid handling assembly comprising:
a first pipe, the first pipe including:
an inner layer comprising a CPVC composition; an intermediate layer comprising a metal at least partially surrounding the inner layer; and an outer layer comprising a CPVC composition at least partially surrounding the intermediate layer;
and
a first insert having an open ended hollow cylindrical body, wherein the body includes an extending flange portion which extends radially outward from an end of the open ended hollow cylindrical body, and wherein the body includes an extending portion, wherein the extending portion has an outer diameter less than an inner diameter of the first pipe, such that the extending portion of the insert extends inside the first pipe, wherein the extending flange portion is configured with sufficient dimension to be longitudinally nondeformable (and therefore prevent delamination in said first pipe) when fluid pressure in the first pipe is up to about 551 psi for 6 minutes followed by 403 psi for 4 hours while at 180°F at both pressures according to ASTM D2846.
2. The fluid handling assembly of claim 1 wherein for a pipe size of 2 inches the flange portion has a radial thickness that is greater than 0.056 inch.
3. The fluid handling assembly of claim 1 further comprising: a second pipe, the second pipe including:
an inner layer comprising a CPVC composition; an intermediate layer comprising a metal at least partially surrounding the inner layer; and an outer layer comprising a CPVC composition at least partially surrounding the intermediate layer;
a fitting; and
a second insert having an open ended hollow cylindrical second body, wherein the body includes an extending second flange portion which extends radially outward from an end of the open ended hollow cylindrical second body, and wherein the second body includes a second extending portion, wherein the second extending portion has an

-20-

outer diameter less than an inner diameter of the second pipe, such that the second extending portion of the second insert extends inside the second pipe, the extending second flange portion of the second insert being configured of sufficient dimension to be longitudinally nondeformable (and therefore prevent delamination in said first pipe) when fluid pressure in the second pipe is at about 551 psi for 6 minutes followed by 403 psi for 4 hours while at 180°F at both pressures according to ASTM D2846,

wherein the fitting engages the first and second pipes to join the first and second pipes together in fluid tight relation.

4. The fluid handling assembly of claim 3 wherein the second flange portion has a radial thickness greater than 0.056 inch for a pipe size of 2 inches.

5. The fluid handling assembly of claim 3 wherein each of the first and second flange portions has a respective annular outer surface, and wherein the fitting is hollow and includes an inner annular fitting surface, wherein the outer surface of each flange portion is in fixed engagement with the inner annular fitting surface.

6. The fluid handling assembly of Claim 3 wherein said insert, said pipe, and said fitting are joined together with a CPVC solvent cement.

7. The fluid handling assembly of claim 1 wherein said intermediate layer is steel.

8. The fluid handling assembly of claim 1 wherein said intermediate layer is aluminum.

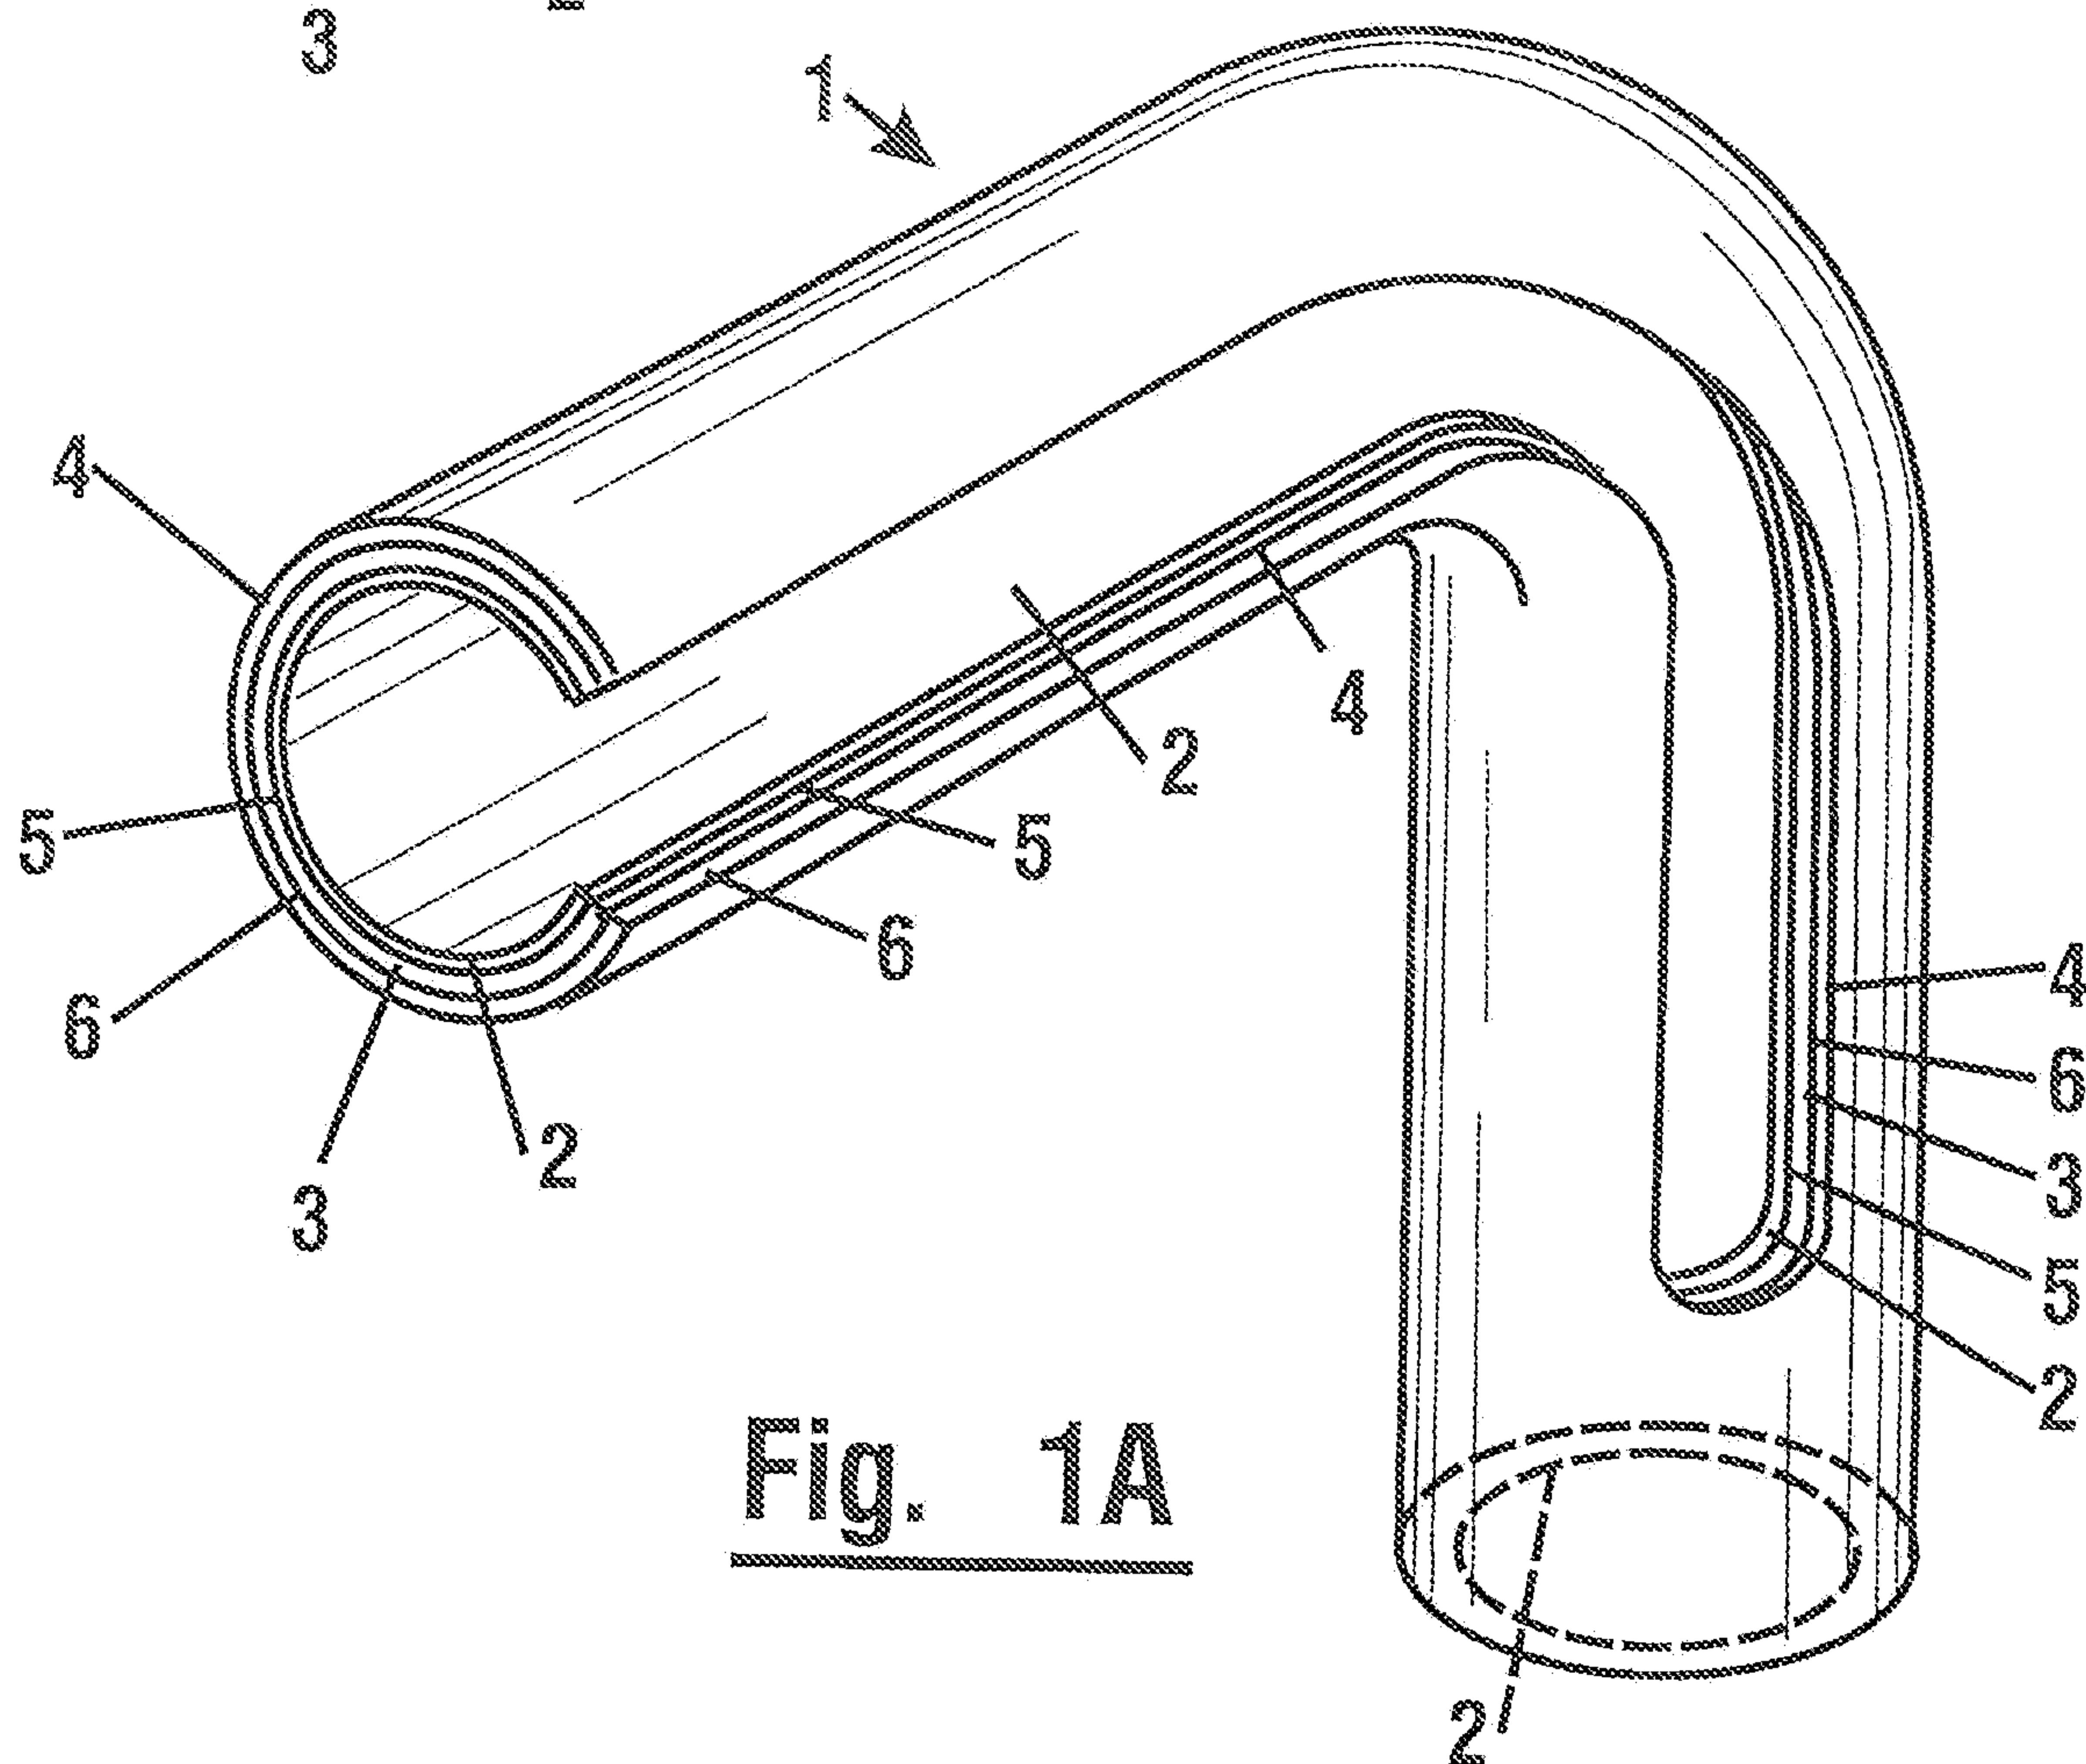
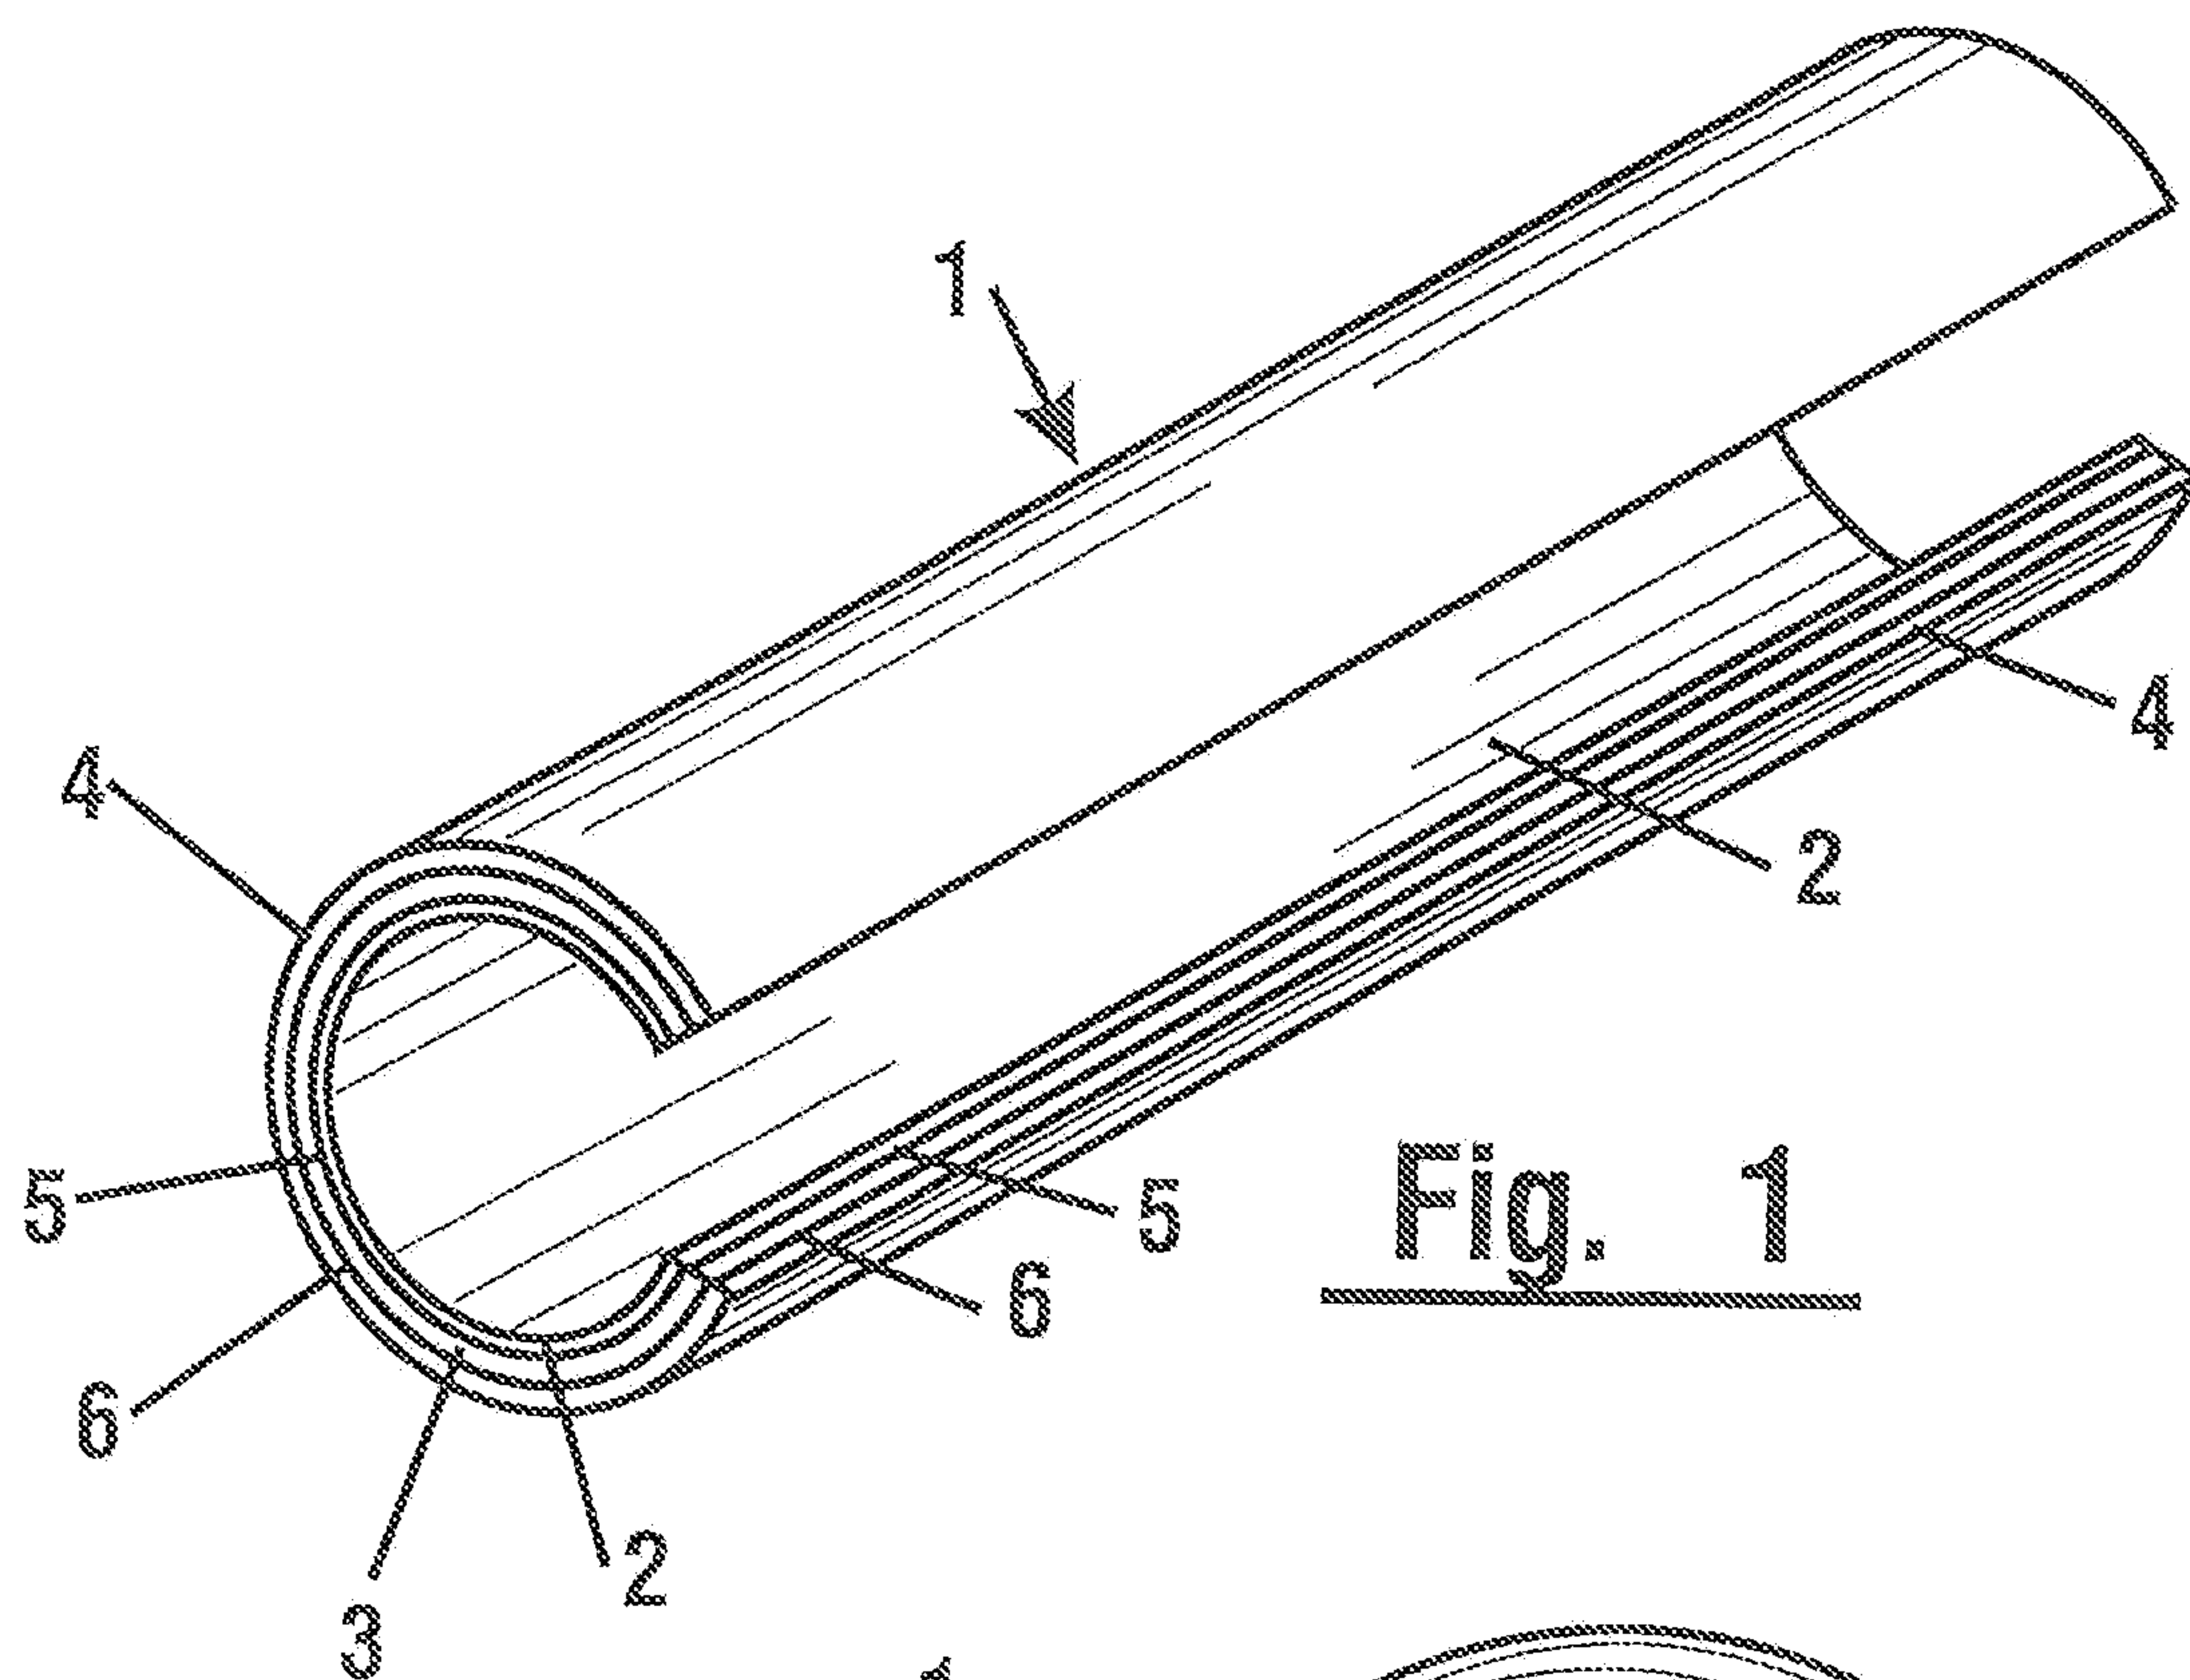
9. The fluid handling assembly of claim 7 wherein said steel has a thickness of about 1.0 +/- 0.3mm.

10. The fluid handling assembly of claim 8 wherein said aluminum has a thickness of about 0.4 +/- 0.2mm.

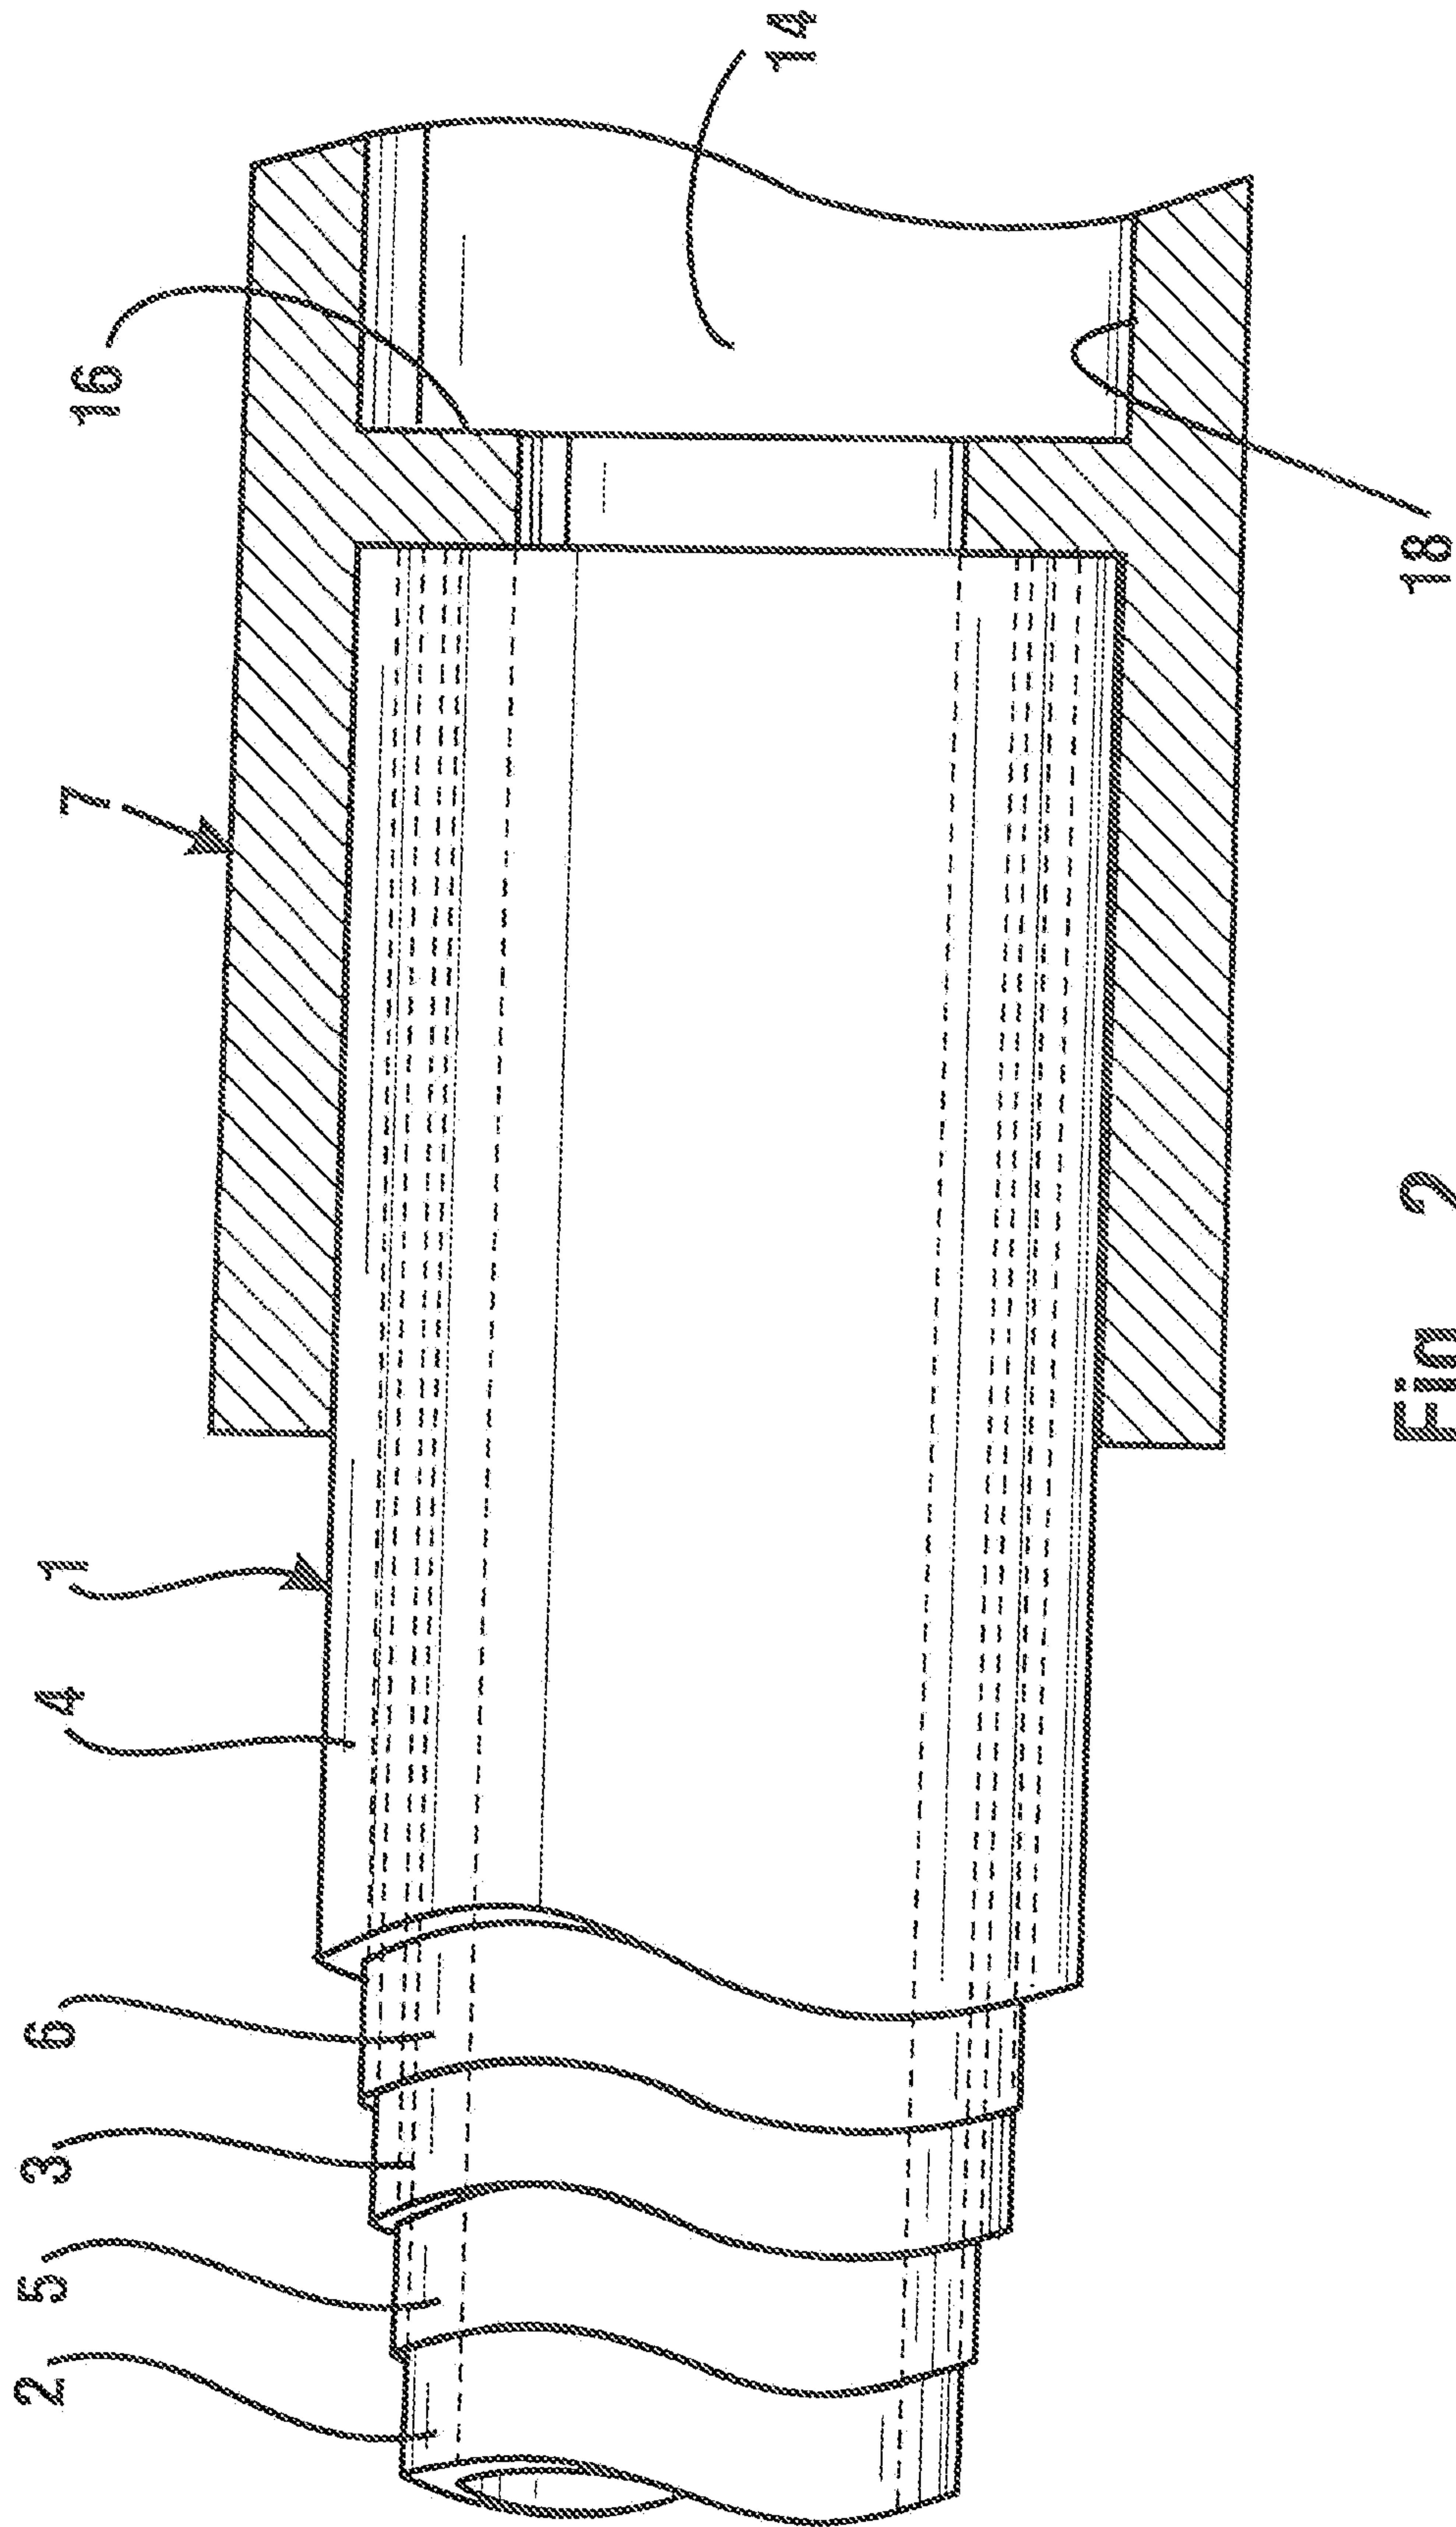
-21-

11. The fluid handling assembly of claim 1 wherein said inner layer of CPVC and said outer layer of CPVC each have a thickness of about 0.6 to 0.8mm.
12. The fluid handling assembly of claim 1 wherein the flange portion of said insert has a minimum thickness of about 0.15 or 0.25 inch for a pipe of outside diameter of 2 inches or less.
13. The fluid handling assembly of claim 3 wherein said insert and said fitting comprise CPVC composition and are made by injection molding.
14. A fluid handling apparatus comprising:
 - a first pipe and
 - an insert having an open ended hollow cylindrical body, wherein the body includes an extending flange which extends radially outward from an end of the open ended hollow cylindrical body, and wherein the body includes an extending portion, wherein the extending portion's outer diameter is less than an inner diameter of a pipe, such that the extending portion is configured to extend inside the pipe,
 - wherein the pipe includes an inner layer comprising a CPVC composition and an intermediate layer comprising a metal completely surrounding the inner layer, the pipe further includes an outer layer comprising a CPVC composition completely surrounding the intermediate layer,
 - wherein the flange portion is configured with sufficient dimension to be nondeformable longitudinally (and therefore prevent delamination in said first pipe) when fluid pressure in the pipe is at up to about 551 psi for six minutes and thereafter at 403 psi for four hours while at 180°F at both pressures according to ASTM D2846.
15. The fluid handling apparatus of claim 14, wherein the open ended hollow cylindrical body of said insert is tapered from about 0.4° to about 4° to the horizontal.
16. The fluid handling apparatus of claim 14, wherein both sides of said metal intermediate layer is coated with adhesive.

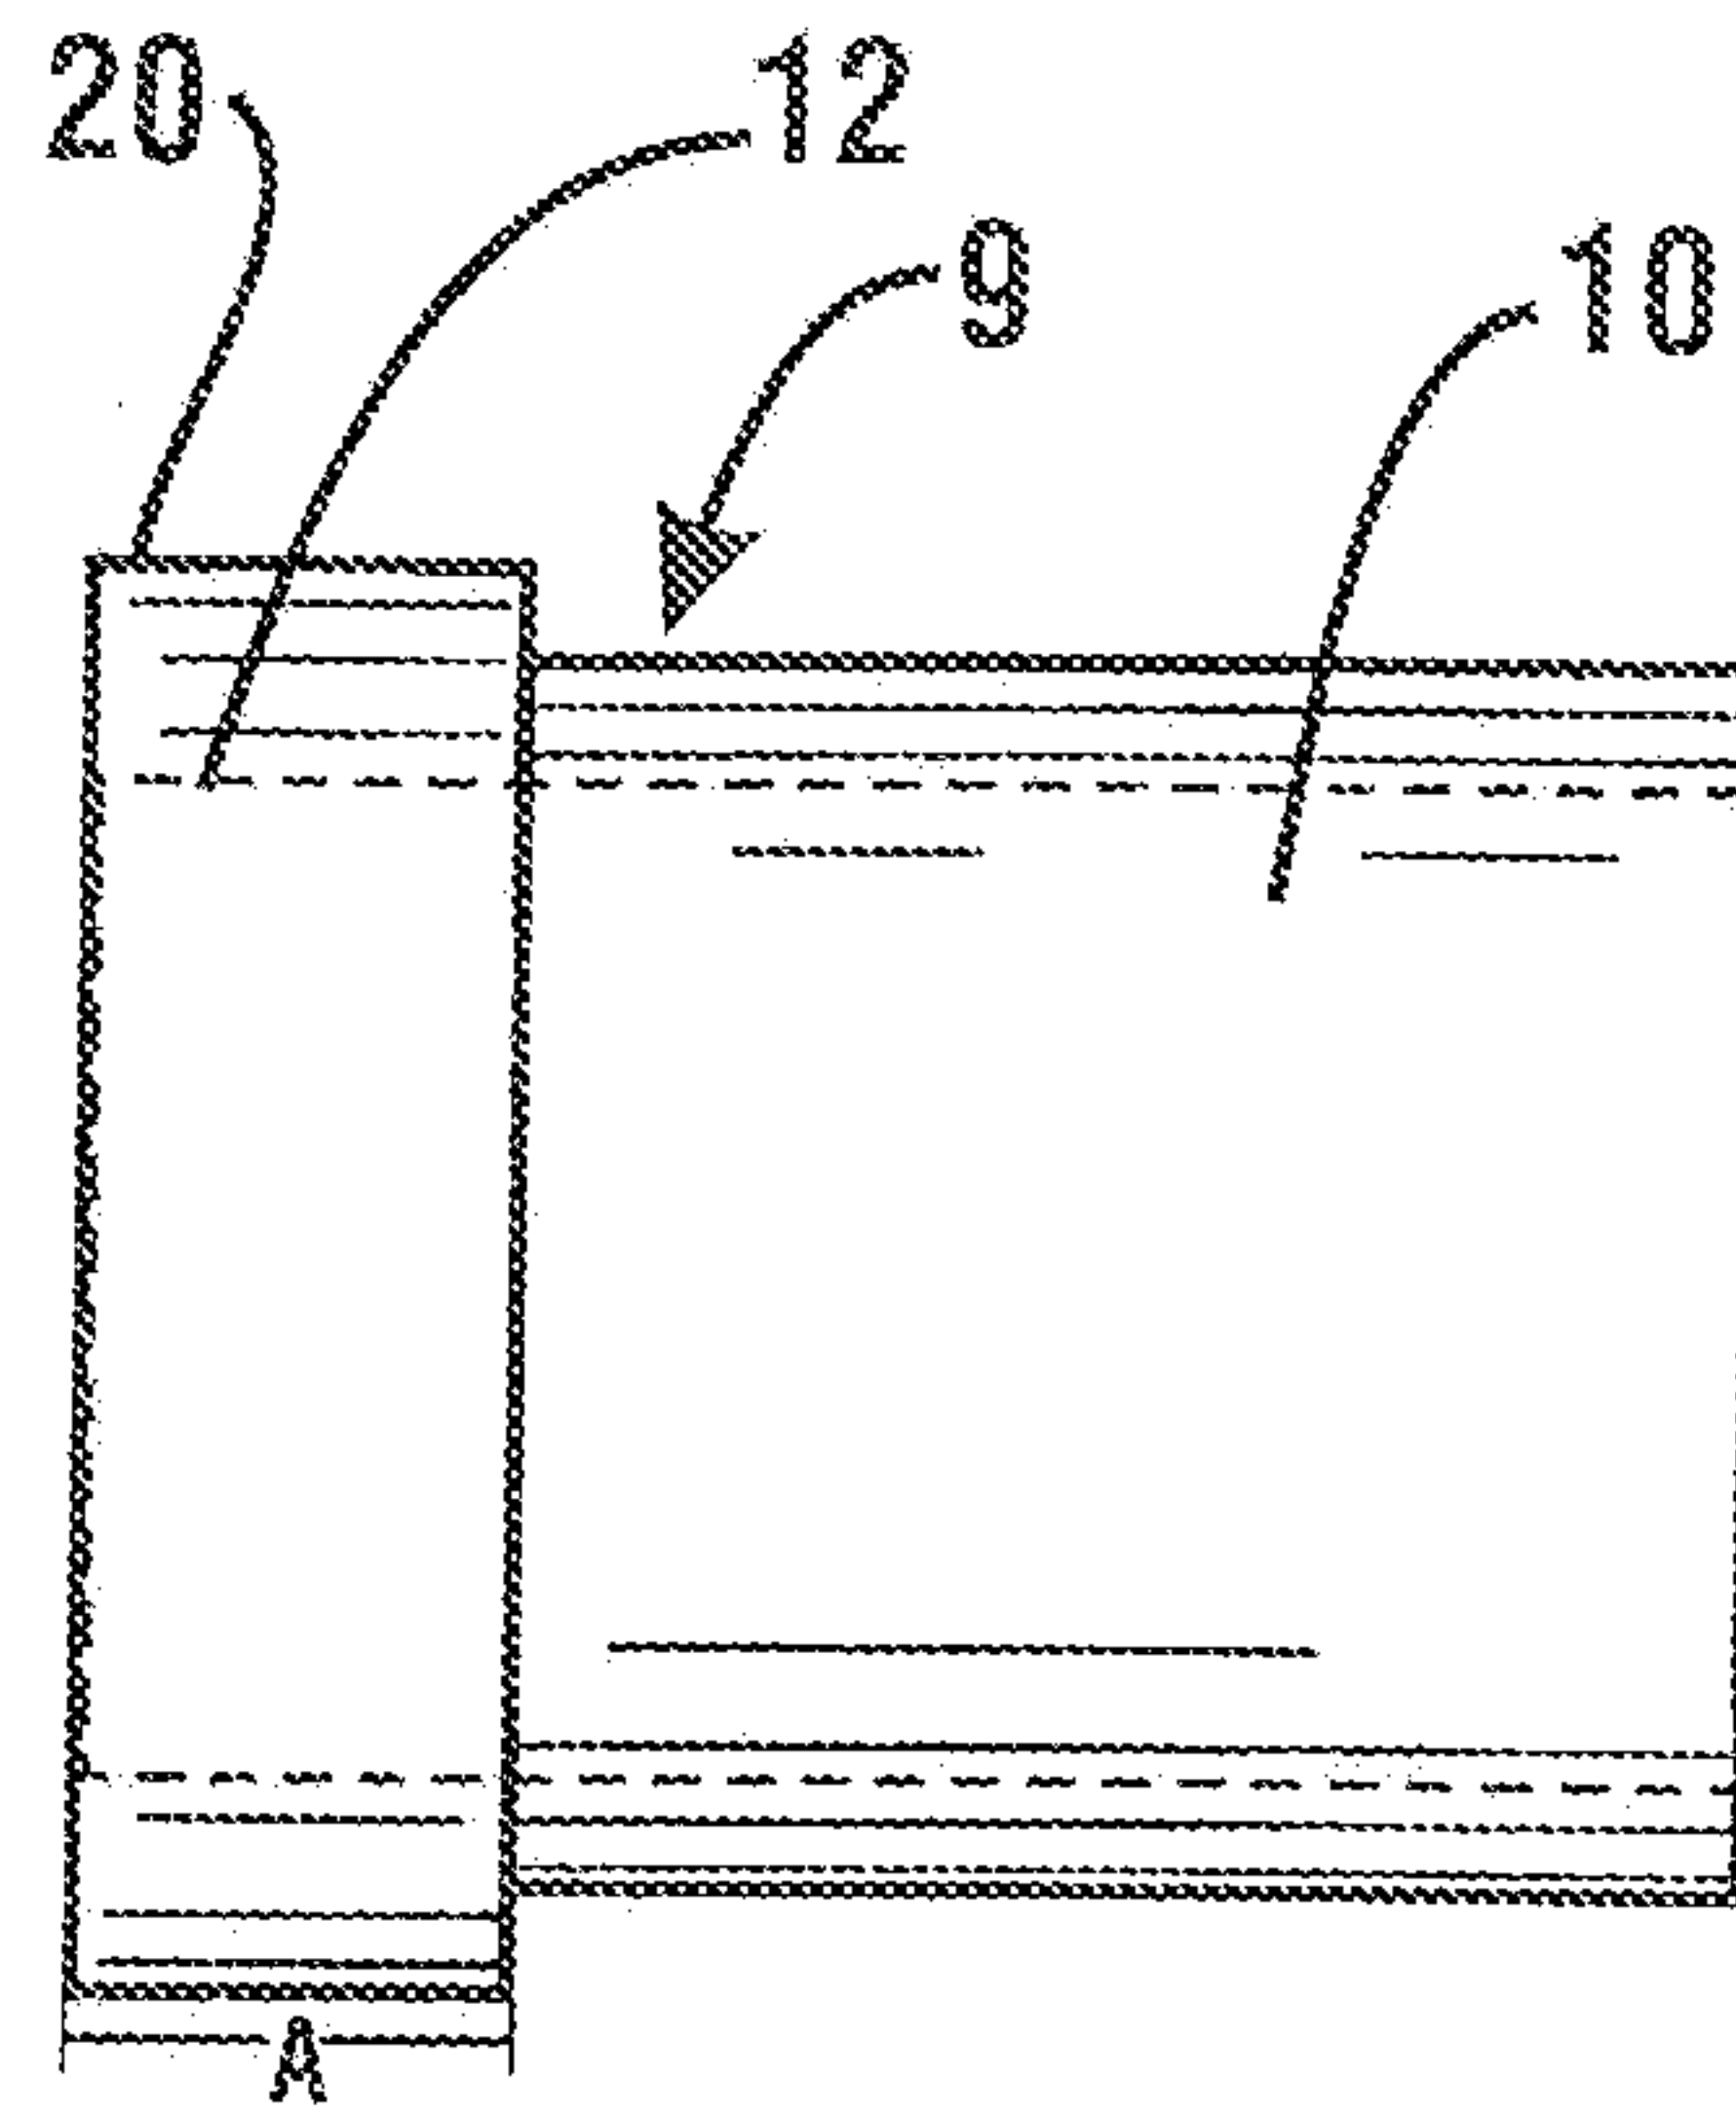
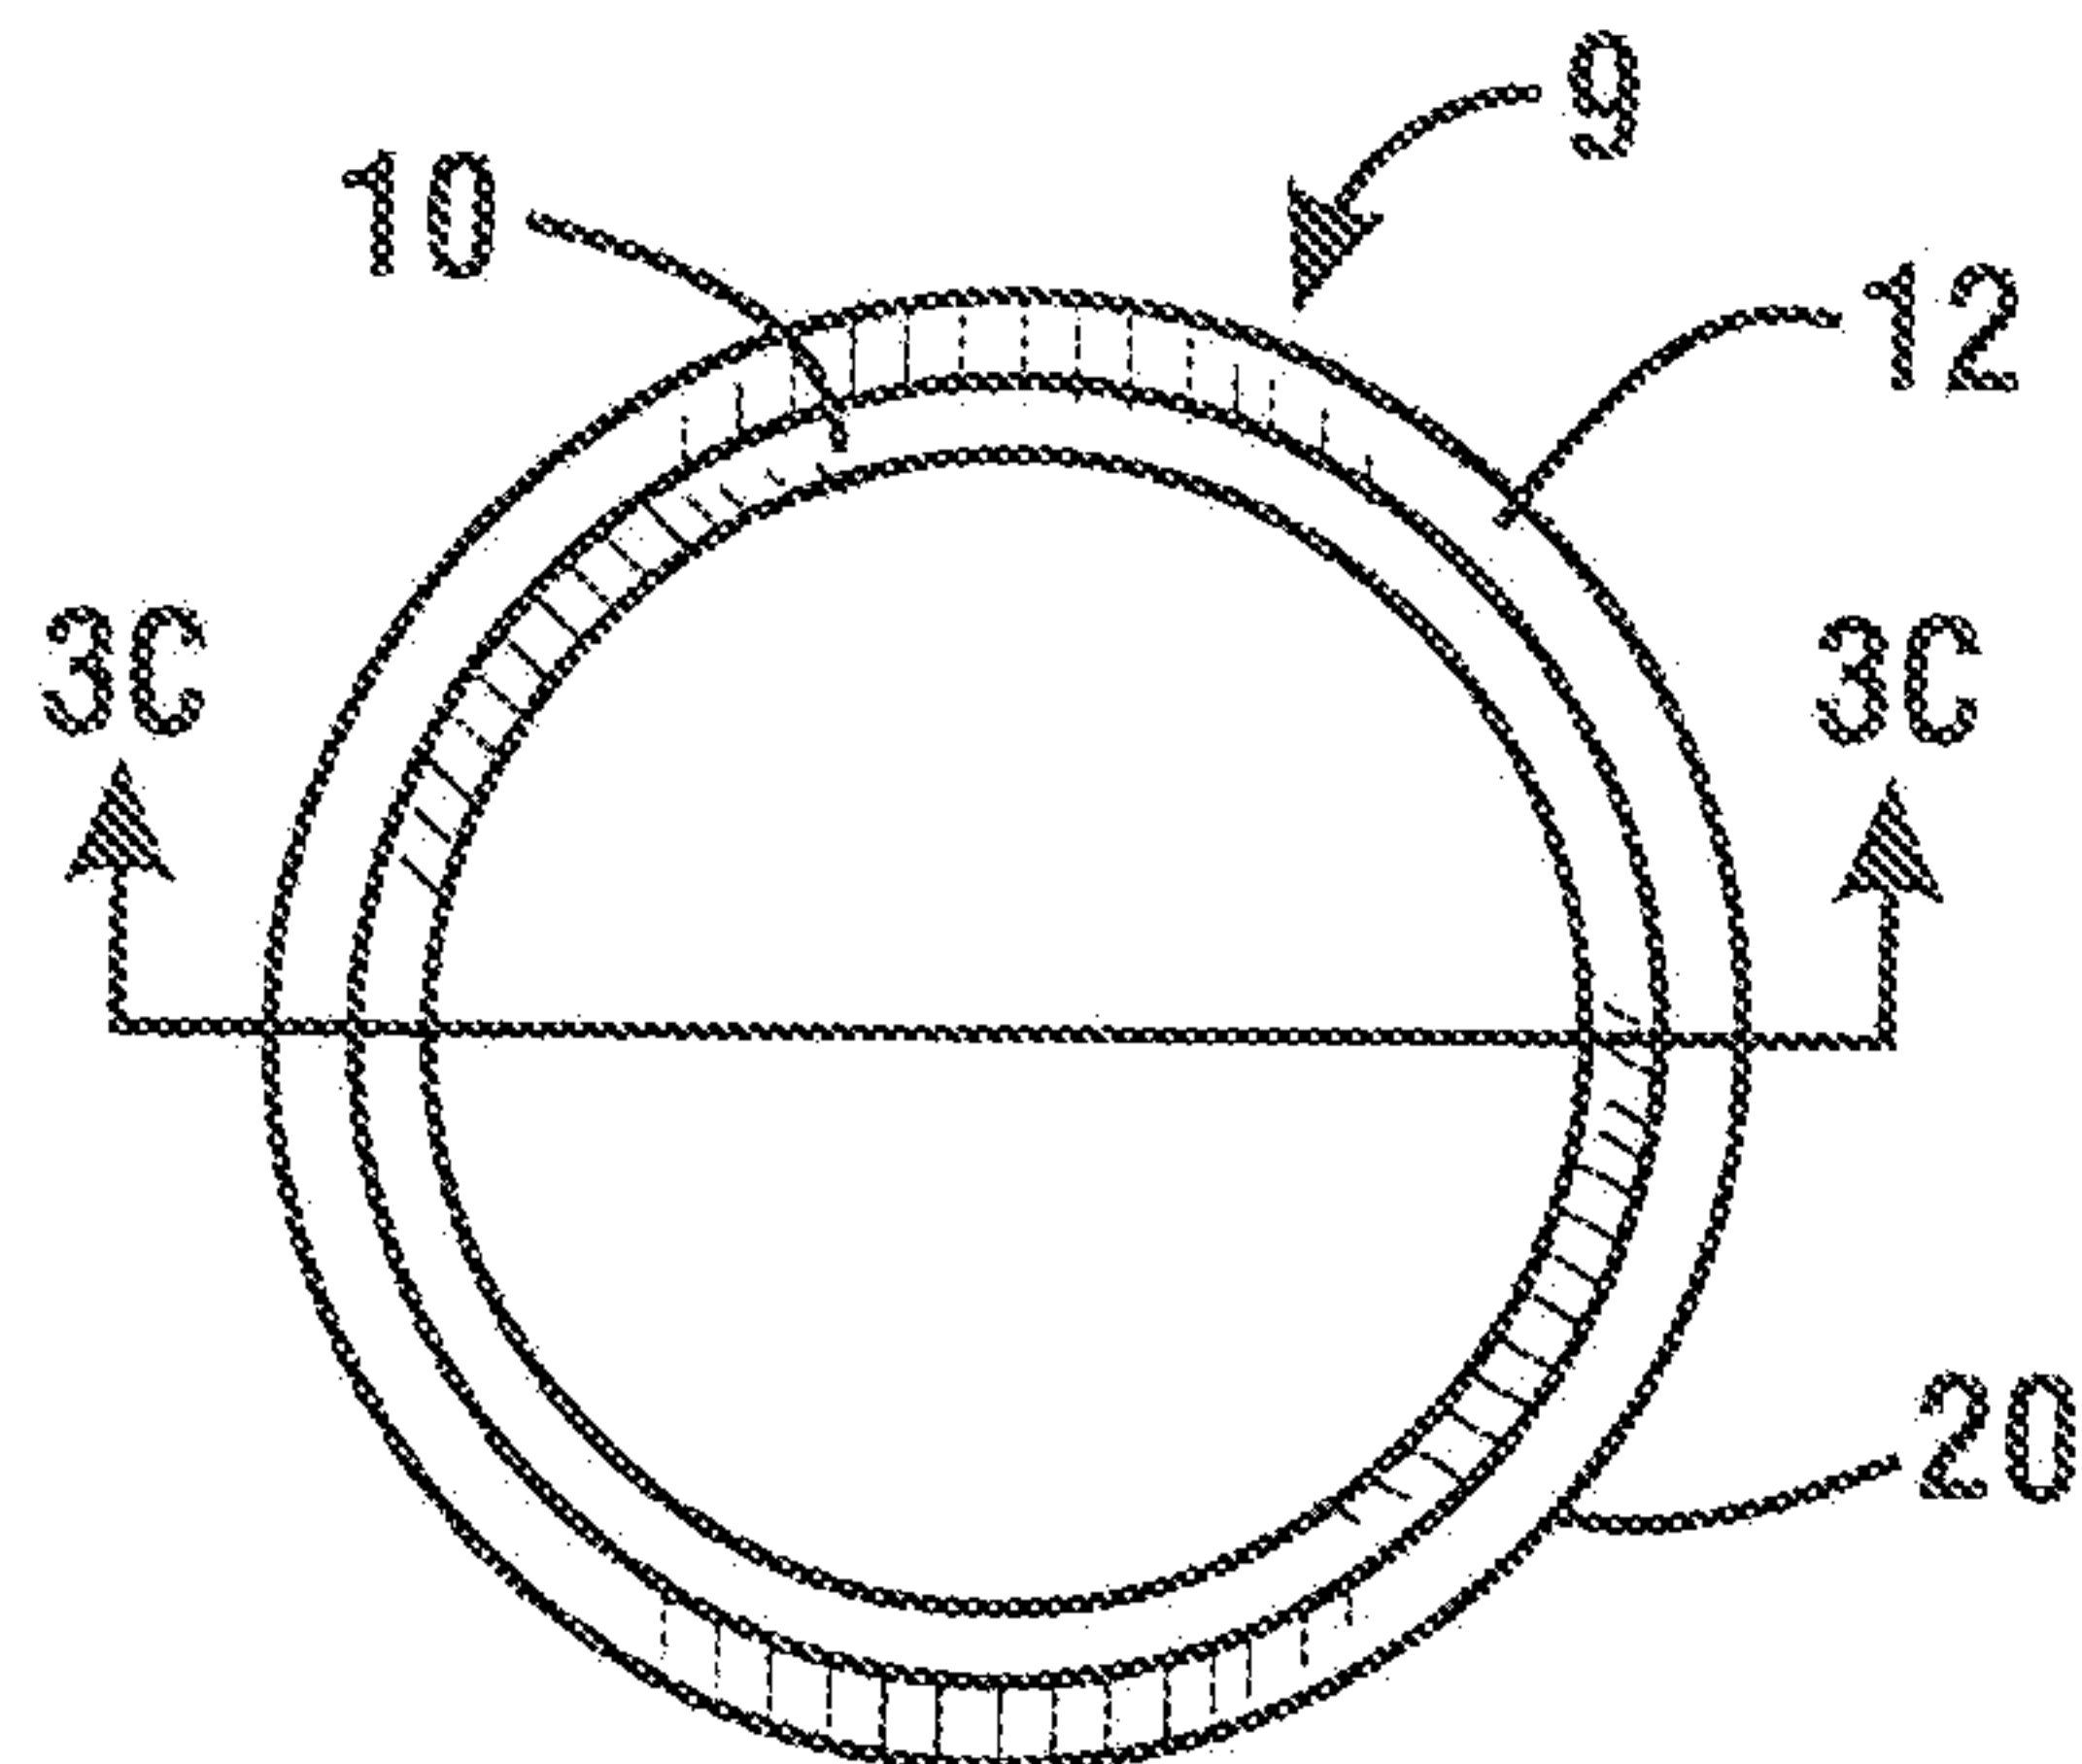
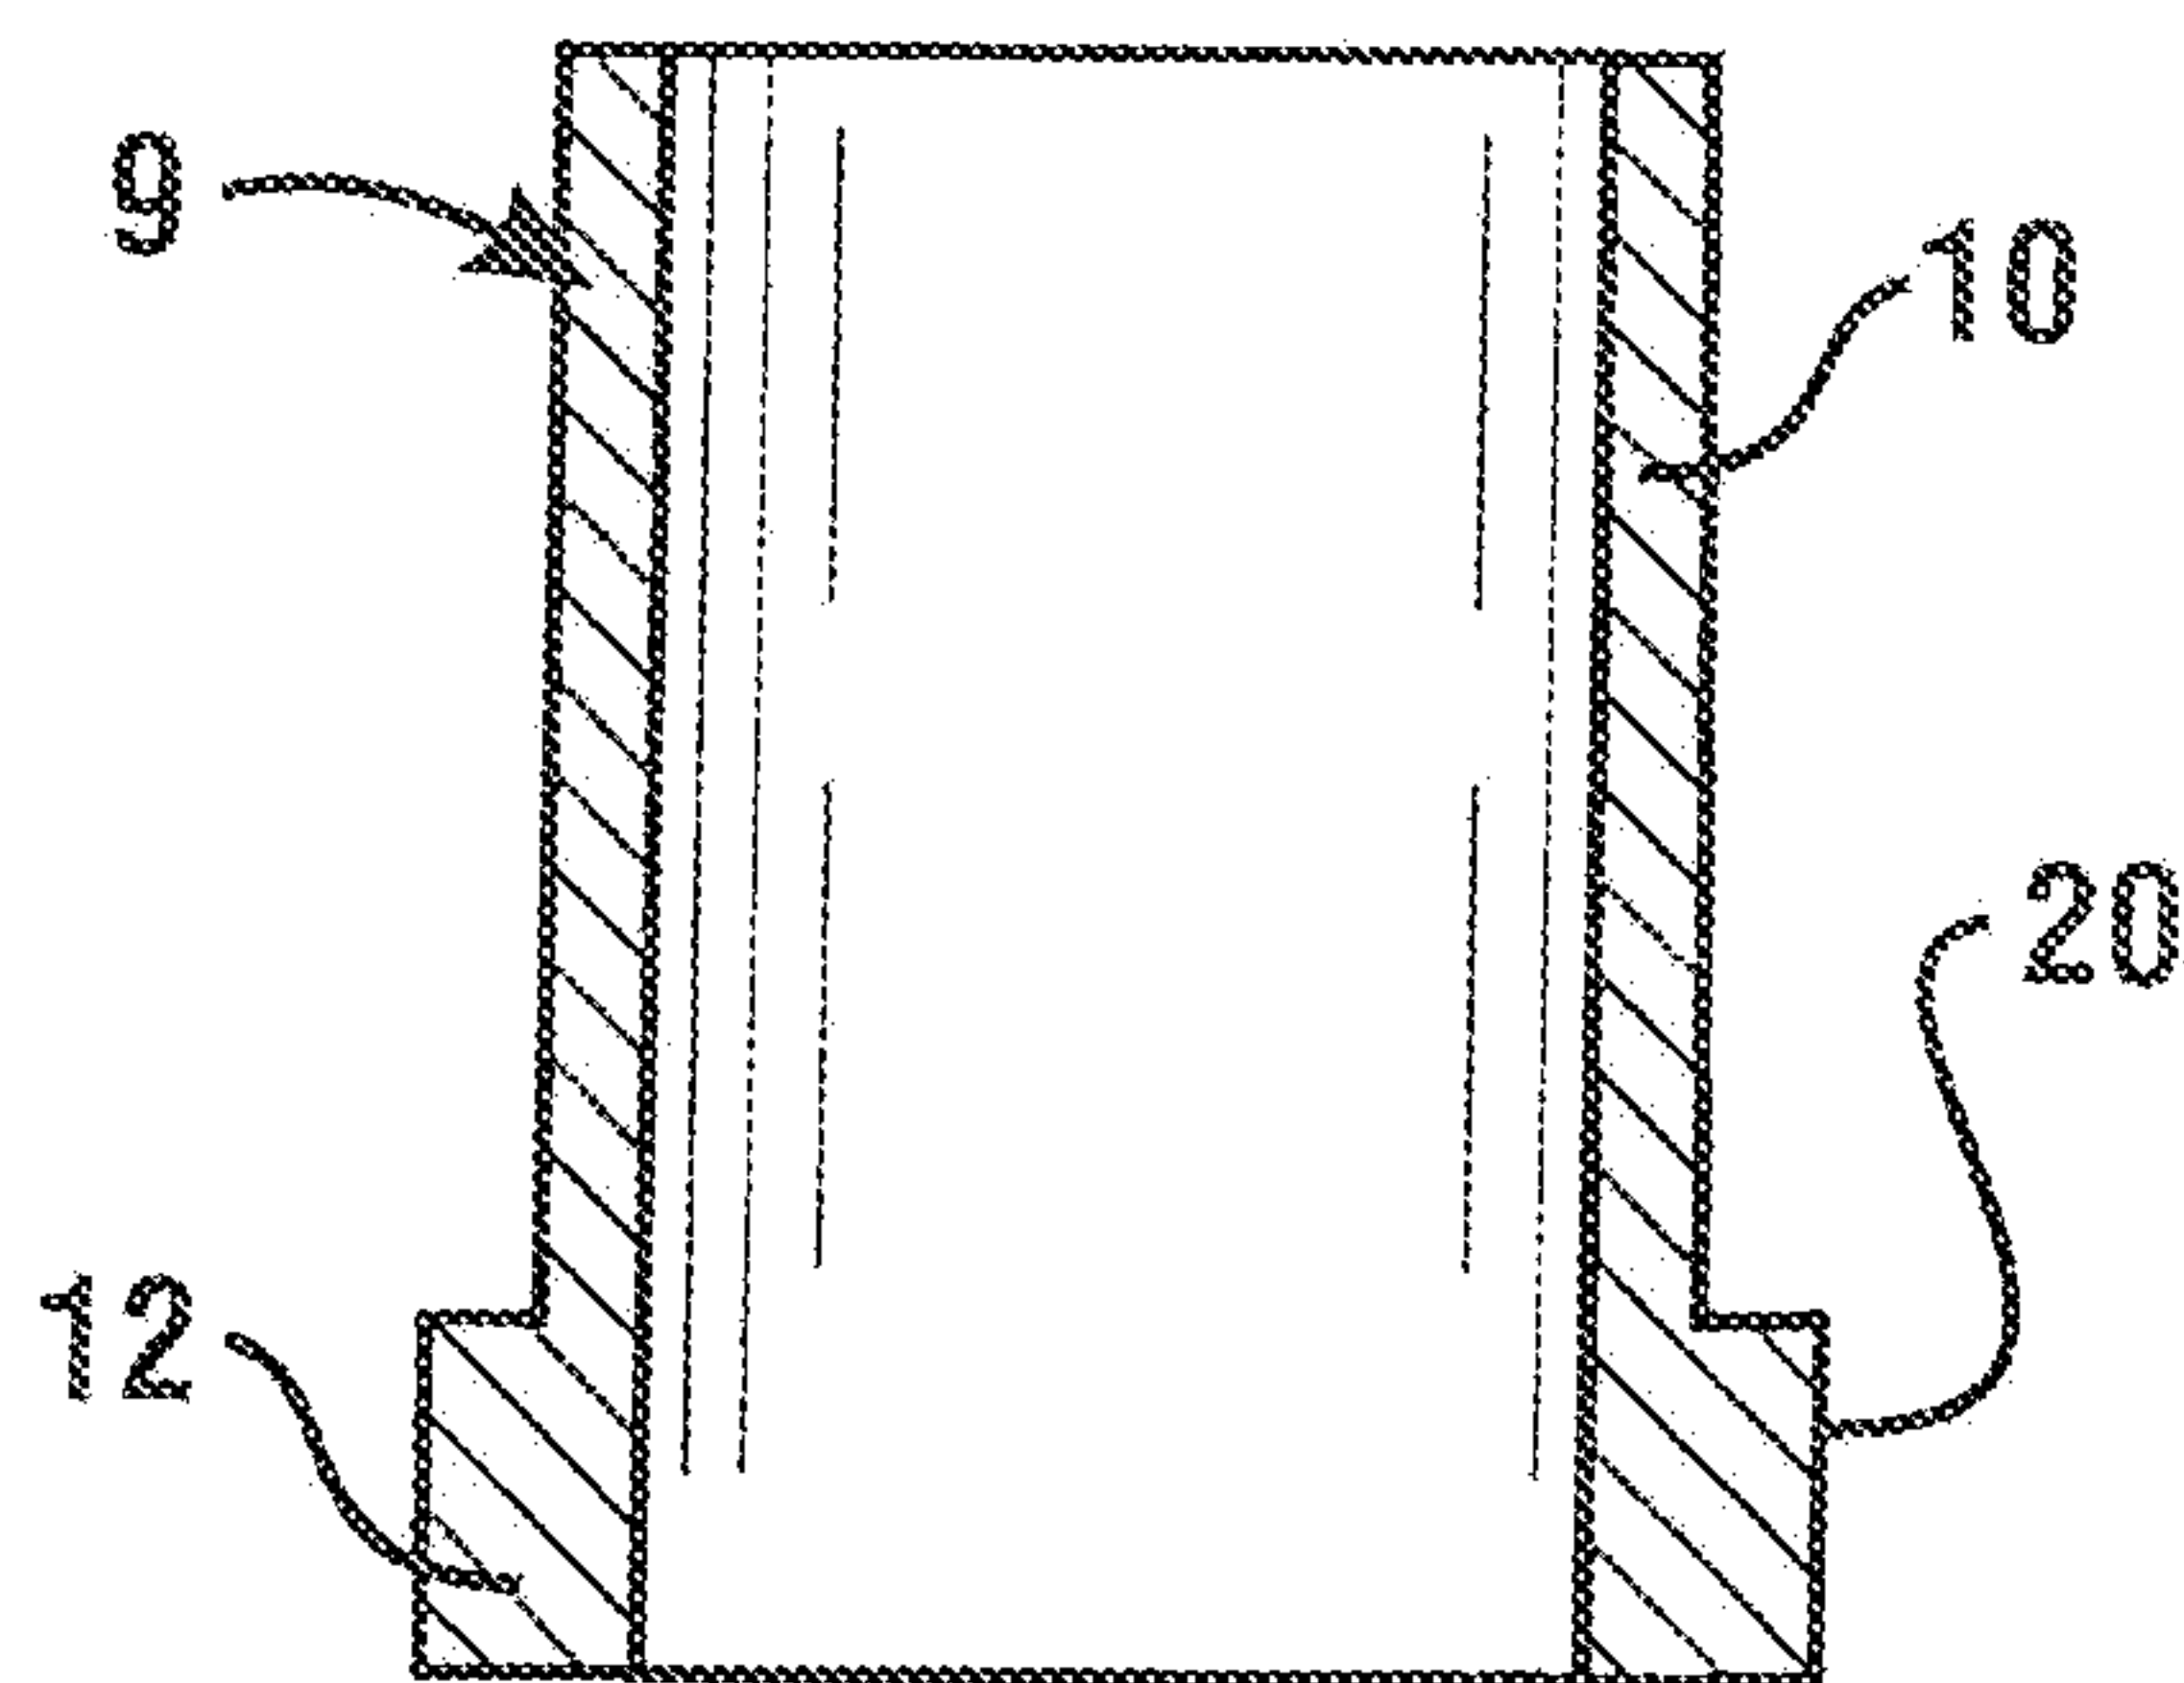
1/8



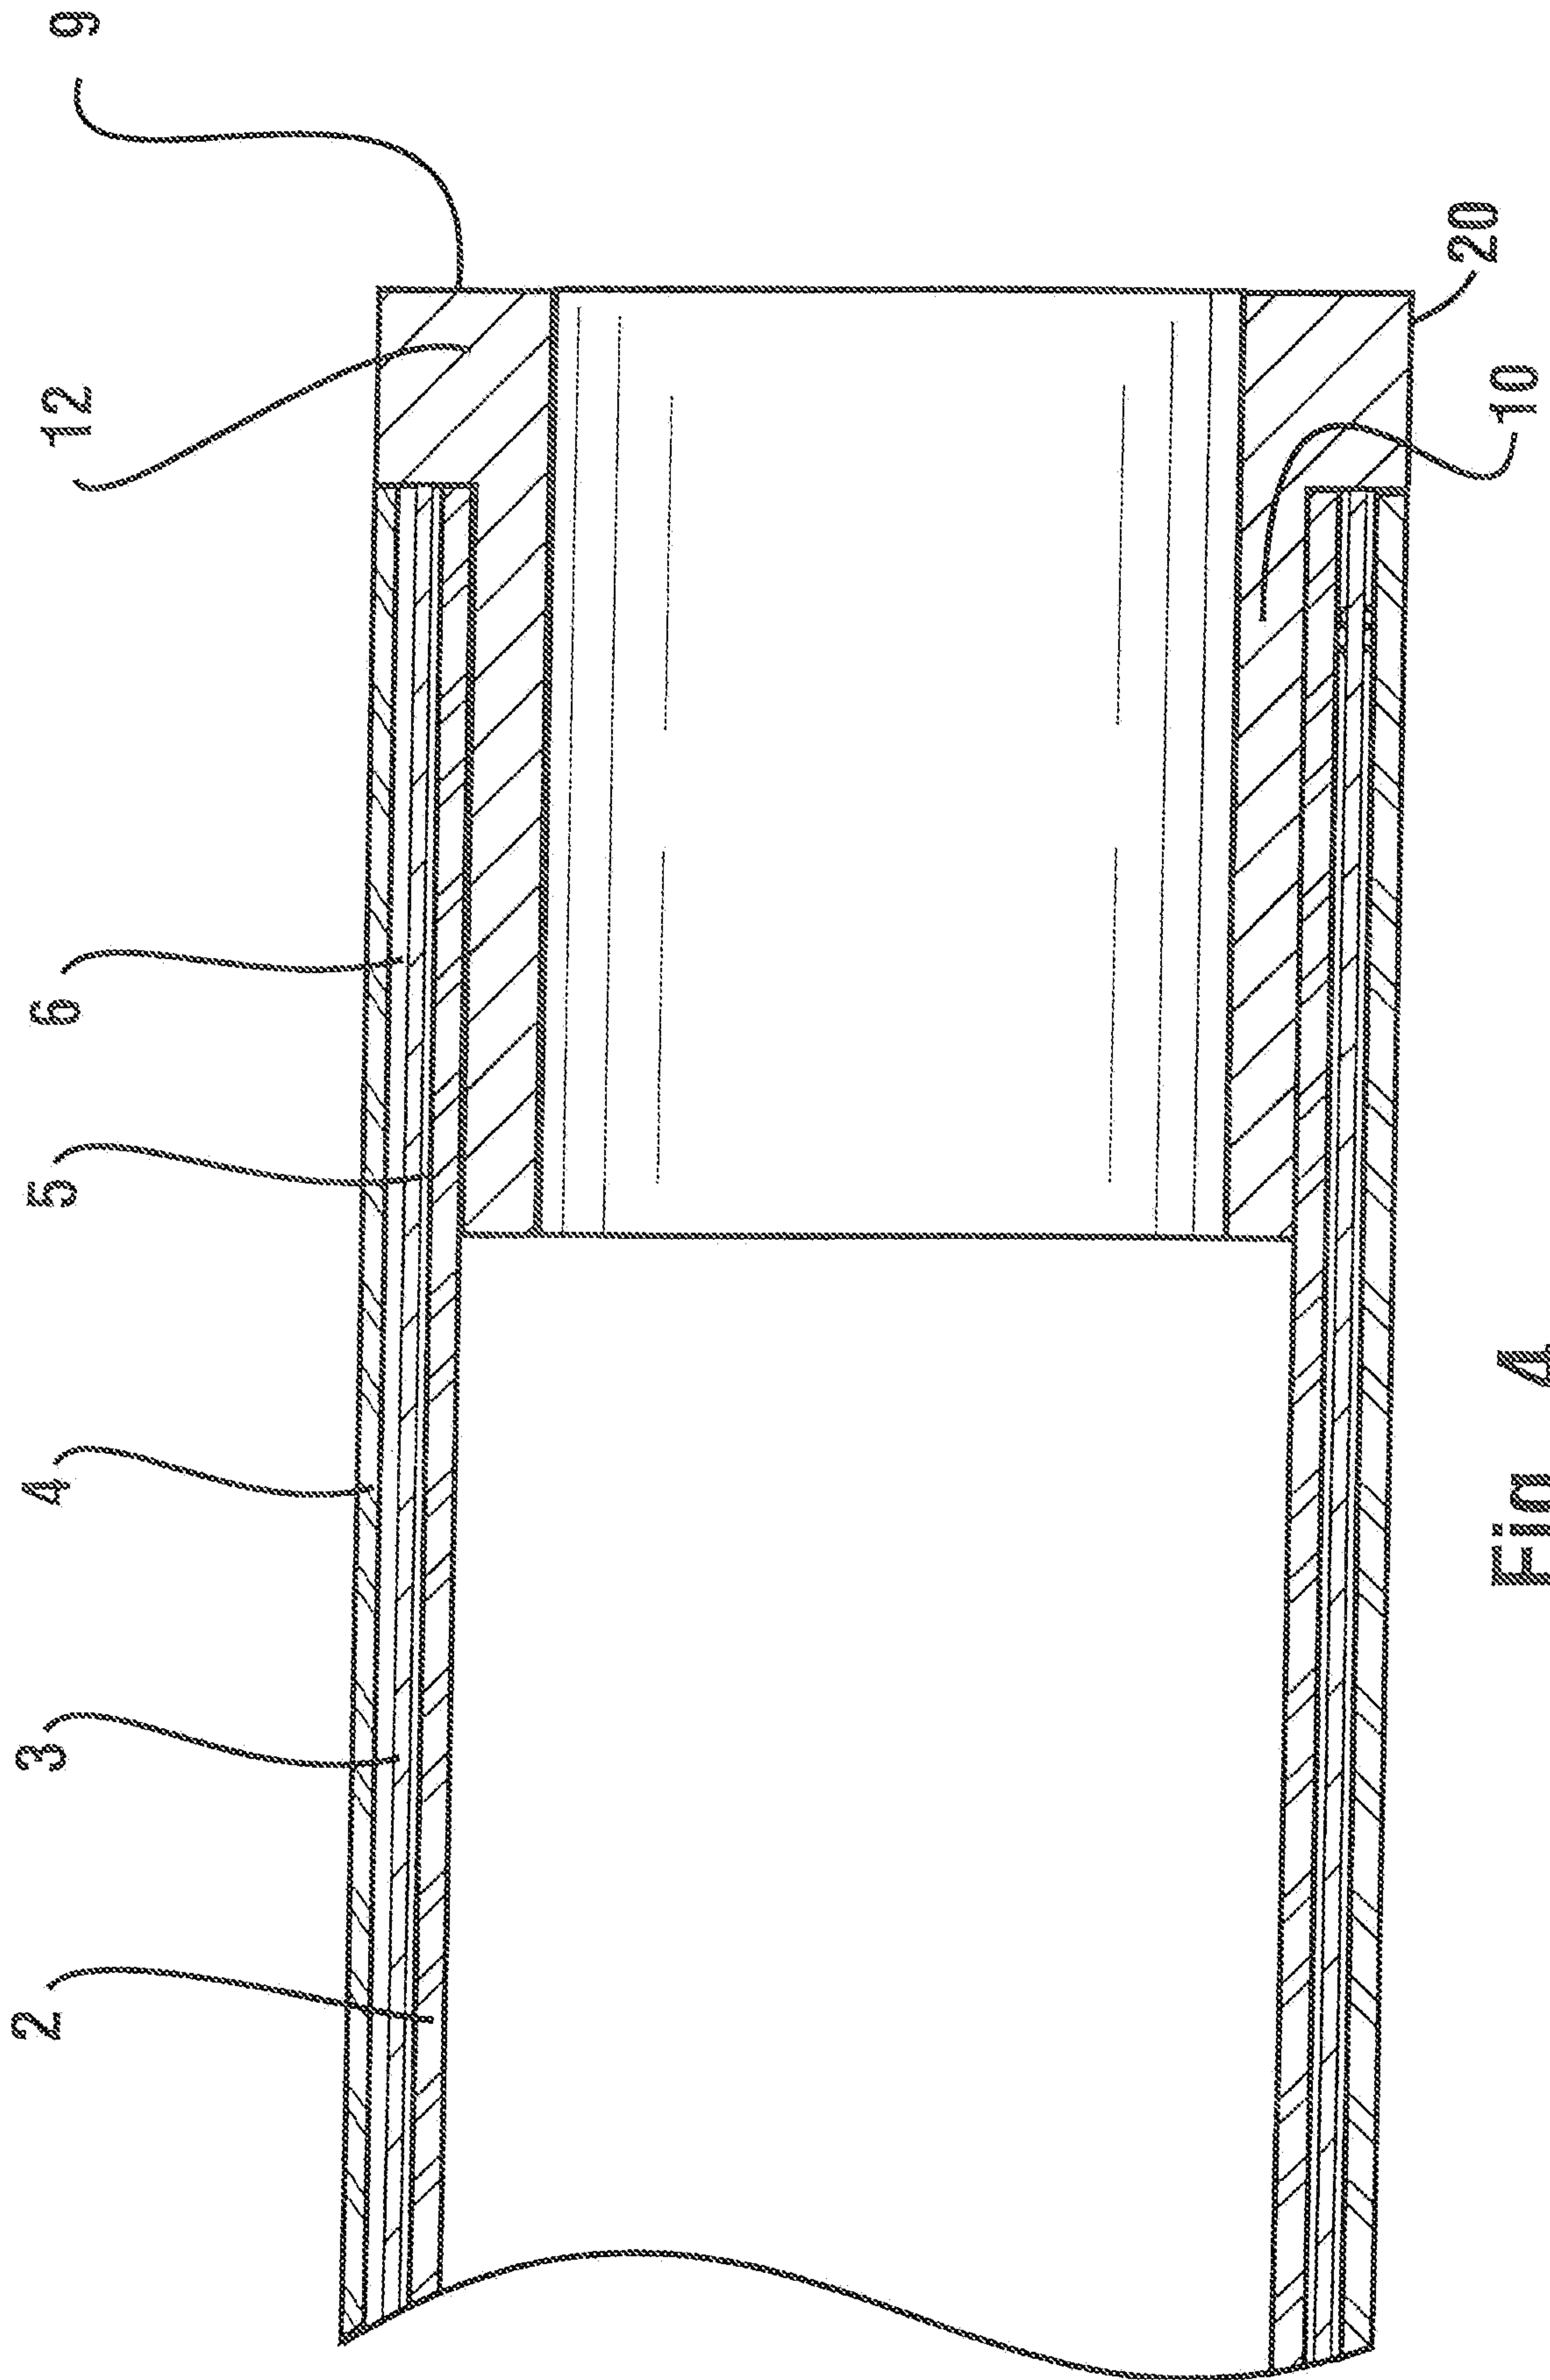
2/8

Fig. 2

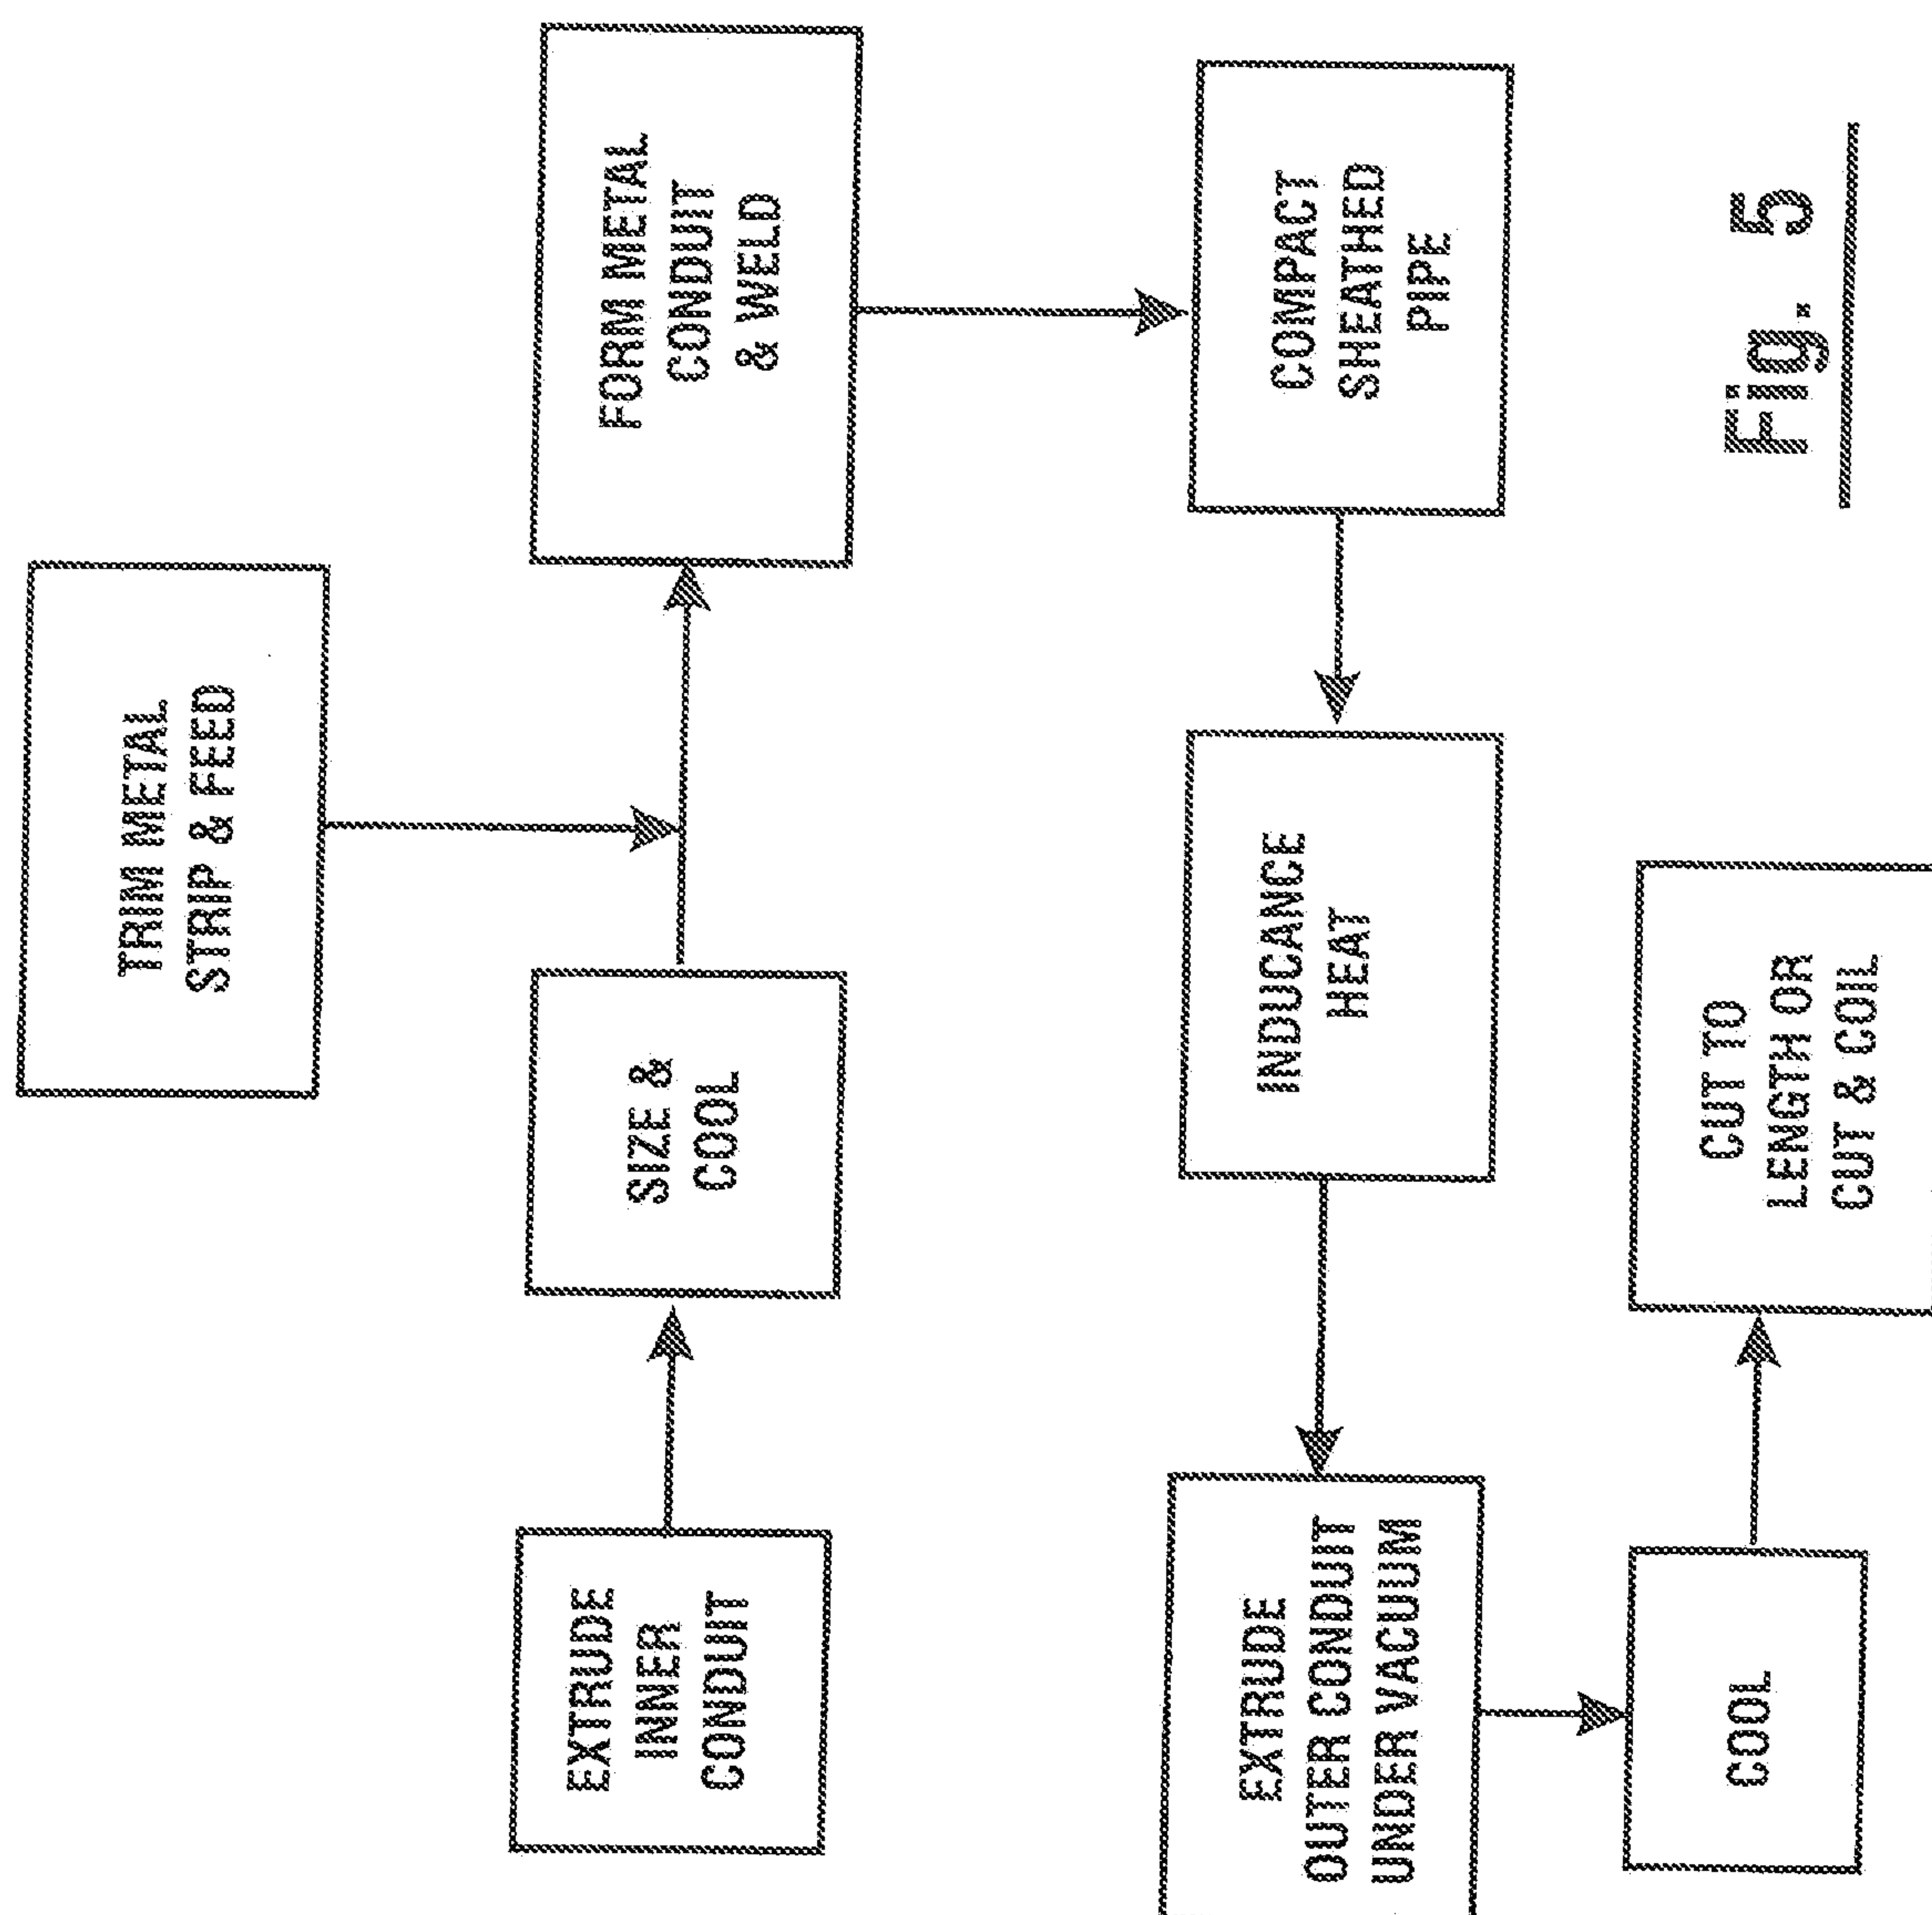
3/8

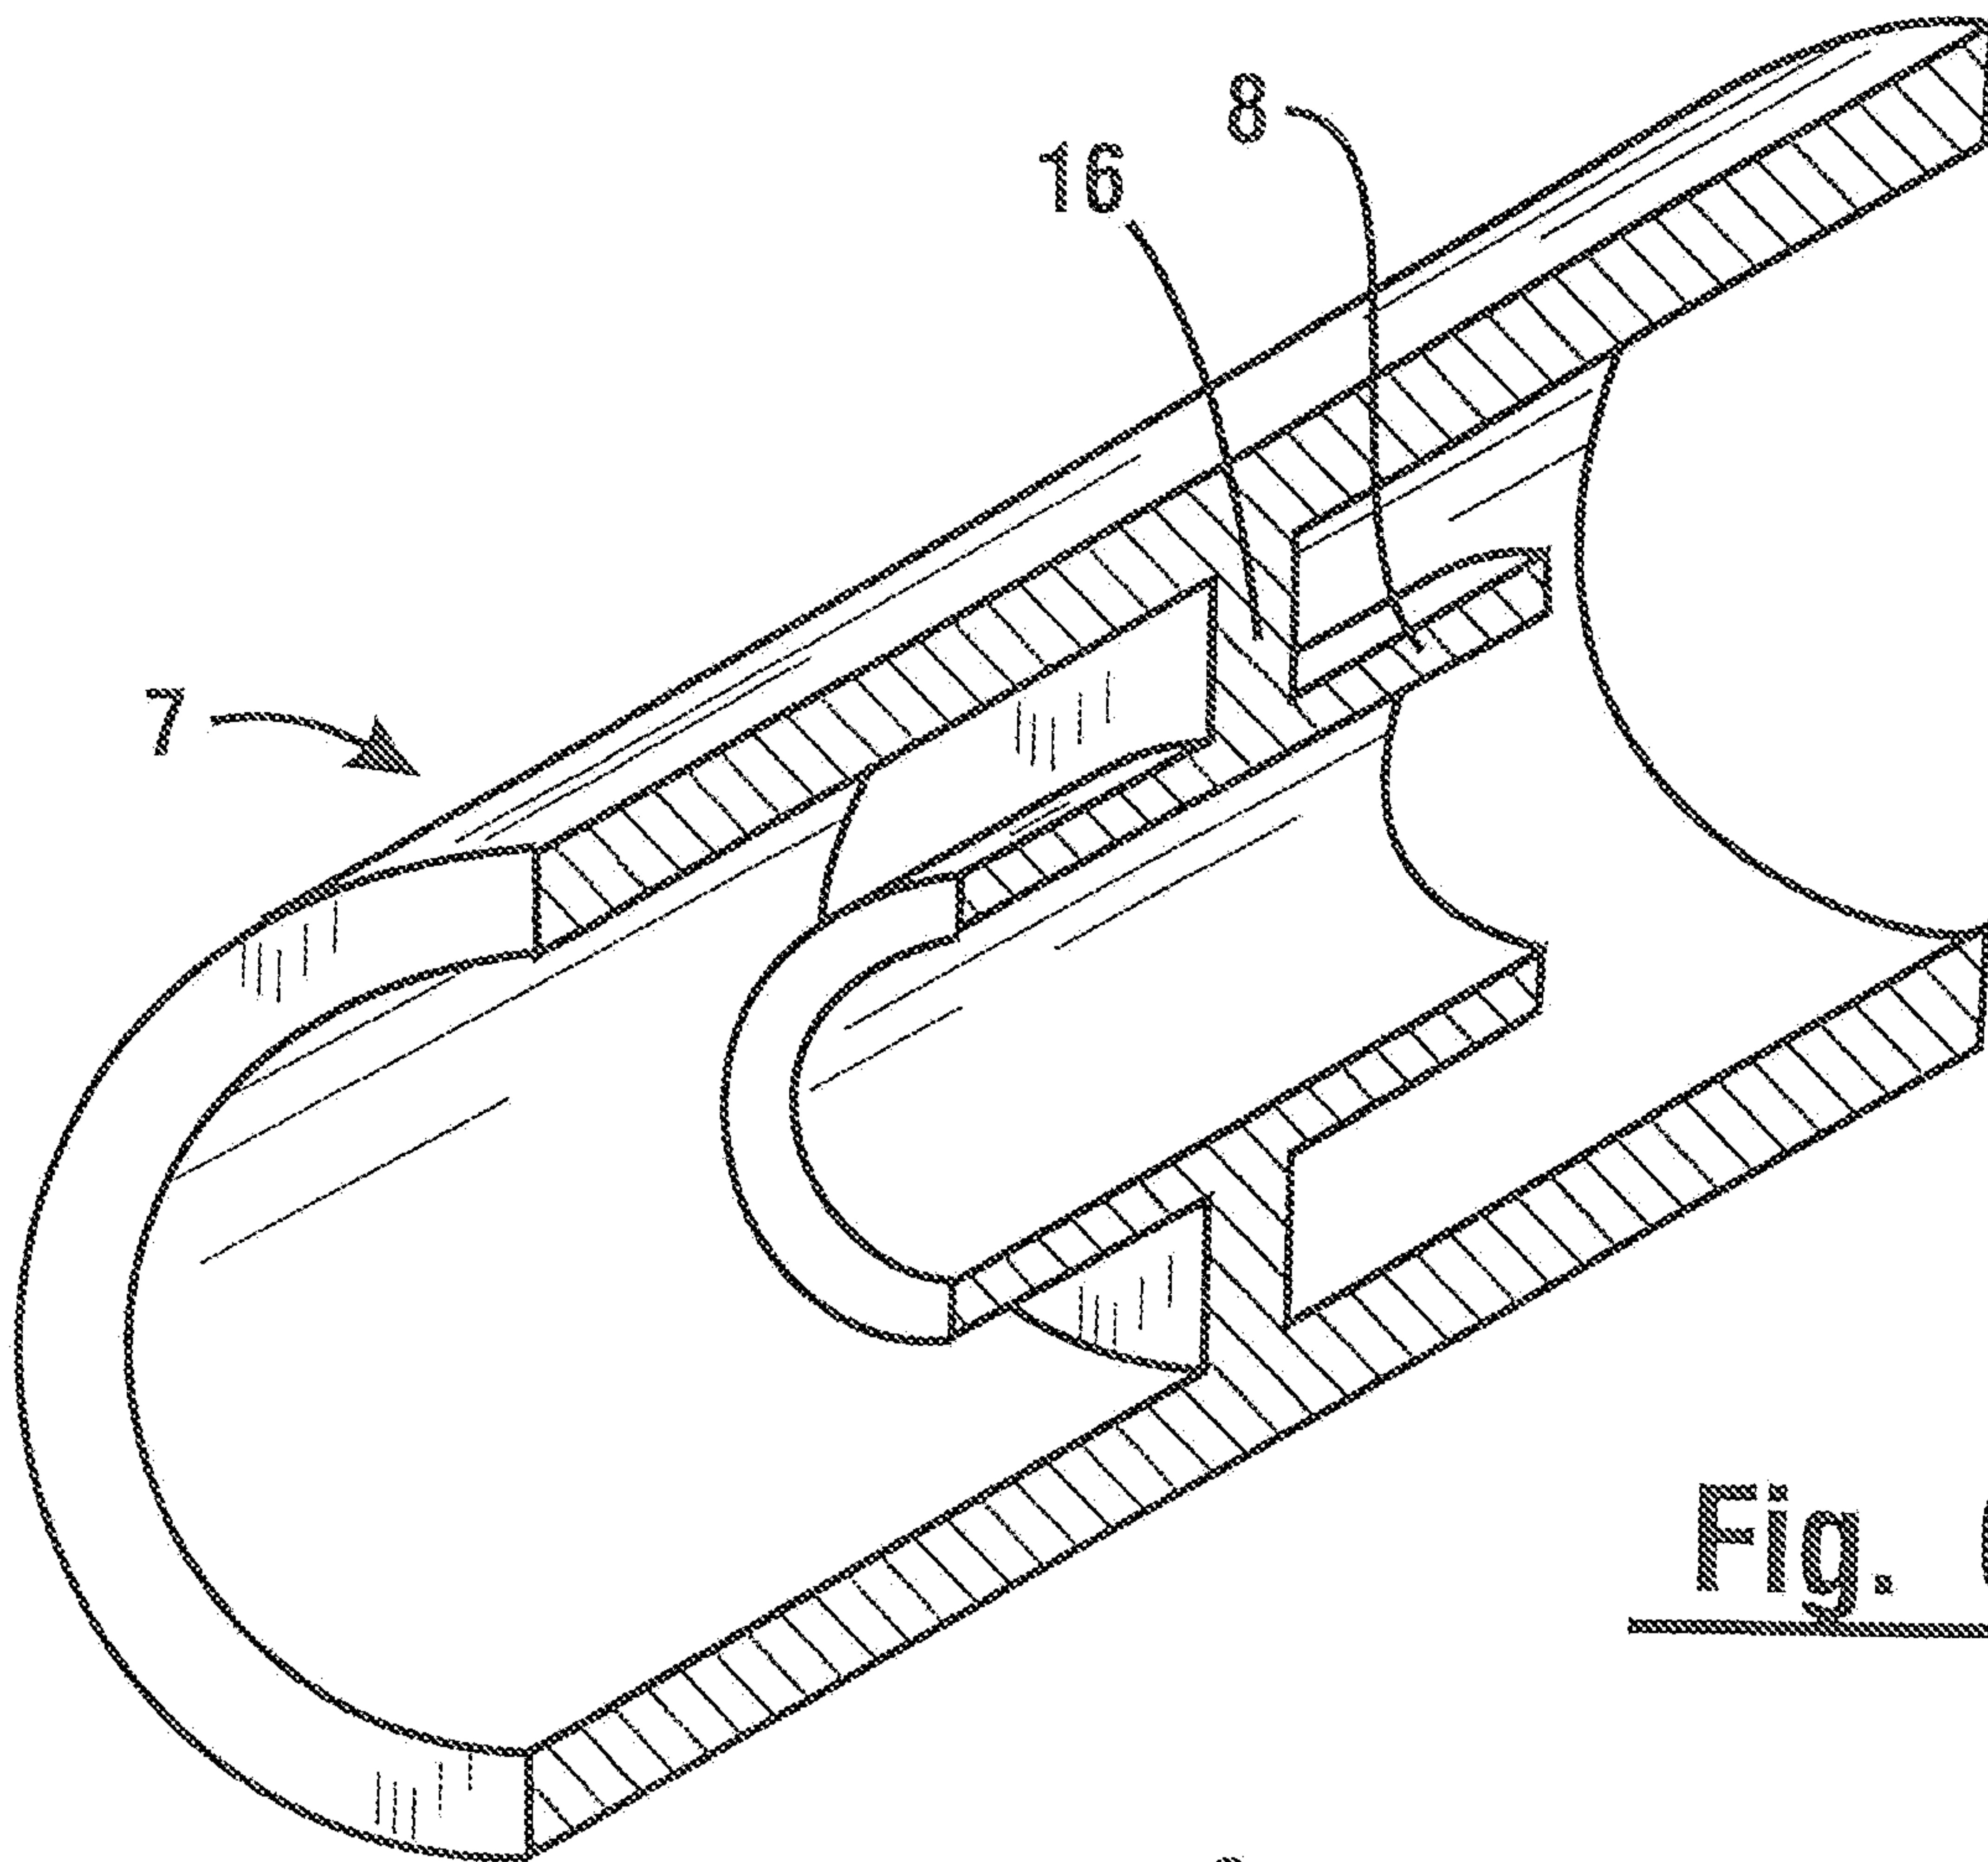
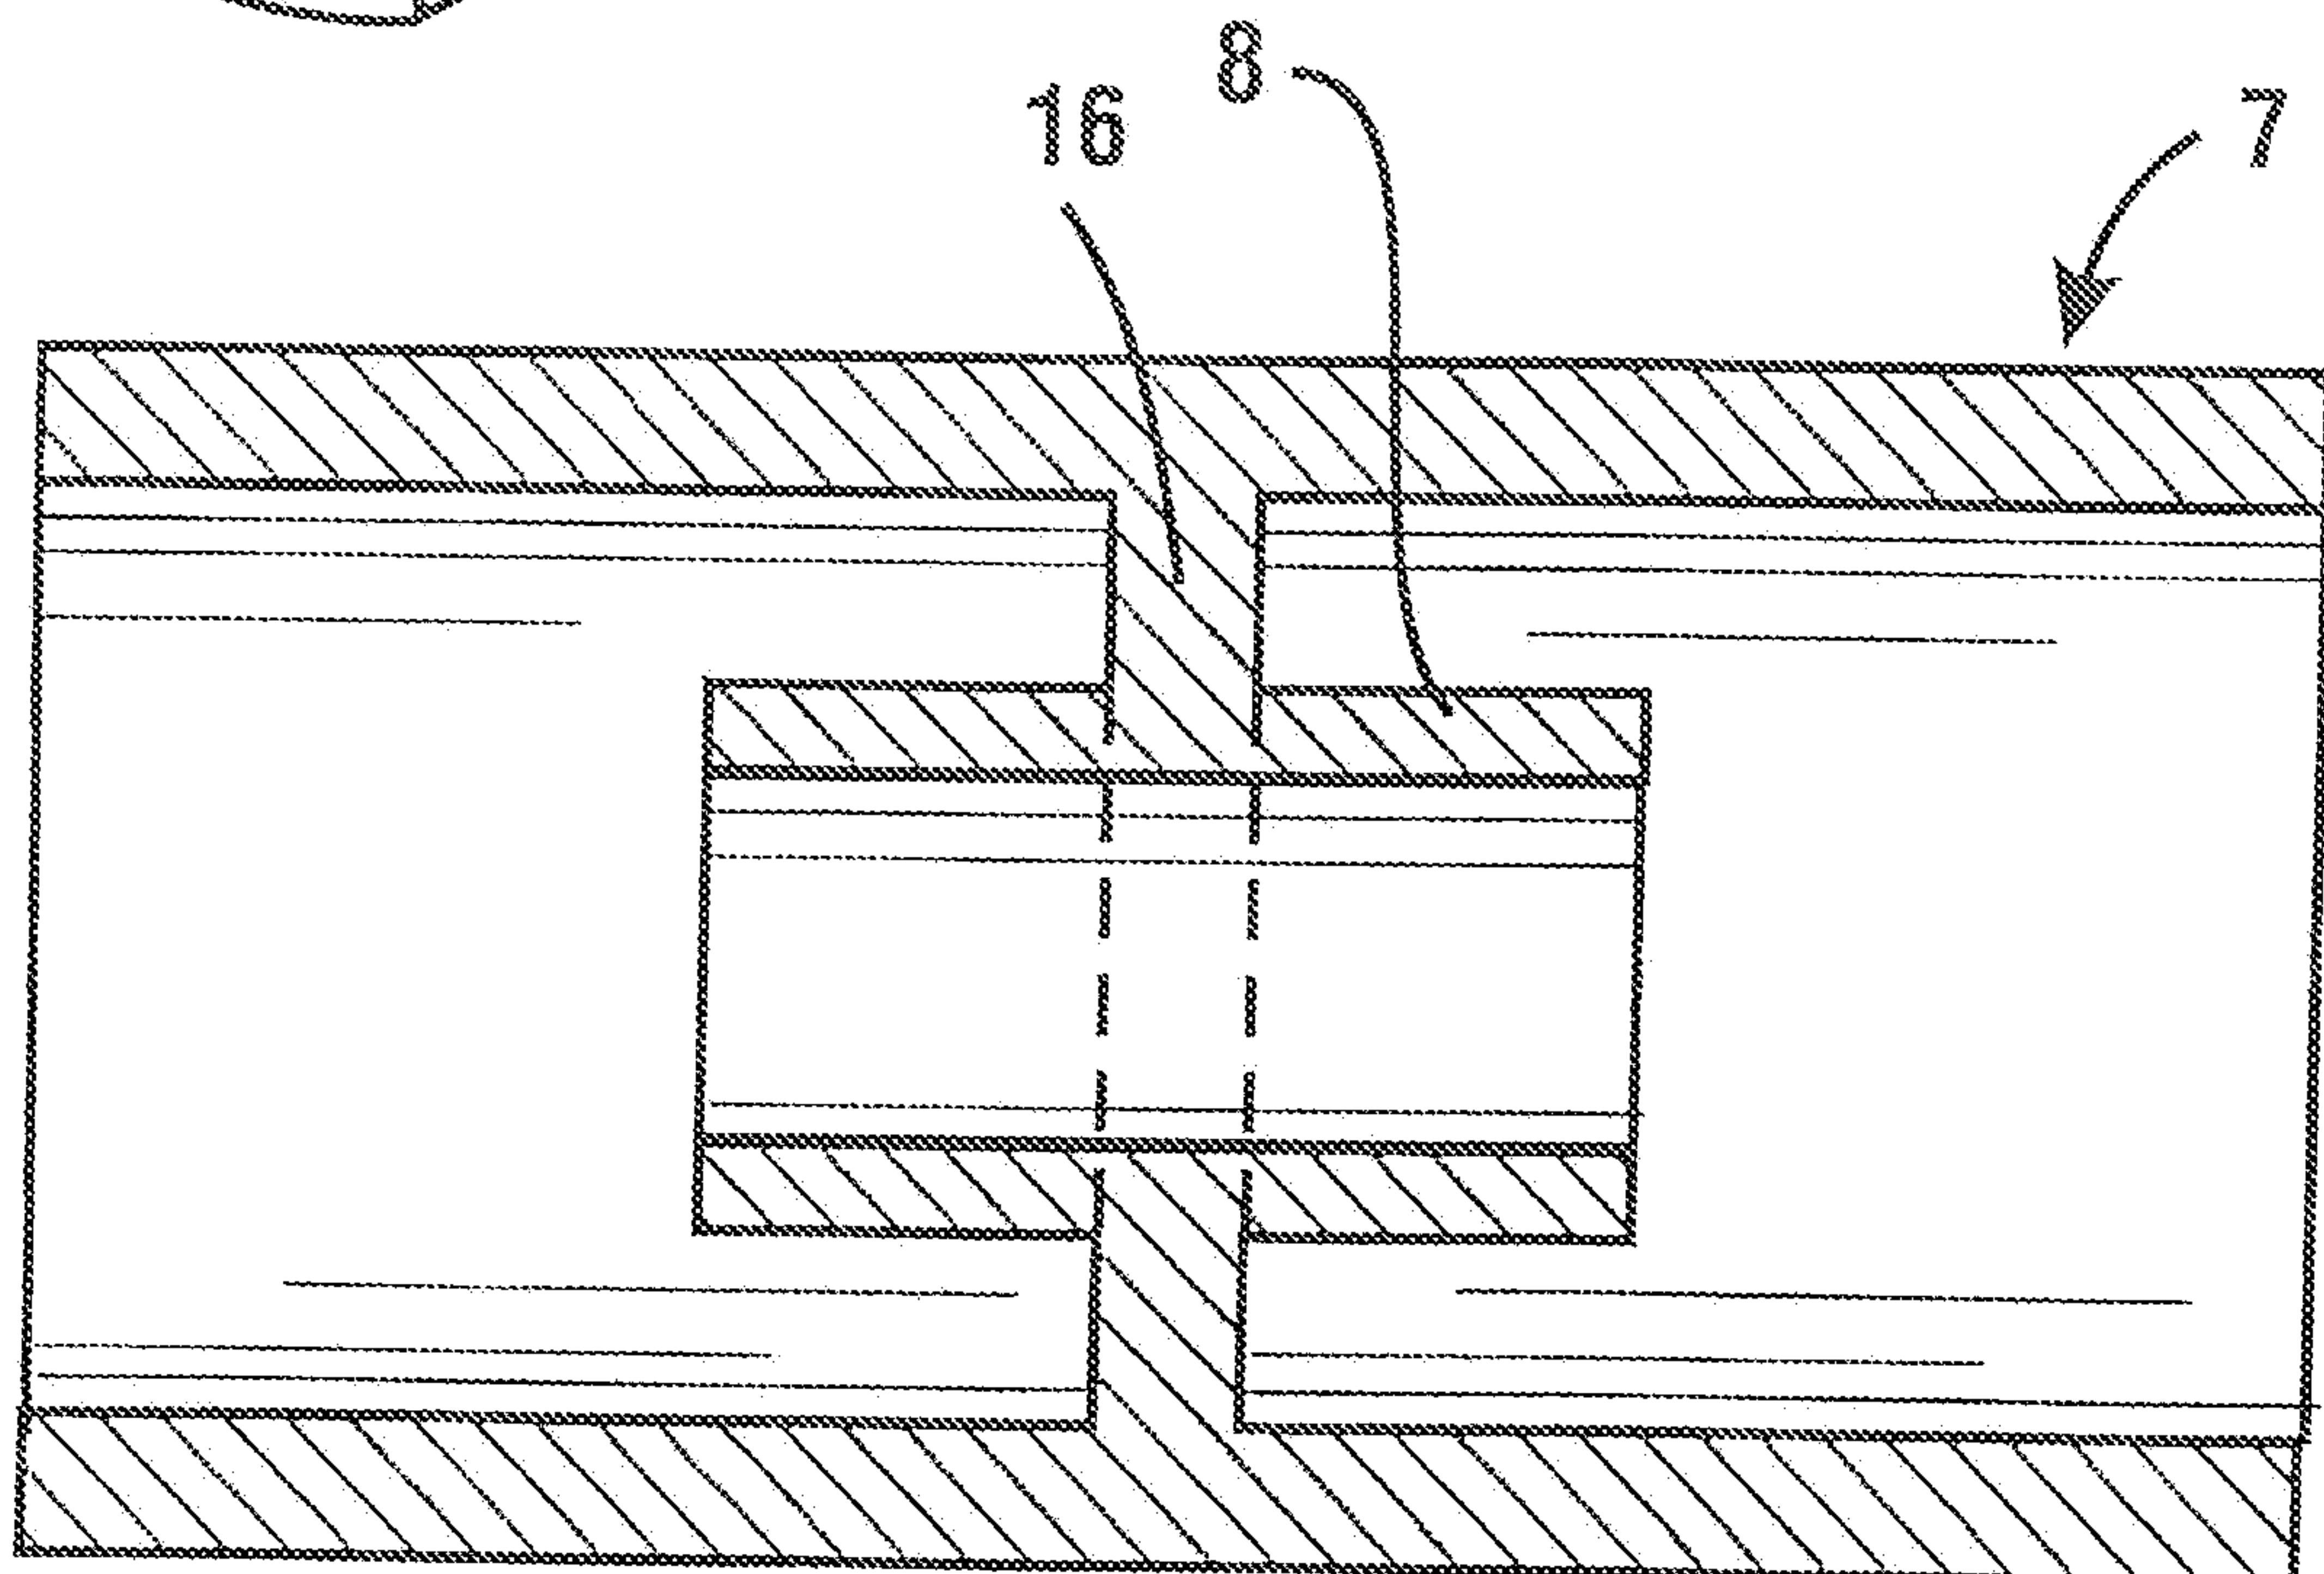
Fig. 3AFig. 3BFig. 3C

4/8

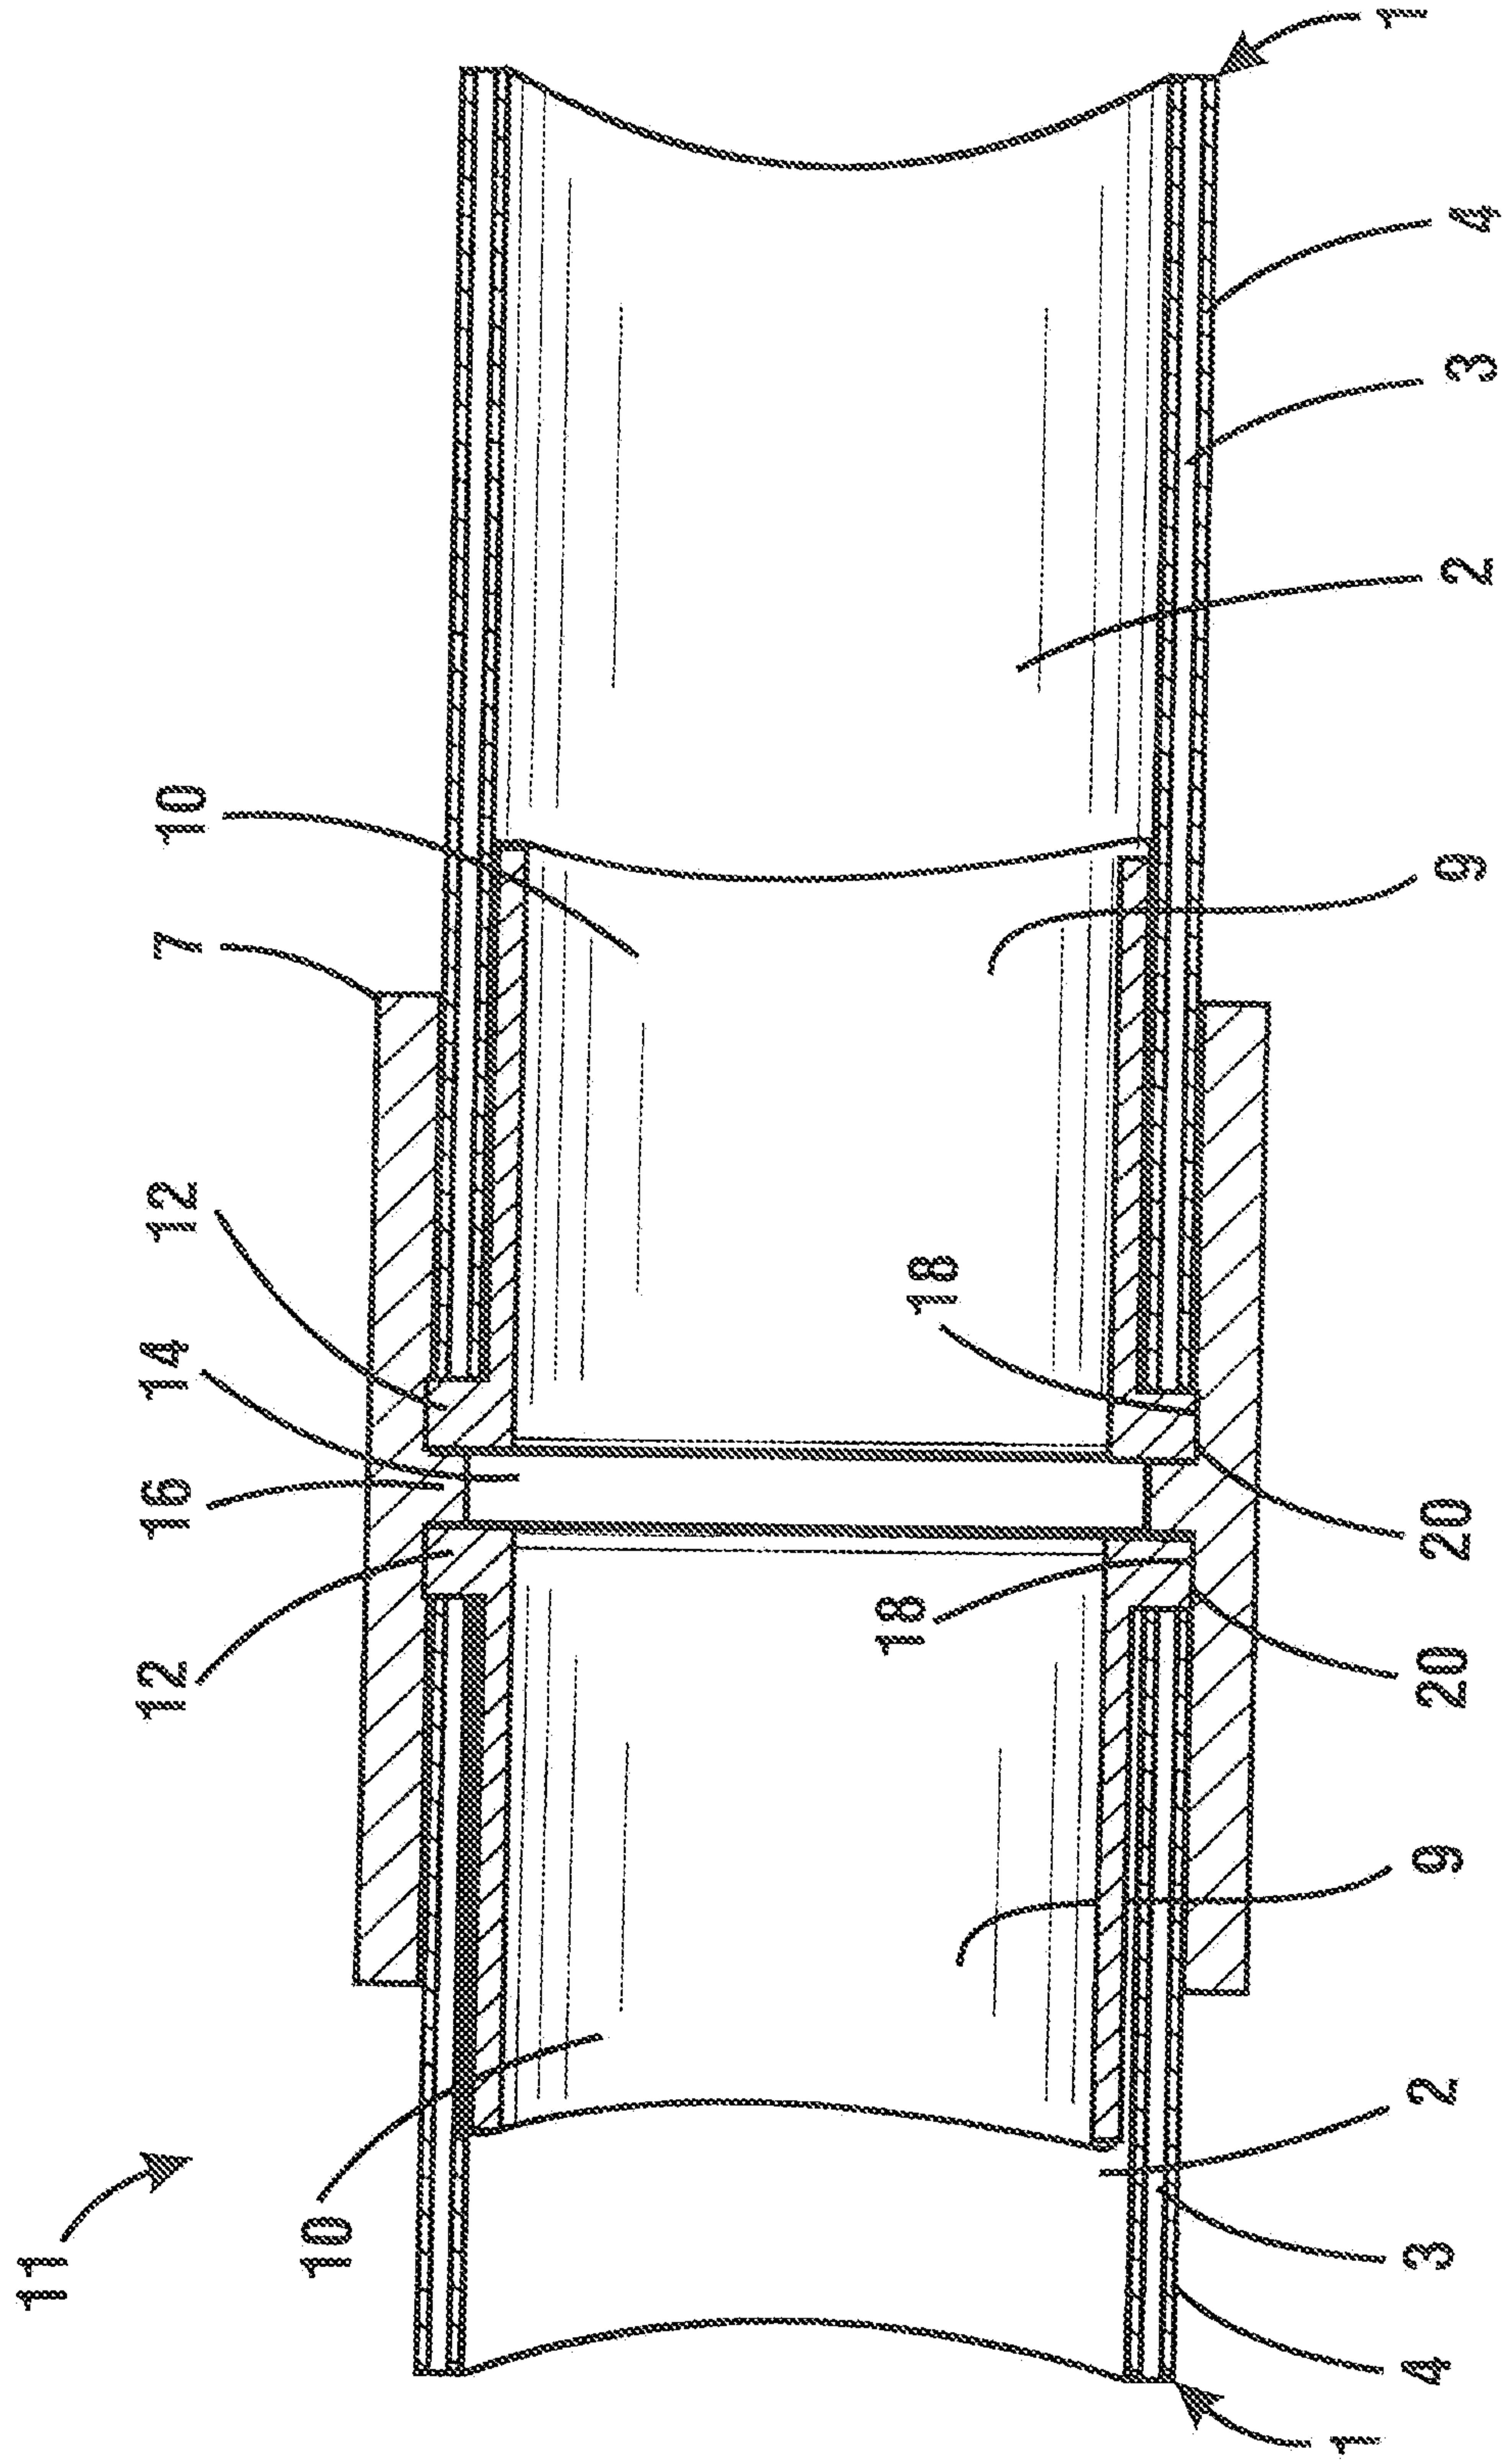
Fig. 4

5/8

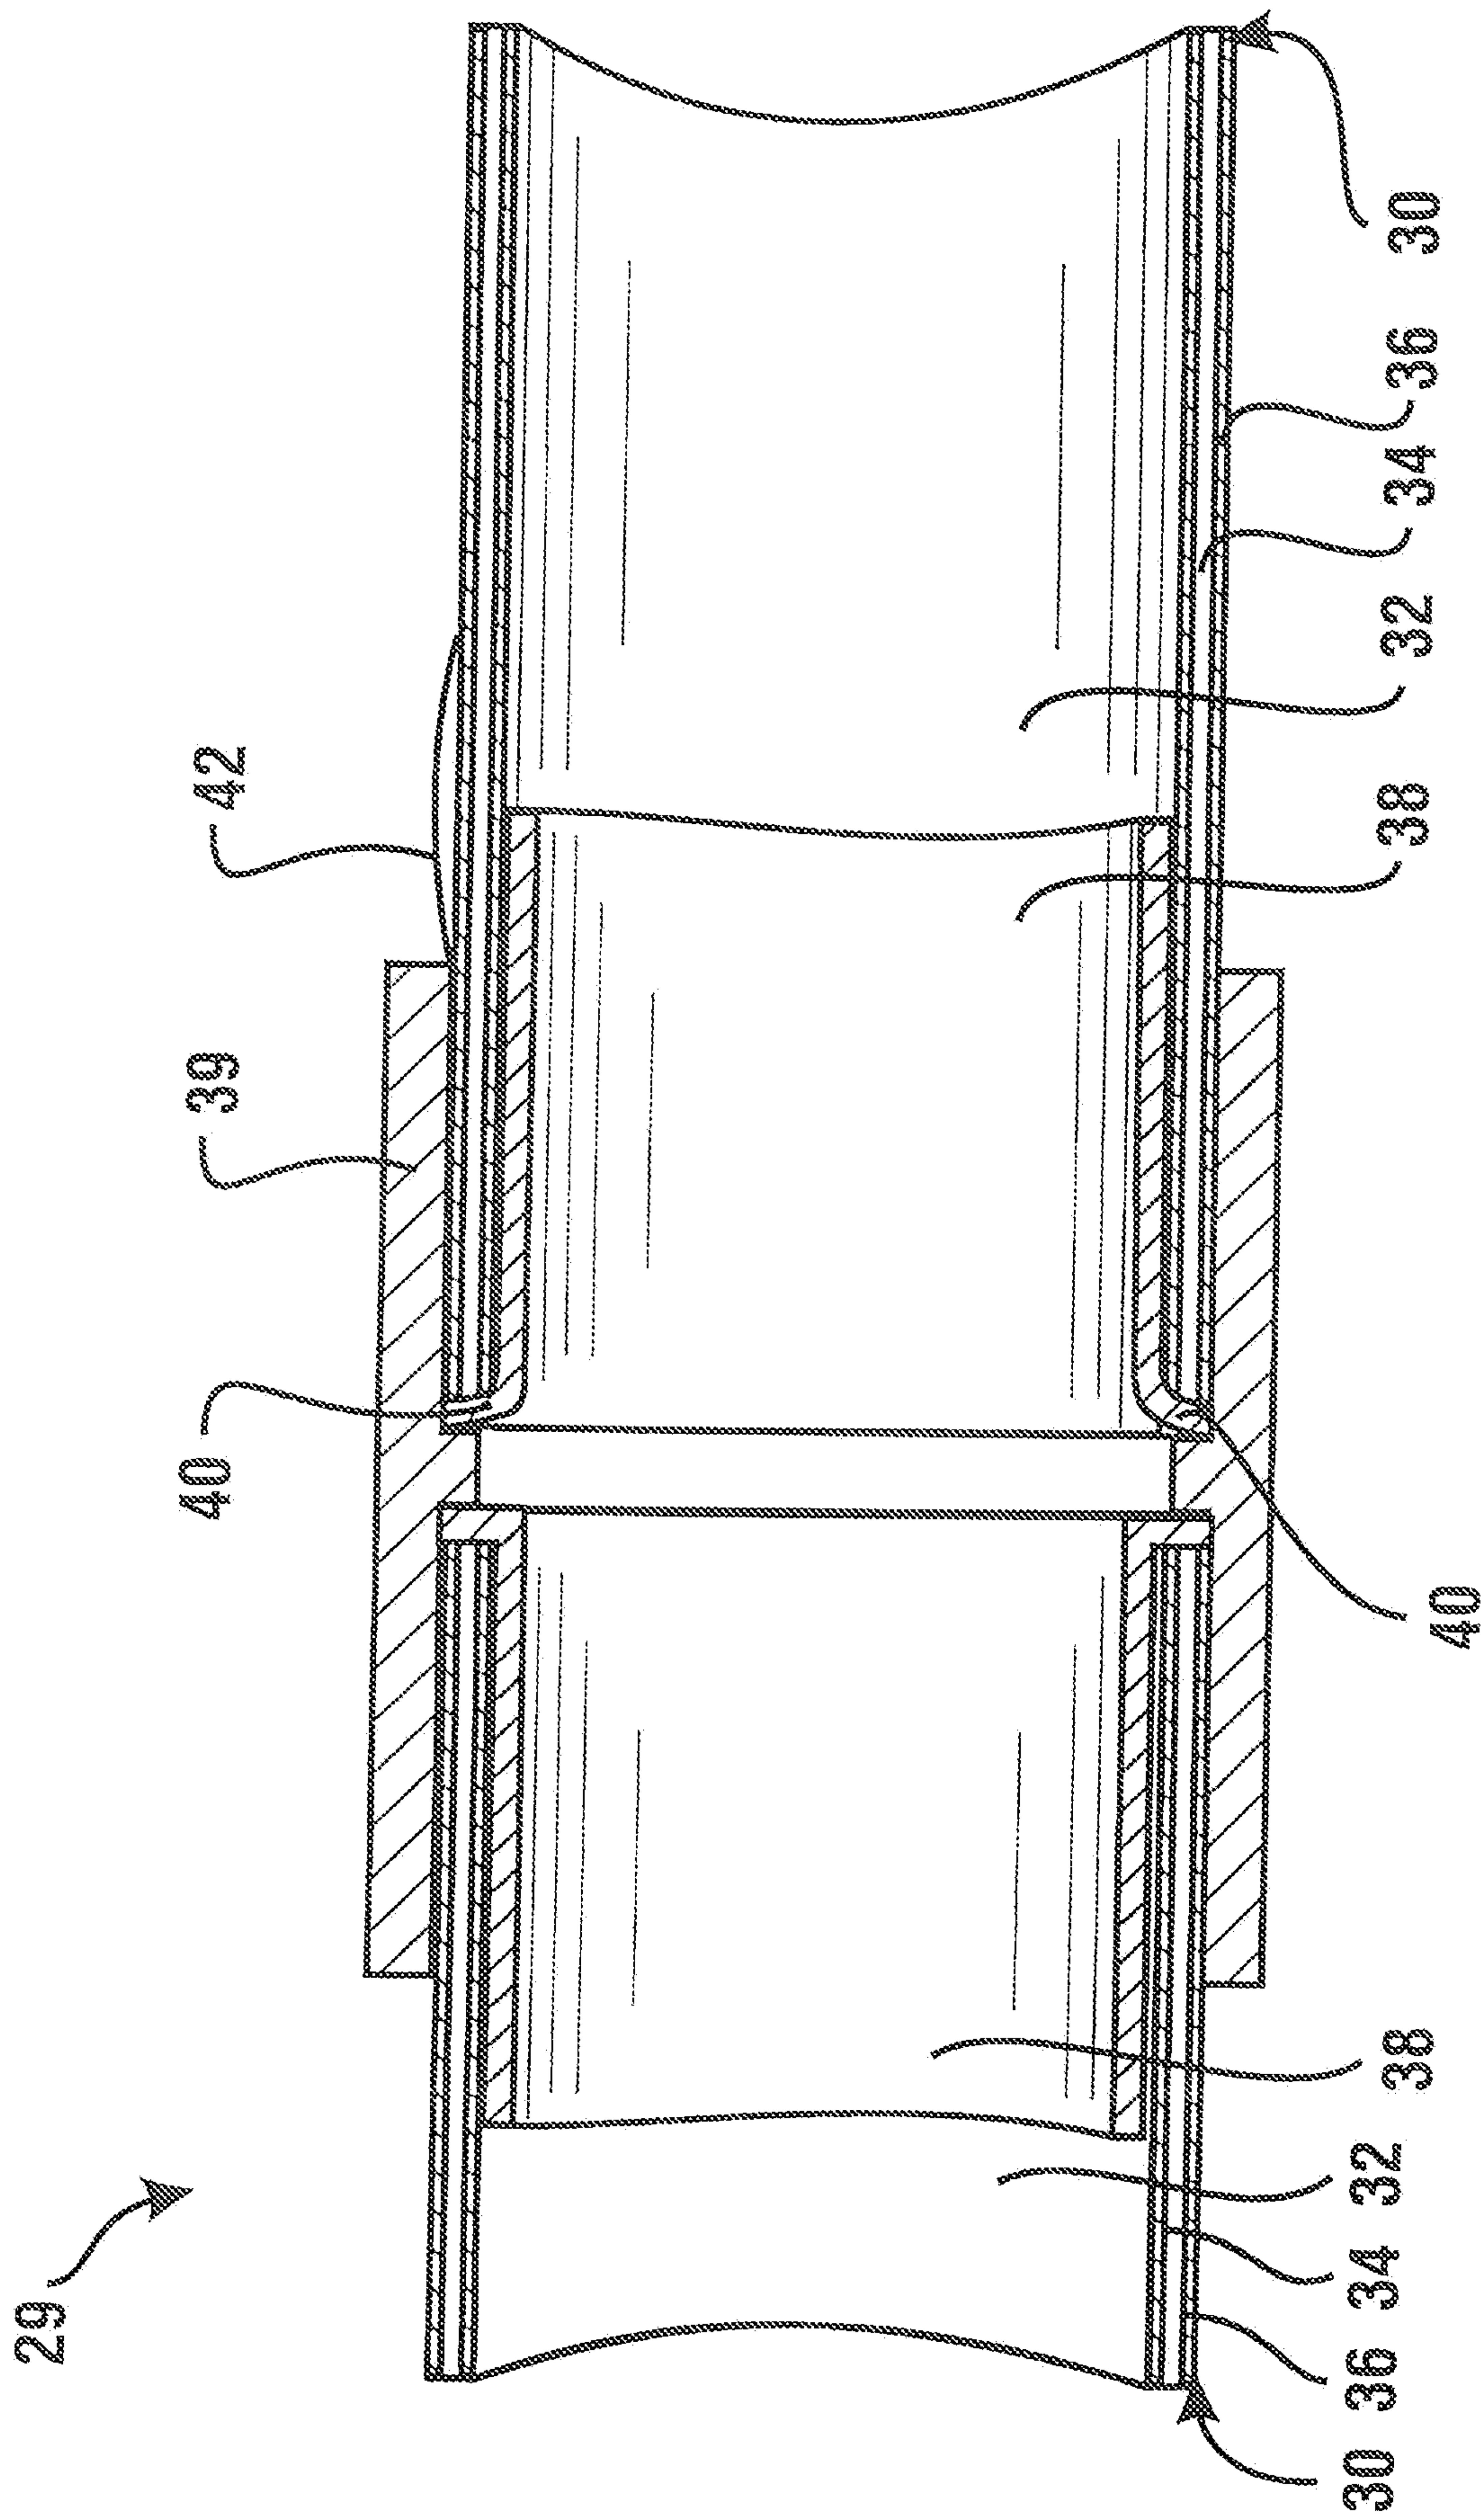
Fig. 5

Fig. 6aFig. 6B

7/8

Fig. 7

8/8

Fig. 8

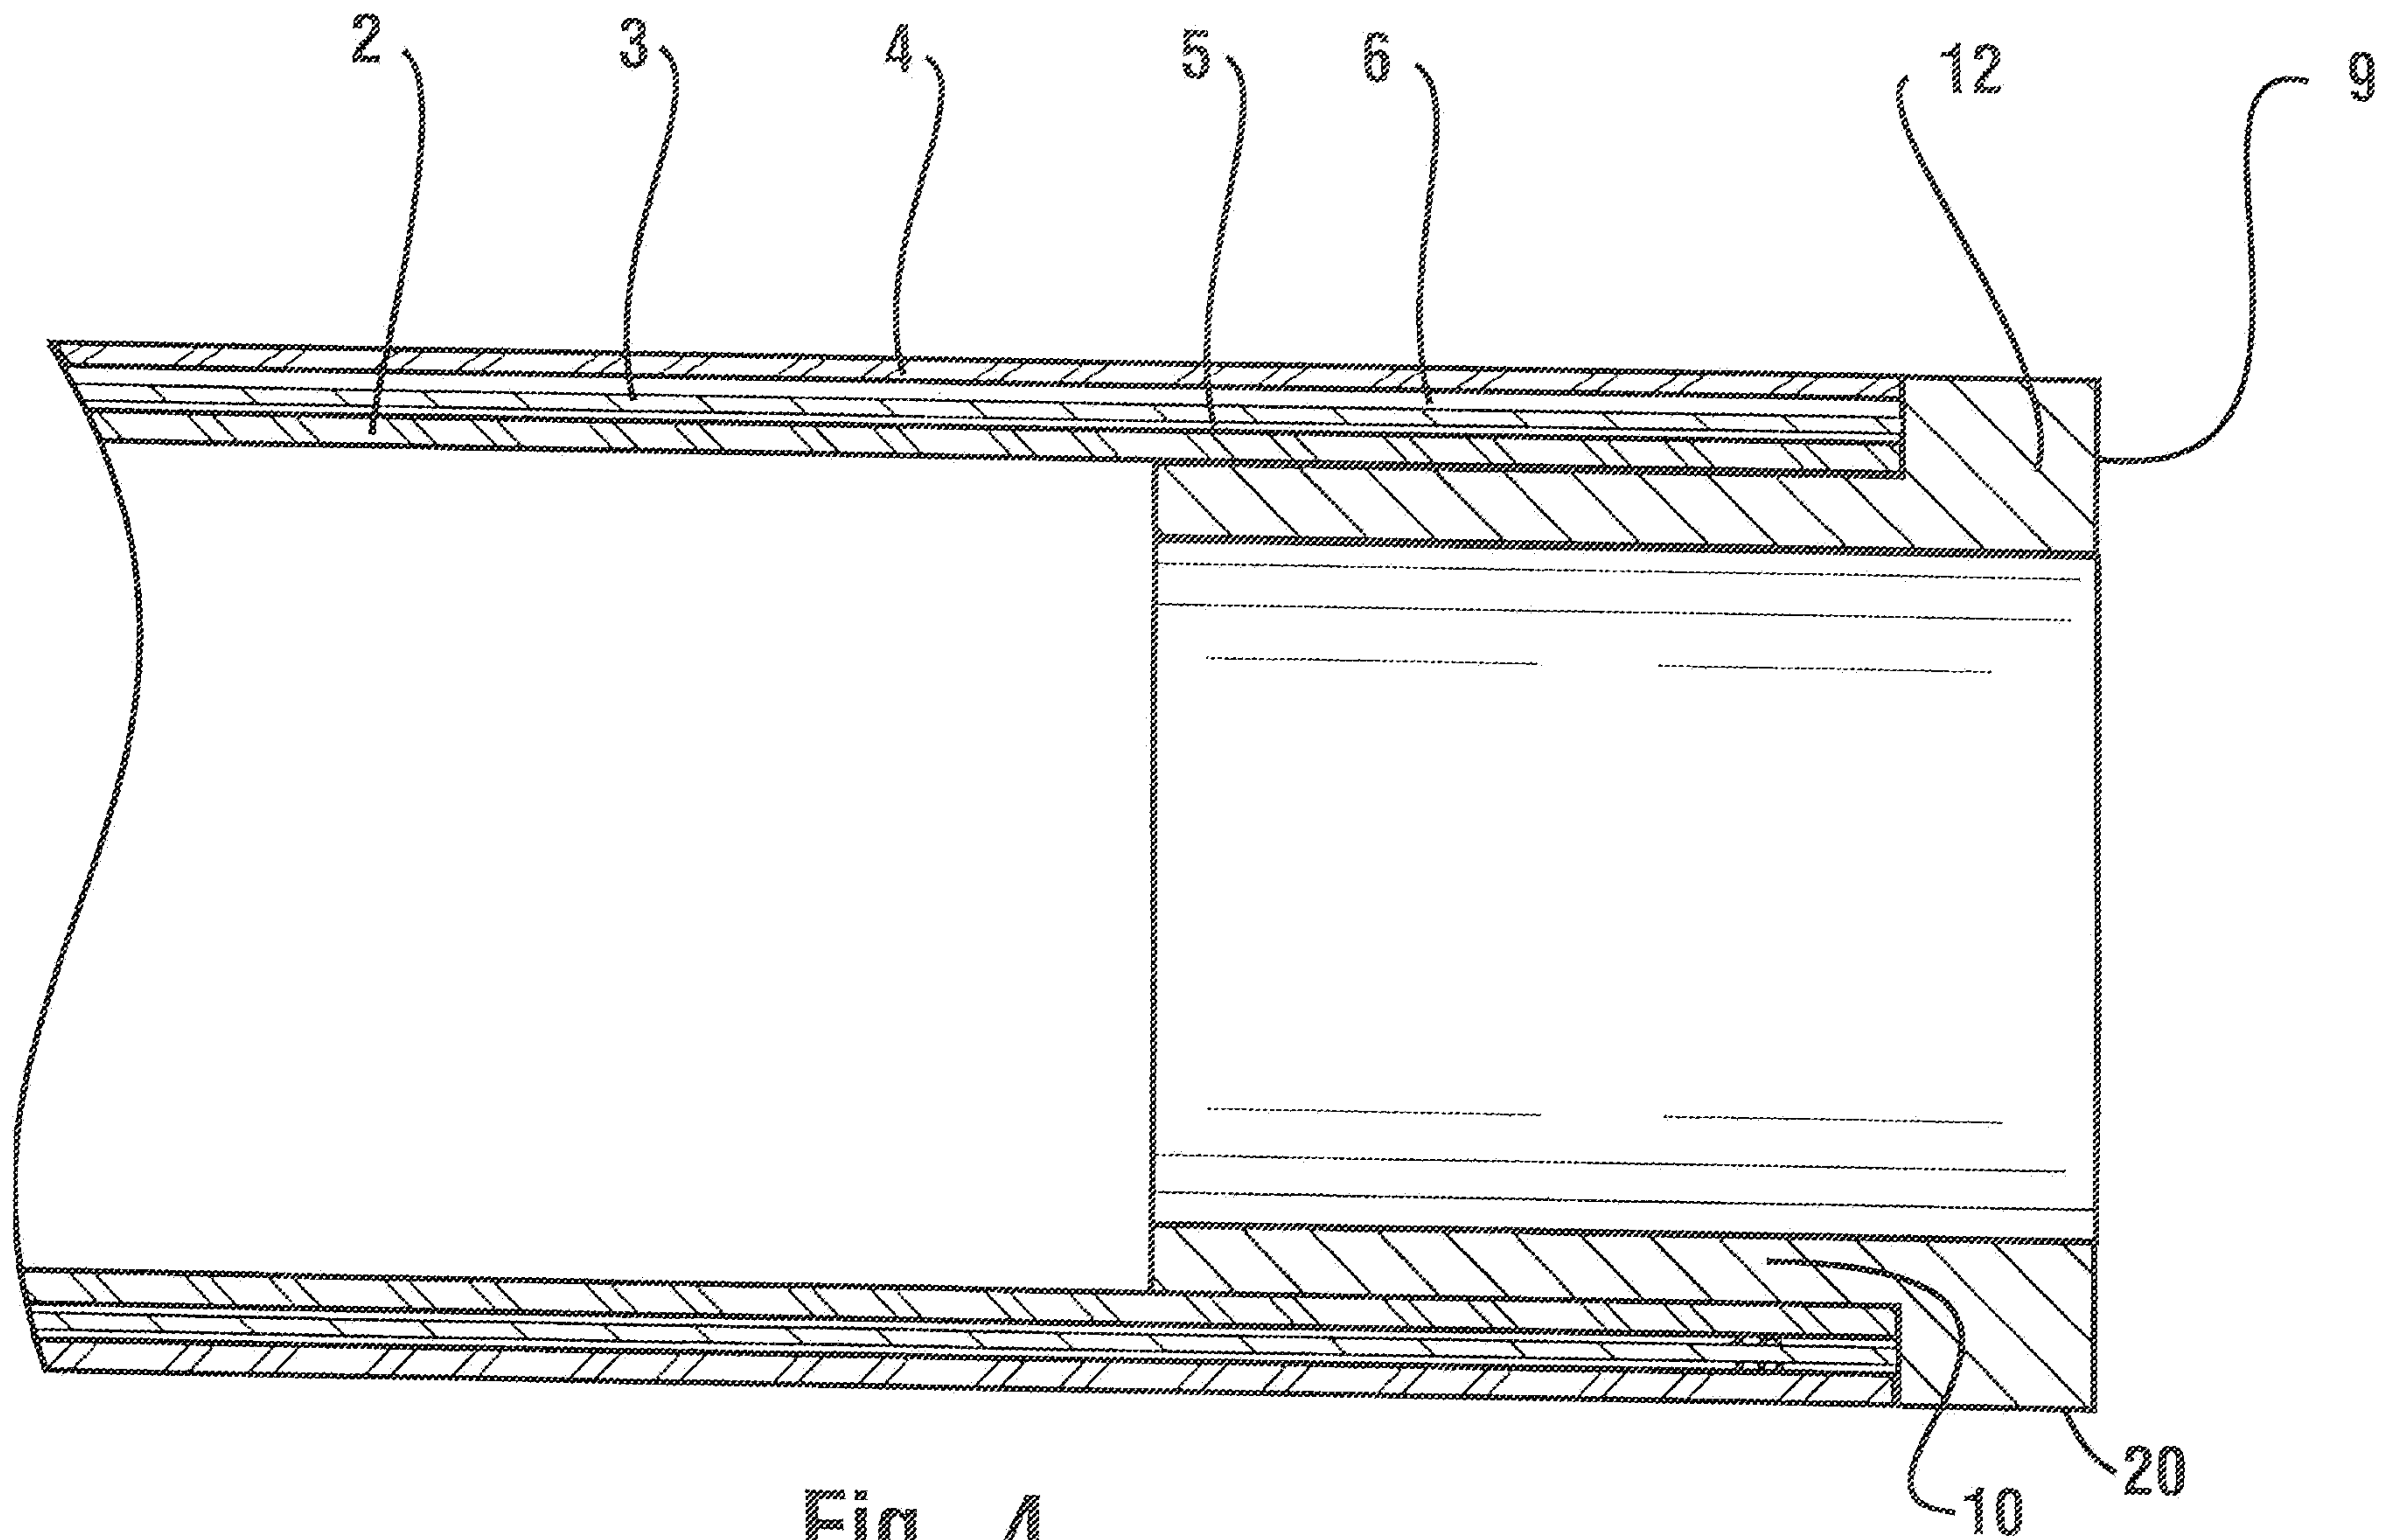


Fig. 4