




(86) Date de dépôt PCT/PCT Filing Date: 2013/12/10
(87) Date publication PCT/PCT Publication Date: 2014/06/19
(45) Date de délivrance/Issue Date: 2020/03/24
(85) Entrée phase nationale/National Entry: 2015/05/26
(86) N° demande PCT/PCT Application No.: EP 2013/076116
(87) N° publication PCT/PCT Publication No.: 2014/090817
(30) Priorité/Priority: 2012/12/12 (DE10 2012 222 915.9)

(51) Cl.Int./Int.Cl. *F16D 21/06* (2006.01),
F16D 25/0638 (2006.01)
(72) Inventeurs/Inventors:
DATEMA, HENDRIK, DE;
GLOMM, MATTHIAS, DE;
HASEKER, THOMAS, DE
(73) Propriétaire/Owner:
STROMAG GMBH, DE
(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : DOUBLE EMBRAYAGE COMPRENANT DEUX UNITES D'EMBRAYAGE FONCTIONNANT A FORCE
(54) Title: DUAL CLUTCH COMPRISING TWO CLUTCH UNITS WHICH ACT IN A FORCE-FITTING MANNER

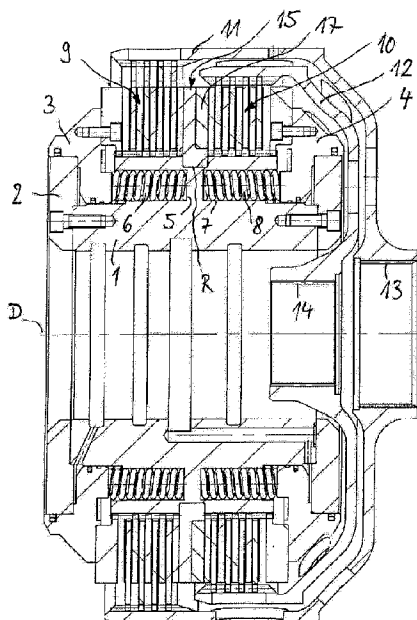

(57) **Abrégé/Abstract:**

The invention relates to a dual clutch comprising two clutch units (9, 10), which act in a force-fitting manner and which are mounted on a common clutch hub (1) in a rotationally fixed and axially movable manner, comprising a pressure disk arrangement (15), which is retained between the clutch units on the clutch hub in an axially fixed manner, and comprising two axially movable pressure pistons (3, 4), each of which can be ventilated by means of a compression spring arrangement positioned in the clutch hub. Each compression spring arrangement comprises multiple compression springs (6, 8), each of which is arranged in a recess (5, 7) of the clutch hub. Each recess is introduced into the clutch hub as an axially extending blind hole (5, 7). According to the invention, the pressure disk arrangement is received in a radial groove (R) of the clutch hub, said groove being radially and/or axially spaced from the blind holes (5, 7).

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges

Eigentum

Internationales Büro

(43) Internationales

Veröffentlichungsdatum

19. Juni 2014 (19.06.2014)



(10) Internationale Veröffentlichungsnummer

WO 2014/090817 A1

- (51) Internationale Patentklassifikation:
F16D 21/06 (2006.01) F16D 25/0638 (2006.01)
- (21) Internationales Aktenzeichen: PCT/EP2013/076116
- (22) Internationales Anmeldedatum:
10. Dezember 2013 (10.12.2013)
- (25) Einreichungssprache: Deutsch
- (26) Veröffentlichungssprache: Deutsch
- (30) Angaben zur Priorität:
10 2012 222 915.9
12. Dezember 2012 (12.12.2012) DE
- (71) Anmelder: GKN STROMAG AG [DE/DE]; Hansasträße
120, 59425 Unna (DE).
- (72) Erfinder: DATEMA, Hendrik; Ludwig-Erhard-Str. 51,
59065 Hamm (DE). GLOMM, Matthias; Auf Haus
Hennen 6B, 58640 Iserlohn (DE). HÄSEKER, Thomas;
Bajuwarenring 23a, 92283 Lauterhofen (DE).
- (74) Anwalt: PATENTANWÄLTE RUFF, WILHELM,
BEIER, DAUSTER & PARTNER; 10 40 36, 70035
Stuttgart (DE).
- (81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,
AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW,
BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK,
DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM,
GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.
- (84) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare regionale Schutzrechtsart): ARIPO (BW,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ,
TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ,

[Fortsetzung auf der nächsten Seite]

(54) Title: DUAL CLUTCH COMPRISING TWO CLUTCH UNITS WHICH ACT IN A FORCE-FITTING MANNER

(54) Bezeichnung : DOPPELSCHALTKUPPLUNG MIT ZWEI KRAFTSCHLÜSSIG WIRKSAMEN KUPPLUNGSEINHEITEN

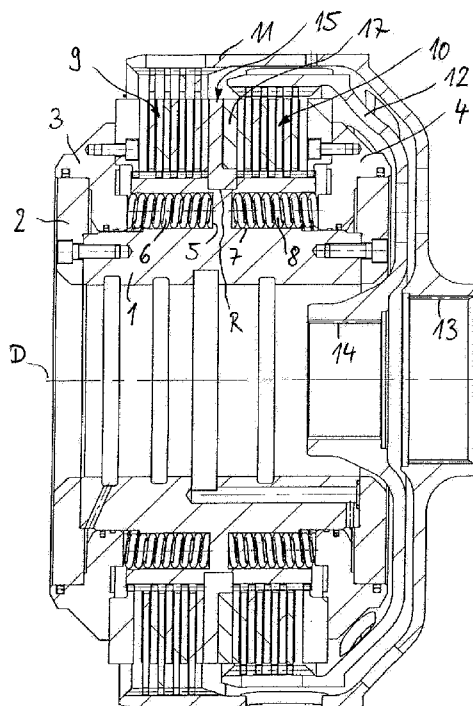


Fig. 2 a

(57) Abstract: The invention relates to a dual clutch comprising two clutch units (9, 10), which act in a force-fitting manner and which are mounted on a common clutch hub (1) in a rotationally fixed and axially movable manner, comprising a pressure disk arrangement (15), which is retained between the clutch units on the clutch hub in an axially fixed manner, and comprising two axially movable pressure pistons (3, 4), each of which can be ventilated by means of a compression spring arrangement positioned in the clutch hub. Each compression spring arrangement comprises multiple compression springs (6, 8), each of which is arranged in a recess (5, 7) of the clutch hub. Each recess is introduced into the clutch hub as an axially extending blind hole (5, 7). According to the invention, the pressure disk arrangement is received in a radial groove (R) of the clutch hub, said groove being radially and/or axially spaced from the blind holes (5, 7).

(57) Zusammenfassung: Eine Doppelschaltkupplung mit zwei kraftschlüssig wirksamen Kupplungseinheiten (9, 10), die auf einer gemeinsamen Kupplungsnahe (1) drehfest und axial beweglich gelagert sind, sowie mit einer axial fest zwischen den Kupplungseinheiten auf der Kupplungsnahe gehaltenen Druckscheibenanordnung (15), und mit zwei axial beweglichen Druckkolben (3, 4), die mittels jeweils einer in der Kupplungsnahe

[Fortsetzung auf der nächsten Seite]

WO 2014/090817 A1

WO 2014/090817 A1

RU, TJ, TM), europäisches (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

— mit internationalem Recherchenbericht (Artikel 21 Absatz 3)

positionierten Druckfederanordnung lüftbar sind, wobei jede Druckfederanordnung mehrere Druckfedern (6, 8) umfasst, die in jeweils einer Aussparung (5, 7) der Kupplungsnahe angeordnet sind, wobei jede Aussparung in die Kupplungsnahe als axial erstrecktes Sackloch (5, 7) eingebracht ist, ist bekannt. Erfindungsgemäß ist die Druckscheibenanordnung in einer Radialnut (R) der Kupplungsnahe aufgenommen, die radial und/oder axial zu den Sacklöchern (5, 7) beabstandet ist.

Dual clutch comprising two clutch units which act in a force-fitting manner

The invention relates to a dual clutch comprising two clutch units, which act nonpositively and which are mounted on a common clutch hub for conjoint rotation and in an axially movable manner - in relation to an axis of clutch
5 rotation - comprising a multipart pressure disk arrangement, which is held in an axially fixed manner on the clutch hub between the clutch units, and comprising two axially movable pressure pistons, each of which can be released by means of a compression spring arrangement positioned in the clutch hub, wherein each aperture is introduced into the clutch hub as an
10 axially extending blind hole.

A dual clutch of this kind is known from Catalog No. D 228, dated 01.1999, published by Stromag AG. The known dual clutch has two plate packs, which are mounted for conjoint rotation and axial movement on a common clutch hub. The two plate packs are separated from one another by a
15 pressure disk arrangement, which is seated externally on the clutch hub and is secured axially on the clutch hub. The two plate packs can each be acted upon by an axially movable pressure piston, which can each be transferred into a release position for the plate packs by means of a compression spring arrangement positioned in the clutch hub.

DE 10 2010 046 633 A1 discloses another dual clutch, in which a pressure disk arrangement is arranged axially between two plate packs. The pressure disk arrangement is accommodated in an outwardly open radial groove in the clutch hub. Corresponding compression springs of the compression spring arrangements for releasing the pressure pistons are
20 supported on the pressure disk arrangement. The corresponding apertures of oppositely situated compression springs in the clutch hub are aligned coaxially with one another and are each formed by a common hole, which passes through the entire length of the clutch hub. The pressure disk arrangement is constructed from three parts, comprising two pressure disk
25 segments, which adjoin one another in the circumferential direction, and a carrier ring, to which the pressure disk segments are axially connected.
30

It is an object of the invention to provide a dual clutch of the type stated at the outset which allows disassembly and reassembly.

This object is achieved by virtue of the fact that the pressure disk arrangement is accommodated in a radial groove in the clutch hub, said groove being spaced apart radially and/or axially from the blind holes in relation to the axis of clutch rotation. Accommodating the pressure disk arrangement in the radial groove ensures reliable fixing of the pressure disk arrangement on the clutch hub. By virtue of the fact that the radial groove is spaced apart radially and/or axially from the blind holes, the pressure disk arrangement can be assembled and disassembled without being affected by the position and functioning of the pressure disk arrangements. In DE 10 2010 046 633 A1, removal of the pressure disk arrangement after successful initial installation was virtually impossible since at least one compression spring arrangement is supported axially on the pressure disk arrangement and makes removal of the pressure disk arrangement impossible or possible only under more difficult conditions, owing to the high spring stress.

In a refinement of the invention, the pressure disk arrangement has at least two pressure disk segments, which adjoin one another in the circumferential direction, and a one-part carrier ring, to which the pressure disk segments are connected. Each pressure disk segment advantageously has an axially extending shoulder situated radially on the inside, which is adjoined radially on the outside by the carrier ring. In this arrangement, an axial extent of the shoulder preferably corresponds to an axial thickness of the carrier ring. In order to ensure exclusive frictional contact by the carrier ring, the carrier ring is preferably always slightly thicker than the axial extent of the shoulder. A radial distance of the shoulder from a radially outer boundary edge of the respective pressure disk segment advantageously corresponds to a radial extent of the carrier ring. By means of the refinements described, a contact surface on a flat part of the pressure disk arrangement is achieved for the clutch units, resulting in a particularly uniform surface pressure for the corresponding clutch units. In a further refinement, the radial extent of the carrier ring corresponds at least largely to a radial extent of an effective contact surface of the adjacent clutch unit. A plate pack comprising a plurality of inner and outer plates is preferably provided as a clutch unit. Both the carrier ring opposite the adjacent clutch unit and a face, facing the other clutch unit, of the at least two pressure disk segments form correspondingly flat contact surfaces extending radially in a continuous one-piece way. By

virtue of the refinements, the carrier ring furthermore rests in an accurately fitting manner, with support radially on the inside, on the pressure disk segments, with the result that outer surfaces of the carrier ring end flush and in alignment with corresponding outer contours of the pressure disk segments. As a result, the pressure disk segments and the carrier ring rest against one another in a particularly compact way and in the form of a pack, ensuring that at most slight elastic deformations occur between the carrier ring and the pressure disk segments during clutch operation. These measures too result in particularly uniform surface pressure of the pressure disk arrangement relative to the adjacent clutch units, in particular plate packs. By virtue of the refinements described, the pressure disk segments and the carrier ring rest flat upon one another in such a way that power flow always takes place via the wide contact surfaces between the pressure disk segments and the carrier ring during clutch operation, even in the case of elastic deformations.

In a further refinement of the invention, the at least two pressure disk segments are each held spaced apart at the joints thereof as seen in the circumferential direction by a key, each of which keys is fitted into a complementary key slot in a base of the radial groove. This allows improved suitability of the pressure disk arrangement for fitting on the clutch hub.

By means of the solution according to the invention, it is possible to enable disassembly of the dual clutch from one axial side and, accordingly, replacement of the corresponding clutch units, in particular plate packs. The dual clutch according to the invention is advantageously provided for use in an industrial transmission, preferably for driving an exploration pump for delivering crude oil. As an alternative, the invention can also be used with machine tools, in industrial plant or on commercial vehicles.

Further advantages and features of the invention will become apparent from the claims and from the following description of a preferred exemplary embodiment of the invention, which is illustrated by means of the drawings, in which:

Figure 1 shows one embodiment of a dual clutch according to the invention in a front view,

Figure 2a shows a longitudinal section through the dual clutch along section line a-a in figure 1,

Figure 2b shows a longitudinal section through the dual clutch according to figure 1 along section line b-b,

5 Figure 3 shows a multipart pressure disk arrangement of the dual clutch according to figures 1 to 2b in an enlarged front view,

Figure 4 shows a section through the pressure disk arrangement along section line IV-IV in figure 3, and

10 Figure 5 shows another section through the pressure disk arrangement according to figure 3 along section line V-V in figure 3

A hydraulic dual clutch according to figures 1 to 5 has a single-part inner body 1 serving as a clutch hub in the sense according to the invention. A first pressure piston 3 is supported in an axially movable manner on the inner body 1 on the left-hand side, and a second pressure piston 4 is supported in an axially movable manner on said inner body on the right-hand side - relative to the drawings according to figures 2a and 2b. The two pressure pistons 3 and 4 can be subjected to hydraulic pressure in opposite directions to one another. For this purpose, a cylinder wall 2 is provided for the first pressure piston 3 on the left-hand side, and a second cylinder wall is provided for the pressure piston 4 on the right-hand side. Two clutch units in the form of two plate packs 9, 10, each consisting of a plurality of inner and outer plates, are arranged between the axially spaced pressure pistons 3. The inner plates of the two plate packs 9, 10 are held for conjoint rotation and axial movement by means of longitudinal splines extending axially with respect to an axis of clutch rotation D. The outer plates of the two plate packs 9, 10 are connected for conjoint rotation and axial movement, by means of corresponding external splines, to axially extending internal splines on two clutch bells 11, 12, wherein the clutch bell 11 associated with the left-hand plate pack 9 defines a first output 13, and the clutch bell 12 associated with the second plate pack 10 defines an output 14, which is aligned coaxially with the first output 13.

The two plate packs 9, 10 are separated axially from one another by a pressure disk arrangement 15, which is of ring-shaped configuration and is embedded in a radial groove R in the inner body 1, said groove being arranged in an axially central manner. The radial groove R is made deeper
5 than corresponding axial groove depths of the axially extending plate splines on the inner body 1, as is readily apparent from figures 2a and 2b.

A compression spring arrangement 5, 6; 7, 8 for each pressure piston 3, 4 is furthermore integrated into the inner body 1, said arrangement comprising a plurality of compression springs 6, 8 arranged in a manner
10 distributed over the circumference of the inner body 1. The compression springs 6, 8 are of identical configuration to one another and are embodied as helical compression springs. Each compression spring 6, 8 is integrated into an associated aperture 5, 7 in the inner body 1. The apertures 5, 7 are introduced as blind holes into the inner body 1, from opposite ends of the
15 latter, and extend parallel to the axis of rotation D of the dual clutch. Accordingly, each compression spring 6, 8 is supported axially on the inside against a base of the associated aperture 5, 7 configured as a blind hole and exerts a pressure force on the corresponding pressure piston 3, 4 in the direction of release, in which the respective pressure piston 3, 4 is
20 pushed axially away from the associated plate pack 9, 10. The radial groove R and the apertures 5, 7 do not merge into one another; on the contrary, they are separated from one another axially and radially, thus ensuring that the radial groove R is completely closed over its entire periphery, radially toward the inside and toward both axial sides.

25 The pressure disk arrangement 15 has a carrier ring 17, which is a single continuous part over its entire circumference and is connected to two semi-annular pressure disk segments 16a, 16b. Each semicircular pressure disk segment 16a, 16b has an axially projecting shoulder 18 in the form of a circular arc, which is provided radially on the inside of the respective
30 pressure disk segment 16b. An axial extent of the shoulder 18 corresponds approximately to an axial thickness of the carrier ring 17. At the same time, it must be ensured that the axial thickness of the carrier ring 17 is always slightly greater than the greatest axial extent of the shoulder 18. This ensures that the flat outer surface of the carrier ring 17 always forms a
35 corresponding friction surface for the adjacent plate pack 10 and that an end face of the shoulder 18 does not come into contact with the facing

friction surface of the plate pack 10. A radial extent, from the radial outer side of the shoulder 18 to the radially outer boundary edge of each pressure disk segment 16a, 16b, is identical with the radial extent of the carrier ring 17, thus ensuring that, as illustrated in figures 4 and 5, the carrier ring 17 lies flat and flush against a facing face of the respective pressure disk segment 16a, 16b by means of one face and otherwise ends flush and in alignment with the outer surfaces of the respective pressure disk segment 16a, 16b by means of its outer contour, both in the region of the shoulders 18 and in the radially outer rim region.

10 A key P is inserted radially on the inside at each of the two joints between the adjoining pressure disk segments 16a, 16b, said keys being assigned a corresponding key slot N in the radially inner base of the radial groove R in the inner body 1. During assembly of the pressure disk arrangement 15, the two keys P are inserted into the key slots N before the pressure disk segments 16a and 16b are placed on the inner body 1 radially from the outside and inserted radially into the radial groove R. The keys P make it easier to position the pressure disk segments 16a, 16b within the radial groove R. After the insertion of the pressure disk segments 16a, 16b, the carrier ring 17 is pushed axially over the inner body 1 and centered on the circular-arc-shaped shoulders 18 of the pressure disk segments 16a, 16b. The carrier ring 17 is then fixed on the pressure disk segments 16a, 16b by means of axially acting fastening means in the form of screw fasteners 19. For this purpose, the pressure disk segments 16a, 16b have threaded holes, and corresponding sockets for corresponding headed screws, which are screwed into the threaded holes, are provided in the carrier ring 17.

In the dual clutch illustrated by means of figures 1 to 5, the plate packs 9, 10 can be replaced in a simple manner from one side of the clutch. This is the right-hand side of the clutch in the illustration according to figures 2a and 2b. After the two clutch bells 11 and 12 have been pulled off axially, the cylinder wall associated with pressure piston 4 is removed. After pressure piston 4 has been pulled off axially, plate pack 10 is removed axially. The carrier ring 17 of the pressure disk arrangement 15 is then screwed off the remaining pressure disk segment and removed axially to the right. The pressure disk segments 16a, 16b can then be pulled radially outward out of the radial groove R in the inner body 1. The first plate pack 9 is thus also exposed and can be removed axially from the inner body 1 via

the right-hand side of the clutch. By means of correspondingly reversed assembly operations, a new plate pack 9, the pressure disk arrangement 15 and, if appropriate, another new plate pack 10 can then be installed again before pressure piston 4, the associated cylinder wall and the two clutch bells 11 and 12 are placed on again axially and fitted ready for operation.


The positioning of the keys P within the radial groove R for conjoint rotation in the circumferential direction ensures support for conjoint rotation for the pressure disk segments 16a, 16b and, consequently, secure driving in rotation together with the inner body 1. As is readily apparent from figures 2a and 2b, a radial extent of the carrier ring 17 corresponds approximately to a radial extent of an effective contact surface of the adjacent inner plate of plate pack 10, wherein, radially on the outside, the carrier ring 17 also ends at least substantially in alignment with an outer rim of the corresponding inner plate. As a result, a contact surface which is flat throughout is obtained between the facing face of the carrier ring 17 and the contact surface, facing the carrier ring 17, of the adjacent inner plate of plate pack 10, thereby making it possible to achieve a particularly good surface pressure. Since the opposite faces of the pressure disk segments 16a, 16b, which face the other plate pack 9, also form a flat surface over their entire radial extent, a particularly uniform surface pressure is obtained on the side facing the other plate pack 9.

Patent claims

1. A dual clutch comprising two clutch units, which act nonpositively and which are mounted on a common clutch hub (1) for conjoint rotation and axial movement - in relation to an axis of clutch rotation -
5 comprising a multipart pressure disk arrangement, which is held in an axially fixed manner on the clutch hub between the clutch units, and comprising two axially movable pressure pistons, each of which can be released by means of a compression spring arrangement positioned in the clutch hub, wherein each compression spring
10 arrangement comprises a plurality of compression springs, each of which is arranged in an aperture in the clutch hub, wherein each aperture comprises an axially extending blind hole, characterized in that a portion of the pressure disk arrangement (15) is accommodated in a radial groove (R) in the clutch hub (1), and each of the blind holes has an axially innermost terminal end defined by a surface of the
15 clutch hub disposed to close off the axially innermost terminal end, the blind holes being disposed in non-intersecting relation with the groove within the clutch hub.
2. The dual clutch as claimed in claim 1, characterized in that the
20 pressure disk arrangement (15) has at least two pressure disk segments (16a, 16b), which adjoin one another at joints in the circumferential direction, and a one-part carrier ring (17), to which the pressure disk segments (16a, 16b) are connected.
3. The dual clutch as claimed in claim 2, characterized in that each
25 pressure disk segment (16a, 16b) has an axially extending shoulder (18) situated radially on the inside, which is adjoined radially on the outside by the carrier ring (17).
4. The dual clutch as claimed in claim 3, characterized in that an axial
30 extent of the shoulder (18) corresponds to an axial thickness of the carrier ring (17).
5. The dual clutch as claimed in claim 3 or 4, characterized in that a radial distance of the shoulder (18) from a radially outer boundary

edge of the respective pressure disk segment (16a, 16b) corresponds to a radial extent of the carrier ring (17).

- 5 6. The dual clutch as claimed in claim 5, characterized in that the radial extent of the carrier ring (17) corresponds at least largely to a radial extent of an effective contact surface of the adjacent clutch unit (9, 10).
7. The dual clutch as claimed in any one of claims 2-6, characterized in that axially acting fastening means (19) are provided, which connect the pressure disk segments (16a, 16b) to the carrier ring (17).
- 10 8. The dual clutch as claimed in any one of claims 2-7, characterized in that the at least two pressure disk segments (16a, 16b) are each held spaced apart at the joints thereof as seen in the circumferential direction by a key (P), each of which keys is fitted into a complementary key slot (N) in a base of the radial groove (R).

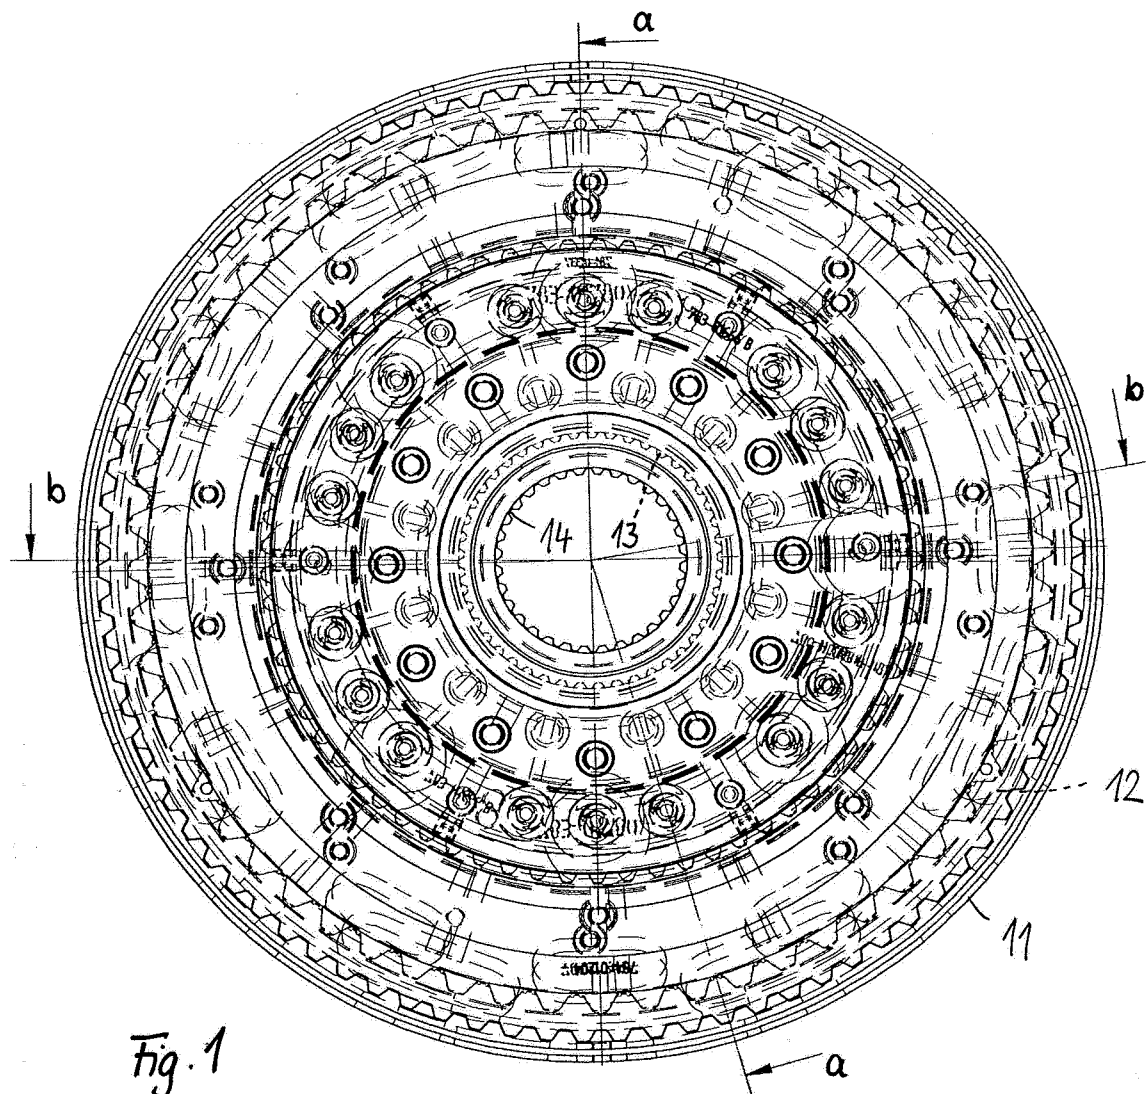

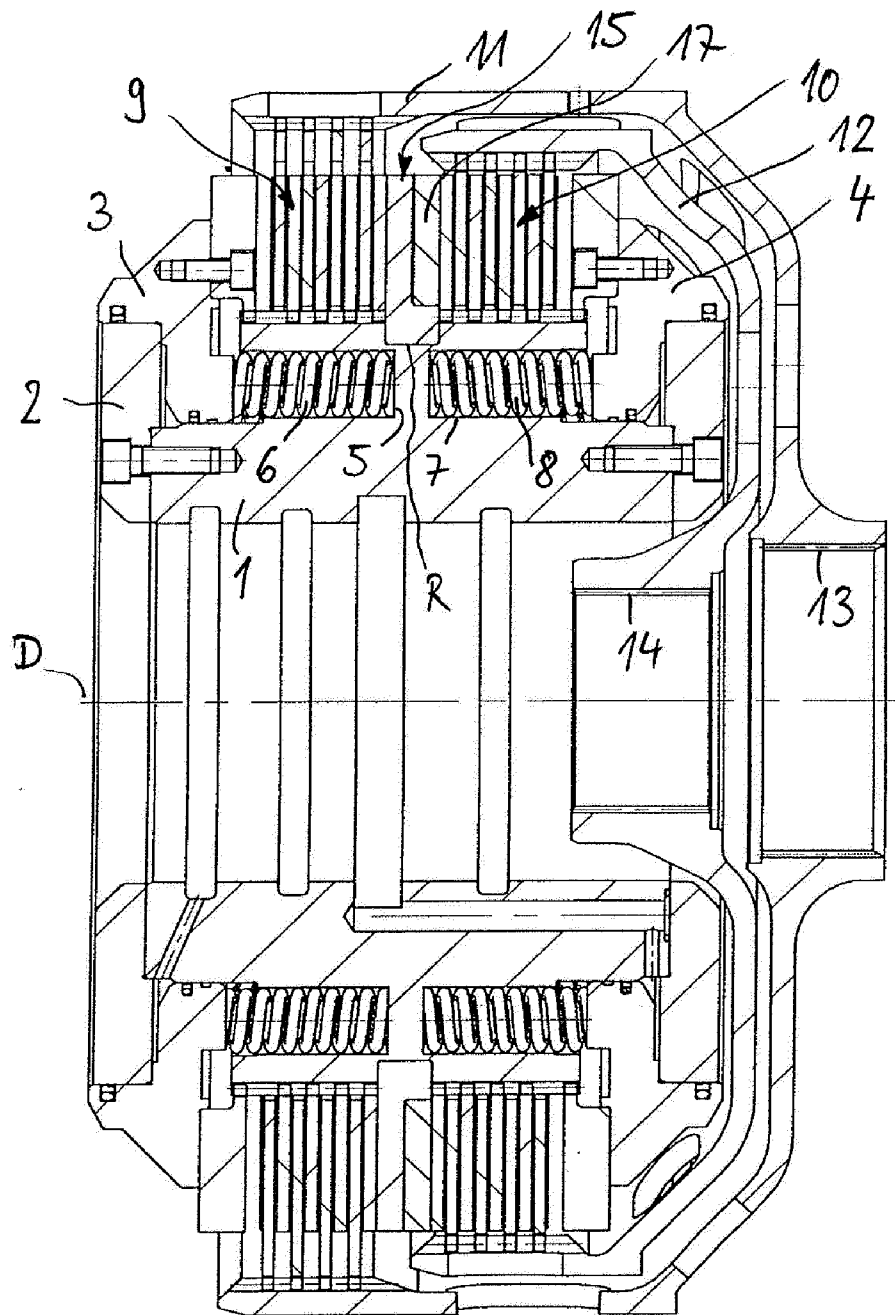


Fig. 2a

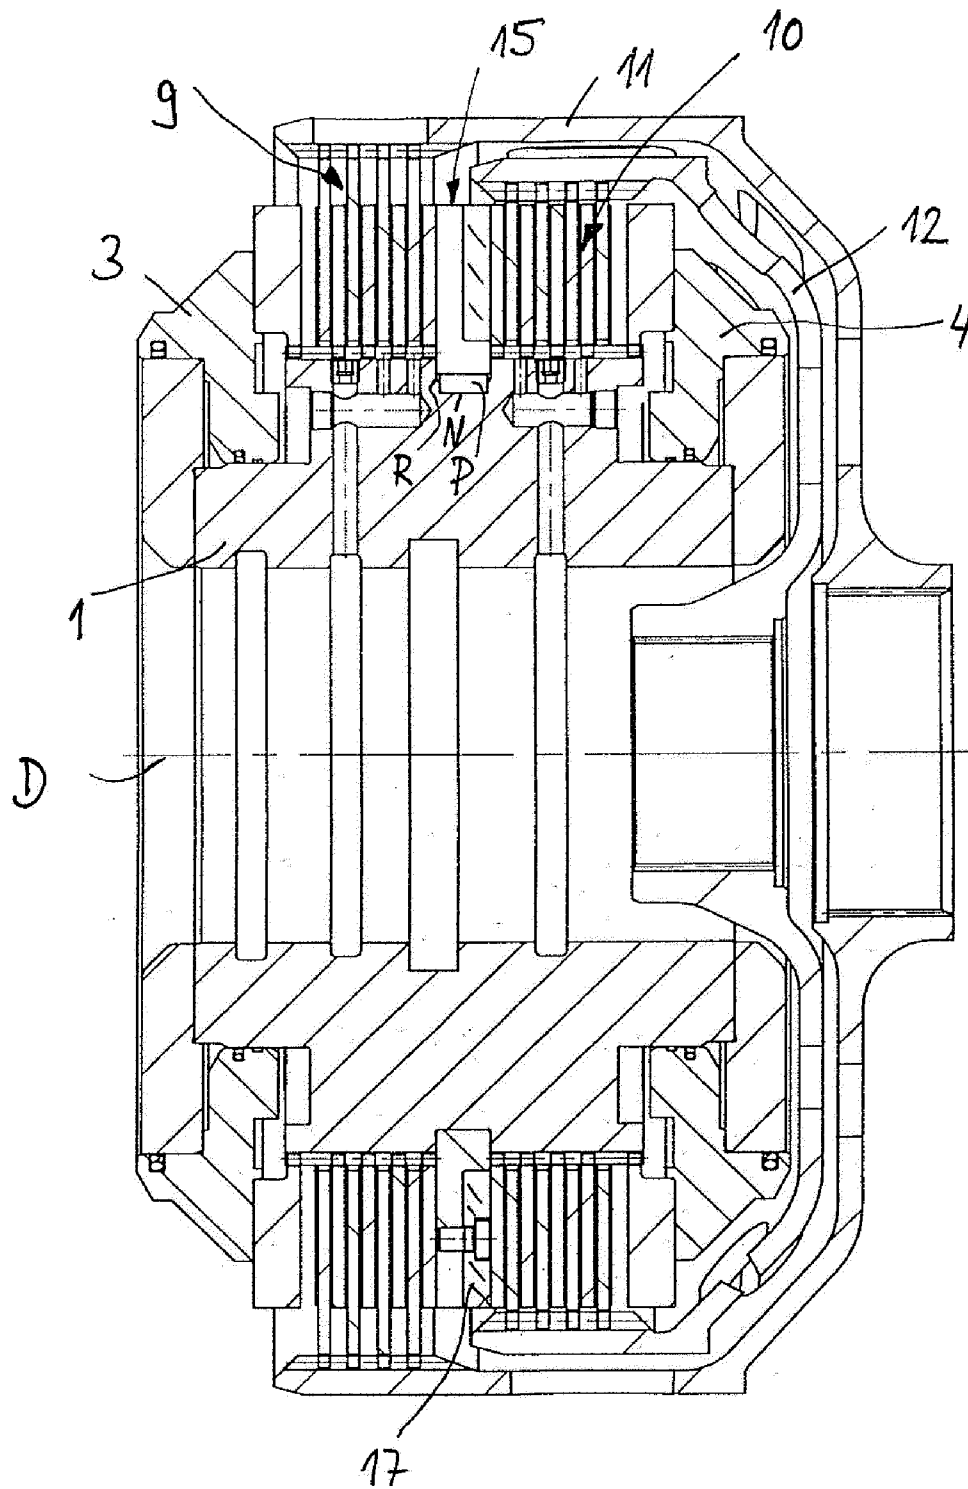


Fig. 2b

