

(43) International Publication Date
18 September 2014 (18.09.2014)

- (51) **International Patent Classification:**
G05B 19/418 (2006.01) *B23K 9/095* (2006.01)
- (21) **International Application Number:**
PCT/IB2014/000350
- (22) **International Filing Date:**
14 March 2014 (14.03.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/802,951 14 March 2013 (14.03.2013) US
- (71) **Applicant:** LINCOLN GLOBAL, INC. [US/US]; 17721 Railroad Street, City of Industry, CA 91748 (US).
- (72) **Inventors:** DANIEL, Joseph, A.; 1135 Navajo Trail, Streetsboro, OH 44241 (US). DIDION, Michael; 5041 Moon Court, Sheffield Village, OH 44241 (US). ENYEDY, Edward, A.; 36580 Garretts Cove Drive, Eastlake, OH 44095 (US). FLEMING, Daniel, P.; 1487 Forestbrook Lane, Painesville, OH 44077 (US). HEARN, James, E.; 1668 Maxwell Blvd., Brunswick, OH 44212 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) **Title:** SYSTEM AND METHOD OF RECEIVING OR USING DATA FROM EXTERNAL SOURCES FOR A WELDING SEQUENCE

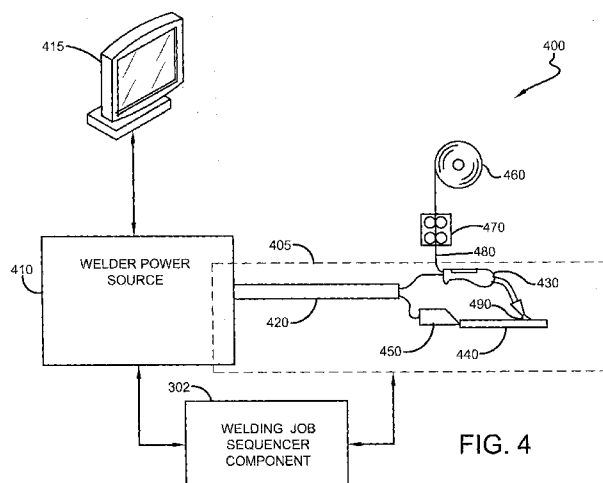


FIG. 4

(57) **Abstract:** The invention described herein generally pertains to a system (100, 300, 400, 500, 700, 800, 900, 1000) and method for evaluating one or more conditions or preliminary weld condition related to a welding system (100, 300, 400, 500, 700, 800, 900, 1000) and/or method that utilizes a welding sequence to perform two or more welds with respective welding schedules. In an embodiment, an operator registration is provided that verifies the operator and identifies welding sequences to which the operator is authorized to perform. In another embodiment, one or more fixture locations are monitored to determine whether a workpiece (440, 808, 1006) is accurately configured prior to a welding operation. In still another embodiment, locations on a workpiece (440, 808, 1006) can be displayed to assist an operator in performing two or more welds utilizing a welding sequence. Moreover, a wireless system communications a data signal to a welding work cell in which such data is used to identify a welding sequence.

System and Method of Receiving or Using Data from External Sources for a Welding Sequence

[0001] This application is a continuation-in-part of U.S. Application Serial No. 11/613,652, filed December 20, 2006, and entitled "WELDING JOB SEQUENCER." The entirety of the aforementioned application is incorporated herein by reference.

Field of the Invention

[0002] The invention is related to a welder system according to claim 1 and 16 and to a method of welding according to claim 13. Devices, systems, and methods consistent with the invention relate to welding work cells.

Technical Background

[0003] In the related art, work cells are used to produce welds or welded parts. There are at least two broad categories of work cells, including robotic work cells and semi-automatic work cells.

[0004] In robotic work cells, the scheduling and performing of welding operations is largely automated, with little operator involvement. Thus, these cells generally have a relatively low labor cost and a relatively high productivity. However, their repeating operations cannot easily adapt to varying welding conditions and/or sequences.

[0005] In contrast, semi-automatic work cells (*i.e.*, work cells involving at least some operator welding) generally provide less automation vis-à-vis robotic work cells, and accordingly have a relatively higher labor cost and a relatively lower productivity. Nevertheless, there are many instances where using a semi-automatic welding work cell can actually be advantageous over robotic work cells. For example, a semi-automatic welding work cell can more easily adapt to varying welding conditions and/or sequences.

[0006] Unfortunately, when welding more complex assemblies in related art semi-automatic work cells, multiple different welding schedules are often required for different types of welds on different parts of an assembly. In many systems, when a different welding schedule must be utilized, the operator is required to stop welding operations and manually adjust the output of the semi-automatic equipment according to the new schedule. In some other systems, this manual adjustment is eliminated by storing particular schedules in the work cell. Nevertheless, even in such sys-

tems, the operator still needs to cease welding operations and push a button to select the new welding schedule before he may continue welding.

[0007] Neither of these practices for setting a different welding schedule is particularly efficient. Thus, in practice, the number of welding schedules used in a semi-automatic work cell is often reduced in order to eliminate the need for constant adjustment of the output of the semi-automatic equipment. While this reduction of welding schedules makes the overall operation easier for the welder, the forced simplification of this approach can lead to reduced productivity and lower overall quality.

[0008] Additionally, when abiding by strict quality control specifications, it is sometimes necessary to perform welds in a specific sequence, verify that each weld is performed with a given set of conditions, and monitor the output of the equipment during the welding operations. In a robotic work cell, these requirements are easily fulfilled. However, in a semi-automatic work cell, these requirements are susceptible to human error, since the operator must keep track of all of these aspects in addition to performing the welding operations themselves.

[0009] An illustrative example of the above problems is shown in the related art semi-automatic welding method diagrammatically represented in *Fig. 1*. In this method, each of the various scheduling, sequencing, inspection and welding operations are organized and performed by the operator (*i.e.*, the welder) himself. Specifically, the operator begins the welding job at operation **10**. Then, the operator sets up the welding equipment according to schedule A, at operation **20**. Next, the operator performs weld #1, weld #2, and weld #3 using welding schedule A at operations **22**, **24** and **26**. Then, the operator stops welding operations and sets up the welding equipment according to schedule B at operation **30**. Next, the operator performs weld #4 using welding schedule B at operation **32**. Then, the operator checks the dimensions of the assembly at operation **40**, and sets up the welding equipment according to schedule C at operation **50**. Next, the operator performs weld #5 and weld #6 using welding schedule C at operations **52** and **54**. After the welding operations are completed, the operator visually inspects the welded assembly at operation **60**, and completes the welding job at operation **70**.

[0010] Clearly, the method shown in *Fig. 1* depends on the operator to correctly follow the predefined sequencing for performing welds and inspections, to accurately change between welding schedules (such as at operation **30**), and to perform the welding itself. Errors in any of these re-

sponsibilities can result either in rework (if the errors are caught during inspection at operation 60) or a defective part being supplied to the end user. Further, this exemplary semi-automatic welding method hampers productivity, because the operator must spend time configuring and reconfiguring weld schedules.

Description of the Invention

[0011] The above problems demand an improvement in the related art system. In order to overcome this problem a welder system according to claims 1 and 16 and a method of welding according to claim 13 are described. Further embodiments of the invention are subject of the subclaims.

[0012] In accordance with an embodiment of the present invention, a welding system is provided that includes a first component that is configured to identify an operator within a welding work cell to perform a first welding procedure on a workpiece and a second welding procedure on the workpiece. In the embodiment, the welding system further includes a welding job sequencer component that is configured to select one or more welding sequences based on the identification of the operator, wherein the welding sequence defines at least a parameter and a welding schedule for the first welding procedure to create a first weld on the workpiece and the second welding procedure to create a second weld on the workpiece. Within the embodiment, the welding job sequencer component is further configured to utilize the welding sequence in the welding work cell to facilitate performing the first welding procedure and the second welding procedure for the identified operator.

[0013] In accordance with an embodiment of the present invention, a method is provided that includes at least the following steps: receiving an input from an operator, the input is a portion of biometric data of the operator; verifying an identity of the operator by comparing the input to a system authenticated input for the user; identifying a welding sequence the operator is authorized to perform, wherein the welding sequence defines a first welding procedure that includes a first parameter to create a first weld on a workpiece and a second welding procedure that includes a second parameter to create a second weld on the workpiece; monitoring at least one fixture for a workpiece within the welding work cell; verifying a location of the at least one fixture for the workpiece based on a location indicated in the welding sequence; and utilizing the welding sequence to automatically modify a welding equipment within the welding work cell without intervention from the operator creating at least one of the first weld or the second weld.

[0014] In accordance with an embodiment of the present invention, a welding system is provided that includes at least the following: means for receiving an input from an operator, the input is a portion of biometric data of the operator; means for verifying an identity of the operator by comparing the input to a system authenticated input for the user; means for receiving a wireless signal from a Radio Frequency Identification (RFID) tag that is affixed to a workpiece, wherein the wireless signal includes a portion of data that is used to identify a welding sequence for the workpiece; means for identifying the welding sequence the operator is to perform based on the wireless signal, wherein the welding sequence defines a one or more welding procedures that includes one or more parameters to create one or more welds on the workpiece; means for monitoring at least one fixture for a workpiece within the welding work cell; means for verifying a location of the at least one fixture for the workpiece based on a location indicated in the welding sequence; and means for employing the welding sequence for the welding work cell to perform one or more welds to assemble the workpiece by automatically adjusting a setting on a welding equipment within the welding work cell.

[0015] These and other objects of this invention will be evident when viewed in light of the drawings, detailed description and appended claims.

Brief Description of the Drawings

[0016] The invention may take physical form in certain parts and arrangements of parts, a preferred embodiment of which will be described in detail in the specification and illustrated in the accompanying drawings which form a part hereof, and wherein:

[0017] *Fig. 1* illustrates a welding operation of the related art utilizing a semi-automatic welding work cell;

[0018] *Fig. 2* illustrates a welding operation according to the invention utilizing a semi-automatic welding work cell;

[0019] *Fig. 3* is a block diagram illustrating a welding system that utilizes a welding job sequencer component to configure welding equipment for two or more weld operations to assembly a workpiece;

[0020] *Fig. 4* is a block diagram illustrating a welding system that utilizes a welding job sequencer component;

[0021] *Fig. 5* is a block diagram illustrating a distributed welding environment with a plurality of welding work cells that interface with a welding job sequencer component via a local, remote, or cloud database;

[0022] *Fig. 6* is a block diagram illustrating a welding system that includes a plurality of welding work cells in which welding work cells are managed by a cloud-based welding job sequencer component;

[0023] *Fig. 7* is a block diagram illustrating a system that identifies an operator that is to perform a welding procedure with a welding sequence;

[0024] *Fig. 8* is a block diagram illustrating a system that monitors fixture settings for a welding procedure prior to performing a welding procedure with a welding sequence;

[0025] *Fig. 9* is a block diagram illustrating a system that generates and provides data to an operator on where to perform a welding procedure on a workpiece;

[0026] *Fig. 10* is a block diagram illustrating a system that employs Radio Frequency Identification (RFID) to select a welding sequence to drive a welding procedure with a workpiece;

[0027] *Fig. 11* is a flow diagram of registering an operator with a welding sequence in order to perform a weld on a workpiece; and

[0028] *Fig. 12* is a flow diagram of verifying a fixture setting for a workpiece for a welding procedure and a welding sequence.

Detailed Description of the Invention

[0029] Embodiments of the invention relate to methods and systems that relate to evaluating one or more conditions or preliminary weld condition (e.g., pre-weld condition) related to a welding system and/or method that utilizes a welding sequence to perform two or more welds with respective welding schedules. In an embodiment, an operator registration is provided that verifies the operator and identifies welding sequences to which the operator is authorized (e.g., trained, experienced, and the like) to perform. In another embodiment, one or more fixture locations are monitored to determine whether a workpiece is accurately configured prior to a welding operation. In still another embodiment, locations on a workpiece can be displayed to assist an operator in per-

forming two or more welds utilizing a welding sequence. Moreover, a wireless system communicates a data signal to a welding work cell in which such data is used to identify a welding sequence.

[0030] According to an aspect of the invention, there is provided a semi-automatic welding work cell including a welding job sequencer that automatically selects a welding schedule for use by an operator in the semi-automatic welding work cell.

[0031] According to another aspect of the invention, there is provided a method of welding in a semi-automatic work cell, including automatically selecting a welding schedule for use by an operator in the semi-automatic welding work cell.

[0032] According to another aspect of the invention, there is provided a welding production line including at least one semi-automatic welding work cell, where the semi-automatic work cell includes a welding job sequencer that automatically selects a welding schedule for use by an operator therein.

[0033] According to another aspect of the invention, there is provided a method of monitoring a welding production line, including automatically selecting a welding schedule for use by an operator in a semi-automatic welding work cell.

[0034] The term "component" as used herein can be defined as a portion of hardware, a portion of software, or a combination thereof. A portion of hardware can include at least a processor and a portion of memory, wherein the memory includes an instruction to execute.

[0035] The best mode for carrying out the invention will now be described for the purposes of illustrating the best mode known to the applicant at the time of the filing of this patent application. The examples and figures are illustrative only and not meant to limit the invention, which is measured by the scope and spirit of the claims. Referring now to the drawings, wherein the showings are for the purpose of illustrating an exemplary embodiment of the invention only and not for the purpose of limiting same, *Fig. 2* is referenced. In an exemplary embodiment of the invention as illustrated in *Fig. 2*, a welding job sequencer is provided. The welding job sequencer improves the semi-automatic work cell of the related art by increasing the productivity of the semi-automatic work cell without compromising the number of weld schedules usable therein. The welding job sequencer accomplishes this improvement by implementing automatic changes in the semi-automatic work cell, and by providing the operator with an array of commands and instructions.

[0036] More specifically, in an exemplary embodiment, the welding job sequencer automatically selects and implements a function of the welding work cell. An example of such a function includes a particular weld schedule to be used with the semi-automatic work cell. In other words, the welding job sequencer may select a weld schedule to be used for a particular weld, and modify the settings of the semi-automatic work cell in accordance with the selected weld schedule, automatically for the operator (*i.e.*, without the operator's specific intervention).

[0037] Additionally, in the exemplary embodiment, the welding job sequencer may automatically indicate a sequence of operations that the operator should follow to create a final welded assembly. In conjunction with the automatic selection of welding schedules, this indicated sequence allows an operator to follow the sequence to create a final welded part, without having to spend time adjusting, selecting, or reviewing each individual weld schedule and/or sequence.

[0038] Accordingly, since the welding job sequencer sets up the welding equipment and organizes the workflow, and since the operator only performs the welding operations themselves, the chance for error in the welding operation is greatly reduced, and productivity and quality are improved.

[0039] The exemplary embodiment is diagrammatically represented in *Fig. 2*. In *Fig. 2*, at operation **110**, the welding job sequencer begins operation, and immediately sets the welding equipment to use weld schedule A (operation **120**) and instructs the operator to perform welds #1, #2 and #3. Then, the operator performs welds #1, #2 and #3 using weld schedule A (operations **122**, **124** and **126**). Next, the welding job sequencer sets the welding equipment to use weld schedule B (operation **130**), and instructs the operator to perform weld #4. Then the operator performs weld #4 using weld schedule B (operations **132**). After completion of weld schedule B, the welding job sequencer sets the welding equipment to use weld schedule C (operation **150**), and instructs the operator to perform welds #5 and #6, and to inspect the part. Then, the operator performs welds #5 and #6 (operations **152**, and **154**) using weld schedule C, and inspects the completed part to confirm that it is correct (operation **160**). This inspection may include dimensional verification, visual defect confirmation, or any other type of check that might be needed. Further, operation 160 may include a requirement that the operator affirmatively indicate that the inspection is complete, such as by pressing an "OK" button, before it is possible to proceed to the next operation. Lastly, the welding job sequencer indicates that the welding operation is at an end (operation **170**), and re-sets for the next operation.

[0040] Accordingly, as noted above, the sequencing and scheduling of welding operations is completed by the sequencer, and frees the operator to focus on performing welds according to instruction.

[0041] The welding job sequencer may select and implement a new function, such as the selection and implementation of weld schedules A, B and C shown in *Fig. 2*, based upon various variables or inputs. For example, the welding job sequencer may simply select new weld schedules based upon a monitoring of elapsed time since the beginning of the welding operations, or since the cessation of welding (such as the time after weld #3 in *Fig. 2* above). Alternatively, the welding job sequencer may monitor the actions of the operator, compare the actions to the identified sequence of welds, and select new weld schedules appropriately. Still further, various combinations of these methods, or any other effective method, may be implemented, as long as the end effect is to provide an automatic selection and implementation of a function, such as the weld schedule, for use by the operator.

[0042] Parameters of the selected weld schedule may include such variables as welding process, wire type, wire size, WFS, volts, trim, which wire feeder to use, or which feed head to use, but are not limited thereto.

[0043] While the above description focuses on the selection of a weld schedule as a function which is automatically selected and implemented, the welding job sequencer is not limited to using only this function.

[0044] For example, another possible function that may be selected and implemented by the welding job sequencer is a selection of one of multiple wire feeders on a single power source in accordance with the weld schedule. This function provides an even greater variability in welding jobs capable of being performed by the operator in the semi-automatic work cell, since different wire feeders can provide a great variance of, for example, wire sizes and types.

[0045] Another example of a function compatible with the welding job sequencer is a Quality Check function. This function performs a quality check of the weld (either during welding or after the weld is completed) before allowing the job sequence to continue. The quality check can monitor various welding parameters and can pause the welding operation and alert the operator if an abnormality is detected. An example of a welding parameter measurable by this function would be arc data.

[0046] Another example of such a function would be a Repeat function. This function would instruct the operator to repeat a particular weld or weld sequence. An example of the use of this function includes when the Quality Check function shows an abnormality, or when multiple instances of the same weld are required.

[0047] Another example of such a function would be a Notify Welder function, which communicates information to the welder. This function would display information, give an audible signal, or communicate with the welder by some other means. Examples of use of this function include an indication to the operator that he is free to begin welding, or an indication that the operator should check some portion of the welded part for quality purposes.

[0048] Another example of such a function would be a Enter Job Information function. This function will require the welder to enter information, such as the part serial number, a personal ID number, or other special conditions before the job sequencer can continue. This information could also be read from a part or inventory tag itself through Radio Frequency Identification (RFID), bar code scanning, or the like. The welding job sequencer could then utilize the entered information for the welding operations. An example of the use of this function would be as a predicate to the entire welding operation, so as to indicate to the welding job sequencer which schedules and/or sequences should be selected.

[0049] A further example of such a function would be a Job Report function. This function will create a report on the welding job, which could include information such as: the number of welds performed, total and individual arc timing, sequence interruptions, errors, faults, wire usage, arc data, and the like. An example of the use of this function would be to report to a manufacturing quality department on the efficiency and quality of the welding processes.

[0050] A still further example of such a function would be a System Check function. This function will establish whether the welding job can continue, and could monitor such parameters as: wire supply, gas supply, time left in the shift (as compared to the required time to finish the job), and the like. The function could then determine whether the parameters indicate that there is enough time and/or material for the welding job to continue. This function would prevent down-time due to material depletion, and would prevent work-in-process assemblies from being delayed, which can lead to quality problems due to thermal and scheduling issues.

[0051] Further, as mentioned above, the welding job sequencer may select and implement a new function, based upon various variables or inputs. These variables and inputs are not particularly limited, and can even be another function. For example, another function compatible with the welding job sequencer is a Perform Welding Operation function. This function is designed to detect the actual welding performed by the operator, and to report that welding so that the welding job sequencer can determine whether to proceed with further operations. For example, this function can operate by starting when the operator pulls the trigger to start the welding operation, and finishing when the operator releases the trigger after the welding is complete, or after a predetermined period of time after it starts. This function could end when the trigger is released or it could be configured to automatically turn off after a period of time, a quantity of wire, or an amount of energy is delivered. This function may be used to determine when to select a new function, such as a new weld schedule, as discussed above.

[0052] Still further, various semi-automatic and/or robotic work cells can be integrated together on a single network, and the sequencing of welding steps at a single work-cell can be fully integrated into a complete production schedule, which itself can be modified as needed to track variations in the production schedule. Sequencing and/or scheduling information can also be stored in a database, be stored by date as archival information, and be accessed to provide various production reports

[0053] In an embodiment, a semi-automatic welding work cell for welding an assembly defined by a plurality of welds can be provided, the plurality of welds being defined by at least two weld schedules can include welding equipment for use by a welding operator to perform said plurality of welds and complete the assembly with said welding equipment having a plurality of functions. In the embodiment, the work cell can include a welding job sequencer that automatically selects a welding schedule for use by an operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can select the welding schedule according to an elapsed time. In an embodiment, the welding job sequencer can detect when the operator is conducting a welding operation, and selects the welding schedule based upon that detection. In the embodiment, the welding job sequencer can detect when the operator is conducting a welding operation, and the welding job sequencer selects the welding schedule according to an amount of welding wire supplied for the welding operation. In the embodiment, the welding job sequencer can detect when the operator is conducting a welding operation, and the welding job sequencer selects the welding schedule according to an amount of energy supplied for the welding operation. In the embodiment,

the welding schedule includes information about at least one of a welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, or feed head to use.

[0054] In an embodiment, the welding work cell can include the welding job sequencer which select and implements at least one of a plurality of functions to define at least a first weld schedule and a second weld schedule from the at least two weld schedules so as to organize a workflow for creating the welded assembly and indicate to the welding operator a sequence of working operations for completing the assembly. In the embodiment, the welding job sequencer can automatically modify the welding equipment in accordance with the workflow and sequence of the welding operations without the welding operator intervening.

[0055] In the embodiment, the second weld schedule is defined according to an elapsed time of the first weld schedule. In the embodiment, the at least one function detects completion of said first weld schedule by said operator and automatically changes from said first weld schedule to said second weld schedule. In the embodiment, at least one function detects when the operator is conducting said first weld schedule, and said second weld schedule is defined according to an amount of welding wire supplied for said first weld schedule. In the embodiment, at least one function detects when the operator is conducting said first weld schedule, and said second weld schedule is defined according to an amount of energy supplied for said first weld schedule. In the embodiment, the at least one first weld set up parameter and said at least one second weld set up parameter comprise at least one of a welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, or feed head to use. In the embodiment, at least one first weld set up parameter and said at least one second weld set up parameter comprise a feeder for use by an operator in the semi-automatic welding work cell. In the embodiment, at least one function monitors quality measurables of said weld assembly, wherein the quality measureables comprise at least information about an arc used to form the weld created by the operator. In the embodiment, at least one function indicates information to the operator in the semiautomatic welding work cell. In the embodiment, at least one function accepts job information comprising at least a part ID number, operator ID number, or welding instructions. In the embodiment, at least one function produces a job report comprising at least one of a number of welds preformed, total arc time, individual arc time, sequence interruptions, errors, faults, wire usage, arc data. In the embodiment, at least one function includes a system check of said cell, the system check comprising at least a detection of wire supply, gas supply, and time.

[0056] In the embodiment, the welding job sequencer can select a welding sequence for use by the operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can indicate the selected welding sequence to the operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can select a wire feeder for use by an operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can monitor quality measurables of a weld created by the operator, wherein the quality measurables comprise at least information about an arc used to form the weld created by the operator. In the embodiment, the welding job sequencer can indicate information to the operator in the semi-automatic welding work cell. In the embodiment, the welding job sequencer can accept job information comprising at least a part ID number, operator ID number, or welding instructions. In the embodiment, the welding job sequencer can produce a job report comprising at least one of a number of welds preformed, total arc time, individual arc time, sequence interruptions, errors, faults, wire usage, arc data. In the embodiment, the welding job sequencer can perform a system check comprising at least a detection of wire supply, gas supply, and time.

[0057] In an embodiment, a method of welding in a semi-automatic work cell can be provided that includes automatically selecting a welding schedule for use by an operator in the semi-automatic welding work cell. In the embodiment, the automatic selection can be performed after an elapsed time. In the embodiment, the method can include detecting when the operator is conducting a welding operation, wherein the automatic selection is performed based upon that detection. In the embodiment, the method can include detecting when the operator is conducting a welding operation, wherein the automatic selection is performed according to an amount of welding wire supplied for the welding operation. In the embodiment, the method can include detecting when the operator is conducting a welding operation, wherein the automatic selection is performed according to an amount of energy supplied for the welding operation. In the embodiment, the welding schedule can include information about at least one of a welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, or feed head to use.

[0058] In the embodiment, the method can include selecting a welding sequence for use by the operator in the semi-automatic welding work cell. In the embodiment, the method can include indicating the selected welding sequence to the operator in the semi-automatic welding work cell. In the embodiment, the method can include selecting a wire feeder for use by an operator in the semi-automatic welding work cell. In the embodiment, the method can include monitoring quality measurables of a weld created by the operator, wherein the quality measurables comprise at

least information about an arc used to form the weld created by the operator. In the embodiment, the method can include indicating information to the operator in the semi-automatic welding work cell. In the embodiment, the method can include accepting job information comprising at least a part ID number, operator ID number, or welding instructions. In the embodiment, the method can include producing a job report comprising at least one of a number of welds performed, total arc time, individual arc time, sequence interruptions, errors, faults, wire usage, arc data. In the embodiment, the method can include performing a system check comprising at least a detection of wire supply, gas supply, and time.

[0059] In an embodiment, a welding production line is provided with at least one semi-automatic welding work cell, wherein the semi-automatic work cell that includes a welding job sequencer that automatically selects a welding schedule for use by an operator therein. In the embodiment, the welding production line includes a monitoring system that communicates with the welding job sequencer to direct the welding job sequencer to automatically select the welding schedule for use by the operator therein.

[0060] In an embodiment, a method of monitoring a welding production line is provided that includes automatically selecting a welding schedule for use by an operator in a semi-automatic welding work cell. In the embodiment, the method can include directing the welding job sequencer to automatically select the welding schedule for use by the operator therein.

[0061] In an embodiment, a semi-automatic welding work cell is provided that includes a welding job sequencer that automatically selects a welding schedule for use by an operator in the semi-automatic welding work cell. The automatic selection may be by way of elapsed time, a detection of welding operations, a detection of the amount of welding wire supplied for the welding operation, or a detection of the amount of energy supplied for the welding operation.

[0062] In an embodiment, a method of welding in a semi-automatic work cell having welding equipment and a welding job sequencer to complete an assembly defined by a plurality of welds can be provided in which the plurality of welds can be defined by at least two weld schedules. The embodiment can include at least the steps of the following: implementing a welding equipment function with the welding job sequencer to define from the at least two weld schedules a first weld schedule having at least one first weld set up parameter and at least one first weld instruction and a second weld schedule having at least one second weld set up parameter and at least one sec-

ond weld instruction, at least one of the said second weld set up parameter and said second weld instruction is different from said first weld set up parameter and said first weld instruction; indicating to a welding operator a sequence of welding operations for completing the assembly based on said first and second weld schedules; and automatically modifying said welding equipment in accordance with said sequence of welding operations for completing the assembly based on said first and second weld schedules.

[0063] In the embodiment, the method can include defining said second weld schedule is performed after an elapsed time defined by said first weld schedule. In the embodiment, the method can include detecting when the operator is conducting said first weld schedule, wherein defining said second schedule is based upon that detection. In the embodiment, defining said first and second weld schedules can include defining an amount of welding wire supplied for the welding operation. In the embodiment, defining said second weld schedule is according to an amount of energy supplied for the welding operation for said first weld schedule. In the embodiment, defining at least one of the first and second weld schedules can include selecting at least one of a welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, or feed bead to use. In an embodiment, defining at least one of the first and second weld schedules can include selecting a wire feeder for use by an operator in the semi-automatic welding work cell. In an embodiment, the method can include monitoring quality measurables of a weld created by the operator, wherein the quality measureables comprise at least information about an arc used to form the weld created by the operator. In an embodiment, the method can include indicating information to the operator in the semi-automatic welding work cell. In an embodiment, the method can include accepting job information comprising at least a part ID number, operator ID number, or welding instructions. In an embodiment, the method can include producing a job report comprising at least one of a number of welds performed, total arc time, individual arc time, sequence interruptions, errors, faults, wire usage, arc data performing a system check comprising at least a detection of wire supply, gas supply, and time.

[0064] In an embodiment, a welding production line is provided that includes at least one semi-automatic welding work cell for welding an assembly defined by a plurality of welds, the plurality of welds being defined by at least weld schedules, the semi-automatic welding work cell including welding equipment for use by a welding operator to perform the plurality of welds and complete the assembly, the welding equipment having a plurality of functions. In the embodiment, the production line can include a welding job sequencer which selects and implements at least one of the plu-

rality of functions to define at least a first and a second weld schedule in a sequence of welding operations from the at least two weld schedules to be used by said welding operator for completing the weld assembly. In an embodiment, the production line can include said first weld schedule contains at least one first weld set up parameter and at least one first weld instruction for said welding operator and said second weld schedule contains at least one second weld set up parameter and at least one second weld instruction for said welding operator, at least one of said first weld set up parameter and said first weld instruction is different from said second weld set up parameter and said second weld instruction, said welding job sequencer automatically modifying said welding equipment in accordance with said sequence of operations without said welding operator intervention. In an embodiment, the production line can include a monitoring system in communication with the welding job sequencer to monitor completion of the at least one weld instruction of each of the first and second weld schedule.

[0065] In an embodiment, a method for monitoring a welding production line in at least one semi-automatic welding work cell for use by a welding operator to complete an assembly defined by a plurality of welds, the plurality of welds being defined by at least two weld schedules, the semi-automatic welding work cell including welding equipment and a welding job sequencer. The method can include at least the following steps: defining at least a first and a second weld schedule in a sequence of welding operations from the at least two weld schedules with the welding job sequencer said first weld schedule having at least one first weld set up parameter and at least one first weld instruction and said second weld schedule defining at least one second weld set up parameter and at least one second weld instruction with at least one of said second weld set up parameter and said second weld instruction being different from said first weld set up parameter and said first weld instruction; determining completion of said first weld schedule by said welding operator; automatically modifying the welding equipment in accordance with said second weld schedule without said welding operator intervention; and monitoring the welding operations. In the embodiment, the method can include automatically modifying the welding equipment in accordance with said second weld schedule is based on said completion of said first weld schedule.

[0066] In an embodiment, a semi-automatic welding work cell for use by an operator is provided. The embodiment can include welding equipment having a plurality of functions for performing welds by the operator and a welding job sequencer selecting from the plurality of functions to set up and organize the welding equipment for the operator. The embodiment can include the plurality of functions including: a weld schedule function defined by a sequence of weld operations; a notify

function to instruct the operator to perform the weld schedule; and a quality check function to monitor at least one weld operation of the sequence of weld operations.

[0067] In the embodiment, the quality check function performs a quality check on a weld completed by the at least one weld operation. In the embodiment, the quality check function monitors the at least one weld operation during the at least one weld operation. In the embodiment, the quality check function monitors the at least one weld operation after completion of the at least one weld operation. In the embodiment, the weld schedule function defines a plurality of weld schedules, each weld schedule having a first weld operation and at least a second weld operation. In the embodiment, the quality check function monitors the at least one weld operation before allowing the sequence of weld operations to continue. In the embodiment, the quality check function detects an abnormality, the sequencer pauses the sequence of weld operations and the notify function alerts the operator of the abnormality.

[0068] *Fig. 3* is a schematic block diagram of an exemplary embodiment of welding system **300** that utilizes welding job sequencer component **302** (also referred to as welding job sequencer) to configure welding equipment for two or more weld operations to assembly a workpiece. Welding job sequencer component **302** that is configured to implement a welding sequence that includes settings, configurations, and/or parameters to perform two or more welding procedures on a workpiece. In particular, welding job sequencer component **302**, as discussed above as welding job sequencer, automatically configures welding equipment to create two or more welds that include two or more welding schedules. Moreover, welding job sequencer component **302** utilizes the welding sequence to aid an operator to perform the two or more welds. As discussed above, welding job sequencer component **302** can be utilized with welding work cell **304** that is semi-automatic. However, it is to be appreciated and understood that welding job sequencer component **302** can be implemented in a suitable welding environment or system that includes at least welding equipment and an operator to facilitate creating one or more welds.

[0069] Welding system **300** further includes check point component **306** that is configured to monitor a welding process and/or a welding operator in real time. For instance, the welding process is monitored in real time to detect at least one of a welding parameter (e.g., voltage, current, among others), a welding schedule parameter (e.g., welding process, wire type, wire size, WFS, volts, trim, wire feeder to use, feed head to use, among others), a weld on a workpiece as the weld is created, a movement of an operator, a position of a welding tool, a position or location of a welding

equipment, a position or location of an operator, sensor data (e.g., video camera, image capture, thermal imaging device, heat sensing camera, temperature sensor, among others), and the like. Check point component **306** includes an alert system (not shown) that can communicate an alert or notification to indicate a status of the real time monitoring. In an embodiment, check point component **306** can utilize thresholds, ranges, limits, and the like for the real time monitoring to precisely identify a abnormality with welding system **300**. Furthermore, check point component **306** can communicate an alert or notification to welding work cell **304** or the operator to at least one of stop the welding procedure, continue with the welding procedure, pause the welding procedure, terminate the welding procedure, or request approval of the welding procedure. In an embodiment, check point component **306** can store monitoring data (e.g., video, images, results, sensor data, and the like) in at least one of a server, a data store, a cloud, a combination thereof, among others.

[0070] Weld score component **308** is included with welding system **300** and is configured to evaluate a weld created by an operator within welding work cell **304** upon completion of such weld. Weld score component **308** provides a rating or score for the completed weld to facilitate implementing a quality control on the workpiece and/or assembly of the workpiece. For instance, weld score component **308** can alert a quality inspection upon completion, provide data collection of a job (e.g., assembly of workpiece, weld on workpiece, among others), and the like. In an embodiment, an in-person quality inspection can be performed upon completion of a portion of the assembly (e.g., completion of a weld, completion of two or more welds, completion of assembly, among others). In another embodiment, weld score component **308** can utilize a sensor to collect data (e.g., video camera, image capture, thermal imaging device, heat sensing camera, temperature sensor, among others) to determine approval of the job. For instance, a quality inspection can be performed remotely via video or image data collected upon completion of a job.

[0071] It is to be appreciated that welding job sequencer component **302** can be a stand-alone component (as depicted), incorporated into welding work cell **304**, incorporated into check point component **306**, incorporated into weld score component **308**, or a suitable combination thereof. Additionally, as discussed below, welding job sequencer component **302** can be a distributed system, software-as-a-service (SaaS), a cloud-based system, or a combination thereof. Further, it is to be appreciated and understood that check point component **306** can be a stand-alone component (as depicted), incorporated into welding work cell **304**, incorporated into welding job sequencer component **302**, incorporated into weld score component **308**, or a suitable combination thereof. Additionally, check point component **306** can be a distributed system, software-as-a-

service (SaaS), a cloud-based system, or a combination thereof. Moreover, it is to be appreciated and understood that weld score component **308** can be a stand-alone component (as depicted), incorporated into welding work cell **304**, incorporated into welding job sequencer component **302**, incorporated into check point component **306**, or a suitable combination thereof. Additionally, weld score component **308** can be a distributed system, software-as-a-service (SaaS), a cloud-based system, or a combination thereof.

[0072] *Fig. 4* illustrates a schematic block diagram of an exemplary embodiment of welding system **400** including welding circuit path **405**. It is to be appreciated that welding system **400** is also referred to as the welding work cell, wherein the welding work cell and/or welding system **400** can produce welds or welded parts. Welding system **400** includes welder power source **410** and display **415** operationally connected to welder power source **410**. Alternatively, display **415** may be an integral part of welder power source **410**. For instance, display **415** can be incorporated into welder power source **410**, a stand-alone component (as depicted), or a combination thereof. Welding system **100** further includes welding cable **120**, welding tool **430**, workpiece connector **450**, spool of wire **460**, wire feeder **470**, wire **480**, and workpiece **440**. Wire **480** is fed into welding tool **430** from spool **460** via wire feeder **470**, in accordance with an embodiment of the present invention. In accordance with another embodiment of the present invention, welding system **400** does not include spool of wire **460**, wire feeder **470**, or wire **480** but, instead, includes a welding tool comprising a consumable electrode such as used in, for example, stick welding. In accordance with various embodiments of the present invention, welding tool **430** may include at least one of a welding torch, a welding gun, and a welding consumable.

[0073] Welding circuit path **405** runs from welder power source **410** through welding cable **420** to welding tool **430**, through workpiece **440** and/or to workpiece connector **450**, and back through welding cable **420** to welder power source **110**. During operation, electrical current runs through welding circuit path **405** as a voltage is applied to welding circuit path **405**. In accordance with an exemplary embodiment, welding cable **420** comprises a coaxial cable assembly. In accordance with another embodiment, welding cable **420** comprises a first cable length running from welder power source **410** to welding tool **430**, and a second cable length running from workpiece connector **450** to welder power source **410**.

[0074] Welding system **400** includes welding job sequencer component **302** (as described above). Welding job sequencer component **302** is configured to interact with a portion of welding system

400. For instance, welding job sequencer component **302** can interact with at least the power source **410**, a portion of welding circuit path **405**, spool of wire **460**, wire feeder **470**, or a combination thereof. Welding job sequencer component **302** automatically adjusts one or more elements of welding system **400** based on a welding sequence, wherein the welding sequence is utilized to configure welding system **400** (or an element thereof) without operator intervention in order to perform two or more welding procedures with respective settings or configurations for each welding procedure.

[0075] In an embodiment, welding job sequencer component **302** employs a welding sequence to automatically configure welding equipment. It is to be appreciated that welding system **400** or welding work cell can employ a plurality of welding sequences for assembly of one or more workpieces. For instance, a workpiece can include three (3) welds to complete assembly in which a first welding sequence can be used for the first weld, a second welding sequence can be used for the second weld, and a third welding sequence can be used for the third weld. Moreover, in such example, the entire assembly of the workpiece including the three (3) welds can be referenced as a welding sequence. In an embodiment, a welding sequence that includes specific configurations or steps can further be included within a disparate welding sequence (e.g., nested welding sequence). A nested welding sequence can be a welding sequence that includes a welding sequence as part of the procedure. Moreover, the welding sequence can include at least one of a parameter, a welding schedule, a portion of a welding schedule, a step-by-step instruction, a portion of media (e.g., images, video, text, and the like), a tutorial, among others. In general, the welding sequence can be created and employed in order to guide an operator through welding procedure(s) for specific workpieces without the operator manually setting welding equipment to perform such welding procedures. The subject innovation relates to creating a welding sequence and/or modifying a welding sequence.

[0076] One or more welder power source(s) (e.g., welder power source **410**) aggregates data respective to a respective welding process to which the welder power source is providing power to implement. Such collected data relates to each welder power source and is herein referred to as "weld data." Weld data can include welding parameters and/or information specific to the particular welding process the welder power source is supplying power. For instance, weld data can be an output (e.g., a waveform, a signature, a voltage, a current, among others), a weld time, a power consumption, a welding parameter for a welding process, a welder power source output for the welding process, and the like. In an embodiment, weld data can be utilized with welding job se-

quencer component **302**. For example, weld data can be set by a welding sequence. In another example, weld data can be used as a feedback or a feedforward loop to verify settings.

[0077] In one embodiment, welding job sequencer component **302** is a computer operable to execute the disclosed methodologies and processes, including methods **1100** and **1200** described herein. In order to provide additional context for various aspects of the present invention, the following discussion is intended to provide a brief, general description of a suitable computing environment in which the various aspects of the present invention may be implemented. While the invention has been described above in the general context of computer-executable instructions that may run on one or more computers, those skilled in the art will recognize that the invention also may be implemented in combination with other program modules and/or as a combination of hardware and/or software. Generally, program modules include routines, programs, components, data structures, etc., that perform particular tasks or implement particular abstract data types.

[0078] Moreover, those skilled in the art will appreciate that the inventive methods may be practiced with other computer system configurations, including single-processor or multiprocessor computer systems, minicomputers, mainframe computers, as well as personal computers, handheld computing devices, microprocessor-based or programmable consumer electronics, and the like, each of which may be operatively coupled to one or more associated devices. The illustrated aspects of the invention may also be practiced in distributed computing environments where certain tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices. For instance, a remote database, a local database, a cloud-computing platform, a cloud database, or a combination thereof can be utilized with welding job sequencer **302**.

[0079] Welding job sequencer **302** can utilize an exemplary environment for implementing various aspects of the invention including a computer, wherein the computer includes a processing unit, a system memory and a system bus. The system bus couples system components including, but not limited to the system memory to the processing unit. The processing unit may be any of various commercially available processors. Dual microprocessors and other multi-processor architectures also can be employed as the processing unit.

[0080] The system bus can be any of several types of bus structure including a memory bus or memory controller, a peripheral bus and a local bus using any of a variety of commercially available bus architectures. The system memory can include read only memory (ROM) and random access memory (RAM). A basic input/output system (BIOS), containing the basic routines that help to transfer information between elements within welding job sequencer **302**, such as during start-up, is stored in the ROM.

[0081] Welding job sequencer **302** can further include a hard disk drive, a magnetic disk drive, e.g., to read from or write to a removable disk, and an optical disk drive, e.g., for reading a CD-ROM disk or to read from or write to other optical media. Welding job sequencer **302** can include at least some form of computer readable media. Computer readable media can be any available media that can be accessed by the computer. By way of example, and not limitation, computer readable media may comprise computer storage media and communication media. Computer storage media includes volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information such as computer readable instructions, data structures, program modules or other data. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by welding job sequencer **302**.

[0082] Communication media typically embodies computer readable instructions, data structures, program modules or other data in a modulated data signal such as a carrier wave or other transport mechanism and includes any information delivery media. The term "modulated data signal" means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, Radio Frequency (RF), Near Field Communications (NFC), Radio Frequency Identification (RFID), infrared, and/or other wireless media. Combinations of any of the above should also be included within the scope of computer readable media.

[0083] A number of program modules may be stored in the drives and RAM, including an operating system, one or more application programs, other program modules, and program data. The operating system in welding job sequencer **302** can be any of a number of commercially available operating systems.

[0084] In addition, a user may enter commands and information into the computer through a keyboard and a pointing device, such as a mouse. Other input devices may include a microphone, an IR remote control, a track ball, a pen input device, a joystick, a game pad, a digitizing tablet, a satellite dish, a scanner, or the like. These and other input devices are often connected to the processing unit through a serial port interface that is coupled to the system bus, but may be connected by other interfaces, such as a parallel port, a game port, a universal serial bus ("USB"), an IR interface, and/or various wireless technologies. A monitor (e.g., display **415**), or other type of display device, may also be connected to the system bus via an interface, such as a video adapter. Visual output may also be accomplished through a remote display network protocol such as Remote Desktop Protocol, VNC, X-Window System, etc. In addition to visual output, a computer typically includes other peripheral output devices, such as speakers, printers, etc.

[0085] A display (in addition or in combination with display **415**) can be employed with welding job sequencer **302** to present data that is electronically received from the processing unit. For example, the display can be an LCD, plasma, CRT, etc. monitor that presents data electronically. Alternatively or in addition, the display can present received data in a hard copy format such as a printer, facsimile, plotter etc. The display can present data in any color and can receive data from welding job sequencer **302** via any wireless or hard wire protocol and/or standard. In another example, welding job sequencer **302** and/or system **400** can be utilized with a mobile device such as a cellular phone, a smart phone, a tablet, a portable gaming device, a portable Internet browsing device, a Wi-Fi device, a Portable Digital Assistant (PDA), among others.

[0086] The computer can operate in a networked environment using logical and/or physical connections to one or more remote computers, such as a remote computer(s). The remote computer(s) can be a workstation, a server computer, a router, a personal computer, microprocessor based entertainment appliance, a peer device or other common network node, and typically includes many or all of the elements described relative to the computer. The logical connections depicted include a local area network (LAN) and a wide area network (WAN). Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the Internet.

[0087] When used in a LAN networking environment, the computer is connected to the local network through a network interface or adapter. When used in a WAN networking environment, the computer typically includes a modem, or is connected to a communications server on the LAN, or

has other means for establishing communications over the WAN, such as the Internet. In a networked environment, program modules depicted relative to the computer, or portions thereof, may be stored in the remote memory storage device. It will be appreciated that network connections described herein are exemplary and other means of establishing a communications link between the computers may be used.

[0088] Alternatively or in addition, a local or cloud (e.g., local, cloud, remote, among others) computing platform can be utilized for data aggregation, processing, and delivery. For this purpose, the cloud computing platform can include a plurality of processors, memory, and servers in a particular remote location. Under a software-as-a-service (SaaS) paradigm, a single application is employed by a plurality of users to access data resident in the cloud. In this manner, processing requirements at a local level are mitigated as data processing is generally done in the cloud, thereby relieving user network resources. The software-as-a-service application allows users to log into a web-based service (e.g., via a web browser) which hosts all the programs resident in the cloud.

[0089] Turning to *Fig. 5*, system **500** illustrates a welding environment with a plurality of welding work cells via a local, remote, or cloud database. System **500** includes a plurality of welding work cells such as first welding work cell **515**, second welding work cell **520** to Nth welding work cell **530**, where N is a positive integer. In an embodiment, each welding work cell includes a welding job sequencer component **535**, **540**, and **545**, that is used to implement a welding schedule(s) to each welding work cell as well as or in the alternative to an enterprise-wide welding operation(s) and/or enterprise-wide welding work cell. Welding sequence(s) from each welding job sequencer component **535**, **540**, and **545** is received from the local or cloud database (e.g., local database, cloud database, remote database, among others) computing platform **510**.

[0090] In an embodiment, each welding work cell further includes a local data store. For instance, first welding work cell **515** includes welding job sequencer component **535** and data store **550**, second welding work cell **520** includes welding job sequencer component **540** and data store **555**, and Nth welding work cell **530** includes welding job sequencer component **545** and data store **560**. It is to be appreciated that system **500** includes welding job sequencer **302** hosted by computing platform **510** in which each welding work cell includes a distributed and respective welding job sequencer component. Yet, it is to be understood that welding job sequencer **302** (and distributed

welding job sequencer components **535**, **540**, and **545**) can be a stand-alone component in each welding work cell or a stand-alone component in the computing platform **510**.

[0091] Each welding work cell can include a respective data store that stores a portion of at least one welding sequence. For instance, welding sequences related to a welding process A is employed at one or more welding work cell. The welding sequence is stored in a respective local data store (e.g., data stores **550**, **555**, and **560**). Yet, it is to be appreciated and understood that each welding work cell can include a local data store (as depicted), a collective and shared remote data store, a collective and shared local data store, a cloud data store hosted by computing platform **510**, or a combination thereof. A “data store” or “memory” can be, for example, either volatile memory or nonvolatile memory, or can include both volatile and nonvolatile memory. The data store of the subject systems and methods is intended to comprise, without being limited to, these and other suitable types of memory. In addition, the data store can be a server, a database, a hard drive, a flash drive, an external hard drive, a portable hard drive, a cloud-based storage, a solid-state drive, and the like.

[0092] For instance, welding job sequencer component **302** can manage each welding job sequencer component **535**, **540**, **545** in each welding work cell **515**, **520**, **530**. In another embodiment, the communications can be transmitted from the welding job sequencer **302** to each welding work cell (e.g., each welding job sequencer component). In another embodiment, the communications can be received from each welding work cell (e.g., each welding job sequencer component) from the welding job sequencer component **302**. For instance, a welding sequence can be used with 1st welding work cell **515** and communicated directly to a disparate welding work cell or via computing platform **510**.

[0093] *Fig. 6* illustrates welding system **600** that includes a plurality of welding work cells in which welding job sequencer component **302** is hosted with computing platform **510** to utilize one or more welding sequences to configure welding equipment within one or more welding systems, welding environments, and/or welding work cells. Welding system **600** includes a local or cloud-based welding job sequencer component **302** hosted in computing platform **510**. Welding job sequencer component **302** can utilize a welding sequence with a number of welding work cell. For instance, welding system **600** can a number of welding work cells such as, but not limited to, 1st welding work cell **620**, 2nd welding work cell **630**, to Nth welding work cell, where N is a positive integer. It

is to be appreciated that the locality of the welding job sequencer component **302** is in relation to each 1st welding work cell **620**, 2nd welding work cell **630**, and/or Nth welding work cell **640**.

[0094] In an embodiment, welding job sequencer **302** communicates one or more welding sequence to a target welding work cell, wherein the target welding work cell is a welding work cell that is to utilize the communicated welding sequence. Yet, in another embodiment, welding job sequencer **302** utilizes memory **650** hosted by computing platform **510** in which one or more welding sequences are stored. Yet, the stored welding sequence can be related or targeted to one or more welding work cells regardless of a storage location (e.g., local, cloud, remote, among others).

[0095] *Fig. 7* illustrates system **700** that identifies an operator that is to perform a welding procedure with a welding sequence. System **700** includes register component **702** that is configured to receive input from an operator, wherein the input authorizes the operator to utilize at least one of a welding sequence and/or welding equipment to perform a welding procedure. In an embodiment, the operator can be authorized to use welding equipment. In another embodiment, the operator can be verified as well as authorized to use welding equipment. In still another embodiment, the operator can be authorized to employ a welding sequence in which welding job sequencer component **704** utilizes to facilitate guiding the operator to perform a weld on a workpiece. In general, the input received can be used to verify an operator and/or authorize an operator to utilize welding equipment, welding sequence(s), and/or a combination thereof. It is to be appreciated and understood that the welding job sequencer component **704** can be substantially similar to the welding job sequencer component **302** (described above) as well as the welding job sequencer (described above).

[0096] By way of example and not limitation, the input can be data communicated from the operator or obtained from the operator, wherein such data can be verified by system **700** to ensure operator integrity (e.g., prevent unauthorized operators, verification of operator with credentials, and the like). For instance, the input can be at least one of a username, a password, employee identification, image identification, or a combination thereof. For example, the image identification can be a barcode, a Quick Response (QR) code, a portion of a graphic, a logo, a 3-dimensional (3D) barcode, among others. In an embodiment, an image can be displayed on a device for receipt to system **700** for authorization (e.g., device receives email at operator's work email account and email includes image that allows registration for a period of time). For instance, a unique logo can be submitted by an operator and registered as an identification to which system **700** verifies and

corresponds to the operator. In such instance, the unique logo can be placed on equipment (e.g., glove, apron, jacket, visor, helmet, and the like) of the operator. In still another embodiment, an employee identification can be affixed to the operator's equipment, wherein register component **702** receives and/or collects such input in order to authorize such operator for welding equipment and/or welding sequence employment.

[0097] In still another embodiment, the input can be biometric data. By way of example, the biometric data can be a handprint, a fingerprint, a retinal scan of an eye, a portion of facial data of the operator, a height of the operator, a weight of the operator, body-shape of the operator, capacitance of operator based on body-mass index, among others. For instance, an operator can approach a welding work cell and register component **702** can receive biometric data such as, for instance, a handprint or palm print. Based on the biometric data, system **704** can authenticate the operator and identify at least one welding sequence via a welding sequence data store **706**, wherein the authentication allows at least one of use of welding equipment within the welding work cell and/or use of the identified welding sequence. As discussed above, data store (here, welding sequence data store **706**) can be, for example, either volatile memory or nonvolatile memory, or can include both volatile and nonvolatile memory. The data store (here, welding sequence data store **706**) of system **700** is intended to comprise, without being limited to, these and other suitable types of memory. In addition, the data store can be a server, a database, a hard drive, a flash drive, an external hard drive, a portable hard drive, a cloud-based storage, a solid-state drive, and the like. It is to be appreciated that input data received or registered (discussed below) can be stored in a dedicated data store for such data, welding sequence data store, a remote data store, a cloud-based environment, a combination thereof, among others.

[0098] As discussed above, register component **702** can include any computing device and/or peripheral, among others. It is to be appreciated that any suitable device (e.g., smartphone, laptop, webcam, camera, digital device, portable electronic device, computing device, desktop, scanner, image grabber, barcode reader, and the like) that collects inputs described above is to be included in the subject disclosure. Moreover, register component **702** can be further configured to register input to an operator in which such input is used as a system authenticated input. The system authenticated input can be data to which later inputs are compared in order to authenticate or validate. It is to be appreciated that obtaining or collected system authenticated input can be referred to as registration of an operator.

[0099] System **700** allows registration and/or authorization to allow an operator to utilize one or more welding sequences to perform one or more welding operations for one or more workpieces. For instance, registration component **702** can authorize an operator to utilize more than one welding sequence. Moreover, registration component **702** can authorize an operator to employ a welding sequence on one or more workpieces or welding jobs. In other words, system **700** can be utilized to allow for a batch log in (e.g., registration and/or authorization) as well as a log in for each workpiece. For instance, system **700** can be used to allow an operator to log in for each part (e.g., workpiece, assembly of a workpiece(s), step or sequence in a welding sequence) and/or log in for a batch of parts (e.g., more than one part).

[00100] In an embodiment, the authorization of the operator is utilized as a condition to satisfy prior to access or use of a welding sequence via welding job sequencer component **704**. For instance, a welding sequence can be utilized by an operator based on pre-defined criteria such as, but not limited to, training, experience, welding hours, welding courses completed, among others. In other words, welding job sequencer component **704** can restrict an operator from using a welding sequence based upon the operator being unauthorized. However, upon authorization of the operator, welding job sequencer component **704** identifies welding sequence(s) (via welding sequence data store **706**) from which the operator can select and utilize to perform one or more welds.

[00101] It is to be appreciated that an operator authorization can be utilized in one or more environments. For instance, an operator can register in welding environment A and further submit input in a welding work cell in welding environment B for authorization. In other words, operator registration may originate at a first welding environment and authorization may be provided at a second welding environment. In still another embodiment, a registration environment can be used to which system authenticated data can be accessed or utilized to more than one welding environment. Moreover, welding sequences associated or authorized for use by an operator may extend across one or more welding environments. In an embodiment, a welding sequence may include an additional training or supervision before use in one environment compared to another.

[00102] In an example, a welding sequence can include a replenishment of a consumable. The welding sequence can be created or edited to include a replenishment of a consumable for at least one of a welding work cell, a welding equipment, among others. For instance, a replenishment of a consumable can be included with a welding sequence after a period of time, wherein the period of time is estimated based on the duration the welding equipment is used (e.g., estimate the use of

consumables). Thus, a welding environment, welding system, and/or welding work cell can be evaluated in real time or from collected real time data and identify data to determine a replenishment of a consumable.

[00103] In another example, a welding sequence can include an inspection or a repair. The welding sequence can be created or edited to include an inspection request or a repair request based on a factor such as, but not limited to, a time, a duration, among others. A welding work cell can have a maintenance period for a particular time and if a welding sequence is created for such welding work cell, a repair or maintenance can be included with the created welding sequence. Thus, a welding environment, welding system, and/or welding work cell can be evaluated in real time or from collected real time data and identify data to determine inspections or repairs.

[00104] In another example, a welding sequence can include a pre-shift routine that is performed prior to a welding operation. For instance, a shift can be part of a scheduling of operators or employees, wherein the shift is a duration of time when operators are working. As an example, a shift can be from seven (7) am to three (3) pm. Based on gathered historic welding data or real time welding data, an estimation of welding time can be calculated to facilitate determining maintenance to perform on welding equipment. In an embodiment, at least one of gas flow, tip condition, tip replacement, nozzle inspection, nozzle replacement, among others can be included within a welding sequence based on the estimation of welding time.

[00105] Furthermore, it is to be appreciated and understood that register component **702** can be a stand-alone component (as depicted), incorporated into welding job sequencer component **704**, incorporated into welding equipment (not shown), or a combination thereof. Additionally, welding job sequencer component **704** can be a stand-alone component (as depicted), incorporated into register component **704**, incorporated into welding equipment (not shown), or a combination thereof. Further, welding sequence data store **706** can be a local data store, a remote data store, a cloud-based data store, a computing platform, and/or any other network or computing environment configuration discussed above in regards to the welding job sequencer component.

[00106] *Fig. 8* illustrates system **800** that monitors fixture settings for a welding procedure prior to performing a welding procedure with a welding sequence. System **800** further includes monitor component **802** that is configured to evaluate a portion of welding work cell (discussed above) to determine a location of a fixture for workpiece **808** prior to performing a weld utilizing a welding

sequence. By way of example and not limitation, a fixture secures the workpiece from movement during the first weld or the second weld. For instance, a fixture can be a clamp, a temporary weld (e.g., a tack weld), among others. Monitor component **802** verifies a position and/or location of at least one fixture for workpiece **808**, wherein the position and/or location corresponds to at least one of a specific welding sequence, a job, an assembly of the workpiece, and the like. In an embodiment, monitor component **802** provides real time monitoring of operator **804** and configuration of one or more fixtures. In another embodiment, monitor component **802** evaluates a location and/or position of one or more fixtures upon completion of operator's configuration.

[00107] Data relating to a fixture (e.g., position, location, number of fixtures, among others) can be referred to as fixture data. Fixture data can be included within a welding sequence or associated with a welding sequence. Thus, prior to employing a welding sequence, monitor component **802** can verify fixture data (e.g., position of fixture, number of fixtures, pressure required for each fixture, among others). In another embodiment, fixture data can be associated with workpiece **808**, job, client, or assembly. In general, an identification of workpiece **808** and/or welding sequence can be used to determine fixture data, wherein performance of a weld can be dependent upon validation of fixture data for quality control.

[00108] System **800** further includes identification component **810** that is configured to determine a welding sequence for workpiece **808**. Identification component **810** can collect or receive data from workpiece **808** and identify at least one welding sequence that includes welding procedures to perform thereon. In an embodiment, identification component **810** leverages a data store (not shown but discussed above in *Fig. 7*). In a particular example, a workpiece can include barcode data that is received and identification component **810** matches a welding sequence based on the identified workpiece (identified by a lookup of the barcode data). In another embodiment, identification component **810** selects at least one welding sequence based on an input from an operator (e.g., via registration component in *Fig. 7*). In another example, the welding sequence can be correlated or matched to workpiece **808** via an operator registration. Thus, a particular operator can be assigned specific welding sequences to perform for a duration of time and registration and/or authorization can enable identification component **810** to select a welding sequence to utilize for a welding operation. In still another embodiment, identification component **810** can evaluate at least one of workpiece **808** (e.g., orientation, size, dimensions, material, and the like), welding equipment **806** settings, and/or fixture data (e.g., location of fixture, size of fixture, and the like) to determine a welding sequence to implement for workpiece **808**. For example, a camera or video de-

vice can be attached to operator equipment or within the welding work cell and collect data related to workpiece and/or welding operation performed, wherein such data collected allows identification component **810** to select a welding sequence that is used by welding job sequencer component **704**. Moreover, such data can be utilized to train or set up welding job sequencer component **704**.

[00109] Monitor component **802** can leverage, for instance, image data (e.g., camera data), position sensors on fixtures, pressure sensors on fixtures, workpiece orientation, among others. Based on the validation of the one or more fixtures, welding equipment **806** may be activated (if position and/or location of fixtures are verified) or remain deactivated (if position and/or location of fixtures are not in accordance with standards).

[00110] *Fig. 9* illustrates system **900** that generates and provides data to an operator on where to perform a welding procedure on a workpiece. System **900** includes location component **902** that is configured to provide information on a workpiece **904** for performing a weld using welding equipment and/or a welding sequence. In an embodiment, location component **902** can project a target on workpiece **904**, wherein the target can be at least one of a simulated weld (e.g., an image of what the weld is to look like when performed on with the welding sequence) or a indicator (e.g., an image that indicates a location for where the weld is to be performed with the welding sequence). For instance, location component **902** can project a target (e.g., an image, a light, a hologram, and the like) onto workpiece **904** at a particular location to which a weld is to be performed, wherein the location is defined by the welding sequence that is to be utilized via welding job sequencer component **704**. In another embodiment, the location can be provided as a separate portion of data that is used by the location component **902**. Thus, the location can be determined for workpiece **904** with the welding sequence or, in the alternative, independent of the welding sequence.

[00111] Location component **902** can further generate a target (e.g., via a light, a hologram, an image, and the like) on operator equipment **908**. For instance, the target can be generated and/or displayed onto a visor of an operator, a glass of a pair of glasses, among others. It is to be appreciated that the operator can selectively control whether the target is displayed or not displayed in order to minimize restriction of vision and/or improve safety. In another embodiment, location component **902** can interact with a video device that allows an operator to view workpiece **904** through the video device and have a target overlaid thereon via a display or viewfinder of the video device.

[00112] System **900** further includes ID display component **906** that is configured to project data onto workpiece **904** and/or onto a surface within a welding work cell, wherein the data relates to specify a welding operation being performed on workpiece **904**. For instance, the data can be, but is not limited to, a job reference, a work order, a welding schedule, a barcode, a serial number, a reference identification, one or more numbers, one or more letters, a welding sequence identification, a client reference, and/or a combination thereof. In another embodiment, ID display component **906** can be configured to display additional information related to the one or more welding procedures performed such as, but not limited to, an operator identification, a timer illustrating a duration of time welding, a counter (e.g., counting a number of welds), a weld score (e.g., rating or score of welding performance), a date, a time, among others.

[00113] *Fig. 10* illustrates system **1000** that employs Radio Frequency Identification (RFID) to select a welding sequence to drive a welding procedure with a workpiece. System **1000** includes Radio Frequency Identification (RFID) component **1002** (herein referred to as RFID component or RFID reader) that is configured to receive or collect wireless data from RFID tag **1004**, wherein wireless data includes information related to at least one of workpiece **1006**, job, work order, weld operation, welding sequence to use, among others. In an embodiment, RFID tag **1004** can be affixed or coupled to workpiece **1006**. It is to be appreciated that the wireless data received can be used by select component **1008** to identify at least one welding sequence via welding sequence data store **706**. Once identified, the welding sequence can be utilized by welding job sequencer component **702** to perform two or more welds without operator/user intervention to configure welding equipment. In general, the wireless data received or collected from RFID tag **1004** allows select component **1008** to determine a welding sequence to use for a particular welding operation, workpiece, and/or assembly of a workpiece.

[00114] RFID tag **1004** can be an active tag (e.g., power source used to allow transmission from tag to reader) or a passive tag (e.g., a portion of a signal received from RFID reader or component **1002** is used to power transmission from the tag to RFID reader or component **1002**). Moreover, it is to be appreciated that there can be any suitable number of RFID readers, corresponding sets of tags for each reader, and the like. RFID reader or component **1002** communicates wirelessly with at least one RFID tag **1004** based on a geographic range or distance therebetween. For instance, based on at least one of a frequency, power source (e.g., passive tag, active tag, amount of power from power source), among others, the geographic range or distance can vary. In any event, when the frequency and/or power source allow wireless communication between at least one tag and

RFID reader or component **1002**, data is communicated from at least one RFID tag to RFID reader or component **1002**, wherein the data is information related to at least one of workpiece **1006**, job, work order, weld operation, welding sequence to use, among others.

[00115] An RFID system (e.g., system **1000**) consists of at least an RFID tag (e.g., RFID tag **1004**) and an RFID transceiver (e.g., RFID component **1002**). The RFID tag can contain an antenna that provides reception and/or transmission to radio frequency queries from the RFID transceiver. The RFID tag can be a small object, such as, for example, an adhesive sticker, a flexible label and integrated chip, etc. There are typically four different frequencies the RFID tags utilize: low frequency tags (between about 125 to 134 kilohertz), high frequency tags (about 13.56 megahertz), UHF tags (about 868 to 956 megahertz) and Microwave tags (about 2.45 gigahertz). In general, an RFID system can include multiple components: tags, tag readers (e.g., tag transceivers), tag writers, tag-programming stations, circulation readers, sorting equipment, tag inventory wands, among others.

[00116] In view of the exemplary devices and elements described supra, methodologies that may be implemented in accordance with the disclosed subject matter will be better appreciated with reference to the flow charts and/or methodologies of *Fig. 11* and *12*. The methodologies and/or flow diagrams are shown and described as a series of blocks, the claimed subject matter is not limited by the order of the blocks, as some blocks may occur in different orders and/or concurrently with other blocks from what is depicted and described herein. In an embodiment, a first input can be received prior to a second input (as described below). In another embodiment, a second input can be received prior to a first input. In an embodiment, the a first input and a second input can be received at substantially the same time. Moreover, not all illustrated blocks may be required to implement the methods and/or flow diagrams described hereinafter.

[00117] Sequentially, the following occurs as illustrated in the decision tree flow diagram **1100** of *Fig. 11* which is a flow diagram **1100** that registers an operator with a welding sequence in order to perform a weld on a workpiece within a welding work cell. Methodology **1100** employs at least one pre-welding conditions that are evaluated prior to use of a welding sequence. An input from an operator is received, wherein the input is a portion of biometric data of the operator (reference block **1102**). It is to be appreciated and understood that the input can be data other than biometric data such as, but not limited to, employee identification, username, password, image identification (e.g., barcode, QR code, graphic, logo, among others), a combination thereof, and the like. An

identity of the operator is verified by comparing the input to a system authenticated input for the operator (reference block **1104**). A welding sequence the operator is authorized to perform is identified, wherein the welding sequence defines a first welding procedure that includes a first parameter to create a first weld on a workpiece and a second welding procedure that includes a second parameter to create a second weld on the workpiece (reference block **1106**). At least one fixture for the workpiece is monitored within the welding work cell (reference block **1108**). A location of the at least one fixture for the workpiece is verified based on a location indicated in the welding sequence (reference block **1110**). In another embodiment, the location is indicated by data associated with the identified welding sequence, the workpiece, a welding job, a client, a welding procedure, among others. The welding sequence is utilized to automatically modify a welding equipment within the welding work cell without intervention from the operator creating at least one of the first weld or the second weld (reference block **1112**).

[00118] In an embodiment, method **1100** can further include receiving a wireless signal from a Radio Frequency Identification (RFID) tag associated with the workpiece and selecting the welding sequence for the workpiece based on the wireless signal. In the embodiment, method **1100** can further include projecting a weld location image onto at least one of an equipment of the operator or the workpiece, wherein the weld location image indicates where to perform at least one of the first weld or the second weld and projecting an identification image onto at least one of an equipment of the operator or the workpiece, wherein the identification image specifies the workpiece by at least one of a serial number, a number, a client, or a job reference.

[00119] The following occurs as illustrated in the flow diagram **1200** of *Fig. 12*. Flow diagram **1200** relates to verifying a fixture setting for a workpiece for a welding procedure and a welding sequence. A first data is received that identifies a workpiece and a second data is received that identifies an operator (reference block **1202**). A welding sequence is identified based upon verification of the workpiece and the operator via the first data and the second data (reference block **1204**). A fixture position for the workpiece is monitored (reference block **1206**). The welding sequence is implemented based upon authentication of the fixture position (reference block **1208**).

[00120] By way of example and not limitation, welding equipment (e.g., controller for a welder power source, wire feeder, welder power source, among others) can include one or more steps related to a particular welding process for a specific workpiece, wherein a step can include a respective setting or configuration for at least one welding equipment. For instance, a first workpiece can include

steps A, B, C, and D based on welding parameters desired, the welding process used, and/or the workpiece. In another example, a second workpiece can include steps B, C, A, E, and F. With the employment of a welding sequence, the controller implementing the steps for the welding process via the welder power source and/or welding equipment can be managed and/or instructed. For instance, the welding sequence can indicate at least one of the following: which steps to perform, redo a step, skip a step, pause a sequence of steps, among others. Furthermore, a controller (e.g., or other suitable component) can control one or more welder power sources, parameters, welding schedules, among others associated with one or more welding processes, wherein each welding process can have a corresponding welding sequence(s).

[00121] In an embodiment, a welder system is provided that includes a weld score component that is configured to evaluate at least one of the first weld or the second weld performed on the workpiece based upon at least one of an image of the first weld or the second weld or a user inspection. In an embodiment, a welder system is provided that includes a check point component that is configured to monitor the creation of at least one of the first weld or the second weld in real time. In an embodiment, a welder system is provided in which a welding job sequencer component instructs an operator of the welding work cell to assemble the workpiece with the first welding procedure and the second welding procedure having two separate welding schedules.

[00122] In an embodiment, the first component is configured to identify the operator with a portion of biometric data. In the embodiment, the portion of biometric data is at least one of a handprint, a fingerprint, a retinal scan of an eye, a portion of facial data of the operator, a height of the operator, or a weight of the operator. In an embodiment, the first component identifies the operator by an image and the image is located on at least one of a helmet of the operator, a protective shield on a helmet, a glove, a welding gun, an identification badge, a welding jacket, a welding sleeve, a welding apron, or a pair of glasses. In the embodiment, the image is at least one of a barcode, an employee identification, a set of letters, a set of numbers, a graphic, a logo, a Quick Response (QR) code, or a three-dimensional (3D) barcode.

[00123] In an embodiment, a system can include a monitor component that is configured to detect a location of at least one fixture used with the workpiece within the welding work cell, wherein the at least one fixture secures the workpiece from movement during the first weld or the second weld and a monitor component that is configured to verify the location of the at least one fixture corresponds to a location indicated with the welding sequence. In the embodiment, the monitor compo-

ment is at least one of a pressure sensor, an image capture device, or a video device. In the embodiment, the monitor component detects the location of the at least one fixture based on an orientation of the workpiece within the welding cell.

[00124] In an embodiment, a system can include a location component that is configured to navigate a weld location for the workpiece to the operator based upon the welding sequence. In the embodiment, the location component projects the weld location on at least one of the workpiece or an equipment of the operator. In the embodiment, the equipment of the operator is at least one of a helmet, a visor, a lens on a pair of glasses, or a display on a glove.

[00125] In an embodiment, a system can include a Radio Frequency Identification (RFID) component that is configured to receive a wireless signal from an RFID tag affixed to the workpiece, wherein the wireless signal includes data to identify the workpiece and a select component that is configured to identify the welding sequence based on the identified workpiece.

[00126] The above examples are merely illustrative of several possible embodiments of various aspects of the present invention, wherein equivalent alterations and/or modifications will occur to others skilled in the art upon reading and understanding this specification and the annexed drawings. In particular regard to the various functions performed by the above described components (assemblies, devices, systems, circuits, and the like), the terms (including a reference to a "means") used to describe such components are intended to correspond, unless otherwise indicated, to any component, such as hardware, software, or combinations thereof, which performs the specified function of the described component (e.g., that is functionally equivalent), even though not structurally equivalent to the disclosed structure which performs the function in the illustrated implementations of the invention. In addition although a particular feature of the invention may have been disclosed with respect to only one of several implementations, such feature may be combined with one or more other features of the other implementations as may be desired and advantageous for any given or particular application. Also, to the extent that the terms "including", "includes", "having", "has", "with", or variants thereof are used in the detailed description and/or in the claims, such terms are intended to be inclusive in a manner similar to the term "comprising."

[00127] This written description uses examples to disclose the invention, including the best mode, and also to enable one of ordinary skill in the art to practice the invention, including making and using any devices or systems and performing any incorporated methods. The patentable scope of

the invention is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that are not different from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

[00128] The best mode for carrying out the invention has been described for purposes of illustrating the best mode known to the applicant at the time. The examples are illustrative only and not meant to limit the invention, as measured by the scope and merit of the claims. The invention has been described with reference to preferred and alternate embodiments. Obviously, modifications and alterations will occur to others upon the reading and understanding of the specification. It is intended to include all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

REFERENCE NUMBERS

10	operation	405	welding circuit path
20	operation	410	welder power source
22	operation	415	display
24	operation	420	welding cable
26	operation	430	welding tool
30	operation	440	workpiece
32	operation	450	workpiece connector
40	operation	460	spool
50	operation	470	feeder
52	operation	480	wire
54	operation	500	system
60	operation	510	computing platform
70	operation	515	first welding work cell
100	welding system	520	second welding work cell
110	operation	530	welding work cell
120	operation / welding cable	535	welding job sequencer component
122	operation	540	welding job sequencer component
124	operation	545	welding job sequencer component
126	operation	550	data store
130	operation	555	data store
132	operation	560	data store
150	operation	600	welding system
152	operation	620	first welding work cell
154	operation	630	second welding work cell
160	operation	640	Nth welding work cell
170	operation	650	memory
300	welding system	700	system
302	component	702	register component
304	welding work cell	704	welding job sequencer component
306	component	706	welding sequence data store
308	weld score component	800	system
400	welding system	802	monitor component

804	operator	1100	metrology / reference block
808	workpiece	1102	reference bloc
810	component	1104	reference bloc
900	system	1106	reference block
902	location component	1108	reference block
904	workpiece	1112	reference block
906	display component	1200	method
908	operator equipment	1202	reference block
1000	system	1204	reference block
1002	component	1206	reference block
1004	RFID tag	1208	reference block
1006	workpiece		
1008	component		

What is claimed is:

1. A welder system (100, 300, 400, 500, 700, 800, 900, 1000), comprising:
a first component that is configured to identify an operator within a welding work cell (304, 515, 520, 620, 630) to perform a first welding procedure on a workpiece (440, 808, 1006) and a second welding procedure on the workpiece (440, 808, 1006);
a welding job sequencer component (535, 540, 545) that is configured to select one or more welding sequences based on the identification of the operator, wherein the welding sequence defines at least a parameter and a welding schedule for the first welding procedure to create a first weld on the workpiece (440, 808, 1006) and the second welding procedure to create a second weld on the workpiece (440, 808, 1006); and
the welding job sequencer component (535, 540, 545) is further configured to utilize the welding sequence in the welding work cell to facilitate performing the first welding procedure and the second welding procedure for the identified operator.
2. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of claim 1, further comprising a weld score component that is configured to evaluate at least one of the first weld or the second weld performed on the workpiece (440, 808, 1006) by the operator based upon at least one of an image of the first weld or the second weld or a user inspection, and/or

further comprising a check point component that is configured to monitor the identified operator and creation of at least one of the first weld or the second weld in real time.
3. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of claim 1 or 2, wherein the welding job sequencer component (535, 540, 545) further instructs an operator of the welding work cell (304, 515, 520, 620, 630) to assemble the workpiece (440, 808, 1006) with the first welding procedure and the second welding procedure having two separate welding schedules.
4. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of any of the claims 1 to 3 wherein the first component is configured to identify the operator with a portion of biometric data, and/or wherein the first component identifies the operator by an image and the image is located on at least one of a helmet of the operator, a protective shield on a hel-

5. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of claim 4, wherein the portion of biometric data is at least one of a handprint, a fingerprint, a retinal scan of an eye, a portion of facial data of the operator, a height of the operator, or a weight of the operator, and/or wherein the image is at least one of a barcode, an employee identification, a set of letters, a set of numbers, a Quick Response (QR) code, a graphic, a logo, or a three-dimensional (3D) barcode.

6. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of any of the claims 1 to 5, further comprising:

a monitor component that is configured to detect a location of at least one fixture used with the workpiece (440, 808, 1006) within the welding work cell (304, 515, 520, 620, 630), wherein the at least one fixture secures the workpiece from movement during the first weld or the second weld.

7. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of any of the claims 1 to 6, wherein the monitor component (802) that is further configured to verify the location of the at least one fixture corresponds to a location indicated with the welding sequence, and/or

wherein the monitor component (802) is at least one of a pressure sensor, an image capture device, or a video device.

8. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of any of the claims 1 to 7, wherein the monitor component detects the location of the at least one fixture based on an orientation of the workpiece (440, 808, 1006) within the welding cell.

9. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of any of the claims 1 to 8, further comprising a location component that is configured to navigate a weld location for the workpiece (440, 808, 1006) to the operator based upon the welding sequence.

10. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of any of the claims 1 to 9, wherein the location component projects the weld location on at least one of the workpiece (440, 808, 1006) or an equipment of the operator.

11. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of any of the claim 1 to 10, wherein the equipment of the operator is at least one of a helmet, a visor, a lens on a pair of glasses, or a display on a glove.
12. The welder system (100, 300, 400, 500, 700, 800, 900, 1000) of any of the claims 1 to 11, further comprising:
a Radio Frequency Identification (RFID) component that is configured to receive a wireless signal from an RFID tag affixed to the workpiece (440, 808, 1006), wherein the wireless signal includes data to identify the workpiece (440, 808, 1006); and
a select component that is configured to identify the welding sequence based on the identified workpiece (440, 808, 1006).
13. A method of welding in a welding work cell, comprising:
receiving an input from an operator, wherein the input is a portion of biometric data of the operator;
verifying an identity of the operator by comparing the input to a system authenticated input for the operator;
identifying a welding sequence the operator is authorized to perform, wherein the welding sequence
defines a first welding procedure that includes a first parameter to create a first weld on a workpiece and a second welding procedure that includes a second parameter to create a second weld on the workpiece (440, 808, 1006);
monitoring at least one fixture for the workpiece (440, 808, 1006) within the welding work cell;
verifying a location of the at least one fixture for the workpiece based on a location indicated in the welding sequence; and
utilizing the welding sequence to automatically modify a welding equipment within the welding work cell without intervention from the operator creating at least one of the first weld or the second weld.
14. The method of claim 13, further comprising:
receiving a wireless signal from a Radio Frequency Identification (RFID) tag associated with the workpiece (440, 808, 1006); and
selecting the welding sequence for the workpiece (440, 808, 1006) based on the wireless signal.

15. The method of claim 13 or 14, further comprising:
projecting a weld location image onto at least one of an equipment of the operator or the workpiece (440, 808, 1006), wherein the weld location image indicates where to perform at least one of the first weld or the second weld; and
projecting an identification image onto at least one of an equipment of the operator or the workpiece (440, 808, 1006), wherein the identification image specifies the workpiece (440, 808, 1006) by at least one of a serial number, a number, a client, or a job reference.

16. A welder system (100, 300, 400, 500, 700, 800, 900, 1000), comprising:
means for receiving an input from an operator, the input is a portion of biometric data of the operator;
means for verifying an identity of the operator by comparing the input to a system authenticated input for the operator;
means for receiving a wireless signal from a Radio Frequency Identification (RFID) tag that is affixed to a workpiece (440, 808, 1006), wherein the wireless signal includes a portion of data that is used to identify a welding sequence for the workpiece (440, 808, 1006) ;
means for identifying the welding sequence the operator is to perform based on the wireless signal, wherein the welding sequence defines a one or more welding procedures that includes one or more parameters to create one or more welds on the workpiece (440, 808, 1006);
means for monitoring at least one fixture for a workpiece (440, 808, 1006) within the welding work cell;
means for verifying a location of the at least one fixture for the workpiece (440, 808, 1006) based on a location indicated in the welding sequence; and
means for employing the welding sequence for the welding work cell to perform one or more welds to assemble the workpiece (440, 808, 1006) by automatically adjusting a setting on a welding equipment within the welding work cell.

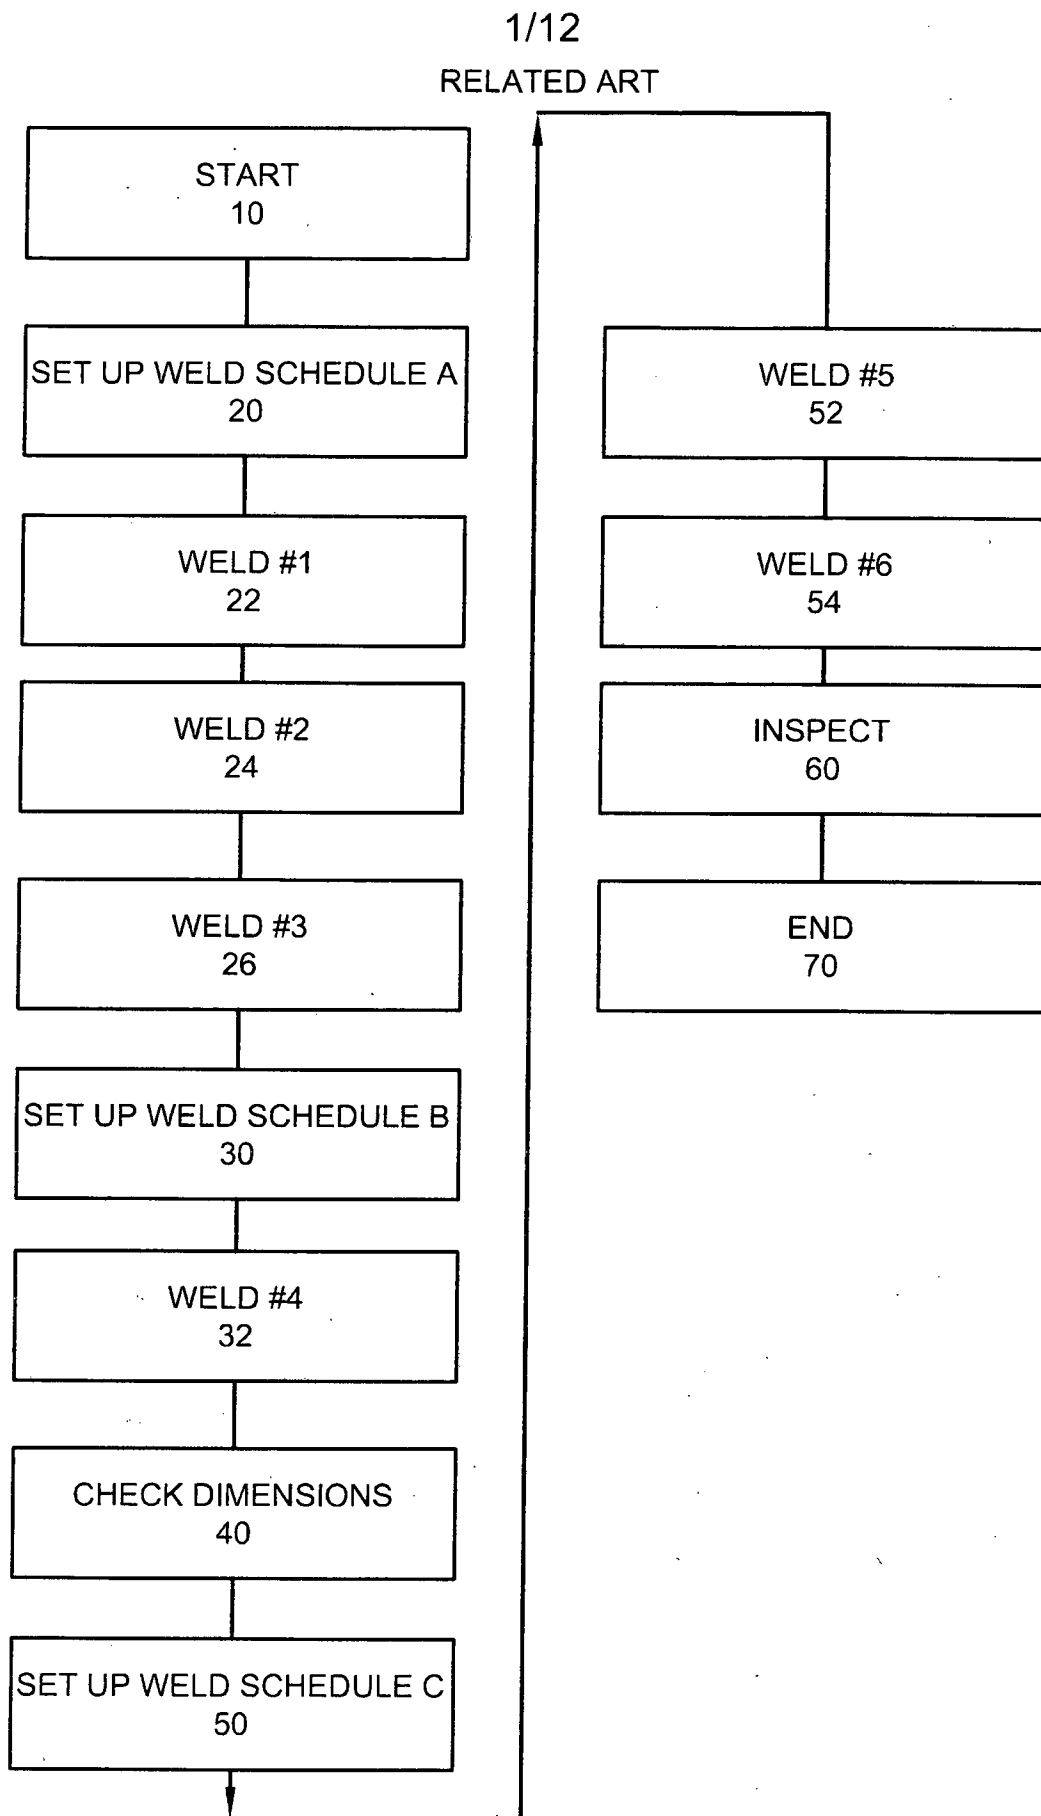


FIG. 1

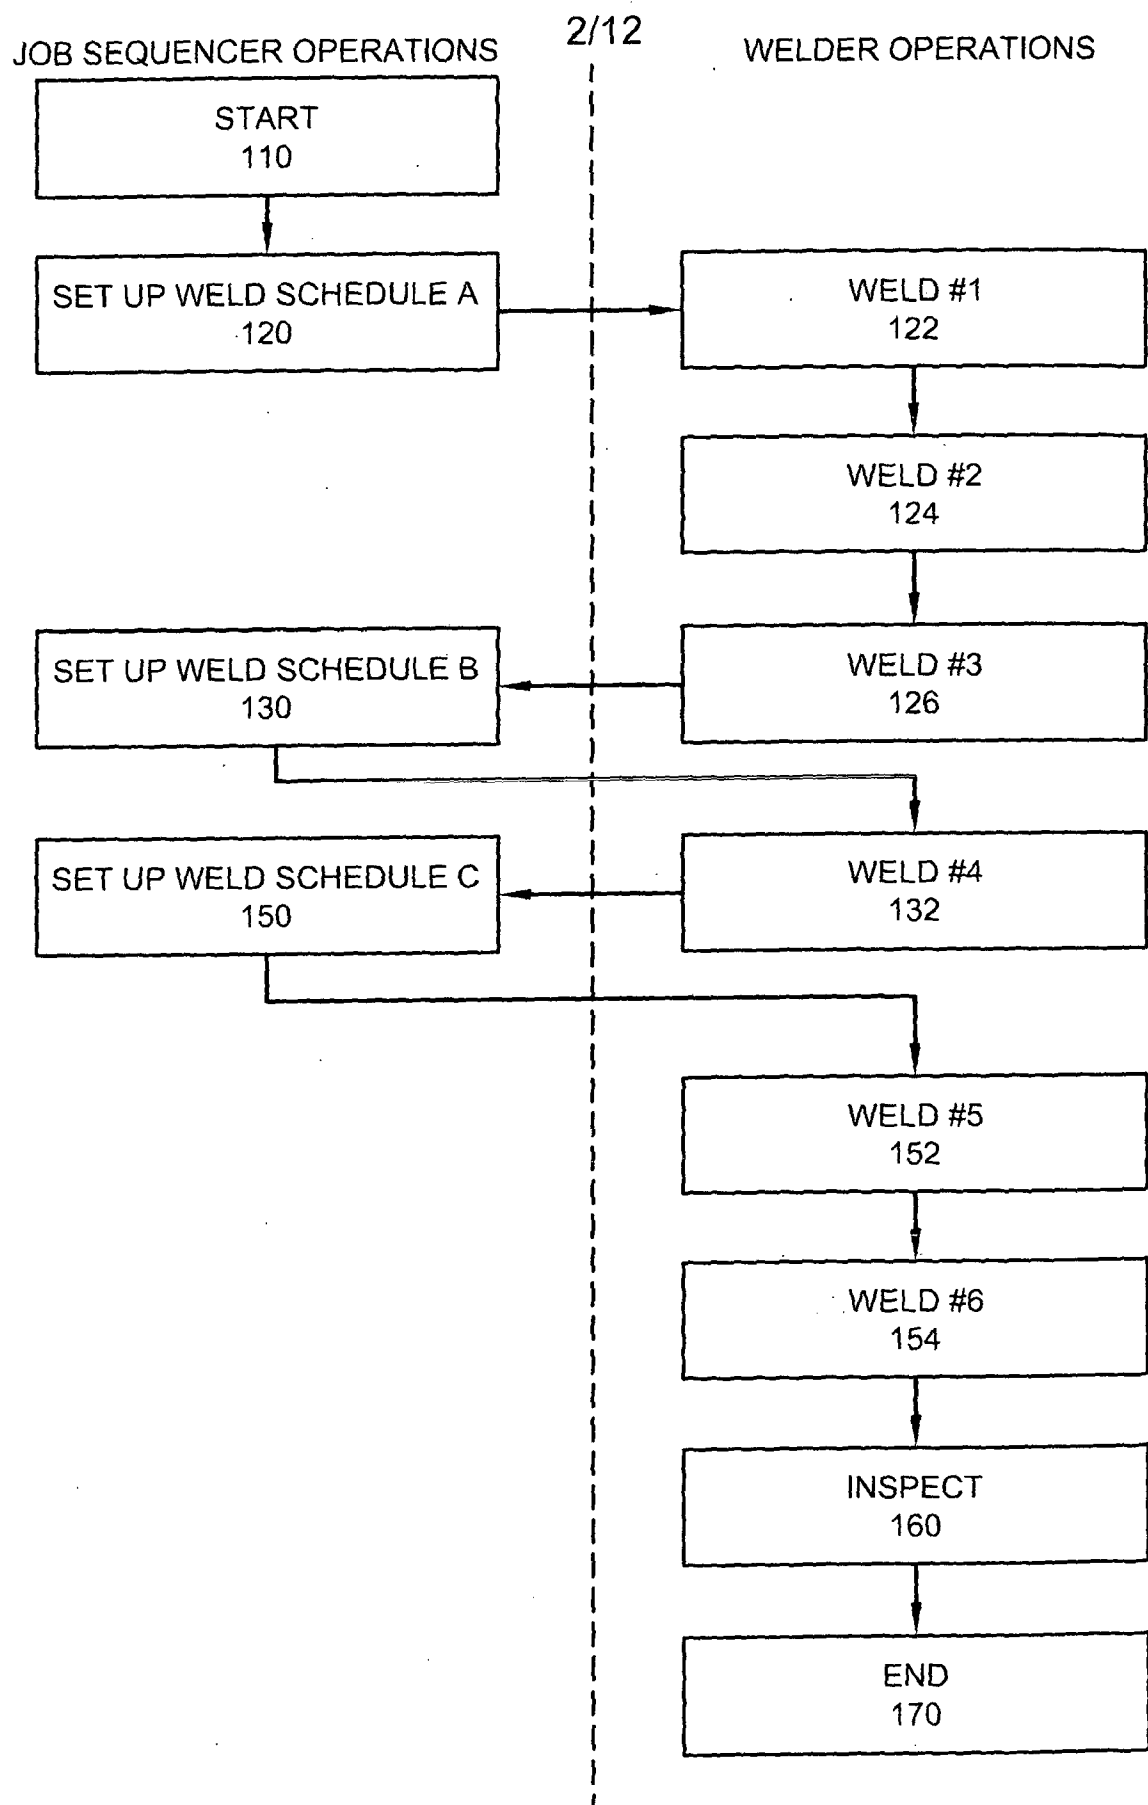


FIG. 2

3/12

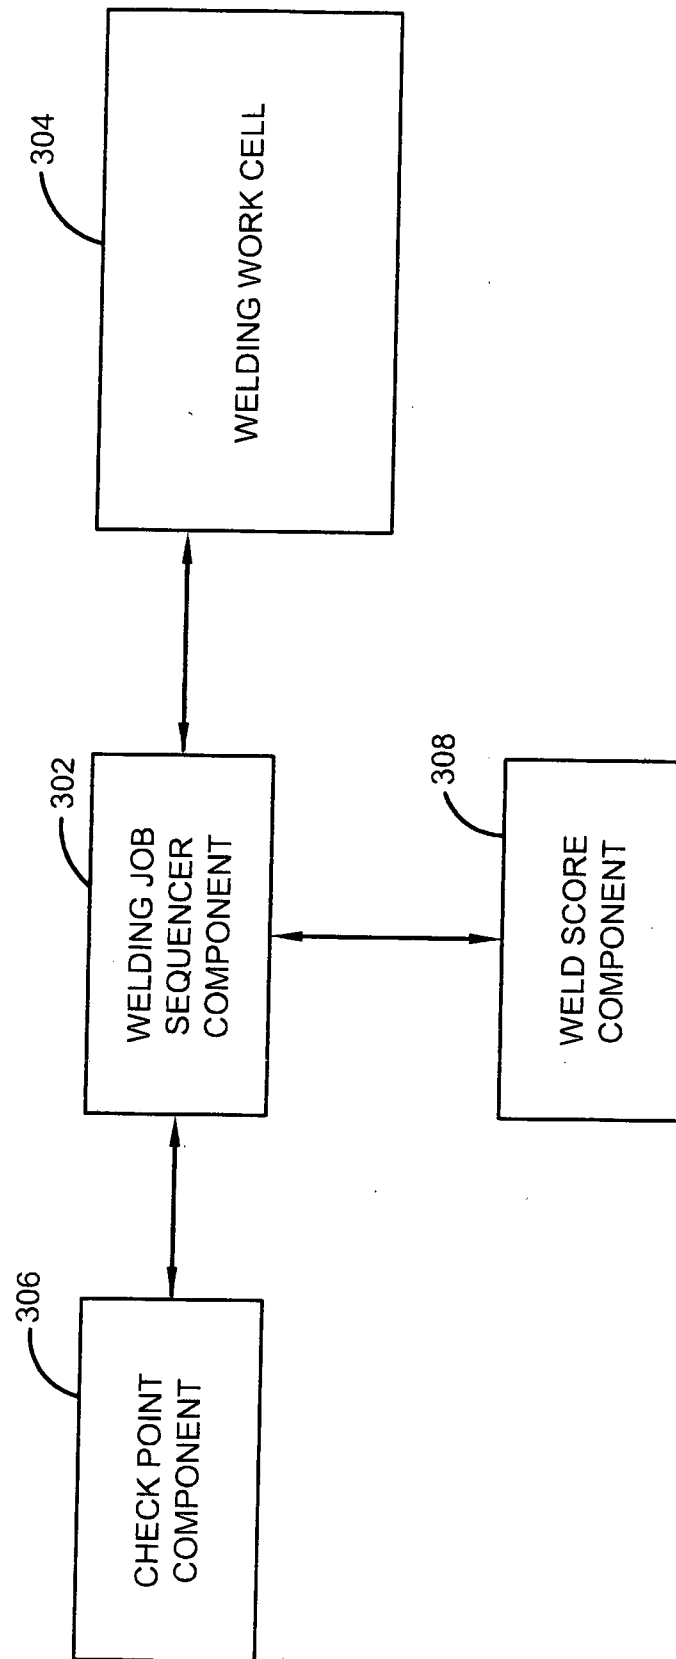


FIG. 3

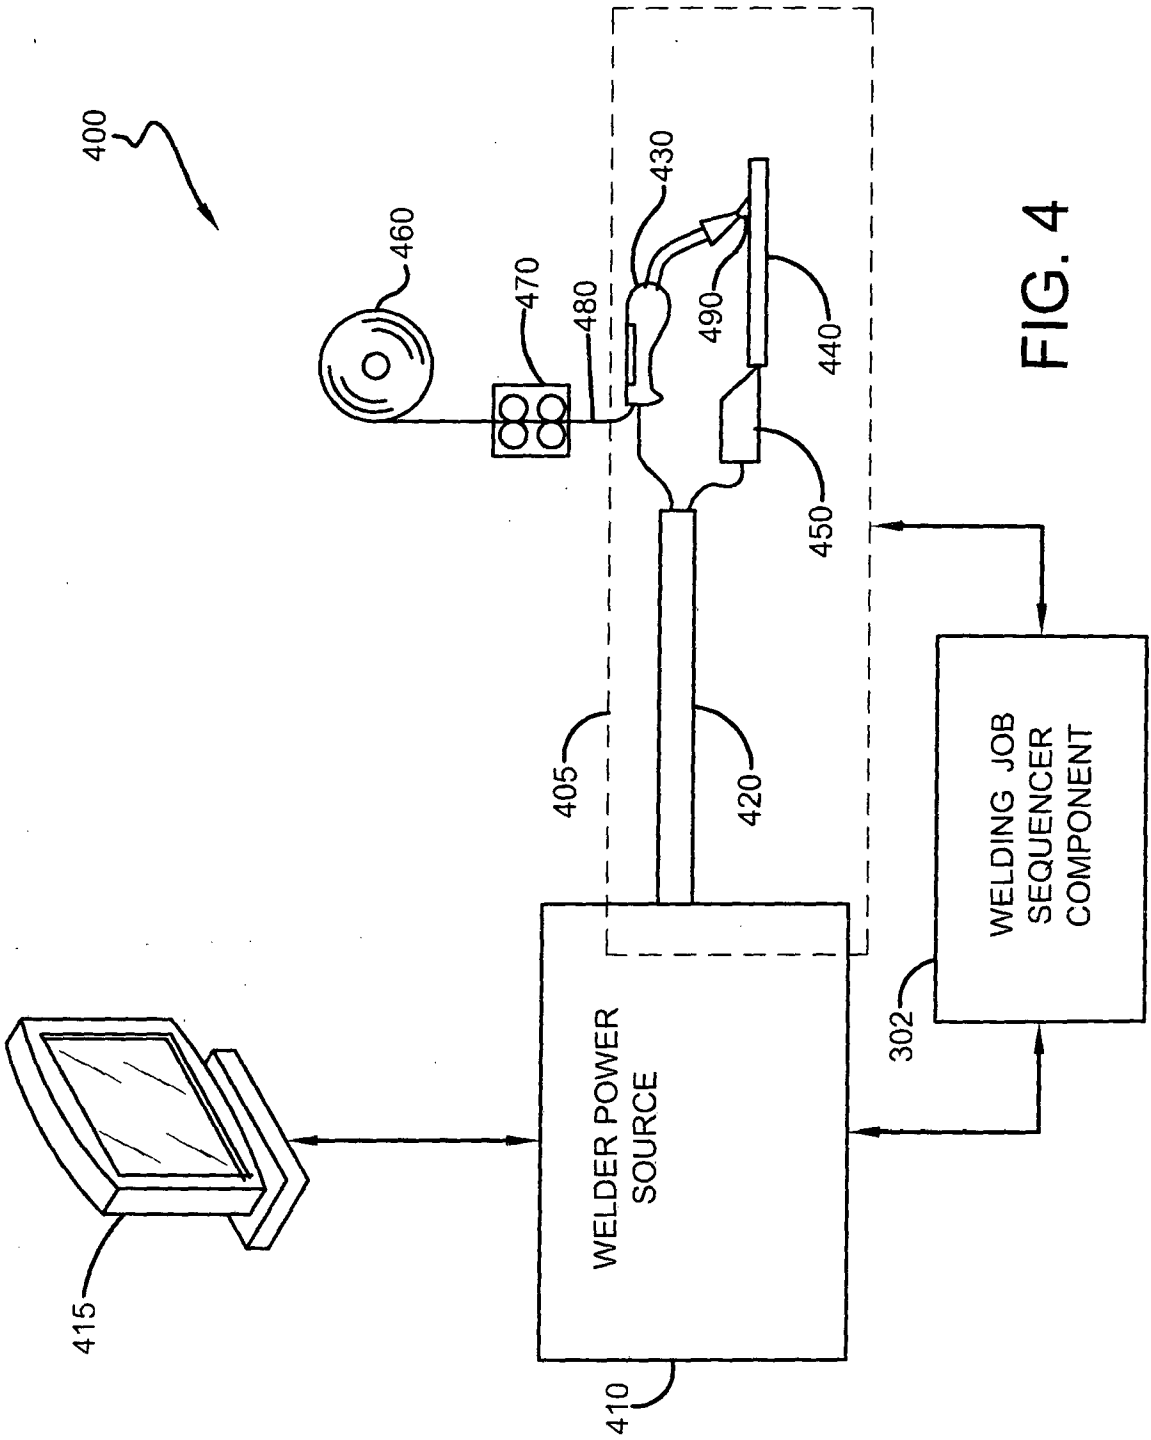


FIG. 4

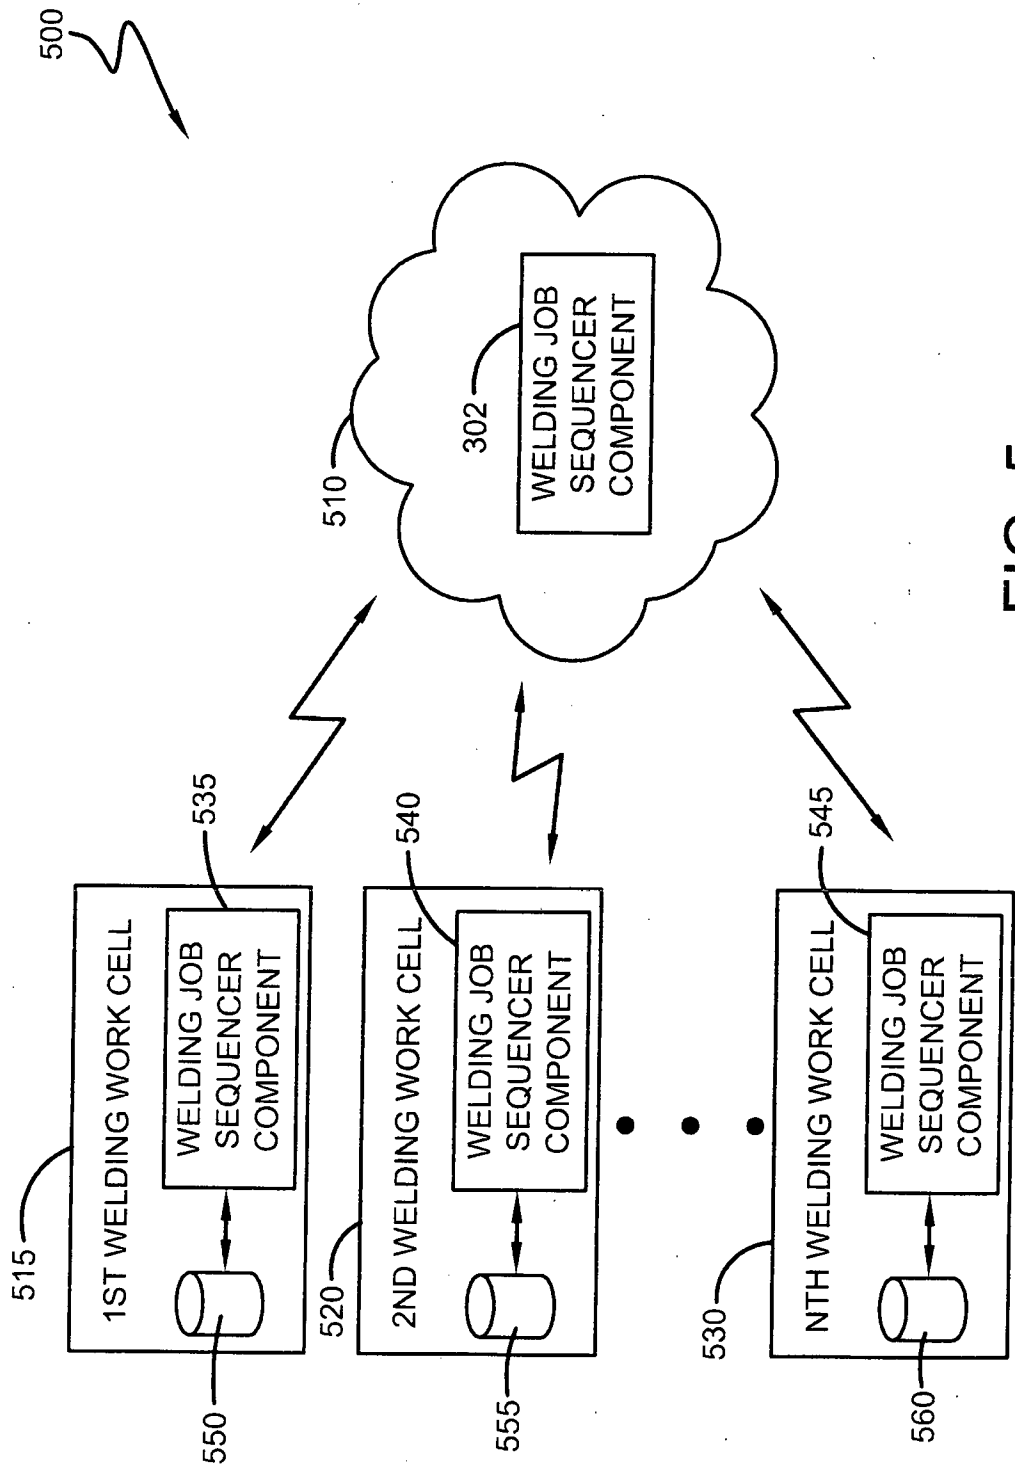


FIG. 5

6/12

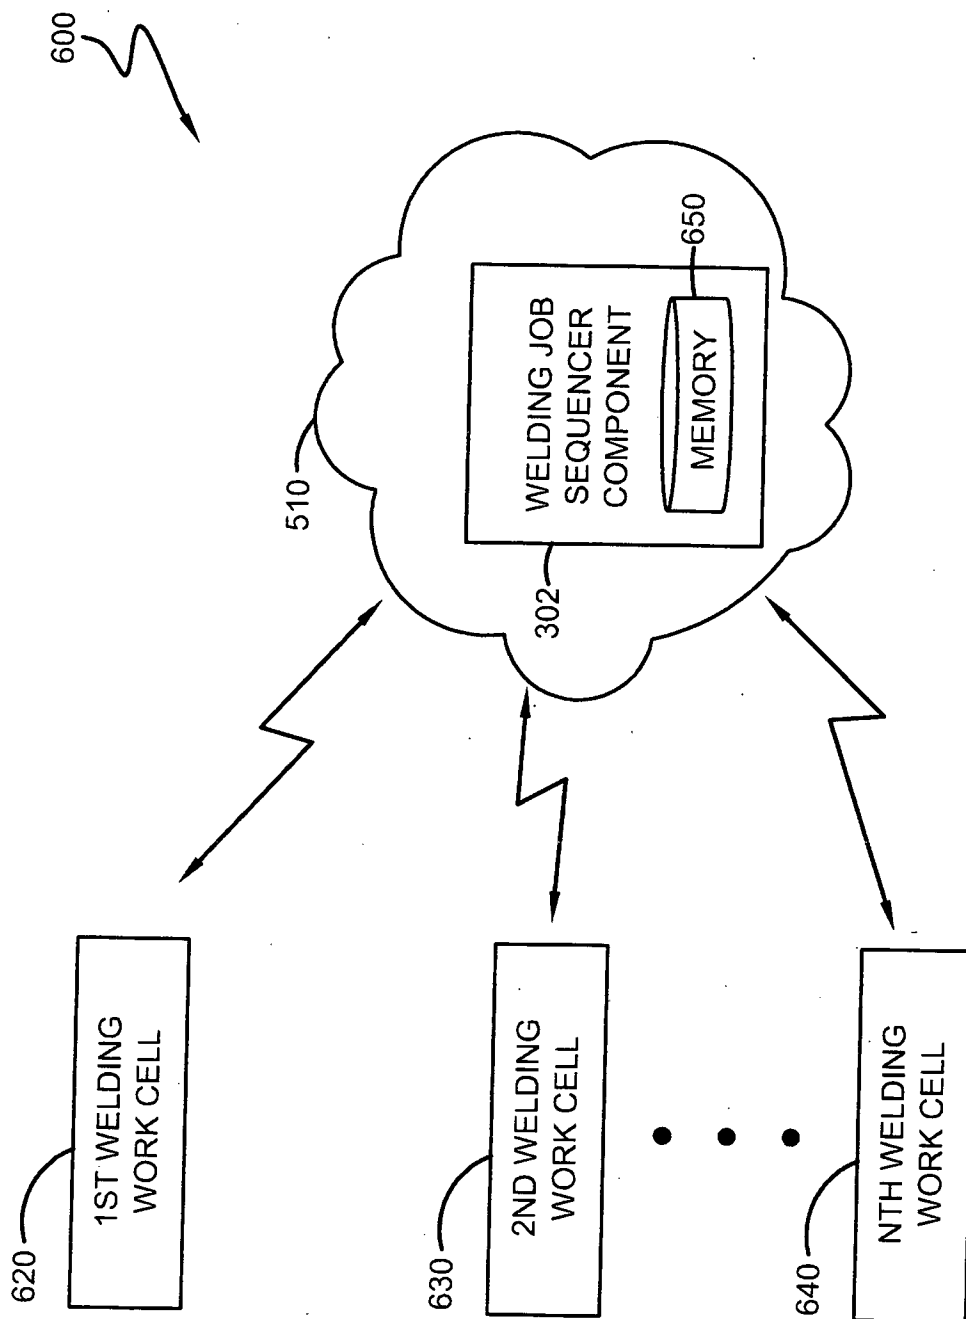


FIG. 6

7/12

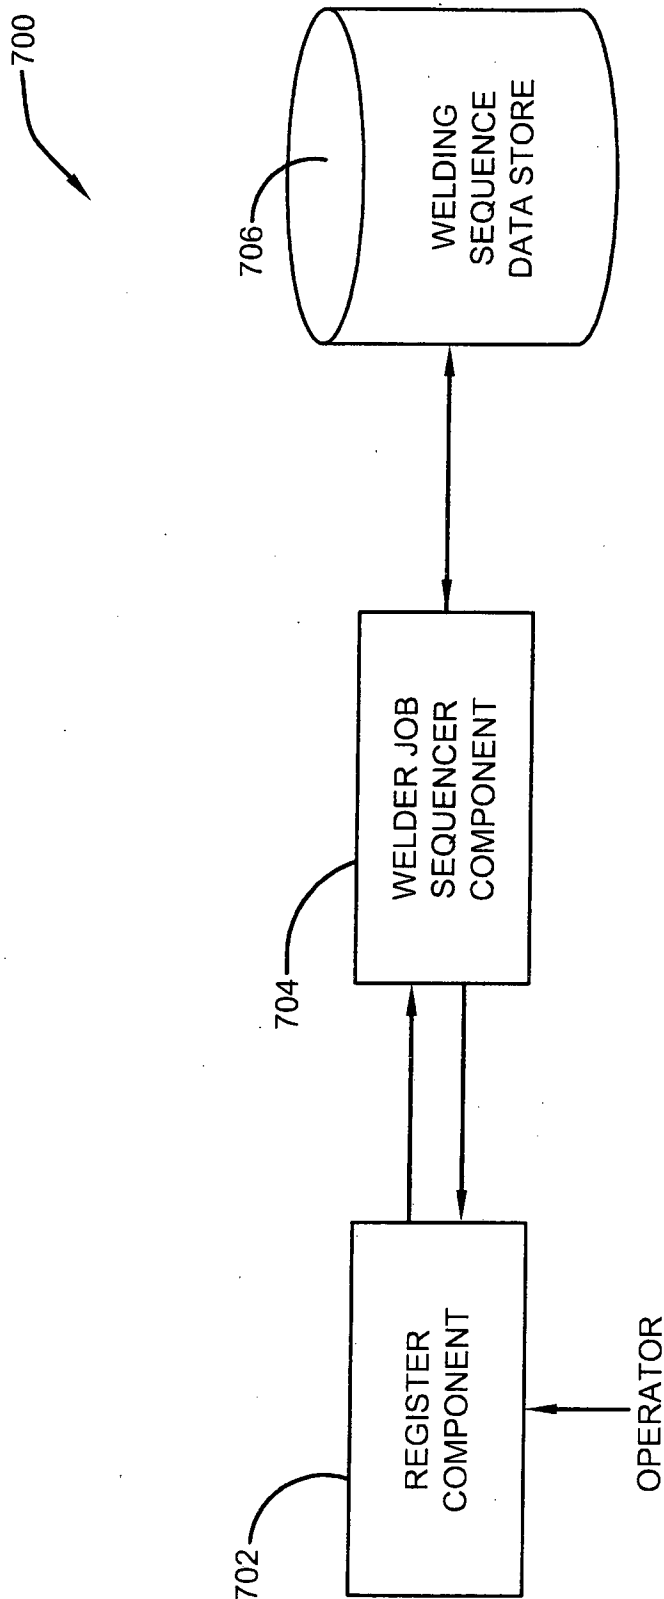


FIG. 7

8/12

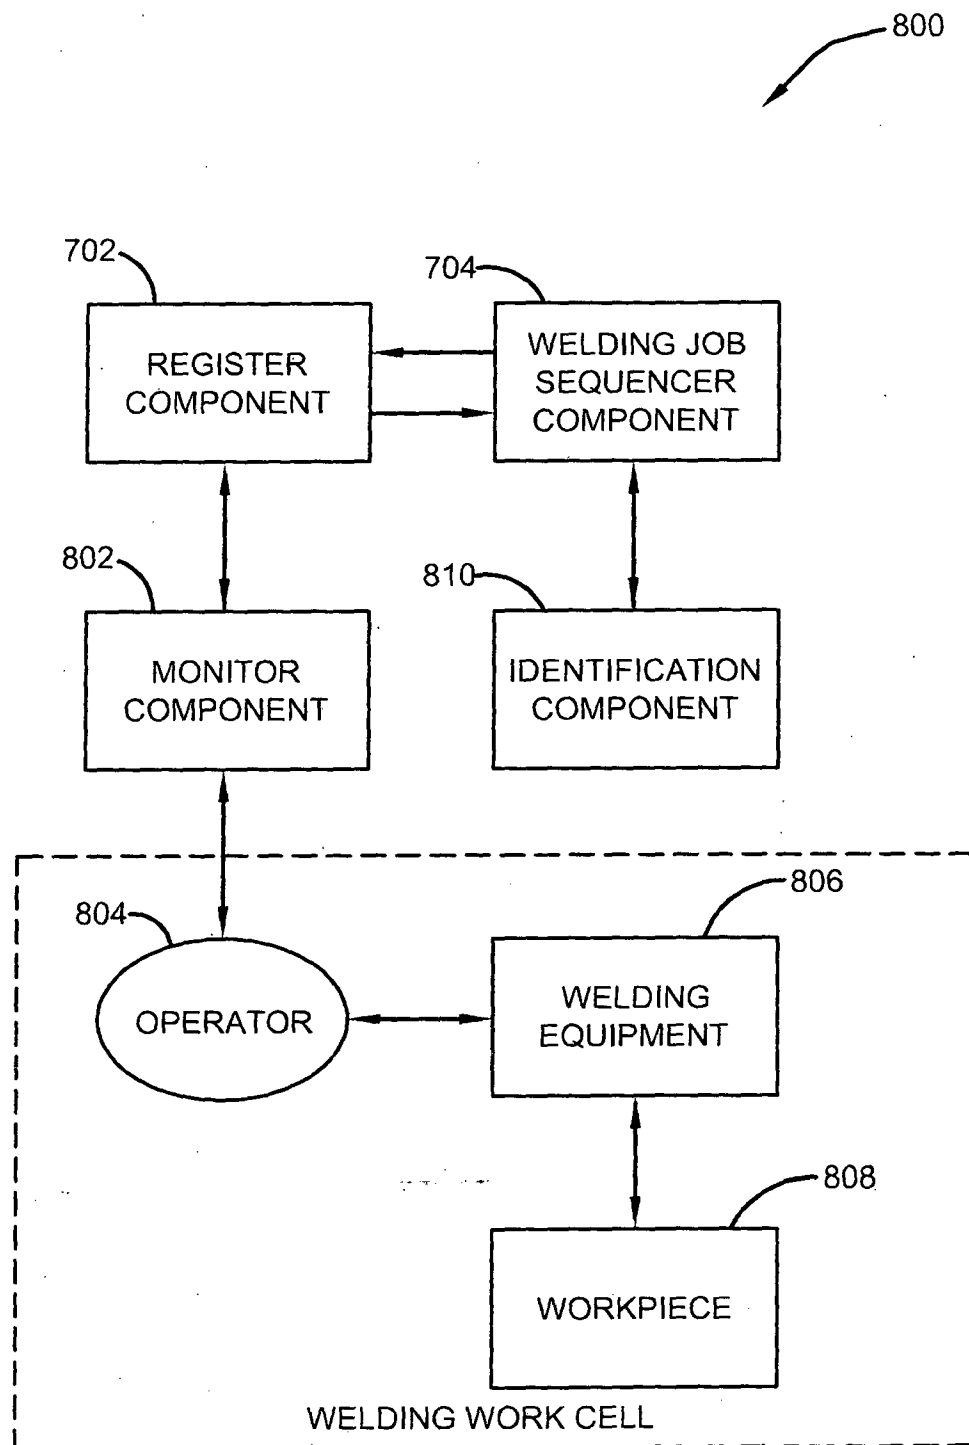


FIG. 8

9/12

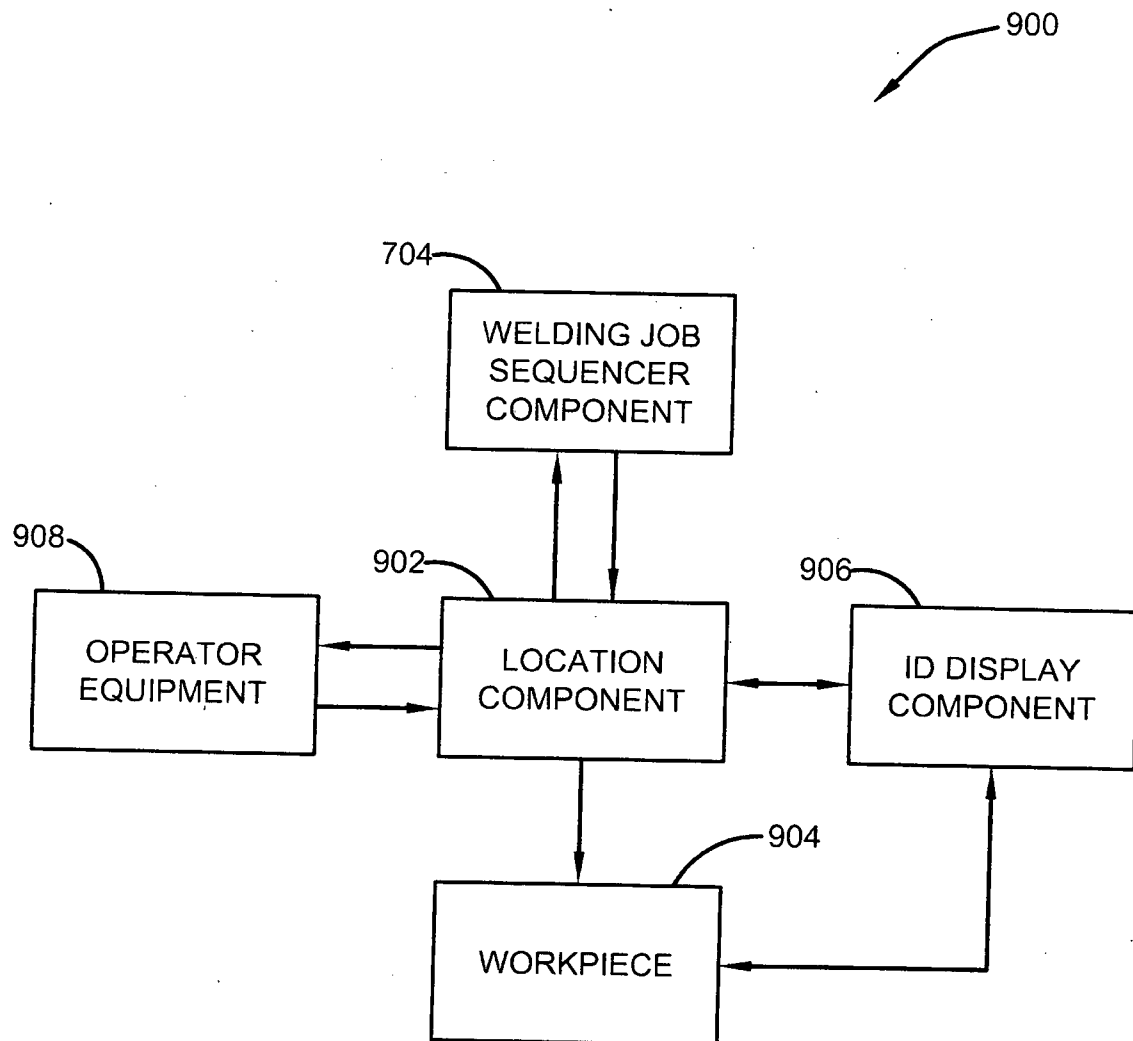


FIG. 9

10/12

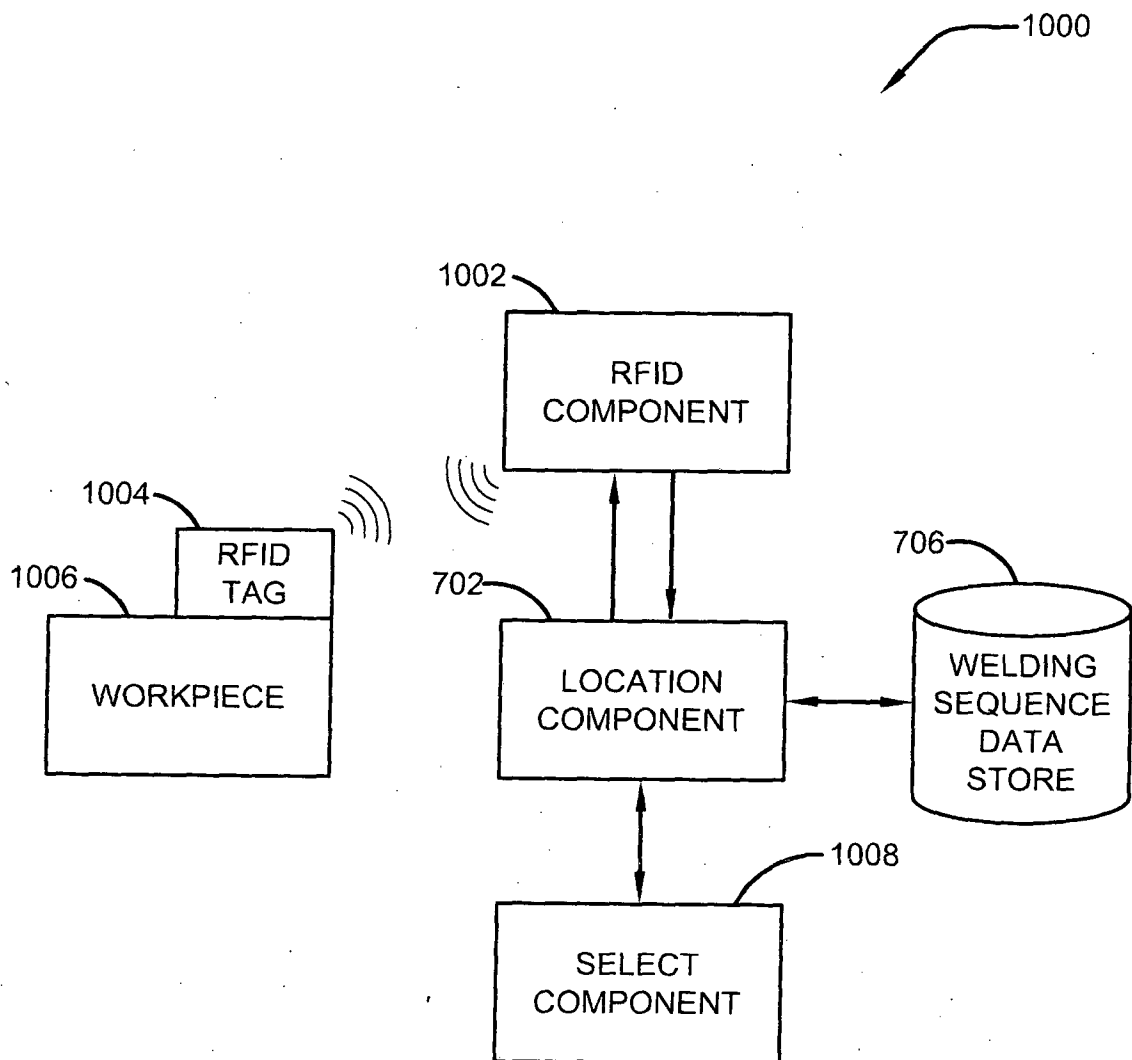


FIG. 10

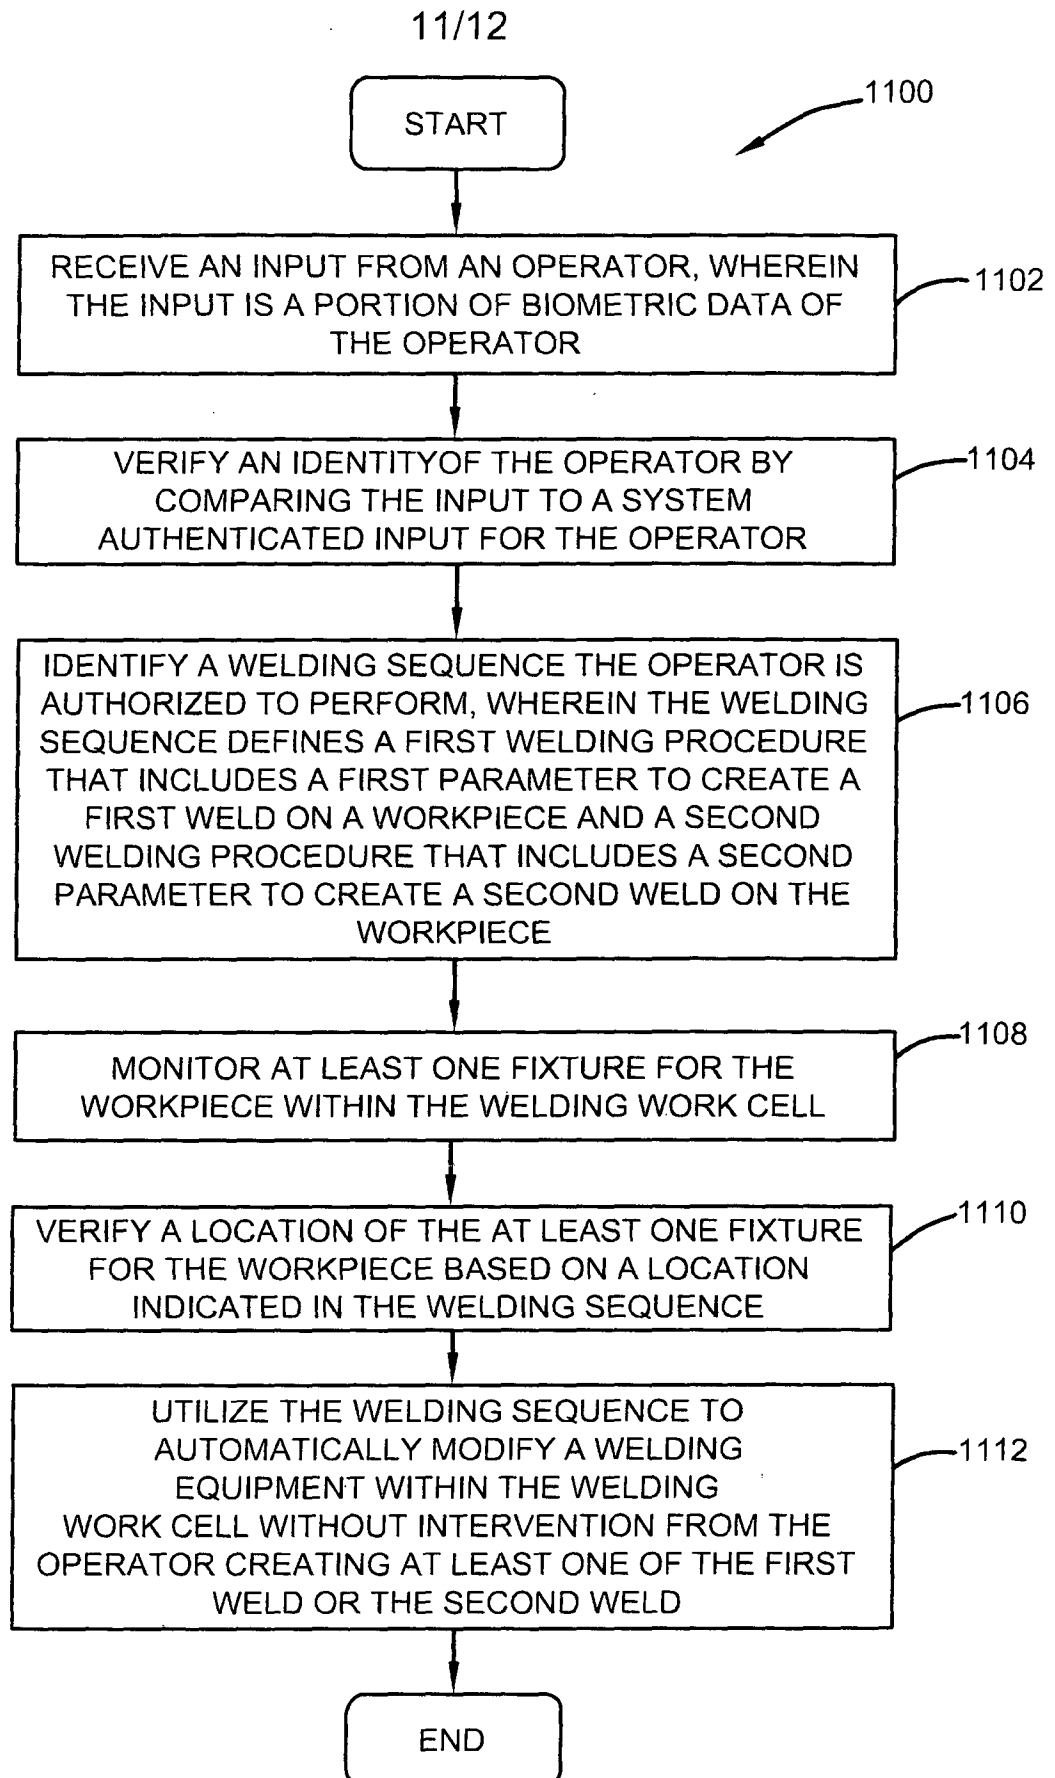


FIG. 11

12/12

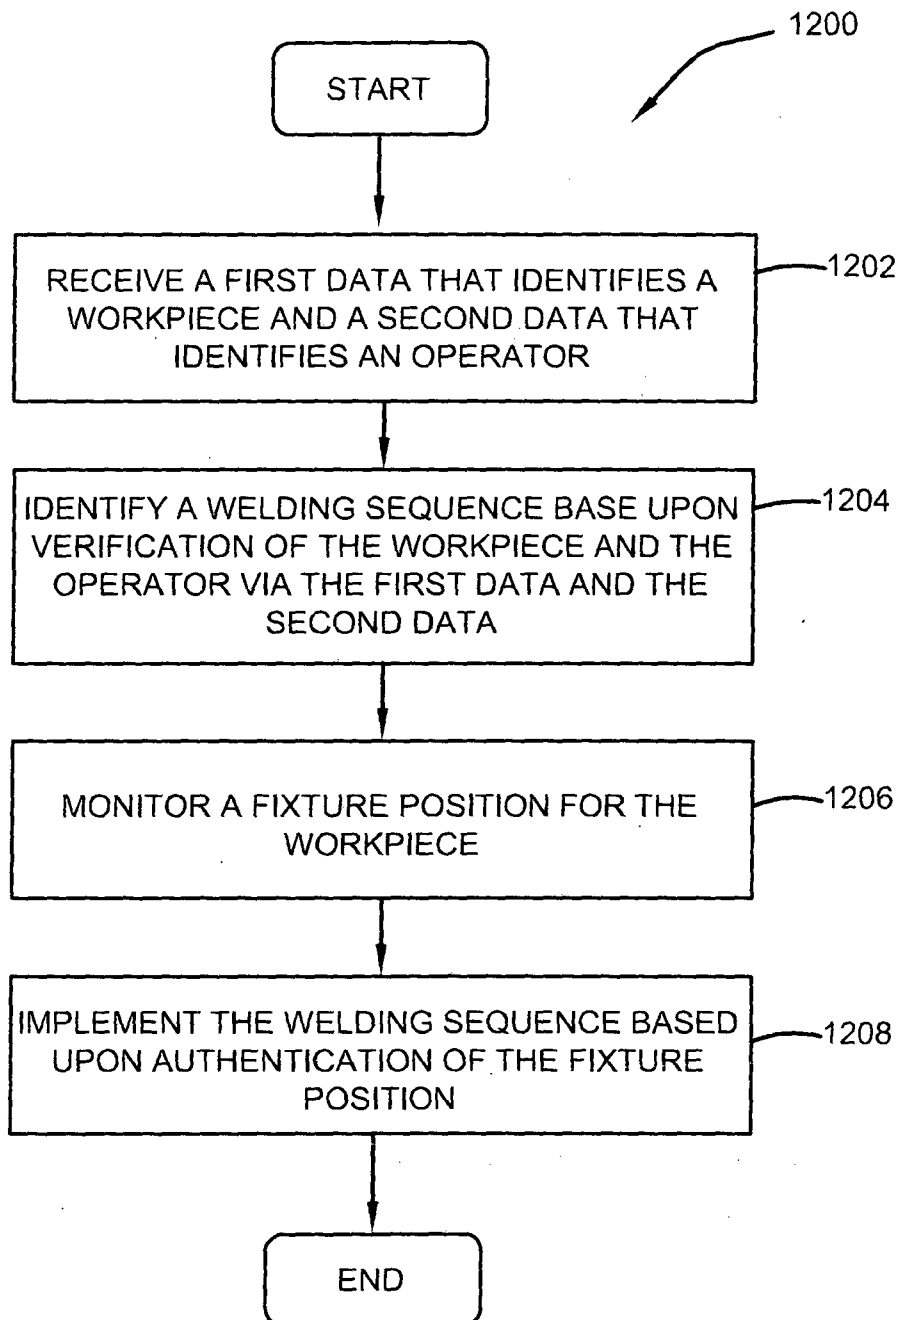


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2014/000350

A. CLASSIFICATION OF SUBJECT MATTER

INV. G05B19/418

ADD. B23K9/095

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G05B B23K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2011/100214 A1 (ILLINOIS TOOL WORKS [US]; DAVIDSON ROBERT R [US]; KOWALESKI ANTHONY J) 18 August 2011 (2011-08-18)	1,2,4,5, 11
Y	paragraphs [0008] - [0024], [0037], [0039] - [0044], [0047] - [0049], [0052] - [0054]	6-8, 12-16
Y	----- US 5 910 894 A (PRYOR TIMOTHY R [CA]) 8 June 1999 (1999-06-08) column 5, line 55 - column 9, line 63	6-8, 12-16
X	----- US 2008/149686 A1 (DANIEL JOSEPH A [US] ET AL) 26 June 2008 (2008-06-26)	1-5,11, 12
Y	paragraphs [0026] - [0028], [0035]; claim 12; figure 2	13-16
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 August 2014

Date of mailing of the international search report

04/09/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Prokopiou, Platon

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2014/000350

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2010/142858 A1 (KEMPPI OY [FI]; VALOLA JONNE [FI]; SAARIVIRTA HANNU [FI]; KUMPULAINEN) 16 December 2010 (2010-12-16) page 20, line 26 - page 23, line 2 page 24, line 8 - page 30, line 18 page 36, line 30 - page 44, line 8 page 46, line 25 - page 51, line 21 page 53, line 10 - page 55, line 33 -----	1-3,9-11
A	WO 2008/031052 A2 (ILLINOIS TOOL WORKS [US]; ALBRECHT BRUCE [US]) 13 March 2008 (2008-03-13) paragraph [0037] -----	12
A	Florian Echtler ET AL: "The Intelligent Welding Gun: Augmented Reality for Experimental Vehicle Construction", Virtual and Augmented Reality Applications in Manufacturing, 1 January 2003 (2003-01-01), XP055052781, Retrieved from the Internet: URL:http://www.springer.com [retrieved on 2013-02-08] pages 3-12 -----	1,9-11, 13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2014/000350

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011100214 A1	18-08-2011	CA 2784912 A1	18-08-2011
		EP 2533931 A1	19-12-2012
		US 2011198329 A1	18-08-2011
		US 2014076862 A1	20-03-2014
		WO 2011100214 A1	18-08-2011

US 5910894 A	08-06-1999	NONE	

US 2008149686 A1	26-06-2008	AU 2007338858 A1	03-07-2008
		BR PI0721005 A2	21-05-2013
		CA 2672717 A1	03-07-2008
		CN 101600532 A	09-12-2009
		EP 2094426 A1	02-09-2009
		RU 2009127710 A	27-01-2011
		US 2008149686 A1	26-06-2008
		WO 2008079165 A1	03-07-2008

WO 2010142858 A1	16-12-2010	EP 2440361 A1	18-04-2012
		FI 20095666 A	12-12-2010
		RU 2011153930 A	20-07-2013
		WO 2010142858 A1	16-12-2010

WO 2008031052 A2	13-03-2008	US 2008061049 A1	13-03-2008
		US 2014166633 A1	19-06-2014
		WO 2008031052 A2	13-03-2008
