

A&A Ref: 147696

PUBLICATION PARTICULARS AND ABSTRACT  
(Section 32(3)(a) - Regulations 22(1)(g) and 31)

21	01	PATENT APPLICATION NO	22	LODGING DATE	43	ACCEPTANCE DATE
----	----	-----------------------	----	--------------	----	-----------------

**2003/2138**

17 March 2003

23.6.04

51	INTERNATIONAL CLASSIFICATION	NOT FOR PUBLICATION
----	------------------------------	---------------------

**B21B, F16B**

CLASSIFIED BY: **ISA**

71	FULL NAME(S) OF APPLICANT(S)
----	------------------------------

**Tentec Limited**

72	FULL NAME(S) OF INVENTOR(S)
----	-----------------------------

**GETHINGS, Michael Shaun Brian**

EARLIEST PRIORITY CLAIMED	COUNTRY	NUMBER	DATE
	33 <b>GB</b>	31 <b>0022813.0</b>	32 <b>18 September 2000</b>

NOTE: The country must be indicated by its International Abbreviation - see schedule 4 of the Regulations

54	TITLE OF INVENTION
----	--------------------

**Fastening apparatus and method**

57	ABSTRACT (NOT MORE THAN 150 WORDS)
----	------------------------------------

NUMBER OF SHEETS <b>54</b>
----------------------------

The sheet(s) containing the abstract is/are attached.

If no classification is furnished, Form P.9 should accompany this form.  
The figure of the drawing to which the abstract refers is attached.



**FASTENING APPARATUS AND METHOD**

The invention relates to a fastening apparatus and method, and particularly to a hydraulic fastening apparatus comprising a hydraulic clamp nut and a method of using the same.

There are many applications where it is desired to fasten two units together. For example, in the steel industry, it is desired to locate a chock over each end of a roll and fasten the roll in position relative to the axis of the chocks. Conventionally, the roll is provided with a section of reduced diameter in the proximity of, but not at, each end thereof. Thus a head portion is provided at each end of the roll, which, in use, projects out of an end of a respective chock. A split ring is located and fixed around each reduced section, and acts between the head portion and respective chock, serving to fasten the roll in position relative to the chocks. The split rings in this application are generally heavy, as much as 16kg, and are usually manually applied to the roll. Such application is often awkward and difficult to achieve, and has health and safety implications. In addition, as location and removal of a split ring is achieved by applying a force thereto, damage to the roll, chock and/or split ring can occur.

According to a first aspect of the present invention there is provided a fastening apparatus adapted for use with an annular first article and a second article which locates within the first article such that a first end of the second article projects through and beyond a first end of the first article and a second end of the first article is located relative to the second article, the apparatus comprising a housing, a piston movably situated within the housing to allow at least one locating portion of the piston to be retained within the housing or to project through a

corresponding opening in the housing, pressure means provided within the housing to act on the piston, and at least one fastening member attached to the housing, such that in an operative position of the apparatus the housing is placed between the first end of the first article and the first end  
5 of the second article, and the pressure means acts between the piston, forcing the at least one locating portion of the piston into location with the first end of the first article, and the at least one fastening member, forcing the at least one fastening member into location with the first end  
10 of the second article such that the first end of the second article is forced away from the first end of the first article and, with location of the second end of the first article relative to the second article, the articles are fastened relative to each other.

The pressure means may comprise resilient means, or may comprise  
15 hydraulic means.

The pressure means may comprise resilient means and the apparatus may further comprise hydraulic means. The axial length of the fastening apparatus may change between an inoperative position and the operative  
20 position. The axial length of the fastening apparatus in the inoperative position may be larger than the distance between the first end of the first article and the first end of the second article, such that the housing may be accommodated therebetween but not the at least one fastening member. The axial length of the fastening apparatus in the operative position may  
25 be such that the housing and the at least one fastening member may be accommodated between the first end of the first article and the first end of the second article. The axial length of the fastening apparatus may be reduced between the inoperative and the operative positions, to allow the apparatus to be placed in the operative position. In the inoperative  
30 position, the or each locating portion of the piston may project through a

corresponding opening in the housing to locate against the first end of the first article. The axial length of the fastening apparatus may then be too large to also accommodate the or each fastening member between the first end of the first article and the first end of the second article. To reduce the axial length of the apparatus to allow it to be placed in the operative position, the piston may be forced against the resilient means using the hydraulic means, to withdraw the at least one locating portion at least partially into the housing. The axial length of the fastening apparatus may then be small enough to also allow location of the at least one fastening member between the first end of the first article and the first end of the second article. The force produced by the hydraulic means on the piston may be removed once the apparatus has been placed in the operative position. The resilient means may act alone to force the at least one locating portion of the piston into location with the first end of the first article, and the at least one fastening member into location with the first end of the second article. Fastening of the first and second articles relative to each other may be achieved and maintained by the pressure exerted by the resilient means.

The pressure means may comprise hydraulic means and the apparatus may further comprise resilient means. The hydraulic means may apply hydraulic pressure to the apparatus to place it in the operative position and to maintain it in this position. The hydraulic means may apply hydraulic pressure between the piston and the housing to force the at least one locating portion of the piston into location with the first end of the first article, and the at least one fastening member into location with the first end of the second article. Should the first article move away from the first end of the second article in use or the distance between the first and second articles otherwise increase, the force applied to the first and second articles by the hydraulic means may be partially or wholly lost,

which is obviously undesirable. The resilient means may then apply a force to the first and second articles. The resilient means may force the at least one locating portion of the piston into location with the first end of the first article, and the at least one fastening member into location  
5 with the first end of the second article. The resilient means may be provided between a body portion of the piston and the at least one locating portion to force the at least one locating portion into location with the first end of the first article. The resilient means may be compressed by operation of the hydraulic means in placing the apparatus in the operative  
10 position. The apparatus may further comprise a locking collar. This may be provided around the piston. This may be used to provide a mechanical lock, to help maintain the force between the first and second articles. The apparatus may further comprise resilient means acting between the housing and the or each locating portion of the piston. This may be used  
15 when deactivating the fastening apparatus, to force the or each locating portion away from the first article, thus, for example, enabling removal of the apparatus from the first article.

The resilient means may comprise one or more resilient members. The or  
20 each resilient member may comprise a spring, for example a disc spring or a die spring. One or more stacks of resilient members may be provided, for example sixteen or thirty two stacks of resilient members may be provided. When two or more stacks of resilient members are provided the stacks may be spaced around the housing. When two or  
25 more stacks of resilient members are provided the stacks may be spaced around the piston. The or each stack of resilient members may be located in the piston. The or each stack of resilient members may be located in a pocket in the piston. The or each stack of resilient members may be substantially aligned with a locating portion of the piston. The or each

stack of resilient members may be located around a part of a locating portion.

The hydraulic means may comprise at least one opening in the housing leading to at least one chamber provided between the piston and the housing. The opening may be used to introduce hydraulic fluid, for example grease, into the at least one chamber. The opening may also be used to remove the hydraulic fluid from the at least one chamber. The hydraulic means may comprise a pair of openings, a first opening thereof by which hydraulic fluid is introduced into the at least one chamber, and a second opening thereof by which hydraulic fluid is removed from the at least one chamber. The hydraulic means may comprise two or more pairs of openings. A first opening of each pair may be used to introduce hydraulic fluid into the at least one chamber and a second opening of each pair may be used to remove hydraulic fluid from the at least one chamber. In a preferred embodiment, only one pair of openings is used to introduce and remove hydraulic fluid, the other pair or pairs of openings being stopped. The openings may be stopped using blanking plugs. Which pair of openings is used may depend on the position thereof on the housing in use. When more than one chamber is provided, one or more channels may be provided, for example in the piston, to interconnect the chambers.

The housing may be at least partially hollow. The housing may comprise first and second side walls and an end wall. The or each opening of the housing may be provided in the end wall. The end wall may be provided with one or more internal shoulders. The housing may comprise a closure plate. The closure plate is preferably attached to the side walls, for example by one or more cap screws. The closure plate may provide an end wall of the housing. The pressure means may act on the or each fastening member via the closure plate.

The piston may be generally T-shaped in cross section. The piston may be provided with one or more shoulders. The or some of the shoulders of the piston may co-operate with the or some of the shoulders of the end wall of the housing. The piston may be provided with one or more stems.

5 The or each stem may be received in a recess provided in the piston. The or each stem may be fixedly or moveably connected to the piston. The or each stem may comprise a locating portion of the piston. The fastening apparatus may be provided with one or more plungers. The or each plunger may comprise a locating portion of the piston. The or each

10 plunger may abut the piston. The or each plunger may be received in a recess provided in the piston. The or each plunger may be fixedly or moveably connected to the piston. The or each plunger may be connected to the stem of the piston.

15 One or more seals may be located in the housing. One or more seals may be located between the piston and the housing. One or more seals may be located between the or some of the shoulders of the piston and the or some of the shoulders of the end wall of the housing. The or each seal may be annular in shape. The or each seal may be an o-ring type seal.

20

The at least one fastening member may comprise an arcuate plate. The or each or some of the fastening members may be pivotably attached to the housing, to allow movement thereof between an open position where the or each fastening member does not locate with the second article, and a

25 closed position where the or each fastening member locates with the second article. The or each fastening member may be provided with locating means to locate the member in the open position and/or in the closed position. The locating means may comprise one or more spring loaded pins.

The fastening apparatus preferably locates on the annular first article. The fastening apparatus may be provided with locating means to locate on the first article. The locating means may comprise a rim, which may be provided on the housing. The rim may be provided with one or more  
5 pins, which may locate the fastening apparatus to the first article. The locating means may locate with a corresponding rim provided on the first article. The locating means may locate with a corresponding recess provided by the first article.

10 One fastening apparatus may be placed between the first and second articles to fasten the articles relative to each other. Alternatively, two or more fastening apparatus may be placed between the first and second articles to fasten the articles relative to each other. The two or more fastening apparatus may be substantially equi-angularly spaced around the  
15 annular first article.

In preferred embodiments, one fastening apparatus is placed between the first and second articles, which fastening apparatus is substantially annular in shape. The fastening apparatus may comprise an annular  
20 housing, which may locate on the annular first article. The housing may contain an annular piston. The piston may be provided with one locating portion which may be substantially annular in shape projecting through an annular opening in the housing. The piston may be substantially annular in shape, and a number of locating portions provided at substantially  
25 regular intervals around the piston. The locating portions may form or be connected to an annular stem of the piston. The resilient means may comprise one or more resilient members which may be substantially annular in shape. A stack of annular resilient members may be located within the annular piston. Preferably, a number of stacks of resilient  
30 members are provided, at substantially regular intervals around the piston,

preferably corresponding with the positions of the locating portions. The stacks of resilient members may be located in pockets in the annular piston, or around a part of the locating portions of the piston. The annular fastening apparatus preferably comprises two fastening members,  
5 each in the shape of an arcuate plate.

The fastening apparatus may be particularly adapted for fastening a roll relative to a chock.

10 According to a second aspect of the present invention there is provided a method of fastening a first article relative to a second article using one or more fastening apparatus of the first aspect of the invention.

When the pressure means comprises resilient means and the apparatus  
15 further comprises hydraulic means, the method may comprise the steps of locating the at least one fastening apparatus on the first article such that the housing but not the at least one fastening member is accommodated between the first end of the first article and the first end of the second article, and the at least one locating portion locates against the first end of  
20 the first article, applying hydraulic pressure to the apparatus via the hydraulic means to force the piston against the or each resilient member to withdraw the at least one locating portion at least partially into the housing away from the first end of the first article, moving the apparatus axially towards the first end of the first article, placing the at least one  
25 fastening member in the closed position where it locates with the second article, releasing the hydraulic pressure thereby allowing the resilient means to force the at least one locating portion into location with the first end of the first article and the at least one fastening member into location with the first end of the second article such that the first end of the second  
30 article is forced away from the first end of the first article and, with

location of the second end of the first article relative to the second article, the articles are fastened relative to each other.

When the pressure means comprises hydraulic means and the apparatus  
5 further comprises resilient means, the method may comprise the steps of  
locating the at least one fastening apparatus on the first article such that it  
is accommodated between the first end of the first article and the first end  
of the second article, placing the at least one fastening member in the  
closed position where it locates with the second article, applying  
10 hydraulic pressure to the apparatus via the hydraulic means to force the at  
least one locating portion into location with the first end of the first  
article and the at least one fastening member into location with the first  
end of the second article such that the first end of the second article is  
forced away from the first end of the first article and, with location of the  
15 second end of the first article relative to the second article, the articles  
are fastened relative to each other. This compresses the resilient means  
which, should the first article move away from the first end of the second  
article, will force the at least one locating portion into location with the  
first end of the first article and the at least one fastening member into  
20 location with the first end of the second article, thus maintaining at least a  
proportion of the force between the two articles.

According to a third aspect of the present invention there is provided a  
fastening apparatus adapted for use with an annular first article and a  
25 second article which locates within the first article such that a first end of  
the second article projects through and beyond a first end of the first  
article and a second end of the first article is located relative to the  
second article, the apparatus comprising a housing, a piston movably  
situated within the housing to allow at least one locating portion of the  
30 piston to be retained within the housing or to project through a

corresponding opening in the housing, at least one resilient member located within the housing to act on the piston, and at least one fastening member attached to the housing, such that in an operative position of the apparatus the housing is placed between the first end of the first article and the first end of the second article, and the or each resilient member acts between the piston, forcing the at least one locating portion of the piston into location with the first end of the first article, and the at least one fastening member, forcing the fastening member into location with the first end of the second article such that the first end of the second article is forced away from the first end of the first article and, with location of the second end of the first article relative to the second article, the articles are fastened relative to each other.

According to a fourth aspect of the present invention there is provided a fastening apparatus adapted for use with an annular first article and a second article which locates within the first article such that a first end of the second article projects through and beyond a first end of the first article and a second end of the first article is located relative to the second article, the apparatus comprising a housing, a piston movably situated within the housing to allow at least one locating portion of the piston to be retained within the housing or to project through a corresponding opening in the housing, hydraulic means located within the housing to act on the piston, and at least one fastening member attached to the housing, such that in an operative position of the apparatus the housing is placed between the first end of the first article and the first end of the second article, and the hydraulic means acts between the piston, forcing the at least one locating portion of the piston into location with the first end of the first article, and the at least one fastening member, forcing the fastening member into location with the first end of the second article such that the first end of the second article is forced away from the

first end of the first article and, with location of the second end of the first article relative to the second article, the articles are fastened relative to each other.

5 Embodiments of the invention will now be described by way of example only, with reference to the accompanying drawings, in which:

10 **Figure 1** is a composite cross sectional view of a first embodiment of a fastening apparatus according to the invention, shown in an inoperative position, and first and second articles to be fastened;

**Figure 2** is a schematic end view of the fastening apparatus of Figure 1;

15 **Figure 3** is a composite cross sectional view of the fastening apparatus of Figures 1 and 2 and the first and second articles, the fastening apparatus being shown in a position intermediate the positions of Figures 1 and 4;

20 **Figure 4** is a composite cross sectional view of the fastening apparatus of Figures 1 to 3 and the first and second articles, the fastening apparatus being shown in an operative position;

25 **Figure 5** is a cross sectional view of a second embodiment of a fastening apparatus according to the invention, shown in an operative position, and first and second articles to be fastened, and

**Figure 6** is a schematic end view of the fastening apparatus of Figure 5.

With reference to Figure 1, the fastening apparatus 1 comprises an annular housing 2 which is substantially hollow and which comprises an outer circumferential side wall 3, an inner circumferential side wall 4 and an axially inner radial end wall 5. An axially outer radial end wall is provided for the annular body by a closure plate 6, attached to the two side walls by cap screws (not shown). The axially inner end wall 5 is provided with internal annular shoulders 7. Annular o-ring seals 8 are seated on the shoulders 7. An annular recess 9 is provided between the shoulders. An annular piston 10 is located within the housing 2 of the fastening apparatus. The piston is generally T-shaped in cross section, and is provided with annular shoulders 11, and an annular stem 12 between the shoulders. Annular o-ring seals 13 are seated against the shoulders 11.

At sixteen positions around the annular housing 2 (see Figure 2) a number of additional features are provided in the fastening apparatus. At each position, a hole 14 (Figure 1) is provided in the axially radial inner end wall 5, the hole being of the same diameter and co-operating with the recess 9. A locating portion of the piston in the form of a plunger 15 is located in the hole, the plunger being smeared with grease and forming a sliding fit within the hole. The plunger abuts the stem 12 of the piston. In the inoperative position of the fastening apparatus, the plunger 15 extends through the hole 14, and beyond the inner surface of the axially inner radial end wall 5 of the housing 2. A pocket 16 is provided in the annular housing opening to the piston at each of the sixteen positions and a stack of six disc springs 16' is located in the pocket. The springs 16', in their relaxed state, are of such size as to protrude from the pocket away from the piston. When the closure plate 6 is screwed onto the housing the springs are tensioned and act on the piston to urge the piston 10 towards the axially inner wall 5 of the housing 2, causing the plunger 15 to extend through the hole 14 and beyond the housing 2.

Hydraulic means 17 is provided as follows. At two of the positions an opening 17' is provided in the side wall 3 of the housing 2. The openings 17' co-operate with a first annular chamber 18 provided between the piston 10 and the axially inner radial end wall 5 of the body 2. Channels (not shown) are provided in the piston connecting the first annular chamber to a second annular chamber 19 provided between the piston 10 and the axially inner radial end wall 5. One opening 17' is used to introduce hydraulic fluid into the chambers, and one opening is used to remove hydraulic fluid from the chambers.

The fastening apparatus further comprises a pair of fastening arms 20. Each arm comprises an arcuate plate, and is pivotably attached to the closure plate 6 by a pin 21 (Figure 2) such that they can be moved from an open position shown in Figures 1 and 3, and in broken lines in Figure 2, to a closed position shown in full lines in Figures 2 and 4. The fastening arms 20 are fixed in the open position by location of spring loaded pins 40 in holes 41 (Figure 2). To place them in the closed position, the pins are removed from holes 41, allowing the arms to swing into the closed position and be fixed there by location of the pins in holes 42. The axially inner radial end wall 5 of the housing 2 of the fastening apparatus is provided with an annular rim 22 in which one or more pins 23 are accommodated.

Referring to Figures 1, 3 and 4 operation of the fastening apparatus will now be described. The fastening apparatus is used to fasten together a roll 30 relative to a cylindrical chock 31. The fastening apparatus is placed between a first end of the roll and a first end of the chock. The second end of the chock is located relative to the roll, by abutment against a shoulder (not shown) provided on the roll. The second end of the roll may be fastened to a second chock, by a fastening apparatus as herein described. The chock shown comprises a cylindrical bearing follower 32,

which is provided with an end portion 33 of reduced diameter. The end portion is provided with a rim 34. The rim 22 of the axially inner radial end wall 5 of the fastening apparatus is located over the end portion 33 and the pins 23 locate behind the rim 34 of the bearing follower to prevent inadvertent removal of the fastening apparatus from the bearing follower. The fastening apparatus is movably attached to the bearing follower by location of the rims such that the fastening apparatus is held securely to the bearing follower but can be moved axially with respect thereto. As will be appreciated, the fastening apparatus can remain in place on the bearing follower, there is no need to remove the apparatus therefrom to disengage the chock from the roll.

The first end of the roll 30 comprises a neck portion 35 of reduced diameter and a head portion 36. To fasten the roll to the chock, the first end thereof is inserted through the aperture in the chock such that the neck portion 35 is surrounded by the fastening apparatus and the head portion 36 extends beyond the closure plate 6 of the fastening apparatus, as shown in Figure 1. The roll is of similar diameter to the bearing follower 32 and is a sliding fit within the bearing follower. The axial length of the fastening apparatus (excluding the annular rim 22) in the inoperative position shown in Figure 1, typically approximately 61mm, is larger than the axial length of the neck portion 35 of the roll. In this position the fastening arms 20 extend beyond the neck portion 35 as shown in Figure 1, and are located out of contact with the head portion 36 of the roll as shown in Figure 2.

To activate the fastening apparatus the hydraulic means 17 introduces grease from a grease gun, via one of the openings 17', into the first annular chamber 18 and, from there via the channels in the piston 10, into the second annular chamber 19. Introduction of fluid into these chambers

causes the piston 10 to be forced away from the axially inner radial end wall 5 of the housing 2, against the force of the stacks of disc springs 16'. This, in turn, causes the plungers 15 to be retracted to protrude only slightly from the axially inner radial end wall 5 of the housing 2 of the fastening apparatus. This leaves an annular gap 37 between the axially inner radial end wall 5 and the end portion 33 of the bearing follower, as shown in Figure 1. The axial length of the fastening apparatus (again excluding the annular rim 22) is thus reduced, typically to approximately 59.5mm, to be smaller than the axial length of the neck portion 35 of the roll. The fastening apparatus is then moved axially along the bearing follower 32, such that the plungers 15 abut the bearing follower. The fastening arms 20 may now be accommodated within the axial length of the neck portion 35, and are swung in an anti-clockwise and a clockwise direction respectively to each engage and surround a semicircular section of the neck portion 35 of the roll (Figure 4). The fastening arms are fixed in this position by location of spring loaded pins 40 in holes 42 and operation of the C-clip 43 (Figure 2). The hydraulic fluid is then removed from the chambers 18,19. The stacks of disc springs 16' act to push the plungers 15, via the piston 10, into engagement with the end portion 33 of the bearing follower, and to push the fastening arms 20, via the closure plate 6, into engagement with the axially inner surface of the roll head portion 36. When in this operative position, the axial length of the fastening apparatus (again excluding the annular rim 22) is typically 60mm, the plungers 15 protrude slightly from the axially inner radial end wall 5 and the piston is not in contact with the end wall 5, as shown. Typically, approximately a 2 tonne force is generated by the fastening apparatus. As the second end of the chock is located against a shoulder of the roll, forcing the first end of the roll away from the first end of the chock fastens the roll and chock relative to each other.

To unfasten the roll relative to the chock, the fastening apparatus is deactivated as follows. Hydraulic fluid is again introduced into the chambers 18, 19, forcing the piston 10 away from the axially inner radial end wall 5 against the force of the stacks of disc springs 16'. This again  
5 causes the plungers 15 to be retracted within the holes 14 of the wall 5, and an annular gap to be provided between the wall 5 and the end portion 33 of the bearing follower. The fastening apparatus is moved axially towards the end portion 33, and the fastening members 20 can then be released and moved out of contact with head portion 36 of the roll. The  
10 hydraulic fluid is then removed from the chambers.

The chock further comprises a bearing, which, in use, may heat up and expand. As the second end of the chock is located against the shoulder of the roll, this end cannot move and, as a result of the expansion of the  
15 bearing, the first end of the bearing follower will be caused to move axially outwards towards the first end of the roll. It is desirable to limit this movement, to for example 0.3 to 0.9mm, as otherwise the chock and the bearing follower thereof will get out of position with respect to the roll, causing the follower to wear. In the present invention, the fastening  
20 apparatus when in the operative position applies an approximately 2 tonne force between the bearing follower and the roll. When the bearing follower heats up it can overcome this force, and will push against the plungers 15 which will, in turn, push the piston 10 against the force of the stacks of disc springs 16'. This will cause the piston to move axially  
25 outwards towards the closure plate 6. The piston will continue to move until the disc springs 16' are fully compressed against the closure plate, at which point no more expansion of the bearing follower will be accommodated. The fastening apparatus is designed such that when in the operative position before any heating of the bearing follower, the distance between the axially outer end of the  
30 piston 10 and closure plate 6 is approximately 0.5mm. The maximum

expansion of the bearing follower which will be accommodated is therefore 0.5mm. The abutment of the piston on the closure plate provides a positive stop for the bearing follower. The bearing follower will be provided with a manufacturer's maximum expansion tolerance, the maximum expansion accommodated by the fastening apparatus should be less than or equal to this tolerance.

When the bearing cools down it will contract. The plungers will then be able to move out of and away from the housing under the influence of the stacks of disc springs, and will exert a force on the bearing follower to push it back to its desired axial location.

Figures 5 and 6 show a second embodiment of the fastening apparatus. This is designed such that it may become at least semi-permanently attached to a chock, thus minimising the need for using cranes to fit the apparatus to the chock. The apparatus comprises an annular housing 50 which is partially hollow and which comprises an outer circumferential side wall 51, an inner circumferential side wall 52 and an axially inner radial end wall 53. An axially outer radial end wall is provided for the annular body by a closure cap 54, attached to the two side walls by cap screws 55. The axially inner end wall 53 is provided with internal annular shoulders 56. An annular recess 57 is provided between the shoulders. An annular piston 58 is located within the housing 50 of the fastening apparatus. The piston is generally T-shaped in cross section, and is provided with annular shoulders 59. Annular o-ring seals 60 are seated against the shoulders 59.

At thirty-two positions around the annular housing 50 (see Figure 6) a number of additional features are provided in the fastening apparatus. At each position, a hole 61 (Figure 5) is provided in the axially radial inner

end wall 53, the hole co-operating with the recess 57. The piston comprises a locating portion in the form of a stem 62 movably received in a recess 63 provided in the body of the piston. The stem locates in the hole 61 and forms a sliding fit within the hole. The stem comprises a  
5 first cylindrical part 64 and a second cylindrical part 65 connected together by a plate 66. A stack of disc springs 67 is located around the part 64 between the body of the piston and the plate 66. The springs when tensioned will act to urge the stem 62 towards the axially inner radial end wall 53 of the housing 50, causing it to extend through the hole  
10 61 and beyond the housing. A die spring 68 is located around the second cylindrical part 65 of the stem and acts between the plate 66 and the axial inner radial end wall 53 of the housing to urge the stem away from this wall towards the body of the piston.

15 The hydraulic means 69 of the apparatus comprises an opening 69' (Figure 6), adapted for the attachment thereto of a grease gun, which opening co-operates with an annular chamber 70 (Figure 5) provided between the piston 58 and the closure cap 54.

20 The fastening apparatus further comprises a pair of fastening arms 71 (Figure 6). Each arm comprises an arcuate plate, and is pivotably attached to the closure cap 54 by a pin 72 such that it can be moved from an open position to a closed position as shown. The fastening arms are fixed in the open position by location of spring loaded index pins (not  
25 shown) in holes in the housing. To place them in the closed position, the pins are removed from the holes, allowing the arms to swing into the closed position, in which they are fixed by location of the pins in further holes in the housing and a captive washer 73. The outer circumferential side wall 51 of the housing 50 of the fastening apparatus is provided with

an annular rim 74 in which one or more pins (not shown) are accommodated.

The operation of the fastening apparatus will now be described. The fastening apparatus is used to fasten together a roll 75 relative to a cylindrical chock 76. The fastening apparatus is placed between a first end of the roll and a first end of the chock. The second end of the chock is located relative to the roll, by abutment against a shoulder (not shown) provided on the roll. The second end of the roll may be fastened to a second chock, by a fastening apparatus as herein described. The fastening apparatus is first attached to the chock. The chock comprises a cylindrical bearing follower 77, which is provided with a spacer plate 78 bolted onto the chock (which requires little or no modification thereto). The spacer plate is provided with a recess 79. The rim 74 of the outer circumferential side wall 51 of the fastening apparatus is located in the recess 79. This allows rotation of the fastening apparatus relative to the chock and a certain amount of axial movement between the apparatus and the chock, but prevents inadvertent removal of the fastening apparatus from the chock. As will be appreciated, the fastening apparatus can remain in place on the chock, there is no need to remove the apparatus therefrom to disengage the chock from the roll.

The first end of the roll 75 comprises a neck portion 80 of reduced diameter and a head portion 81. To fasten the roll to the chock, the fastening arms 71 of the fastening apparatus are first placed and held in the open position. The first end of the roll is then inserted through the aperture in the chock such that the neck portion 80 is surrounded by the fastening apparatus and the head portion 81 extends beyond the closure cap 54 of the fastening apparatus, as shown in Figure 5. The roll is of similar diameter to the bearing follower 77 and is a sliding fit within the

bearing follower. The axial length of the fastening apparatus in this embodiment is of such size that the apparatus can be located between the bearing follower 77 and the head portion 81 of the roll. The fastening arms 71 are then placed and fixed in the closed position in which they  
5 locate around the neck portion 80 of the roll.

To activate the fastening apparatus grease from a grease gun is introduced, via opening 69', into the annular chamber 70. Introduction of grease into this chamber provides a hydraulic pressure which causes the  
10 piston 58 to be forced away from the closure cap 54, forcing the stems 62 of the piston against the outer axial face of the bearing follower 77 and causing the stacks of disc springs 67 and the die springs 68 to compress. Sufficient hydraulic pressure is applied to the apparatus to achieve the design force of the apparatus, which in this embodiment is 50 tonnes  
15 force. A threaded locking collar 82 provided around the piston is then rotated into an operative position, and serves as a mechanical lock to provide additional securing of the position of the piston. The grease gun is then removed. The hydraulic pressure is maintained in the apparatus, and acts to push the stems 62 into engagement with the bearing follower  
20 77, and to push the fastening arms 71, via the closure plate 54, into engagement with the axially inner surface of the roll head portion 81. As the second end of the chock is located against a shoulder of the roll, forcing the first end of the roll away from the first end of the chock fastens the roll and chock relative to each other. The fastening apparatus  
25 is designed to be capable of resisting an overload force of, for example, 100 to 200 tonnes force which may occur during use of the roll/chock assembly.

To unfasten the roll relative to the chock, the fastening apparatus is de-  
30 activated as follows. Grease is introduced into the chamber 70 to achieve

a slight increase in the hydraulic pressure to allow the locking collar 82 to be rotated into an inoperative position. The hydraulic pressure is released by releasing the grease from the chamber 70 by removal of a blanking plug from a hole 83 (Figure 6) in the apparatus housing. This allows the stems 62 of the piston to retract, away from the bearing follower 77. Such movement is aided by de-compression of the die springs 68. Release of the hydraulic pressure also allows de-compression of the stacks of disc springs 67, removing all force from the apparatus. The fastening arms 71 are then placed and held in the open position, and the roll can be removed from the chock and fastening apparatus.

When in use, the chock may move away from the fastening apparatus (for example by approximately 0.5 to 1mm), or the distance between the first end of the chock and the roll may increase due to wear. This may cause at least a partial loss of the force applied by the fastening apparatus to the roll and the chock. However, as the stacks of disc springs 67 are compressed on application of the hydraulic pressure, should the chock move in this way etc., the springs 67 will act to force the stems 62 away from the body of the piston 68 and towards and into engagement with the bearing follower 77 of the chock. Thus the disc springs apply a force to the roll and the chock, i.e. a live load is provided by the disc springs. A proportion of the original force applied to the chock and the roll by the hydraulic means is maintained by the disc springs.

## CLAIMS:

1. A fastening apparatus for axially urging the cylindrical bearing of an annular chock into a retained position on a roll at which position a first end of the roll projects through and beyond a first end of the chock, said apparatus comprising:

an annular housing configured and dimensioned to be axially received on the first  
5 end of the roll at a location adjacent to the first end of the chock;

an annular piston axially shiftable within said housing;

a plurality of circumferentially spaced locating members positioned between said  
piston and said chock and projecting through corresponding openings in said housing;

fastening means engageable with the first end of said roll for resisting axial  
10 movement of said housing away from said chock; and

pressure means acting on said piston for axially urging said locating members  
against said bearing.

2. A fastening apparatus according to claim 1 wherein the pressure means  
15 comprises resilient means.

3. A fastening apparatus according to claim 1 wherein the pressure means  
comprises hydraulic means.

20 4. A fastening apparatus according to claim 2 wherein the pressure means

further comprises hydraulic means.

5. A fastening apparatus according to claim 4 wherein the axial length of the fastening apparatus changes between an axially unconfined inoperative position and an operative position axially confined between said bearing and said fastening means.

6. A fastening apparatus according to claim 5 characterised in that the axial length of the fastening apparatus in the inoperative position is larger than the distance between the bearing and the fastening means engaged with the first end of the roll, such that the housing may be accommodated therebetween but not the projecting locating members.

7. A fastening apparatus according to claim 5 wherein the axial length of the fastening apparatus in the operative position is such that the housing and the projecting locating members can be accommodated between the bearing and the fastening means engaged with the first end of the roll.

8. A fastening apparatus according to claim 5 wherein the axial length of the fastening apparatus is reduced between the inoperative and the operative positions, to allow the apparatus to be placed in the operative position.

9. A fastening apparatus according to claim 8 wherein said fastening means

comprises a resilient means, and wherein the piston is forced against said resilient means by hydraulic means, to withdraw the locating members at least partially into the housing to reduce the axial length of the apparatus to allow it to be placed in the operative position.

5

10. A fastening apparatus according to claim 9 wherein the force produced by the hydraulic means on the piston is removed once the apparatus has been placed in the operative position, and the resilient means acts alone to force the locating members of the piston into location with the bearing and the fastening means into  
10 location with the first end of the roll.

11. A fastening apparatus according to claim 3 wherein the pressure means further comprises resilient means.

15

12. A fastening apparatus according to claim 11 wherein the hydraulic means applies hydraulic pressure to the apparatus to place it in the operative position and to maintain it in this position.

20

13. A fastening apparatus according to claim 12 wherein the hydraulic means applies hydraulic pressure between the piston and the housing to force the locating members against the bearing, and the fastening means into location with the first end of the roll.

14. A fastening apparatus according to claim 11 wherein the resilient means applies a force to the bearing and the roll, should the bearing move away from the first end of the roll in use and the force applied by the hydraulic means is partially or wholly lost.

5

15. A fastening apparatus according to claim 14 wherein the resilient means is provided between a body portion of the piston and the locating members to force the locating members against the bearing.

10

16. A fastening apparatus according to claim 15 wherein the resilient means is compressed by operation of the hydraulic means in placing the apparatus in the operative position.

15

17. A fastening apparatus according to claim 11 wherein the fastening means comprises a locking collar.

18. A fastening apparatus for axially urging a cylindrical bearing into a retained position on a roll at which retained position an end of the roll projects through and beyond an end of the bearing, said apparatus comprising:

20

an annular housing configured and dimensioned to be axially mounted on the roll end at a location adjacent to the end of the bearing;

fastening means for engaging an abutment on the roll end in a manner resisting

axial movement of said housing away from the bearing;

an annular piston axially shiftable within said housing;

a plurality of spring members acting on said piston at circumferentially spaced locations around said housing, said spring members serving to exert resilient forces

5 urging said housing against said abutment and acting via said piston to urge said bearing into said retained position; and


fluid pressure means acting on said piston to relieve said resilient forces and thereby accommodate mounting on and removal of said fastening apparatus from the roll end.

10


19. A fastening apparatus according to claim 1 or claim 18, substantially as herein described and illustrated.

20. A new fastening apparatus, substantially as herein described.




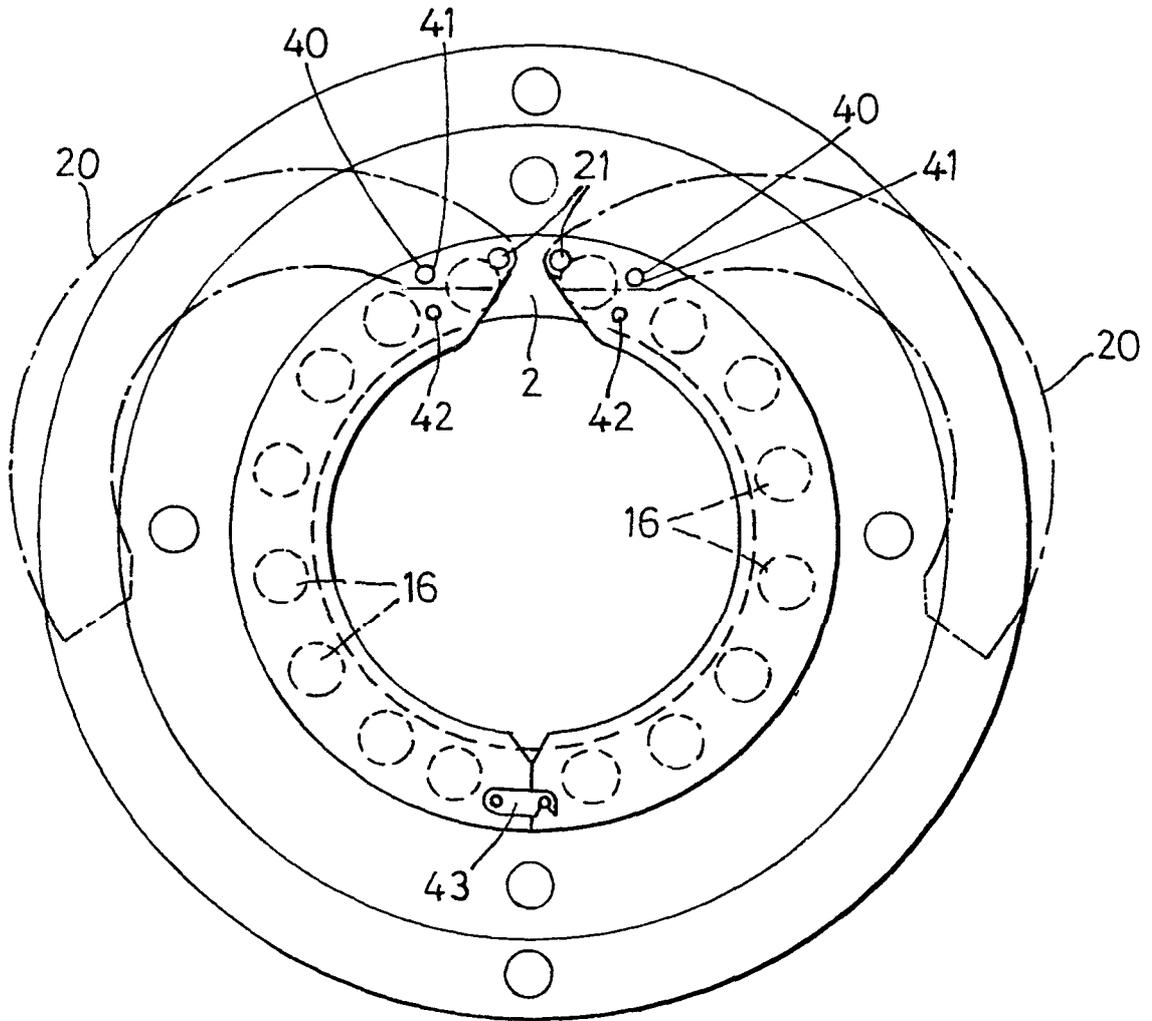

**Fig.2**

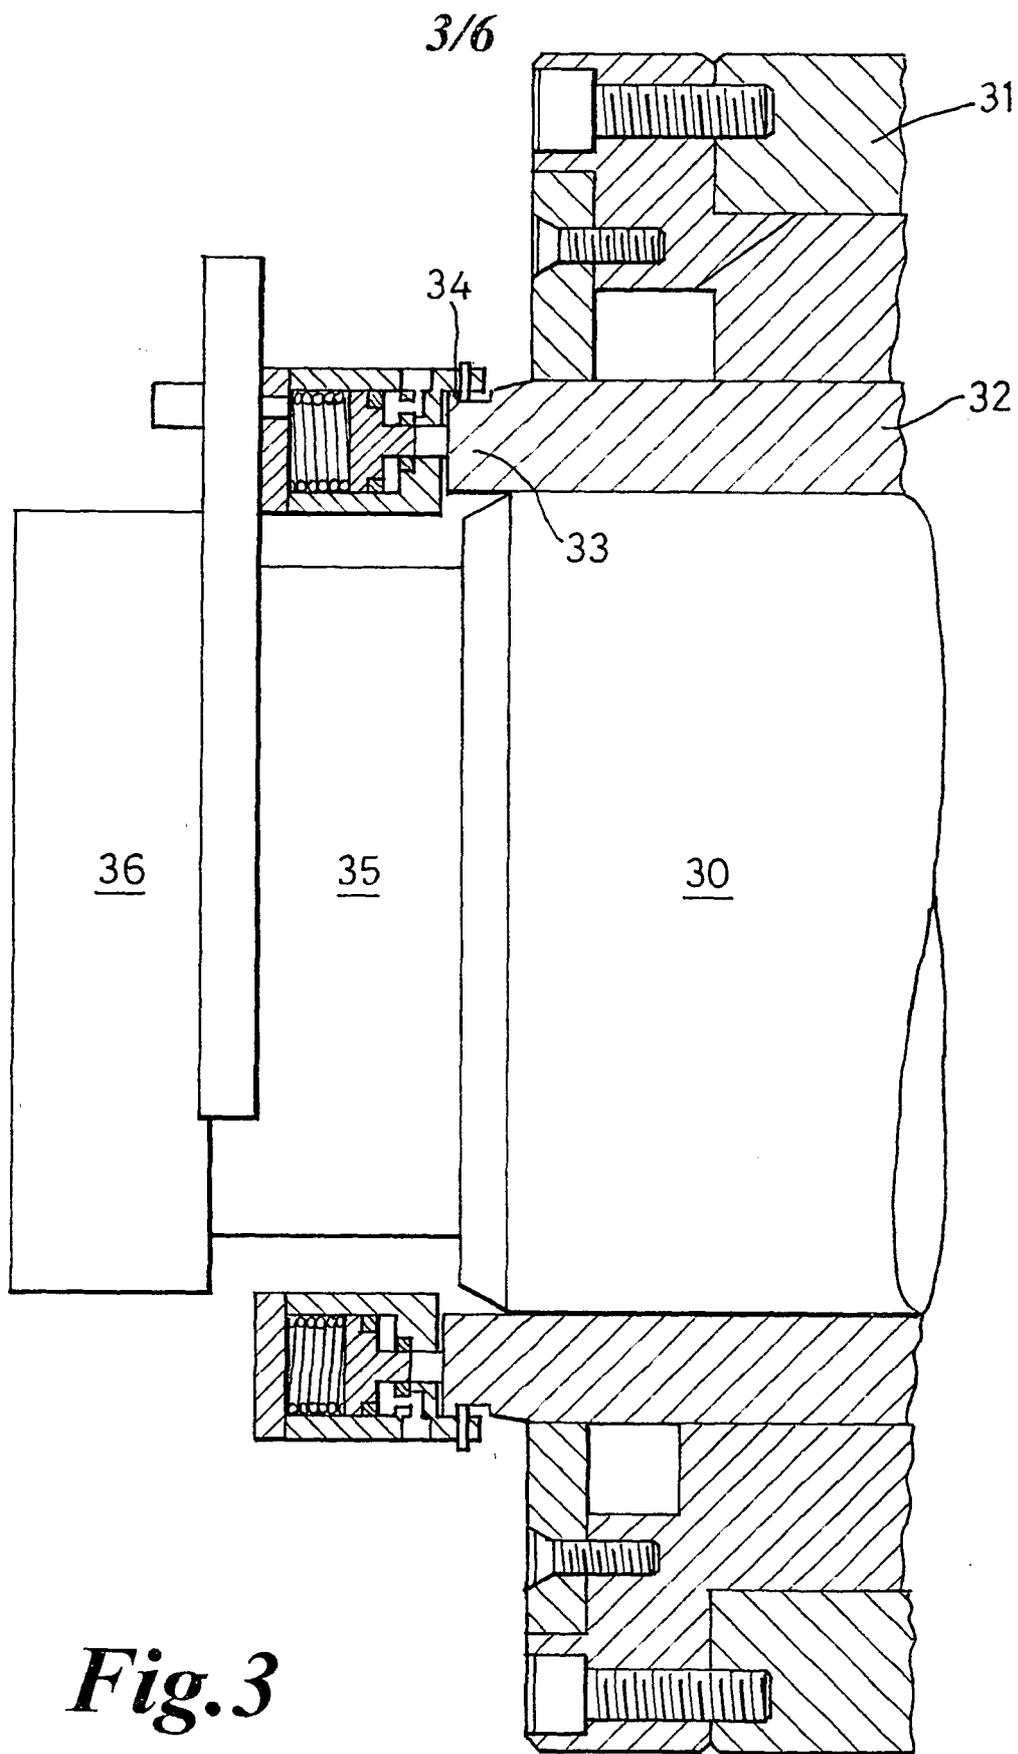


*Fig. 3*

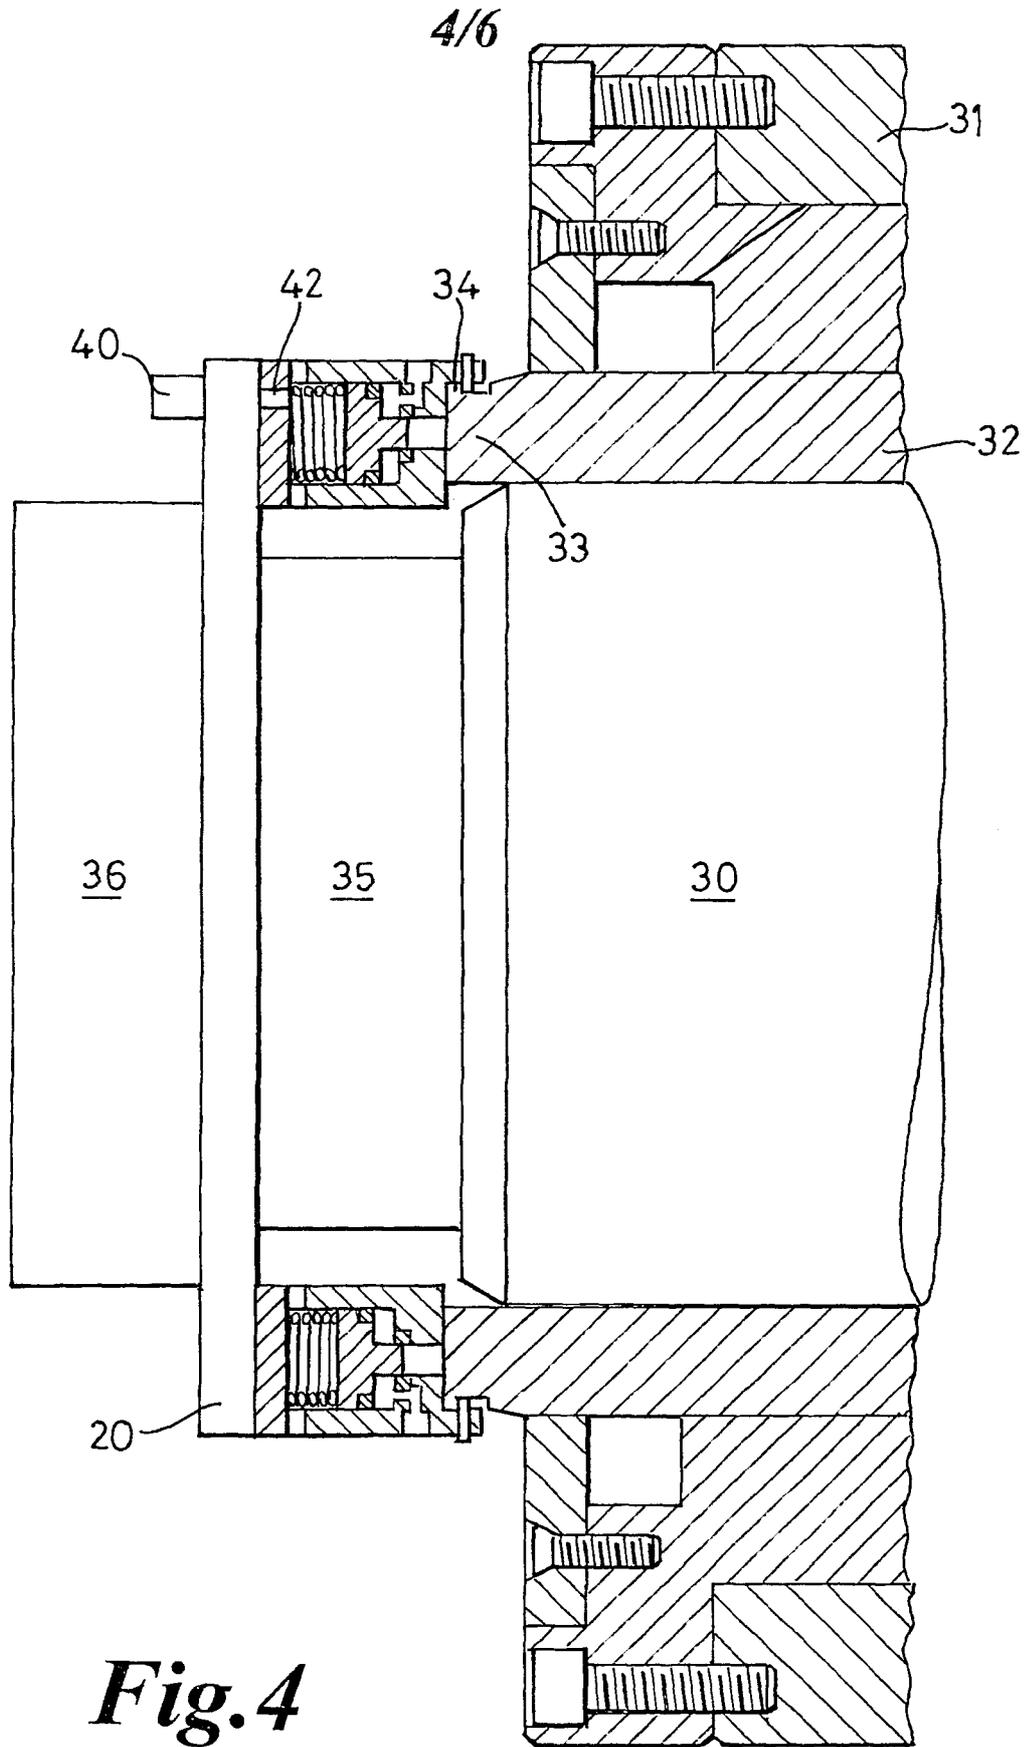


*Fig. 4*

5/6

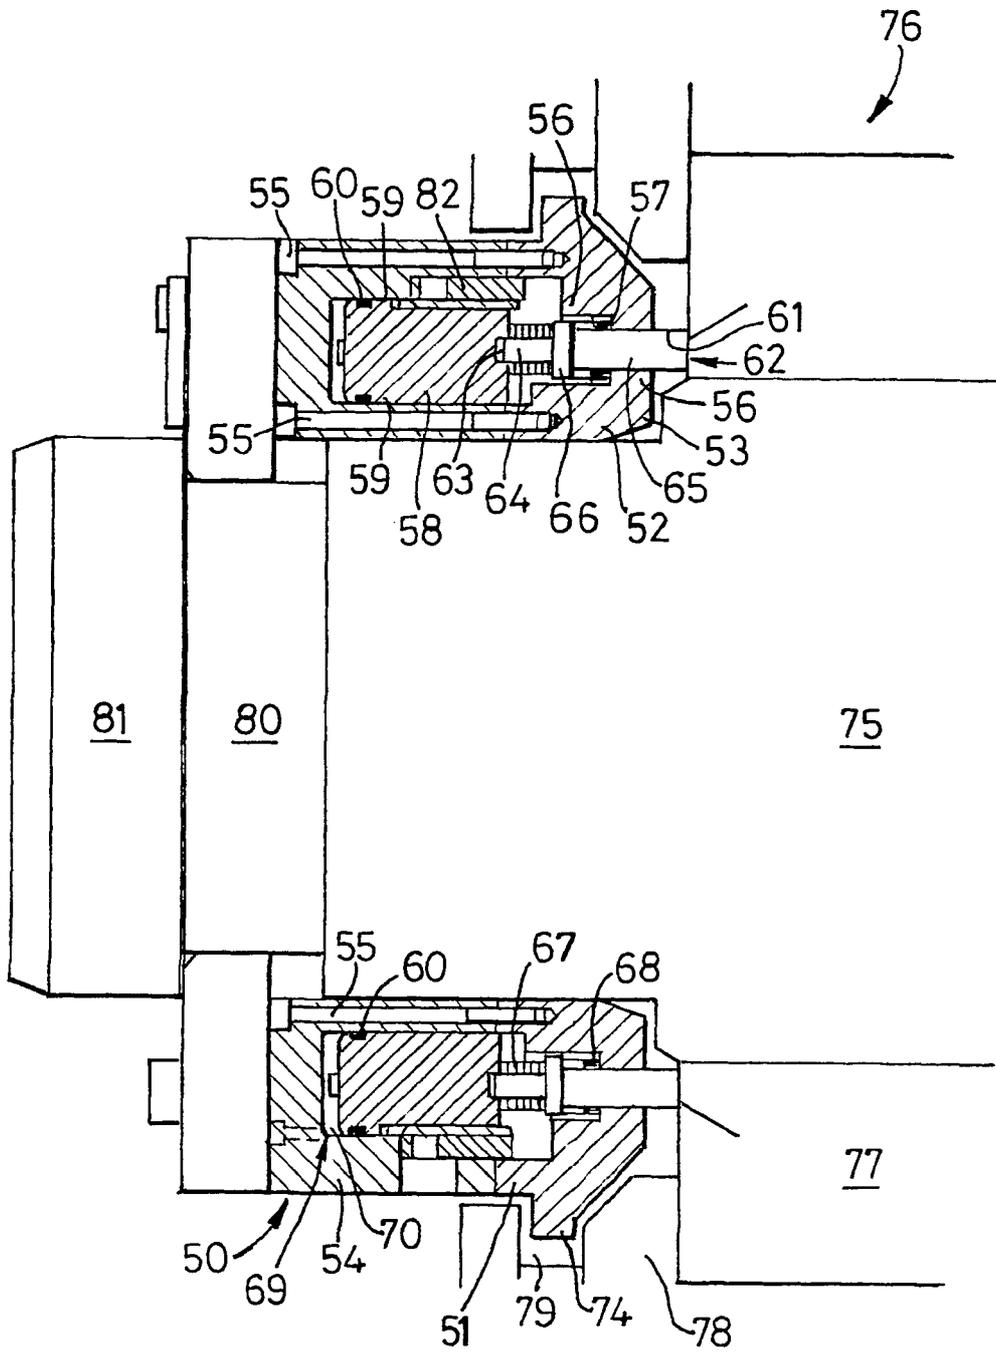

*Fig.5*

6/6

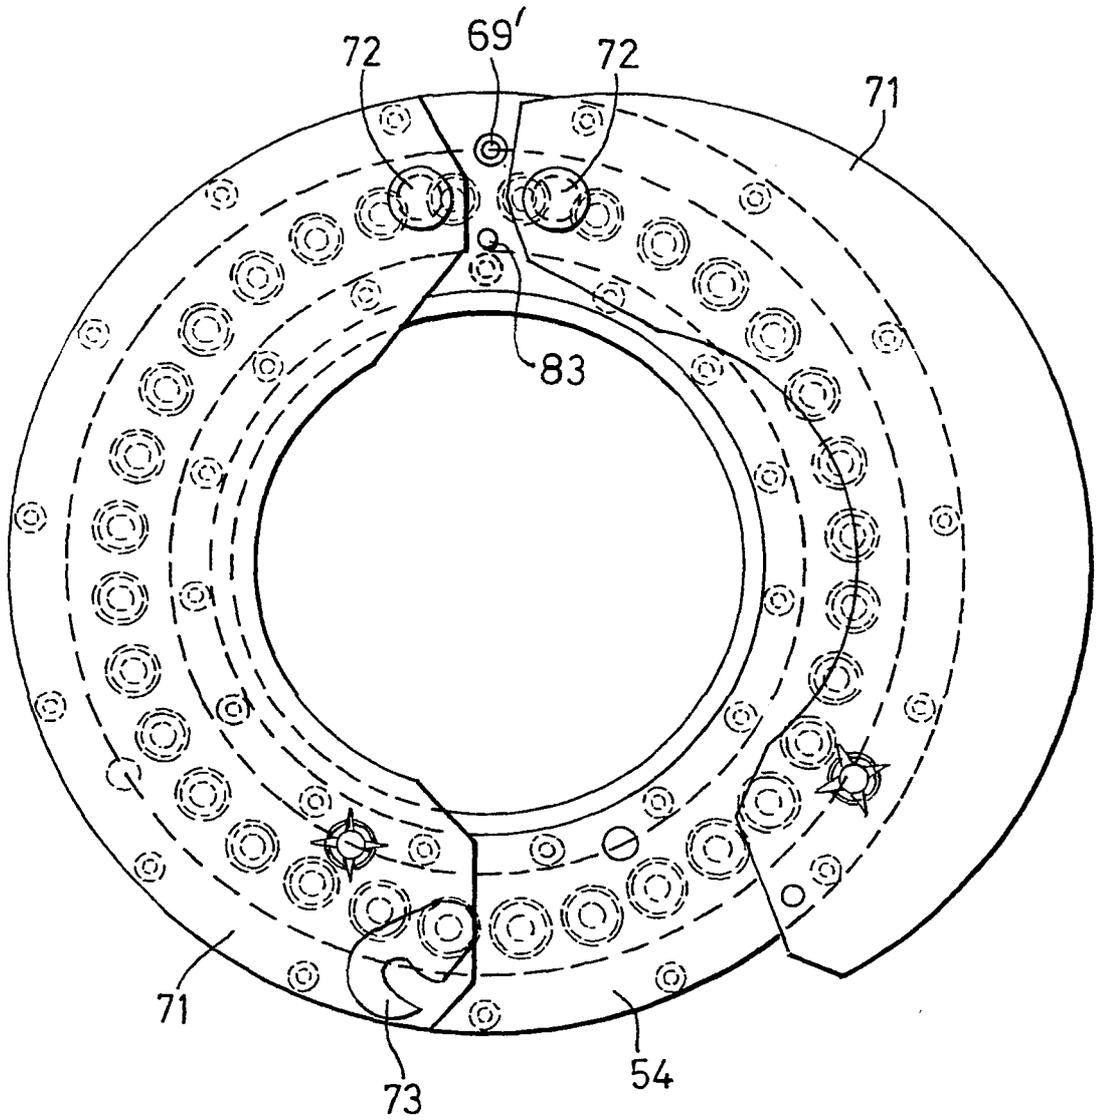

**Fig. 6**