



(22) Date de dépôt/Filing Date: 1997/12/02

(41) Mise à la disp. pub./Open to Public Insp.: 1998/08/21

(45) Date de délivrance/Issue Date: 2002/11/19

(30) Priorité/Priority: 1997/02/21 (08/804,442) US

(51) Cl.Int.⁶/Int.Cl.⁶ B60R 21/26


(72) Inventeurs/Inventors:
HALAS, Jonathan P., US;
HORTON, Mark C., US;
SPANGLER, Mark, US

(73) Propriétaire/Owner:
BREED AUTOMOTIVE TECHNOLOGY, INC., US

(74) Agent: SIM & MCBURNEY

(54) Titre : GONFLEUR HYBRIDE POUR SAC GONFLABLE

(54) Title: HYBRID INFLATOR FOR AIRBAGS

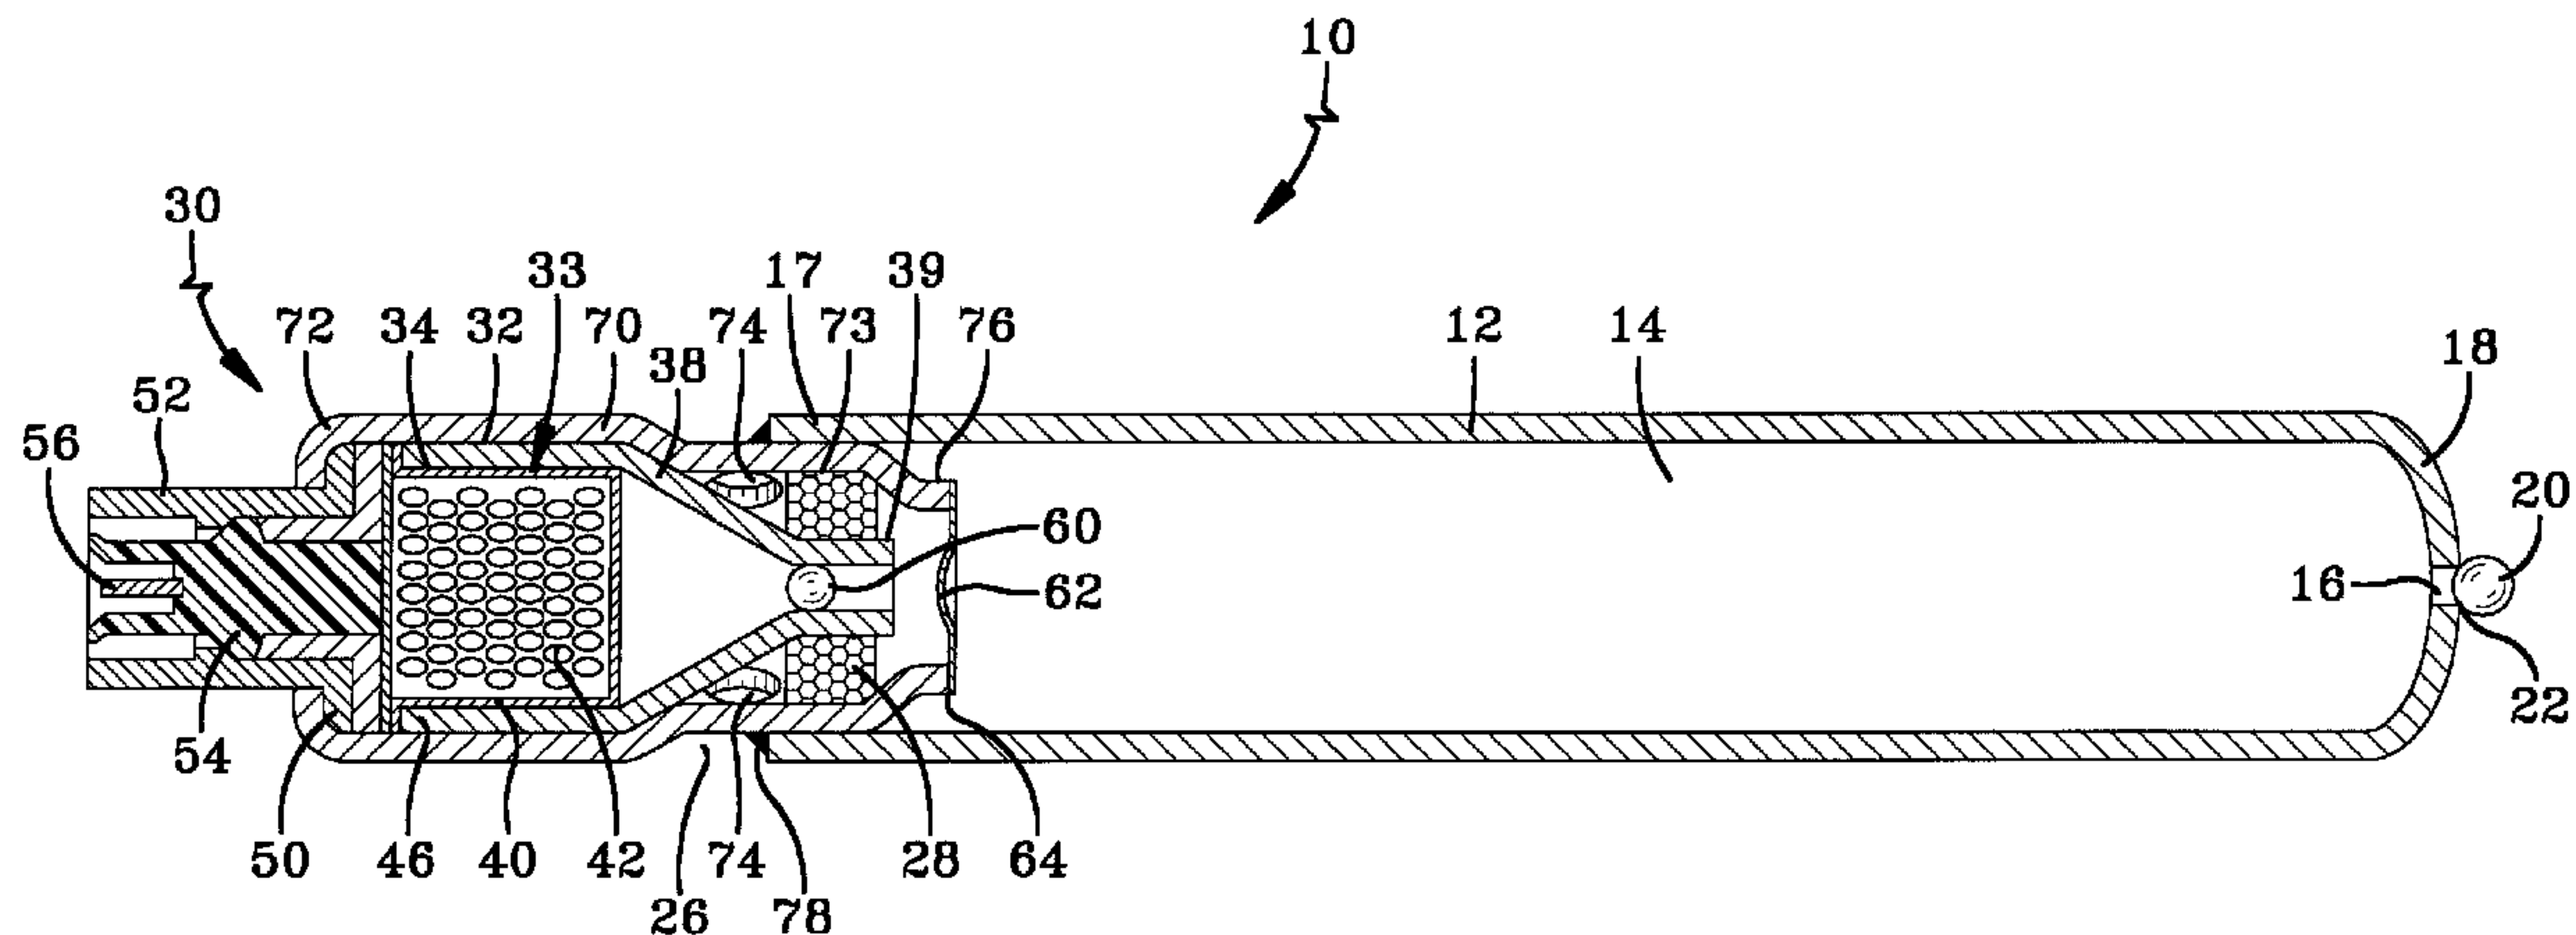

(57) Abrégé/Abstract:

A hybrid inflator (10), includes a storage chamber (14) for storing a pressurized gas and a pyrotechnic heater assembly (30) which has a solid gas generating material (42) within a combustion chamber (33). A closure (62) provides a pressure seal between the storage chamber and the combustion chamber. Upon receiving a control signal, an igniter (54) ignites the solid gas generating material. The closure is ruptured, allowing a mixture of hot generated gas and stored gas to discharge through a diffuser (70) and flow into a vehicle occupant restraint.

ABSTRACT

A hybrid inflator (10), includes a storage chamber (14) for storing a pressurized gas and a
5 pyrotechnic heater assembly (30) which has a solid gas
generating material (42) within a combustion
chamber (33). A closure (62) provides a pressure seal
between the storage chamber and the combustion
chamber. Upon receiving a control signal, an
10 igniter (54) ignites the solid gas generating
material. The closure is ruptured, allowing a mixture
of hot generated gas and stored gas to discharge
through a diffuser (70) and flow into a vehicle
occupant restraint.

HYBRID INFLATOR FOR AIRBAGS

5 The invention disclosed herein relates generally to methods and apparatuses for use in inflating vehicle occupant restraints, such as airbags, and more specifically to the type of inflator known as a hybrid inflator.

10 Many types of inflators have been disclosed in the art for inflating a vehicle occupant restraint such as an airbag. There are three primary types of inflators. Pyrotechnic inflators derive a gas source from a combustible gas generating material which, upon ignition, generates a quantity of gas sufficient to
15 inflate an airbag. Stored gas inflators utilize a quantity of stored pressurized gas which is selectively released to inflate an airbag. Hybrid inflators combine the use of a gas generating material and a quantity of stored pressurized gas to inflate an
20 airbag.

Hybrid inflators known in the art are subject to certain disadvantages. They require an abundance of welds in assembly, many of which may be structural welds. Many hybrid inflators lack assembly
25 flexibility. If, for example, there is a need for a hybrid inflator with a different gas output than those being constructed, an entirely different assembly is required. Additionally, known hybrid inflators require two sealing members.

30 There is provided in accordance with one aspect of the invention a hybrid inflator for an airbag comprising: a generally cylindrical vessel defining a storage chamber for containing a pressurized gas, said storage chamber having a circular cross section; a
35 generally cylindrical diffuser which is telescopically inserted into the generally cylindrical vessel; a

closure which is assembled with a supporting structure which extends across a portion of the cross section of the storage chamber and defines a circular opening, said circular opening having an area which is in the range of 40% to 60% of the area of the circular cross section of said storage chamber, said closure extending across said
5 circular opening to provide a pressure seal between the storage chamber and the diffuser; and a pyrotechnic heater assembly located in said diffuser for creating a passageway through said closure.

The present invention overcomes the disadvantages mentioned above. Thus, the difficulties inherent in the prior art are overcome in a way which is simple and
10 efficient, while providing advantageous results.

According to an aspect of the invention, a hybrid inflator for an airbag comprising:

a generally cylindrical vessel defining a storage chamber for containing a pressurized gas, said storage chamber having a circular cross section;

15 a pyrotechnic heater assembly at least partially located outside of the cylindrical vessel;

a generally cylindrical diffuser positioned about said pyrotechnic heater assembly, said diffuser is inserted into the generally cylindrical vessel wherein a first end of the diffuser is located inside the storage chamber;

20 a plenum is formed by an end of the vessel and a portion of the diffuser; and

a closure which is assembled with the first end of the diffuser which extends across a portion of the cross section of the storage chamber and defines a circular opening, said closure extending across said circular opening to provide a pressure seal between the storage chamber and the diffuser, wherein said pyrotechnic heater
25 assembly creates an orifice through said closure.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention may take physical form in certain parts and arrangement of parts, a preferred embodiment
5 of which will be described in detail in this specification and illustrated in the accompanying drawings which form a part hereof and wherein:

Fig. 1 is a longitudinal cross-sectional view of a first embodiment of a hybrid inflator of the present
10 invention;

Fig. 2 is a perspective longitudinal cross-sectional view of the hybrid inflator shown in Fig. 1;

Fig. 3 is an exploded view of the hybrid inflator shown in Fig. 1;

15 Fig. 4 is an enlarged, fragmentary cross-sectional view of the hybrid inflator shown in Fig. 1 illustrating hot generated gas propelling a projectile towards a closure;

Fig. 5 is similar to Fig. 4 showing the flow path
20 of the hot generated gas immediately after the projectile has ruptured the closure;

Fig. 6 is similar to Fig. 5 showing the flow paths for both the hot generated gas and the stored gas as they are both being discharged from the
25 inflator;

Fig. 7 is a longitudinal cross-sectional view of a first alternative embodiment of a hybrid inflator of the present invention;

Fig. 8 is a longitudinal cross-sectional view of
30 a second alternative embodiment of a hybrid inflator of the present invention;

Fig. 9 is a longitudinal cross-sectional view of a third alternative embodiment of a hybrid inflator of the present invention;

Fig. 10 is a fragmentary longitudinal cross-sectional view of a fourth alternative embodiment of a hybrid inflator of the present invention;

5 Fig. 11 is a cross-sectional view taken along the line 11-11 of Fig. 10;

Fig. 12 is a fragmentary cross-sectional view of a fifth alternative embodiment of a hybrid inflator of the present invention; and

10 Fig. 13 is a fragmentary cross-sectional view of another embodiment of a sixth, and most preferred, alternative embodiment of a hybrid inflator of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Figs. 1 and 2 show longitudinal cross-sectional views of a hybrid inflator 10 for inflating a vehicle occupant restraint such as an airbag, and Fig. 3 shows an exploded view of the hybrid inflator. All of the embodiments illustrated herein are for use with side airbags, but the invention is applicable to driver side frontal airbags, passenger side frontal airbags, and other applications as well.

The hybrid inflator 10 includes a pressure vessel 12 with a storage chamber 14 that is filled with helium, argon, nitrogen or any other suitable pressurized gas. While the pressure vessel shown has a generally cylindrical shape, it is understood that a pressure vessel having a spherical shape may also be used in the practice of the present invention. The storage chamber has a circular cross section. A fill port 16 located at a first end 18 of the vessel 12 is closed by a plug 20 which is attached to the vessel 12 by a weld 22. The vessel may be formed of stainless steel, low carbon steel or any other suitable material which has sufficient strength and extremely low permeability to the gas.

The hybrid inflator 10 also includes a pyrotechnic heater assembly 30. Forming the outer periphery of the pyrotechnic heater assembly 30 is a generally cylindrical diffuser 70. The diffuser may be formed of stainless steel, low carbon steel or any other suitable material having sufficient structural strength. The generally cylindrical diffuser is telescopically inserted into the generally cylindrical vessel. The diffuser is connected to the cylindrical vessel by a circumferential weld 78, which is

preferably a fillet weld. That is to say, the open end 17 of the vessel 12 is joined in sealing relation with the diffuser 70 by a circumferential weld 78.

5 The diffuser has a reduced diameter portion which is located inside the generally cylindrical vessel and defines a circular opening having an area which is in the range of 40% to 60% of the area of the circular cross section of said storage chamber. The end 76 of the diffuser which is located inside the vessel is
10 assembled with a closure 62 which seals the pressurized gas within the storage chamber 14. The closure is preferably formed of stainless steel or any other material which is corrosion resistant, has extremely low permeability to the stored gas, and has
15 stable mechanical properties over a wide range of temperatures. The closure is plastically deformable, as shown in the drawings, by the pressure exerted by the inert gas in the storage chamber. The closure 62 is attached to the diffuser 70 by a weld 64. A second
20 end 72 of the diffuser 70 is crimped over an igniter retainer assembly 52.

A plenum 26 is formed by the pressure vessel 12 and the diffuser 70. The plenum 26 is formed by: (a) the end of the larger diameter section of the diffuser
25 housing; (b) the reduced diameter section of the diffuser housing; and the proximal end of the pressure vessel. The plenum simplifies the finished assembly of the airbag module, thus reducing costs. By having an integral plenum, no air gap is needed around the
30 inflator. The diffuser 70 has a plurality of openings 74 therethrough for venting gas from the inflator to a vehicle occupant restraint. The annulus, or plenum, which is outside the diffuser in juxtaposition with the openings 74 allows the gas to

evenly disperse in 360° of direction. This allows the airbag to fill evenly without the need for other hardware to cause this even filling.

5 A sleeve 32, which is tapered at a first end 38, is located within the diffuser 70. The sleeve 32 cooperates with the igniter 54 and support ring 50 to define a combustion chamber 33. The combustion chamber 33 encloses a package 40 which contains a solid gas generating material 42 hermetically sealed
10 within it. The package may be formed of aluminum or any suitable material which may be hermetically sealed. A collar at the second end 46 of the package is clamped between the support ring 50 and the second end 34 of the sleeve 32. The support ring and igniter
15 support the second end 46 of the package 40 against the pressure created when the gas generating material is ignited. The first end 38 of the sleeve 32 narrows to form a nozzle 39 which, in this embodiment, has a projectile 60 secured therein, for example by
20 pressing. Surrounding the first end 38 of the sleeve 32 is a filter 28 which fits against the inside 73 of the diffuser 70 and is located between the end of the nozzle and the openings through the diffuser.

25 Fitting inside the igniter retainer assembly 52 is an igniter 54. The igniter 54 communicates with a sensor means (not shown) via electric contact pins 56. The sensor means can be of any type presently used in the art to sense a collision or sudden deceleration of
30 a vehicle.

With reference to Fig. 3, there is great flexibility with regard to the assembly of the hybrid inflator. The hybrid inflator 10 may be thought of as consisting of four major assembly components, the

igniter 54, the igniter retainer assembly 52, the pyrotechnic heater assembly 30, and the pressure vessel 12. To attach an igniter, an igniter 54 is simply inserted into the igniter end cap in the
5 igniter retainer assembly 52. Preferably, the igniter is secured in place using an interference fit between the end cap 52 and the retainer ring 53. However, it is understood that the igniter may, if desired, be secured in place by threads, welding, adhesive or any
10 other suitable means. To attach a pressure vessel, an end 17 of the pressure vessel 12 is joined in sealing relation to the diffuser 70 with a circumferential weld 78, as shown in Figs. 1 and 2.

The operation of a hybrid inflator in accordance
15 with this first embodiment may best be explained with reference to Figs. 4, 5 and 6. With reference to Fig. 4, upon receiving an electric signal from a vehicle collision sensor (not shown) in response to a vehicle collision requiring deployment of a vehicle
20 occupant restraint, the igniter 54 fires, igniting the solid gas generating material 42 inside the package 40. On ignition, the solid propellant 42 generates a hot gas which forces a first wall 45 of the package to structurally fail, forming an
25 opening 48 which allows a flow 43 of the hot generated gas to escape the package 40. The flow 43 of hot generated gas then moves through the nozzle 39 formed at the first end 38 of the sleeve 32, propelling the projectile 60 into and rupturing the closure 62
30 thereby creating a passageway through the closure.

The effectiveness of the gas jet exiting the combustion sleeve, in rupturing the closure to create a passageway therethrough, depends greatly on the reduced diameter of the opening sealed by the closure

as compared to the inner diameter of the pressure vessel. The opening sealed by the closure preferably has an area which is in the range of 40% to 60% of the area of the circular cross section of said storage chamber. Tests have shown that ratios greater than this allow increased deflection of the closure, thus allowing the closure to move away from the jet during opening. In addition, as the diameter of the opening sealed by the closure increases, the structural ability of the closure to hold back the stored gas decreases. Thicker materials must then be used to support this pressure load. Tests have shown that ratios smaller than this do not provide sufficient open area to allow the gas to exit the pressure vessel in a timely fashion. Fast airbag deployment times are specifically necessary for side impact applications.

With reference to Fig. 5, hot generated gas flows both into the pressure vessel heating the stored gas and outward to the plenum. The shape and relative location of the nozzle to the closure 62 aids in efficient focusing of the hot generated gas onto the closure and into the storage chamber for heating purposes.

Upon the rupturing of the closure a flow 24 of pressurized gas from the storage chamber 14 moves through the passageway 71 formed in closure 62 located at the first end 76 of the diffuser 70 as shown in Fig. 6. As the flow 24 of pressurized stored gas passes through the passageway 71 it joins the flow 43 of hot generated gas forming a mixed flow 66. The mixed flow 66 passes through the filter 28, through a plurality of openings 74, enters the plenum 26 which is formed by the pressure vessel 12 and the

diffuser 70 and enters a vehicle occupant restraint (not shown).

With continuing reference to Fig. 6, the relative dispositions of the sleeve 32 and the diffuser 70 directs the hot generated gas along a tortuous path as shown by arrows 43 and 66. This tortuous path creates at least two turns for the hot generated gas, a first turn 66 which is an 180° turn and a second turn which is a 90° turn. Still referring to Fig. 6, this tortuous path 43, 66 acts as a flash suppressor and aids the filter 28 in minimizing the emission of any fragments or particles which are a product of the combustion or the rupturing of the closure.

The flexibility of assembly of a hybrid inflator in accordance with the present invention is demonstrated by considering some of the possible hybrid inflator variations available using the same basic assembly process. For example, Fig. 7 shows a hybrid inflator 10 with a pyrotechnic heater assembly 30, a pin-type igniter 54 and a pressure vessel 12. The pyrotechnic heater assembly 30 has a vessel connection zone 75 with an outside diameter $X1$ on the diffuser 70. The pressure vessel 12 has a volume $V1$.

To construct an inflator with a smaller pressurized gas output, Fig. 8 shows a hybrid inflator 11 with the same pyrotechnic heater assembly 30 having the same vessel connection zone 75 with the same outside diameter $X1$ on the diffuser 70 and the same pin-type igniter 54. However, this hybrid inflator 11 has a smaller pressure vessel 13 having a volume $V2$ which is smaller than $V1$.

To construct an inflator with a pressurized gas output between that shown in Figs. 7 and 8, Fig. 9

shows a hybrid inflator 57 with the same pyrotechnic heater assembly 30 having the same vessel connection zone 75 with the same outside diameter X1 on the diffuser 70. However, this hybrid inflator 57 has a pressure vessel 58 with a volume V3 which is smaller than V1 but larger than V2. This hybrid inflator also differs from those shown in Figs. 7 and 8 in that it has a leadwire type igniter 59. Other assembly variations are also possible.

10 In another embodiment of this invention, shown in Figs. 10 and 11, the projectile 61 used to rupture the closure 62 is not a separate piece but is a part of the sleeve 32. Figs. 10 and 11 show a pressure vessel 12, a diffuser 70, and a filter 28. Frangible members 33 attach the projectile 61 to the nozzle 39. 15 When the flow 43 of hot generated gas moves through the nozzle 39, it impacts the projectile 61, breaking it from the frangible members 33, and propelling the projectile 61 through the closure 62.

20 In still another embodiment of this invention, Fig. 12 shows a structurally weakened closure 62 which requires support to keep the pressurized gas sealed within the vessel 12. This support is provided by a column 65 which may be a separate piece or simply an elongated combustion chamber. The separate piece 25 would be pressed into the end of the combustion chamber. When the flow 43 of hot generated gas moves through the nozzle 39, it impacts the column 65, forcing the column to fail thus allowing the weakened closure to fail and release the stored gas. 30

The preferred embodiment of the invention is shown in Fig. 13. This embodiment has a slightly different means for attaching the closure 64 to the diffuser 70. An orifice plate 45 is added to support

the package 40. With this orifice plate 45 to support the package, the wall of the package ruptures at an elevated temperature and pressure. The resultant flow of hot generated gas is at an elevated temperature and pressure and rapidly erodes the closure 64, creating a passageway through the closure solely by hot gas without the use of a projectile as in the other embodiments.

1. A hybrid inflator for an airbag comprising:

a generally cylindrical vessel defining a storage chamber for containing a pressurized gas, said storage chamber having a circular cross section;

a pyrotechnic heater assembly at least partially located outside of the cylindrical vessel;

a generally cylindrical diffuser positioned about said pyrotechnic heater assembly, said diffuser is inserted into the generally cylindrical vessel wherein a first end of the diffuser is located inside the storage chamber;

a plenum is formed by an end of the vessel and a portion of the diffuser; and

a closure which is assembled with the first end of the diffuser which extends across a portion of the cross section of the storage chamber and defines a circular opening, said closure extending across said circular opening to provide a pressure seal between the storage chamber and the diffuser, wherein said pyrotechnic heater assembly creates an orifice through said closure.

2. The hybrid inflator for an airbag of claim 1 wherein the pyrotechnic heater assembly creates the orifice through said closure solely by hot gas.

3. The hybrid inflator for an airbag of claim 2 wherein the diffuser has a plurality of openings therethrough for venting gas from the inflator, and the hot gas is directed towards the closure through a nozzle with an end of said nozzle which is proximal to the closure being nearer to the closure than the openings through the diffuser.

4. The hybrid inflator for an airbag of claim 3 further comprising a filter located between the end of the nozzle and the openings through the diffuser.

5. The hybrid inflator for an airbag of claim 1 wherein the pyrotechnic heater assembly creates the orifice through said closure by propelling a projectile through the closure.

6. The hybrid inflator for an airbag of claim 5 wherein the diffuser has a plurality of openings therethrough for venting gas from the inflator, and the projectile is directed towards the closure through a nozzle with an end of said nozzle which is proximal to the closure being nearer to the closure than the openings through the diffuser.

7. The hybrid inflator for an airbag of claim 6 further comprising a filter located between the end of the nozzle and the openings through the diffuser.

8. The hybrid inflator for an airbag of claim 1 wherein the diffuser is connected to the cylindrical vessel by a circumferential weld.

9. A hybrid inflator for an airbag comprising:

a generally cylindrical vessel defining a storage chamber for containing a pressurized gas, said storage chamber having a circular cross section;

a pyrotechnic heater assembly at least partially located outside of the cylindrical vessel;

a generally cylindrical diffuser around said pyrotechnic heater assembly, the diffuser is inserted into the generally cylindrical vessel, the diffuser being connected to the cylindrical vessel, the diffuser having a reduced diameter portion which is located inside the generally cylindrical vessel and defines a circular opening;

a plenum is formed by an end of said vessel and a portion of the diffuser;

a closure which is assembled with the reduced diameter portion of the diffuser and extends across said circular opening to provide a pressure seal between the storage chamber and the diffuser, wherein the pyrotechnic assembly creates an orifice through said closure.

10. The hybrid inflator for an airbag of claim 9 wherein the pyrotechnic heater assembly creates

the orifice through said closure solely by hot gas.

11. The hybrid inflator for an airbag of claim 10 wherein the diffuser has a plurality of openings therethrough for venting gas from the inflator, and the hot gas is directed towards the closure through a nozzle with an end of said nozzle which is proximal to the closure being nearer to the closure than the openings through the diffuser.

12. The hybrid inflator for an airbag of claim 11 further comprising a filter located between the end of the nozzle and the openings through the diffuser.

13. The hybrid inflator for an airbag of claim 9 wherein the pyrotechnic heater assembly creates the orifice through said closure by propelling a projectile through the closure.

14. The hybrid inflator for an airbag of claim 13 wherein the diffuser has a plurality of openings therethrough for venting gas from the inflator, and the projectile is directed towards the closure through a nozzle with an end of said nozzle which is proximal to the closure being nearer to the closure than the openings through the diffuser.

15. The hybrid inflator for an airbag of claim 14 further comprising a filter located between the end of the nozzle and the openings through the diffuser.

16. A hybrid inflator for an airbag comprising:

a generally cylindrical vessel defining a storage chamber for containing a pressurized gas, said storage chamber having a circular cross section;

a pyrotechnic heater assembly;

a generally cylindrical diffuser positioned about said pyrotechnic heater assembly, said diffuser is inserted into the cylindrical vessel wherein an end of said vessel and a portion of said diffuser form a plenum;

a first end of said diffuser is located inside the storage chamber, said first end having a circular opening; and

a closure, which is assembled with the first end of the diffuser, said closure extending across said circular opening to provide a pressure seal between the storage chamber and the diffuser.

17. The hybrid inflator for an airbag of claim 16 wherein the pyrotechnic assembly is positioned at least partially outside of the pressure vessel.

18. The hybrid inflator for an airbag of claim 16 wherein the pyrotechnic assembly creates an orifice through said closure solely by hot gas.

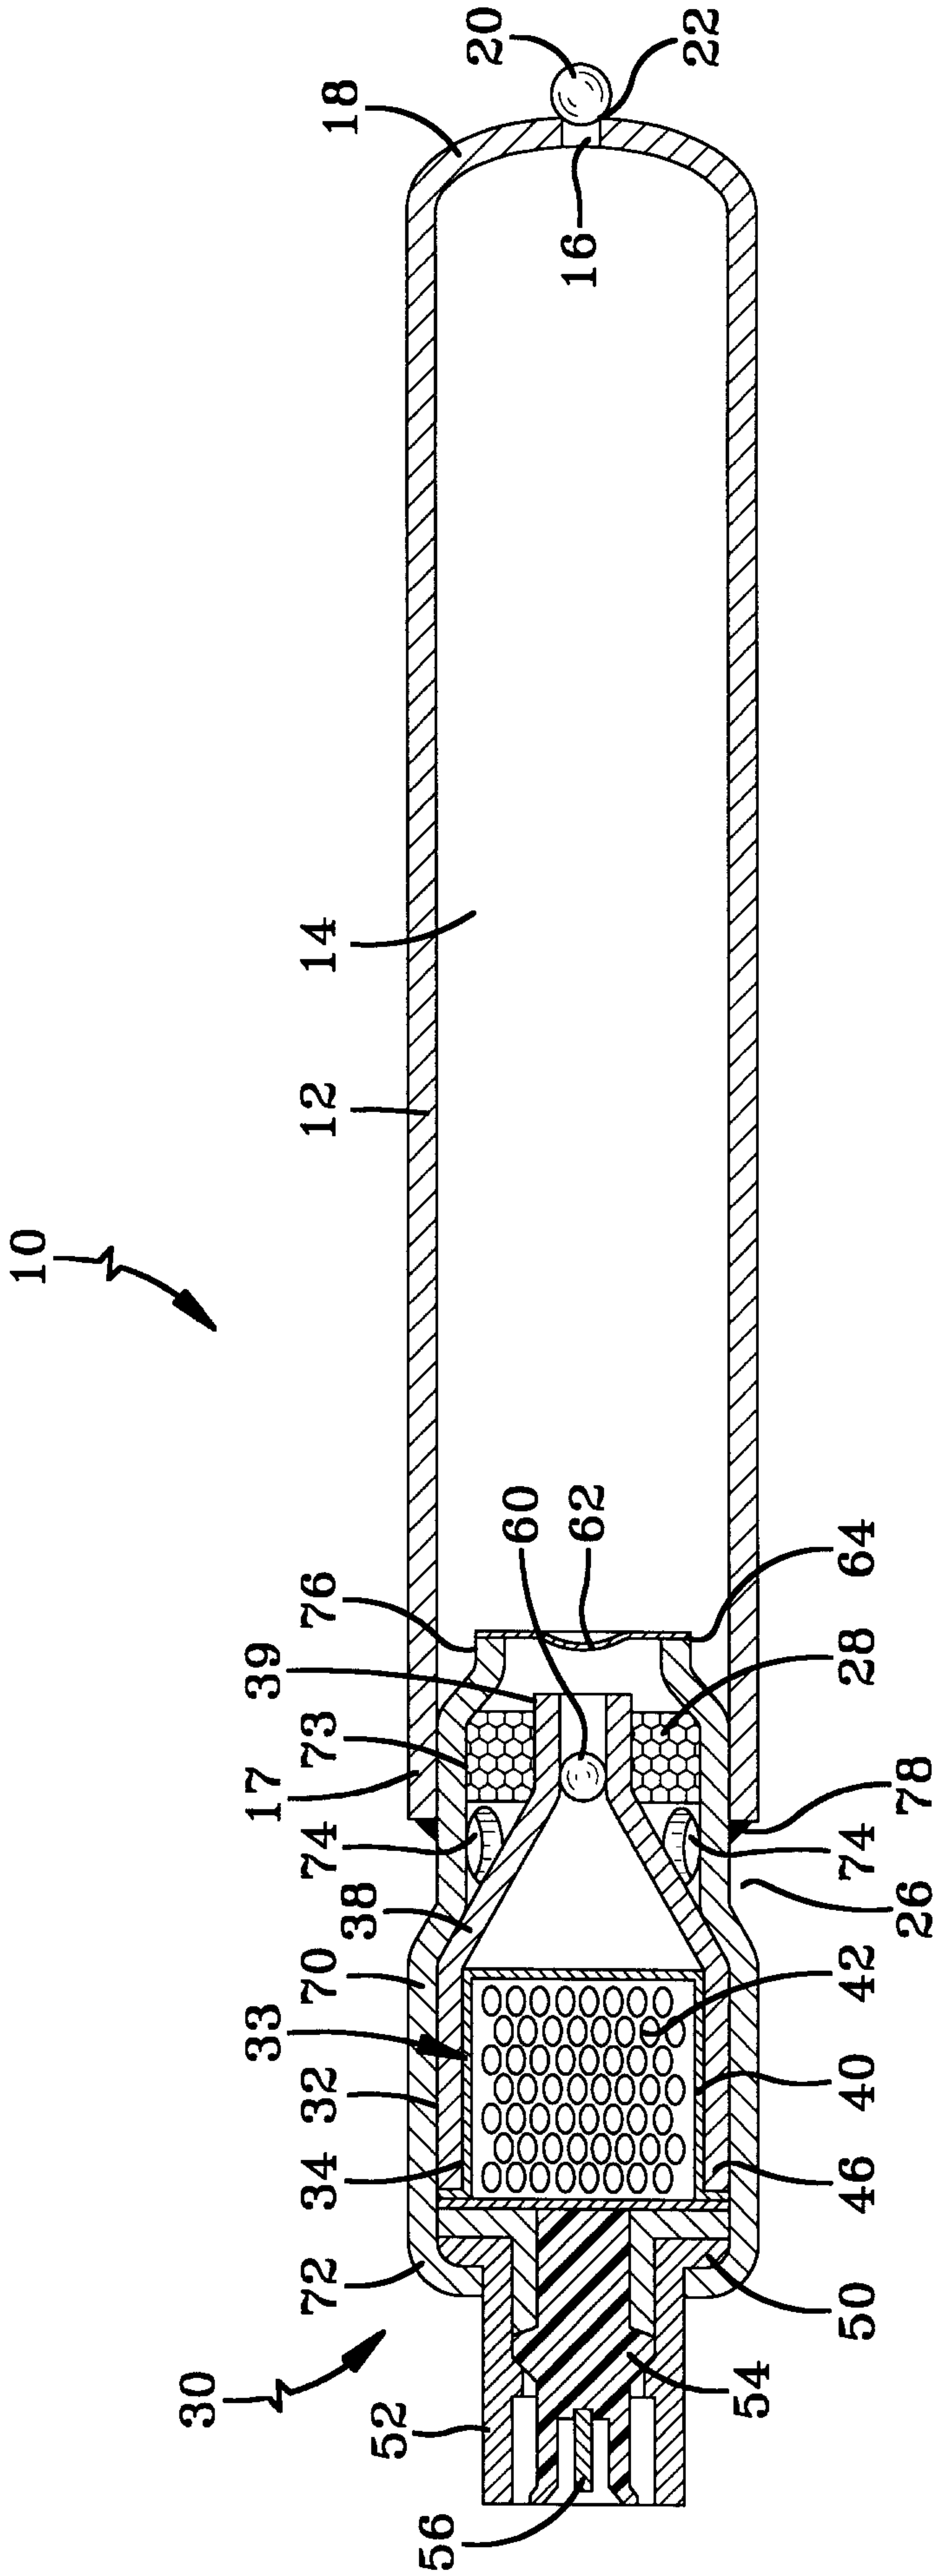
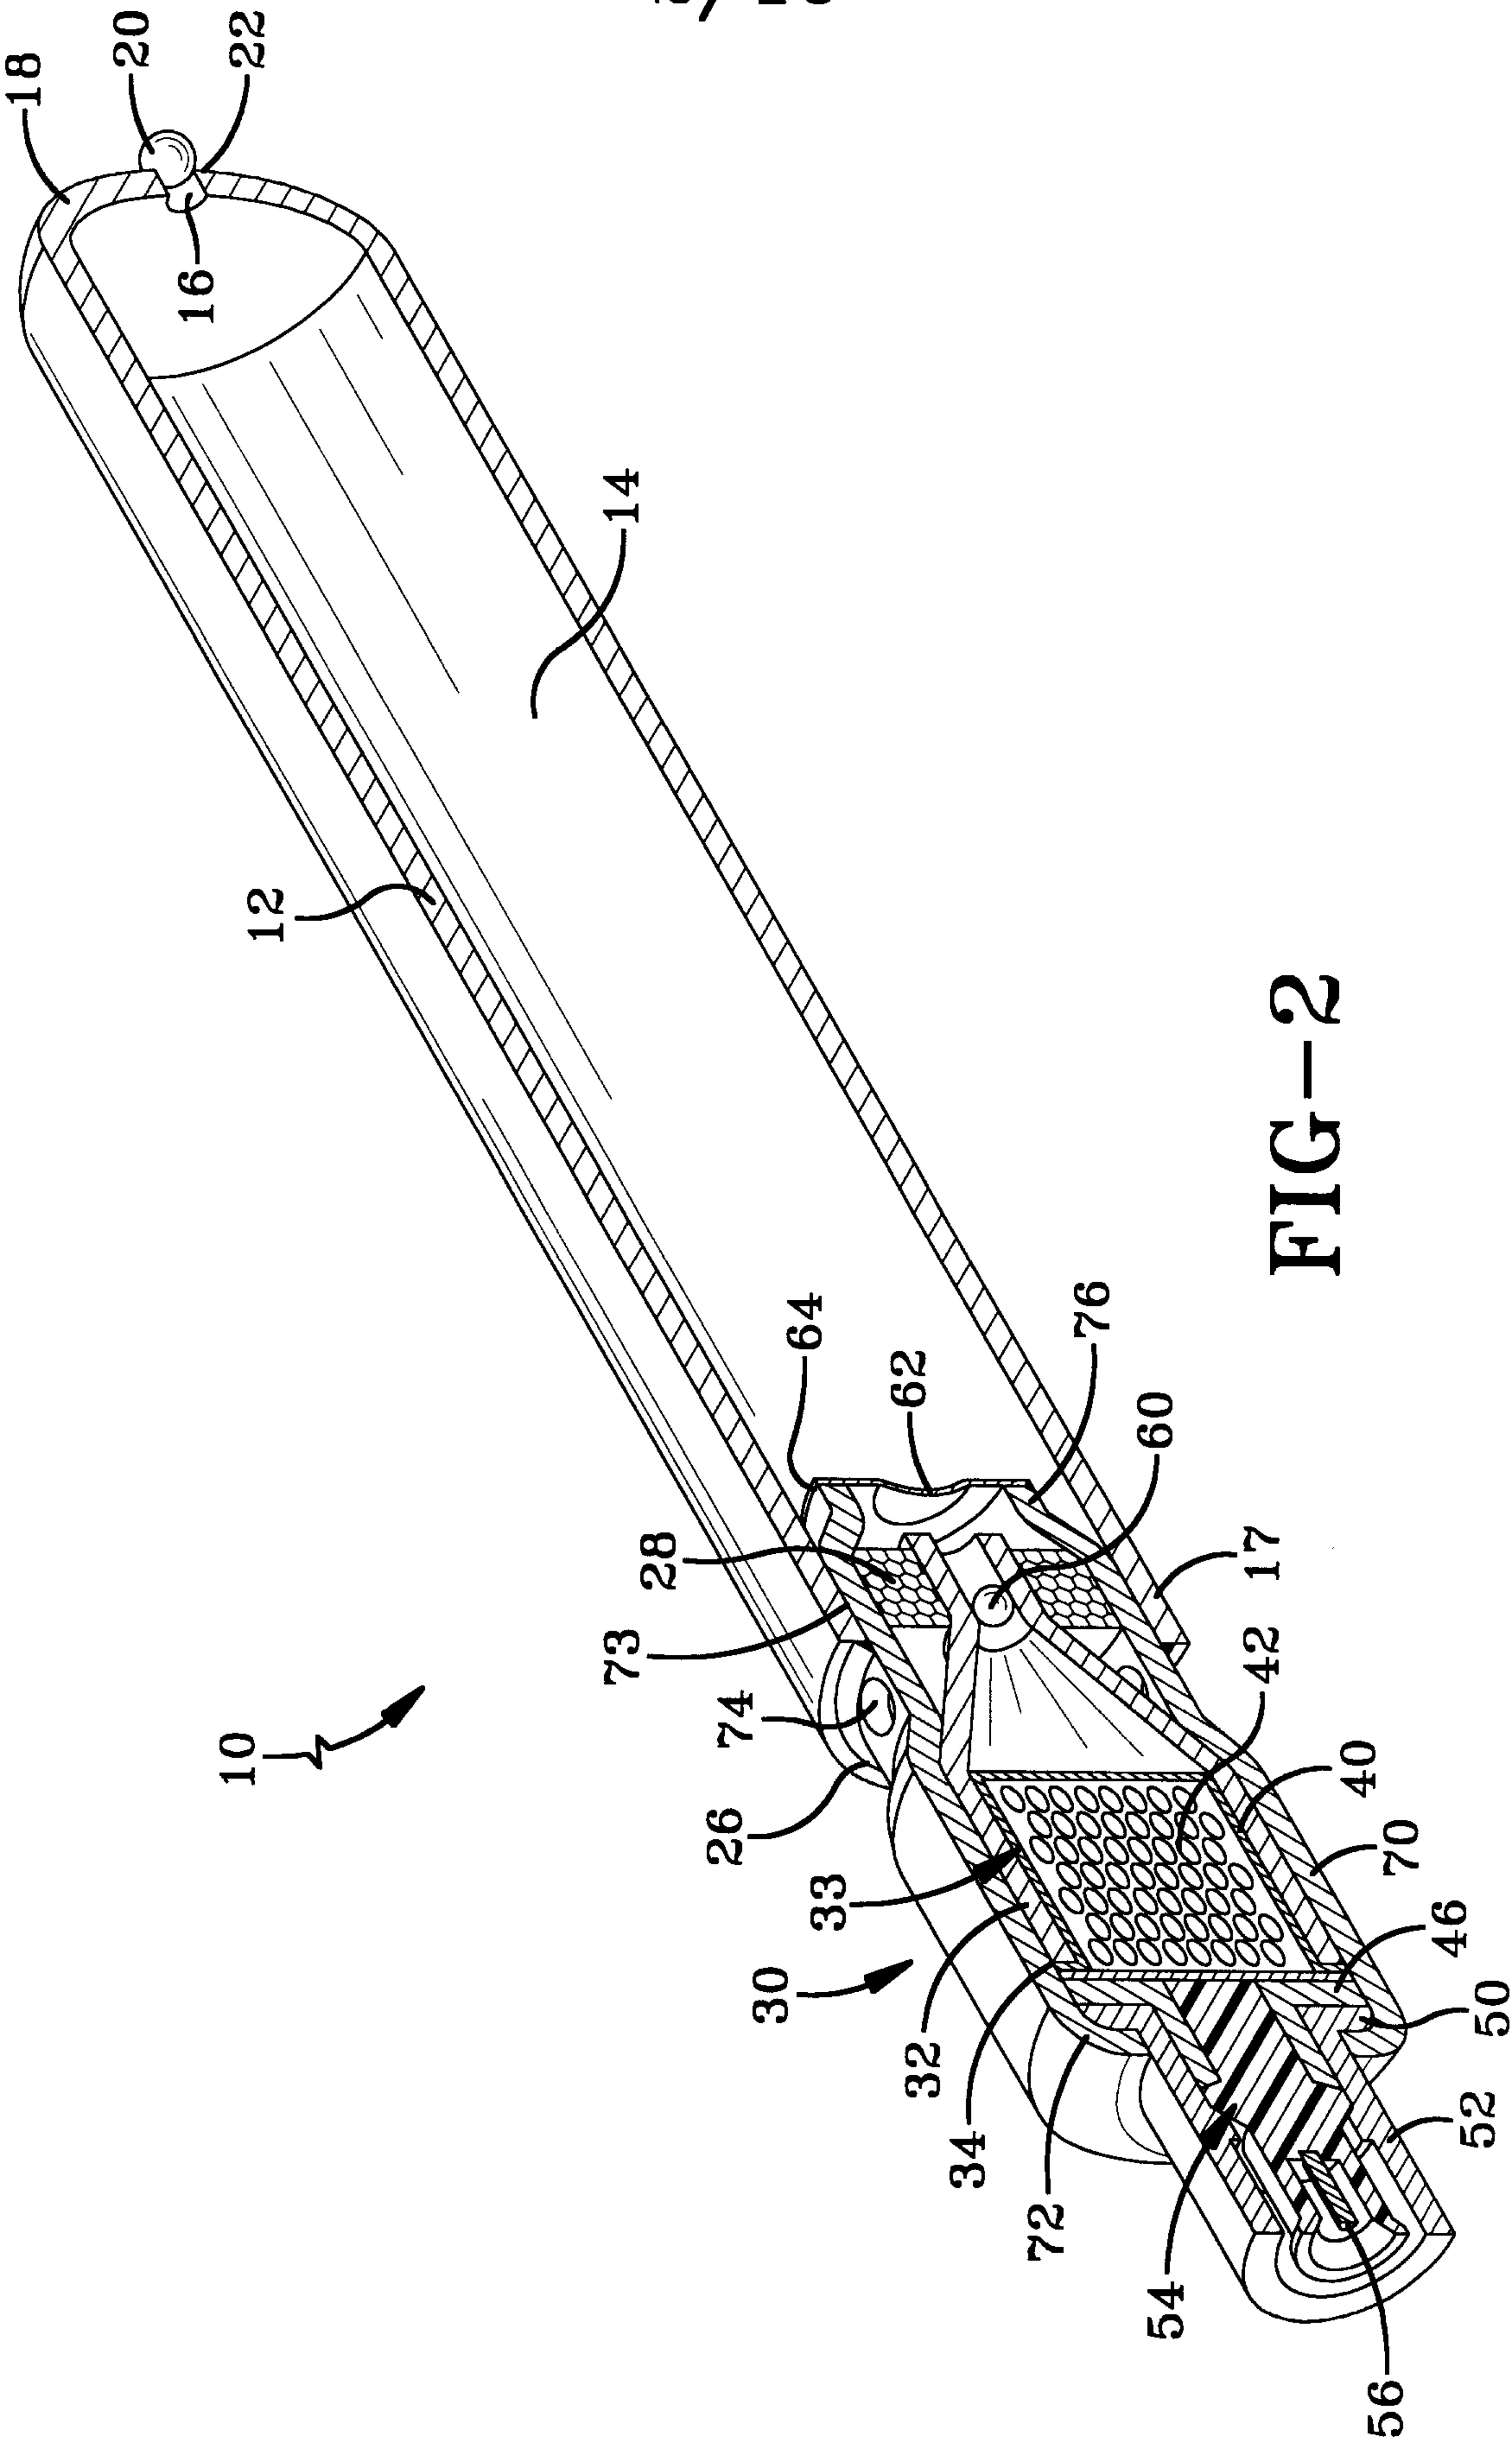
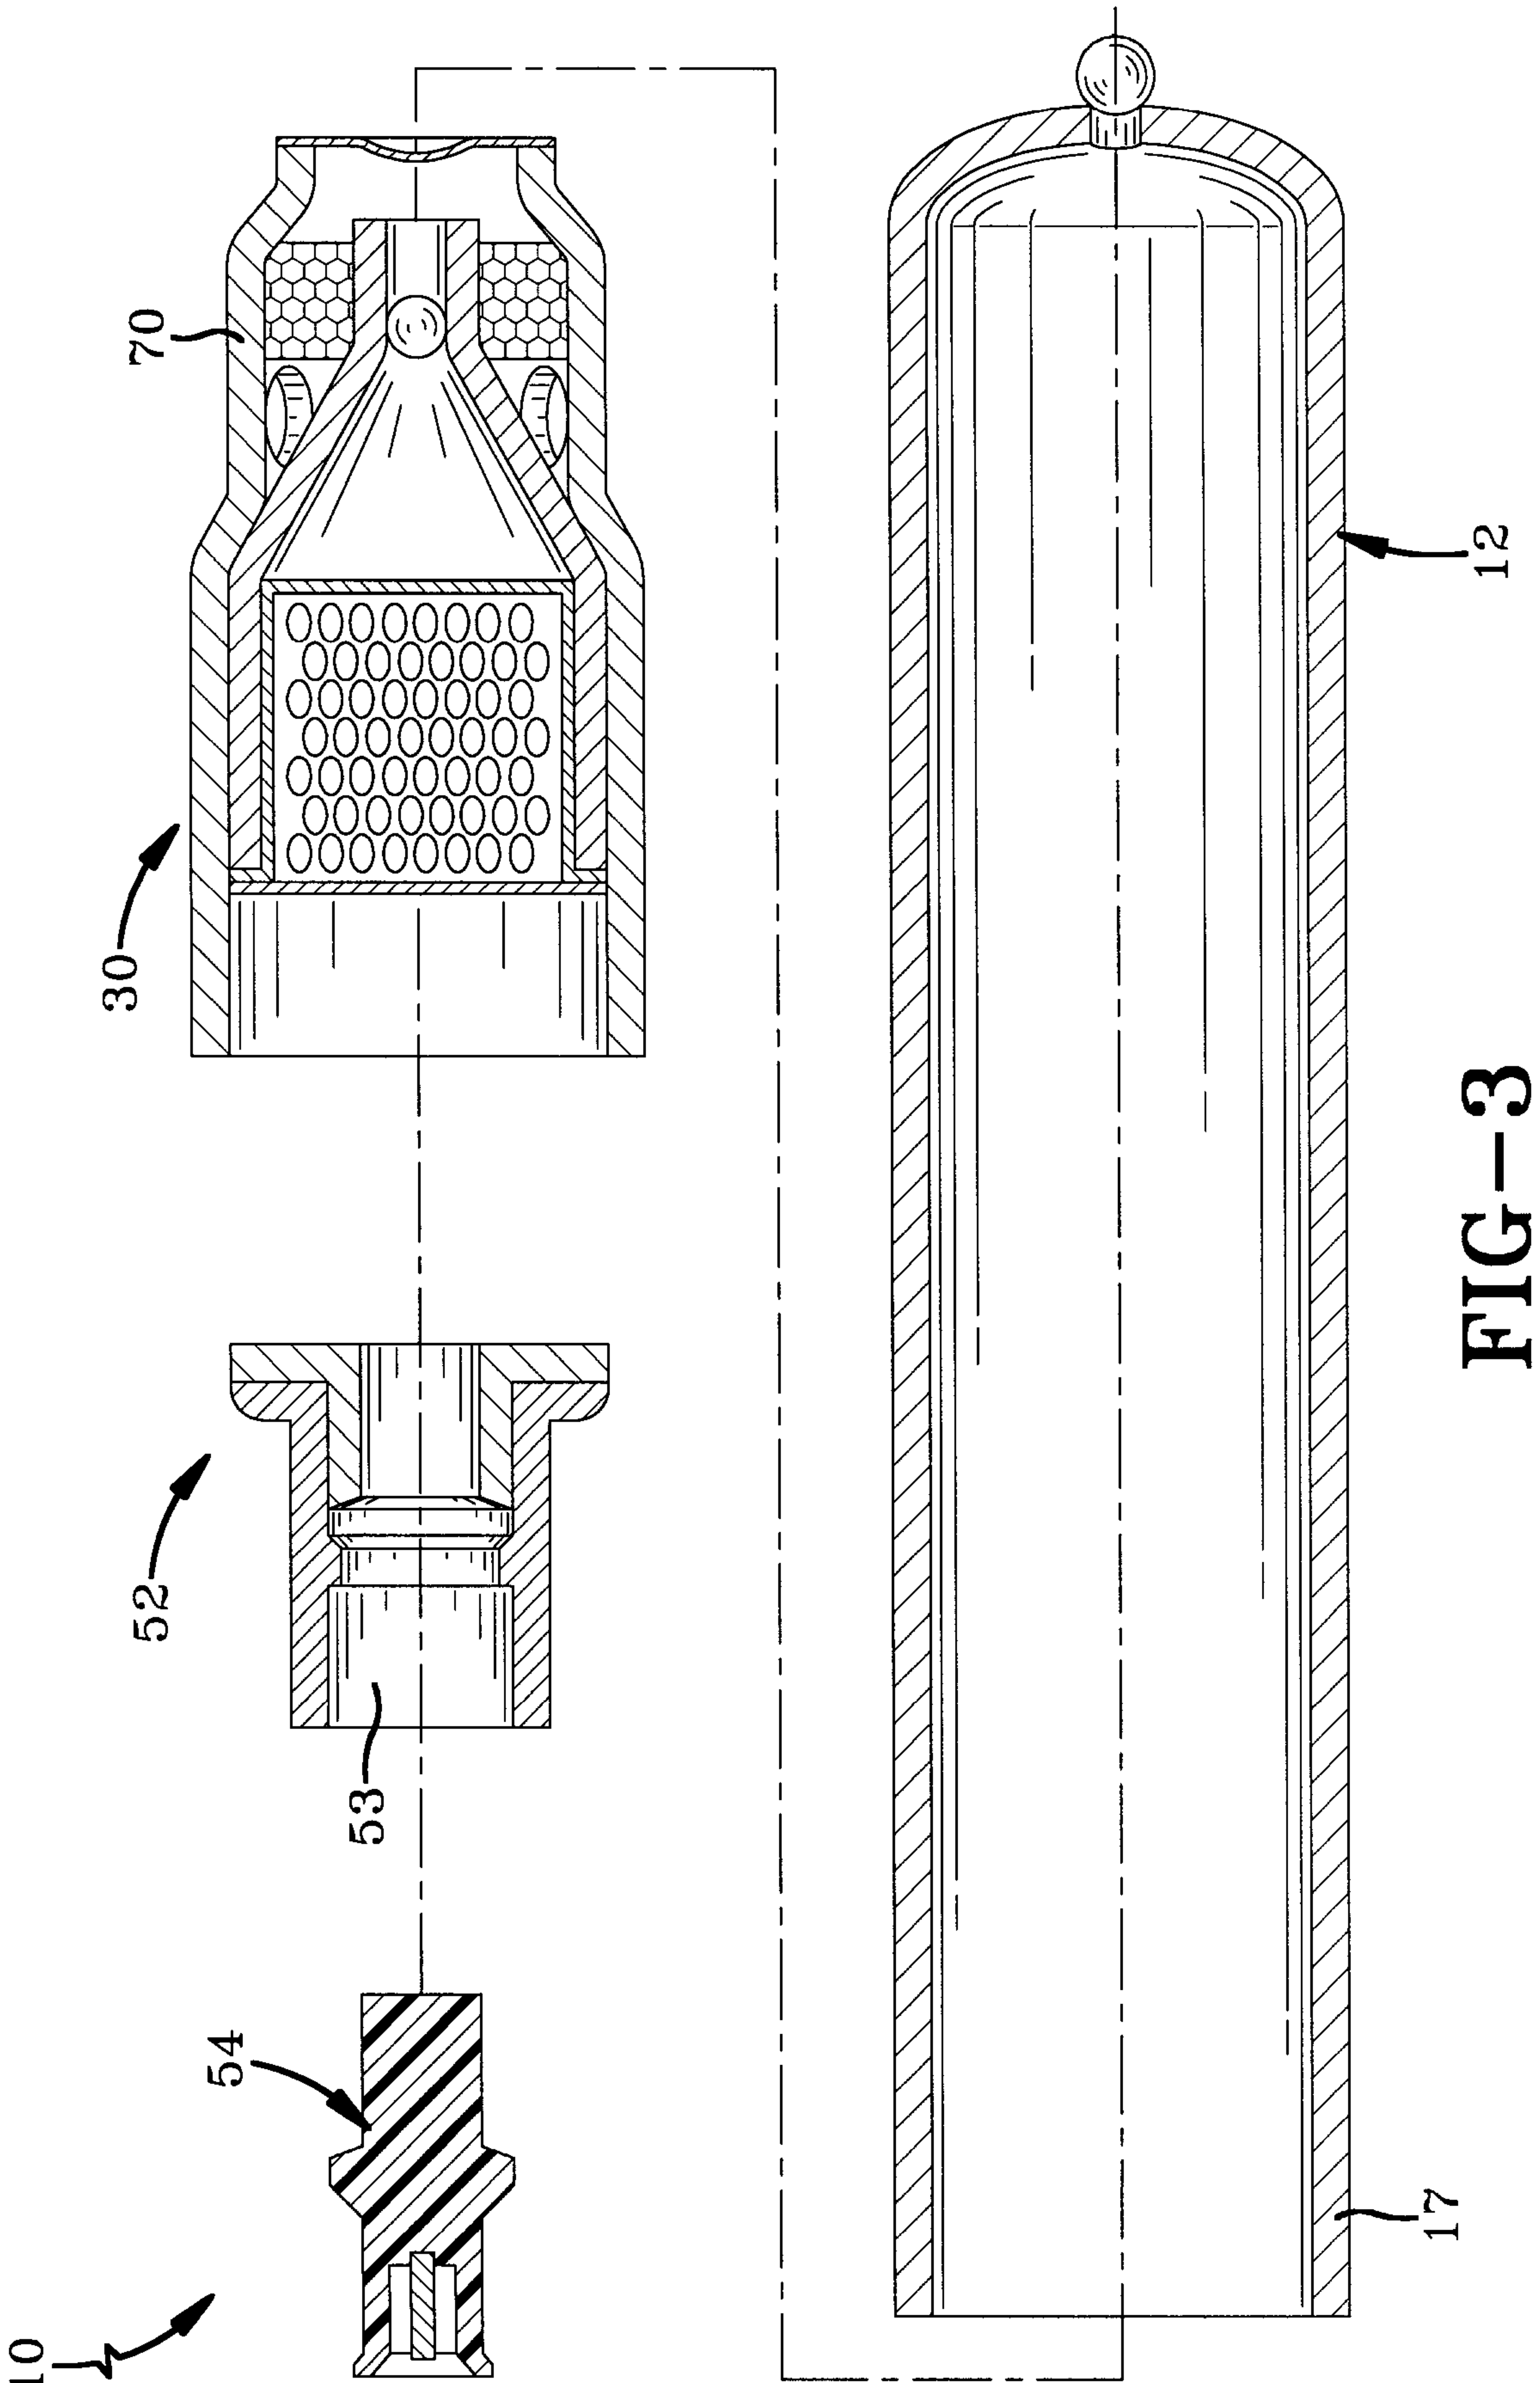


FIG-1

2/10





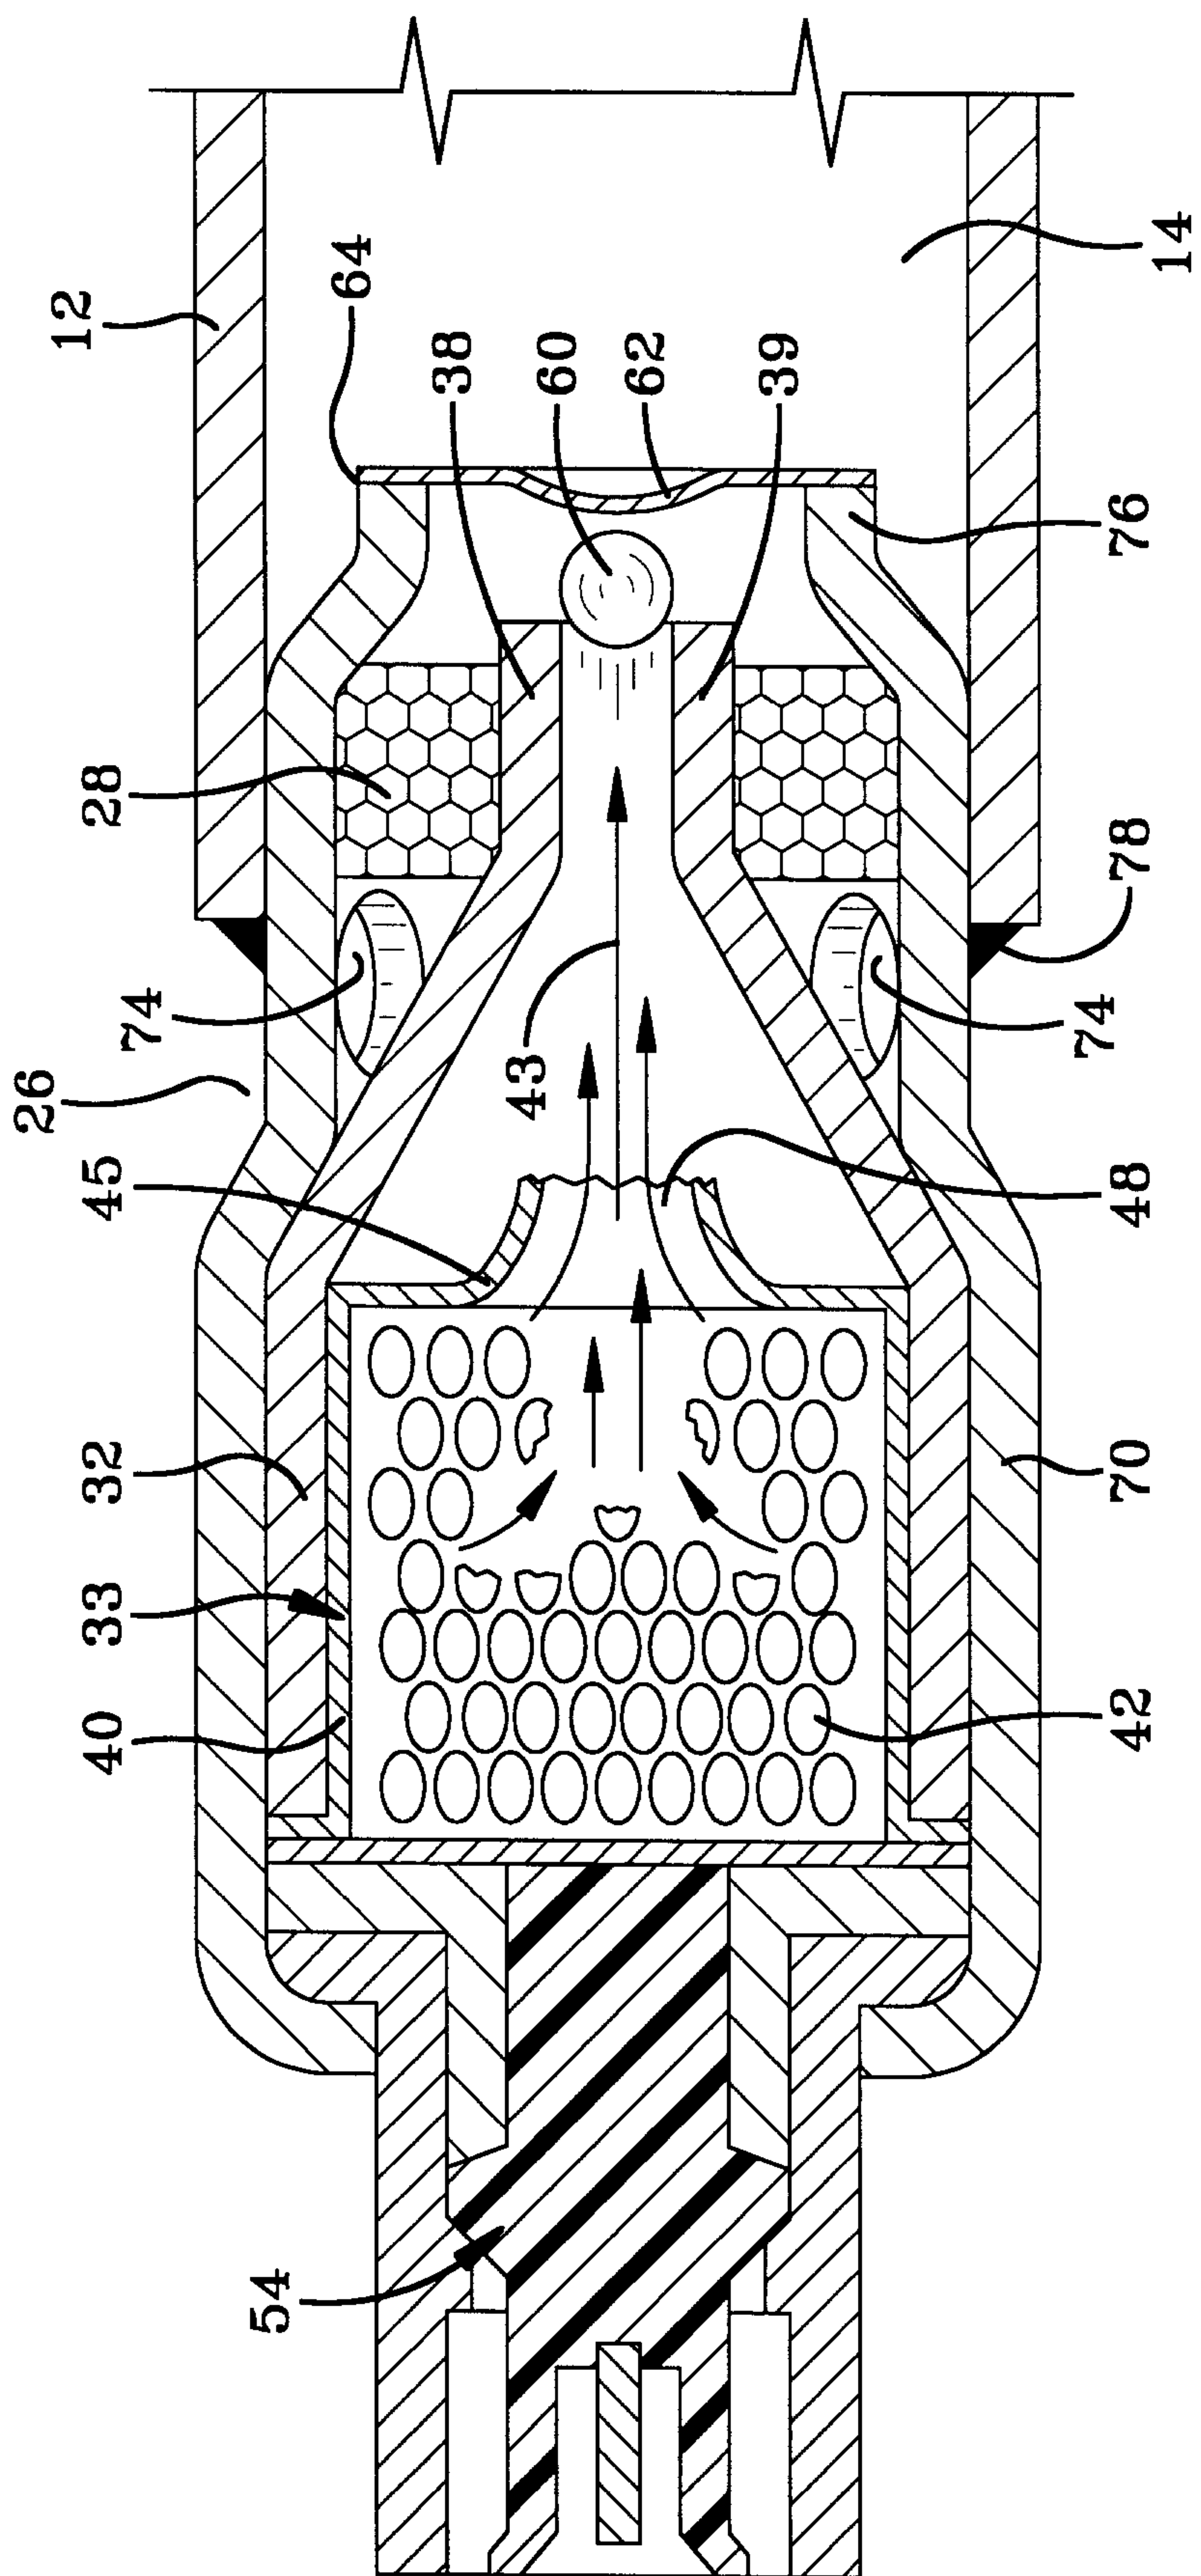


FIG-4

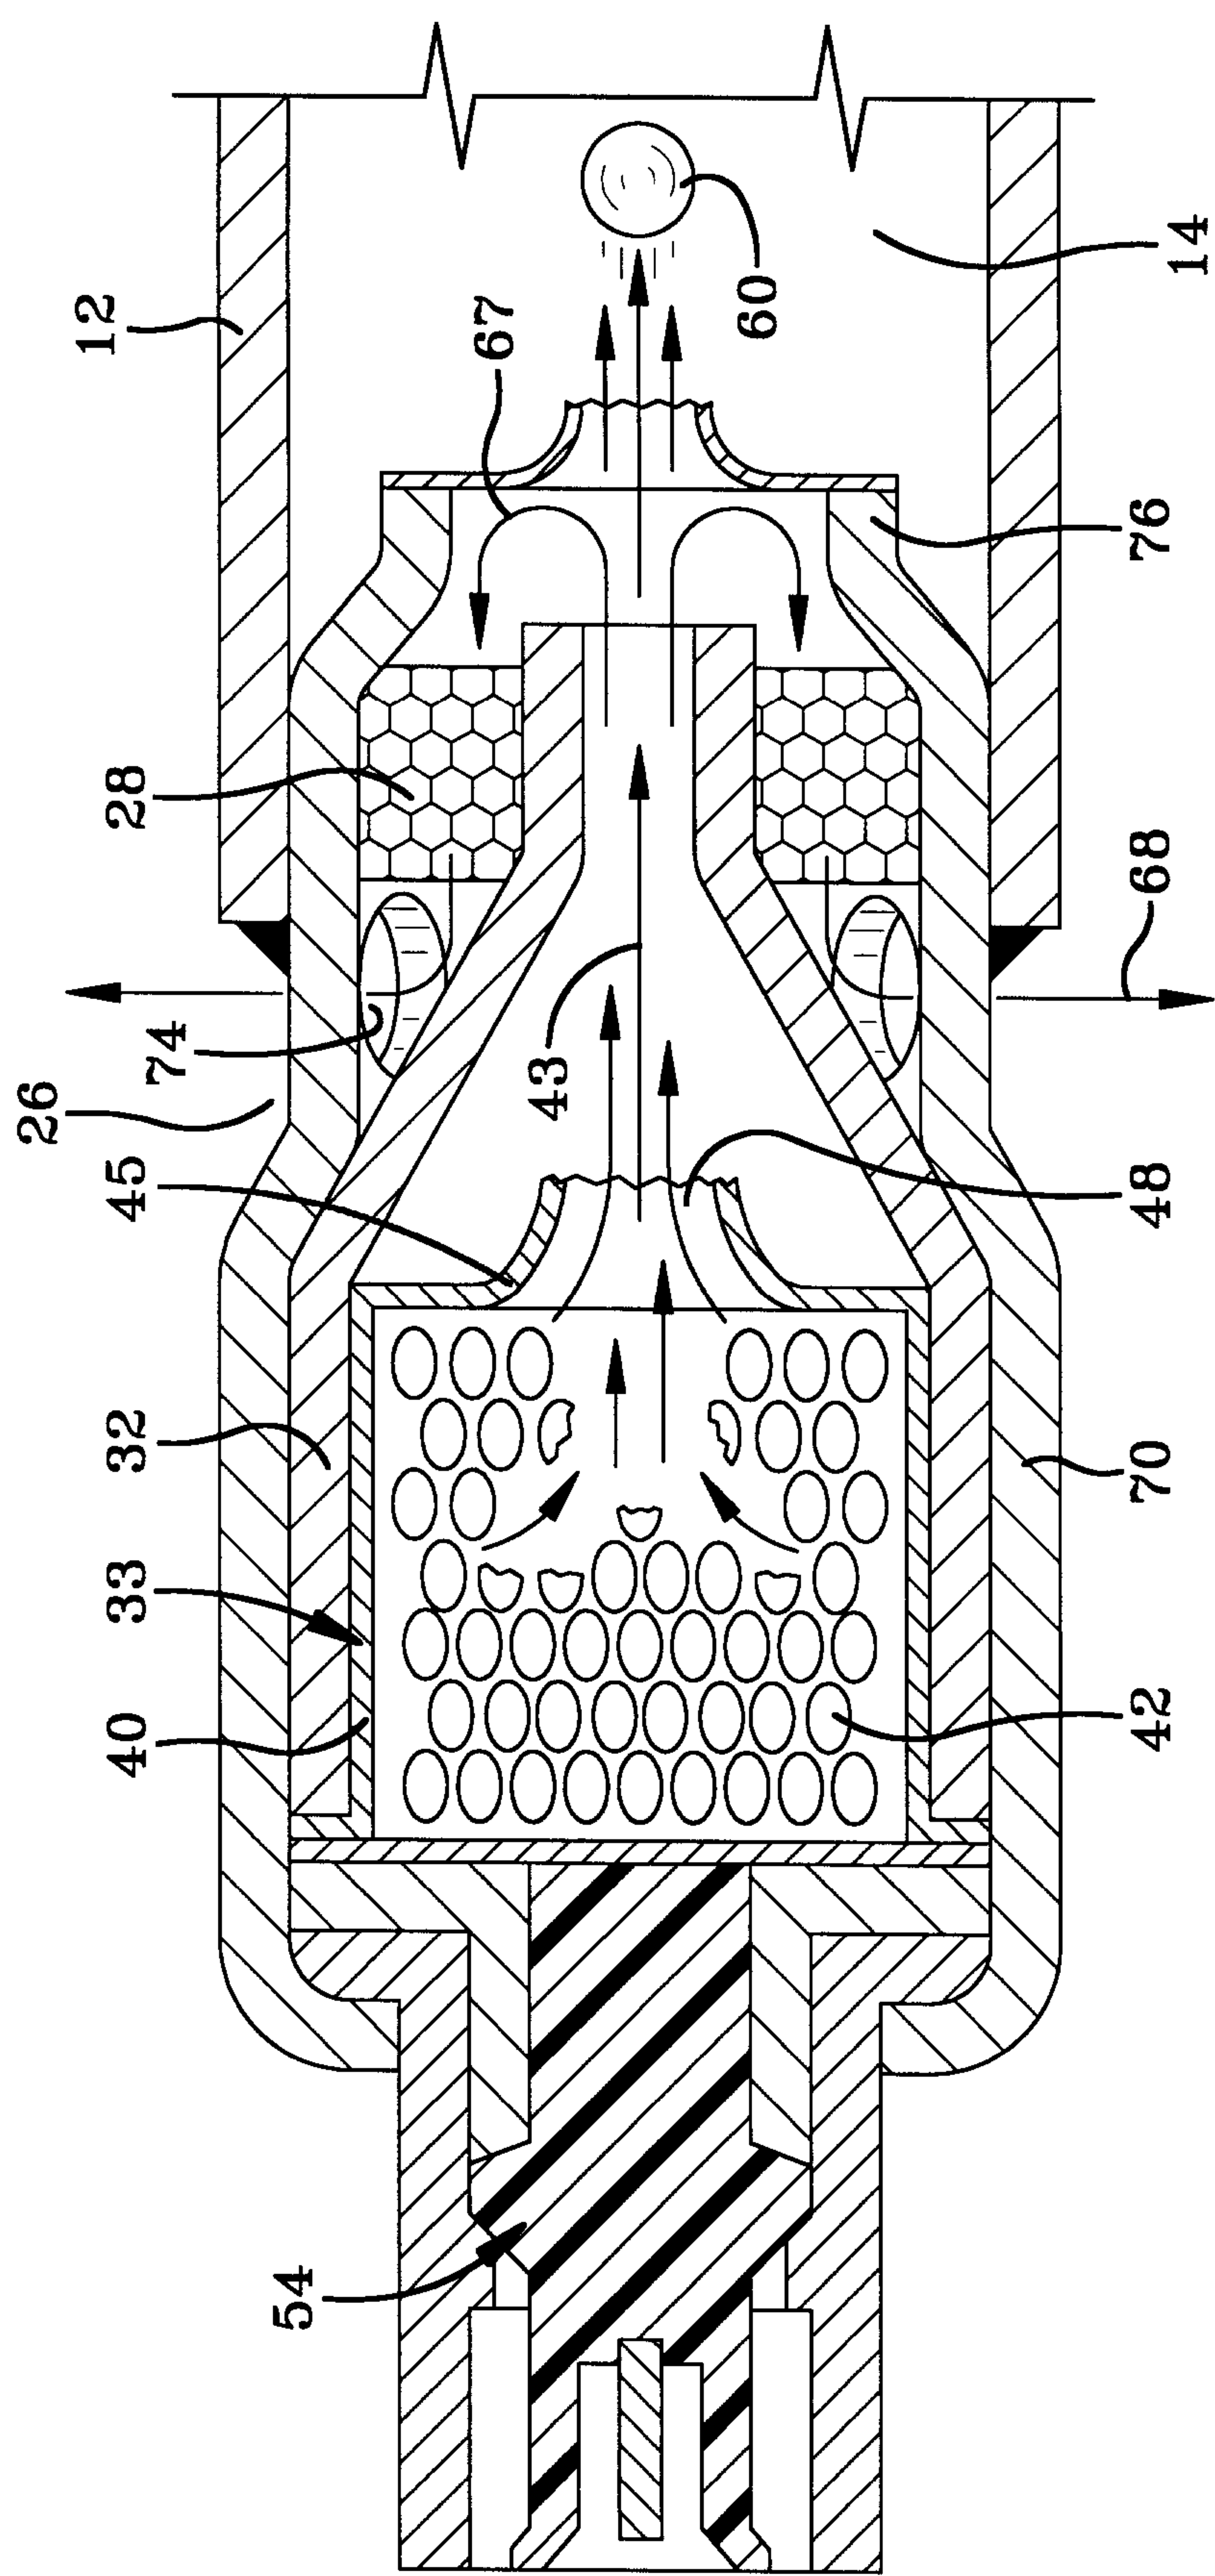


FIG-5

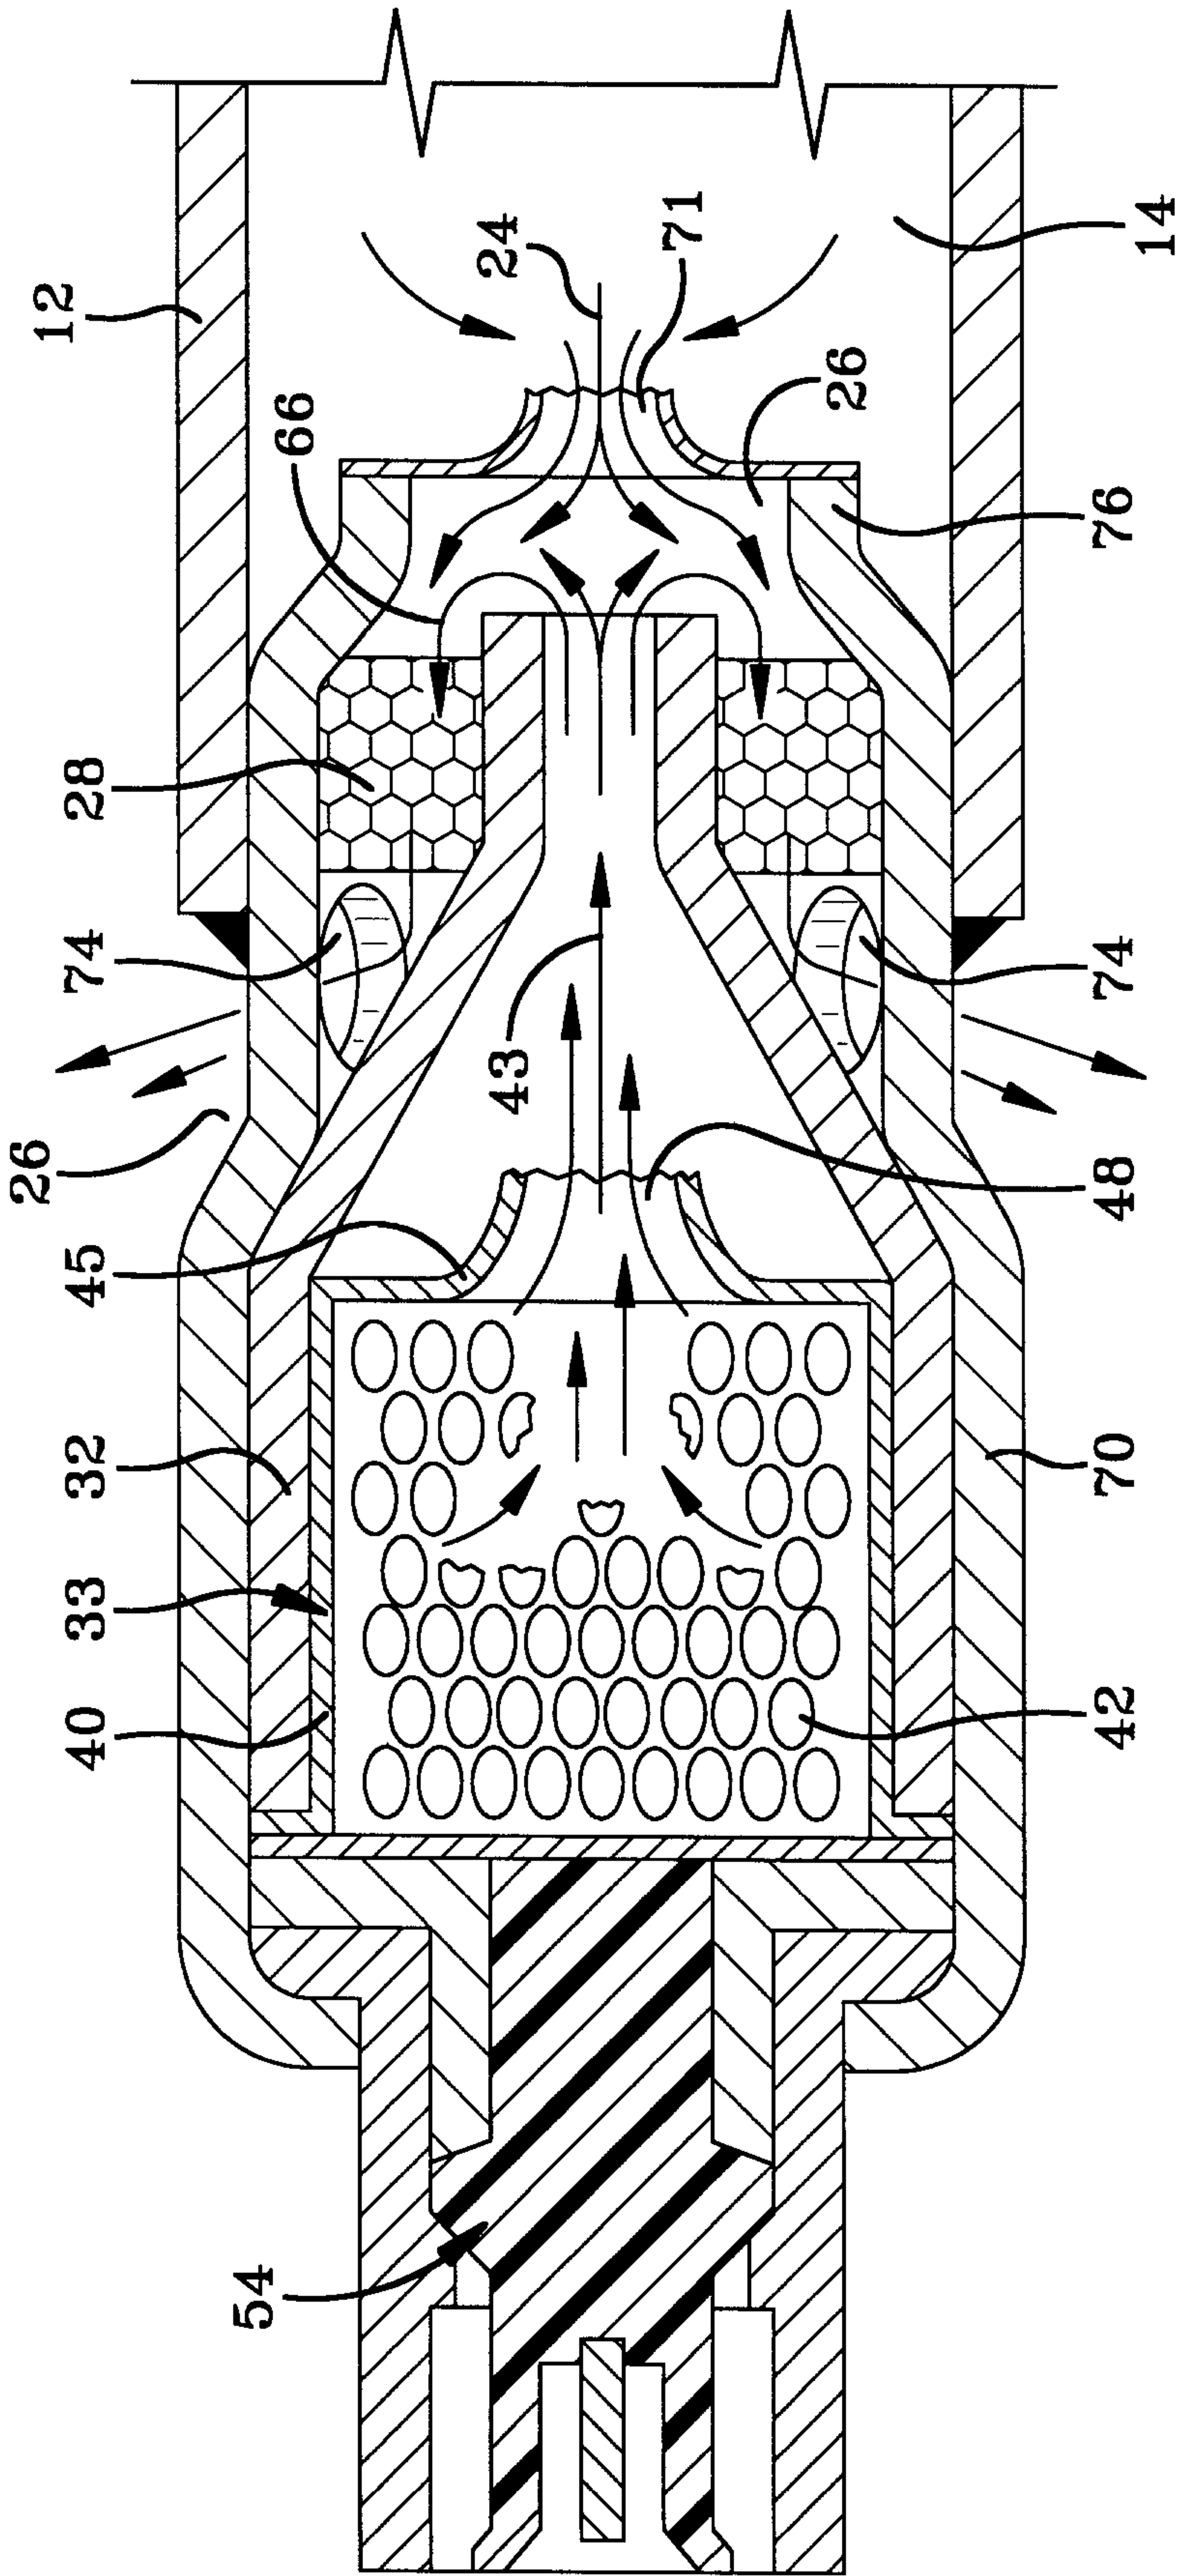


FIG-6

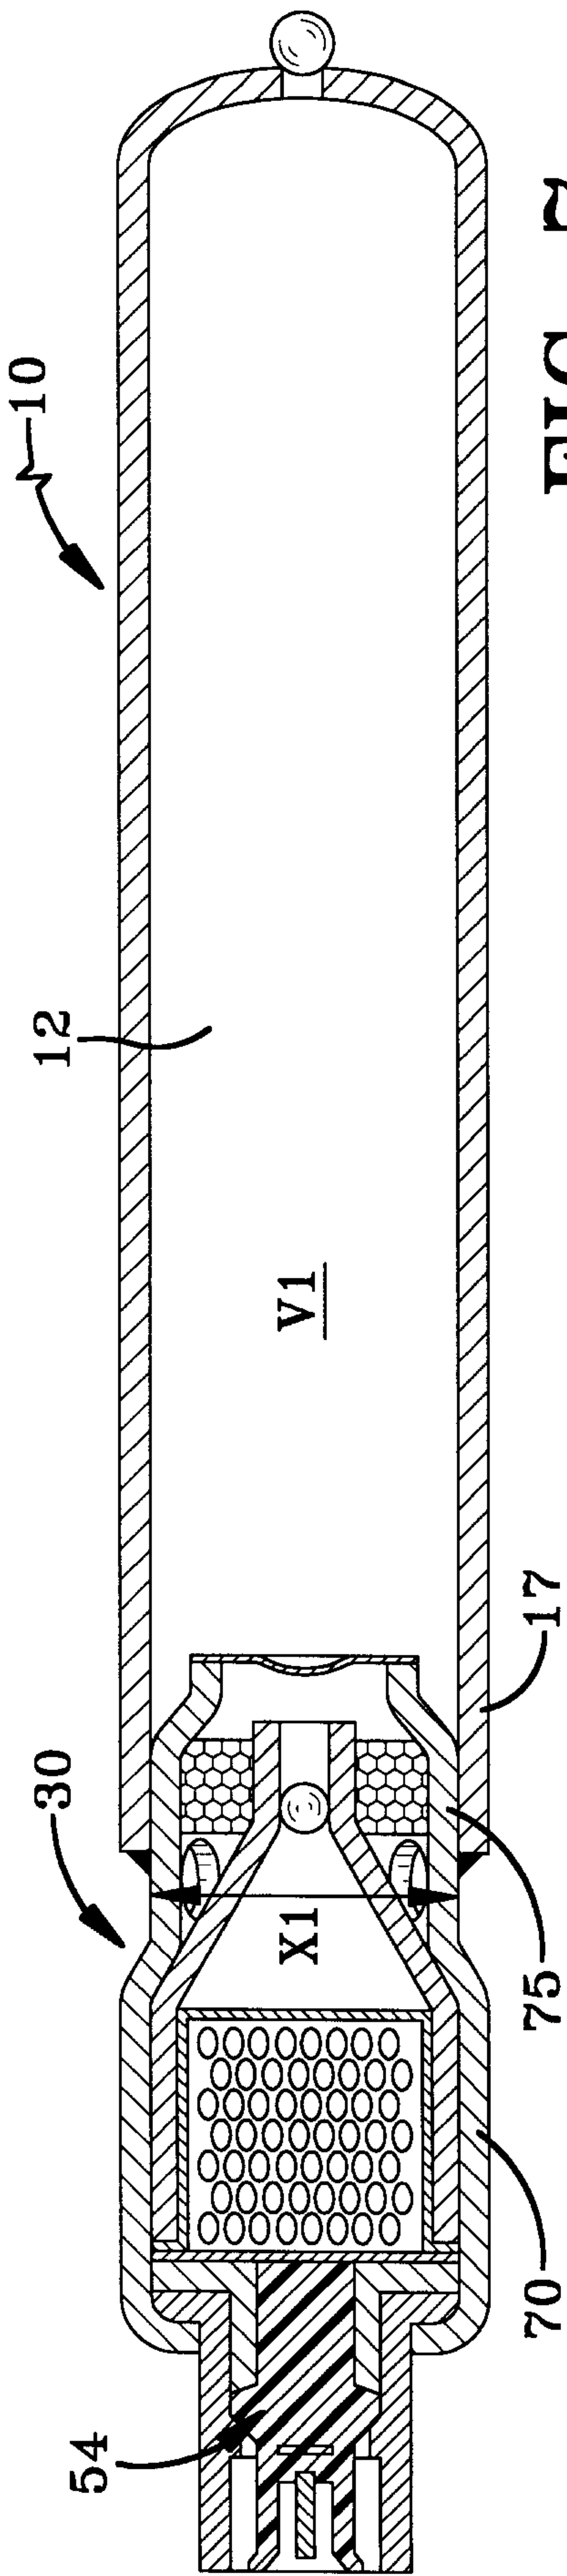


FIG-7

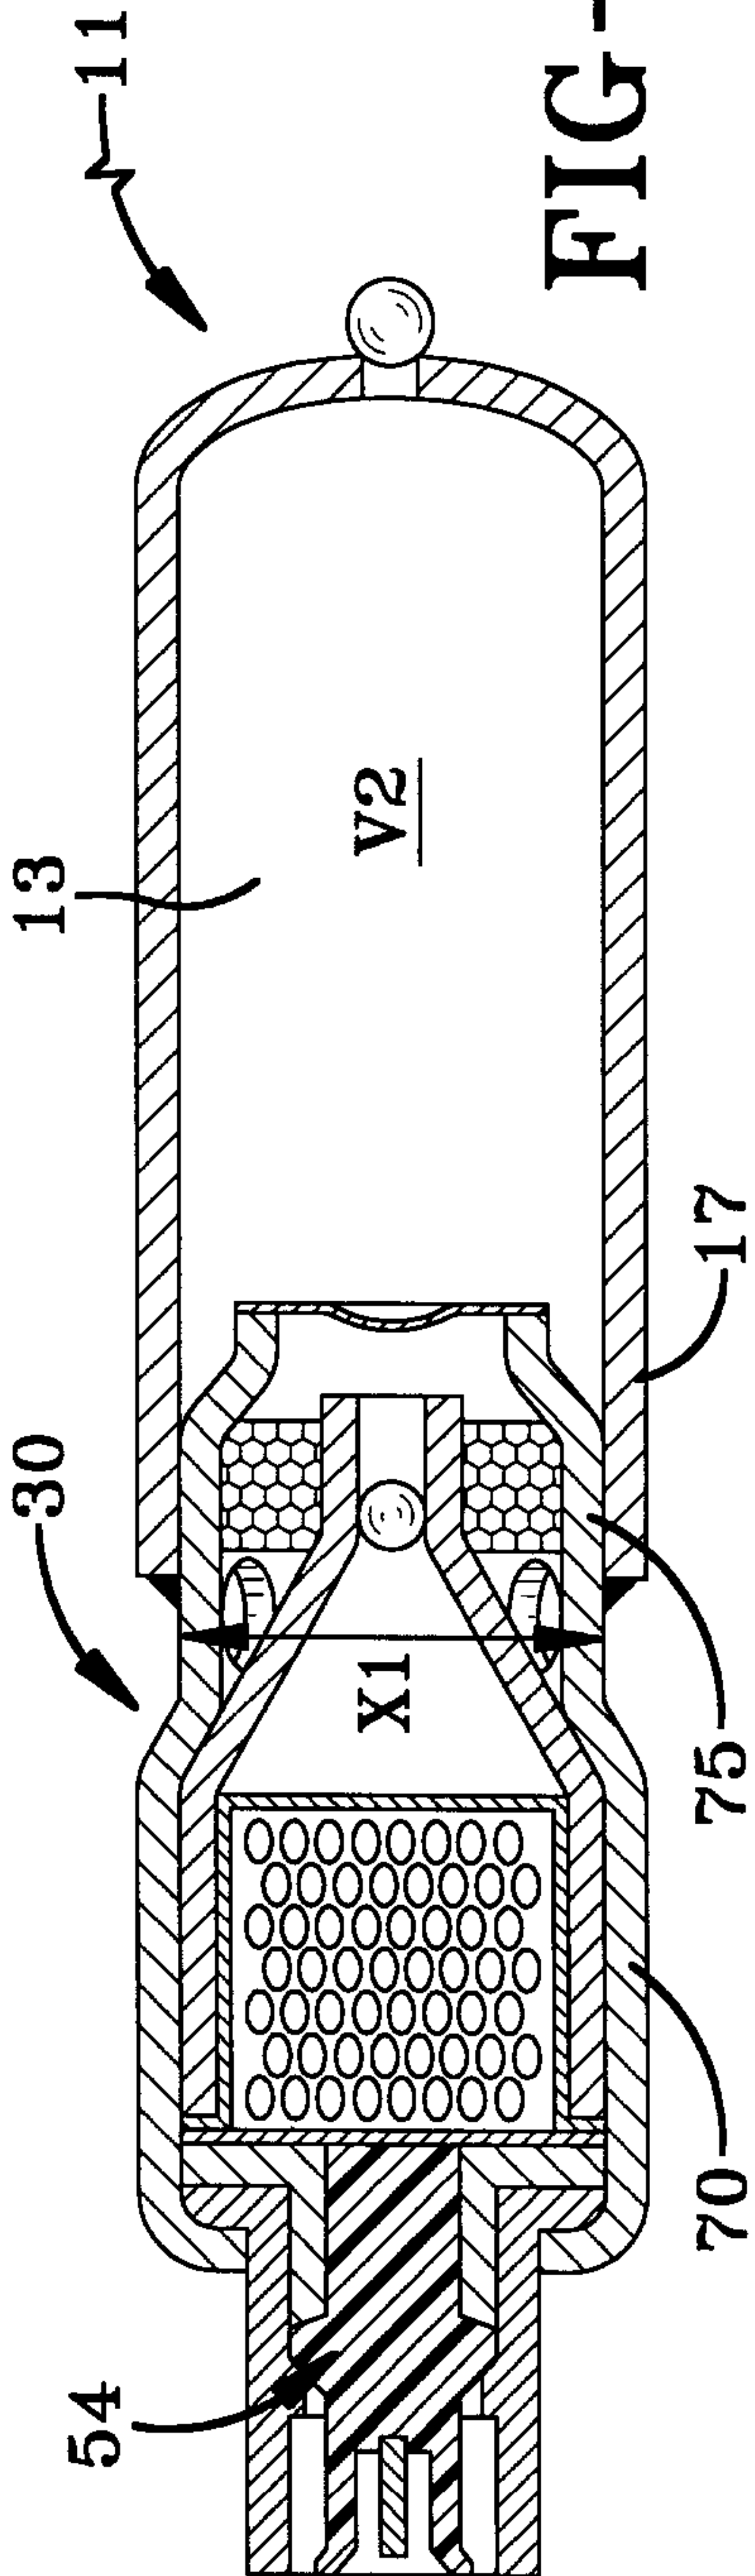


FIG-8

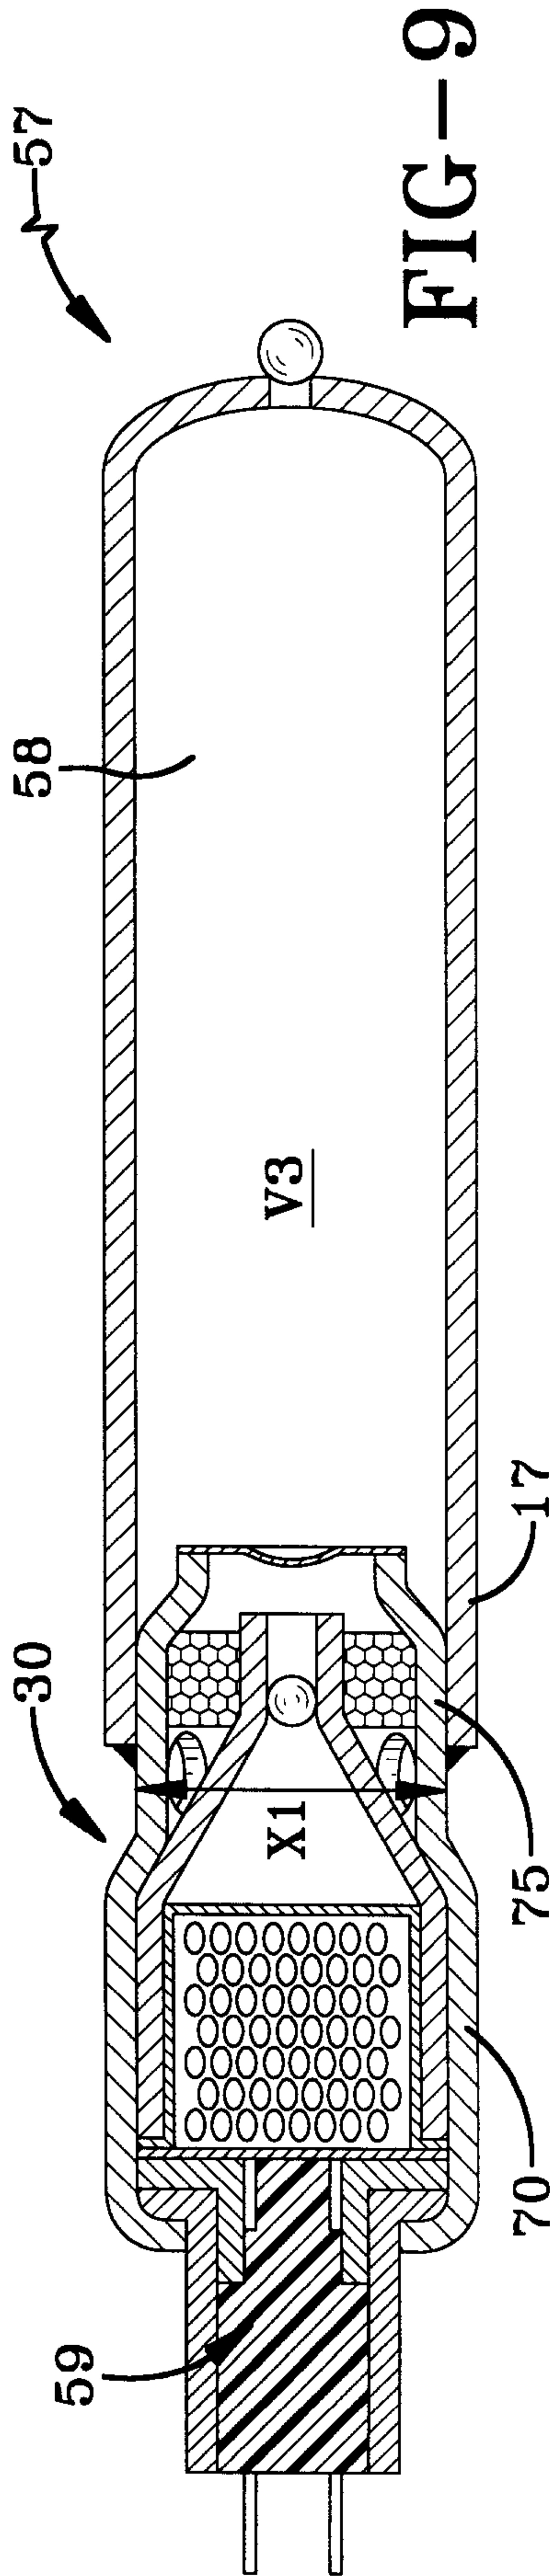


FIG-9

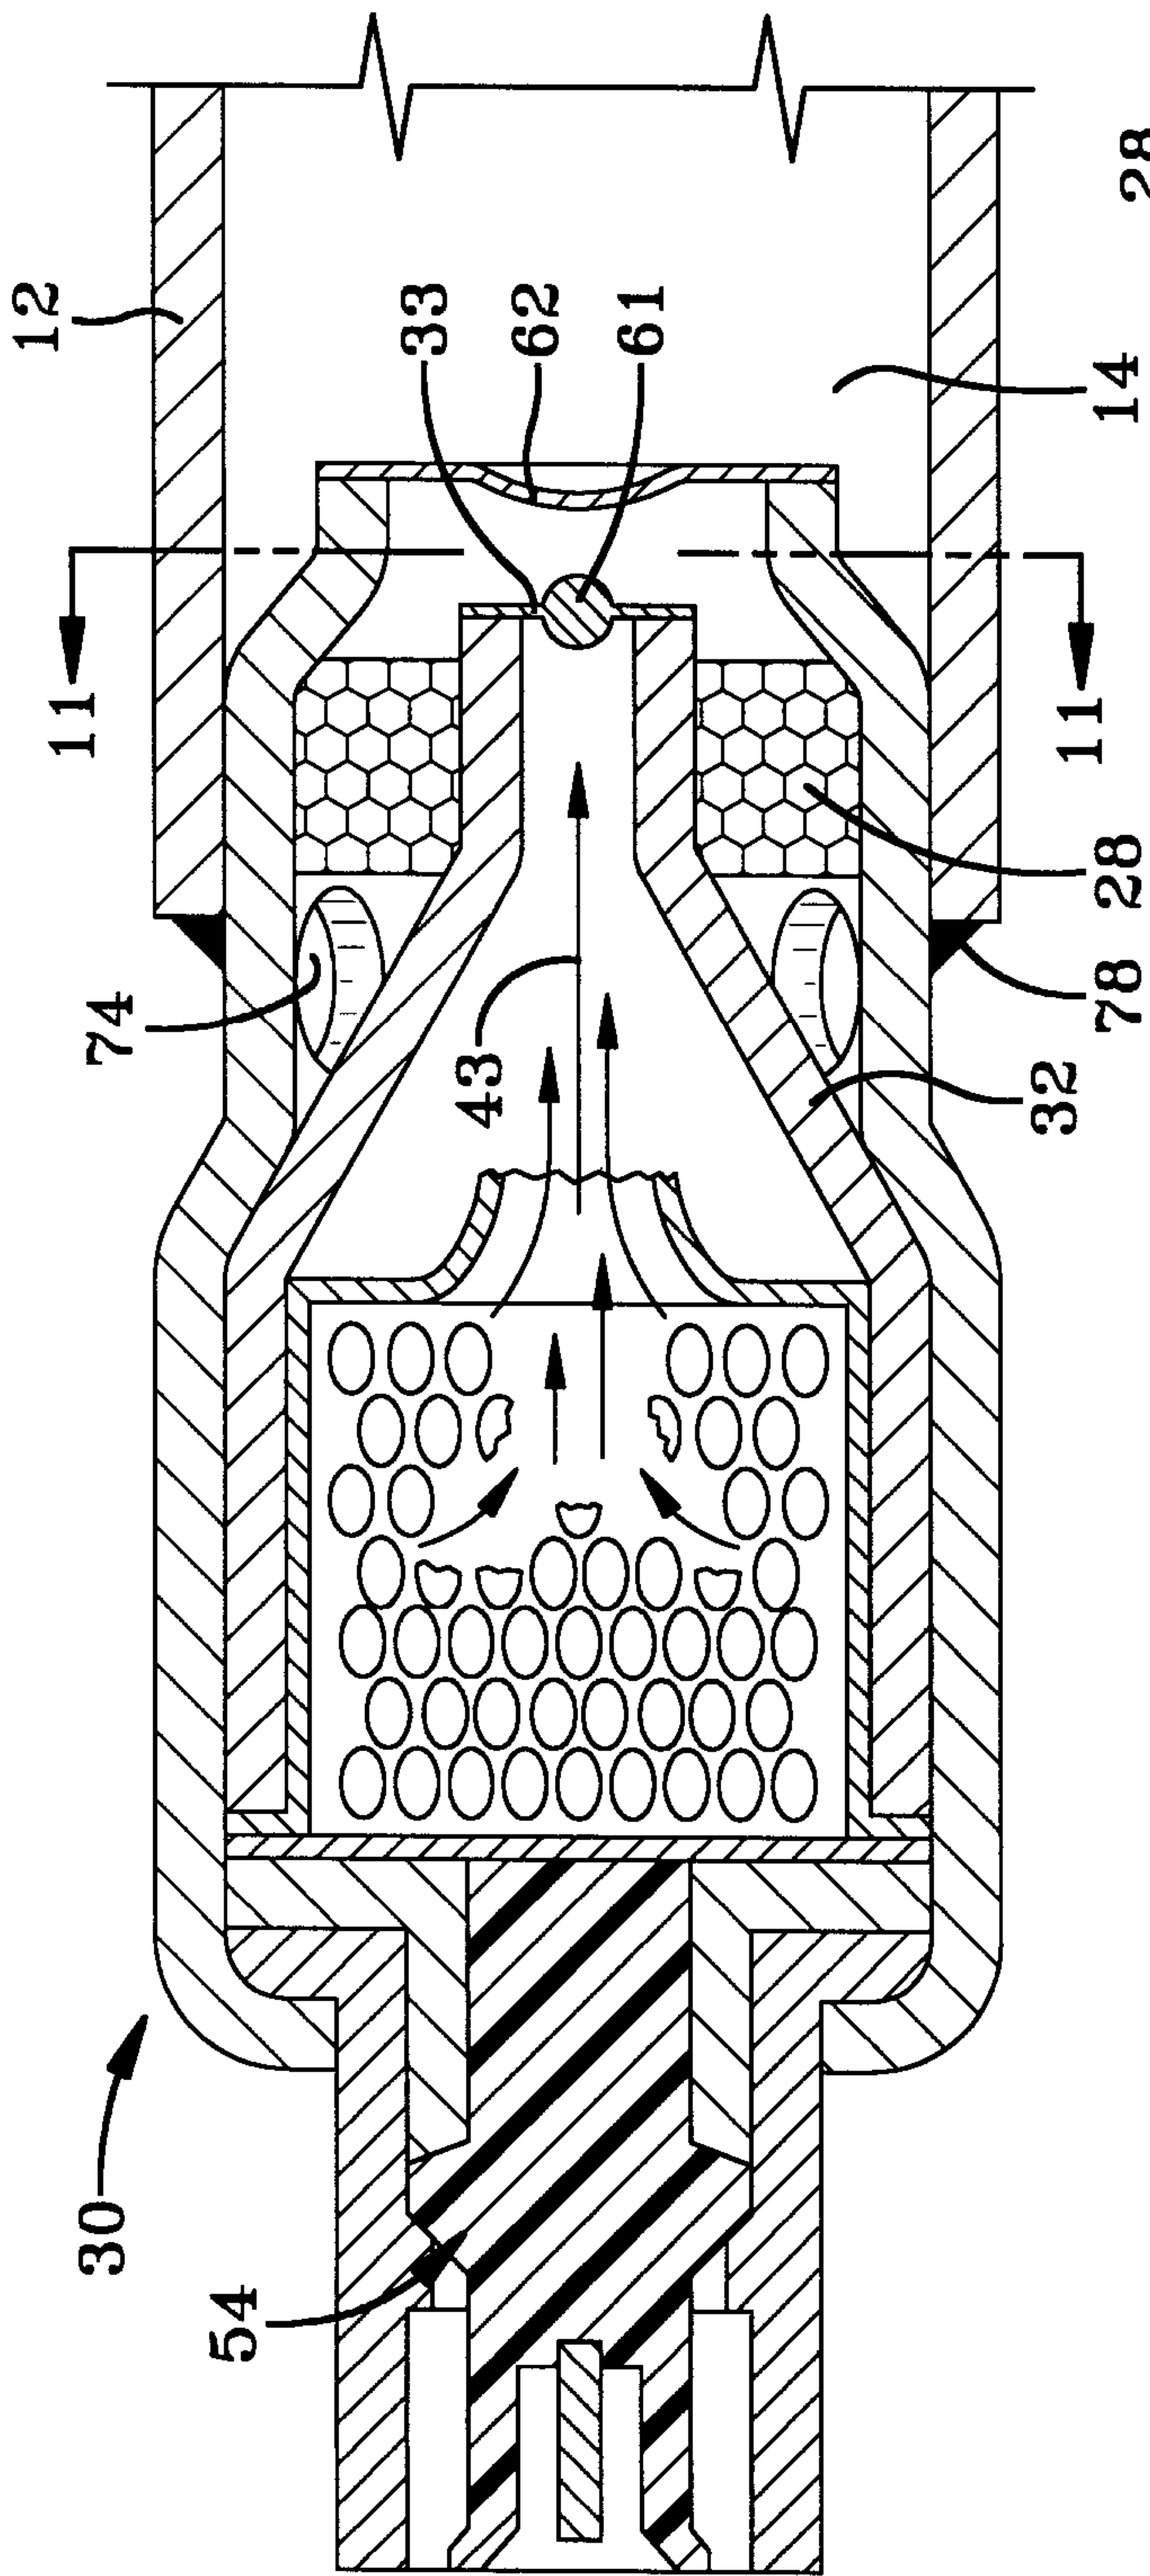


FIG-10

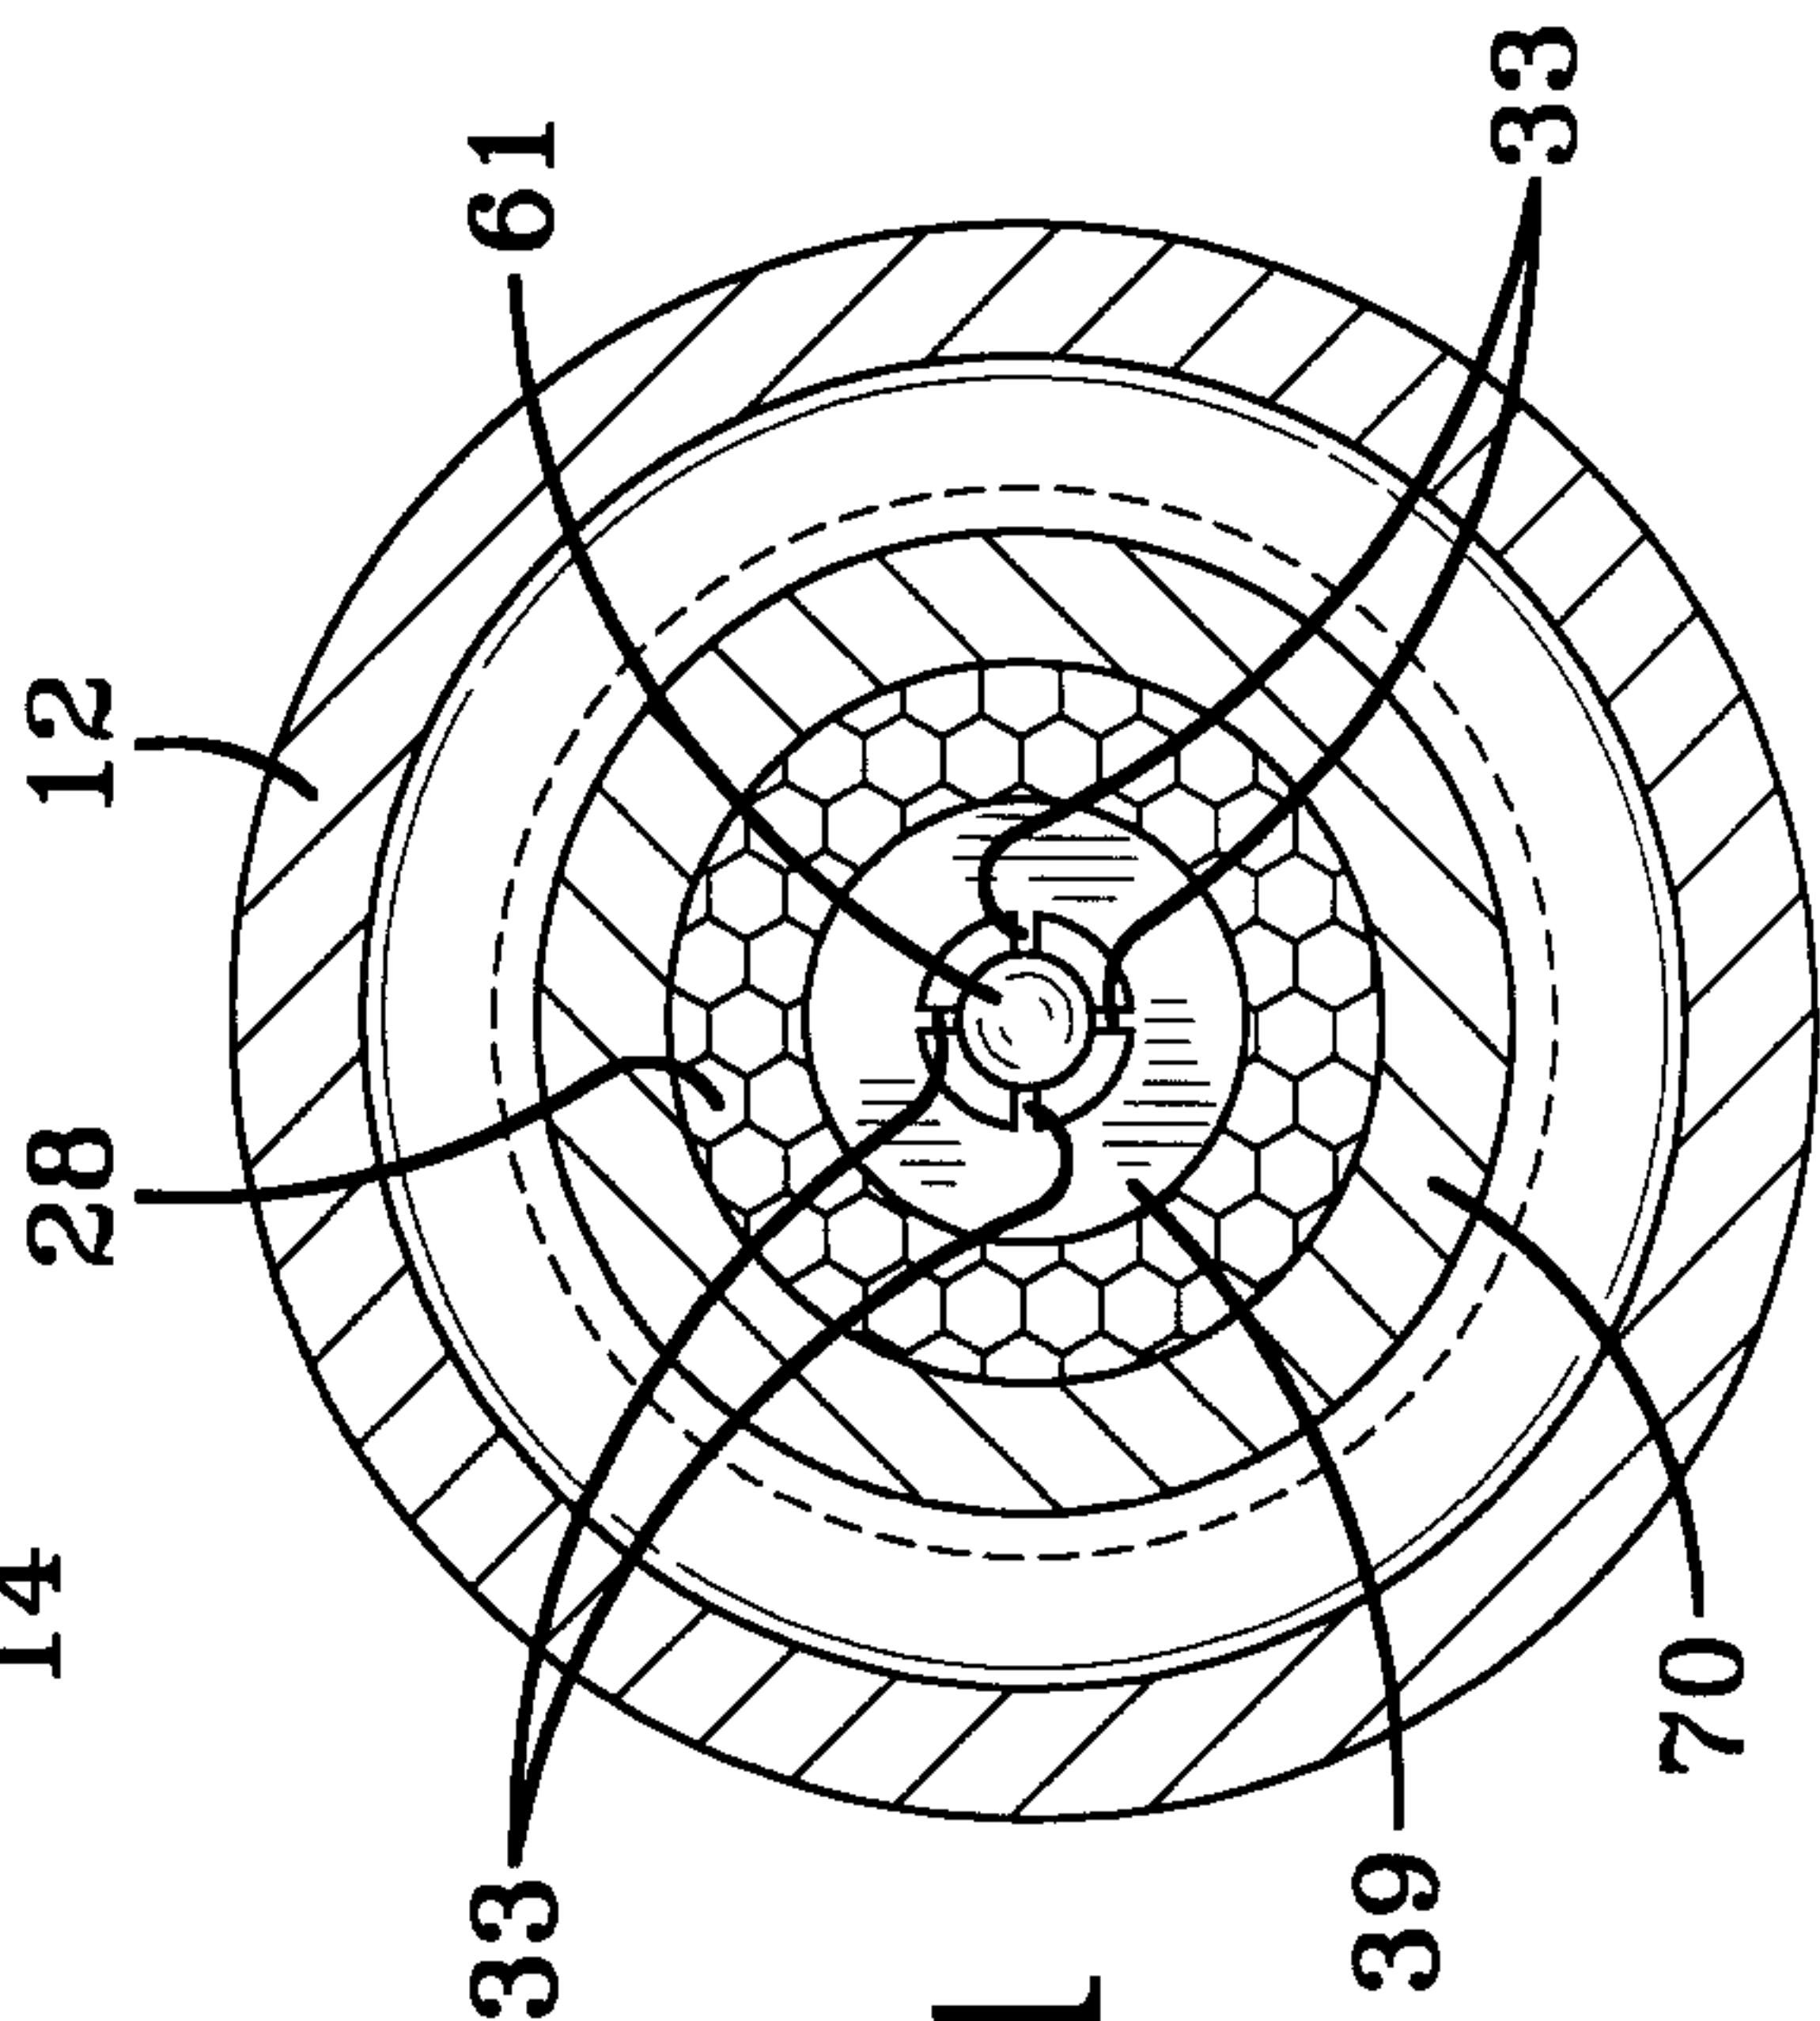


FIG-11

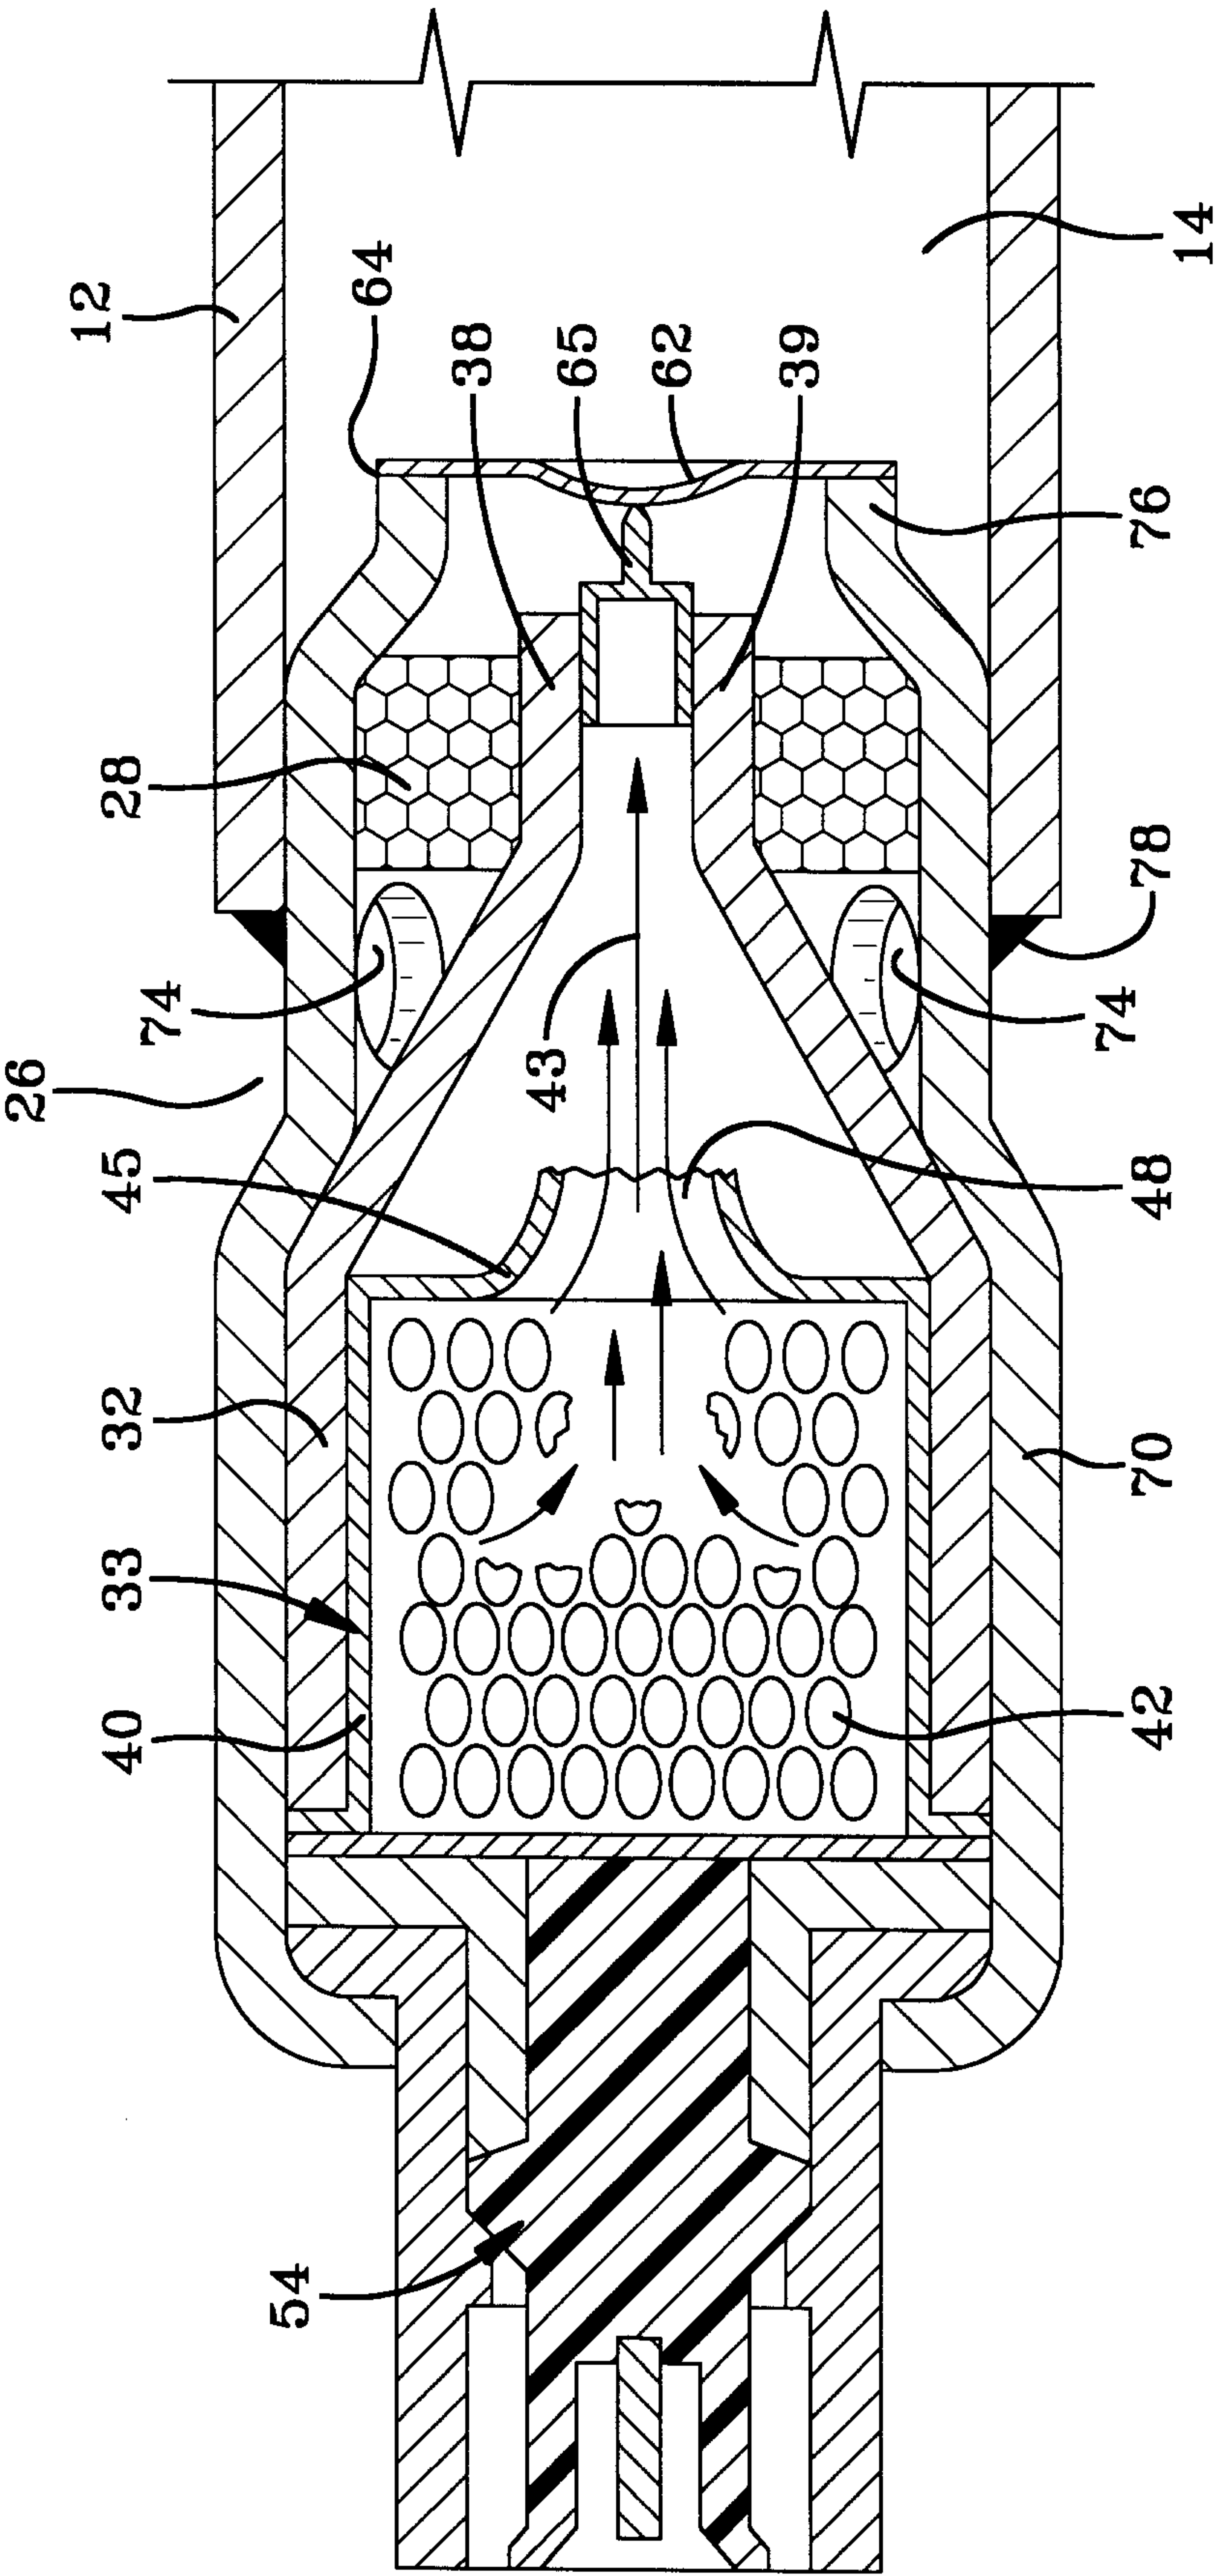


FIG-12

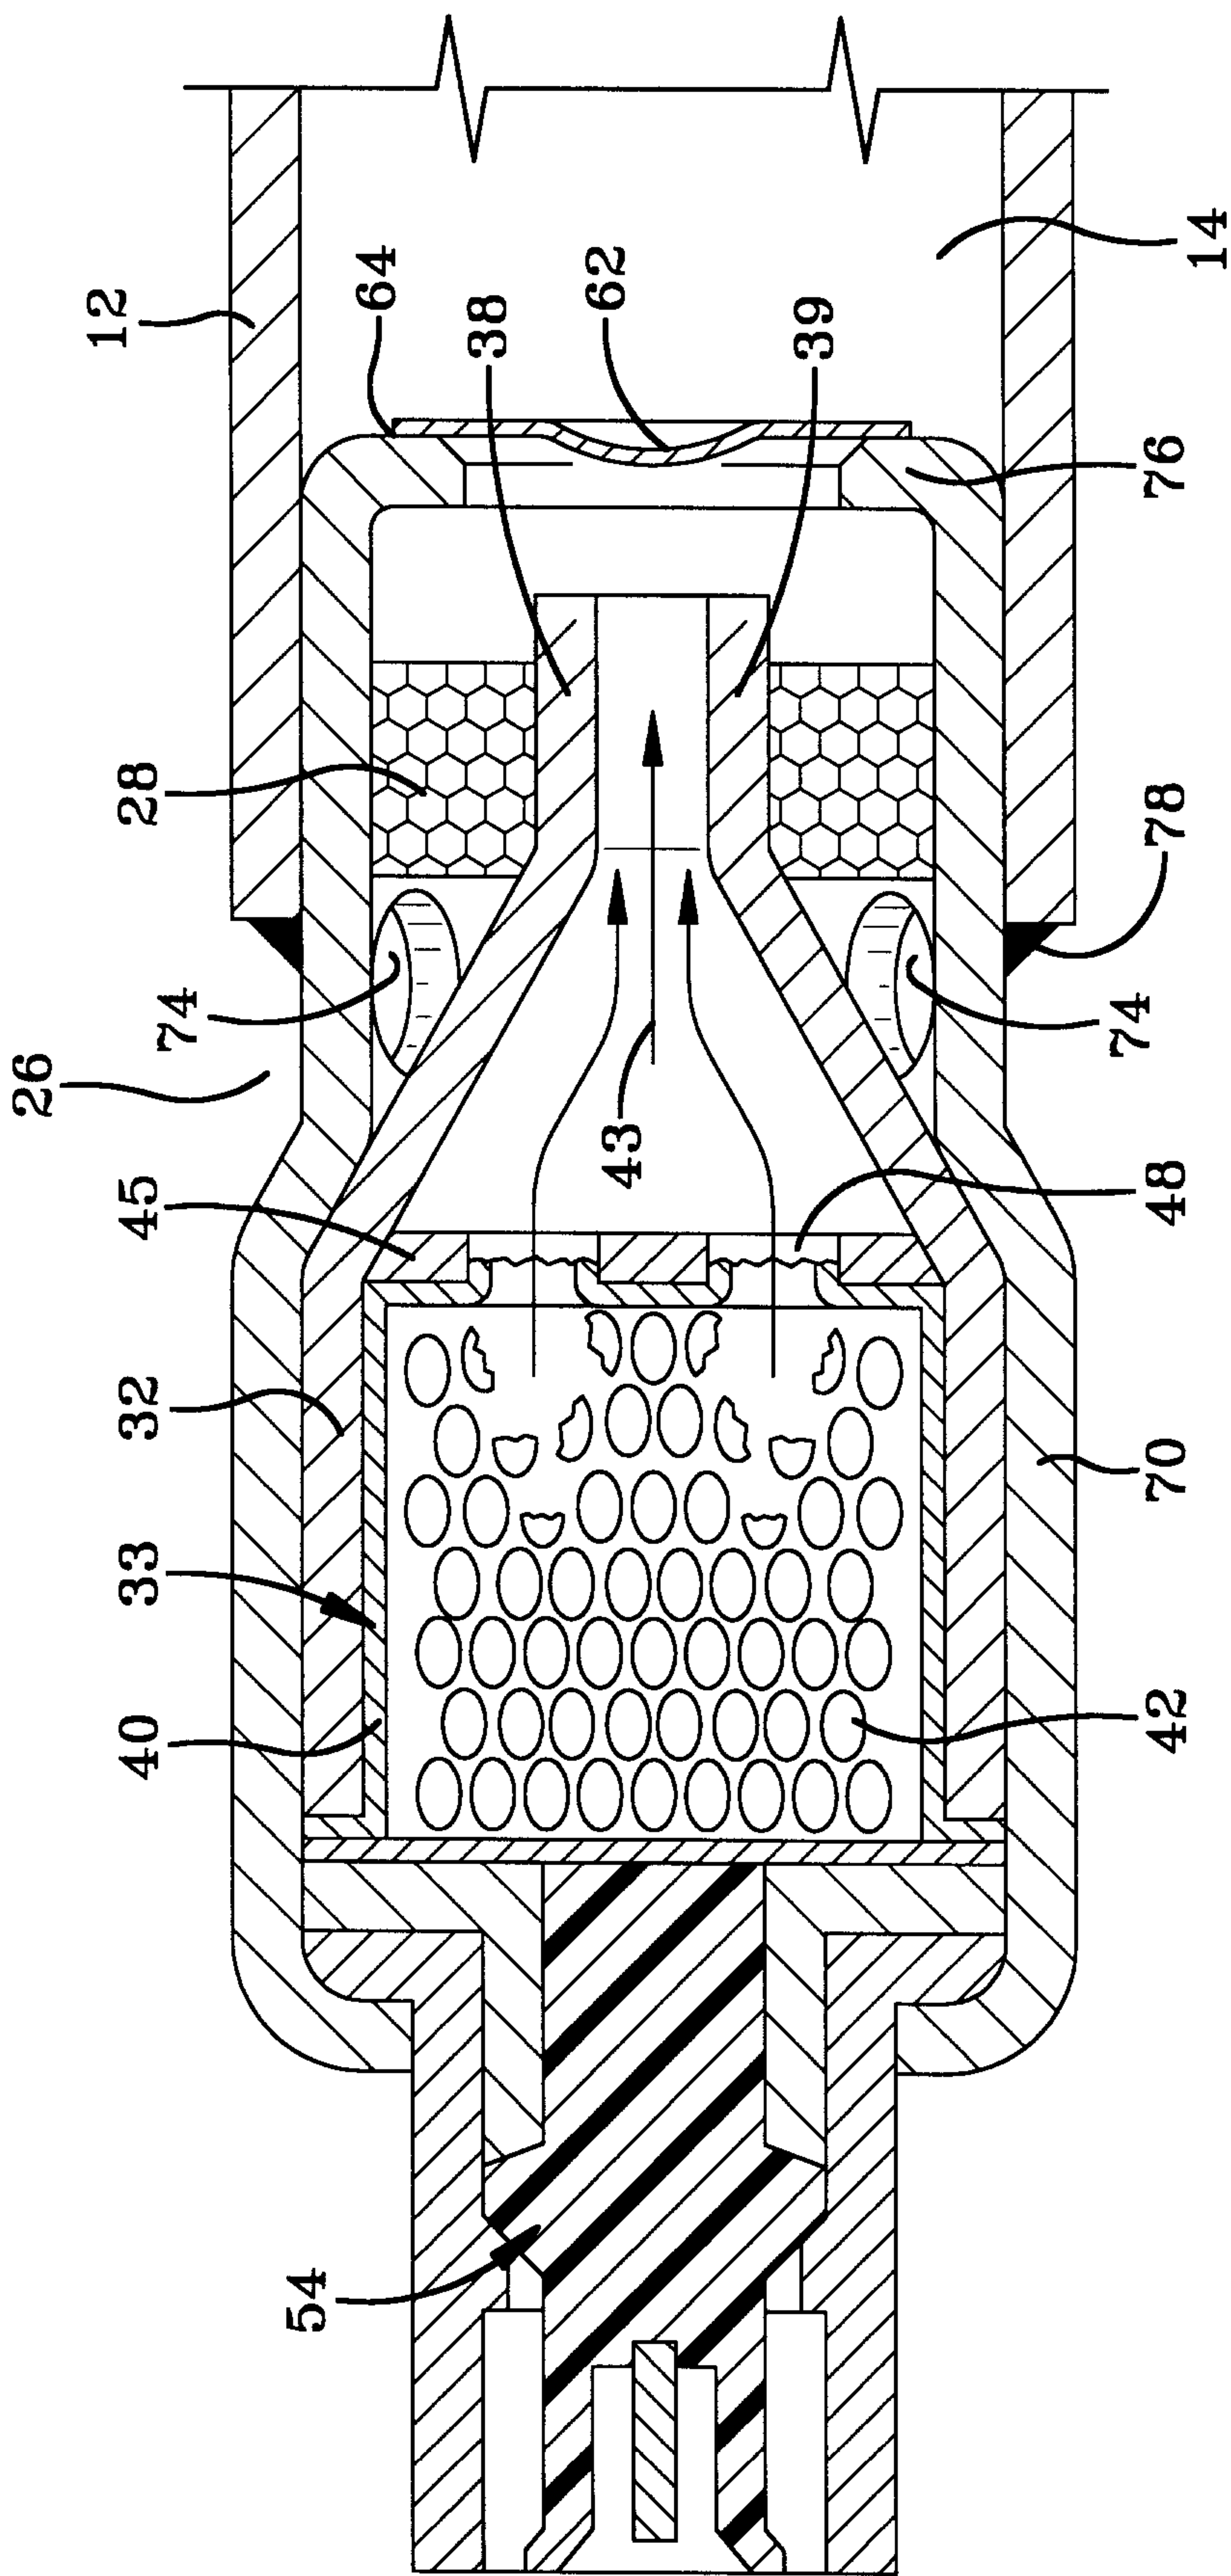


FIG-13

