(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
19 July 2007 (19.07.2007)

PCT

(10) International Publication Number
WO 2007/082245 A1

(51) International Patent Classification:
H04Q 7/38 (2006.01) *H04L 12/28* (2006.01)

(21) International Application Number:
PCT/US2007/060350

(22) International Filing Date: 10 January 2007 (10.01.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/758,010	11 January 2006 (11.01.2006)	US
60/758,011	11 January 2006 (11.01.2006)	US
60/758,012	11 January 2006 (11.01.2006)	US
60/845,052	15 September 2006 (15.09.2006)	US
60/845,051	15 September 2006 (15.09.2006)	US
60/863,304	27 October 2006 (27.10.2006)	US

(71) Applicant *(for all designated States except US)*: **QUALCOMM INCORPORATED** [US/US]; ATTN: INTERNATIONAL IP ADMINISTRATION, 5775 Morehouse Drive, San Diego, CA 92121 (US).

(72) Inventors; and

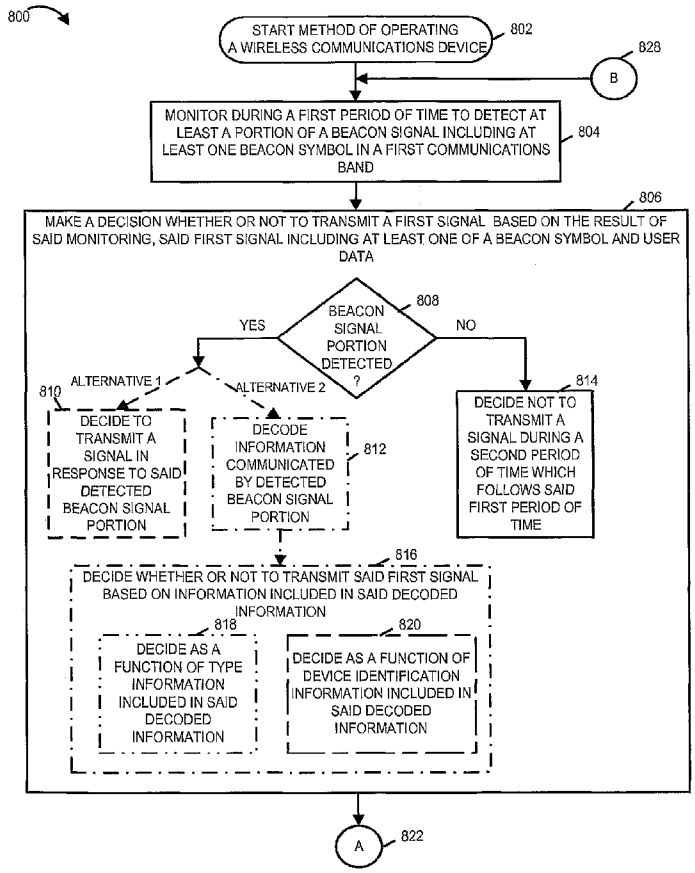
(75) Inventors/Applicants *(for US only)*: **LAROIA, Rajiv** [IN/US]; 7 Springcroft Road, Basking Ridge, NJ 07931 (US). **LANE, Frank** [US/US]; 208 Turkey Hill Road, Asbury, NJ 08802 (US). **LI, Junyi** [CN/US]; 357 Wren Lane, Bedminster, NJ 07921 (US). **RICHARDSON, Thomas** [US/US]; 420 Clark Street, South Orange, NJ 07079 (US).

(74) Agents: **OGROD, Gregory D.** et al.; ATTN: INTERNATIONAL IP ADMINISTRATION, 5775 Morehouse Drive, San Diego, CA 92121 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: COMMUNICATIONS METHOD AND APPARATUS FOR TRANSMITTING PRIORITY INFORMATION VIA BEACON SIGNALS



(57) **Abstract:** Wireless devices, e.g., in a cognitive radio network, discover and use locally available usable spectrum for communication. Beacon signaling facilitates available spectrum discovery and spectrum usage coordination. A wireless terminal, which may have entered a new area and powered up, monitors to detect for the presence of beacon signals in a first communications band. The wireless terminal makes a decision as to whether or not to transmit based on the monitoring result. In addition, when beacon signals are detected, decoded information recovered by the wireless terminal from the received beacon signals is used in making the transmission decision. The decoded information includes, e.g., type information indicating that a second band is allowed to be used for peer-peer communications and/or identification information identifying at least one of a wireless communications device which transmitted the beacon signal and a current user of the wireless communications device which transmitted the beacon signal.

WO 2007/082245 A1

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

COMMUNICATION METHODS AND APPARATUS RELATED TO WIRELESS TERMINAL MONITORING FOR AND USE OF BEACON SIGNALS

RELATED APPLICATIONS

[0001] The present application claims the benefit of U.S. Provisional Patent Application S.N. 60/758,011 filed on January 11, 2006, titled " METHODS AND APPARATUS FOR USING BEACON SIGNALS FOR IDENTIFICATION, SYNCHRONIZATION OR ACQUISITION IN AN AD HOC WIRELESS NETWORK", U.S. Provisional Patent Application S.N. 60/758,010 filed on January 11, 2006, titled " METHODS AND APPARATUS FOR FACILITATING IDENTIFICATION, SYNCHRONIZATION OR ACQUISITION USING BEACON SIGNALS", U.S. Provisional Patent Application S.N. 60/758,012 filed on January 11, 2006, titled " METHODS AND APPARATUS FOR USING BEACON SIGNALS IN A COGNITIVE RADIO NETWORK ", U.S. Provisional Patent Application S.N. 60/863,304 filed on October 27, 2006, U.S. Provisional Patent Application S.N. 60/845,052 filed on September 15, 2006, and U.S. Provisional Patent Application S.N. 60/845,051 filed on September 15, 2006, each of which is hereby incorporated by reference and all of which are assigned to the assignee hereof.

FIELD

[0002] The present invention is directed to methods and apparatus for signaling in wireless communication and, more particularly, to methods and apparatus for using beacon signals for detecting spectrum availability in a radio network, e.g., a cognitive radio network.

BACKGROUND

[0003] Wireless spectrum is an expensive and valuable resource but significant portions of spectrum often go unused. The concept of cognitive radio allows wireless devices to discover and use locally available and usable spectrum for communication. The wireless device should be able to sense its environment, including its location, and then be able to alter its communication parameters, including power and carrier frequency, so as to dynamically reuse available spectrum. A key technical challenge of

cognitive radio is to detect the availability of the spectrum in a robust and power efficient manner. For example, when a terminal just powers up or moves into a new area, the terminal may not have knowledge of the communication parameters or even technologies that may be currently used in the vicinity of the geographical area. The detection method has to be robust, e.g., against various uncertainties including the lack of timing and frequency synchronization. Power efficiency has great impact on the battery life of the terminals and is thus another important issue in wireless systems.

[0004] In view of the above discussion, it should be appreciated that there is a need for new and improved ways for detecting spectrum availability in a radio network.

SUMMARY

[0005] In accordance with various embodiments, before a wireless terminal starts to use a spectrum band, the wireless terminal is to scan a spectrum band to determine whether the spectrum band is available for use. The step of scanning includes searching for a beacon signal in the spectrum band.

[0006] In one exemplary embodiment, a beacon signal includes a sequence of beacon signal bursts in a spectrum band, each beacon bust including one or more beacon symbols. A beacon symbol is transmitted using a beacon symbol transmission unit. A beacon signal burst includes one or more beacon symbols with the number of beacon symbols occupying a small fraction of the beacon symbol transmission units of the beacon symbol burst, e.g., $\leq 10\%$. In some exemplary orthogonal frequency division multiplexing (OFDM) systems, each beacon symbol is a single tone over an OFDM symbol period. In some exemplary orthogonal frequency division multiplexing (OFDM) systems, each beacon symbol is a single tone over a small number, e.g., one, two, three or four, OFDM symbol periods. A beacon signal burst, in some embodiments, includes one or more tones, e.g., a single tone or a small number of tones such as two three or four tones, which are used to convey beacon symbols over a small number of transmission symbol time periods, e.g., one or two symbol transmission time periods. The beacon signal bursts are transmitted in an intermittent (i.e., non-continuous) manner so that there are a number of symbol periods between a first and a second beacon signal bursts. Successive beacon signal bursts may, and sometimes do, use different tones for the beacon symbols according to a predetermined or pseudo random tone hopping sequence.

[0007] In accordance with various embodiments, a beacon signal can be used to carry a small amount of information. In an exemplary OFDM system, information can be contained in the frequency of the tone(s) of the beacon symbol in a given burst, the time interval between successive bursts, and/or the tone hopping sequence. The information carried by the beacon signal, in various embodiments, includes at least one of the following about the transmitter: the identifier, the type, the priority level, the current transmission power value, and maximum power information, e.g., the maximum power that the transmitter is capable of transmitting.

[0008] If the wireless terminal has not detected any beacon signal in the step of searching for a beacon signal, then, in some embodiments, the spectrum band is available to be used by the terminal. Otherwise, in one embodiment, the wireless terminal is not allowed to use the spectrum band.

[0009] If the wireless terminal determines that a candidate spectrum band is available for use, the wireless terminal may start to use the spectrum, e.g., transmitting/receiving data or control signals or establishing peer-to-peer communication sessions with another wireless terminal. In one embodiment, the transmission power of the wireless terminal is a function of the type or the priority level of the wireless terminal.

[0010] In accordance with one aspect of various embodiments, while the wireless terminal is using the spectrum, the wireless terminal transmits its own user beacon signal in the spectrum band. The user beacon signals transmitted by different wireless terminals may be, and sometimes are, different from each other with information carried by the beacon signals. In one embodiment, wireless terminals are of different service priority levels and correspond to different user beacon signals.

[0011] In accordance with another aspect of various embodiments, while the wireless terminal is using the spectrum, the wireless terminal listens to the spectrum and attempts to detect a beacon signal, which may be sent by another wireless terminal. The wireless terminal may continuously be in the listening mode (i.e., on time) for a time interval of a few symbol periods. The on time is followed by an off time during which the terminal is in a power saving mode and does not receive any signal, e.g., turn off the receive modules. Alternatively, the wireless terminal may continuously be in the listening mode while the wireless terminal is using the spectrum.

[0012] In one embodiment, when a first wireless terminal detects the presence of a user beacon signal from a second wireless terminal, irrespective of whether the first wireless terminal is currently using the spectrum band or not, the wireless terminal needs to compare the priority level. If the priority level of the second wireless terminal is higher, the first wireless terminal considers the spectrum band unavailable for use. Moreover, the first wireless terminal shall stop using the spectrum band if the first wireless terminal is currently using the spectrum band, so that higher priority users or services can use the spectrum band without the interference from the first wireless terminal. If the priority level of the second wireless terminal is lower, the first wireless terminal considers the spectrum band available for use. If the first wireless terminal has not been using the spectrum, the first wireless terminal may start to transmit its own user beacon signal. In some embodiments, the first wireless terminal derives the timing and/or frequency of the second wireless terminal from the detected beacon signal, and then uses that information to determine the timing and/or frequency to transmit its own user beacon signal. Assuming that the second wireless terminal is also listening to detect a user beacon signal, advantageously, the above synchronization helps the user beacon signal of the first wireless terminal to be received by the second wireless terminal, so that the second wireless terminal will stop using the spectrum.

[0013] In accordance with another aspect of various embodiments, the wireless terminal estimates the path loss between the wireless terminal and the corresponding transmitter of the detected beacon signal. The estimation can be, and sometimes is, based on the received power of the beacon signal. If the path loss is sufficiently great, e.g., greater than a predetermined level, then the wireless terminal can use the spectrum band.

[0014] In accordance with various embodiments, in a geographic area, if any communication node, e.g., wireless terminal or base station, is in a data session in a spectrum band, then the node is required to transmit a node beacon signal in the spectrum band. In the data session, the node may be transmitting or receiving control or data signals. In the area, different nodes may co-exist, with each wireless terminal using at least one of a variety of services, such as cellular phone, wireless local loop, digital television, etc., which may be supported by different technologies.

[0015] An exemplary method of operating a wireless communications device, in accordance with various embodiments includes: monitoring during a first period of time

to detect at least a portion of a beacon signal including at least one beacon symbol in a first communications band; and making a decision whether or not to transmit a first signal based on the result of said monitoring, said first signal including at least one of a beacon symbol and user data. A exemplary wireless communications device, in accordance with various embodiments, includes:
a beacon detection module for detecting receipt of at least one beacon symbol communicated in a first communications band; and a beacon based decision module for determining whether or not to transmit a first signal based on an output of said beacon detection module, said output being a function of whether or not a beacon symbol was detected during a time period, said first signal including at least one of a beacon symbol and user data.

[0016] While various embodiments have been discussed in the summary above, it should be appreciated that not necessarily all embodiments include the same features and some of the features described above are not necessary but can be desirable in some embodiments. Numerous additional features, embodiments and benefits are discussed in the detailed description which follows.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] Figure 1 illustrates an exemplary cognitive radio network in a geographic area implemented in accordance with various embodiments.

[0018] Figure 2 illustrates a ladder diagram of an exemplary method of using beacon signals to control the use of the spectrum band in a cognitive radio network implemented in accordance with various embodiments.

[0019] Figure 3 illustrates different exemplary beacon signals, e.g., system and/or user beacon signals, implemented in accordance with various embodiments.

[0020] Figure 4 illustrates an example of utilizing timing synchronization information implemented in accordance with various embodiments.

[0021] Figure 5 illustrates a flowchart of a method used by an exemplary wireless terminal implemented in accordance with various embodiments.

[0022] Figure 6 illustrates one embodiment of monitoring for beacon signal bursts and transmitting a beacon burst in accordance with a predicted beacon monitoring interval.

[0023] Figure 7 illustrates a detailed illustration of an exemplary wireless terminal implemented in accordance with various embodiments.

[0024] Figure 8 comprising the combination of Figure 8A and Figure 8B is a drawing of a flowchart of an exemplary method of operating a wireless communications device, e.g., a wireless terminal such as a mobile node, in accordance with various embodiments.

[0025] Figure 9 is a drawing of an exemplary wireless terminal, e.g., mobile node, implemented in accordance with various embodiments.

[0026] Figure 10 is a drawing of a flowchart of an exemplary method of operating a wireless communications device in accordance with various embodiments.

[0027] Figure 11 is a drawing of an exemplary wireless terminal, e.g., mobile node, implemented in accordance with various embodiments.

[0028] Figure 12 is a drawing of a flowchart of an exemplary method of operating a wireless communications device in accordance with various embodiments.

[0029] Figure 13 is a drawing of an exemplary wireless terminal, e.g., mobile node, implemented in accordance with various embodiments.

DETAILED DESCRIPTION:

[0030] Figure 1 illustrates an exemplary cognitive radio communication network 100 implemented in accordance with various embodiments. Two wireless terminals, namely a first wireless terminal 102 and a second wireless terminal 104 are present in a geographic area 106. A system terminal 105; e.g., including a system beacon transmitter, is included in some embodiments. Some spectrum band is available to be used by the two terminals for the purpose of communication, e.g., peer-to-peer communication.

[0031] In a cognitive radio network, there is usually no network infrastructure. Various described novel methods, apparatus and features may be used in various radio networks but are particularly well suited for use in networks where infrastructure is limited or lacking, e.g., in a cognitive radio network where a wireless terminal may need to discover the information about the network. The wireless terminals may not have a common timing or frequency reference. Indeed, in such a network, the wireless terminals need to figure out whether a given spectrum band is available to be used by the wireless terminal in the current geographic area. A key idea of cognitive radio is to

let a wireless terminal sense its environment and discover available spectrum. Spectrum availability is a function of the environment.

[0032] Figure 2 illustrates a ladder diagram 200 of an exemplary method of using beacon signals to control the use of the spectrum band in a cognitive radio network implemented in accordance with various embodiments.

[0033] The vertical axis 201 represents time. There are three exemplary terminals, WT A 202, WT B 204 and WT C 206 in this exemplary cognitive radio network. Assume that initially none of the wireless terminals (204, 206, 208) are powered on.

[0034] First, wireless terminal A 202 is powered on. Before wireless terminal A 202 can use the spectrum band, it first scans the band to search for user beacon signals (208). Since wireless terminal A 202 is the only active terminal in the area, it does not detect any user beacon signal. Thus, wireless terminal A 202 determines that the spectrum band is available for use (210). Wireless terminal A 202 starts to use the spectrum (212). Wireless terminal A 202 broadcasts its user beacon signal to show its presence (214).

[0035] At a later time, wireless terminal B 204 is powered on. Before wireless terminal B 204 can use the spectrum band, it first scans the band to search for user beacon signals (216). Wireless terminal B 204 detects the user beacon signal sent by terminal A (218). Wireless terminal B 204 furthermore learns, e.g., from the detected beacon signal or another broadcast channel of wireless terminal A, that wireless terminal A is available for peer-to-peer communication (220). So wireless terminal B 204 determines to use the spectrum (222). Wireless terminals A and B (202, 204) set up a peer-to-peer session (224). Since both wireless terminals (202, 204) are active, they both broadcast user beacon signals (228 and 226), respectively. In some embodiments, either wireless terminal broadcasts its own user beacon signal. In other embodiments, the two terminals (202, 204) determine the priority level of their sessions and use that to determine the user beacon signals to be sent. For example, the session priority level is the maximum priority level of either terminal.

[0036] At a later time, wireless terminal C 206 is powered on. Before wireless terminal C 206 can use the spectrum band, it first scans the band to search for user beacon signals (230). Wireless terminal C 206 detects the user beacon signal sent by wireless terminal A 202 and/or by wireless terminal B 204 (232). Wireless terminal C

206 furthermore learns, e.g., from the detected beacon signal or another broadcast channel of wireless terminal A or B, that there is an ongoing session (234). Wireless terminal C 206 also learns the priority levels of detected beacon signals and compares them with its own priority level (236). If the priority level of wireless terminal C 206 is lower, then wireless terminal C 206 determines that the spectrum band is not available (238); otherwise wireless terminal C 206 may start to transmit its own user beacon signal. In such a case, both wireless terminals A and B (202, 204) will detect the user beacon signal from wireless terminal C 206, and have to stop/suspend their session and stop using the spectrum.

[0037] In accordance with various embodiments, a beacon signal includes a sequence of beacon signal bursts in a spectrum band, each beacon signal burst including one or more beacon symbols. A beacon symbol is transmitted using a beacon symbol transmission unit. A beacon signal burst includes a small number of beacon symbols, with the number of beacon symbols occupying a small fraction of the beacon symbol transmission units of the beacon signal burst. In some exemplary OFDM systems, a beacon symbol is a tone over an OFDM symbol period. In some exemplary OFDM systems, a beacon symbol is a tone over a small number, e.g., one, two, three, or four of successive OFDM symbol periods. In some embodiments, a beacon signal burst includes one or more tones, e.g., a single tone or a small number such as two, three or four tones, which are used to convey beacon symbols, over a small number of transmission symbol periods, e.g., one or two symbol periods. The wireless transmitter transmits the beacon signal bursts in an intermittent (i.e., non-continuous) manner so that there are a number of symbol periods between a first and a second beacon signal bursts. Figure 3 illustrates in drawing 300 and 350 exemplary beacon signals in an exemplary OFDM system.

[0038] In drawing 300 the horizontal axis 302 represents time and the vertical axis 304 represents frequency. A vertical column represents each of the tones in a given symbol period. Each small box 306 represents a tone-symbol, which is a single tone over a single transmission symbol period. In drawing 350 the horizontal axis 352 represents time and the vertical axis 304 represents frequency. A vertical column represents each of the tones in a given symbol period. Each small box 356 represents a tone-symbol, which is a single tone over a single transmission symbol period. A

minimum transmission unit in the OFDM symbol is a tone-symbol. In this exemplary embodiment, a beacon symbol transmission unit is an OFDM tone-symbol.

[0039] The beacon signal includes a sequence of beacon signal bursts, which are transmitted sequentially over time, each beacon symbol burst including one or more beacon symbols. A beacon signal burst, in various embodiments, includes a small number of tones which convey beacon symbols, e.g., a single tone, over a small number of transmission symbol periods, e.g., one or two symbol periods. Drawing 300 of Figure 3 shows four small black boxes (308, 310, 312, 314), each of which represents a beacon symbol. In this case, a beacon symbol uses the air link resources of one tone-symbol. In another exemplary embodiment, a beacon symbol uses one tone transmitted over two consecutive symbol periods and uses the air link resource of two OFDM tone-symbols.

[0040] The beacon symbol tone or tones of the beacon signal may vary (hop) from one burst to another. In accordance with various embodiments, the tone-hopping pattern, including the tones used for the beacon symbol or symbols and the inter-burst interval, of the beacon signal are, in some embodiments, a function of the transmitter, e.g., a terminal, and can be used as an identification of the transmitter or an identification of the type to which the transmitter belongs, or to indicate the transmission power or the power capability of the terminal.

[0041] Different user beacon signals are, in some embodiments, different from each other in at least one of the following ways: the periodicity of the beacon signal bursts, the tone or tones used for the beacon symbols in a beacon signal burst, and the hopping pattern of the beacon symbol tones used in successive beacon signal bursts.

[0042] For example, Figure 3 shows two exemplary beacon signals (324, 374). Consider that first beacon signal 324 is a first user beacon signal is sent by a first wireless terminal and includes beacon signal burst (316, 318, 320, 322) and beacon symbols (308, 310, 312, 314), respectively. The second beacon signal 374 sent by a second wireless terminal includes beacon signal bursts (366, 368, 370, 372) and beacon symbols (358, 360, 362, 364), respectively. The upper portion 300 shows a user beacon signal 324 sent by one wireless terminal, and the lower portion 350 shows another user beacon signal 374 sent by another wireless terminal. In the example, the two beacon signals have the same periodicity, but different tone hopping sequences. Specifically, the tones of the exemplary first wireless terminal beacon signal 324 follow a first slope,

and the tones of the exemplary second wireless terminal user beacon signal 374 follow a second slope, where the first slope is greater than the second slope.

[0043] In some embodiments exemplary system beacon signals, e.g., beacon signals from base stations and/or fixed location beacon transmitters, follow a first slope or first set of slopes and exemplary user beacon signals follow a second slope or second set of slopes, the first slope being different from the second slope and/or the first set of slopes being non-overlapping with the second set of slopes.

[0044] In one exemplary embodiment, suppose that a high priority service, e.g., law enforcement or fire department service, and a low priority service, e.g., general data service, share the spectrum band. Most of time, the high priority service does not have any activity, during which the spectrum band can be used entirely by the low priority service. However, when the high priority service needs to use the spectrum, it is desired that the low priority service shall stop. The sessions associated with the low priority service shall be terminated. To achieve this objective, in accordance with various embodiments, terminals associated with different service levels use different user beacon signals, e.g., to signal different priority levels.

[0045] Consider an exemplary embodiment. When the wireless terminal is scanning the spectrum band for availability, or when the wireless terminal has already been in a communication session using the spectrum band, the wireless terminal shall keep on searching for user beacon signals. If the wireless terminal detects the presence of a user beacon signal with higher priority than its own, then the wireless terminal considers the corresponding spectrum band as unavailable for use. The wireless terminal shall terminate the communication session, if any, and may proceed to scan another candidate spectrum band. This results in clean spectrum band to be used by high priority terminals or services.

[0046] Drawing 400 of Figure 4 illustrates one embodiment of monitoring for beacon signal bursts implemented in accordance with various embodiments. The wireless terminal listens to the spectrum band and attempts to detect a user beacon signal, which may be sent by a different wireless terminal. The wireless terminal may continuously be in the listening mode for a time interval of a few symbol periods, which is called on time. The on time (402) is followed by an off time (406) during which the wireless terminal is in a power saving mode and does not receive any signal. In the off time, the wireless terminal may completely turn off the receive modules. When the off

time 406 ends, the wireless terminal resumes to the on time 404 and starts to detect for beacon signals again. The above procedure repeats.

[0047] In some embodiments, the length of an on time interval is shorter than that of an off time interval. In one embodiment, an on time interval is less than or equal to 1/5 of an off time interval. In one embodiment, the length of each of the on time intervals are the same, and the length of each of the off time intervals are also the same.

[0048] The length of an off time interval depends, in some embodiments, on the latency requirement for a first wireless terminal to detect the presence of another (second) wireless terminal, if the second wireless terminal is actually present in the vicinity of the first wireless terminal. The length of an on time interval is determined so that the first wireless terminal has a great probability of detecting at least one beacon signal burst in the on time interval. In one embodiment, the length of the on time interval is a function of at least one of the transmission duration of a beacon signal burst and the duration between successive beacon signal bursts. For example, the length of the on time interval is at least the sum of the transmission duration of a beacon signal burst and the duration between successive beacon signal bursts.

[0049] Figure 5 illustrates a flowchart 500 of an exemplary method of operating a wireless terminal used by an exemplary first wireless terminal implemented in accordance with various embodiments. Operation of the exemplary method starts in step 501, where the first wireless terminal is powered on and initialized, and proceeds to step 502.

[0050] In step 502, the exemplary first wireless terminal may start by scanning the spectrum band to search for user beacon signals. Then, in step 504, the first wireless terminal checks whether a user beacon signal from a second wireless terminal has been detected. If the answer is NO, then operation proceeds from step 504 to step 516, where the first wireless terminal determines that the spectrum is available for use. Otherwise, the first wireless terminal has found a beacon signal and operation proceeds from step 504 to step 506, where the first wireless terminal compares the priority level of the detected user beacon signal with its own priority level. In step 508, the first wireless terminal checks whether the detected beacon has higher priority level than its own priority level. If the answer is NO, then operation proceeds from step 508 to step 516, where the first wireless terminal determines that the spectrum is available for use. Otherwise, operation proceeds from step 508 to step 510. In step 510 the first wireless

terminal determines the path loss from the first wireless terminal to the second wireless terminal.

[0051] In one embodiment, the beacon signal carries the information about the transmission power of the second wireless terminal. Then the first wireless terminal can determine the path loss from the transmission power and the received power measured by the first wireless terminal. In a special case where each of the beacon signals are sent at the same power level, the beacon signal itself does not have to carry the information about the transmission power of the second wireless terminal. The first wireless terminal can determine the path loss from the known, e.g., predetermined beacon level, transmission power and the received power measured by the first wireless terminal. Operation proceeds from step 510 to step 512.

[0052] In step 512, the first wireless terminal determines whether the path loss is sufficiently high e.g., in relation to a predetermined stored path loss level. If the answer is yes, then operation proceeds from step 512 to step 516. In step 516 the first wireless terminal determines that the spectrum is available for use. Otherwise, operation proceeds from step 512 to step 514, where the first wireless terminal determines that the spectrum is not available for use.

[0053] Once the first wireless terminal determines that the spectrum is available for use in step 516, the first wireless terminal may use the spectrum to establish communication links, e.g., peer-to-peer communication. Operation proceeds from step 516 to step 518 in which the first wireless terminal starts to use the spectrum including transmitting its own user beacon signal. Meanwhile, the first wireless terminal shall periodically be in the on time mode, e.g., with respect to receiver operation, and scan the spectrum band to search for user beacon signals as indicated by step 502.

[0054] Usually the terminals in the cognitive radio network do not have a common source from which each of the terminals can derive synchronization information. In accordance with a feature of various exemplary embodiments, the wireless terminals use the timing and/or frequency information derived from a system beacon signal transmitted by a special transmitter, e.g., transmitted by a fixed location system terminal including a beacon transmitter. The fixed location system terminal may or may not be coupled to other network nodes, and may or may not include additional wireless functions in addition to transmitting the beacon signal. In some embodiments, the fixed location system terminal's sole function is to transmit a system beacon signal

to be used as a reference by wireless terminals. Advantageously, the terminals now have a common timing and/or frequency reference, thereby being synchronized with each other. To elaborate, drawing 600 of Figure 6 illustrates an example of utilizing timing synchronization information implemented in accordance with various embodiments.

[0055] The horizontal axis 601 represents time. A second wireless terminal transmits its user beacon signal 608, which includes a sequence of beacon signal bursts, 602, 604, 606, and so on. Now, suppose that a first wireless terminal is powered on and detects those beacon bursts. Assume that the first wireless terminal has higher priority level than the second terminal, and that the first wireless terminal intends to use the spectrum.

[0056] The first wireless terminal predicts the on time intervals of the second wireless terminal's receiver, during which the second wireless terminal monitors for other user beacon signal. The prediction is a function of the estimated timing of the detected beacon burst 602, 604 and 606. For example, in Figure 6, the on time interval of a terminal starts from a time instance that has known time offset 612 from the beginning of a beacon signal burst sent by the same wireless terminal. Therefore, once the first wireless terminal has determined the timing of the beacon bursts of the second wireless terminal transmitter, it is possible to determine the timing of the second wireless terminal receiver from the known relationship.

[0057] Rather than sending its user beacon signal at a randomly chosen time instance, in the exemplary scenario shown in Figure 6, the first wireless terminal chooses to transmit (614) at the time during which the second wireless terminal is listening (610). The second wireless terminal detects the user beacon signal sent by the first wireless terminal, and then decides to stop using the spectrum band because its priority level is lower.

[0058] Note that in the absence of the above synchronization, it may take much longer time for the second wireless terminal to detect the user beacon signal sent by the first wireless terminal. Otherwise, the second wireless terminal may need to stay in the listening mode for a much longer time interval in order to reduce the latency of detection. The synchronization thus helps the wireless terminals to detect beacon signals much more rapidly and in a more power efficient manner.

[0059] Figure 7 provides a detailed illustration of an exemplary wireless terminal 700 implemented in accordance with various embodiments. The exemplary wireless terminal 700, depicted in Figure 7, is a detailed representation of an apparatus that may be used as any one of wireless terminals 102 and 104 depicted in Figure 1. In the Figure 7 embodiment, the wireless terminal 700 includes a processor 704, a wireless communication interface module 730, a user input/output interface 740 and memory 710 coupled together by bus 706. Accordingly, via bus 706 the various components of the terminal 700 can exchange information, signals and data. The components 704, 706, 710, 730, 740 of the wireless terminal 700 are located inside a housing 702.

[0060] The wireless communication interface 730 provides a mechanism by which the internal components of the wireless terminal 700 can send and receive signals to/from external devices and another terminal. The wireless communication interface 730 includes, e.g., a receiver module 732 and a transmitter module 734, which are coupled via a duplexer 738 with an antenna 736 used for coupling the wireless terminal 700 to other terminals, e.g., via wireless communications channels.

[0061] The exemplary wireless terminal 700 also includes a user input device 742, e.g., keypad, and a user output device 744, e.g., display, which are coupled to bus 706 via the user input/output interface 740. Thus, user input/output devices 742, 744 can exchange information, signals and data with other components of the wireless terminal 700 via user input/output interface 740 and bus 706. The user input/output interface 740 and associated devices 742, 744 provide a mechanism by which a user can operate the wireless terminal 700 to accomplish various tasks. In particular, the user input device 742 and user output device 744 provide the functionality that allows a user to control the wireless terminal 700 and applications, e.g., modules, programs, routines and/or functions, that execute in the memory 710 of the wireless terminal 700.

[0062] The processor 704 under control of various modules, e.g., routines, included in memory 710 controls operation of the terminal 700 to perform various signaling and processing as discussed below. The modules included in memory 710 are executed on startup or as called by other modules. Modules may exchange data, information, and signals when executed. Modules may also share data and information when executed. In the Figure 7 exemplary embodiment, the memory 710 of wireless terminal 700 includes a signaling/control module 712 and signaling/control data 714.

[0063] The signaling/control module 712 controls processing relating to receiving and sending signals, e.g., beacon signals, user data signals, messages, etc., management of state information storage, retrieval, processing, scanning, transmission control, priority determination, path loss determination, device identification, user identification, and spectrum availability determination. Signaling/control data 714 includes state information, e.g., parameters, status and/or other information relating to operation of the terminal. In particular, the signaling/control data 714 includes various configuration information 916, e.g., configuration information of type, priority level, transmission power, transmitter power capability, etc. of the terminal. The module 712 may, and sometimes does, access and/or modify the data 714, e.g., update the configuration information 716. The module 712 also includes module 711 for scanning a spectrum band to search for system beacon signal in the band; module 713 for transmitting user beacon signal; module 715 for comparing the priority levels of different user beacon signals; module 717 for determining path loss.

[0064] Figure 8 comprising the combination of Figure 8A and Figure 8B is a drawing of a flowchart 800 of an exemplary method of operating a wireless communications device, e.g., a wireless terminal such as a mobile node, in accordance with various embodiments. The wireless communications device is, e.g., a portable wireless communications device, which may be operated off battery power. The wireless communications device is, e.g., wireless terminal 900 of Figure 9.

[0065] Operation starts in step 802, where the wireless communications device is powered on and initialized and proceeds to step 804. In step 804, the wireless communications device monitors, during a first period of time, to detect at least a portion of a beacon signal including at least one beacon symbol in a first communications band.

[0066] Operation proceeds from step 804 to step 806. In step 806, the wireless communications device makes a decision as to whether or not to transmit a first signal based on the result of said monitoring, said first signal including at least one of a beacon symbol and user data. In some embodiments the first signal is a beacon signal. In some embodiments, said user data includes at least one of text data, audio data, image data, game data, and spread sheet data.

[0067] Step 806 includes sub-steps 808, 810, 812, 814, and 816. In sub-step 808, the wireless communications device determines if a beacon signal portion

including at least one beacon symbol was detected in the monitoring of step 804. If a beacon symbol portion was detected operation proceeds from step 808 to one of alternative sub-steps 810 and 812. If a beacon symbol was not detected, operation proceeds from step 808 to step 814, where the wireless communications device decides not to transmit a signal during a second period of time which follows said first period of time.

[0068] In sub-step 810, the wireless communications device decides to transmit a signal in response to said detected beacon signal portion. In alternative, sub-step 812, the wireless communications device decodes information communicated by the detected beacon signal portion. Operation proceeds from sub-step 812 to sub-step 816. In sub-step 816, the wireless communications device decides whether or not to transmit said first signal based on information included in said decoded information. In various embodiments, sub-step 816 includes one or more of sub-steps 818 and 820. In sub-step 818, the wireless communications device decides as a function of type information included in said decoded information. In various embodiments, the type information indicates whether or not a second band is allowed to be used for peer to peer communications. In some embodiments, the type information identifies a second band which is allowed to be used for peer to peer communications. In sub-step 820, the wireless communications device decides as a function of device identification information included in said decoded information. In some such embodiments, the device identification information identifies at least one of the wireless communications device and a user that is currently using the wireless communications device.

[0069] Operation proceeds from step 806, via connecting node A 822, to step 824. In step 824, the wireless communications device proceeds differently depending upon whether or not the decision of step 806 was to transmit. If the decision was to transmit, then operation proceeds from step 824 to step 826. If the decision was not to transmit, then operation proceeds from step 824, via connecting node B 828, to step 804, where additional monitoring is performed.

[0070] In step 826, the wireless communications device transmits at least a portion of said first signal during a second time period. In some embodiments, the first signal is transmitted in a second band which is the same as the first communications band. For example, the received beacon signal portion and the first signal, e.g., transmitted beacon signal portion may correspond to peer nodes in a peer to peer

communications network and both of the peer nodes may be using the same frequency band for user beacon signaling. In some other embodiments, the first signal is communicated in a second band which is different from the first communications band. For example, the received beacon signal portion may be communicated from a base station or fixed beacon signal transmitter using a different communications band than the band into which the communications device transmits its user beacon signaling. In some such embodiments, the first and second communications bands are separated and disjoint in the frequency domain. In various embodiments, the first and second communications bands are different size frequency bands.

[0071] In some embodiments, step 826 includes sub-step 830, in which the wireless communications device transmits at least one beacon symbol. For example, the at least one beacon symbol is a single beacon symbol or a small number of beacon symbols in a beacon burst, e.g., with the beacon symbols occupying < 10% of the beacon symbol transmission units of the beacon burst.

[0072] Operation proceeds from step 826 to one of steps 832 and 834. In step 832, the wireless communications device transmits user data, e.g., during a third time period, into a third communications band, said third time period following said second time period. For example, during the second time period the wireless communications device transmits at least a portion of the first signal including at least one beacon symbol, e.g., to identify its presence, and during the third time period, the wireless communications device transmits user data to a peer. In various embodiments, the third frequency band is the same as the second frequency band. For example, the wireless communications device may transmit both a user beacon signal and user data for peer to peer communications into the same frequency band. In some other embodiments, the second frequency band is different from the third frequency band. For example, there may be distinct frequency bands for user beacon signals and for user data signals.

[0073] Operation proceeds from step 832 to step 834. In step 834, the wireless communications device monitors during a fourth time period to detect at least a portion of an additional beacon signal from another wireless communications device, e.g., from a peer in a peer to peer communications network. Step 834 includes, in some embodiments, sub-step 836. In sub-step 836, the wireless communications device monitors a second frequency band, different from said first frequency band, for at least a portion of an additional beacon signal.

[0074] Figure 9 is a drawing of an exemplary wireless terminal 900, e.g., mobile node, implemented in accordance with various embodiments. Exemplary wireless terminal 900 may be any of the exemplary wireless terminals (102, 104) of system 100 of Figure 1.

[0075] Exemplary wireless terminal 900 includes a receiver module 902, a transmitter module 904, a processor 906, user I/O devices 908, and memory 910 coupled together via a bus 912 over which the various elements may interchange data and information. Memory 910 includes routines 914 and data/information 916. The processor 906, e.g., a CPU, executes the routines 914 and uses the data/information 916 in memory 910 to control the operation of the wireless terminal 900 and implement methods.

[0076] Receiver module 902, e.g., an OFDM receiver, is coupled to receive antenna 903 via which the wireless terminal receives signals from other wireless communications devices, e.g., other wireless terminals and/or system terminals such as base stations and/or fixed location beacon transmitters. Received signals include, e.g., beacon signals from wireless terminals, beacon signals from system nodes, and handshaking signals and user data signals from wireless terminals, e.g., in peer-to-peer communications.

[0077] Transmitter module 904, e.g., an OFDM transmitter, is coupled to transmit antenna 905, via which the wireless terminal 900 transmits signals to other wireless communications devices, e.g., peer nodes. In some embodiments, the same antenna is used for receiver module 902 and transmitter module 904, e.g., with the receiver and transmitter modules (902, 904) being coupled to the antenna via a duplexer module. Signals transmitted by the transmitter module 904 include, e.g., a first signal such as a beacon signal or beacon signal portion including at least one beacon symbol. Other signals transmitted by transmitter module 904 include peer-to-peer communication session establishment signals and user data signals.

[0078] User I/O devices 908 include, e.g., microphone, keypad, keyboard, switches, camera, speaker, display, etc. User I/O devices 908 allow a user of wireless terminal 900 to input data/information, access output data/information, and control at least some functions of the wireless terminal 900.

[0079] Routines 914 include communications routines 918 and wireless terminal control routines 920. The communications routines 918 implement various

communications protocols used by the wireless terminal. Wireless terminal control routines 920 include a beacon detection module 922, a beacon based decision module 924, a beacon signaling decoding module 926, a beacon signal generation module 928, a control module 930 and a wireless terminal beacon detection module 932.

[0080] Beacon detection module 922 detects receipt of one or more beacon symbols communicated in a first communications band. Beacon based decision module 924 determines whether or not to transmit a first signal based on an output of the beacon detection module 922, said output being a function of whether or not a beacon symbol was detected during a time period, said first signal including at least one of a beacon symbol and user data. Beacon signaling decoding module 926 decodes information communicated by a detected beacon signal portion, at least one detected beacon symbol being part of said detected beacon signal portion. In some embodiments, the beacon based decision module 924 makes the decision whether or not to transmit a first signal based on decoded information generated by the decoding performed by the beacon signal decoding module. In some embodiments, the beacon based decision module 924 makes a decision not to transmit a signal during a second time period which follows a first time period when at least a portion of a beacon signal including a beacon symbol is not detected by said beacon detection module during the first period of time. In some embodiments, the beacon based decision module 924 makes the decision whether or not to transmit a signal based on type information included in the decoded information, said type information indicating that a second band is allowed to be used for peer-to-peer communications. In some embodiments, the beacon based decision module 924 makes the decision whether or not to transmit a signal based on device information included in the decoded information.

[0081] Beacon signal generation module 928 generates beacon signals, said generated beacon signals communicating an identifier used to identify at least one of: i) said wireless communications device and ii) a user that is currently using said wireless communications device. Control module 930 controls the band in which the receiver and transmitter operate. Control module 930 includes a user data transmission control module 931. In some embodiments said receiver and transmitter are controlled to use the same band in a time division multiplexed basis. In some embodiments, the receiver is controlled to use a first communications band and the transmitter is controlled to use a second communications band, said first and second communications bands being

different bands. In some embodiments, the first and second communications bands are separated and disjoint in the frequency domain but have a predetermined relationship. In some such embodiments, the first and second communications bands are different size frequency bands.

[0082] User data transmission control module 931 controls the transmission of user data into a third communications band during a third period. In some embodiments, the third time period follows a second time period, said second time period being a time period during which at least a portion of said first signal is transmitted, said first signal including at least one beacon symbol. In some embodiments, the third communications band is the same as the second communications band. In some embodiments, the third communications band is different from the second communications band.

[0083] Wireless terminal beacon detection module 932 detects beacon symbols from other wireless communications devices during a fourth period of time, at least a portion of said fourth period of time being different from a time period during which said beacon detection module 922 is operated. The other wireless communications devices are, e.g., peer nodes in a peer to peer communications network. In some embodiments, the wireless terminal beacon detection module 932 monitors a second communications band, said second communications band being a different frequency band than said first communications band.

[0084] Data/information 916 includes detected beacon signal information 934, information recovered from decoded beacon signal portions (information recovered from a decoded beacon signal portion corresponding to a 1st beacon signal 936, ..., information recovered from a decoded beacon signal portion corresponding to an Nth beacon signal 938), transmission decision information 940, device identification information 950, user identification information 952, first signal information 954, current time period information 960, receiver frequency band selection information 962, transmitter frequency band selection information 964, peer to peer network communication session information 966 and system data/information 968.

[0085] Information recovered from a decoded beacon signal portion corresponding to a 1st beacon signal 936 includes, in some embodiments, one of more of type information 942 and identification information 944. The type information 942 is, e.g., frequency band type designation information. The type information 942 may, and

sometimes does indicate that the band type is designated to be used for peer-peer communications. The identification information 944 is, e.g., device identification information and/or user identification information.

[0086] Information recovered from a decoded beacon signal portion corresponding to a N^{th} beacon signal 938 includes, in some embodiments, one of more of type information 946 and identification information 948. The type information 946 is, e.g., frequency band type designation information. The identification information 948 is, e.g., device identification information and/or user identification information.

[0087] First signal information 956 includes, in some embodiments, one or more of beacon symbol information 956 and user data 358. Beacon symbol information 956 includes, e.g., information identifying the beacon transmission units used to convey beacon symbols, e.g., within beacon bursts of the beacon signal included in the first signal, tone hopping pattern information, and/or time information corresponding to the beacon symbols. User data 958 includes data information such as voice data, other types of audio data, image data, text data, file data, etc. of the first signal, e.g., corresponding to data symbols of the first signal.

[0088] System data/information 968 includes timing/frequency structure information 970, beacon decoding information 976, decision criteria information 978 and beacon encoding information 980. Timing/frequency structure information 970 includes frequency bands' information 972 and time periods' information 974. Frequency bands' information 972 includes information identifying a plurality of different frequency bands, which are at times used by the wireless terminal. Frequency bands' information 372 also includes information relating beacon signals to frequency bands. In some embodiments, different bands are used for different purposes. For example, one frequency band, in some embodiments, is used for beacon signaling and another frequency band is used for user data signaling. In some embodiments, at least some frequency bands are used for multiple purposes, e.g., user data beacon signaling and wireless terminal beacon signaling. In some embodiments, the same band is used, at different times for different purposes, e.g., a frequency band typically used for wireless communications via a base station, in some embodiments, is at times, used for peer-to-peer communications. Time periods' information 974 includes, e.g., information identifying in a timing structure when the wireless terminal should receive beacon signals, transmit beacon signals, and communicate user data signals to a peer node.

[0089] Beacon decoding information 976, e.g., information mapping various potential detected beacon signals to recovered information, e.g., frequency band type designation information, device ID information, user ID information, and/or priority level information, is used by beacon signal decoding module 926 to recover information (936, ...938), e.g., when processing beacon symbol information 934.

[0090] Figure 10 is a drawing of a flowchart 1000 of an exemplary method of operating a wireless communications device in accordance with various embodiments. The wireless communications device is, e.g., a portable wireless terminal such as a mobile node which may be operated using battery power. The wireless communications device is, wireless terminal 1100 of Figure 11. Operation starts in step 1002, where the wireless communications device is powered on and initialized. Operation proceeds from start step 1002 to step 1004. In step 1004, the wireless communications device monitors during a first period of time to detect at least a portion of a beacon signal including at least one beacon symbol in a first communications band. In some embodiments, a beacon signal portion communicates an identification value. For example, the identification value can be one of a device identifier and a user identifier.

[0091] Then, in step 1006, operation proceeds differently depending upon whether or not at least a portion of a beacon signal including at least one beacon symbol was detected in step 1004. If a beacon signal portion was detected, operation proceeds from step 1006 to step 1004 to monitor during another first period of time. However, if a beacon signal portion was not detected, then operation proceeds from step 1006 to step 1008.

[0092] In step 1008, the communications device transmits a first signal, e.g., at least a portion of second beacon signal including at least one beacon symbol, during a second period of time following said first period of time. In some embodiments, the first signal is transmitted into the first communications band. In some embodiments said second period of time has a fixed time relationship with said first period of time. In various embodiments, the second period of time has a predetermined time offset from the start of the first period of time.

[0093] Then, in step 1010, the wireless communications device transmits user data. The first signal is, in some embodiments, transmitted prior to the user data transmission during non-overlapping time periods. In various embodiments, the user data is also transmitted in the first communications band. Operation proceeds from step

1010 to step 1012. In step 1012, the wireless communications device monitors for a response to said user data transmission from another device which with said wireless communications device is communicating on a peer to peer basis.

[0094] Figure 11 is a drawing of an exemplary wireless terminal 1100, e.g., mobile node, implemented in accordance with various embodiments. Exemplary wireless terminal 1100 may be any of the exemplary wireless terminals (102, 104) of system 100 of Figure 1.

[0095] Exemplary wireless terminal 1100 includes a receiver module 1102, a transmitter module 1104, a processor 1106, user I/O devices 1108, and memory 1110 coupled together via a bus 1112 over which the various elements may interchange data and information. Memory 1110 includes routines 1114 and data/information 1116. The processor 1106, e.g., a CPU, executes the routines 1114 and uses the data/information 1116 in memory 1110 to control the operation of the wireless terminal 1100 and implements methods.

[0096] Receiver module 1102, e.g., an OFDM receiver, is coupled to receive antenna 1103 via which the wireless terminal 1100 receives signals from other wireless communications devices. Receiver module 1102 receives beacon signal portions, e.g., transmitted in a first communications band. Receiver module 1102 also receives session establishment signals and user data signals from peers, as part of peer-peer communications sessions.

[0097] Transmitter module 1104, e.g., an OFDM transmitter, is coupled to transmit antenna 1105, via which the wireless terminal 1100 transmits signals to other wireless communications devices, e.g., peer nodes. In some embodiments, the same antenna is used for receiver module 1102 and transmitter module 1104, e.g., in conjunction with duplex module. Transmitted signals include beacon signals, communications session establishment signals and user data signals as part of a peer-peer communications session.

[0098] User I/O devices 1108 include, e.g., microphone, keypad, keyboard, switches, camera, speaker, display, etc. User I/O devices 1108 allow a user of wireless terminal 1100 to input data/information, access output data/information, and control at least some functions of the wireless terminal 1100, e.g., attempt to establish a peer-peer communications session.

[0099] Routines 1114 include communications routines 1118 and wireless terminal control routines 1120. The communications routines 1118 implement various communications protocols used by the wireless terminal 1100. Wireless terminal control routines 1120 include a beacon detection module 1122, a transmission control module 1124, a first signal, e.g., beacon signal portion, generation module 1126, a beacon symbol generation module 1127, a beacon information detection module 1128, a frequency band control module 1130, a user data transmission control module 1132, and a response detection module 1134.

[00100] Beacon detection module 1122 detects the receipt of beacon symbols communicated in a first communications band. Transmission control module 1124 controls signal transmission as a function of an output of the beacon detection module 1122. The transmission control module 1124 controls the transmitter module 1104 to transmit a first signal during a second period of time following a first period of time when a beacon signal portion including at least one beacon symbol is not detected during said first period of time. In some embodiments, the second period of time has a fixed time relationship with the first period of time, e.g., a predetermined time offset with respect to the start of the first period of time.

[00101] First signal generation module 1126 generates first signals. For example, an exemplary first signal is a beacon signal portion such as a beacon signal burst including at least one beacon symbol. Beacon symbol generation module 1127 generates beacon symbols, e.g., beacon symbols which are included in generated beacon symbol portions. For example, a beacon symbol is a relatively high power symbol with respect to a data symbol from the transmission perspective of the wireless terminal, facilitating easy detection. For example, the average transmission power difference between a beacon symbol and a data symbol are, in some embodiments, at least 10dBs. In some embodiments, each of the generated beacon symbols has the same transmission power level. In some embodiments, each generated beacon symbol has the same phase, while generated data symbols may, and generally do have different phase, e.g., as part of a QPSK, QAM16, QAM256, etc. constellation.

[00102] Beacon information detection module 1128 determines an identification value communicated by a detected portion of a beacon signal. The identification value is, e.g., one of a device identifier and a user identifier.

[00103] Frequency band control module 1130 controls the band in which the receiver module 1102 and transmitter module 1104 operate. In some embodiments, the receiver module 1102 and transmitter module 1104 are controlled to use the same band in a time division multiplexed basis, e.g., with respect to a peer-peer communications session.

[00104] User data transmission control module 1132 controls transmission of user data in addition to said first signal in said first communications band. In some embodiments, the first signal is transmitted prior to said user data and the user data transmission control module 1132 control transmission of said user data to occur in a transmission time period which does not overlap with transmission of said first signal. In various embodiments, the user data transmission control module 1132 controls the transmission of user data so that user data is transmitted into the first band, e.g., the same band into which the wireless terminal is transmitting its beacon signal.

[00105] Response detection module 1134 detects a response to the user data transmission from another device with which said wireless terminal device is communicating on a peer to peer basis. The response is, e.g., user data from the peer node and/or control information. Control information is, e.g., handshaking information, session establishment information, session termination information, session maintenance information, power control information, timing control information, frequency band information, etc.

[00106] Data/information 1116 includes receiver frequency band selection information 1136, current time information 1138, transmitter frequency band selection information 1140, beacon detect/failure to detect flag 1142, detected beacon signal information 1144, detected beacon signal portion identification information 1146, device identification information 1148, user identification information 1150, generated first signal information, e.g., generated beacon signal, information 1152, user data to be transmitted 1154, detected response information from a peer 1156, and system data/information 1158.

[00107] Receiver frequency band selection 1136 and transmitter frequency band selection 1140 are outputs of the frequency band selection module 1130 and used by the wireless terminal in controlling the receiver module 1102 and transmitter module 1104 tuning. Beacon detect/failure to detect flag 1142, e.g., a single bit output, from beacon

detection module 1122, is used by the transmission control module 1124 in making beacon transmission decisions in accordance with the system beacon signaling rules.

[00108] Detected beacon signal information 1144 includes information recovered by beacon signal detection module 1122 corresponding to a detected beacon signal, e.g., a set of identified beacon transmission units conveying beacon symbols, a pattern of beacon symbols, a slope associated with detected beacon symbols, etc. Detected beacon signal portion identification information 1146 is an output of beacon information detection module 1128 and is, e.g., a device identifier or user identifier, which identifies the source of the detected beacon signal.

[00109] Generated first signal information, e.g., generated beacon signal information 1152 corresponds to the first signal generated by first signal generation module 1126, and includes, e.g., information defining a beacon signal burst including, e.g., beacon symbol tone identification information, null tone identification information, beacon burst duration information, and beacon burst timing information.

[00110] User data to be transmitted 1154 includes, e.g., voice, other audio data, image data, text, and/or file data intended for a peer to be communicated under the control of user data transmission control module 1132, e.g., at the appropriate time, e.g., during a user data interval, in an implemented timing structure. Detected response information from peer 1156 is an output of response detection module 1134.

[00111] System data/information 1158 includes timing/frequency structure information 1160, beacon encoding information 1168, and beacon decoding information 1170. Timing/frequency structure information 1160 includes frequency bands' information 1162, time periods' information 1164 and time periods' relationship information 1166.

[00112] Figure 12 is a drawing of a flowchart 1200 of an exemplary method of operating a wireless communications device in accordance with various embodiments. The wireless communications device is, e.g., a portable wireless terminal such as a mobile node which may be operated using battery power. The wireless communications device is, e.g., wireless terminal 1300 of Figure 13. Operation starts in step 1202, where the wireless communications device is powered on and initialized and proceeds to step 1204. In step 1204, the wireless communications device receives at least a portion of a beacon signal including at least one beacon symbol from another communications device. Operation proceeds from step 1204 to step 1206. In step 1206,

the wireless communications device makes a signal transmission decision based on priority information communicated by said received beacon signal portion. The priority information indicates, e.g., one of a device priority, user priority and session priority.

[00113] Priority information may be, and sometimes is, coded using a plurality of beacon symbols included in said beacon signal portion. In some such embodiments, priority information is coded at least partially by positions of beacon symbols in a set of beacon symbol transmission units used to communicate said beacon signal portion. In some embodiments, priority information is coded at least partially based on changes in beacon symbol positions in a set of beacon symbol transmission units used to transmit said beacon signal portion over a time period including multiple beacon symbol transmission time periods. In some such embodiments, the beacon symbol transmission units in a set of beacon symbol transmission units correspond to a predetermined tone hopping pattern corresponding to the priority level to be communicated. In various embodiments, a unique beacon symbol pattern is used to communicate a top priority beacon indicating a higher priority than all other beacons used to communicate priority information.

[00114] In some embodiments, making a transmission decision includes deciding not to transmit user data when said priority information indicates a higher priority than a priority associated with said wireless communications device. In some embodiments, making a transmission decision includes deciding to transmit user data when said priority information indicates a lower priority than a priority associated with said wireless communications device.

[00115] Making a transmission decision may, and sometimes does, include deciding to transmit user data at a transmission power level which is determined as a function of the received priority level and a received power level of the received beacon signal portion. In some embodiments, the transmission power level of the wireless communications device is reduced when the received beacon signal portion indicates a higher priority level than a priority level indicated by a previously received beacon signal portion that was used to control transmission power. In some embodiments, the transmission power level of the wireless communications device is reduced when the received beacon signal portion indicates a lower priority level than a priority level indicated by a previously received beacon signal portion that was used to control transmission power.

[00116] Next, in step 1208, operation proceeds differently depending upon the signal transmission decision of step 1206. If the signal transmission decision indicates that user data should be transmitted, then operation proceeds from step 1208 to step 1210. If the signal transmission decision indicates that user data should not be transmitted, then operation proceeds from step 1208 to step 1204, where the wireless communications device is operated to receive another at least a portion of a beacon signal including at least one beacon symbol.

[00117] In step 1210, the wireless communications device is operated to transmit at least a portion of a beacon symbol, e.g., a beacon signal burst or a plurality of beacon signal bursts. In various embodiments, the transmitted portion of a beacon signal identifies at least one of said wireless communications device and a user that is using said wireless communications device to transmit user data. In some embodiments, the transmitted beacon signal portion communicates priority information corresponding to said wireless communications device. Operation proceeds from step 1210 to step 1212. In step 1212, the wireless communications transmits user data. Operation proceeds from step 1212 to step 1214.

[00118] In step 1214, the wireless communications device monitors for an additional signal portion including at least one beacon symbol, e.g., said additional signal portion being a portion of a beacon symbol that communicates a higher priority than the priority associated with the wireless communications device. Operation proceeds from step 1214 to step 1216. In step 1216, the wireless communications device determines if said additional portion was received during a predetermined period of time.

[00119] If it is determined that said additional portion was not received then operation proceeds from step 1216 to step 1218, where the wireless communications device transmits a signal. Operation proceeds from step 1218 to step 1214 for additional monitoring for another predetermined period of time.

[00120] Returning to step 1216, if it is determined that said additional portion was not received then operation proceeds from step 1216 to step 1204, where the wireless communications device is operated to receive another at least a portion of a beacon symbol including at least one beacon symbol.

[00121] Figure 13 is a drawing of an exemplary wireless terminal 1300, e.g., mobile node, implemented in accordance with various embodiments. Exemplary

wireless terminal 1300 may be any of the exemplary wireless terminals (102, 104) of system 100 of Figure 1.

[00122] Exemplary wireless terminal 1300 includes a receiver module 1302, a transmitter module 1304, a processor 1306, user I/O devices 1308, and memory 1310 coupled together via a bus 1312 over which the various elements may interchange data and information. Memory 1310 includes routines 1314 and data/information 1316. The processor 1306, e.g., a CPU, executes the routines 1314 and uses the data/information 1316 in memory 1310 to control the operation of the wireless terminal 1300 and implement methods.

[00123] Receiver module 1302, e.g., an OFDM receiver, is coupled to receive antenna 1303 via which the wireless terminal receives signals from other wireless communications devices. Receiver module 1302 receives signals from other communication devices including at least a portion of a beacon signal including at least one beacon symbol. Received signals include beacon signals and user data signals from peer nodes.

[00124] Transmitter module 1304, e.g., an OFDM transmitter, is coupled to transmit antenna 1305, via which the wireless terminal transmits signals to other wireless communications devices, e.g., peer nodes. In some embodiments, the same antenna is used for receiver module 1302 and transmitter module 1304, e.g., in conjunction with a duplex module. Transmitter module 1304 transmits signals including beacon signal portions and user data in accordance with decisions of the signal transmission decision module 1322. In various embodiments, the transmitted portion of a beacon signal including at least one beacon symbol identifies at least one of: i) wireless communications device 1300 and ii) a user that is using wireless terminal 1300 to transmit user data.

[00125] User I/O devices 1308 include, e.g., microphone, keypad, keyboard, switches, camera, speaker, display, etc. User I/O devices 1308 allow a user of wireless terminal 1300 to input data/information, access output data/information, and control at least some functions of the wireless terminal 1300, e.g., attempt to establish a peer-to-peer communication session.

[00126] Routines 1314 include communications routines 1318 and wireless terminal control routines 1320. The communications routines 1318 implement various communications protocols used by the wireless terminal 1300. Wireless terminal

control routines 1320 include a transmission decision module 1322, a beacon signal generation module 1324, a monitoring module 1326, a control module 1328, a transmission power control module 1330, and a beacon signal information detection module 1332.

[00127] Transmission decision module 1322 makes a signal transmission decision based on priority information communicated by the received beacon signal portion. The priority information indicates, e.g., one of a device priority, a user priority and a session priority. Transmission decision module 1322 includes a priority based control module 1334. Priority based control module 1334 prevents transmission of user data when the received priority information indicates a higher priority than a priority associated with said wireless terminal 1300. In various embodiments, the priority based control module 1334 enables user data transmissions when the received priority information indicates a lower priority than a priority associated with the wireless terminal 1300.

[00128] Beacon signal generation module 1324 generates beacon signal portions, a generated beacon signal portion including at least one beacon symbol. Some beacon signal portions are referred to a beacon burst signals.

[00129] Control module 1328 controls monitoring module 1326 to monitor for an additional beacon signal portion including at least one beacon symbol following the transmission decision module 1322 making a signal transmission decision. In some embodiments, if an additional beacon signal portion communicating a higher priority than said priority associated with wireless terminal 1300 is not received in a predetermined period of time, the transmission decision module 1322 makes a decision to transmit a signal.

[00130] Transmission power control module 1330 controls a user data transmission power level as a function of at least one of the received priority level and a received power level of the received beacon signal portion. Transmission power control module 1330 includes a transmission power reduction module 1336. Transmission power reduction module 1336 reduces the transmission power level when the received beacon signal portion indicates a higher priority than a priority level indicated by a previously received beacon signal portion that was used to control transmission power.

[00131] Beacon signal information detection module 1332 determines priority information from a set of beacon symbols included in a received beacon signal portion,

said priority information being encoded over a plurality of beacon symbols. In some embodiments, the priority information is coded at least partially by positions of beacon symbols in a set of beacon symbol transmission units used to transmit a beacon signal portion. In various embodiments, the priority information is coded at least partially based on changes in beacon symbol positions in a set of beacon symbol transmission units used to transmit a beacon signal portion. In some embodiments, the priority information is coded at least partially based on changes in beacon symbol positions in a set of beacon symbol transmission units used to transmit a beacon signal portion over a period of time including multiple beacon symbol transmission time periods. In various embodiments, the beacon symbol positions in a set of beacon symbol transmission units correspond to a predetermined tone hopping pattern corresponding to the priority level to be communicated. In some embodiment, a unique beacon symbol pattern is used to communicate a top priority indicating a higher priority than all other beacons used to communicate priority information.

[00132] Data/information 1316 includes received beacon signal portion information (received beacon signal port 1 information 1338, ... , received beacon signal portion N information 1340), transmission decision information 1342, user data to be transmitted 1344, current priority associated with the wireless terminal 1346, user data transmission power level information 1348, priority level information associated with the received beacon signal portions (priority associated with received beacon signal portion 1 1350, ..., priority associated with received beacon signal portion N 1352), generated beacon signal portion information 1354, and beacon signal decoding information 1356.

[00133] Received beacon signal portion 1 information 1338 includes beacon symbol information 1358 and priority information 1360. Priority information 1370 includes at least one of: device priority information 1362, user priority information 1364, and session priority information 1366.

[00134] Received beacon signal portion N information 1340 includes beacon symbol information 1368 and priority information 1370. Priority information 1360 includes at least one of: device priority information 1372, user priority information 1374, and session priority information 1376.

[00135] Transmission decision 1342 is an output of transmission decision module 1322, indicating whether or not WT 1300 is permitted to transmit. User data to be

transmitted 1344 is, e.g., voice, other audio data, image data, text data, file data, etc. that WT 1300 intends to transmit to a peer in a peer-peer communications session, if authorized.

[00136] Current priority associated with the wireless terminal 1346 indicates the current priority level associated with WT 1300, used by priority based control module 1334 for comparisons. In some embodiments, the current priority of a wireless terminal can, and sometimes does change over time, e.g., as a function of session information and/or user identification information.

[00137] Priority associated with received beacon signal portion 1 1350 and priority associated with received beacon portion N 1352 correspond to received beacon signal portions (1338, ..., 1340), respectively, and are used by transmission decision module 1322.

[00138] Generated beacon signal portion information 1354, e.g., information corresponding to a beacon signal burst including a set of beacon symbols and a set of intentional nulls, is an output of beacon signal generation module 1324.

[00139] User data transmission power level information 1348 includes power level adjustment information 1378, e.g., information indicating an amount of power reduction to be implemented in response to a beacon signal detected of higher priority.

[00140] Beacon signal decoding information 1356 includes beacon symbol position information 1380 and tone hopping pattern/priority level information 1382. Beacon signal decoding information 1356 is used by beacon signal information detection module 1332 when processing beacon symbol information, e.g., info 1358, of one or more received beacon signal portion to obtain priority information being conveyed by the beacon signal, e.g. one or more of device priority information 1362, user device priority information 1364, and session priority information 1366.

[00141] While described in the context of an OFDM TDD system, the methods and apparatus of various embodiments are applicable to a wide range of communications systems including many non-OFDM, many non-TDD systems, and/or many non-cellular systems.

[00142] In various embodiments nodes described herein are implemented using one or more modules to perform the steps corresponding to one or more methods, for example, generating a beacon signal, transmitting a beacon signal, receiving beacon signals, scanning for beacon signals, recovering information from received beacon

signals, determining a timing adjustment, implementing a timing adjustment, changing a mode of operation, initiating a communication session, comparing priority levels of user beacon signals, determining path loss, determining a reference from a fixed location beacon transmitter, etc. In some embodiments various features are implemented using modules. Such modules may be implemented using software, hardware or a combination of software and hardware. Many of the above described methods or method steps can be implemented using machine executable instructions, such as software, included in a machine readable medium such as a memory device, e.g., RAM, floppy disk, etc. to control a machine, e.g., general purpose computer with or without additional hardware, to implement all or portions of the above described methods, e.g., in one or more nodes. Accordingly, among other things, various embodiments are directed to a machine-readable medium including machine executable instructions for causing a machine, e.g., processor and associated hardware, to perform one or more of the steps of the above-described method(s).

[00143] Numerous additional variations on the methods and apparatus described above will be apparent to those skilled in the art in view of the above descriptions. Such variations are to be considered within scope. The methods and apparatus of various embodiments may be, and in various embodiments are, used with CDMA, orthogonal frequency division multiplexing (OFDM), and/or various other types of communications techniques which may be used to provide wireless communications links between access nodes and mobile nodes. In some embodiments the access nodes are implemented as base stations which establish communications links with mobile nodes using OFDM and/or CDMA. In various embodiments the mobile nodes are implemented as notebook computers, personal data assistants (PDAs), or other portable devices including receiver/transmitter circuits and logic and/or routines, for implementing the methods of various embodiments.

CLAIMS

1. A method of operating a wireless communications device, comprising:

monitoring during a first period of time to detect at least a portion of a beacon signal including at least one beacon symbol in a first communications band; and

making a decision whether or not to transmit a first signal based on the result of said monitoring, said first signal including at least one of a beacon symbol and user data.

2. The method of claim 1, wherein said user data includes at least one of text data, audio data, image data, game data, and spread sheet data.

3. The method of claim 1, wherein making a decision whether or not to transmit includes deciding to transmit a signal in response to a beacon signal portion having been detected.

4. The method of claim 1, wherein making a decision whether or not to transmit includes:

decoding information communicated by a detected beacon signal portion; and

based on information included in the decoded information deciding whether or not to transmit a signal.

5. The method of claim 4 wherein deciding whether or not to transmit a signal is based on type information included in the decoded information, said type information indicating that a second band is allowed to be used for peer-to-peer communications.

6. The method of claim 4 wherein deciding whether or not to transmit a signal is based on device identification information included in the decoded information.

7. The method of claim 1, wherein making a decision whether or not to transmit includes deciding not to transmit a signal during a second period of time which follows

said first period of time when at least a portion of a beacon signal including a beacon symbol is not detected by said monitoring.

8. The method of claim 1, wherein said first signal is a beacon signal.

9. The method of claim 8, wherein said transmitted beacon signal communicates an identifier used to identify at least one of i) said wireless communications device and ii) a user that is currently using said wireless communications device.

10. The method of claim 8, wherein said transmitting includes transmitting said first signal in a second band which is the same as said first communications band.

11. The method of claim 8, wherein said transmitting includes transmitting said first signal in a second band which is different from said first communications band.

12. The method of claim 11, wherein said first and second communications bands are separated and disjoint in the frequency domain.

13. The method of claim 11, wherein said first and second communications bands are different size frequency bands.

14. The method of claim 11, further comprising:

transmitting user data into a third communications band during a third time period.

15. The method of claim 14, wherein said third time period follows a second time period, said second time period being a time period during which at least a portion of said first signal is transmitted including at least one beacon symbol.

16. The method of claim 15, wherein said third frequency band is the same as said second frequency band.

17. The method of claim 16, wherein said third frequency band is different from said second frequency band.

18. The method claim 14, wherein said communications device is a portable wireless communications device, the method further comprising:

monitoring during a fourth period of time to detect at least a portion of an additional beacon signal from another wireless communications device.

19. The method of claim 18, wherein said another wireless communications device is a peer in a peer to peer communications network.

20. The method of claim 18, wherein monitoring to detect at least a portion of an additional beacon signal includes monitoring said second band for said at least a portion of an additional beacon signal, said second frequency band being a different frequency band from said first frequency band

21. A wireless communications device, comprising:

a beacon detection module for detecting receipt of at least one beacon symbol communicated in a first communications band; and

a beacon based decision module for determining whether or not to transmit a first signal based on an output of said beacon detection module, said output being a function of whether or not a beacon symbol was detected during a time period, said first signal including at least one of a beacon symbol and user data.

22. The device of claim 21, wherein said user data includes at least one of text data, audio data, image data, game data, and spread sheet data.

23. The device of claim 21, wherein said detected beacon symbol is part of a beacon signal portion; and

wherein said beacon based decision module makes the decision whether or not to transmit a first signal in response to a beacon signal portion having been detected.

24. The device of claim 21, further comprising:

a beacon signal decoding module for decoding information communicated by a detected beacon signal portion, said detected beacon symbol being part of said detected beacon signal portion; and

wherein said beacon based decision module makes the decision whether or not to transmit a first signal based on decoded information generated by decoding performed by said beacon signal decoding module.

25. The device of claim 24, wherein said beacon based decision module makes the decision whether or not to transmit a first signal based on type information included in the decoded information, said type information indicating that a second band is allowed to be used for peer-to-peer communications.

26. The device of claim 24 wherein said beacon based decision module makes the decision whether or not to transmit a first signal based on device identification information included in the decoded information.

27. The device of claim 21, wherein said beacon based decision module makes a decision not to transmit a signal during a second period of time which follows a first period of time when at least a portion of a beacon signal including a beacon symbol is not detected by said beacon detection module during said first period of time.

28. The device of claim 21, further comprising:
a transmitter for transmitting said first signal; and
wherein said first signal is a beacon signal.

29. The device of claim 28, further comprising:

a beacon signal generation module for generating said beacon signal, said beacon signal generation module communicating in the generated beacon signal an identifier used to identify at least one of i) said wireless communications device and ii) a user that is currently using said wireless communications device. .

30. The device of claim 28, further comprising:

a receiver for receiving beacon signal portions transmitted in said first communications band; and

a control module for controlling the band in which said receiver and transmitter operate, said receiver and transmitter be controlled to use the same band in a time division multiplexed basis.

31. The device of claim 28, further comprising:

a receiver for receiving beacon signal portions transmitted in said first band; and

a control module for controlling the bands in which said receiver and transmitter operate, said receiver being controlled to use the first communications band and said transmitter being controlled to use a second communications band, said first and second communications band being different bands.

32. The device of claim 31, wherein said first and second communications bands are separated and disjoint in the frequency domain but have a predetermined relationship.

33. The device of claim 31, wherein said first and second communications bands are different size frequency bands.

34. The device of claim 31, wherein said control module includes a user data transmission control module for controlling transmission of user data into a third communications band during a third time period.

35. The device of claim 34, wherein said third time period follows a second time period, said second time period being a time period during which at least a portion of said first signal is transmitted, said first signal including at least one beacon symbol.

36. The device of claim 35, wherein said third frequency band is the same as said second frequency band.

37. The method of claim 36, wherein said third frequency band is different from said second frequency band.

38. The device of claim 34, wherein said communications device is a portable wireless communications device, the device further comprising:

a wireless terminal beacon detection module for detecting beacon symbols received from other wireless communications devices during a fourth period of time, at least a portion of said fourth time period being different from a time period during which said beacon detection module is operated.

39. The device of claim 38, wherein said other wireless communications device is a peer in a peer to peer communications network.

40. The device of claim 38, wherein said wireless terminal beacon detection module monitors a second communications band, said second communications band being a different frequency band from said first communications band.

41. A wireless communications device, comprising:

means for detecting receipt of at least one beacon symbol communicated in a first communications band; and

means for determining whether or not to transmit a first signal based on an output of said means for detecting receipt of at least one beacon signal, said output being a function of whether or not a beacon symbol was detected during a time period, said first signal including at least one of a beacon symbol and user data.

42. The device of claim 41, wherein said user data includes at least one of text data, audio data, image data, game data, and spread sheet data.

43. The device of claim 41, wherein said detected beacon symbol is part of a beacon signal portion; and

wherein said means for making a decision makes the decision whether or not to transmit a first signal in response to a beacon signal portion having been detected.

44. The device of claim 41, further comprising:

means for decoding information communicated by a detected beacon signal portion, said detected beacon symbol being part of said detected beacon signal portion; and

wherein said means for making a decision makes the decision whether or not to transmit a first signal based on decoded information generated by decoding performed by meands for decoding information.

45. The device of claim 44, wherein said means for making a decision makes the decision whether or not to transmit a first signal based on type information included in the decoded information, said type information indicating that a second band is allowed to be used for peer-to-peer communications.

46. The device of claim 44 wherein said means for making a decision makes the decision whether or not to transmit a first signal based on device identification information included in the decoded information.

47. The device of claim 41, wherein said means for making a decision makes a decision not to transmit a signal during a second period of time which follows a first period of time when at least a portion of a beacon signal including a beacon symbol is not detected by said means for detecting during said first period of time.

48. The device of claim 41, further comprising:
means for transmitting said first signal; and
wherein said first signal is a beacon signal.

49. The device of claim 48, further comprising:

means for generating a beacon signal for generating a beacon signal which communicates in the generated beacon signal an identifier used to identify at least one of i) said wireless communications device and ii) a user that is currently using said wireless communications device.

50. A computer readable medium embodying machine executable instruction for controlling a wireless communications device to implement a method, the method comprising:

monitoring during a first period of time to detect at least a portion of a beacon signal including at least one beacon symbol in a first communications band; and

making a decision whether or not to transmit a first signal based on the result of said monitoring, said first signal including at least one of a beacon symbol and user data.

51. The computer readable medium of claim 50, wherein said user data includes at least one of text data, audio data, image data, game data, and spread sheet data.

52. The computer readable medium of claim 50, wherein making a decision whether or not to transmit includes deciding to transmit a signal in response to a beacon signal portion having been detected.

53. The computer readable medium of claim 50, further comprising machine executable instructions for:

decoding information communicated by a detected beacon signal portion; and

based on information included in the decoded information deciding whether or not to transmit a signal,

as part of said step of making a decision whether or not to transmit.

54. The computer readable medium of claim 53, further comprising machine executable instructions for:

basing said decision whether or not to transmit a signal upon type information included in the decoded information, said type information indicating that a second band is allowed to be used for peer-to-peer communications.

55. The computer readable medium of claim 53, further embodying machine executable instructions for:

basing said decision whether or not to transmit a signal upon device identification information included in the decoded information.

56. The computer readable medium of claim 50, wherein making a decision whether or not to transmit includes deciding not to transmit a signal during a second period of time which follows said first period of time when at least a portion of a beacon signal including a beacon symbol is not detected by said monitoring.

57. The computer readable medium of claim 50, wherein said first signal is a beacon signal, the computer readable medium further comprising:

machine executable instructions for:

generating said beacon signal, wherein said beacon signal includes at least one beacon signal burst, and wherein said beacon signal burst includes at least one beacon symbol and a majority of the beacon transmission units of beacon burst are intentional nulls.

58. An apparatus comprising:

a processor configured to:

monitor during a first period of time to detect at least a portion of a beacon signal including at least one beacon symbol in a first communications band; and

make a decision whether or not to transmit a first signal based on the result of said monitoring, said first signal including at least one of a beacon symbol and user data.

59. The apparatus of claim 58, wherein said user data includes at least one of text data, audio data, image data, game data, and spread sheet data.

60. The apparatus of claim 58, wherein making a decision whether or not to transmit includes deciding to transmit a signal in response to a beacon signal portion having been detected.

61. The apparatus of claim 58, wherein said processor is further configured to:

decode information communicated by a detected beacon signal portion; and

based on information included in the decoded information decide whether or not to transmit a signal,

as part of said step of making a decision whether or not to transmit.

62. The apparatus of claim 61, wherein said processor is further configured to:

base said decision whether or not to transmit a signal upon type information included in the decoded information, said type information indicating that a second band is allowed to be used for peer-to-peer communications.

63. The apparatus of claim 61, wherein said processor is further configured to:

base said decision whether or not to transmit a signal upon device identification information included in the decoded information.

64. The apparatus of claim 58, wherein making a decision whether or not to transmit includes deciding not to transmit a signal during a second period of time which follows said first period of time when at least a portion of a beacon signal including a beacon symbol is not detected by said monitoring.

65. The apparatus of claim 58, wherein said first signal is a beacon signal, the processor further configured to:

generate said beacon signal, wherein said beacon signal includes at least one beacon signal burst, and wherein said beacon signal burst includes at least one beacon symbol and a majority of the beacon transmission units of beacon burst are intentional nulls.

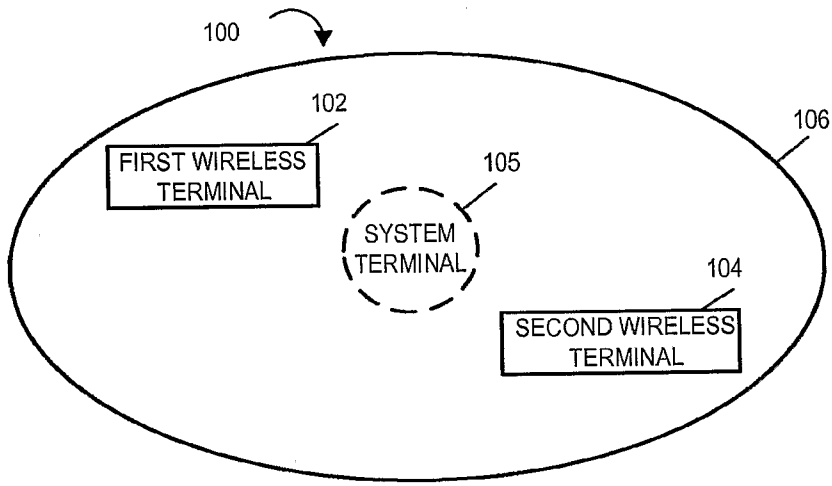

100
102
FIRST WIRELESS TERMINAL
105
SYSTEM TERMINAL
106
104
SECOND WIRELESS TERMINAL

FIGURE 1

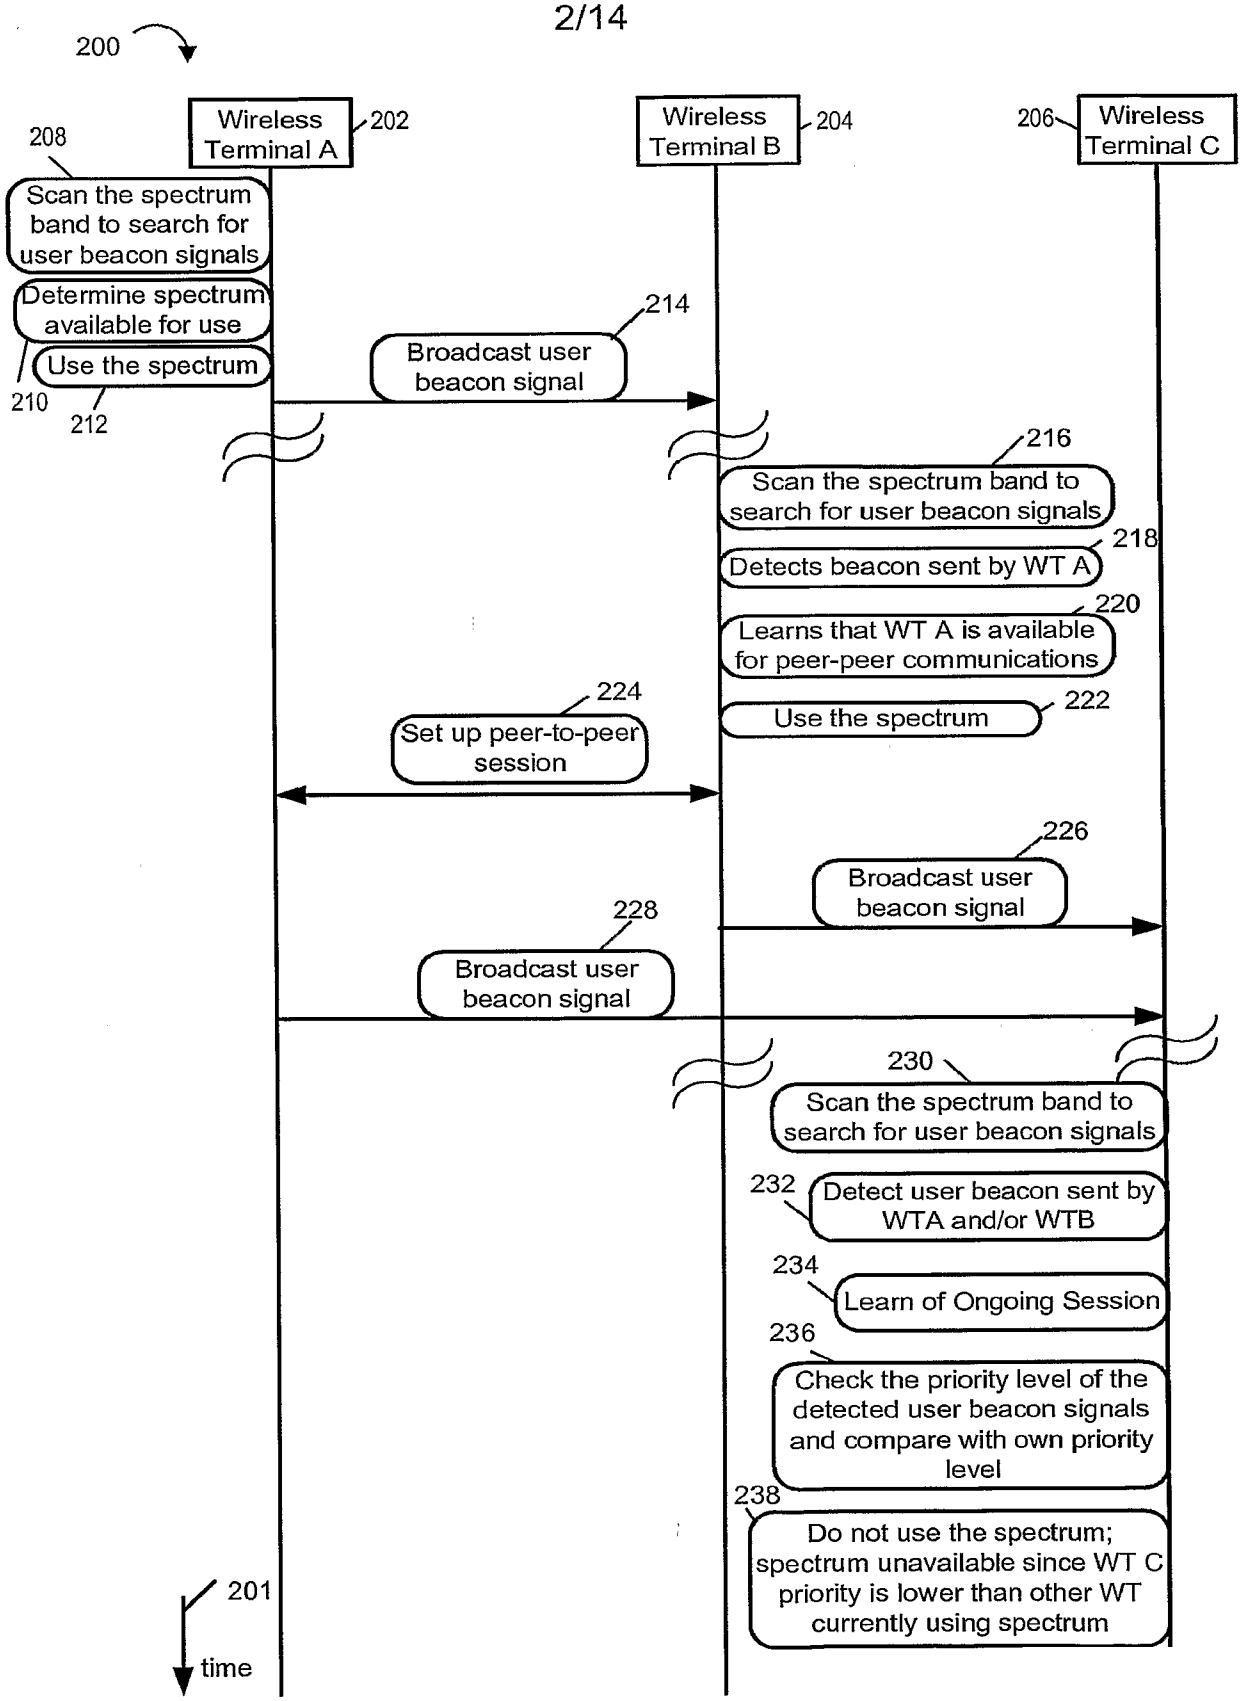
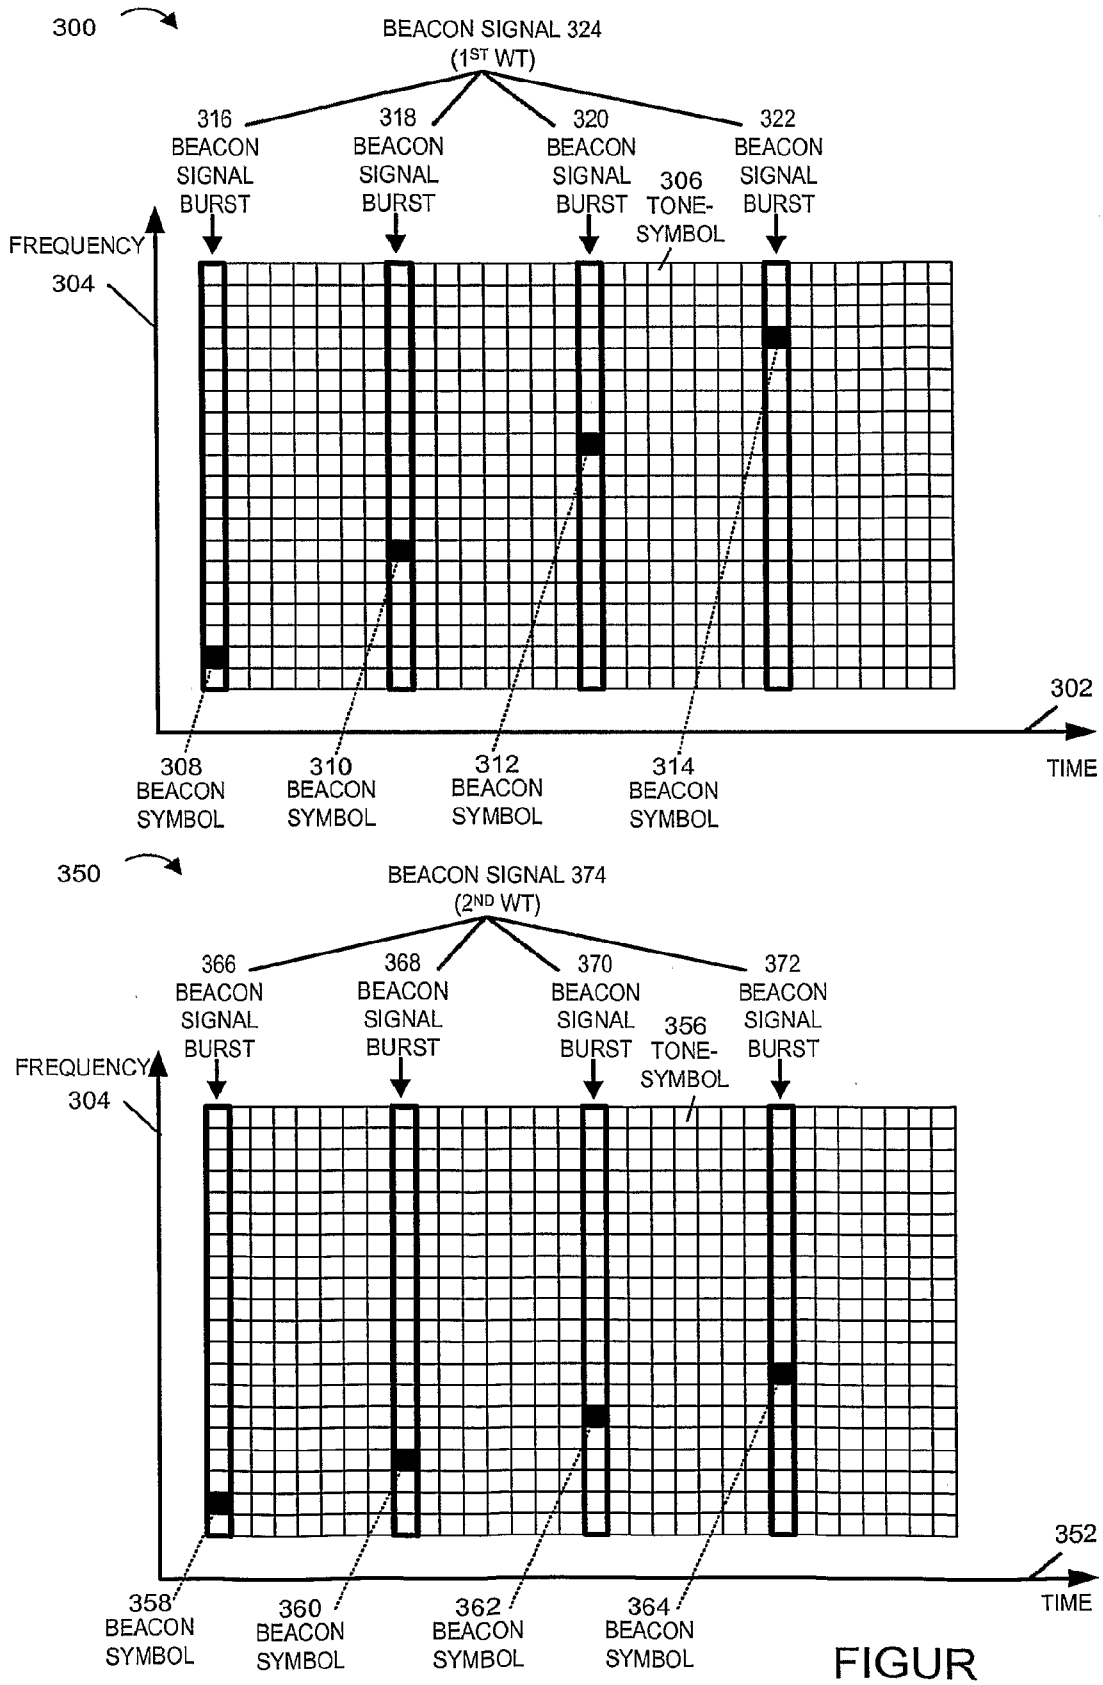

200
Wireless Terminal A
202
Wireless Terminal B
204
206
Wireless Terminal C
208
Scan the spectrum band to search for user beacon signals
Determine spectrum available for use
Use the spectrum
210
212
214
Broadcast user beacon signal
216
Scan the spectrum band to search for user beacon signals
218
Detects beacon sent by WT A
220
Learns that WT A is available for peer-peer communications
222
Use the spectrum
224
Set up peer-to-peer session
226
Broadcast user beacon signal
228
Broadcast user beacon signal
230
Scan the spectrum band to search for user beacon signals
232
Detect user beacon sent by WTA and/or WTB
234
Learn of Ongoing Session
236
Check the priority level of the detected user beacon signals and compare with own priority level
238
Do not use the spectrum; spectrum unavailable since WT C priority is lower than other WT currently using spectrum
201
time

FIGURE 2


300
BEACON SIGNAL 324
(1ST WT)
316 BEACON SIGNAL BURST
318 BEACON SIGNAL BURST
320 BEACON SIGNAL BURST
306 TONE-SYMBOL
322 BEACON SIGNAL BURST
FREQUENCY
304
302
TIME
308 BEACON SYMBOL
310 BEACON SYMBOL
312 BEACON SYMBOL
314 BEACON SYMBOL
350
BEACON SIGNAL 374
(2ND WT)
366 BEACON SIGNAL BURST
368 BEACON SIGNAL BURST
370 BEACON SIGNAL BURST
356 TONE-SYMBOL
372 BEACON SIGNAL BURST
FREQUENCY
304
352
TIME
358 BEACON SYMBOL
360 BEACON SYMBOL
362 BEACON SYMBOL
364 BEACON SYMBOL

FIGUR

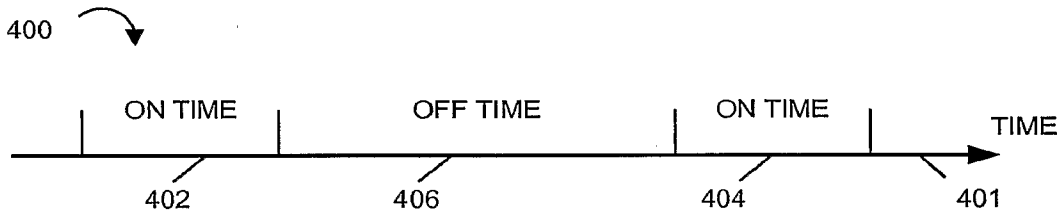


FIGURE 4

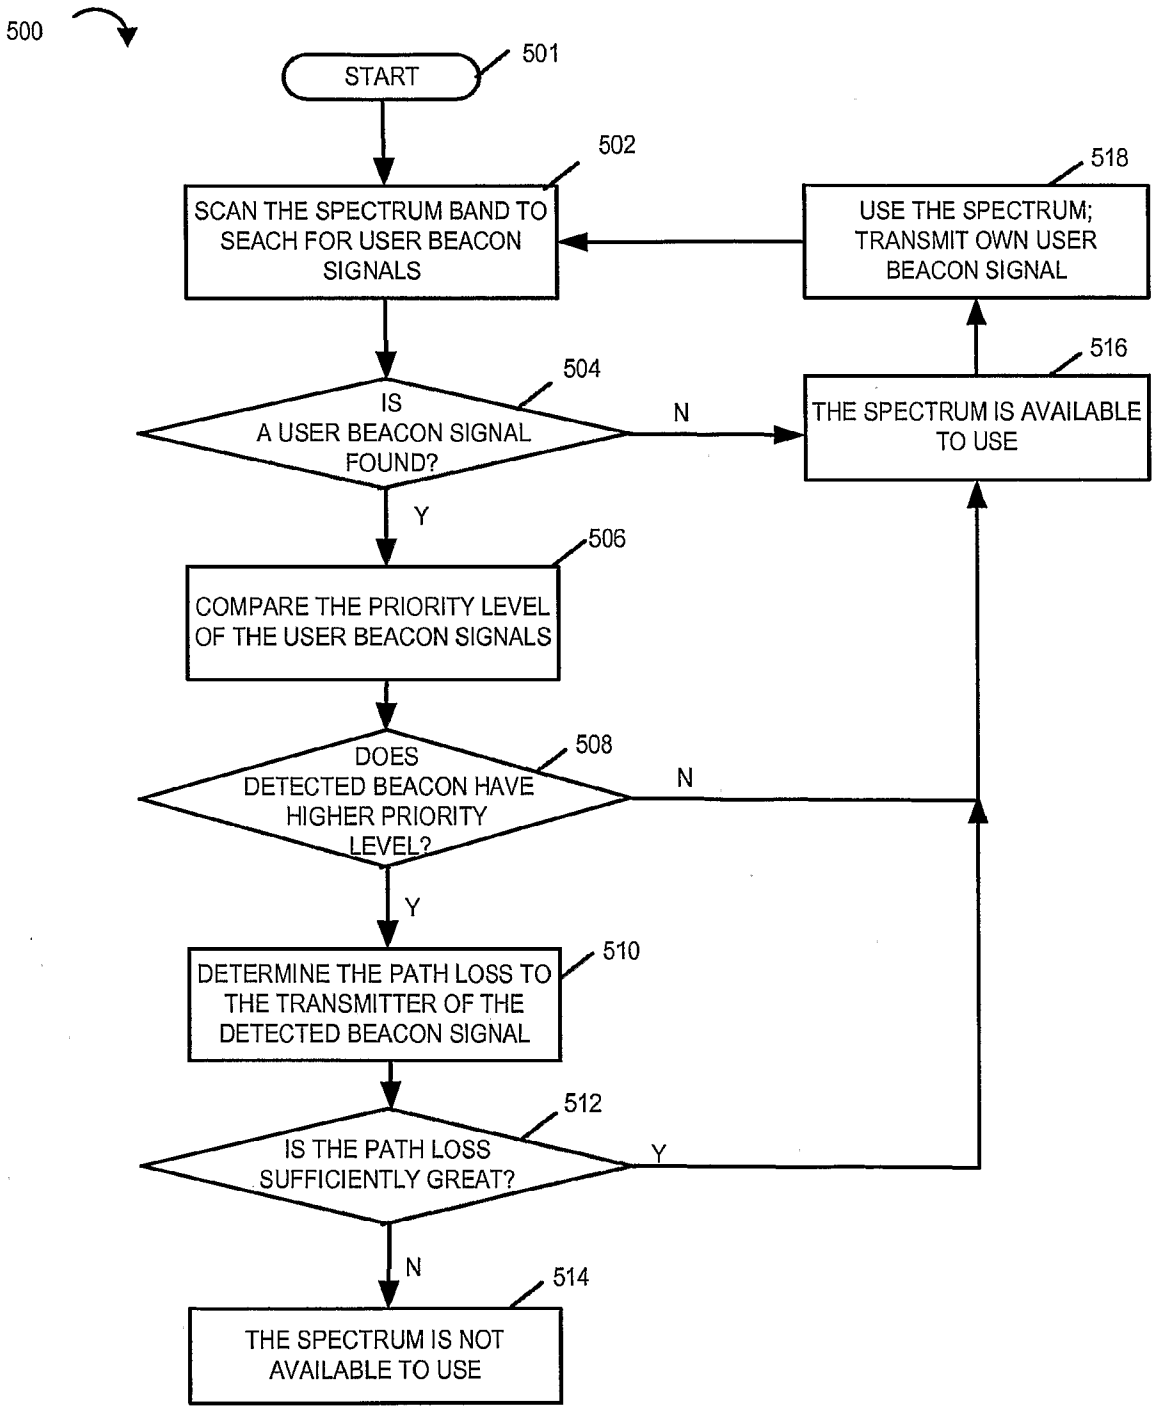

500
START
501
SCAN THE SPECTRUM BAND TO SEACH FOR USER BEACON SIGNALS
502
IS A USER BEACON SIGNAL FOUND?
504
N
Y
COMPARE THE PRIORITY LEVEL OF THE USER BEACON SIGNALS
506
DOES DETECTED BEACON HAVE HIGHER PRIORITY LEVEL?
508
N
Y
DETERMINE THE PATH LOSS TO THE TRANSMITTER OF THE DETECTED BEACON SIGNAL
510
IS THE PATH LOSS SUFFICIENTLY GREAT?
512
Y
N
THE SPECTRUM IS NOT AVAILABLE TO USE
514
THE SPECTRUM IS AVAILABLE TO USE
516
USE THE SPECTRUM; TRANSMIT OWN USER BEACON SIGNAL
518

FIGURE 5

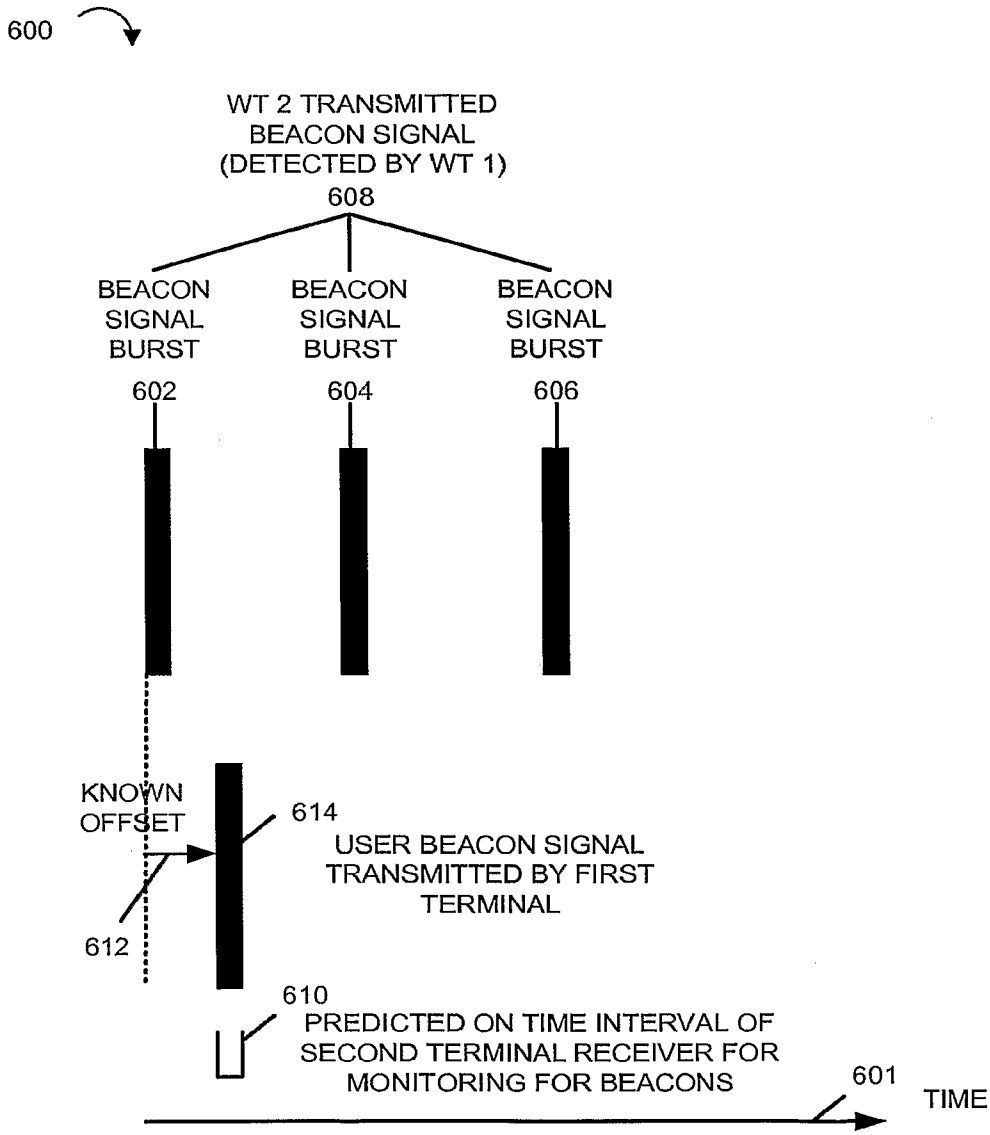

600
WT 2 TRANSMITTED BEACON SIGNAL (DETECTED BY WT 1)
608
BEACON SIGNAL BURST
602
BEACON SIGNAL BURST
604
BEACON SIGNAL BURST
606
KNOWN OFFSET
612
614
USER BEACON SIGNAL TRANSMITTED BY FIRST TERMINAL
610
PREDICTED ON TIME INTERVAL OF SECOND TERMINAL RECEIVER FOR MONITORING FOR BEACONS
601
TIME

FIGURE 6

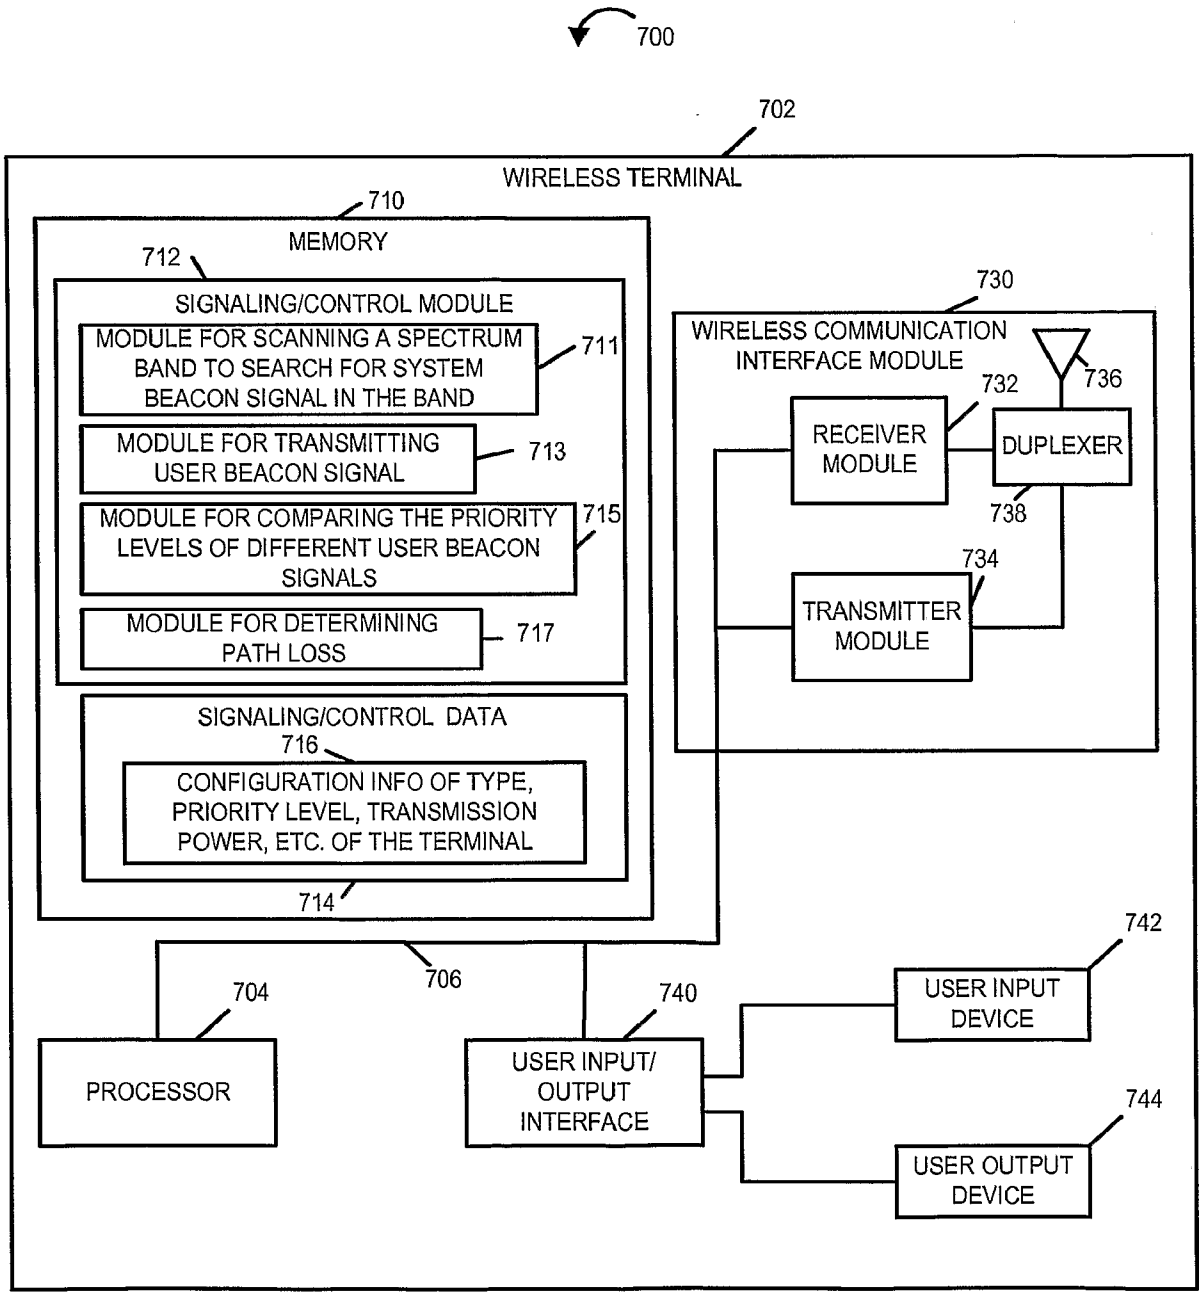

700
702
WIRELESS TERMINAL
710
MEMORY
712
SIGNALING/CONTROL MODULE
MODULE FOR SCANNING A SPECTRUM BAND TO SEARCH FOR SYSTEM BEACON SIGNAL IN THE BAND
711
MODULE FOR TRANSMITTING USER BEACON SIGNAL
713
MODULE FOR COMPARING THE PRIORITY LEVELS OF DIFFERENT USER BEACON SIGNALS
715
MODULE FOR DETERMINING PATH LOSS
717
SIGNALING/CONTROL DATA
716
CONFIGURATION INFO OF TYPE, PRIORITY LEVEL, TRANSMISSION POWER, ETC. OF THE TERMINAL
714
730
WIRELESS COMMUNICATION INTERFACE MODULE
732
736
RECEIVER MODULE
DUPLEXER
738
734
TRANSMITTER MODULE
706
704
PROCESSOR
740
USER INPUT/ OUTPUT INTERFACE
742
USER INPUT DEVICE
744
USER OUTPUT DEVICE

Figure 7

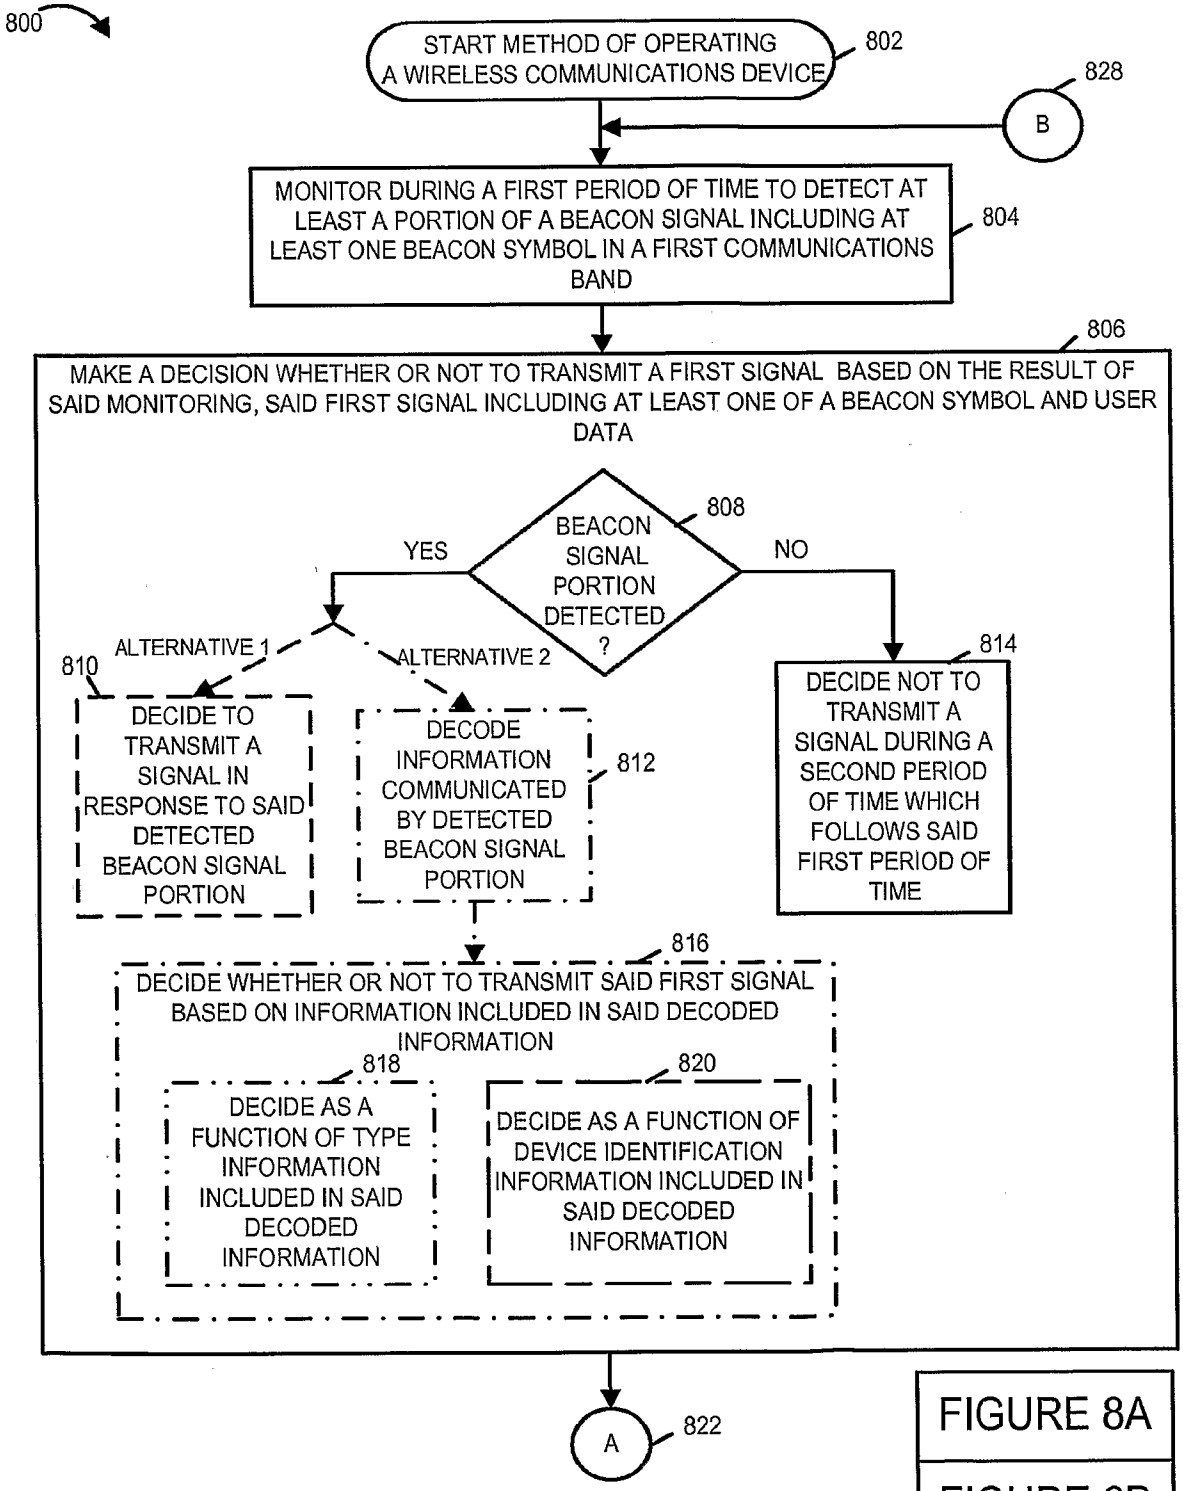


FIGURE 8A

FIGURE 8A

FIGURE 8B

FI

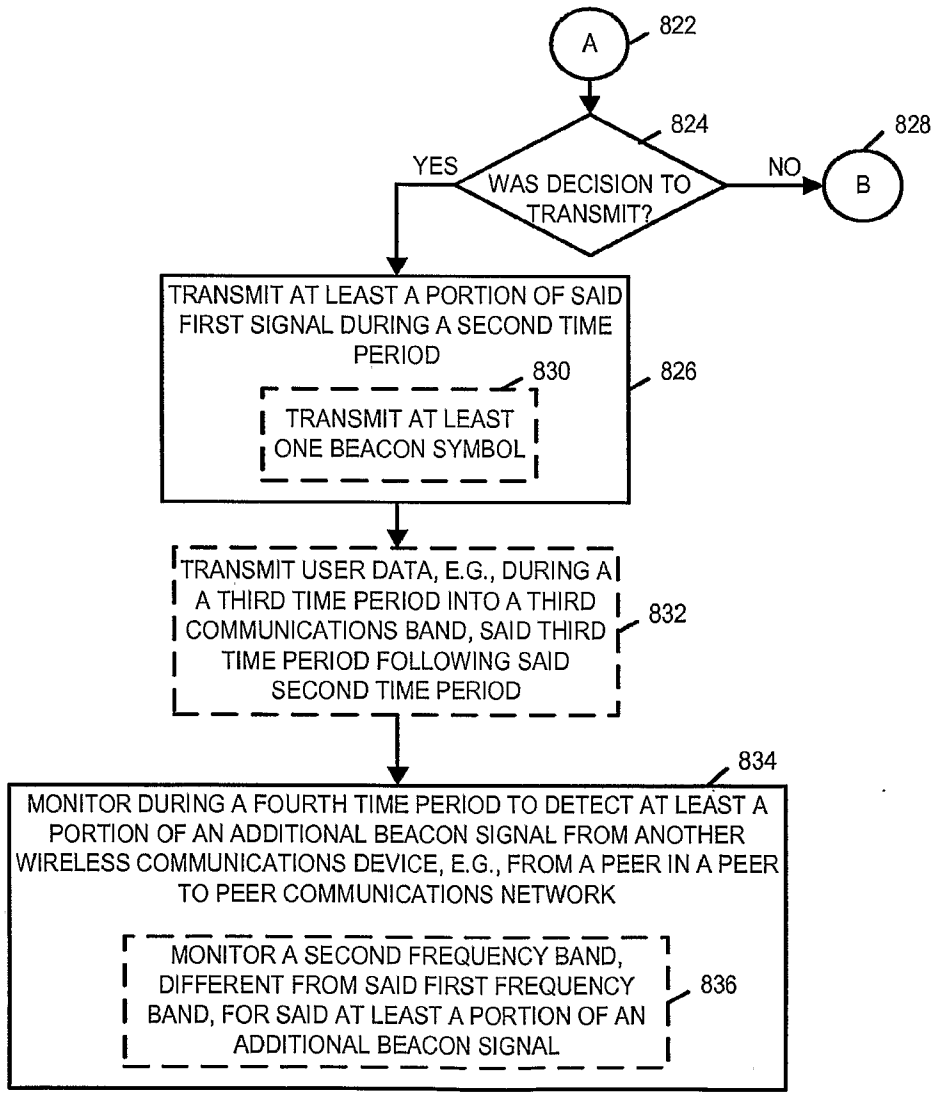

A
822
824
WAS DECISION TO TRANSMIT?
YES
NO
828
B
TRANSMIT AT LEAST A PORTION OF SAID FIRST SIGNAL DURING A SECOND TIME PERIOD
830
TRANSMIT AT LEAST ONE BEACON SYMBOL
826
TRANSMIT USER DATA, E.G., DURING A A THIRD TIME PERIOD INTO A THIRD COMMUNICATIONS BAND, SAID THIRD TIME PERIOD FOLLOWING SAID SECOND TIME PERIOD
832
834
MONITOR DURING A FOURTH TIME PERIOD TO DETECT AT LEAST A PORTION OF AN ADDITIONAL BEACON SIGNAL FROM ANOTHER WIRELESS COMMUNICATIONS DEVICE, E.G., FROM A PEER IN A PEER TO PEER COMMUNICATIONS NETWORK
MONITOR A SECOND FREQUENCY BAND, DIFFERENT FROM SAID FIRST FREQUENCY BAND, FOR SAID AT LEAST A PORTION OF AN ADDITIONAL BEACON SIGNAL
836

FIGURE 8B

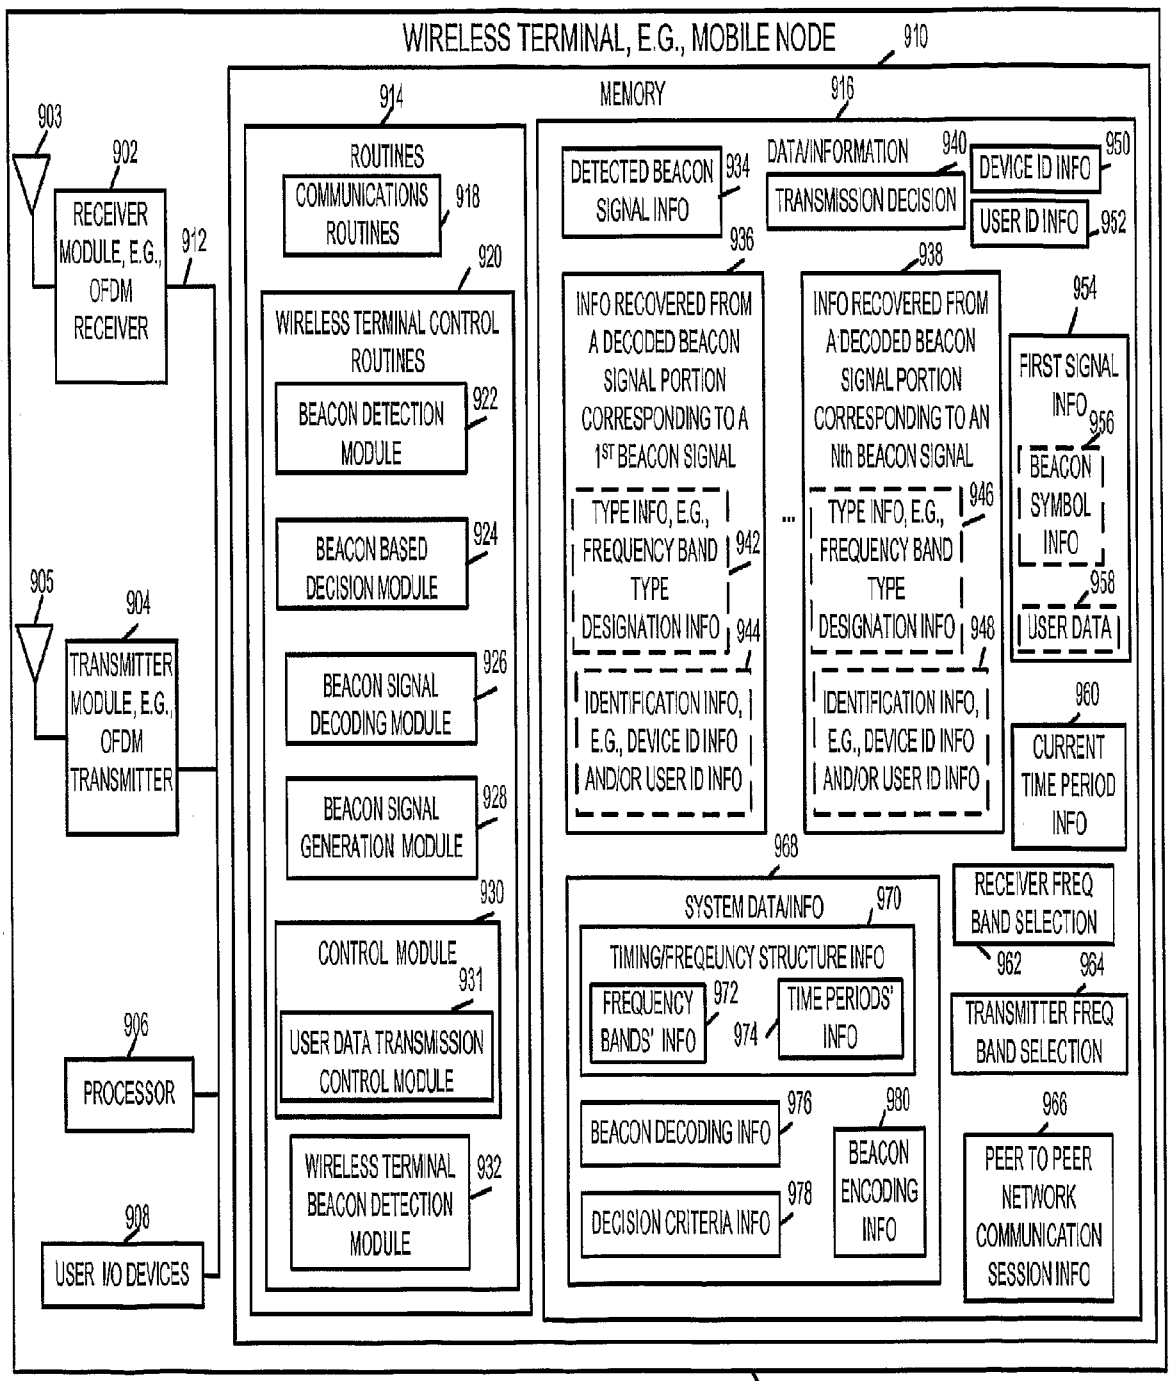

WIRELESS TERMINAL, E.G., MOBILE NODE
910
MEMORY
916
914
ROUTINES
COMMUNICATIONS ROUTINES
918
WIRELESS TERMINAL CONTROL ROUTINES
920
BEACON DETECTION MODULE
922
BEACON BASED DECISION MODULE
924
BEACON SIGNAL DECODING MODULE
926
BEACON SIGNAL GENERATION MODULE
928
CONTROL MODULE
930
USER DATA TRANSMISSION CONTROL MODULE
931
WIRELESS TERMINAL BEACON DETECTION MODULE
932
903
902
RECEIVER MODULE, E.G., OFDM RECEIVER
912
905
904
TRANSMITTER MODULE, E.G., OFDM TRANSMITTER
906
PROCESSOR
908
USER I/O DEVICES
DETECTED BEACON SIGNAL INFO
934
DATA/INFORMATION
940
TRANSMISSION DECISION
DEVICE ID INFO
950
USER ID INFO
952
INFO RECOVERED FROM A DECODED BEACON SIGNAL PORTION CORRESPONDING TO A 1ST BEACON SIGNAL
936
TYPE INFO, E.G., FREQUENCY BAND TYPE DESIGNATION INFO
942
IDENTIFICATION INFO, E.G., DEVICE ID INFO AND/OR USER ID INFO
944
INFO RECOVERED FROM A DECODED BEACON SIGNAL PORTION CORRESPONDING TO AN Nth BEACON SIGNAL
938
TYPE INFO, E.G., FREQUENCY BAND TYPE DESIGNATION INFO
946
IDENTIFICATION INFO, E.G., DEVICE ID INFO AND/OR USER ID INFO
948
FIRST SIGNAL INFO
954
BEACON SYMBOL INFO
956
USER DATA
958
CURRENT TIME PERIOD INFO
960
SYSTEM DATA/INFO
968
TIMING/FREQUENCY STRUCTURE INFO
970
FREQUENCY BANDS' INFO
972
TIME PERIODS' INFO
974
BEACON DECODING INFO
976
DECISION CRITERIA INFO
978
BEACON ENCODING INFO
980
RECEIVER FREQ BAND SELECTION
962
TRANSMITTER FREQ BAND SELECTION
964
PEER TO PEER NETWORK COMMUNICATION SESSION INFO
966
900

Figure 9

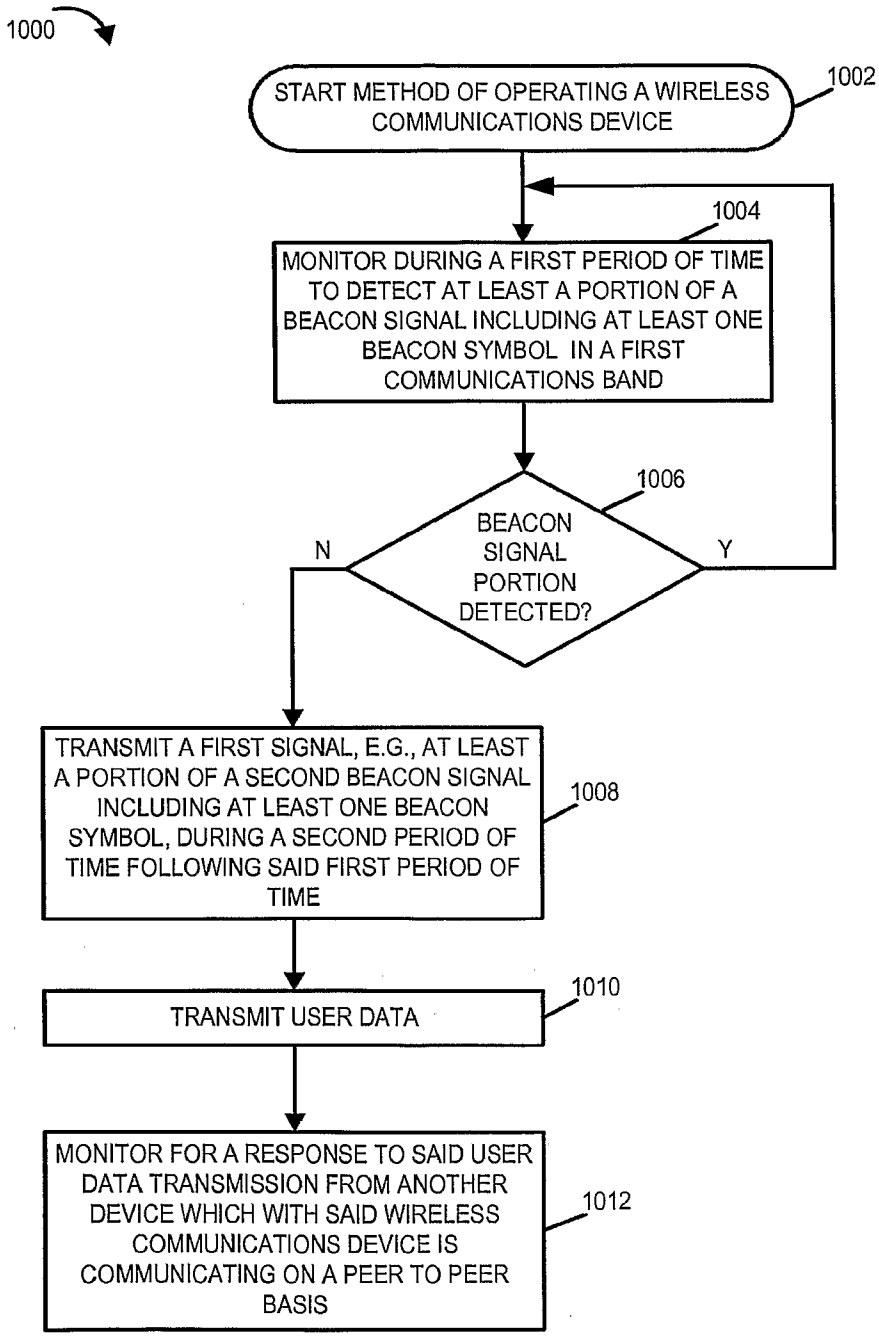

1000
START METHOD OF OPERATING A WIRELESS COMMUNICATIONS DEVICE
1002
1004
MONITOR DURING A FIRST PERIOD OF TIME TO DETECT AT LEAST A PORTION OF A BEACON SIGNAL INCLUDING AT LEAST ONE BEACON SYMBOL IN A FIRST COMMUNICATIONS BAND
1006
BEACON SIGNAL PORTION DETECTED?
N
Y
TRANSMIT A FIRST SIGNAL, E.G., AT LEAST A PORTION OF A SECOND BEACON SIGNAL INCLUDING AT LEAST ONE BEACON SYMBOL, DURING A SECOND PERIOD OF TIME FOLLOWING SAID FIRST PERIOD OF TIME
1008
TRANSMIT USER DATA
1010
MONITOR FOR A RESPONSE TO SAID USER DATA TRANSMISSION FROM ANOTHER DEVICE WHICH WITH SAID WIRELESS COMMUNICATIONS DEVICE IS COMMUNICATING ON A PEER TO PEER BASIS
1012

FIGURE 10

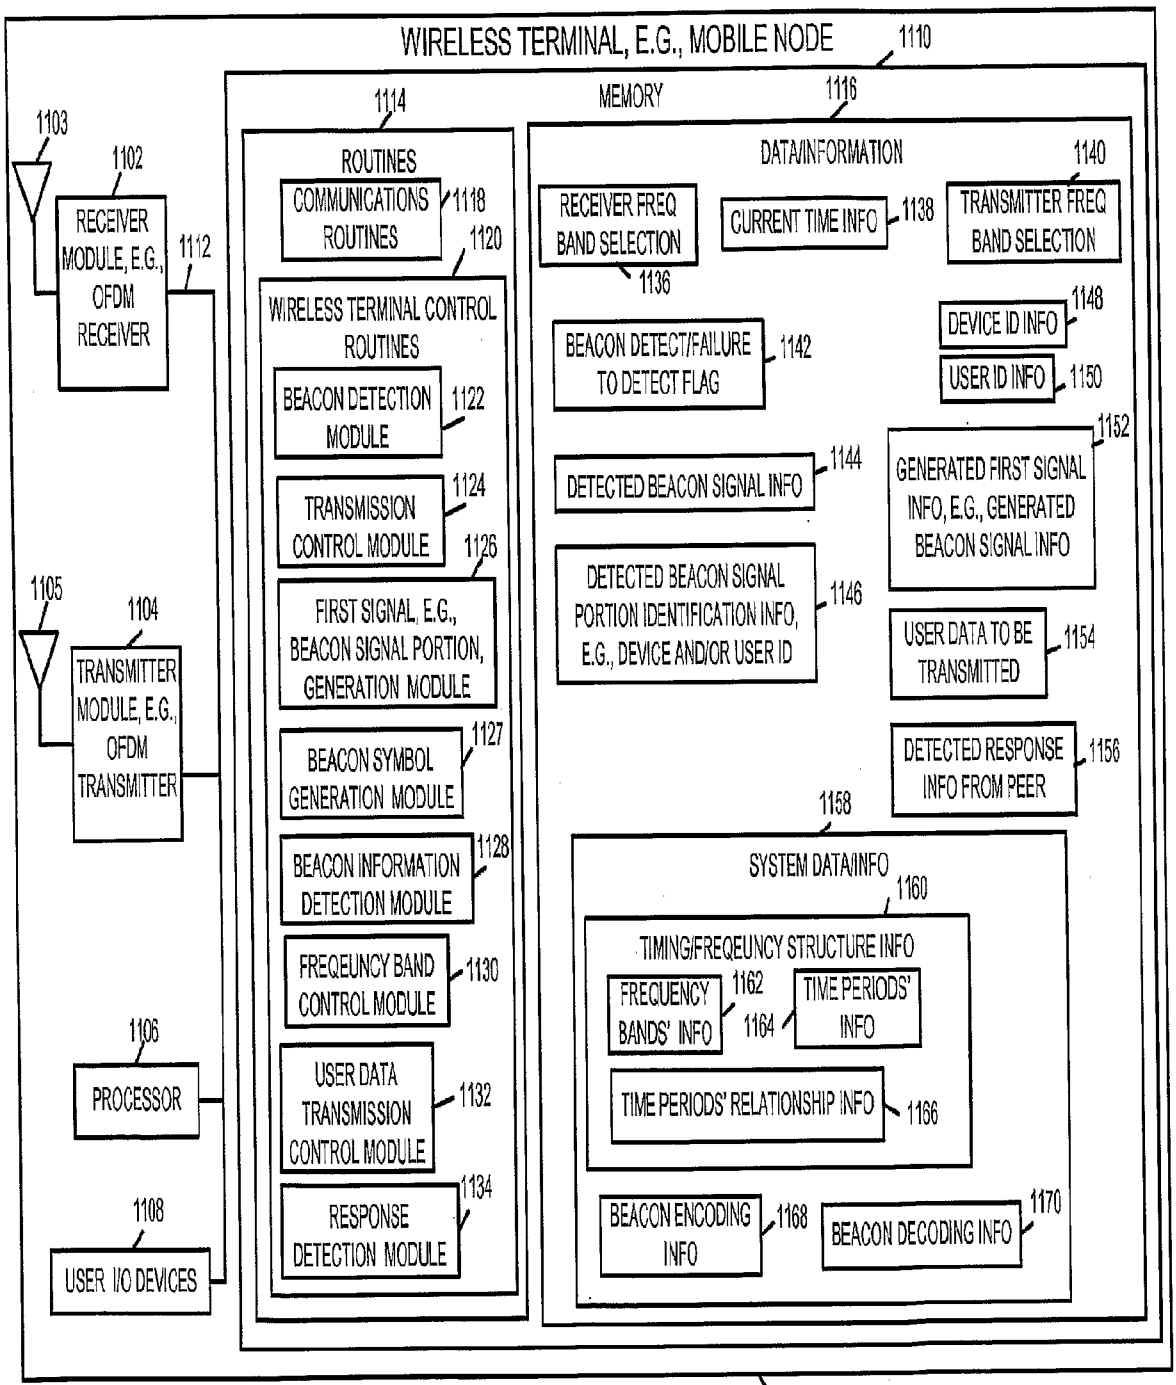

WIRELESS TERMINAL, E.G., MOBILE NODE
1110
MEMORY
1116
1114
ROUTINES
COMMUNICATIONS ROUTINES
1118
1120
WIRELESS TERMINAL CONTROL ROUTINES
BEACON DETECTION MODULE
1122
TRANSMISSION CONTROL MODULE
1124
1126
FIRST SIGNAL, E.G., BEACON SIGNAL PORTION, GENERATION MODULE
BEACON SYMBOL GENERATION MODULE
1127
BEACON INFORMATION DETECTION MODULE
1128
FREQEUNCY BAND CONTROL MODULE
1130
USER DATA TRANSMISSION CONTROL MODULE
1132
RESPONSE DETECTION MODULE
1134
DATA/INFORMATION
1140
RECEIVER FREQ BAND SELECTION
1136
CURRENT TIME INFO
1138
TRANSMITTER FREQ BAND SELECTION
DEVICE ID INFO
1148
USER ID INFO
1150
BEACON DETECT/FAILURE TO DETECT FLAG
1142
DETECTED BEACON SIGNAL INFO
1144
GENERATED FIRST SIGNAL INFO, E.G., GENERATED BEACON SIGNAL INFO
1152
DETECTED BEACON SIGNAL PORTION IDENTIFICATION INFO, E.G., DEVICE AND/OR USER ID
1146
USER DATA TO BE TRANSMITTED
1154
DETECTED RESPONSE INFO FROM PEER
1156
1158
SYSTEM DATA/INFO
1160
TIMING/FREQEUNCY STRUCTURE INFO
FREQUENCY BANDS' INFO
1162
1164
TIME PERIODS' INFO
TIME PERIODS' RELATIONSHIP INFO
1166
BEACON ENCODING INFO
1168
BEACON DECODING INFO
1170
1103
1102
RECEIVER MODULE, E.G., OFDM RECEIVER
1112
1105
1104
TRANSMITTER MODULE, E.G., OFDM TRANSMITTER
1106
PROCESSOR
1108
USER I/O DEVICES
1100

Figure 11

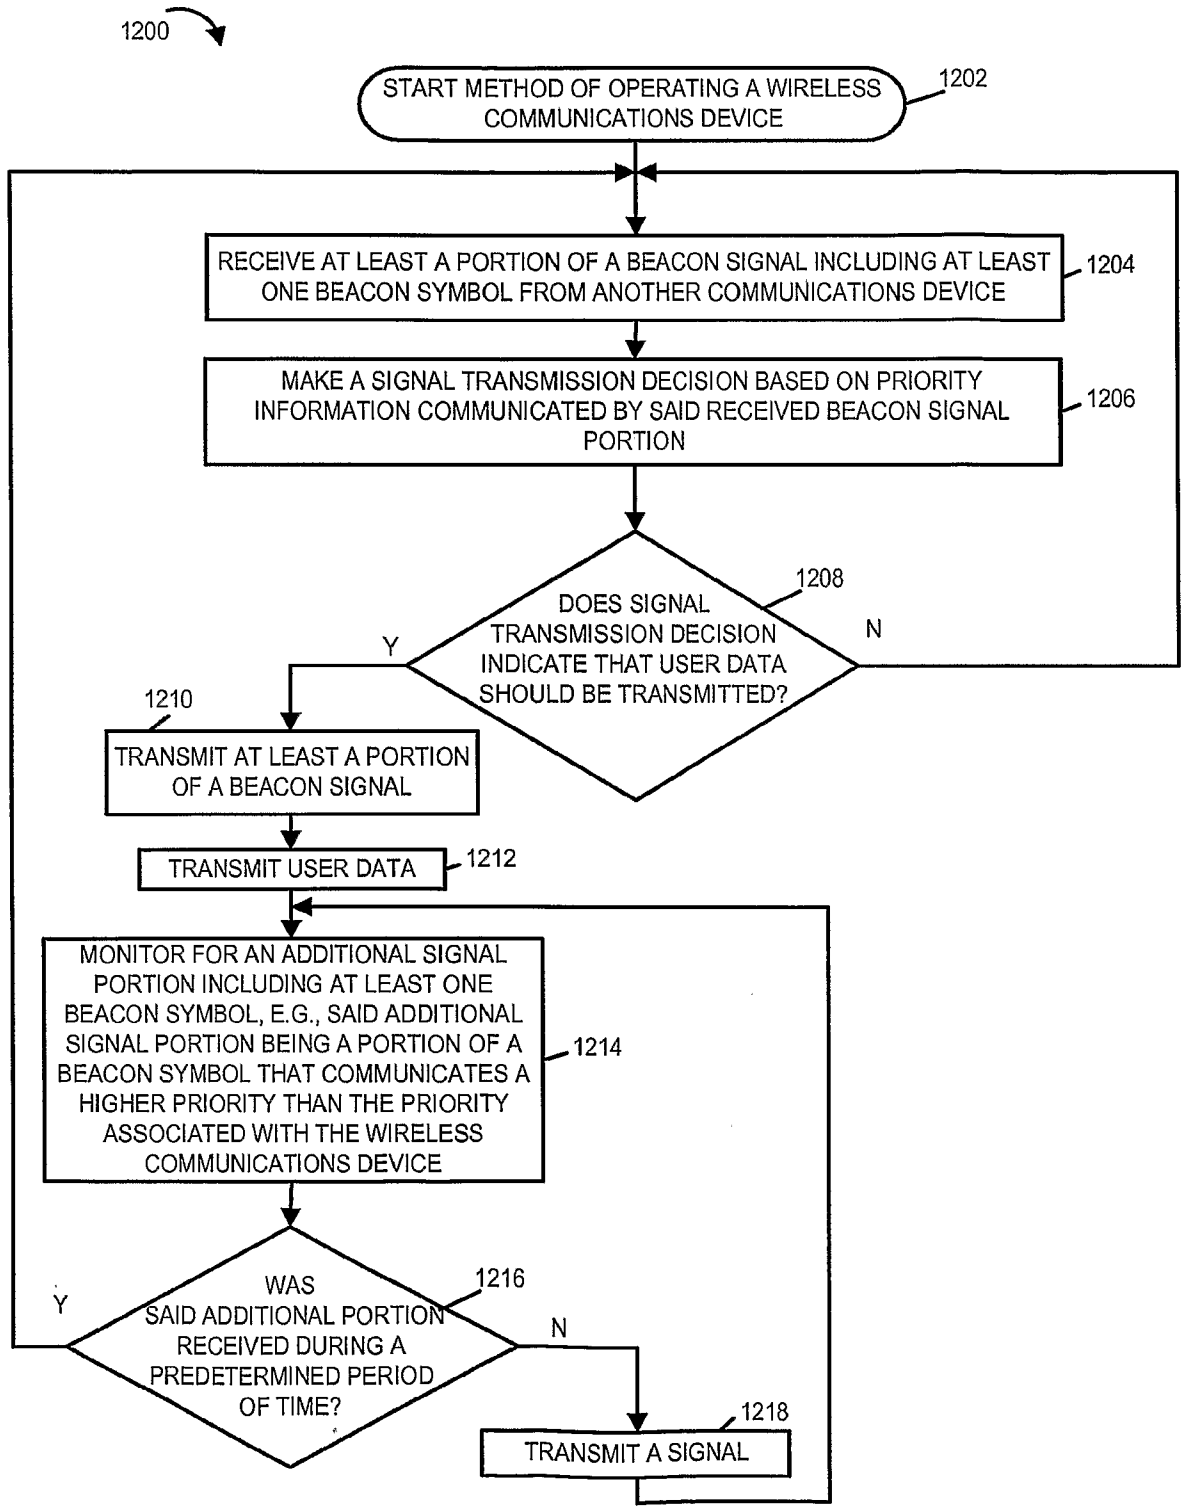

1200
START METHOD OF OPERATING A WIRELESS COMMUNICATIONS DEVICE
1202
RECEIVE AT LEAST A PORTION OF A BEACON SIGNAL INCLUDING AT LEAST ONE BEACON SYMBOL FROM ANOTHER COMMUNICATIONS DEVICE
1204
MAKE A SIGNAL TRANSMISSION DECISION BASED ON PRIORITY INFORMATION COMMUNICATED BY SAID RECEIVED BEACON SIGNAL PORTION
1206
DOES SIGNAL TRANSMISSION DECISION INDICATE THAT USER DATA SHOULD BE TRANSMITTED?
1208
Y
N
1210
TRANSMIT AT LEAST A PORTION OF A BEACON SIGNAL
TRANSMIT USER DATA
1212
MONITOR FOR AN ADDITIONAL SIGNAL PORTION INCLUDING AT LEAST ONE BEACON SYMBOL, E.G., SAID ADDITIONAL SIGNAL PORTION BEING A PORTION OF A BEACON SYMBOL THAT COMMUNICATES A HIGHER PRIORITY THAN THE PRIORITY ASSOCIATED WITH THE WIRELESS COMMUNICATIONS DEVICE
1214
WAS SAID ADDITIONAL PORTION RECEIVED DURING A PREDETERMINED PERIOD OF TIME?
1216
Y
N
1218
TRANSMIT A SIGNAL

FIGURE 12

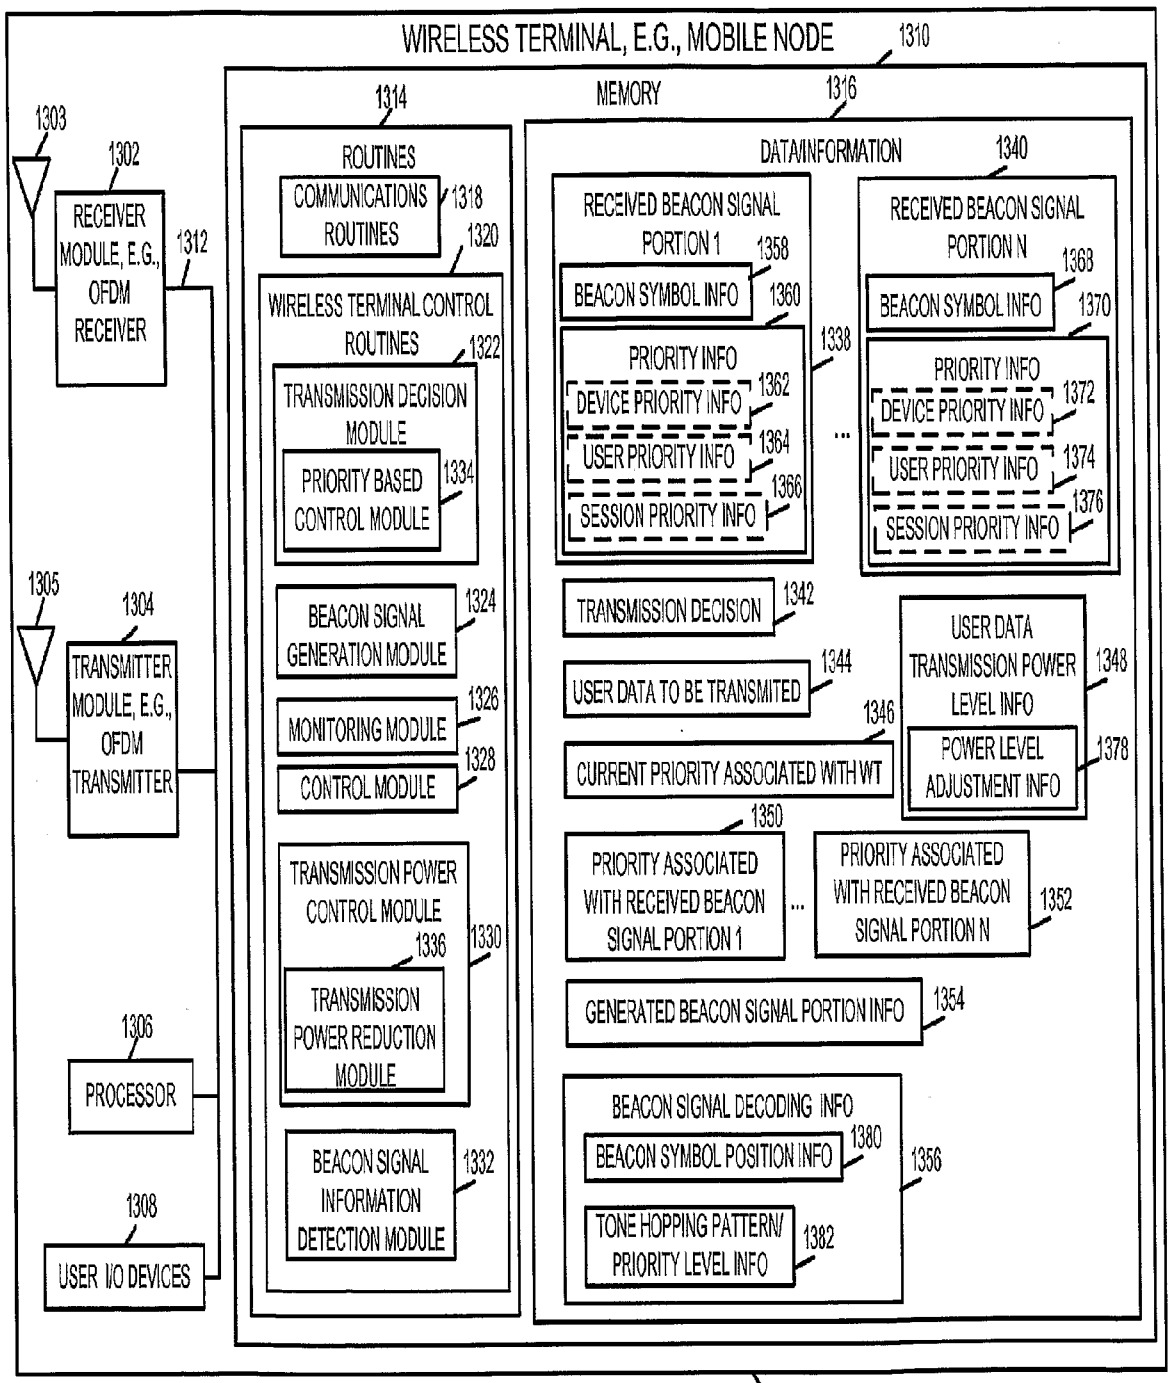

WIRELESS TERMINAL, E.G., MOBILE NODE
1310
MEMORY
1316
1314
ROUTINES
COMMUNICATIONS ROUTINES
1318
WIRELESS TERMINAL CONTROL ROUTINES
1320
1322
TRANSMISSION DECISION MODULE
PRIORITY BASED CONTROL MODULE
1334
BEACON SIGNAL GENERATION MODULE
1324
MONITORING MODULE
1326
CONTROL MODULE
1328
TRANSMISSION POWER CONTROL MODULE
1330
1336
TRANSMISSION POWER REDUCTION MODULE
BEACON SIGNAL INFORMATION DETECTION MODULE
1332
DATA/INFORMATION
1340
RECEIVED BEACON SIGNAL PORTION 1
1358
BEACON SYMBOL INFO
1360
PRIORITY INFO
1338
DEVICE PRIORITY INFO
1362
USER PRIORITY INFO
1364
SESSION PRIORITY INFO
1366
RECEIVED BEACON SIGNAL PORTION N
1368
BEACON SYMBOL INFO
1370
PRIORITY INFO
DEVICE PRIORITY INFO
1372
USER PRIORITY INFO
1374
SESSION PRIORITY INFO
1376
TRANSMISSION DECISION
1342
USER DATA TO BE TRANSMITED
1344
CURRENT PRIORITY ASSOCIATED WITH WT
1346
USER DATA TRANSMISSION POWER LEVEL INFO
1348
POWER LEVEL ADJUSTMENT INFO
1378
PRIORITY ASSOCIATED WITH RECEIVED BEACON SIGNAL PORTION 1
1350
PRIORITY ASSOCIATED WITH RECEIVED BEACON SIGNAL PORTION N
1352
GENERATED BEACON SIGNAL PORTION INFO
1354
BEACON SIGNAL DECODING INFO
BEACON SYMBOL POSITION INFO
1380
TONE HOPPING PATTERN/ PRIORITY LEVEL INFO
1382
1356
1303
1302
RECEIVER MODULE, E.G., OFDM RECEIVER
1312
1305
1304
TRANSMITTER MODULE, E.G., OFDM TRANSMITTER
1306
PROCESSOR
1308
USER I/O DEVICES
1300

Figure 13

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference	**FOR FURTHER ACTION**	see Form PCT/ISA/220 as well as, where applicable, item 5 below.
060645U11WO		
International application No.	International filing date *(day/month/year)*	(Earliest) Priority Date *(day/month/year)*
PCT/US2007/060350	10/01/2007	11/01/2006
Applicant		
QUALCOMM INCORPORATED		

This international search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This international search report consists of a total of 4 sheets.

[X] It is also accompanied by a copy of each prior art document cited in this report.

1. **Basis of the report**
   a. With regard to the **language,** the international search was carried out on the basis of:
      [X] the international application in the language in which it was filed
      [ ] a translation of the international application into _____, which is the language of a translation furnished for the purposes of international search (Rules 12.3(a) and 23.1(b))
   b. [ ] With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, see Box No. I.

2. [ ] **Certain claims were found unsearchable** (See Box No. II)

3. [ ] **Unity of invention is lacking** (see Box No III)

4. With regard to the **title,**
   [ ] the text is approved as submitted by the applicant
   [X] the text has been established by this Authority to read as follows:

   COMMUNICATIONS METHOD AND APPARATUS FOR TRANSMITTING PRIORITY INFORMATION VIA BEACON SIGNALS

5. With regard to the **abstract,**
   [X] the text is approved as submitted by the applicant
   [ ] the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box No. IV. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority

6. With regard to the **drawings,**
   a. the figure of the **drawings** to be published with the abstract is Figure No. 8a
      [X] as suggested by the applicant
      [ ] as selected by this Authority, because the applicant failed to suggest a figure
      [ ] as selected by this Authority, because this figure better characterizes the invention
   b. [ ] none of the figures is to be published with the abstract

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/060350

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04Q7/38 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 2005/276243 A1 (SUGAYA SHIGERU [JP] ET AL) 15 December 2005 (2005-12-15) paragraphs [0001] - [0020] paragraphs [0021] - [0052] paragraphs [0091] - [0121]	1,21,41, 50,58 2-20, 22-40, 42-49, 51-57, 59-65
Y	US 2005/025092 A1 (MORIOKA YUICHI [JP] ET AL) 3 February 2005 (2005-02-03) paragraphs [0036] - [0058] paragraphs [0106] - [0112] paragraphs [0133] - [0138]	2-20, 22-40, 42-49, 51-57, 59-65

-/--

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
17 April 2007	25/04/2007

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Mele, Marco

Form PCT/ISA/210 (second sheet) (April 2005)

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	NIELS HOVEN ANANT SAHAI: "Power Scaling for Cognitive Radio" WIRELESS NETWORKS, COMMUNICATIONS AND MOBILE COMPUTING, 2005 INTERNATIONAL CONFERENCE ON MAUI, HI, USA 13-16 JUNE 2005, PISCATAWAY, NJ, USA,IEEE, 13 June 2005 (2005-06-13), pages 250-255, XP010887968 ISBN: 0-7803-9305-8 the whole document	1-65
A	WO 03/039054 A (AT & T CORP [US]) 8 May 2003 (2003-05-08) page 18, line 1 - page 19, line 14	1-65
T	CORDEIRO C ET AL: "IEEE 802.22: the first worldwide wireless standard based on cognitive radios" NEW FRONTIERS IN DYNAMIC SPECTRUM ACCESS NETWORKS, 2005. DYSPAN 2005. 2005 FIRST IEEE INTERNATIONAL SYMPOSIUM ON BALTIMORE, MD, USA 8-11 NOV. 2005, PISCATAWAY, NJ, USA,IEEE, 8 November 2005 (2005-11-08), pages 328-337, XP010855130 ISBN: 1-4244-0013-9 the whole document	1-65
T	CABRIC D ET AL: "Implementation issues in spectrum sensing for cognitive radios" SIGNALS, SYSTEMS AND COMPUTERS, 2004. CONFERENCE RECORD OF THE THIRTY-EIGHTH ASILOMAR CONFERENCE ON PACIFIC GROVE, CA, USA NOV. 7-10, 2004, PISCATAWAY, NJ, USA,IEEE, 7 November 2004 (2004-11-07), pages 772-776, XP010781056 ISBN: 0-7803-8622-1 the whole document	1-65

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2007/060350

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005276243 A1	15-12-2005	JP 2005354326 A	22-12-2005
US 2005025092 A1	03-02-2005	JP 2004350168 A	09-12-2004
WO 03039054 A	08-05-2003	AU 2002346389 A1	12-05-2003
		WO 03041346 A1	15-05-2003
		WO 03041428 A1	15-05-2003
		WO 03041427 A1	15-05-2003
		WO 03041343 A2	15-05-2003
		WO 03043357 A1	22-05-2003