



(22) Date de dépôt/Filing Date: 2006/12/27

(41) Mise à la disp. pub./Open to Public Insp.: 2007/11/01

(62) Demande originale/Original Application: 2 747 138

(30) Priorité/Priority: 2006/04/25 (US11/411,203)

(51) Cl.Int./Int.Cl. *E21B 29/08* (2006.01),
E21B 33/06 (2006.01)

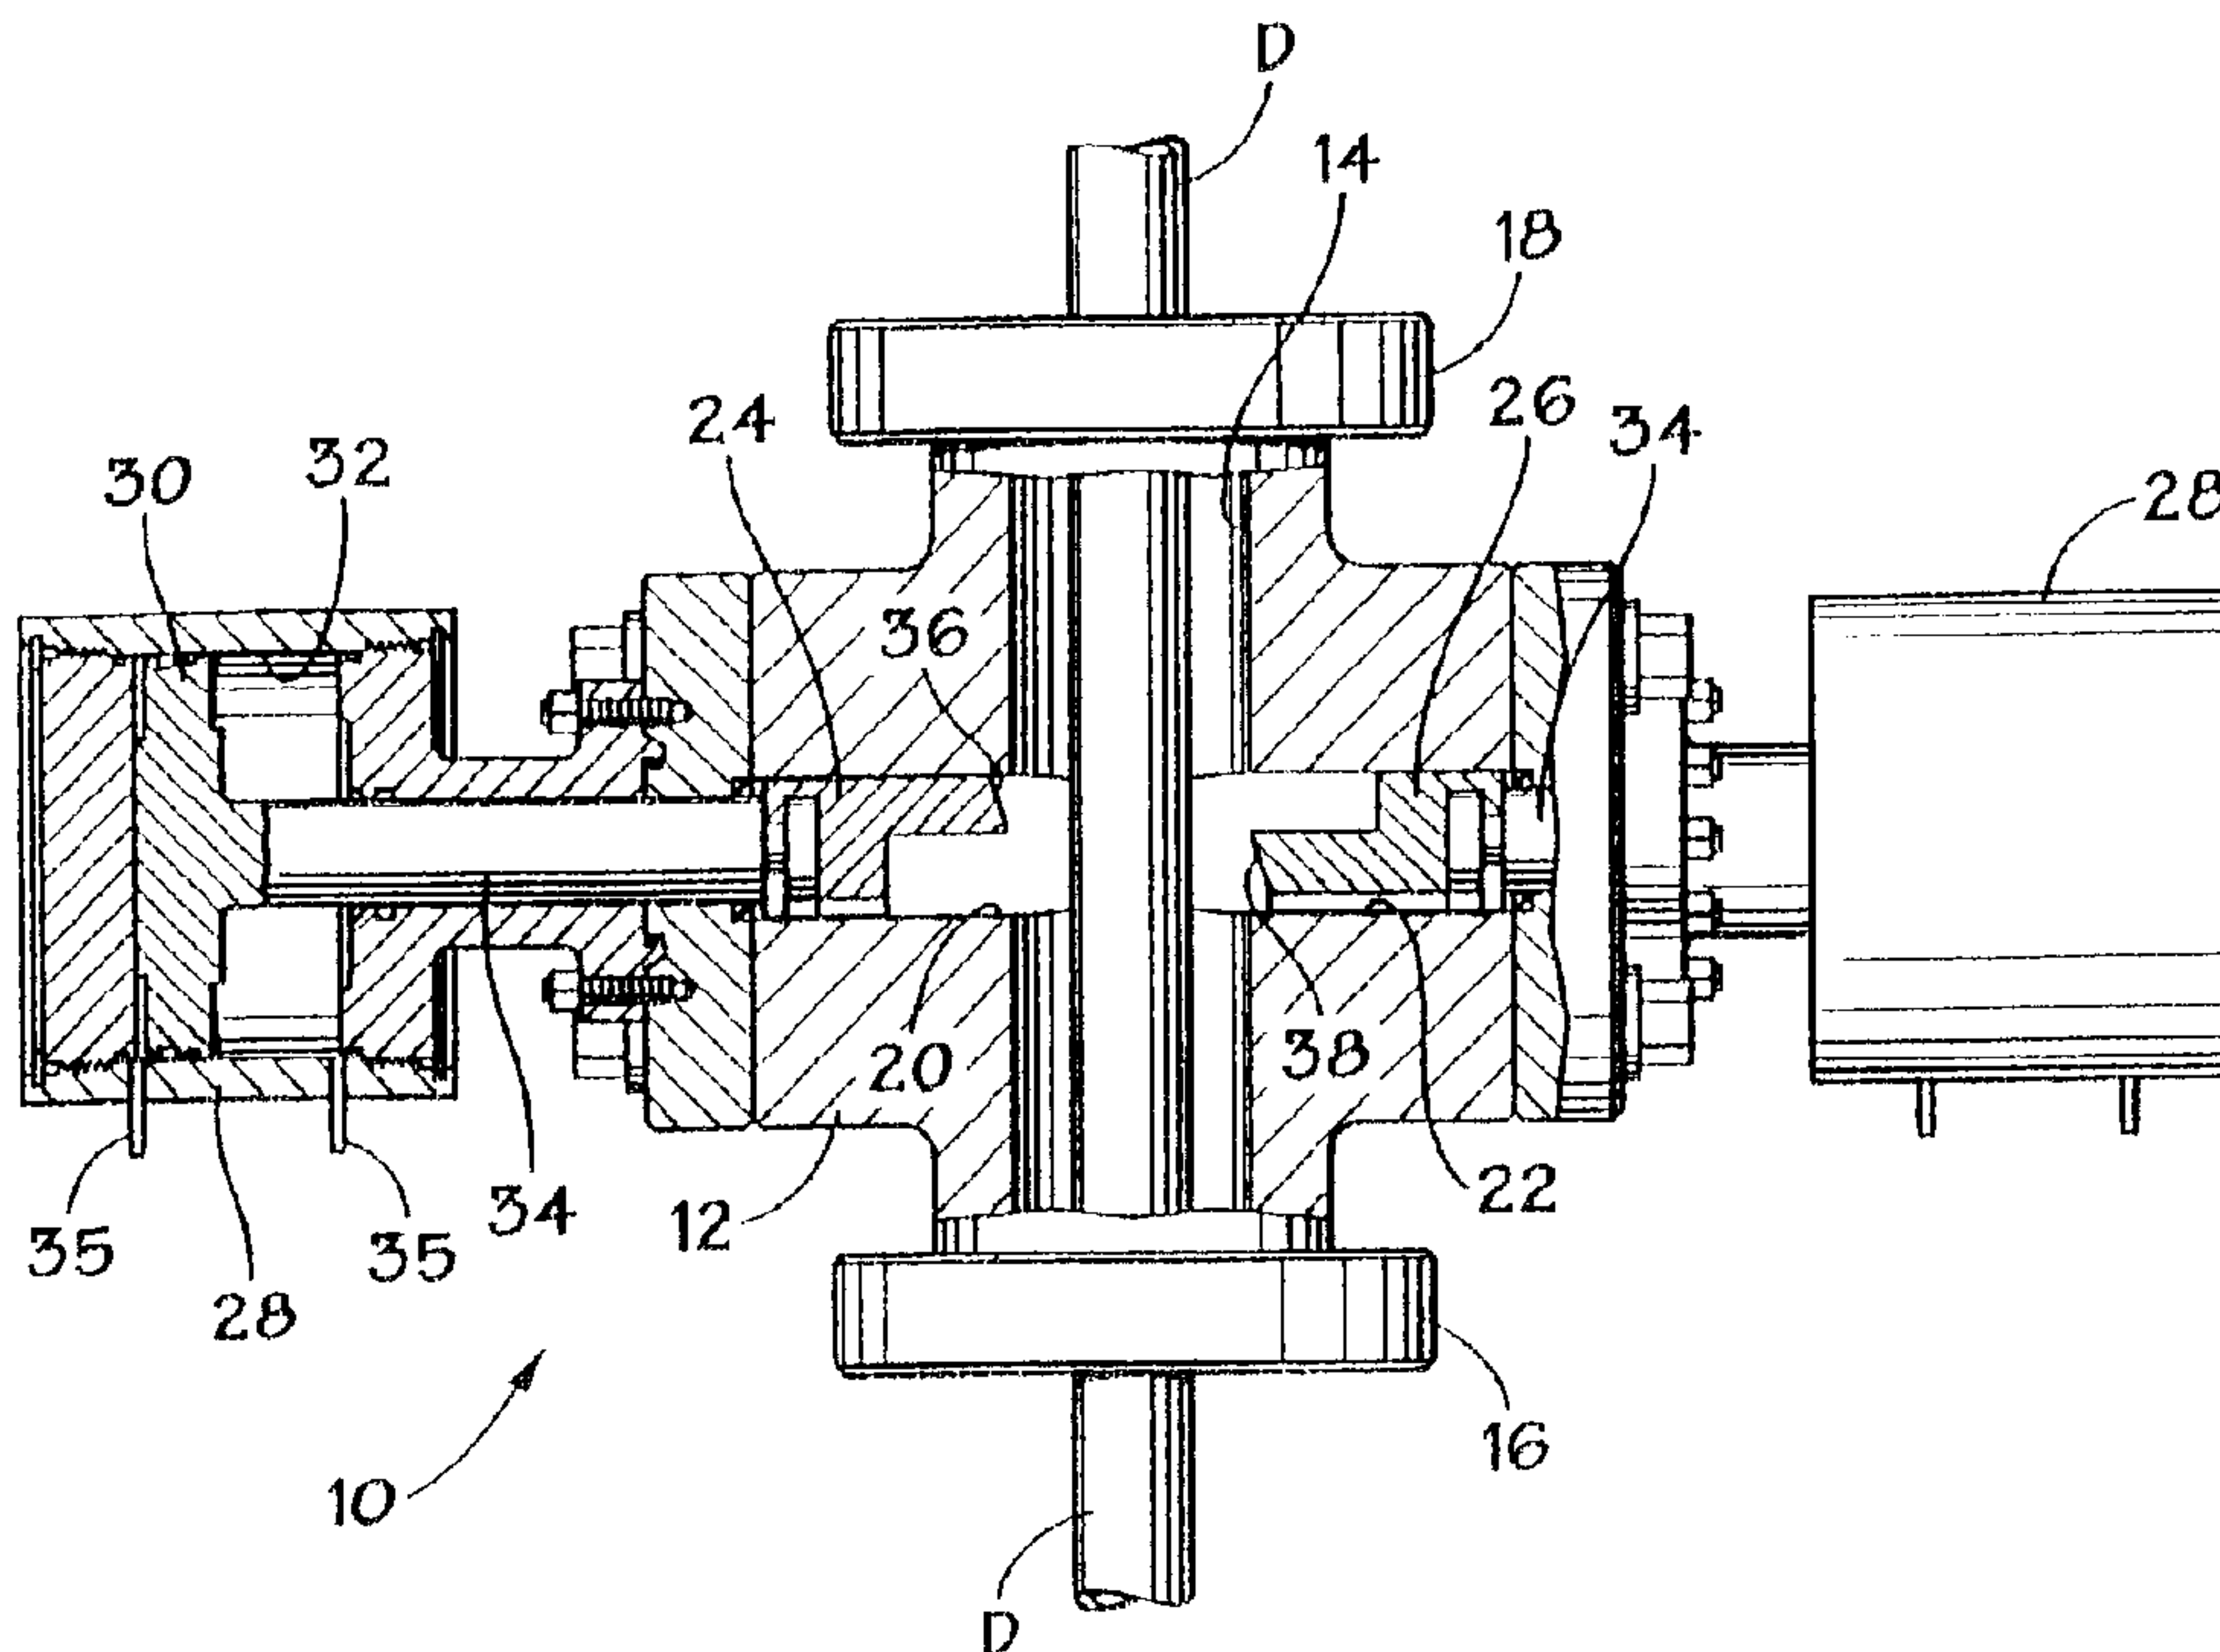
(71) Demandeur/Applicant:
NATIONAL OILWELL VARCO, L.P., US

(72) Inventeurs/Inventors:
SPRINGETT, FRANK BENJAMIN, US;
BRUGMAN, JAMES DENNIS, US

(74) Agent: MCFADDEN, FINCHAM

(54) Titre : APPAREIL ET PROCEDE DE SEPARATION D'UN ELEMENT TUBULAIRE DE PUITS

(54) Title: APPARATUS AND METHOD FOR SEVERING A WELLBORE TUBULAR



(57) Abrégé/Abstract:

A blade for severing a tubular of a wellbore, the tubular positionable in a blowout preventer, the blade comprising: a blade body movable toward and away from the tubular by a ram of the blowout preventer, the blade body comprising: a cutting surface on a front face of the blade body that faces the tubular, the cutting surface comprising a plurality of portions and at least one inclined face, at least one of the plurality of portions being linear; and at least one projection extending a distance from the front face toward the tubular, the at least one projection having a tip positioned between the plurality of portions of the cutting surface; wherein the blade body is movably positionable through at least a portion of the tubular such that the at least one projection first pierces the tubular and then the cutting surface passes through the tubular such that the at least one of the plurality of linear portions engages the tubular whereby the entire tubular is severed.

ABSTRACT

A blade for severing a tubular of a wellbore, the tubular positionable in a blowout preventer, the blade comprising: a blade body movable toward and away from the tubular by a ram of the blowout preventer, the blade body comprising: a cutting surface on a front face of the blade body that faces the tubular, the cutting surface comprising a plurality of portions and at least one inclined face, at least one of the plurality of portions being linear; and at least one projection extending a distance from the front face toward the tubular, the at least one projection having a tip positioned between the plurality of portions of the cutting surface; wherein the blade body is movably positionable through at least a portion of the tubular such that the at least one projection first pierces the tubular and then the cutting surface passes through the tubular such that the at least one of the plurality of linear portions engages the tubular whereby the entire tubular is severed.

Apparatus and Method for Severing a Wellbore Tubular

This application is a division of Canadian Serial No. 2,747,138 filed December 27, 2006.

The present invention relates to an apparatus for severing a wellbore tubular, to a blade for use in such apparatus, to a blowout preventer comprising the apparatus, and to a method of severing a wellbore tubular.

The prior art discloses a wide variety of blowout preventers and tubular-shearing blades for blowout preventer bonnets.

Typical blowout preventers have selectively actuatable rams in oppositely disposed bonnets secured to a main body. The rams are either pipe rams (to contact, engage, and encompass pipe and/or tools to seal a wellbore) or shear rams (to contact and physically shear a tubular, casing, pipe or tool used in wellbore operations). Rams are usually positioned opposite each other on either side of the main body and can, upon activation and subsequent shearing of a tubular, seal against each other at a centre of the main body over a centre of a wellbore.

Typical rams include a ram block on which parts, e.g. seals and/or cutting blades, are releasably secured.

There is a need for a blowout preventer which can effectively and efficiently shear tubulars, e.g. tubulars used in wellbore operations, including relatively large tubulars such as casing, drill collars, and drill pipe tool joints. In certain prior tubular shearing systems, a tool joint is located so that shearing rams do not encounter the tool joint, but shear only a relatively smaller portion of the tubular. One problem with such systems is that proper location takes time and, if a tool joint is improperly located, no or ineffectual shearing may result.

According to the present invention there is provided an apparatus for severing a wellbore tubular, which

apparatus comprises at least one blade for shearing said wellbore tubular, characterised in that said apparatus further comprises a projection, in use moveable so as to reduce the structural strength of said wellbore tubular in an area where said wellbore tubular is to be severed. Preferably the projection is moveable from a retracted position away from the wellbore tubular to an extended position in which it contacts said wellbore tubular. The reduction in structural strength may be by damage (e.g. dent, cut, puncture, misshapen) caused to the wellbore tubular whilst moving to the extended position. The projection may be shaped so as to cause such damage. The area where structural strength is reduced may include the area where shearing takes place and/or an adjacent area.

If the projection is integral and/or part of the at least one blade, the projection may have a portion of gradually increasing width whereby, in use, the projection penetrates and punctures the wall of the wellbore tubular and respective surfaces on opposite sides of the portion shear the tubular in opposite circumferential directions simultaneously.

According to another aspect of the present invention there is provided for use in an apparatus as aforesaid a blade having any of the blade features described herein.

According to another aspect of the present invention there is provided a blowout preventer comprising an apparatus as aforesaid.

According to yet another aspect of the present invention there is provided a method of severing a wellbore tubular, which method comprises the steps of:

(a) shearing said wellbore tubular using at least one blade;

characterised by the step of

(b) using a projection to reduce the structural strength of said wellbore tubular in an area where said wellbore tubular is to be severed.

Further steps of the method are set out in claims 24 to 34 to which attention is hereby directed.

In one aspect, the present invention discloses a blowout preventer and methods of its use, the blowout preventer having movable ram blocks, one or both of which has a cutting blade that produces one, two, or more holes, openings, or punctures of a tubular as the tubular is sheared to facilitate complete shearing of the tubular.

In certain aspects, the present invention discloses a blowout preventer with a body with a top, a bottom, and a bore therethrough from the top to the bottom; and ram apparatus movable within the body, the ram apparatus including two ram blocks, each with a cutting blade thereon according to the present invention.

In certain aspects, the present invention discloses a cutting blade for a blowout preventer, the blade having one, two, three or more projections, points or pronounced portions for forming an opening hole or puncture area in a tubular to facilitate shearing of the tubular.

For a better understanding of the present invention reference will now be made, by way of example only, to the accompanying drawings in which:

Fig. 1A is a side view, partly in cross-section, of a first embodiment of a blowout preventer according to the present invention;

Fig. 1B is a plan view, partly in cross-section, of the blowout preventer of Fig. 1A;

Fig. 1C is a side view, partly in cross-section, of the blowout preventer of Fig. 1A in use;

Fig. 2A is a top perspective view of a first embodiment of a blade according to the present invention;

Fig. 2B is a bottom perspective view of the blade of Fig. 2A;

Fig. 2C is a plan view of the blade of Fig. 2A;

Fig. 2D is a side view of the blade of Fig. 2A;

Fig. 3A is a top perspective view of a second embodiment of a blade according to the present invention;

Fig. 3B is a bottom perspective view of the blade of Fig. 3A;

Fig. 3C is a top view of the blade of Fig. 3A;

Fig. 3D is a cross-section along line 3D-3D of Fig. 3C;

Fig. 4A is a top perspective view of a third embodiment of a blade according to the present invention;

Fig. 4B is a bottom perspective view of the blade of Fig. 4A;

Fig. 4C is a plan view of the blade of Fig. 4A;

Fig. 4D is a cross-section along line 4D-4D of Fig. 4C;

Fig. 5A is a top perspective view of a fourth embodiment of a blade according to the present invention;

Fig. 5B is a bottom perspective view of the blade of Fig. 5A;

Fig. 5C is a plan view of the blade of Fig. 5A;

Fig. 5D is a cross-section along line 5D-5D of Fig. 5C;

Fig. 6A is a top perspective view of a fifth embodiment of a blade according to the present invention;

Fig. 6B is a bottom perspective view of the blade of Fig. 6A;

Fig. 6C is a plan view of the blade of Fig. 6A;

Fig. 6D is a cross-section along line 6D-6D of Fig. 6C;

Fig. 7A is a top perspective view of a sixth embodiment of a blade according to the present invention;

Fig. 7B is a bottom perspective view of the blade of Fig. 7A;

Fig. 7C is a plan view of the blade of Fig. 7A;

Fig. 7D is a cross-section along line 7D-7D of Fig. 7C;

Fig. 8A is a top perspective view of a seventh embodiment blade according to the present invention;

Fig. 8B is a bottom perspective view of the blade of Fig. 8A;

Fig. 8C is a plan view of the blade of Fig. 8A;

Fig. 8D is a cross-section along line 8D-8D of Fig. 8C;

Fig. 9A is a top perspective view of an eighth embodiment of a blade according to the present invention;

Fig. 9B is a bottom perspective view of the blade of Fig. 9A;

Fig. 9C is a top view of the blade of Fig. 9A;

Fig. 9D is a cross-section along line 9D-9D of Fig. 9C;

Fig. 10 is a schematic plan view of a second embodiment of a blowout preventer according to the present invention;

Fig. 11 is a schematic plan view of a third embodiment of a blowout preventer according to the

present invention;

Fig. 12 is a schematic side view, partly in cross-section, of a fourth embodiment of a blowout preventer according to the present invention;

Fig. 13 is a schematic side view, partly in cross section, of a fifth embodiment of a blowout preventer according to the present invention;

Fig. 14 is a schematic plan view of a sixth embodiment of a blowout preventer according to the present invention; and

Figs. 15A to 15H show schematically various stages in the operation of a blowout preventer according to the present invention for severing a tubular.

As shown in Figs. 1A to 1C, a blowout preventer 10 according to the present invention has a body 12 with a vertical bore 14 extending therethrough. In use, a tubular, e.g. part of a drill string D passes through the bore 14. The body 12 has a lower flange 16 and an upper flange 18 for connecting the blowout preventer 10 in a wellhead stack. Ram guideways 20 and 22 extend outwardly from opposite sides of the bore 14. Ram assemblies of the blowout preventer 10 include first and second rams 24 and 26 which are positioned in guideways 20 and 22, respectively. Reciprocating apparatus, such as actuators 28, are provided to move or extend the rams in response to fluid pressure into the bore 14 for shearing the portion of the drill string D which extends through the bore and for retracting the rams from the bore. The actuators 28 each include a piston 30 in a cylinder 32 and a rod 34 connecting between the piston and the ram which it is to move and are suitably connected to body 12 as shown. Suitable apparatus is provided to deliver fluid under pressure to opposite sides of piston 30.

An upper cutting blade 36 (any blade according to the present invention) is on the ram 24 and a lower

cutting blade 38 (any blade according to the present invention) is on the ram 26. The cutting blades 36 and 38 are positioned so that the cutting edge of the blade 38 passes just below the cutting edge of the blade 36 in shearing of a section of a tubular, e.g. the drillstring D.

The shearing action of cutting blades 36 and 38 shears the drillstring D (see Fig. 1C). The lower portion of the drillstring D has dropped into the well bore (not shown) below the blowout preventer 10. Optionally (as is true for any method according to the present invention) the drillstring D is hung off a lower set of rams.

Figs. 2A - 2D show a blade 50 according to the present invention which has a body 52 with a base 57 and a front face 54. The front face 54 has two inclined portions 61, 62 and a projection 60 that projects from the front face 54 between the two inclined portions 61, 62. Edges 56, 58 are at ends of the inclined portions 61, 62, respectively. The projection 60 has two inclined faces 63, 64 which meet at a central edge 65. An angle 68 between the faces 63, 64 (as may be true for the angle between any two projection faces according to the present invention) may be any desired angle and, in certain aspects, ranges between 30 degrees to ninety degrees and, in certain particular aspects, is 30 degrees, 60 degrees, or 90 degrees.

In certain aspects (as is true for any blade according to the present invention) the cutting surfaces are sloped from the vertical and in one particular aspect, as shown in Fig. 2D, the two inclined portions 61, 62 are at an angle of 20 degrees from the vertical. In other aspects the angle for any cutting surface of any blade according to the present invention ranges between 20 degrees and 60 degrees; and, in certain aspects, the angle is 20 degrees, 45 degrees, or 60 degrees.

Figs. 3A - 3D show a blade 70 according to the present invention which has a body 72 with a base 77, two opposed inclined faces 81, 82 and a projection 80 between the two inclined faces 81, 82. The projection 80 has two inclined faces 83, 84 which meet at a central edge 85. Inclined end portions 76, 78 are at ends of the faces 81, 82 respectively.

Figs. 4A - 4D show a blade 90 according to the present invention with a body 99; opposed inclined faces 91, 92; opposed inclined faces 93, 94; and inclined end portions 95, 96. Projections 97, 98 are formed between faces 91, 93 and 94, 92, respectively. The blade 90 has a base 90a.

Figs. 5A - 5D show a blade 100 according to the present invention with a body 100a; opposed inclined faces 101, 102; opposed inclined faces 103, 104; and opposed inclined end portions 105, 106. Projections 107, 108 are formed between faces 101, 103 and 104, 102, respectively. The blade 100 has a base 109. Projection 107 has an edge 107a and projection 108 has an edge 108a.

Figs. 6A - 6D show a blade 110 according to the present invention with a body 110a, two inclined faces 111, 112; two opposed inclined faces 113, 114; inclined end portions 115, 116; a central semicircular inclined face 117; and a base 110b. Projections 118, 119 are formed between faces 111, 113 and 114, 112, respectively. Projection 118 has an edge 118a and projection 119 has an edge 119a.

Figs. 7A - 7D show a blade 120 according to the present invention which has a body 122; a base 124; opposed inclined faces 126, 128; inclined faces 132, 134; inclined end portions 136, 138; and a semicircular inclined face 130. A serrated cutting surface 125 extends around a lower edge 127 of the face 130 and extends partially onto the faces 126, 128. As shown the

serrations of the surface 125 have pointed tips 129; but, optionally, these tips may be rounded off. The faces 126, 132 are at an angle to each other forming a projection 131 with an edge 135. The faces 128, 134 are at an angle to each other forming the projection 133 with an edge 137.

Figs. 8A - 8D show a blade 140 according to the present invention which has a body 142; a base 144; opposed inclined faces 146, 148; a projection 150 between the faces 146, 148; and inclined end portions 156, 158. The projection 150 has inclined faces 151, 152 and a center face 153. A projection 155 is formed between the faces 156, 146 having an edge 154. A projection 157 is formed between the faces 148, 158 having an edge 159. Optionally, as shown, the projection 150 is rounded off.

Figs. 9A - 9D show a blade 160 according to the present invention which has a body 162; a base 164; opposed inclined faces 172, 173; inclined end portions 171, 174; projections 181, 182; and a recess 180 formed between the projections 181, 182. A projection 161 with an edge 163 is formed between the face 172 and the end portion 171. A projection 165 with an edge 167 is formed between the face 173 and the end portion 174. The projection 181 has inclined faces 183, 185 and an inclined center portion 184. The projection 182 has inclined faces 186, 188 and an inclined center portion 187. Optionally, as shown, the projections 181, 182 are rounded off.

Fig. 10 shows an apparatus 200 for severing a tubular (e.g., but not limited to, drill pipe, drill collar, casing, riser, tubing, and drill pipe tool joints - as is true and can be accomplished with any apparatus herein according to the present invention and with any blade or blades according to the present invention). The apparatus 200 has two alternately movable sets of rams

201, 202 and 203, 204. In one aspect, each ram 201, 202 has a plurality of spaced-apart puncturing points (or projections) 206 which make a series of corresponding spaced-apart holes in a tubular, thereby weakening the tubular and facilitating its complete shearing by blades 208 (any according to the present invention or any known blade) of the rams 203, 204. In certain aspects, there are one, two, three, four, five, six or more points and, optionally, the points may be hardfaced or have hardening material applied thereto (as is true of any blade, blade projection, or blade part disclosed herein according to the present invention regarding hardfacing and/or hardening material). Any such point or points may be used on any blade according to the present invention and/or the blades may be deleted.

Fig. 11 shows an apparatus 220 according to the present invention which has two sets of movable rams 221, 222 and 223, 224. Rams 221, 222 have flat faces 228 which are used to flatten a tubular 229 ("flatten" means make non-round to any extent as compared to the original round shape of the tubular 229 and includes, but it not limited to, a substantially or totally flattened tubular), e.g. as shown by the dotted line in Fig. 11. Once flattened, the tubular 229 is completely severed by blades 225, 226 on the rams 223, 224, respectively. The blades 225, 226 may be any blade according to the present invention or any known blade.

Fig. 12 illustrates a method for severing a tubular 230 by either applying tension T to the tubular lengthwise with a tension applying apparatus TA, shown schematically (see arrows T) or by applying compression to it with a compression applying apparatus CA shown schematically (see arrows C). Ram apparatuses 231, 232 with blades 233, 234 respectively of a blowout preventer 235 are movable to sever the tubular 230.

Optionally, in a two-stroke (or multiple stroke operation) the tubular 230 is put in tension and the blades 233, 234 impact the tubular; then the tubular is put in compression and the blades 233, 234 then completely sever the tubular; or vice-versa. A tensioning step or steps and/or a compression step or steps may be used with any method according to the present invention, including but not limited to, methods as illustrated in Figs. 10 - 15.

Fig. 13 illustrates a method according to the present invention in which torque is applied to a tubular 240 while it is severed with blades 242, 243 (any blade or blades according to the present invention) of movable ram apparatuses 244, 245 of a blowout preventer 246. Rotation of the tubular 240 can be accomplished by any suitable rotating apparatus above, adjacent, and/or below the tubular, e.g. an apparatus RA (shown schematically in Fig. 13). A torquing step or steps may be used with any method according to the present invention.

Fig. 14 illustrates a method according to the present invention for either severing a tubular 254 with blades 255 on movable rams 256 within a blowout preventer apparatus 250 using controlled explosive charges 252 in or on movable bodies 253; or a method for weakening a tubular at specific desired locations to facilitate complete severing of the tubular by blade(s) according to the present invention. Optionally, the charges 252 are mounted on the blades 255 or on the rams 256. One, two, three, four or more charges may be used. Any blade according to the present invention or any known blades may be used.

Figs. 15A - 15H illustrate a method according to the present invention using a blowout preventer 300 (depicted schematically, Fig. 15B) according to the present invention (e.g. as any disclosed herein) with movable

rams R (shown schematically, Fig. 15B) with blades 301, 302 (blade 301 like blade 302; blade 302 inverted with respect to blade 301 - as may be the case with any two blades of any apparatus disclosed herein). Each blade 301, 302 has a body 304 and a central projection 310 with a pointed member 312 and cutting portions 313, 314. Each projection 310 has cutting surfaces 310a and 310b. The cutting surfaces are sloped from the vertical and the projections 310 have cutting surfaces at an angle to each other. The rams R move the blades so that, initially, the projections 310 contact and puncture a tubular T (e.g. casing, drill pipe, tool joints, drill collars, etc.) and then, following movement of the projections into the tubular T and cutting of the tubular T by the projections 310 and the cutting portions 313, 314, complete severing of the tubular T. The projections 310 are diametrically opposed so that the outermost point of the projections (and then the remainder of the projections) push against each other facilitating puncturing of the tubular and then severing of the tubular. This use of dual opposed puncturing projections also serves to maintain the tubular in a desired location within the blowout preventer 300 during severing so that puncturing and severing proceed with the blades 301, 302 maintained in a desired relation with respect to the tubular T.

As shown in Fig. 15B, the points 312 of the projections 310 have moved to contact the outer surface of the tubular T. Upon contact, the points 312 hold the tubular in position. Fig. 15C illustrates initial entry of the points 312 into the tubular T.

[021. As shown in Fig. 15D, the points 312 have penetrated the entire wall thickness of the tubular T and are pushing apart portions T1, T2, and T3, T4. Fig. 15E illustrates further inward progress of the points 312 and further separation of the tubular portions T1, T2 and T3,

T4.

As shown in Fig. 15F, as the points 312 progress inwardly and the bottom point 312 (as viewed in Fig. 15F) moves beneath the top point 312, the cutting surfaces 313 and 314 begin to cut the tubular T. The projections 310 cut an amount of the tubular T and the cutting surfaces 313, 314 (and the projections 310 as they progress through the tubular) need cut only the remaining portion of the tubular T to effect complete severing of the tubular T. In certain aspects, and depending on the size of the tubular, the projections 310 can cut the entire tubular.

As shown in Fig. 15G the tubular T is almost completely severed and the top projection 310 has continued to move above the bottom projection 310 as each projection's further piercing of the tubular and the surfaces 313, 314 have continued to further push apart the tubular portions T1, T2, and the portions T3, T4. Fig. 15H shows the tubular T completely severed.

Optionally, only one blade 301 or 302 is used and the other blade has no projection or projections.

As shown in the various drawing figures (e.g. Figs. 1A, 12, 13, 15A), in some aspects, it is preferred that one blade be inverted with respect to an opposite blade. When a blade with a central projection (or two such blades) are used, cutting surfaces adjacent a cutting projection either cut no tubular at all or only need cut only a fraction of a total wall thickness, circumference of a tubular (unlike, e.g., certain prior "V shear" or "V-shaped" blades in which each cutting surface cuts a much larger portion of a tubular).

It is within the scope of the present invention to coat any blade according to the present invention (or any prior blade) or part thereof, and/or cutting surfaces thereof, and/or top and/or bottom thereof, and/or a

tubular-puncturing part thereof with a low friction coating, e.g., but not limited to, polytetrafluoroethylene coating, electroless nickel coating, and/or titanium/nickel coating, including but not limited to, low friction coatings applied by a physical vapor deposition ("PVD") process. Such coatings are shown, e.g., as a coating 69 (Fig. 2A) and a coating 209 (Fig. 10) and as a coating 79 (Fig. 3A) on the top of a blade and as a coating 75 (Fig. 3A) on the bottom of a blade, applied by any suitable method or process. These coatings may be applied to any suitable known thickness for the application of low friction coatings.

The present invention, therefore, provides in some, but not in necessarily all, embodiments a blowout preventer with a body with a top, a bottom, and a bore therethrough from the top to the bottom, ram apparatus movable within the body, the ram apparatus including two ram blocks each with a cutting blade according to the present invention.

The present invention, therefore, provides in at least some embodiments, methods for using a blowout preventer according to the present invention.

The present invention, therefore, provides in certain, but not necessarily all embodiments, a method for severing a tubular, the tubular useful for wellbore operations, the method including inserting a tubular into a tubular severing apparatus (the apparatus including a first member movable toward the tubular, a second member movable toward the tubular to be severed, the second member disposed opposite to the first member, a first blade on the first member, the first blade comprising a first blade body, a first projection projecting from the first blade body, a first point structure on the first projection for contacting and puncturing the tubular, first projection cutting surfaces on the first projection

defining the first point structure and for cutting the tubular, and the first point structure projecting sufficiently from the first blade body so that the first projection can contact the tubular and puncture the tubular before any other part of the first blade body contacts the tubular, and a second blade on the second member); moving the first blade toward the tubular to bring the first point structure into contact with an outer surface of the tubular; moving the first blade so that the first point structure punctures into the tubular and goes through the tubular; moving the first blade to cut a portion of the tubular with the first projection cutting surfaces; and severing the tubular by moving the first blade and the second blade toward each other. Such a method may include one or some, in any possible combination, of the following: wherein the tubular severing apparatus's second blade has a second blade body, a second projection projecting from the second blade body, a second point structure on the second projection for contacting and puncturing the tubular, second projection cutting surfaces on the second projection defining the point structure and for cutting the tubular, and the second point structure projecting sufficiently from the second blade body so that the second projection can contact the tubular and puncture the tubular before any other part of the second blade body contacts the tubular, the method including moving the second blade toward the tubular as the first blade is moved toward the tubular and moving the second blade so that the second point structure contacts an outer surface of the tubular, moving the second blade so that the second point structure punctures into the tubular and goes through the tubular, and moving the second blade to cut a portion of the tubular with the second projection cutting surfaces; wherein the tubular is severed by the

projection cutting surfaces of the first blade and of the second blade; wherein the first blade further comprises first blade cutting surfaces adjacent the first projection, and the second blade comprises second blade cutting surfaces adjacent the second projection, the method including moving the first blade and the second blade so that each blade's blade cutting surfaces cut a portion of the tubular; wherein the first point structure is rounded off; wherein the second point structure is rounded off; wherein the first projection, the first blade cutting surfaces, the second projection, and the second blade cutting surfaces are coated with a low friction coating; wherein the first blade has a top and a bottom and the second blade has a top and a bottom and the tops and bottoms of the two blades are coated with a low friction coating; wherein the first projection is disposed above and opposite the second projection; wherein each of the two point structures contact the tubular substantially simultaneously and puncture the tubular substantially simultaneously; during severing of the tubular, tensioning the tubular with tension apparatus; during severing of the tubular, compressing the tubular with compression apparatus; during severing of the tubular, rotating the tubular with rotating apparatus; prior to any contact between the tubular and either of the blades, flattening the tubular with flattening apparatus; wherein the first blade has a first top and a first bottom, the second blade has a second top and a second bottom, the first projection cutting surfaces slope down from the first top to the first bottom, and the second projection cutting surfaces slope down from the second top to the second bottom; wherein the second blade is inverted with respect to the first blade; wherein the projection cutting surfaces of each blade are at an angle to each other ranging between 30

degrees and 90 degrees; and/or wherein the tubular is from the group consisting of casing, drill pipe, drill collar, and tool joint.

The present invention, therefore, provides in certain, but not necessarily all embodiments, a method for severing a tubular, the tubular useful for wellbore operations, the method including: inserting a tubular into a tubular severing apparatus (the apparatus having a first member movable toward the tubular, a second member movable toward the tubular to be severed, the second member disposed opposite to the first member, a first blade on the first member, the first blade comprising a first blade body, a first projection projecting from the first blade body, a first point structure on the first projection for contacting and puncturing the tubular, first projection cutting surfaces on the first projection defining the first point structure and for cutting the tubular, and the first point structure projecting sufficiently from the first blade body so that the first projection can contact the tubular and puncture the tubular before any other part of the first blade body contacts the tubular, and a second blade on the second member); moving the first blade toward the tubular to bring the first point structure into contact with an outer surface of the tubular; moving the first blade so that the first point structure punctures into the tubular and goes through the tubular; moving the first blade to cut a portion of the tubular with the first projection cutting surfaces; severing the tubular by moving the first blade and the second blade toward each other; wherein in the tubular severing apparatus the second blade has a second blade body, a second projection projecting from the second blade body, a second point structure on the second projection for contacting and puncturing the tubular, second projection cutting

surfaces on the second projection defining the point structure and for cutting the tubular, and the second point structure projecting sufficiently from the second blade body so that the second projection can contact the tubular and puncture the tubular before any other part of the second blade body contacts the tubular; moving the second blade toward the tubular as the first blade is moved toward the tubular and moving the second blade so that the second point structure contacts an outer surface of the tubular; moving the second blade so that the second point structure punctures into the tubular and goes through the tubular; moving the second blade to cut a portion of the tubular with the second projection cutting surfaces; wherein the first projection is disposed above and opposite the second projection; wherein each of the two point structures contact the tubular substantially simultaneously and puncture the tubular substantially simultaneously; and wherein the second blade is inverted with respect to the first blade.

The present invention, therefore, provides in certain, but not necessarily all embodiments, a tubular severing apparatus for severing a tubular used in wellbore operations, the apparatus including: a first member movable toward a tubular to be severed, the tubular comprising a wellbore operations tubular; a second member movable toward the tubular to be severed, the second member disposed opposite to the first member; a first blade on the first member, the first blade including a blade body, a projection projecting from a center of the blade body, point structure on the projection for contacting and puncturing the tubular, projection cutting surfaces on the projection defining the point structure and for cutting the tubular, and the point structure projecting sufficiently from the blade body and the projection movable to contact the tubular

and puncture the tubular before any other part of the blade body contacts the tubular; and, in one aspect, the second blade like the first blade.

CLAIMS

1. A blade for severing a tubular of a wellbore, the tubular positionable in a blowout preventer, the blade comprising:
 - a blade body movable toward and away from the tubular by a ram of the blowout preventer, the blade body comprising:
 - a cutting surface on a front face of the blade body that faces the tubular, the cutting surface comprising a plurality of portions and at least one inclined face, at least one of the plurality of portions being linear; and
 - at least one projection extending a distance from the front face toward the tubular, the at least one projection having a tip positioned between the plurality of portions of the cutting surface;
 - wherein the blade body is movably positionable through at least a portion of the tubular such that the at least one projection first pierces the tubular and then the cutting surface passes through the tubular such that the at least one of the plurality of linear portions engages the tubular whereby the entire tubular is severed.
2. The blade of claim 1, wherein the tubular is a tool joint.
3. The blade of claim 1, wherein the tubular is a drill collar.

4. The blade of claim 1, wherein the cutting surface pushes apart portions of the tubular adjacent the at least one projection as the at least one projection is moved through the tubular.
5. The blade of claim 1, wherein the at least one inclined face has an incline angle of 30 to 90 degrees.
6. The blade of claim 1, wherein the cutting surface has serrated tips thereon.
7. A system for severing a tubular of a wellbore, the system comprising:
 - a blowout preventer for receiving the tubular;
 - at least one pair of opposing blade bodies, each of the at least one pair of opposing blade bodies movable toward and away from the tubular, at least one of the opposing blade bodies comprising:
 - a cutting surface on a front face of the at least one of the at least one pair of opposing blade bodies that faces the tubular, the cutting surface comprising a plurality of portions and at least one inclined face, at least one of the plurality of portions being linear; and
 - at least one projection extending a distance from the front face toward the tubular, the at least one projection having a tip positioned between the plurality of portions of the cutting surface;
 - at least one actuator for movably positioning at least one of the opposing blade bodies through at least a portion of the tubular

such that the at least one projection first pierces the tubular and then the cutting surface passes through the tubular such that the at least one of the plurality of linear portions engages the tubular whereby the tubular is severed.

8. The system of claim 7, wherein the at least one actuator comprises a piston and a cylinder.
9. The system of claim 7, wherein the at least one pair of opposing blade bodies comprises upper and lower blades.
10. The system of claim 7, wherein the at least one actuator comprises four actuators and wherein the at least pair of the opposing blade bodies comprises four blade bodies, each of the four blade bodies movable by each of the four actuators.
11. The system of claim 7, wherein the at least one pair of opposing blade bodies comprises a plurality of opposing blade bodies positionable on opposite sides of the tubular.
12. The system of claim 7, wherein the at least one of the opposing blade bodies are moveable together to contact and puncture the tubular simultaneously.
13. A method for severing a tubular of a wellbore, comprising:
 - receiving the tubular in a blowout preventer;
 - positioning at least one pair of opposing blade bodies in the blowout preventer about the tubular, at least one of the at least one pair of opposing blade bodies comprising:
 - a cutting surface on a front face of the at least one of the at least one pair of opposing blade bodies that faces the tubular, the cutting surface

comprising a plurality of portions and at least one inclined face, at least one of the plurality of portions being linear; and

at least one projection extending a distance from the front face toward the tubular, the at least one projection having a tip positioned between the plurality of portions of the cutting surface; and

movably positioning at least one of the opposing blade bodies through at least a portion of the tubular by first piercing the tubular with the at least one projection and then passing the cutting surface through the tubular such that the at least one of the plurality of linear portions engages the tubular.

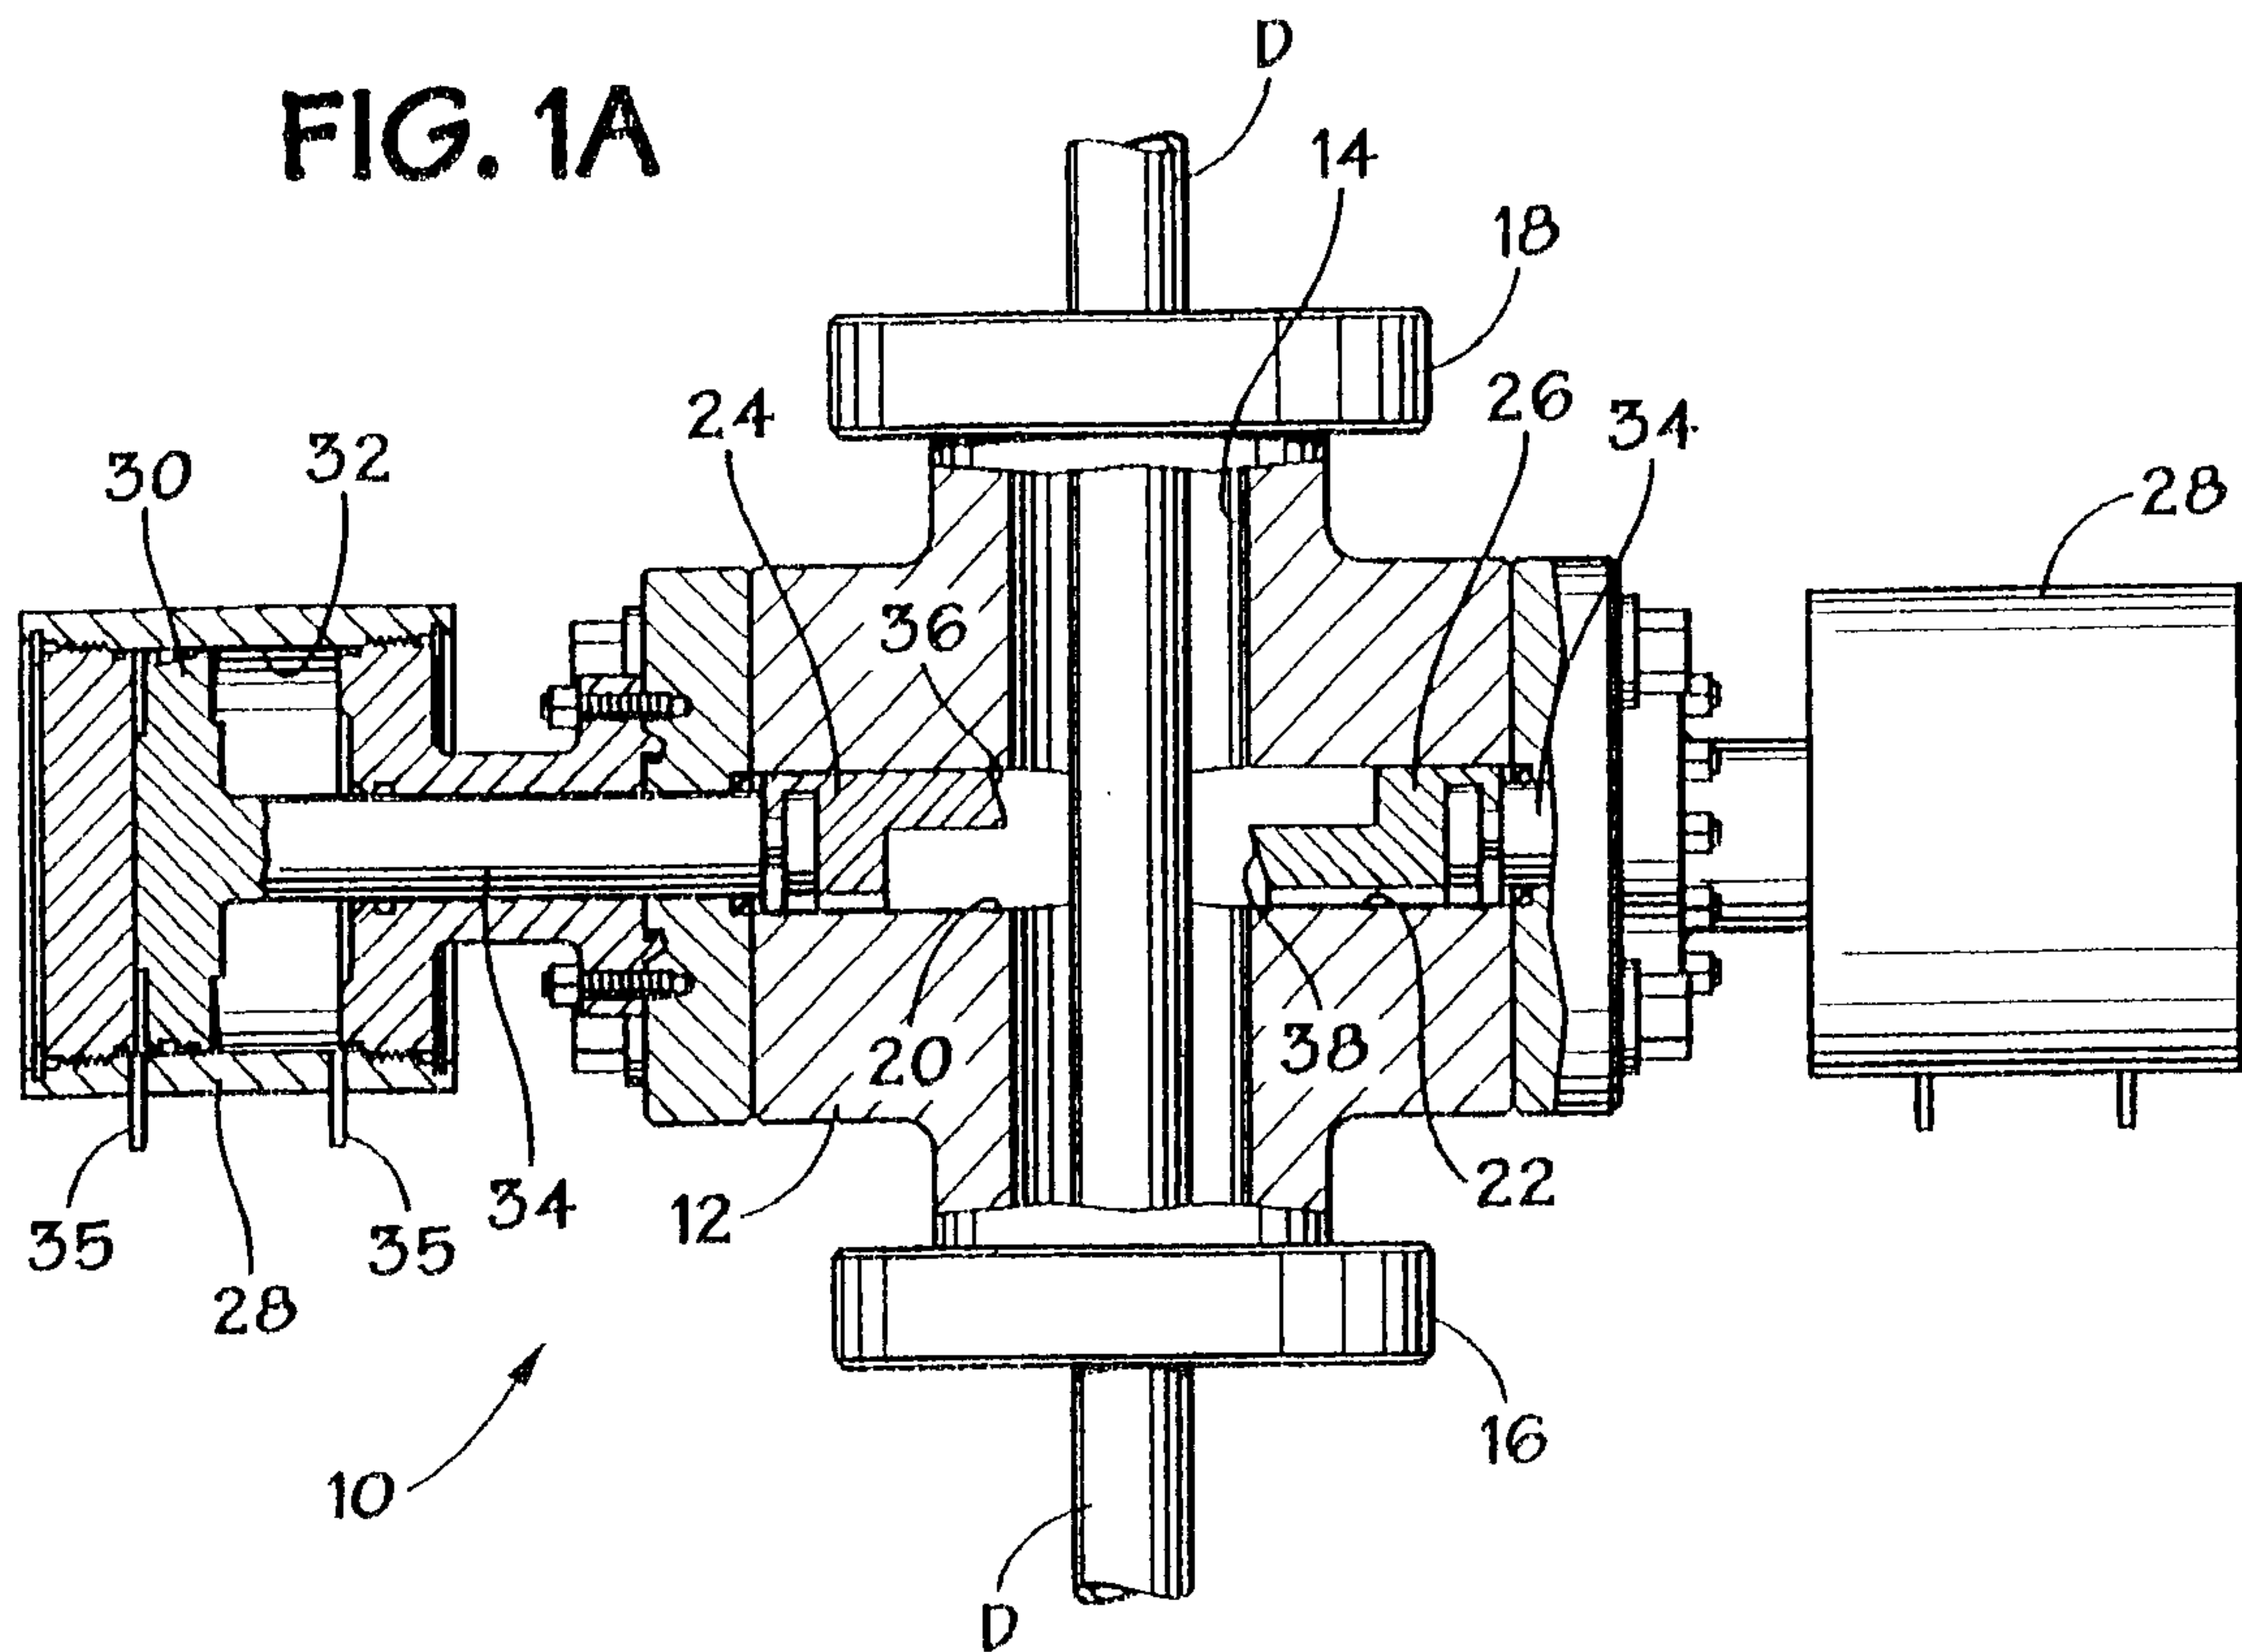
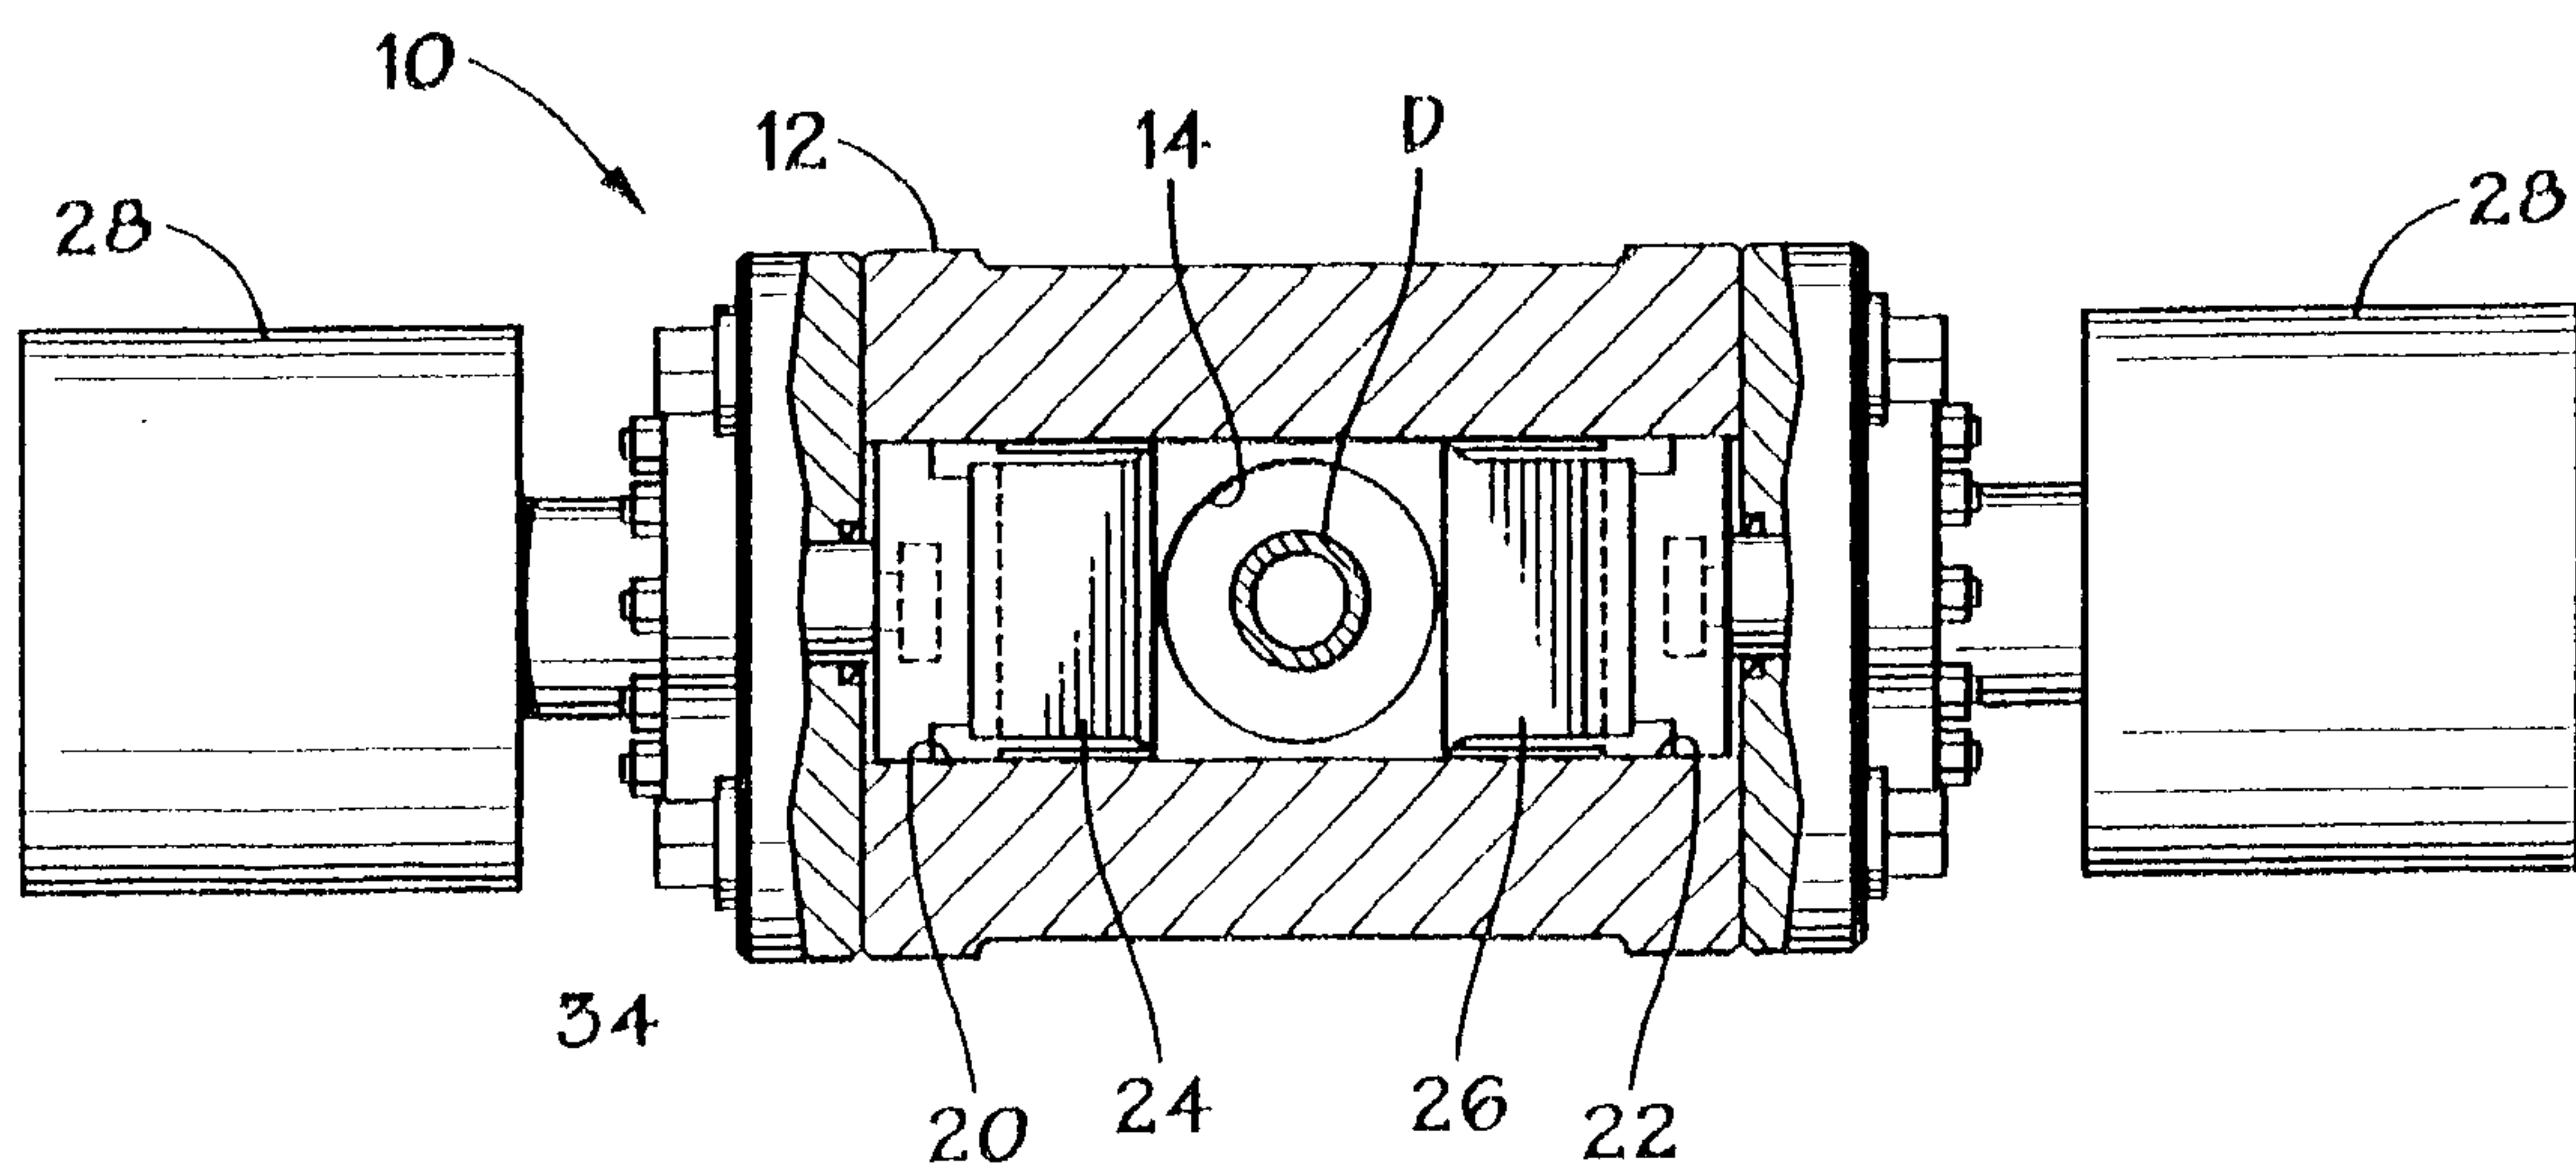
14. The method of claim 13, wherein the step of movably positioning comprises moving the at least one pair of opposing blade bodies together such that the at least one projections of the pair of opposing blade bodies first pierces the tubular and then the cutting surfaces of the at least one pair of opposing blade bodies pass through the tubular.

15. The method of claim 13, further comprising pushing apart portions of the tubular as the at least one pair of opposing blade bodies move together.

16. The method of claim 13, further comprising cutting portions of the tubular with the cutting surface after pushing apart portions of the tubular.

17. The method of claim 13, further comprising applying a torque to the tubular.

18. The method of claim 13, further comprising compressing the tubular.
19. The method of claim 13, further comprising repeating the method.

FIG. 1A**FIG. 1B**

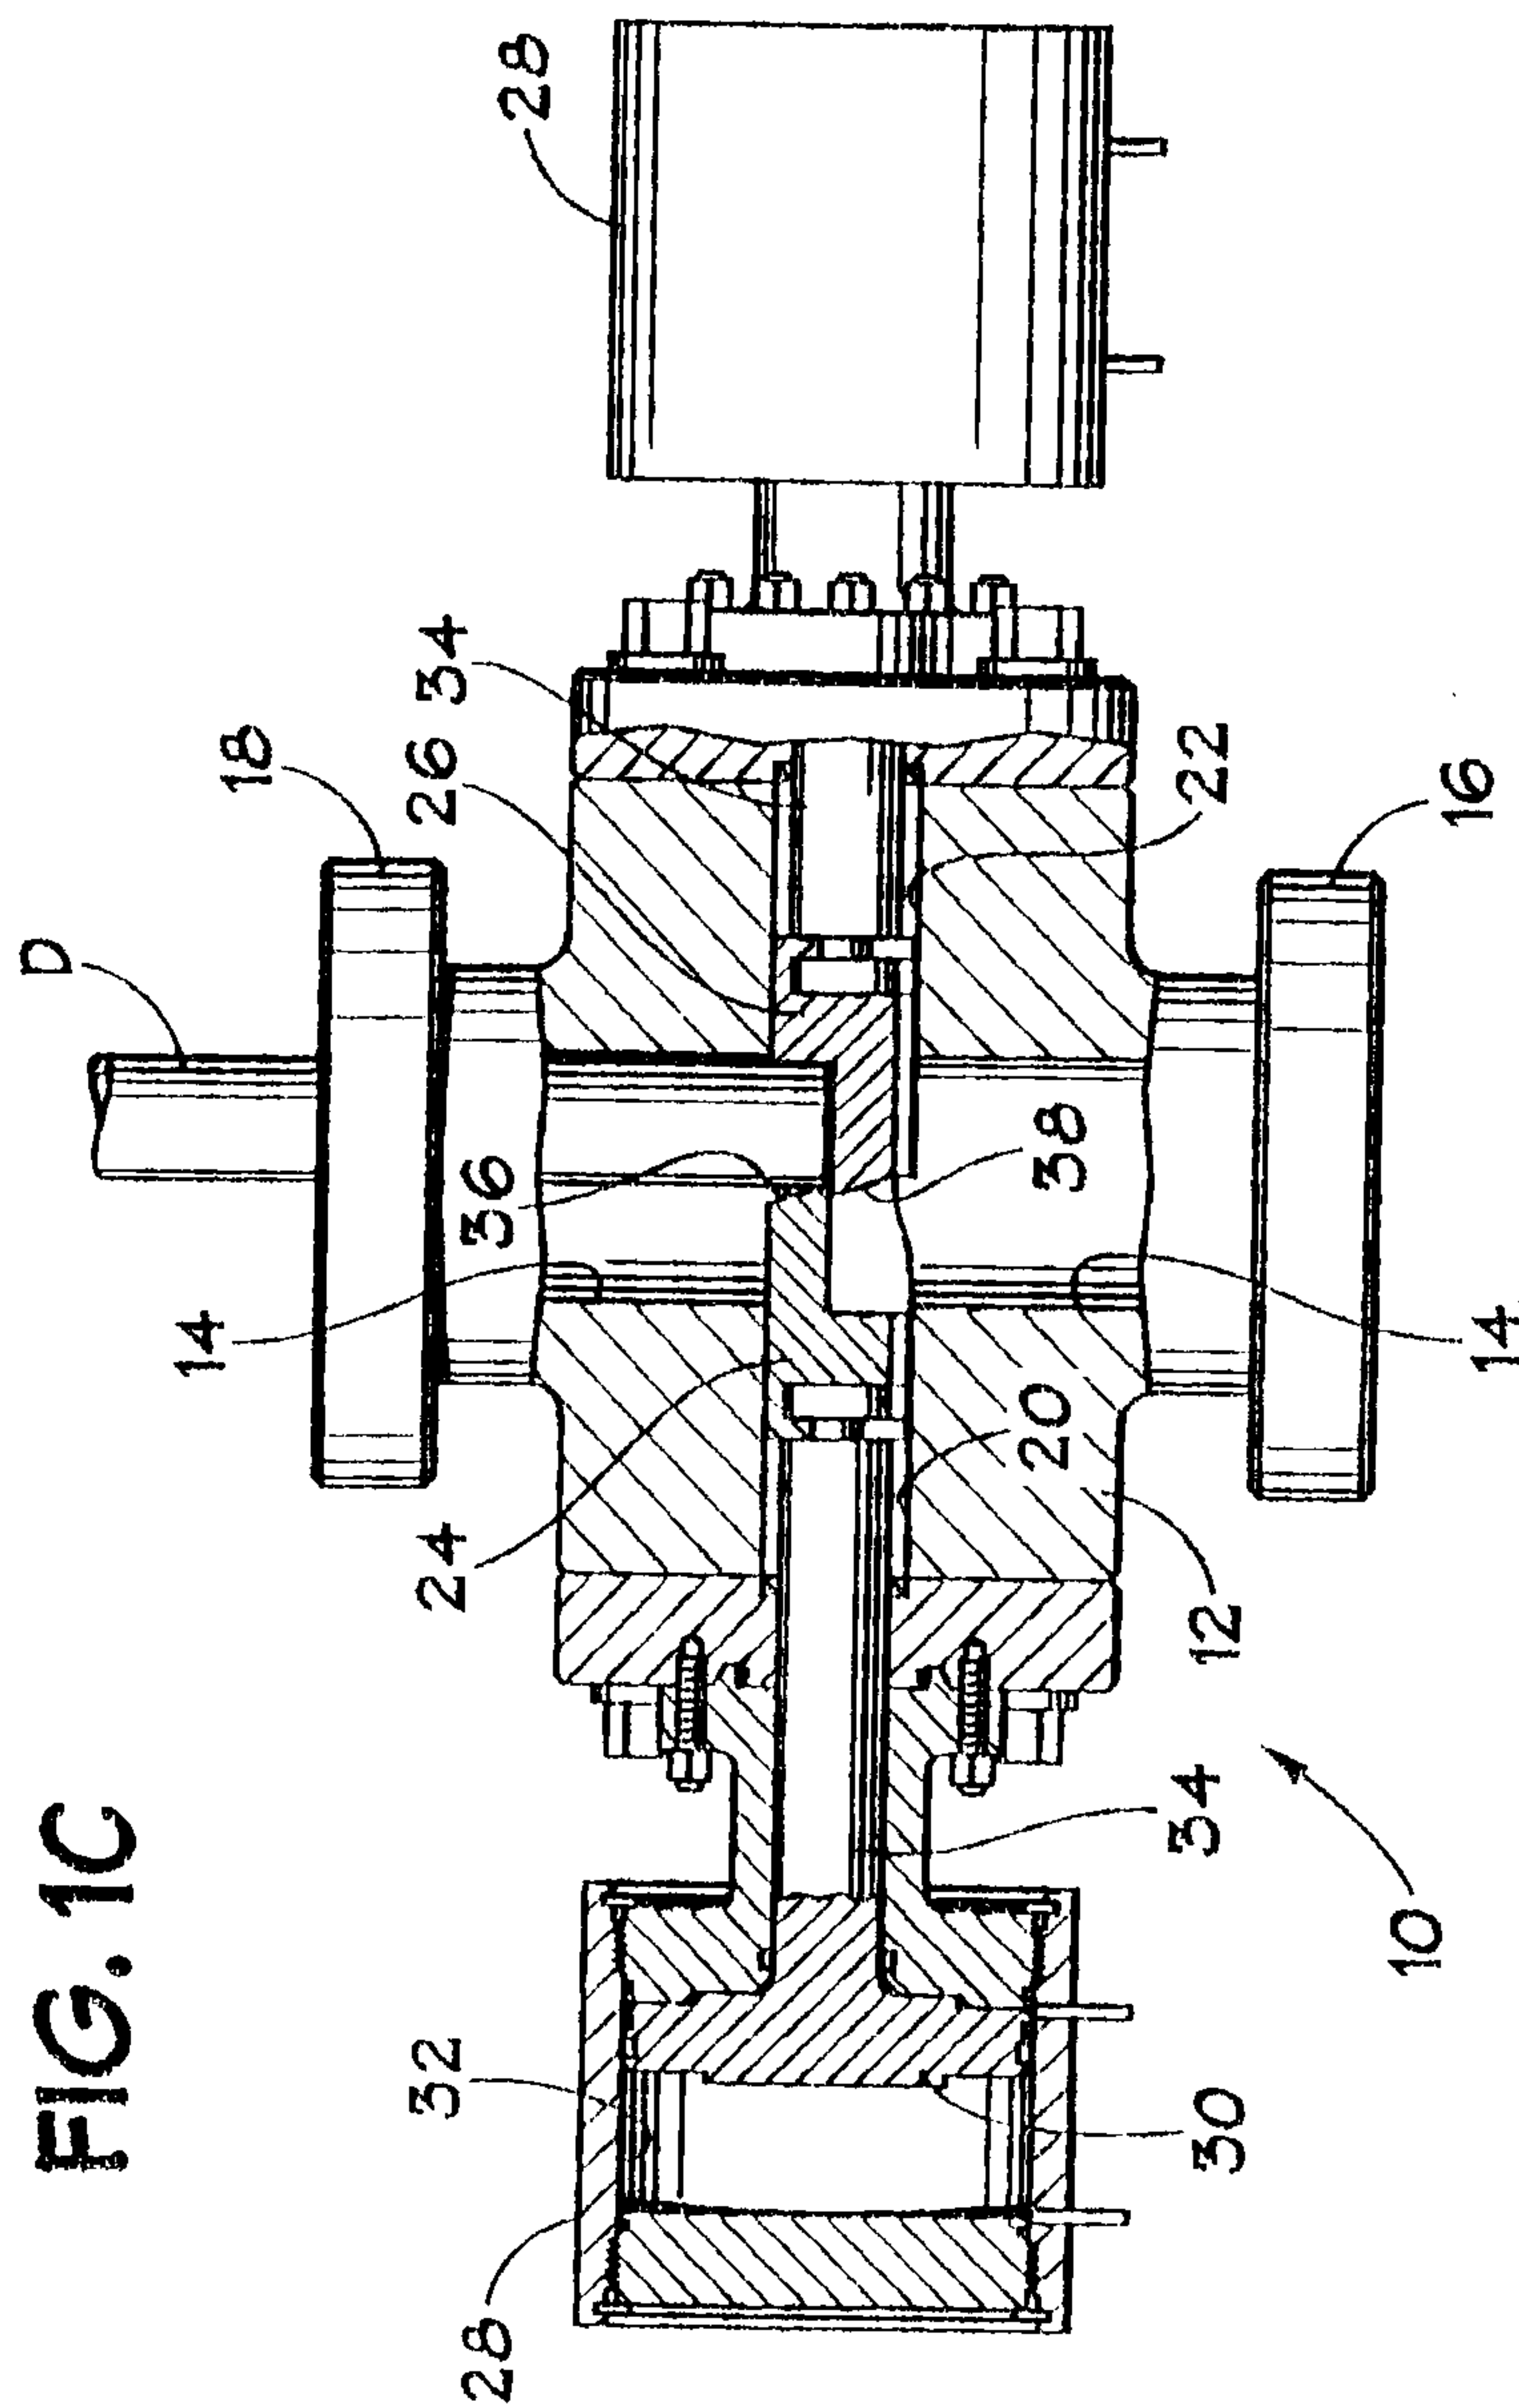
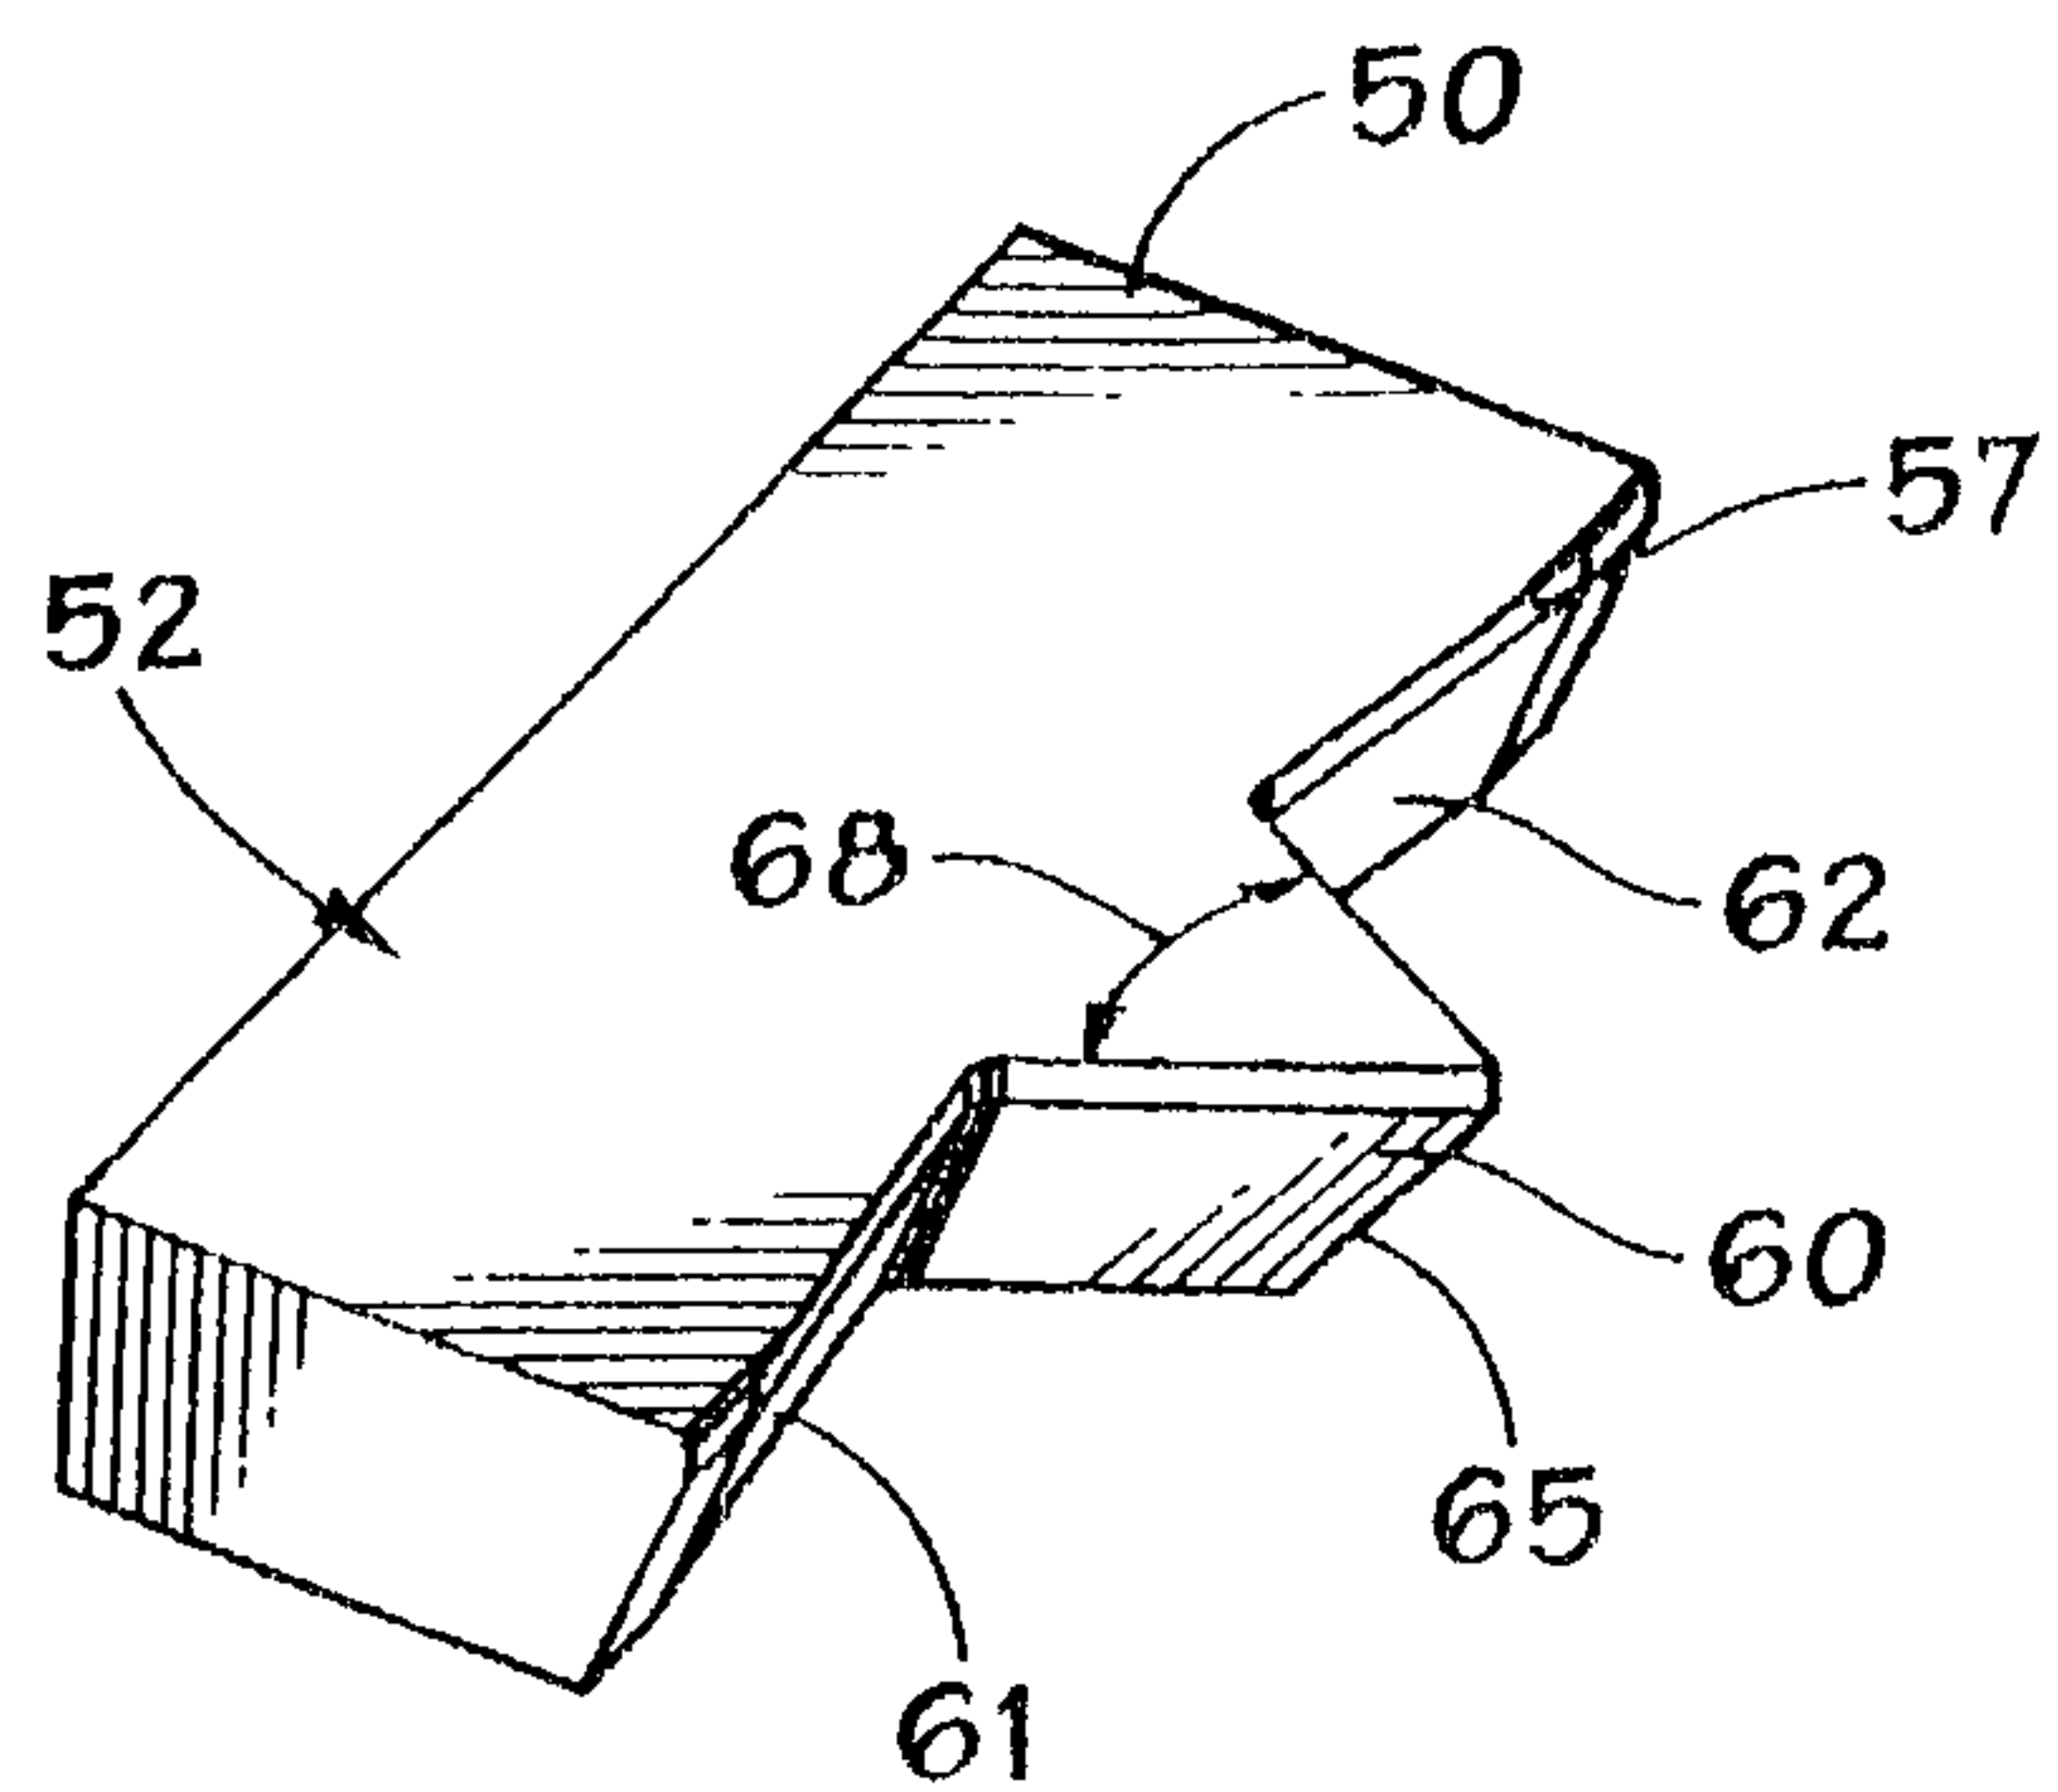
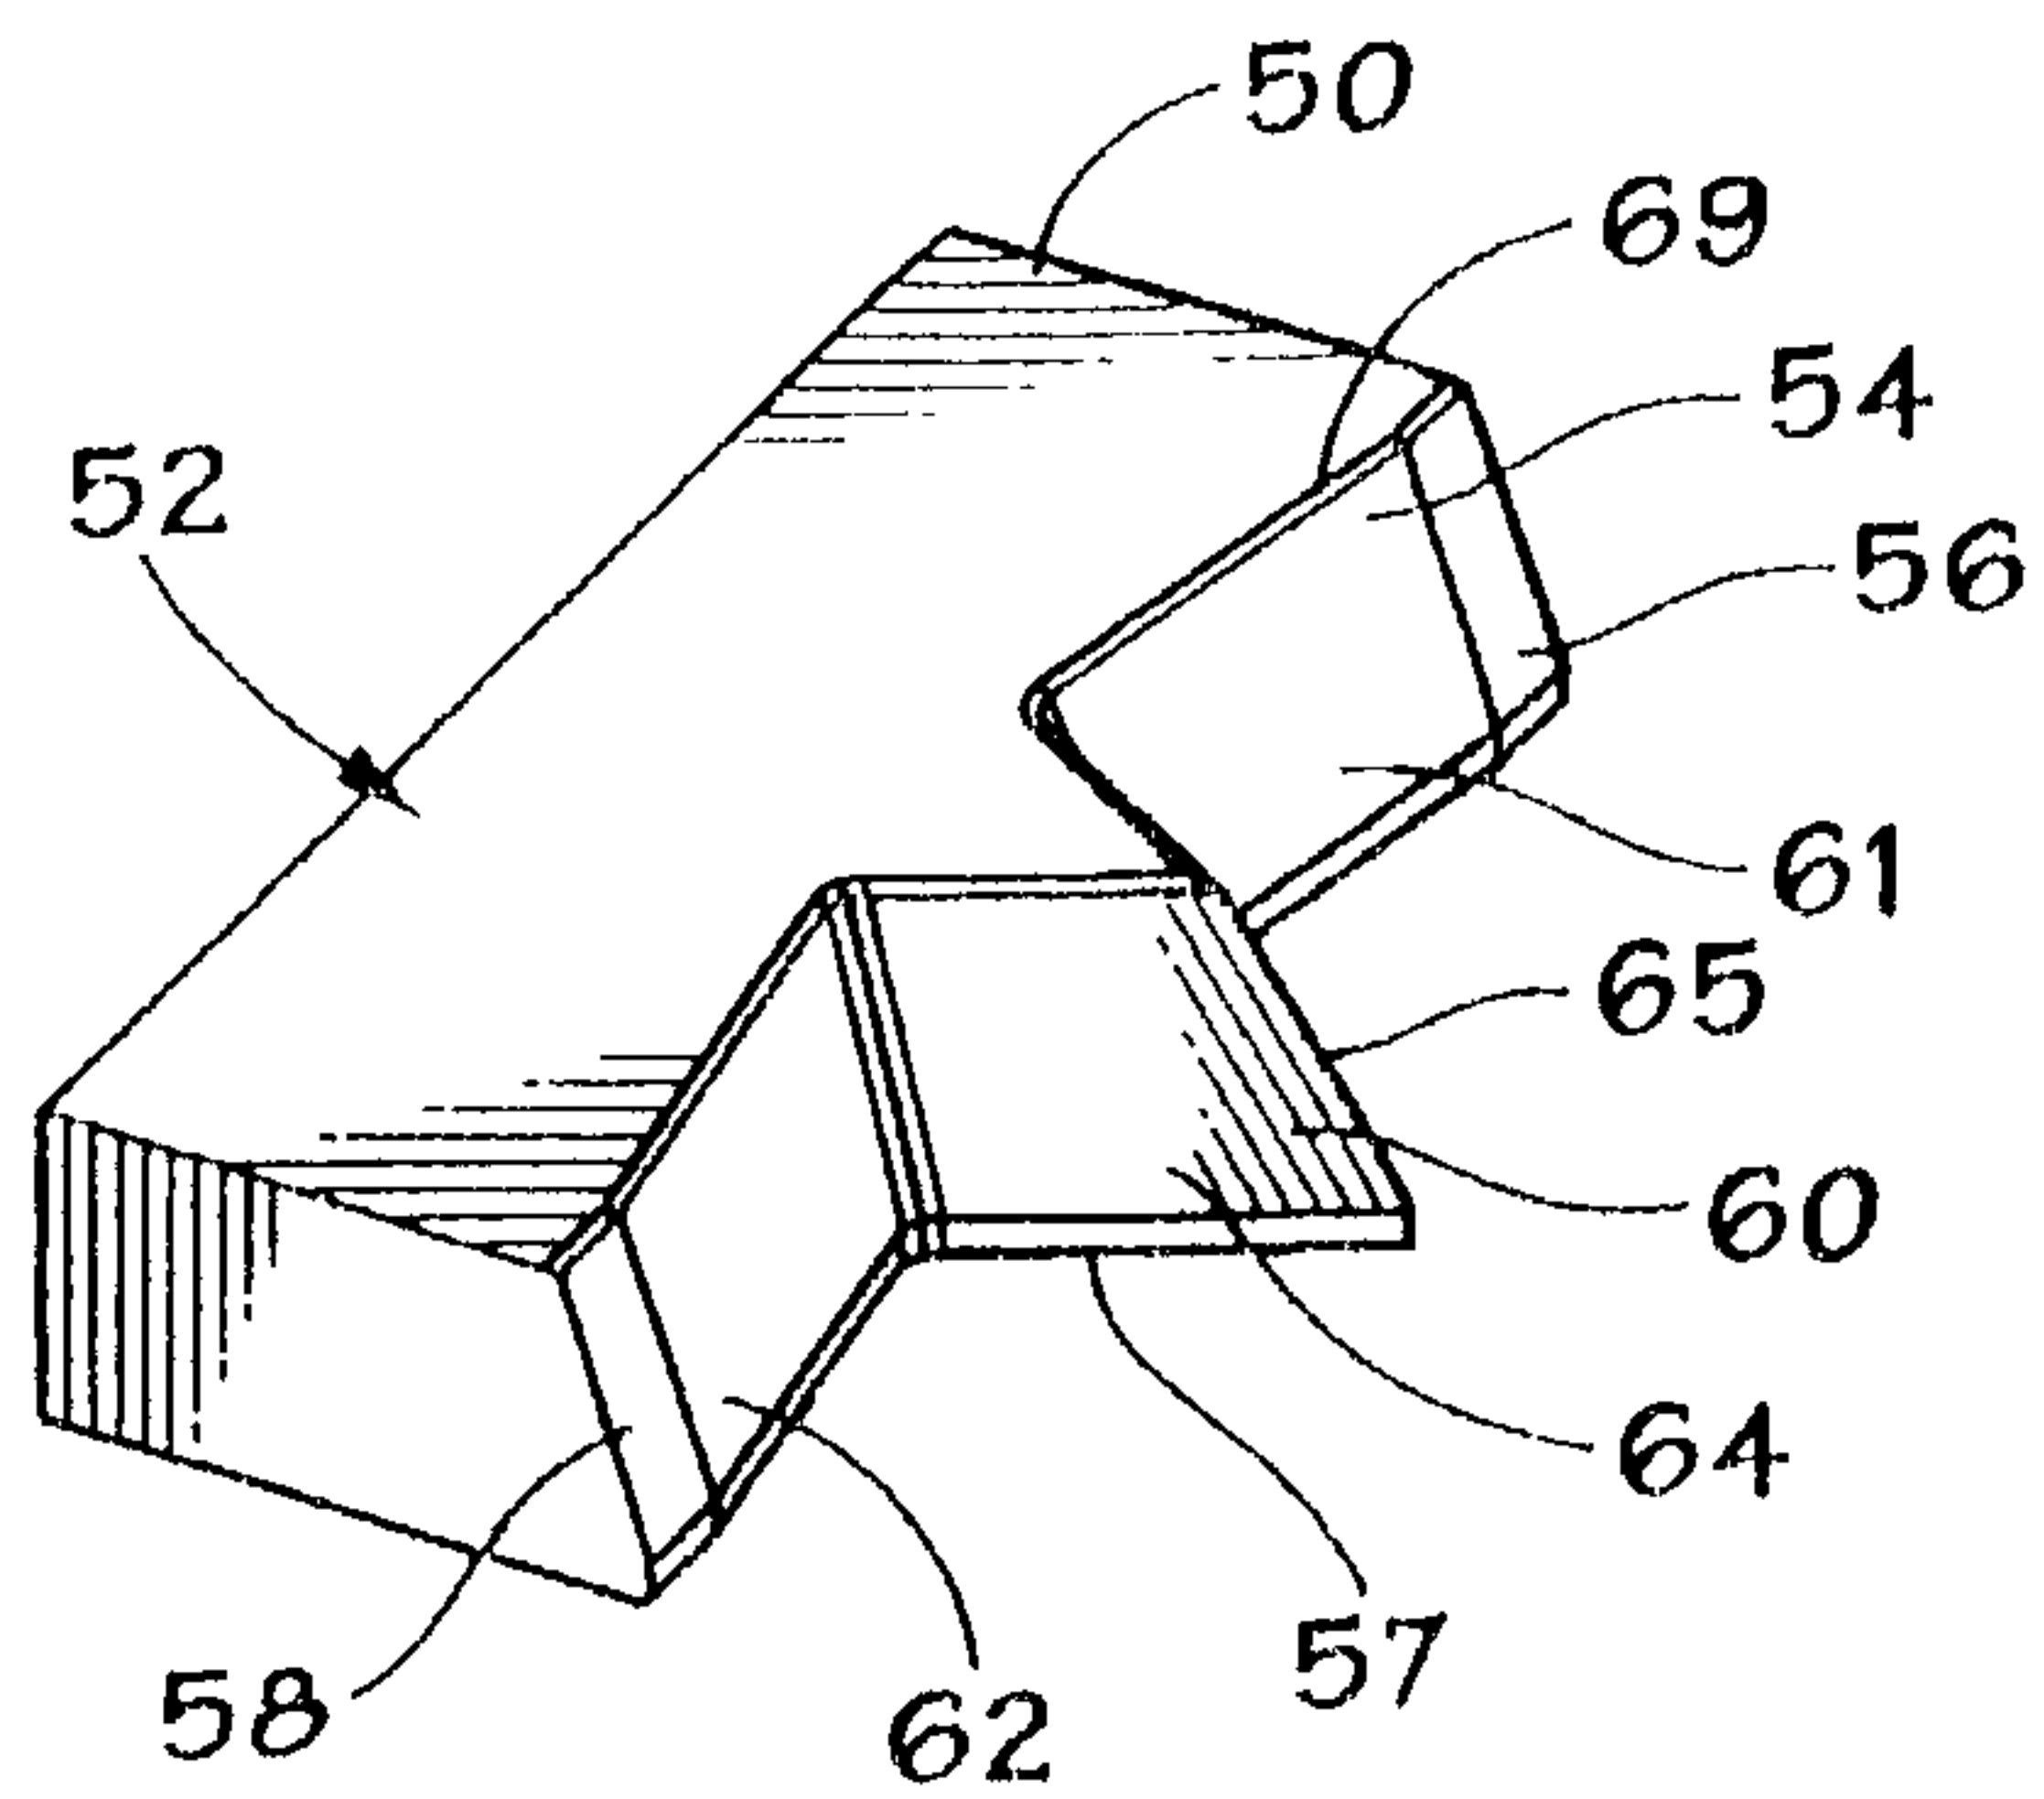
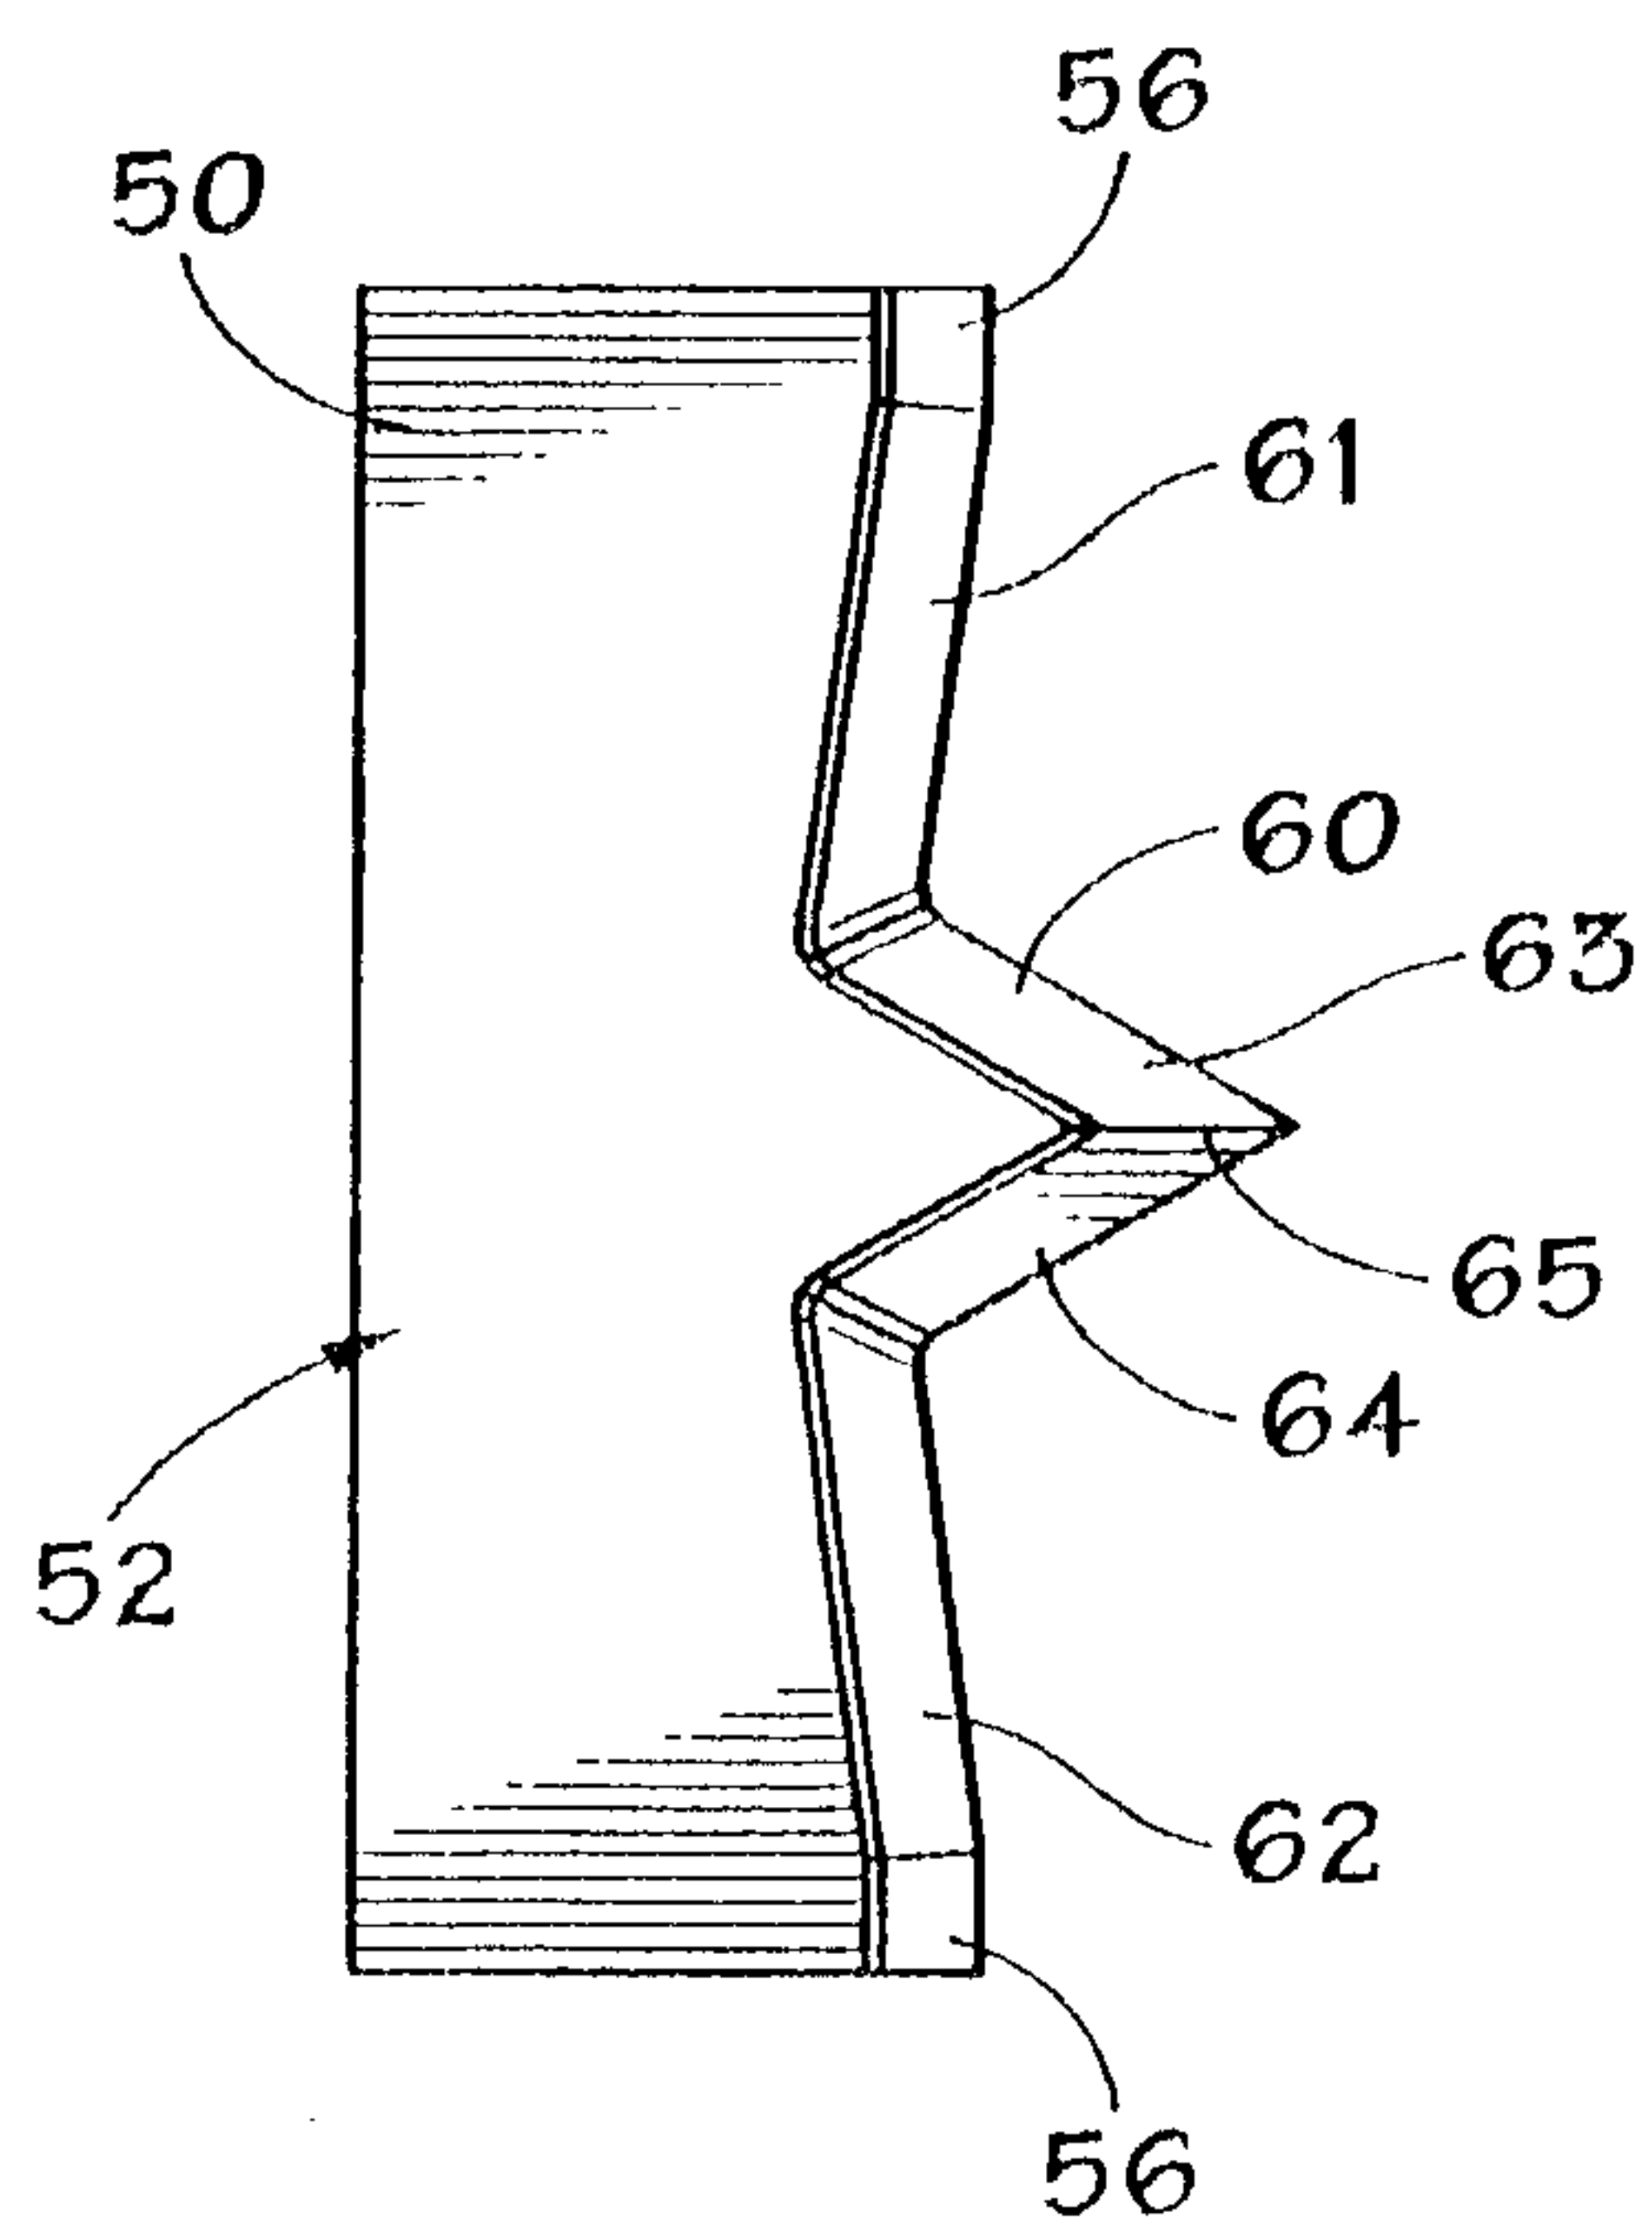
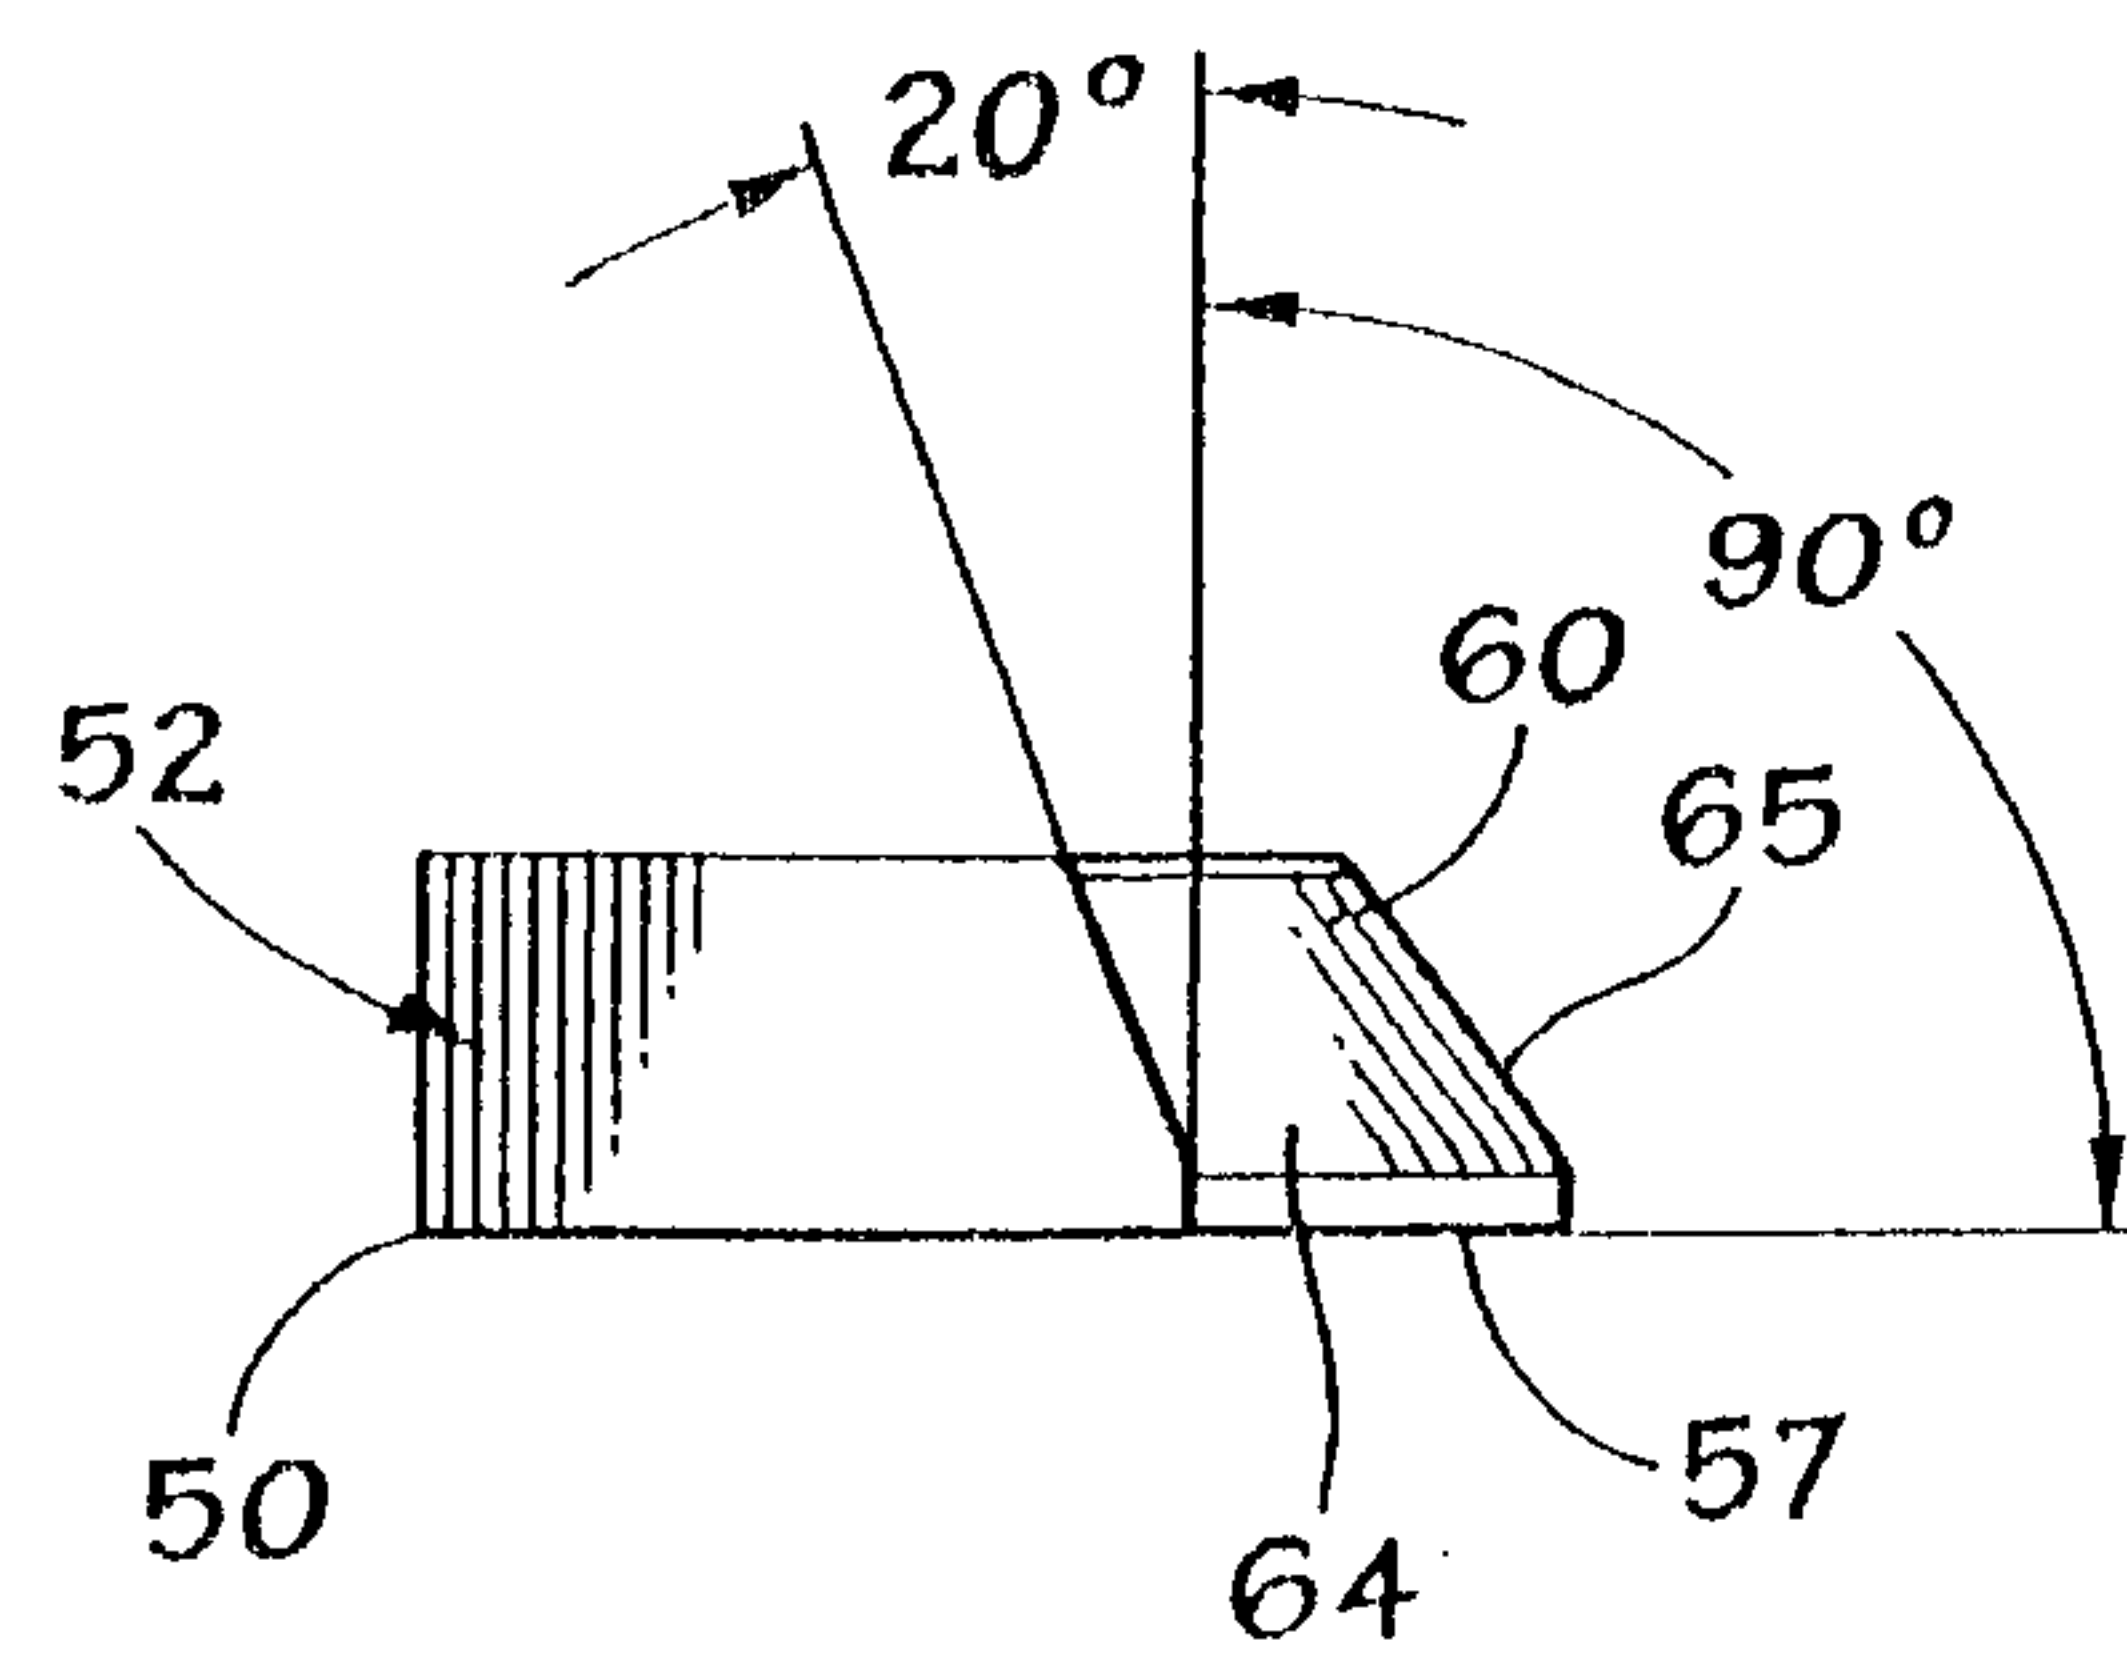


FIG. 2A**FIG. 2C****FIG. 2B****FIG. 2D**

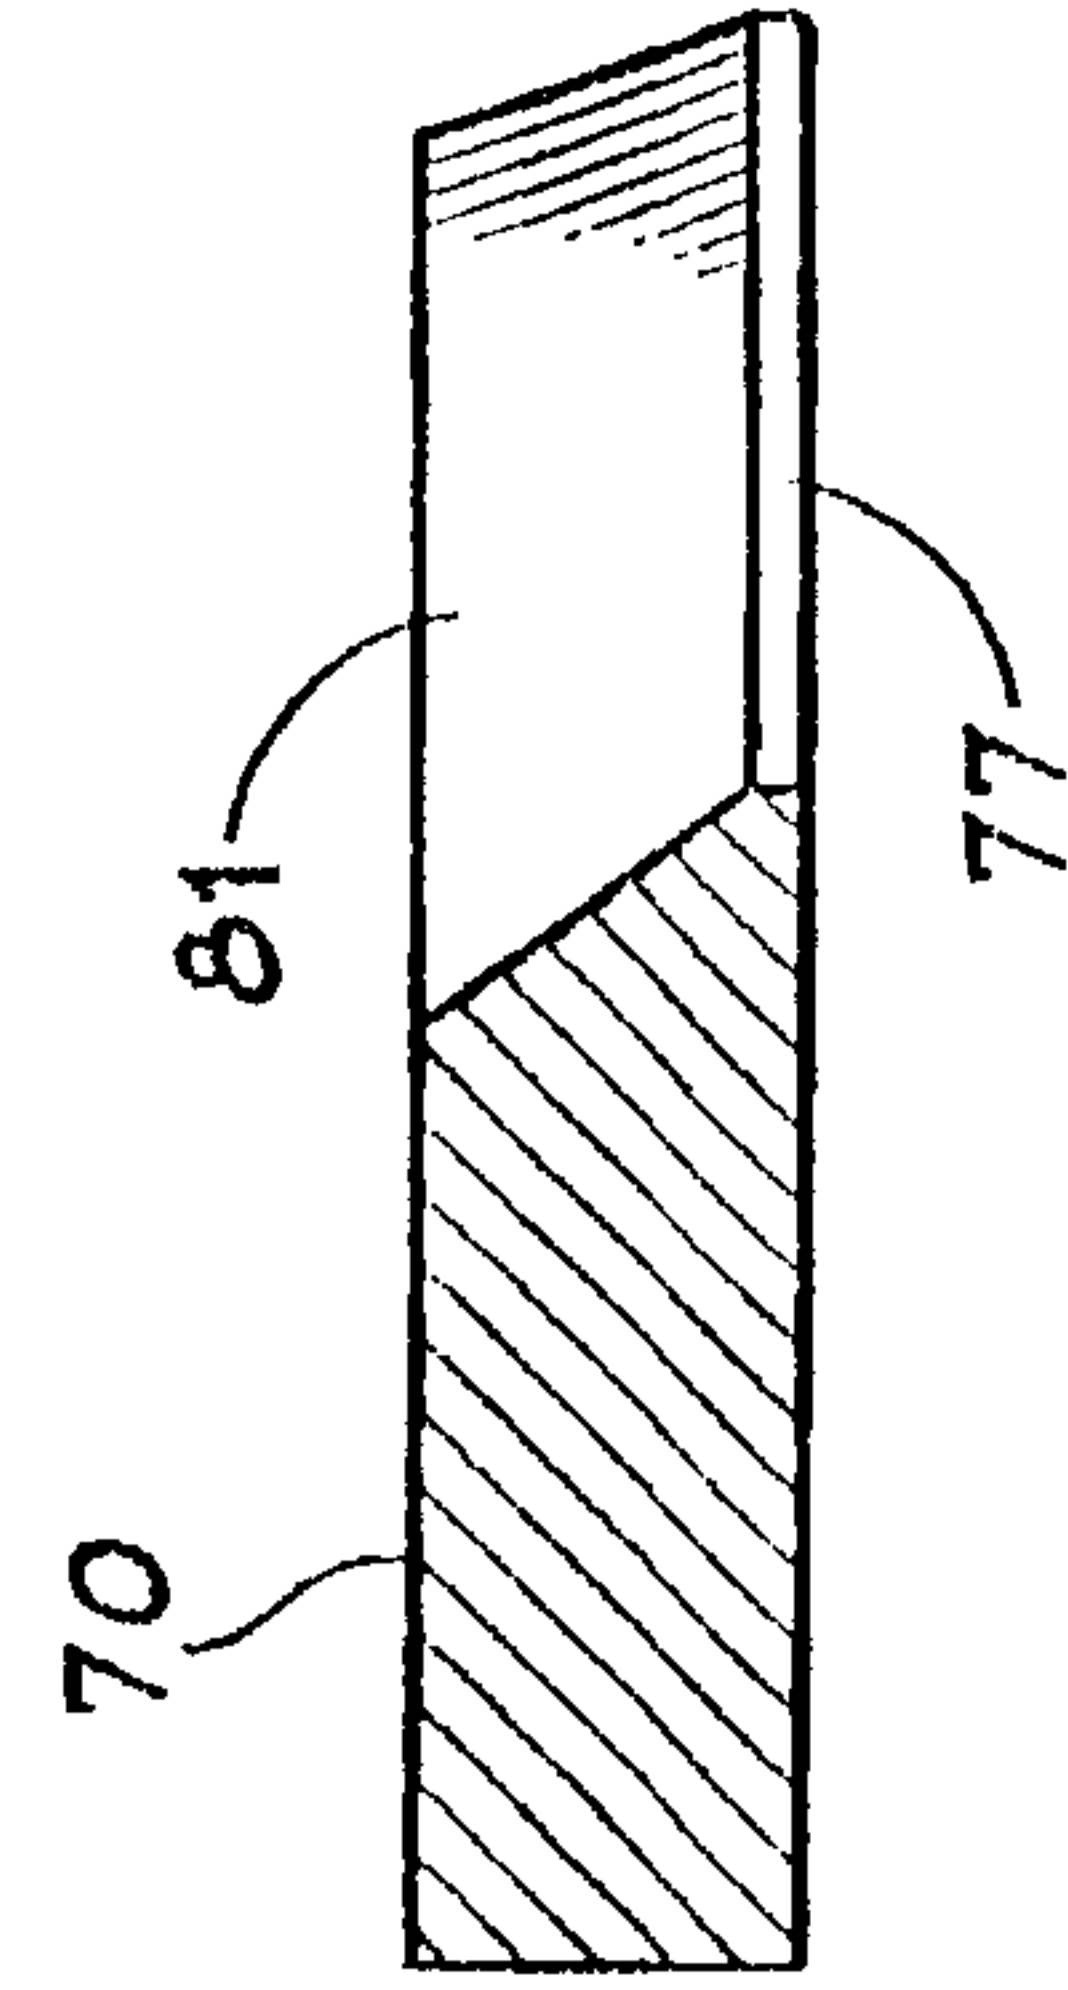
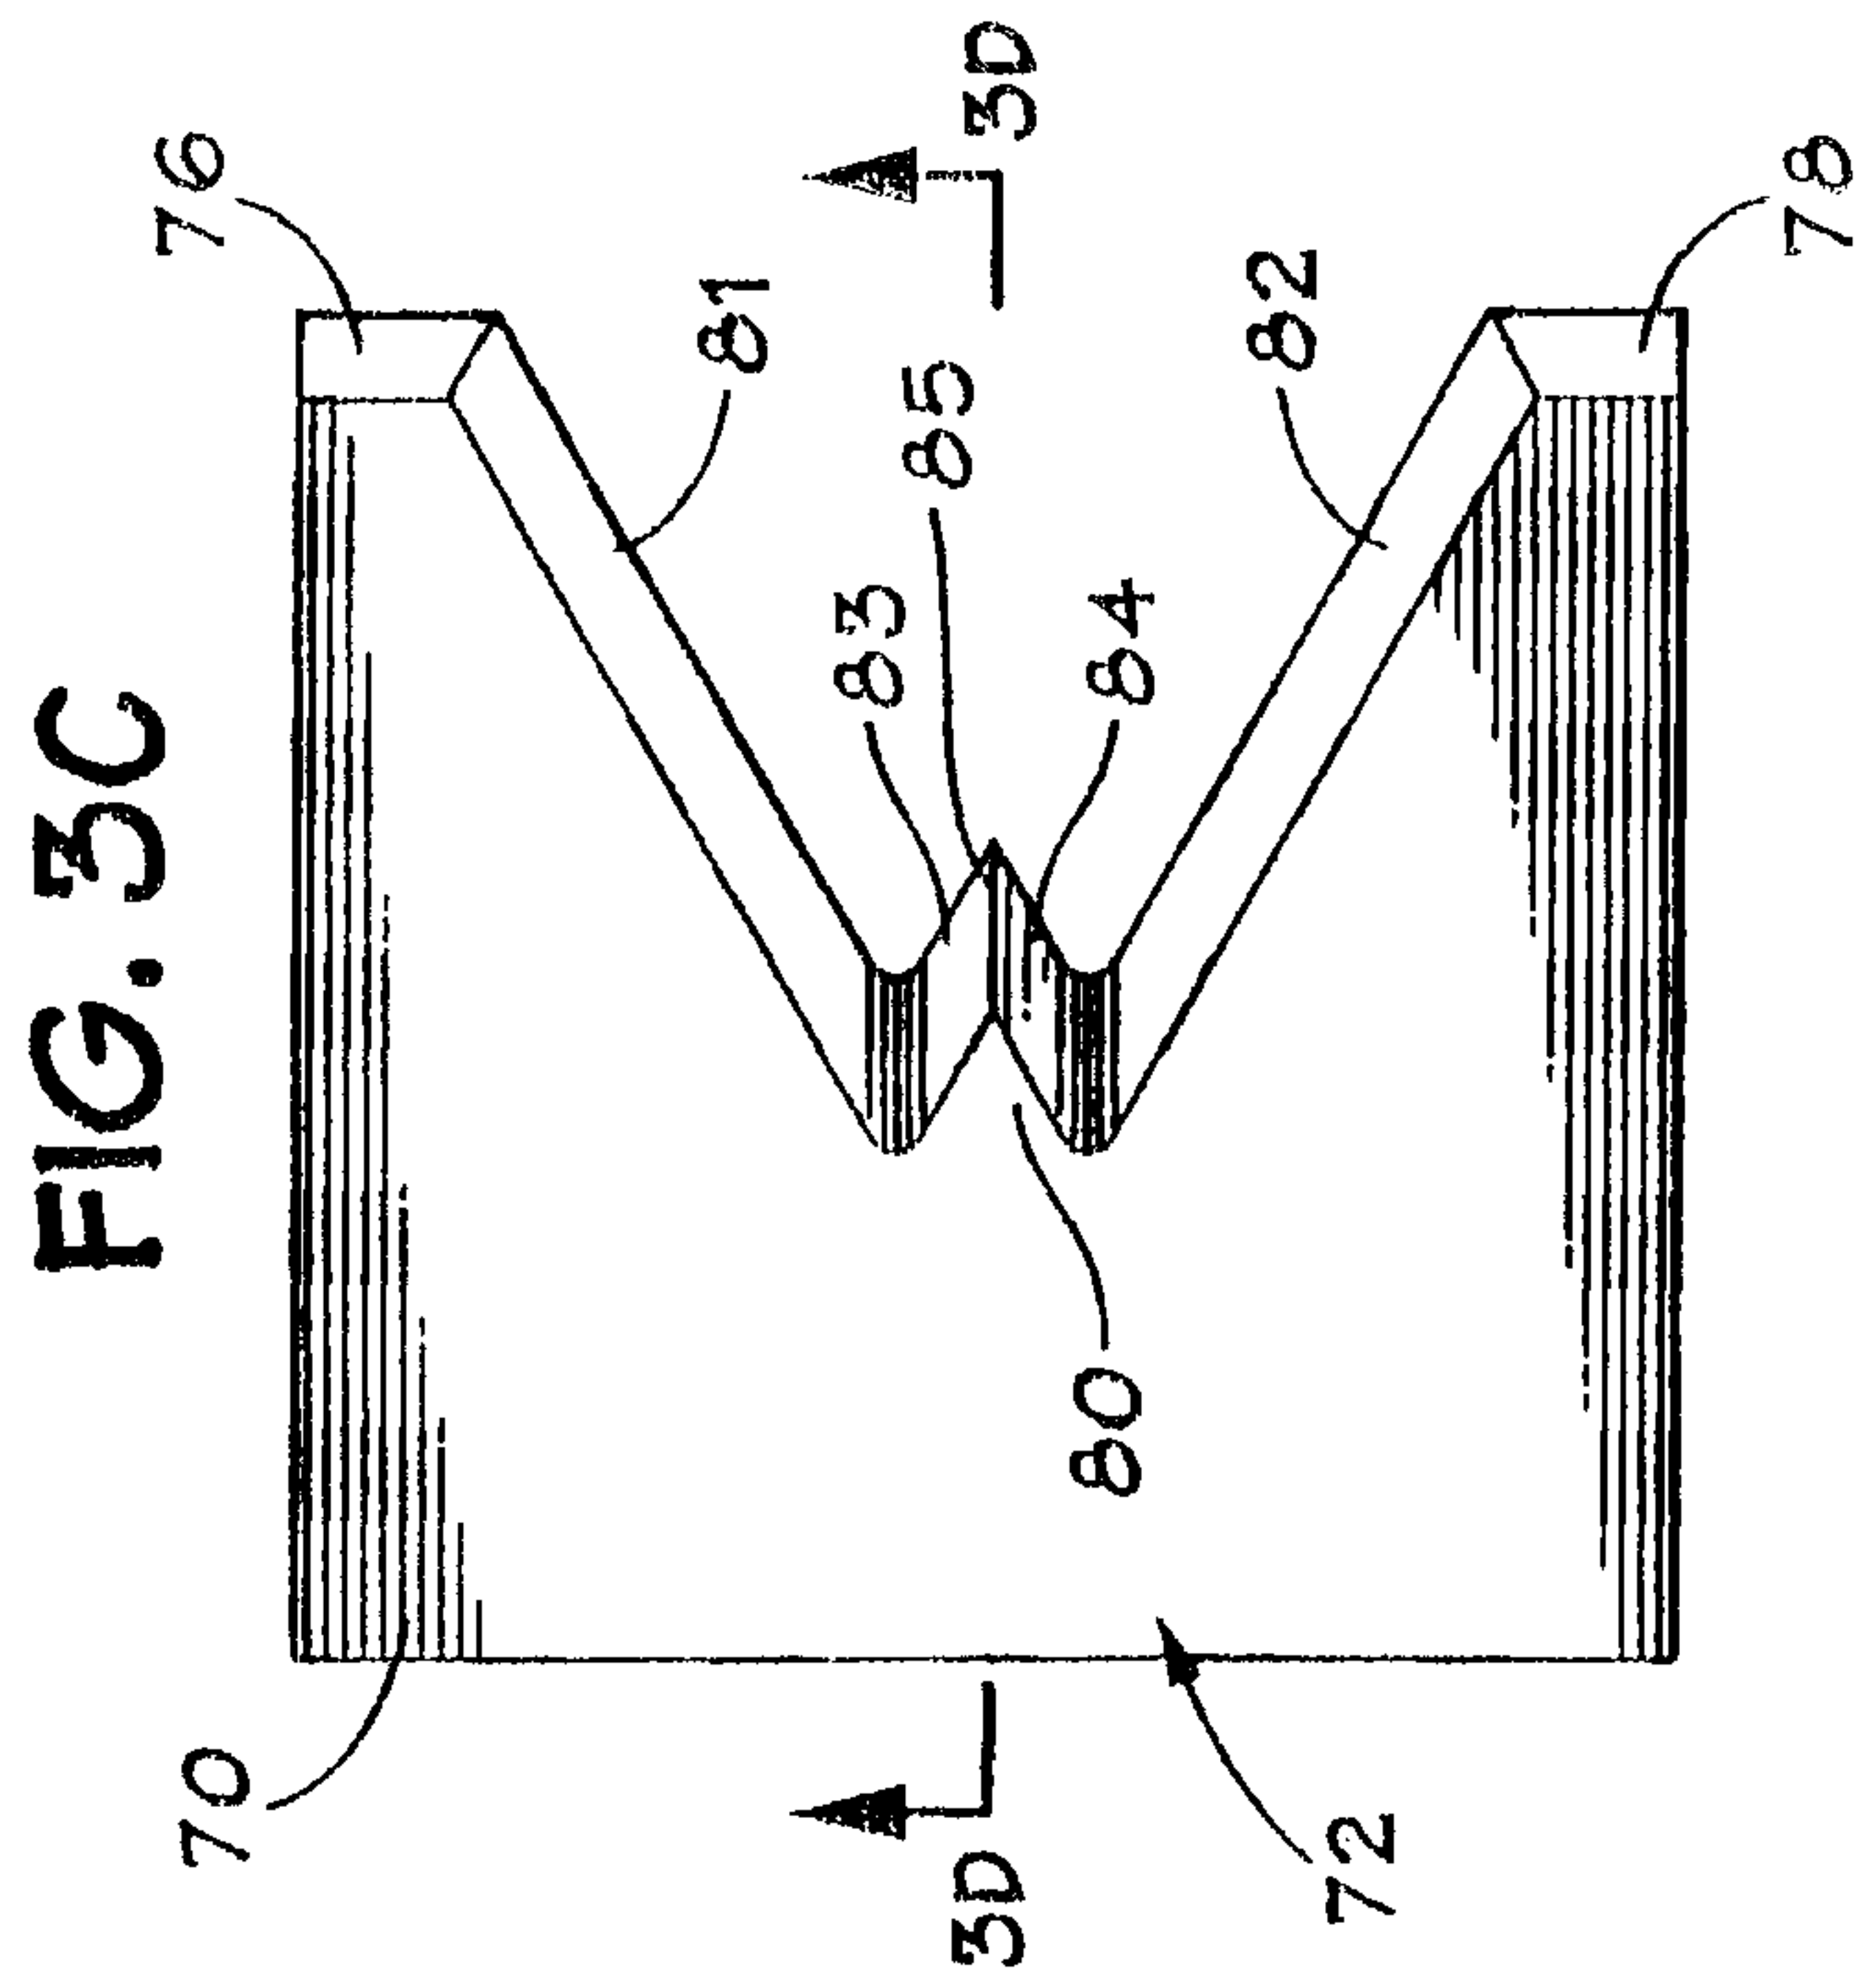
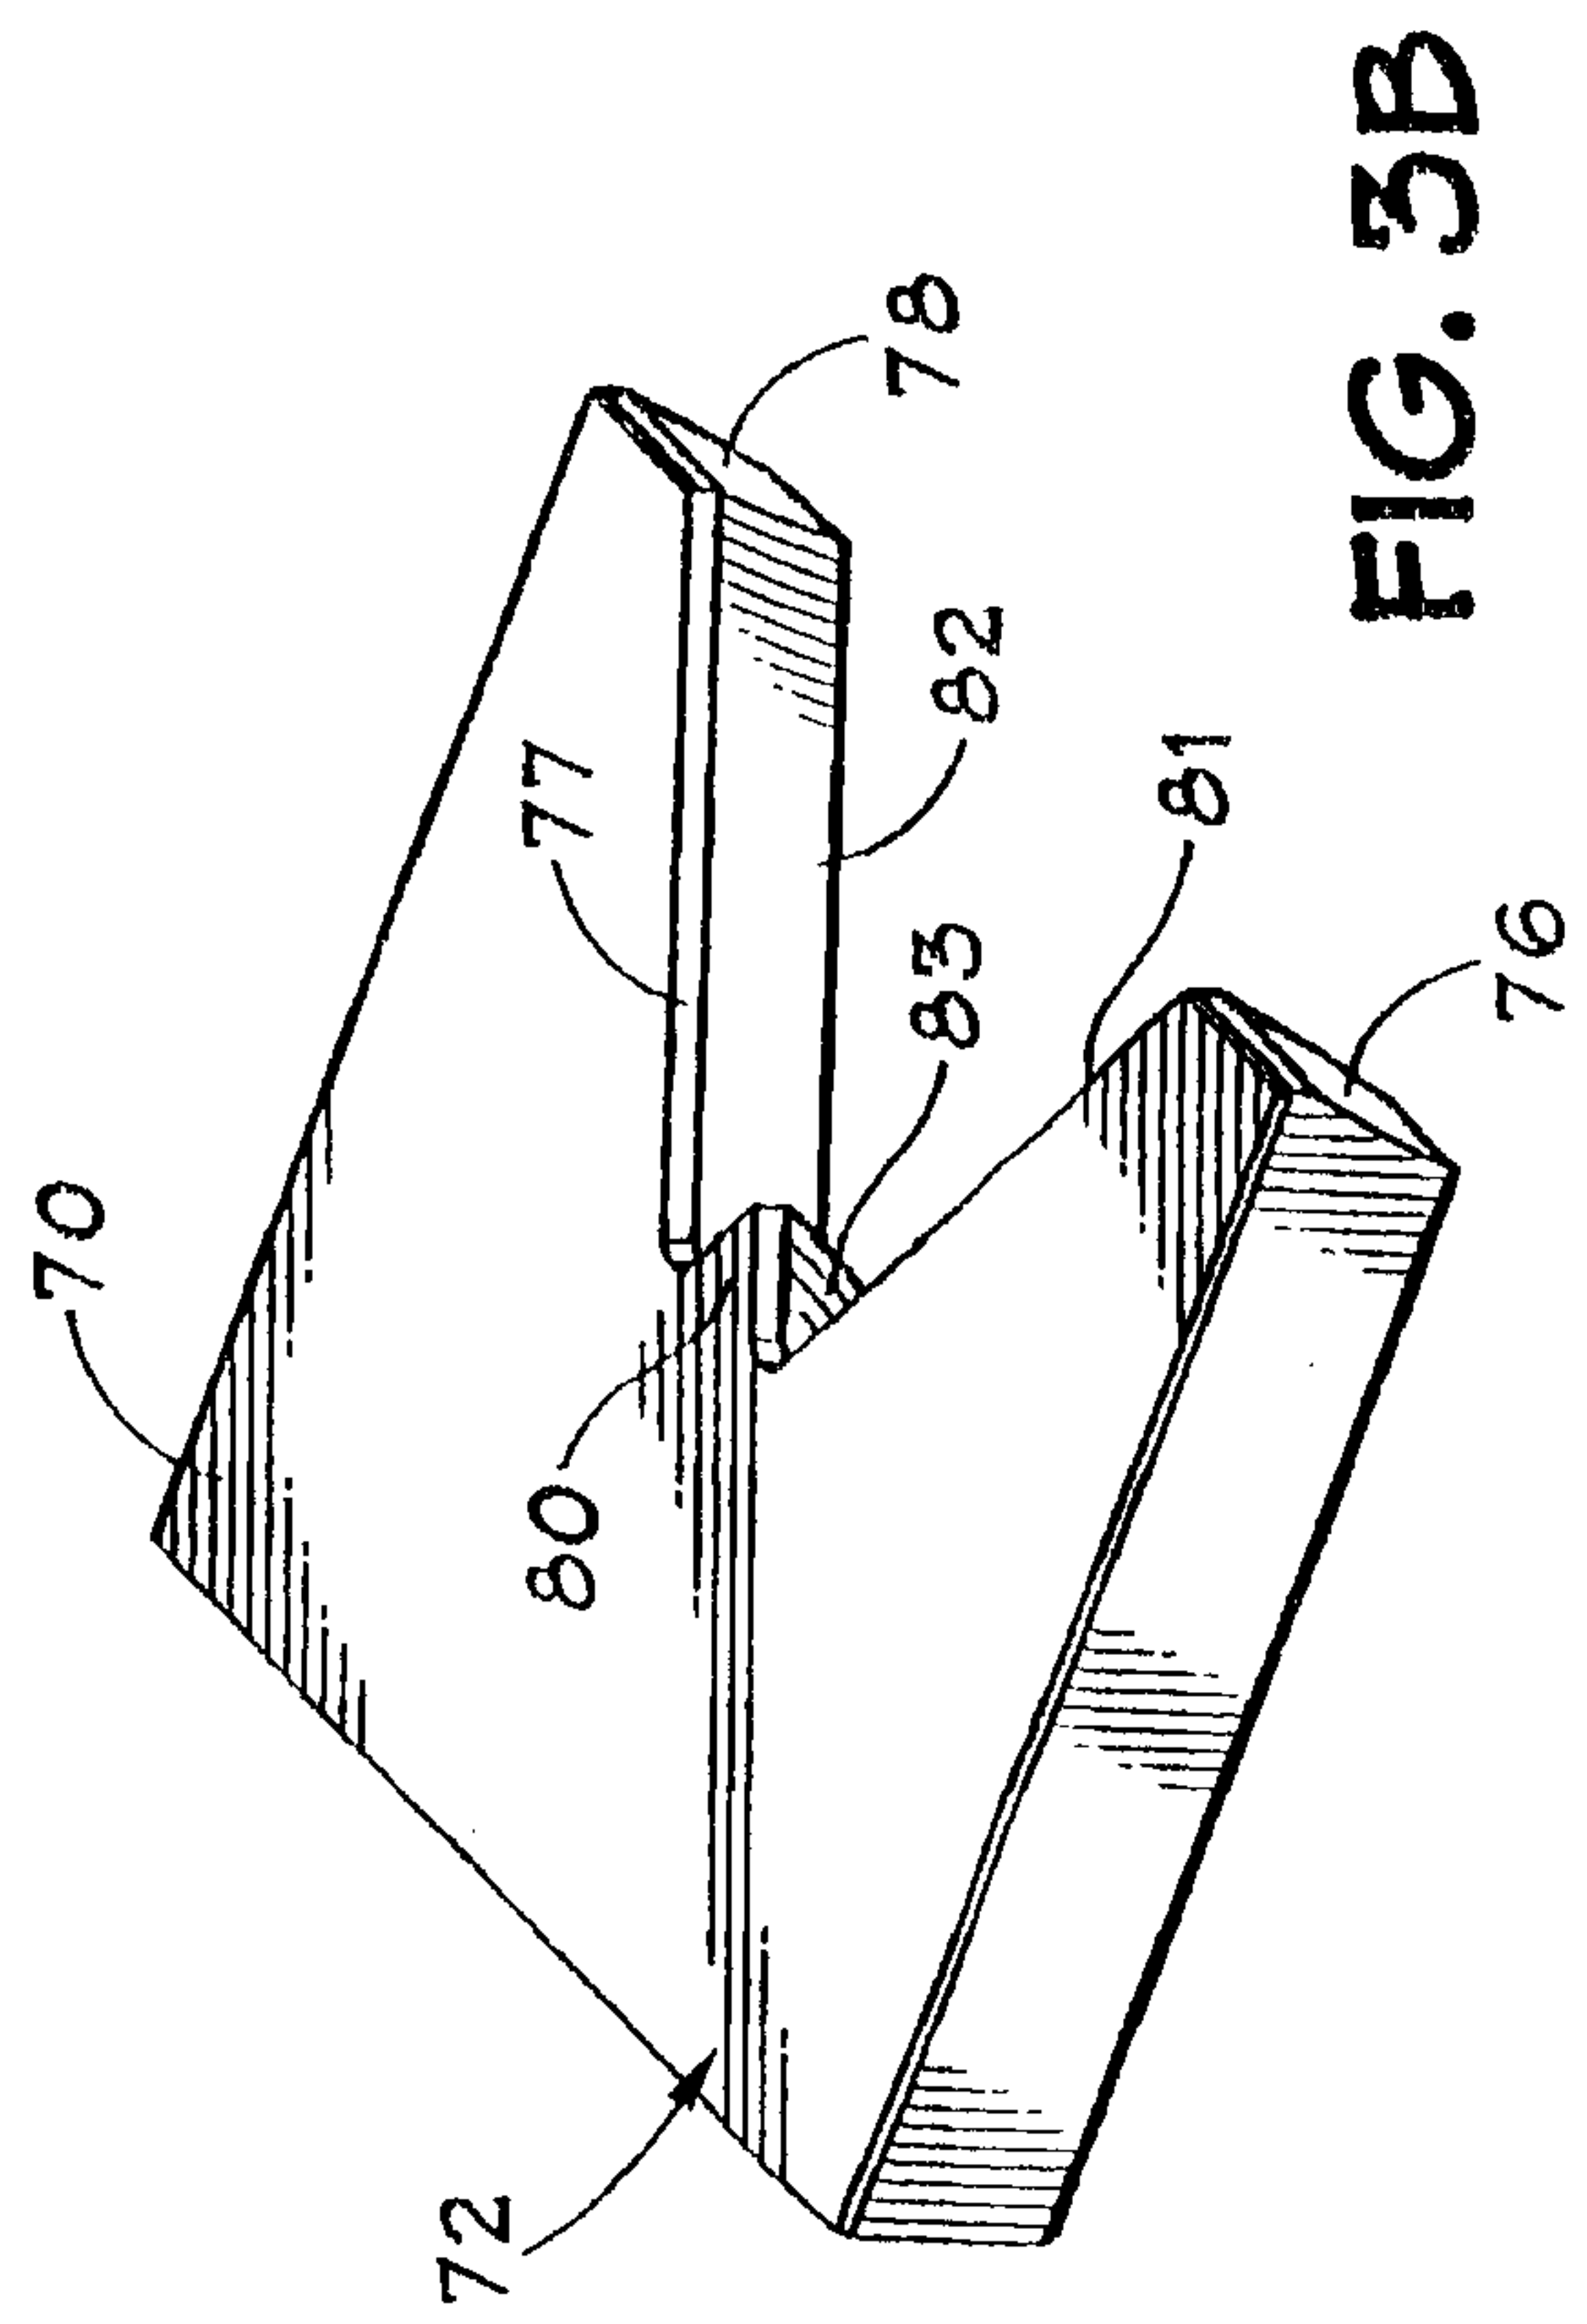
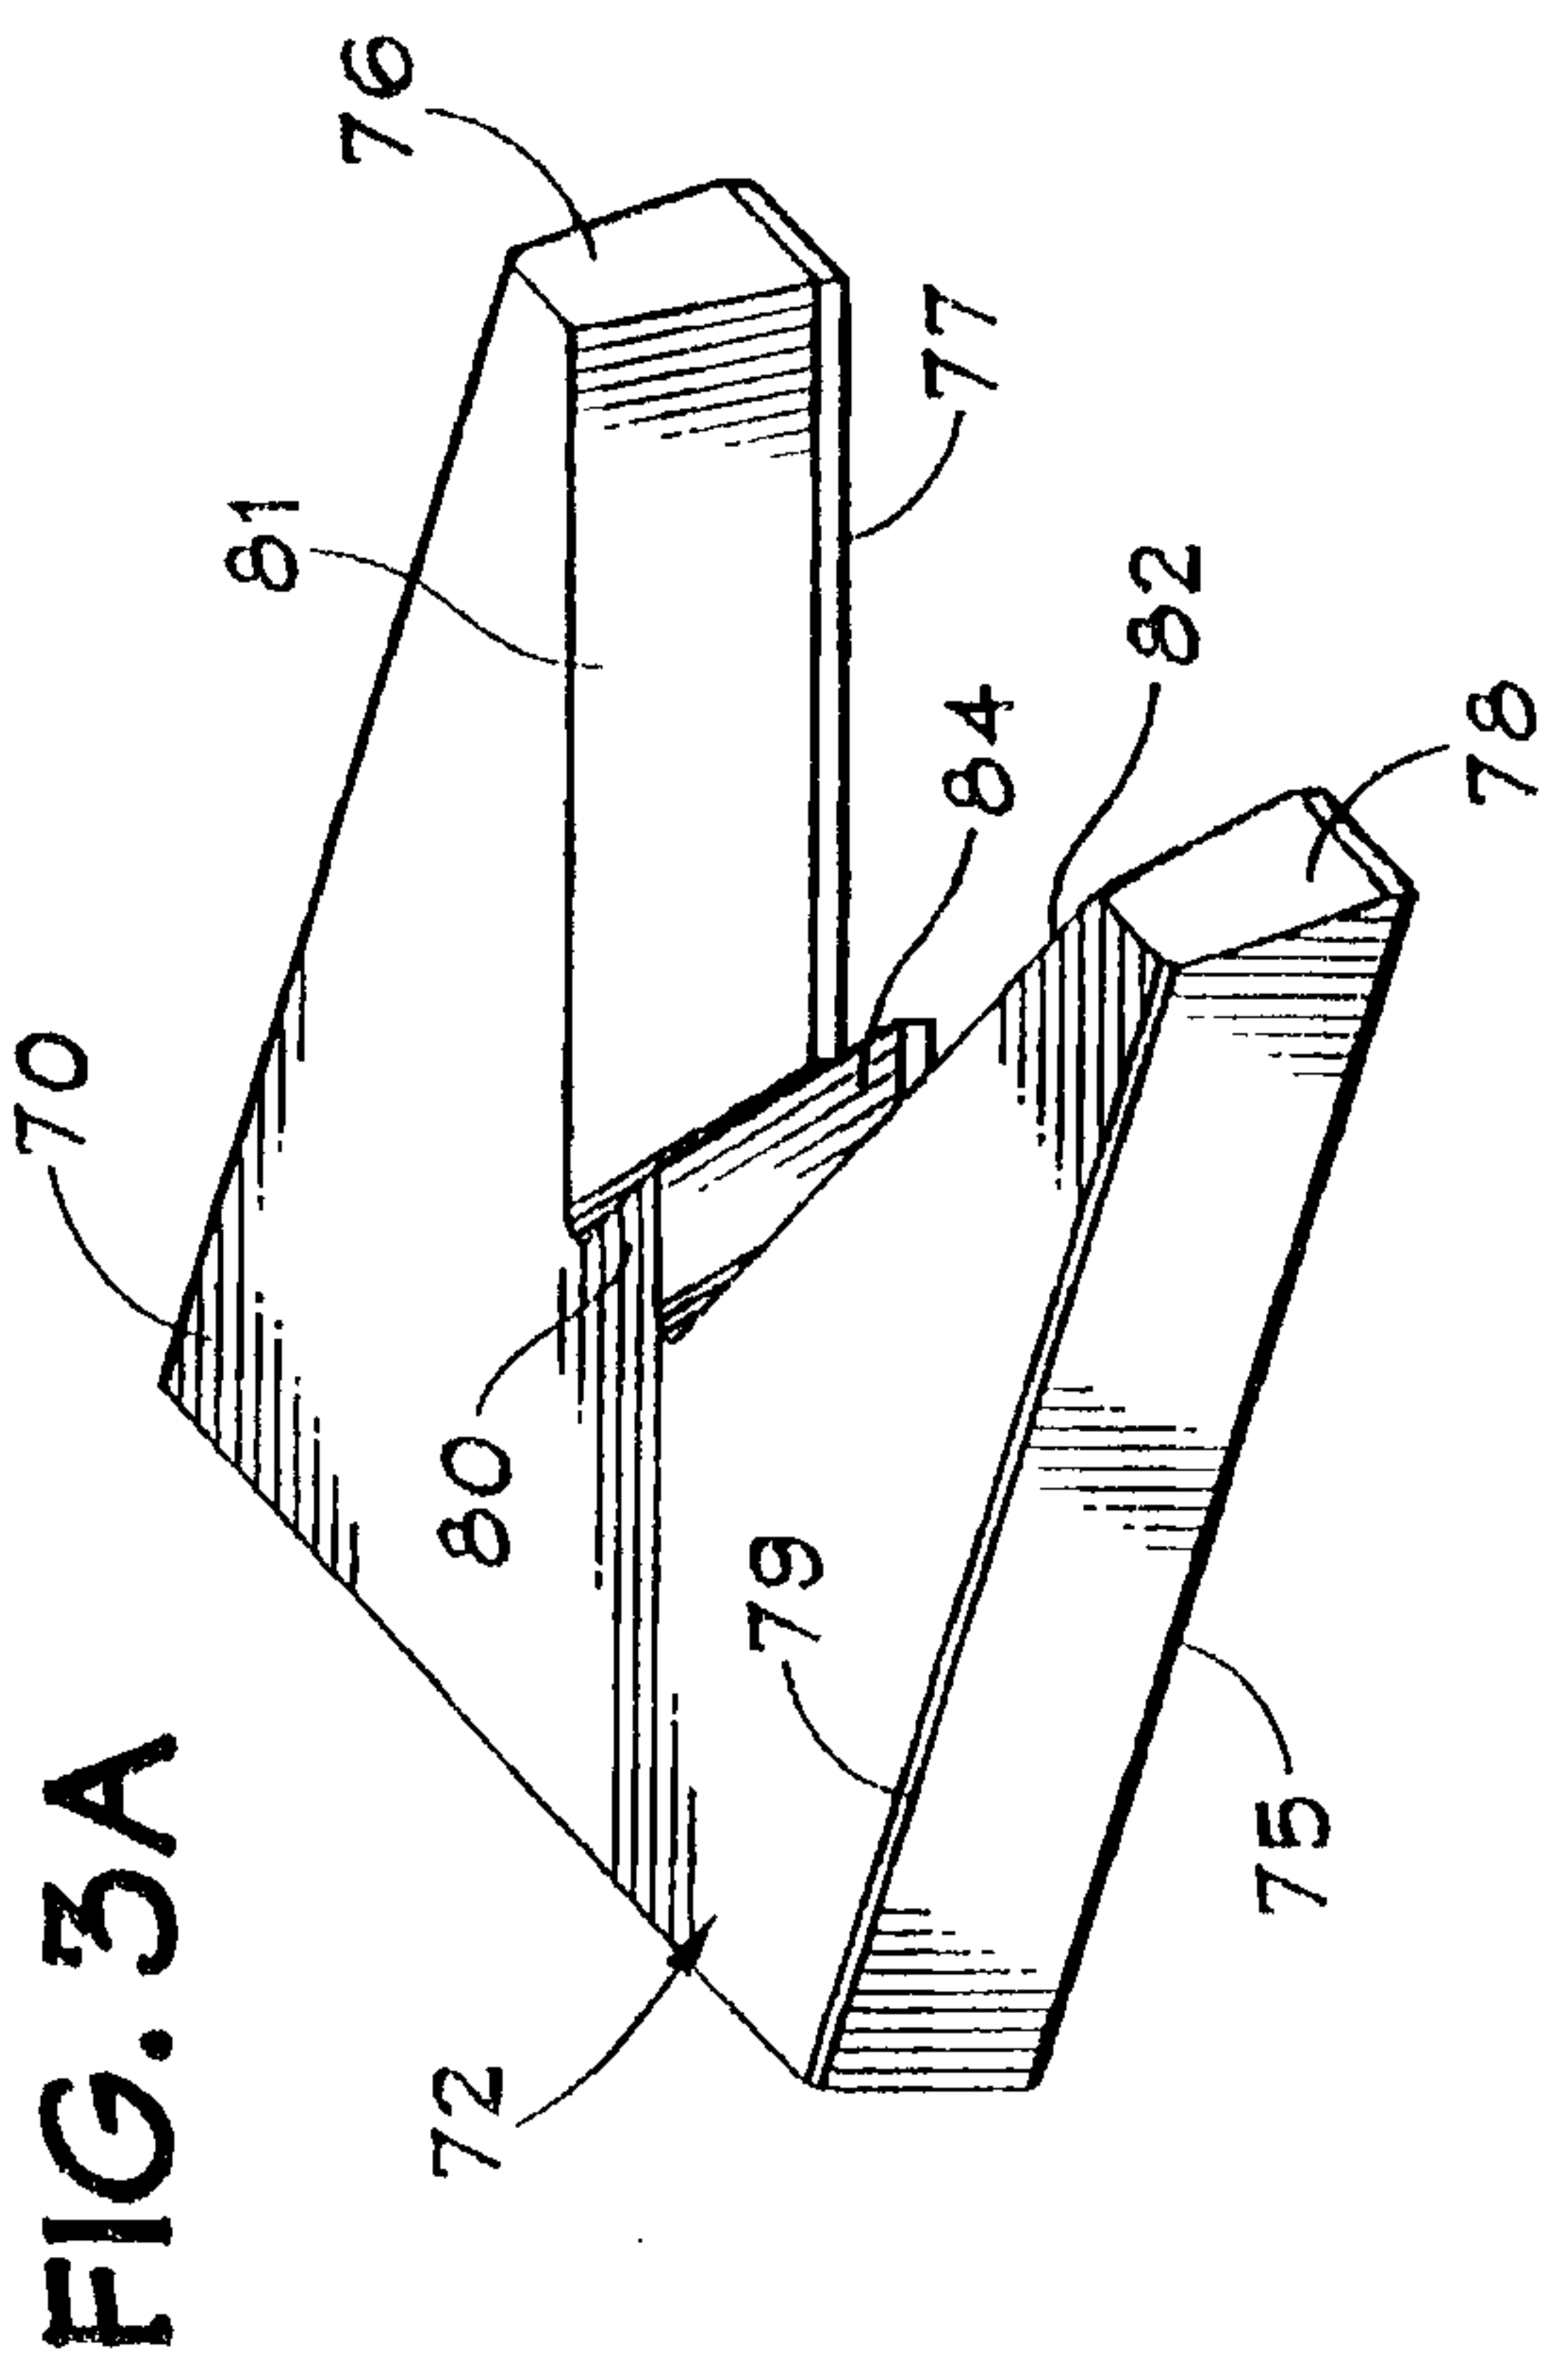


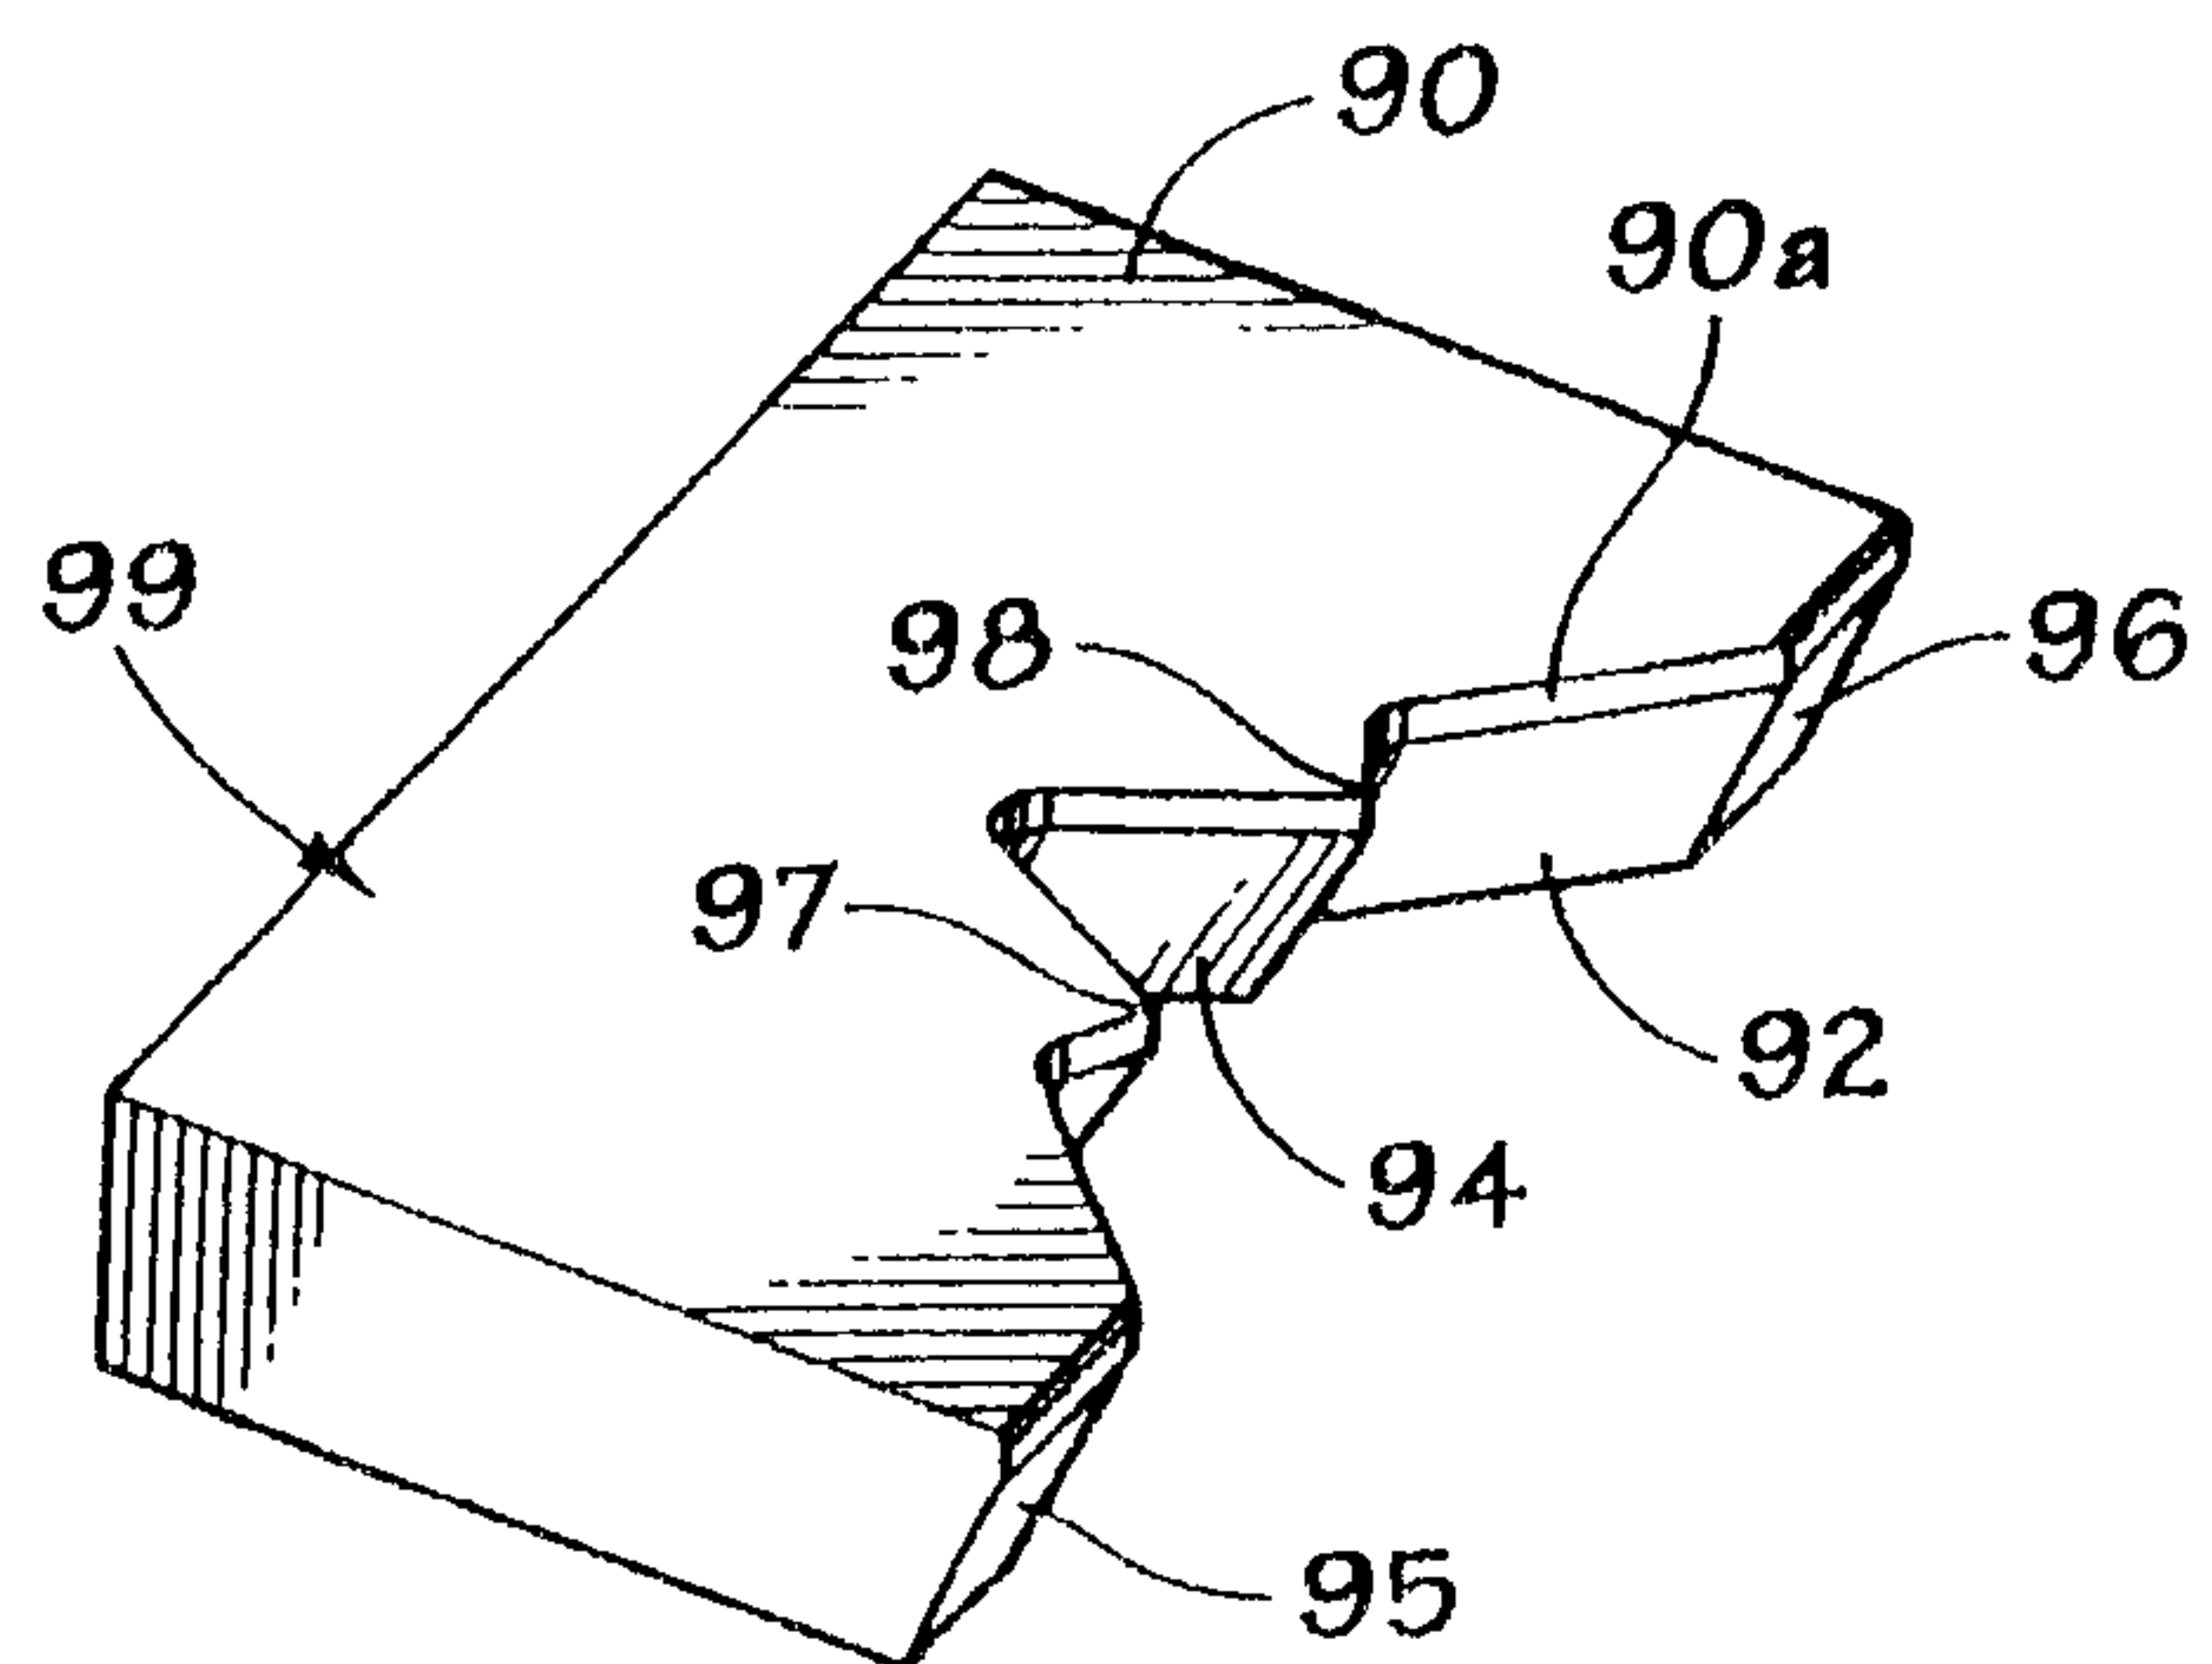
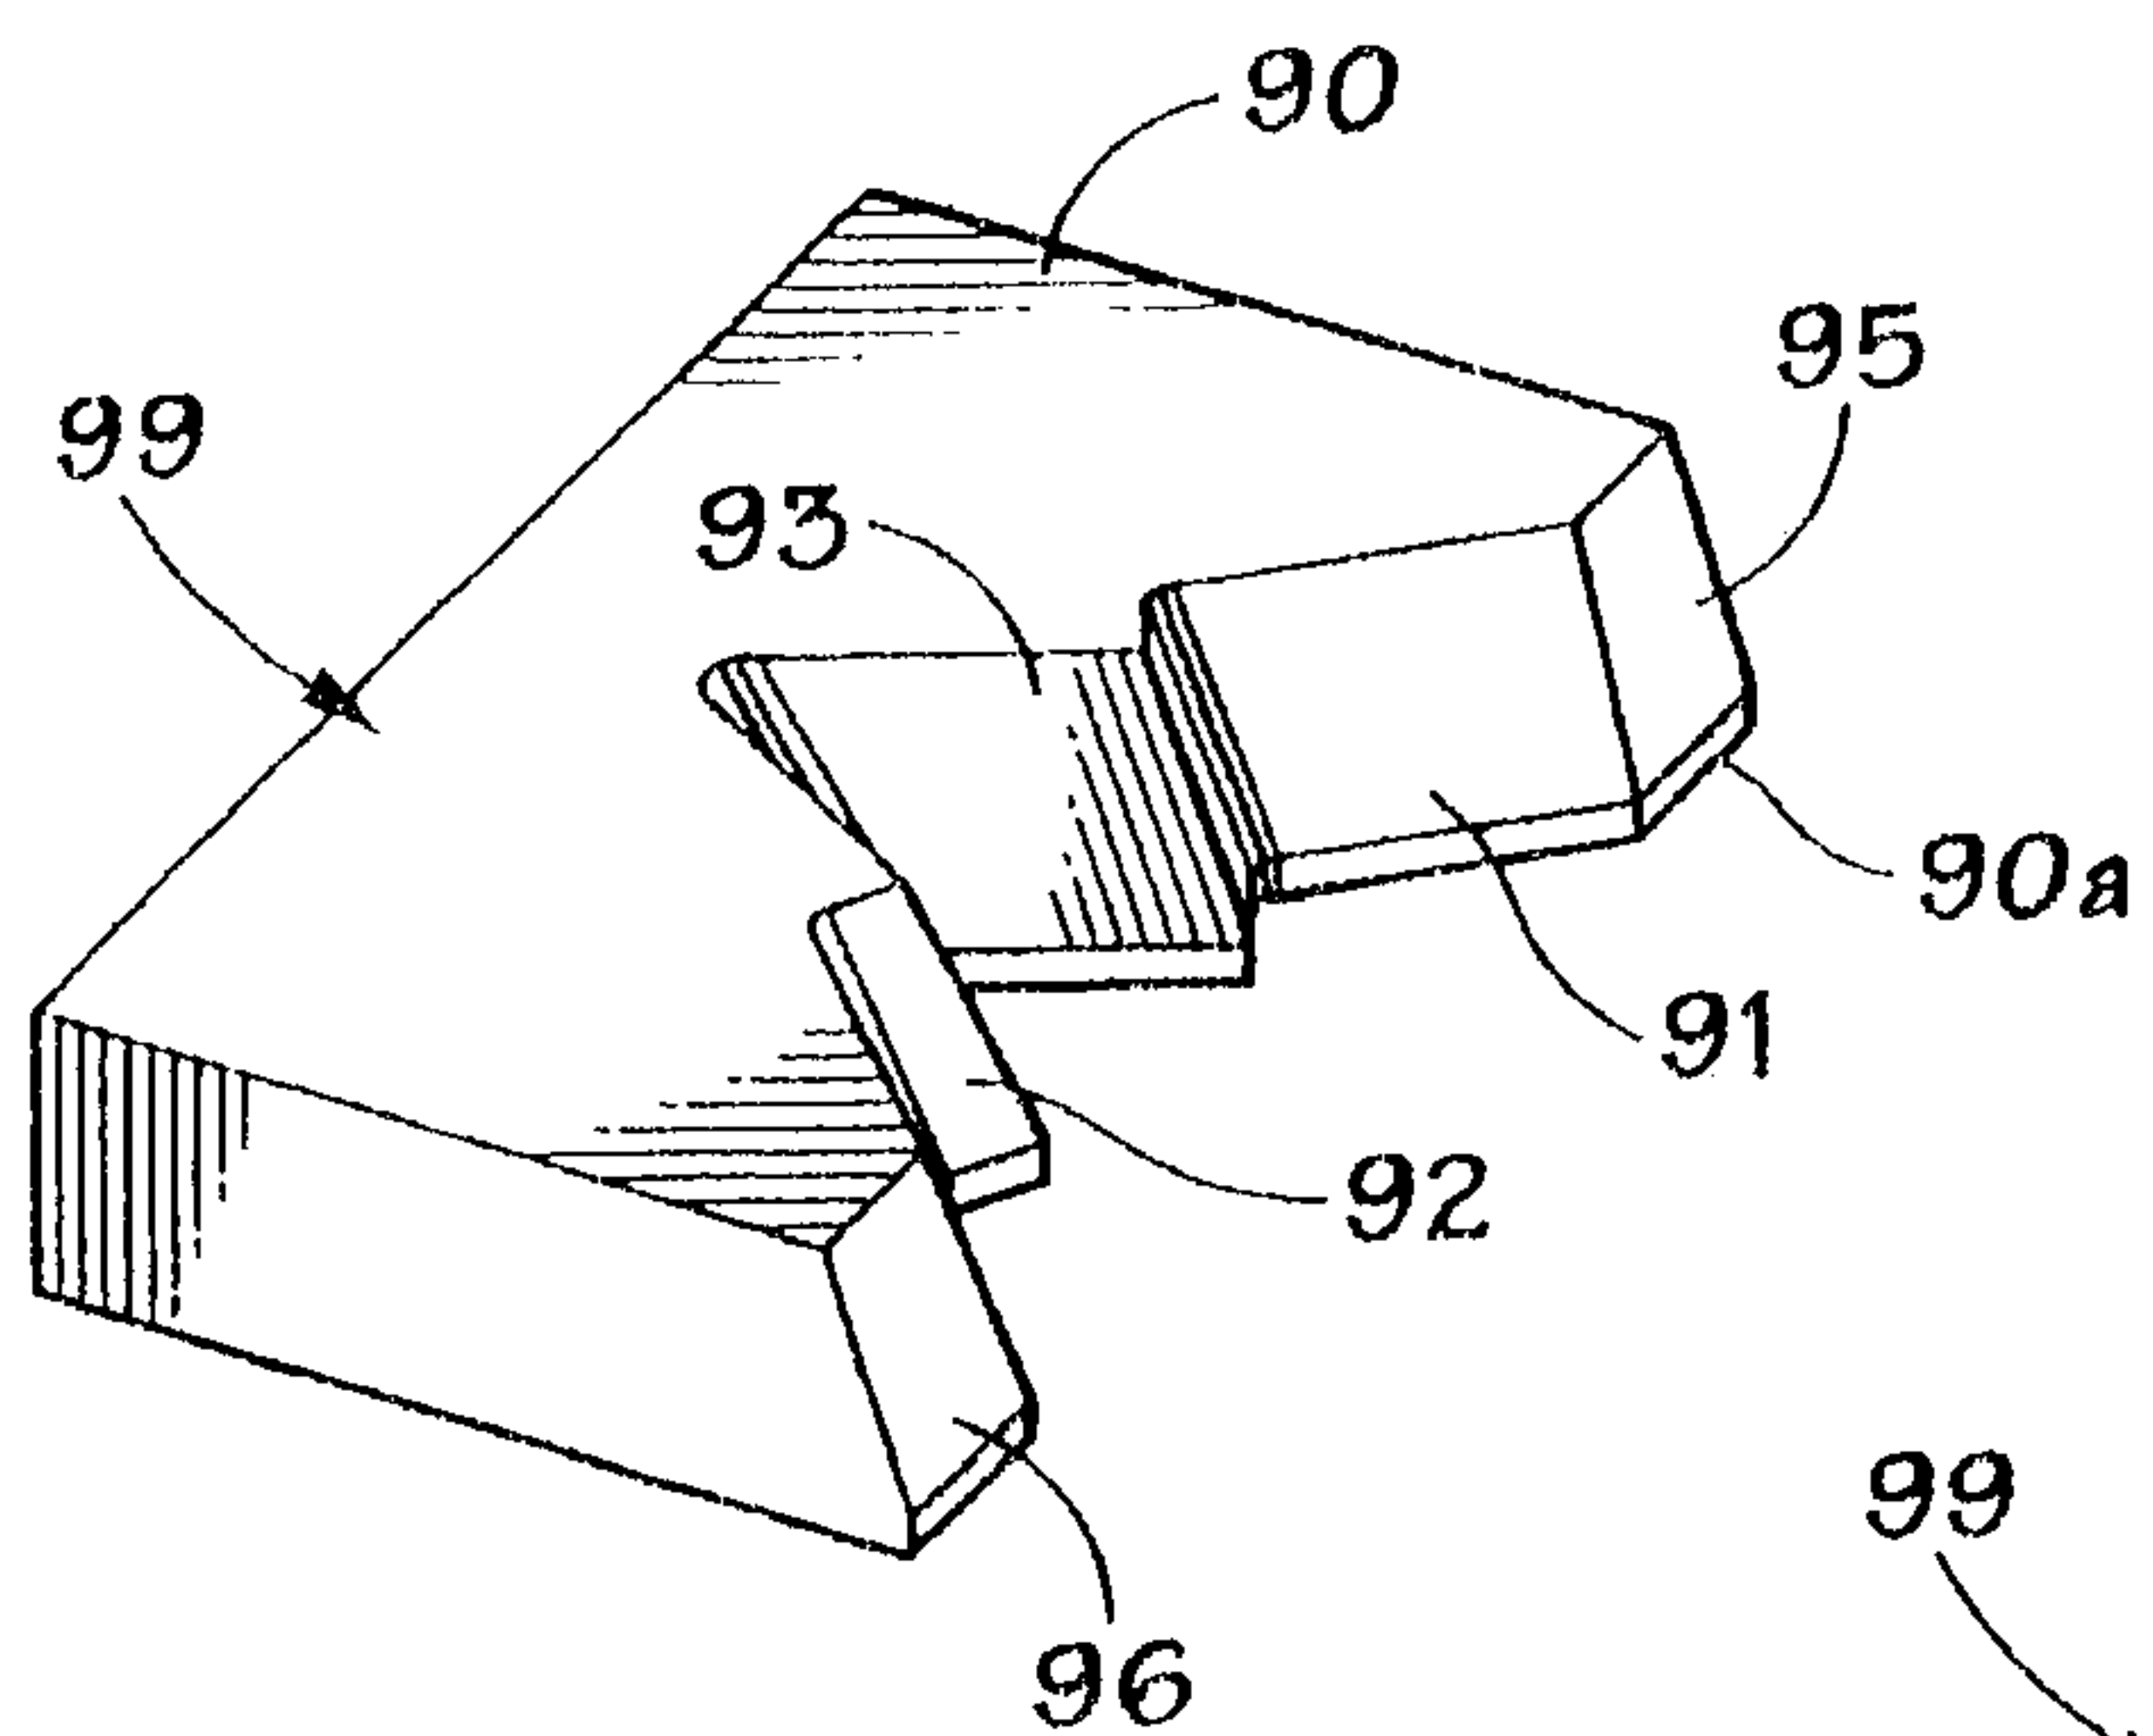
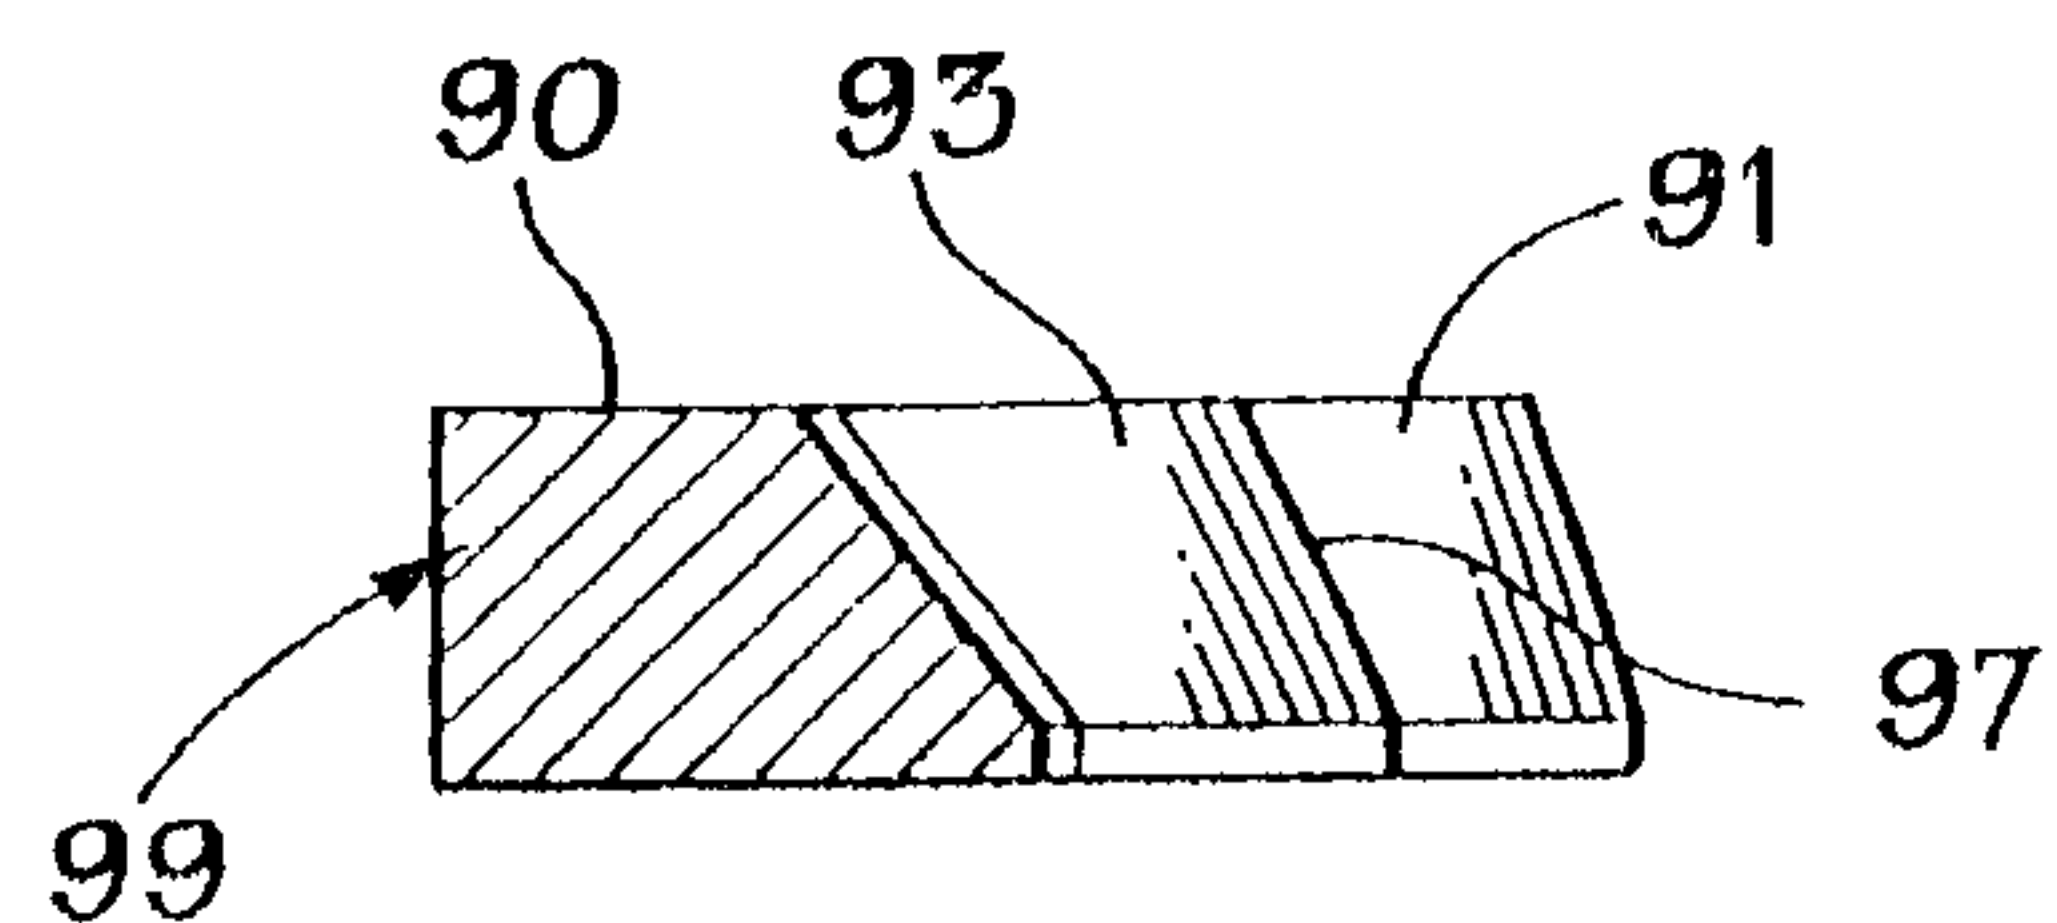
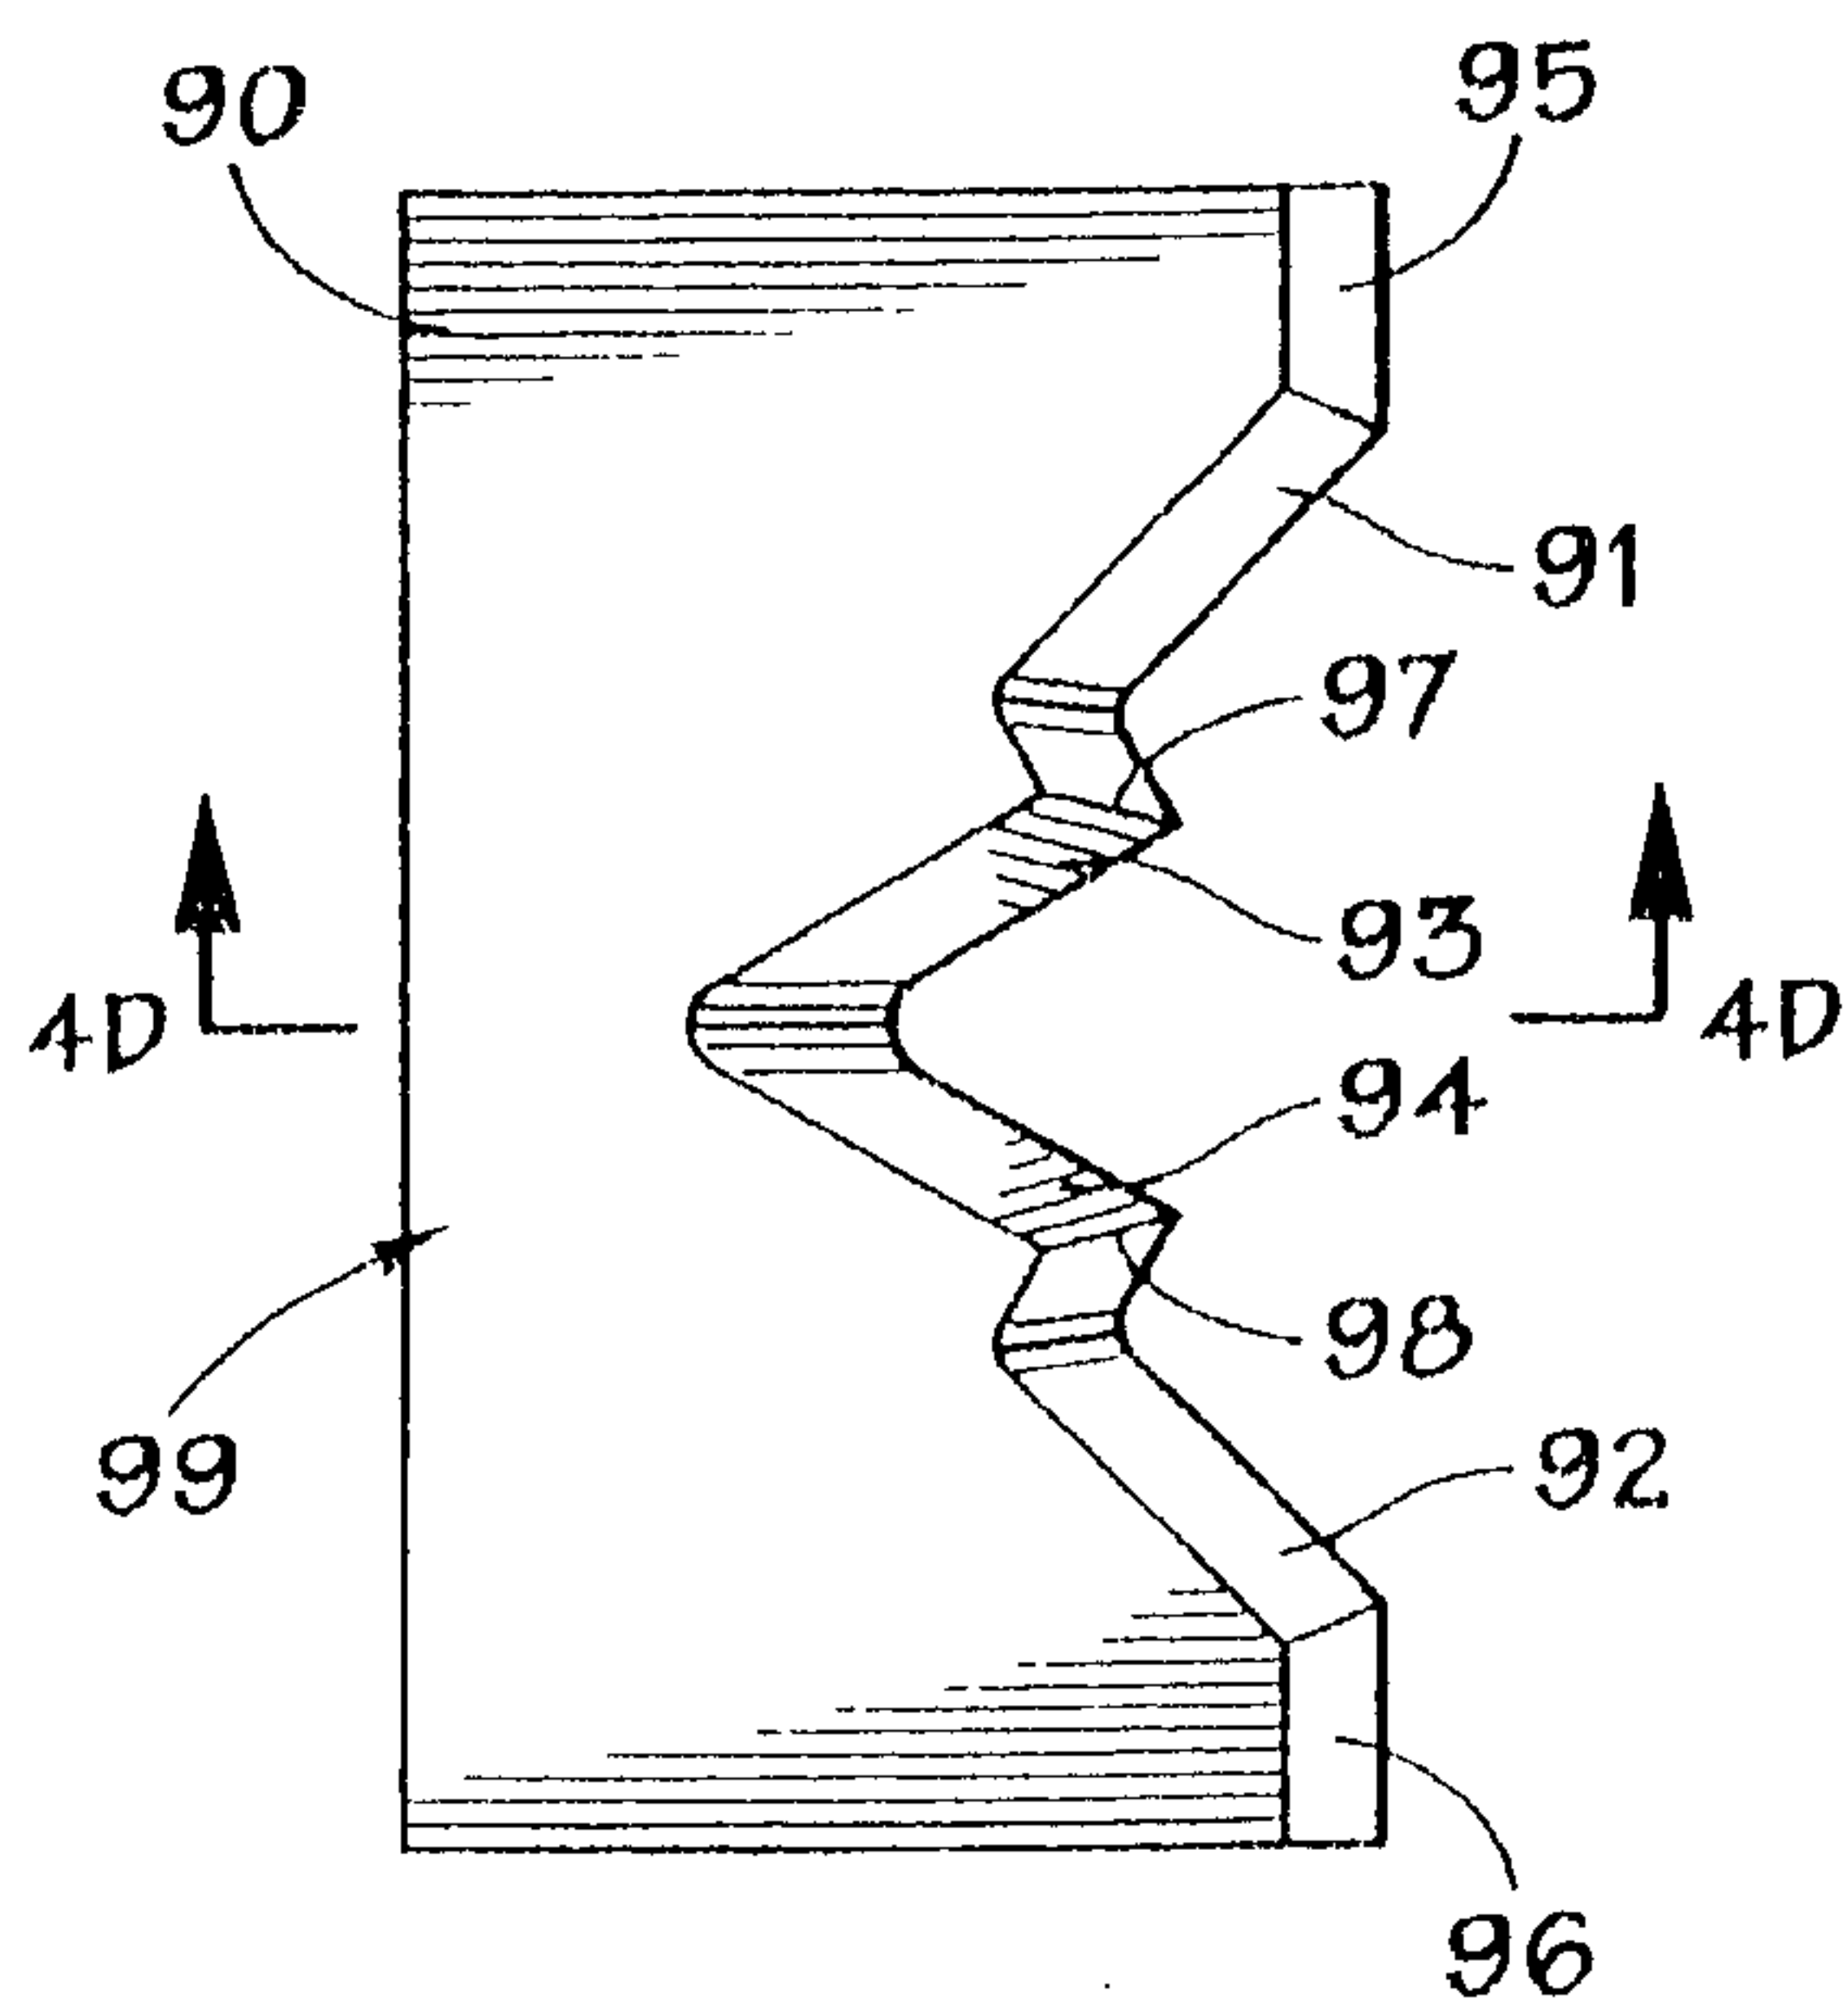
FIG. 4A**FIG. 4B****FIG. 4C****FIG. 4D**

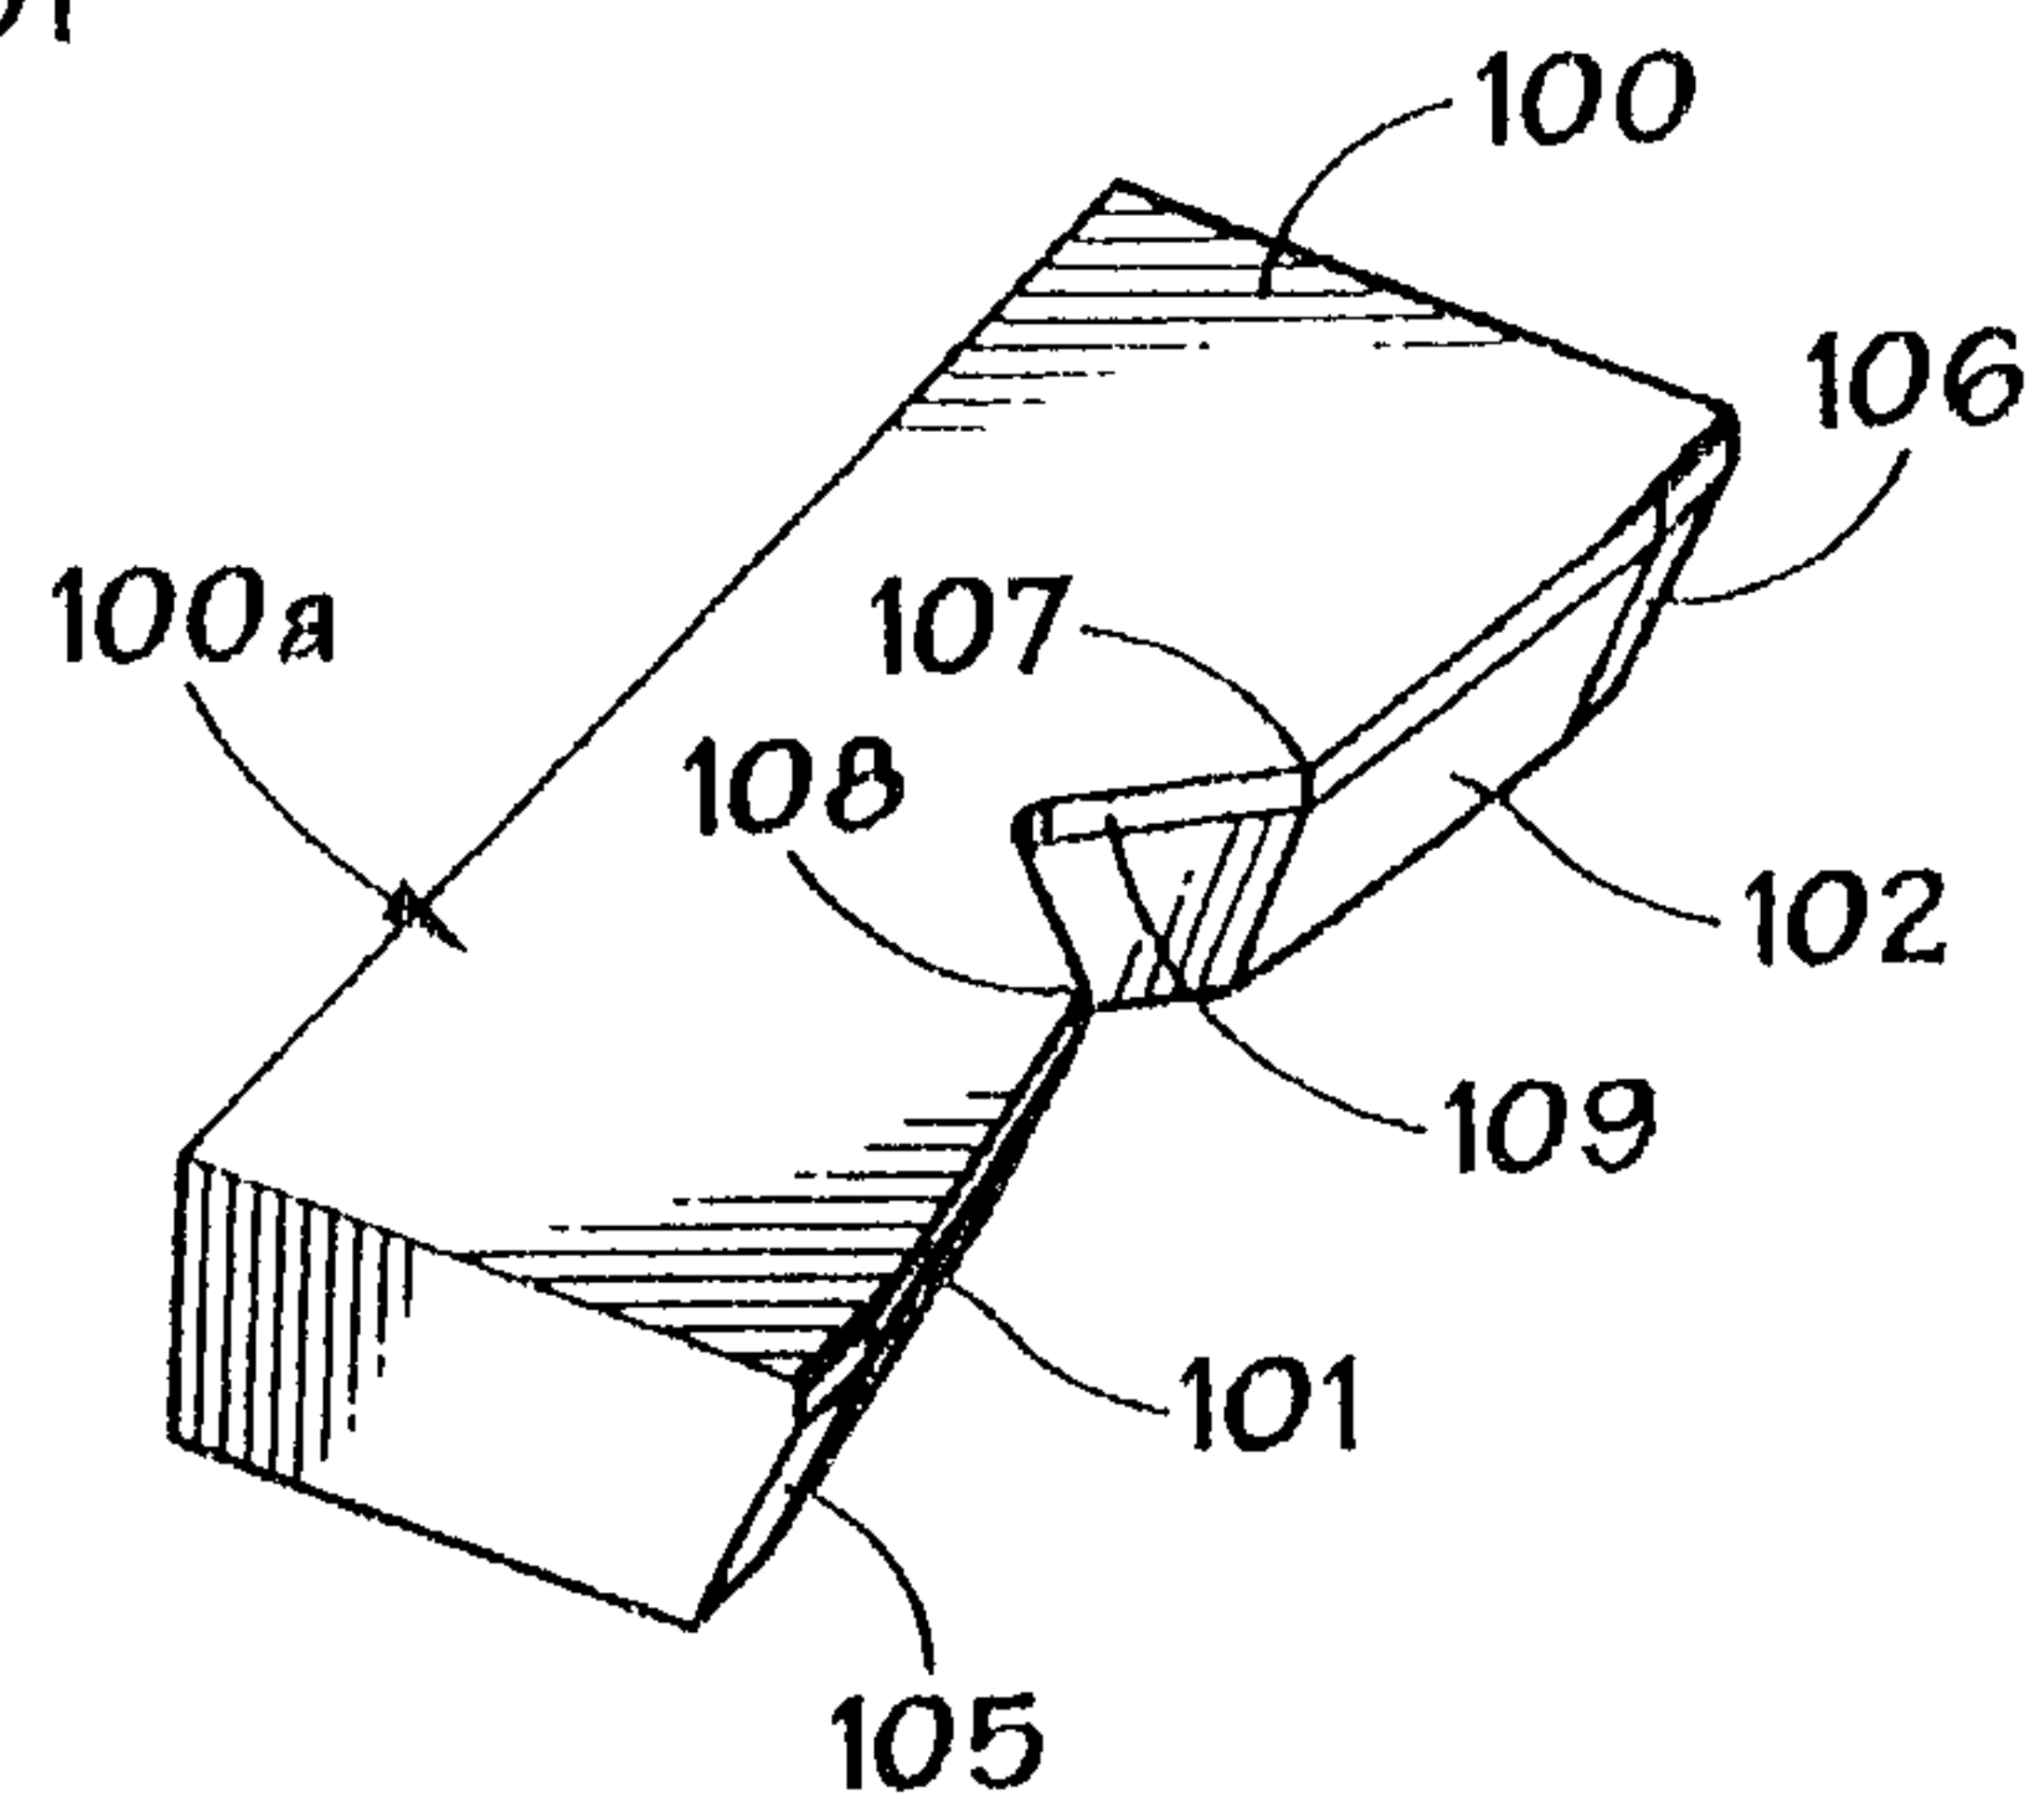
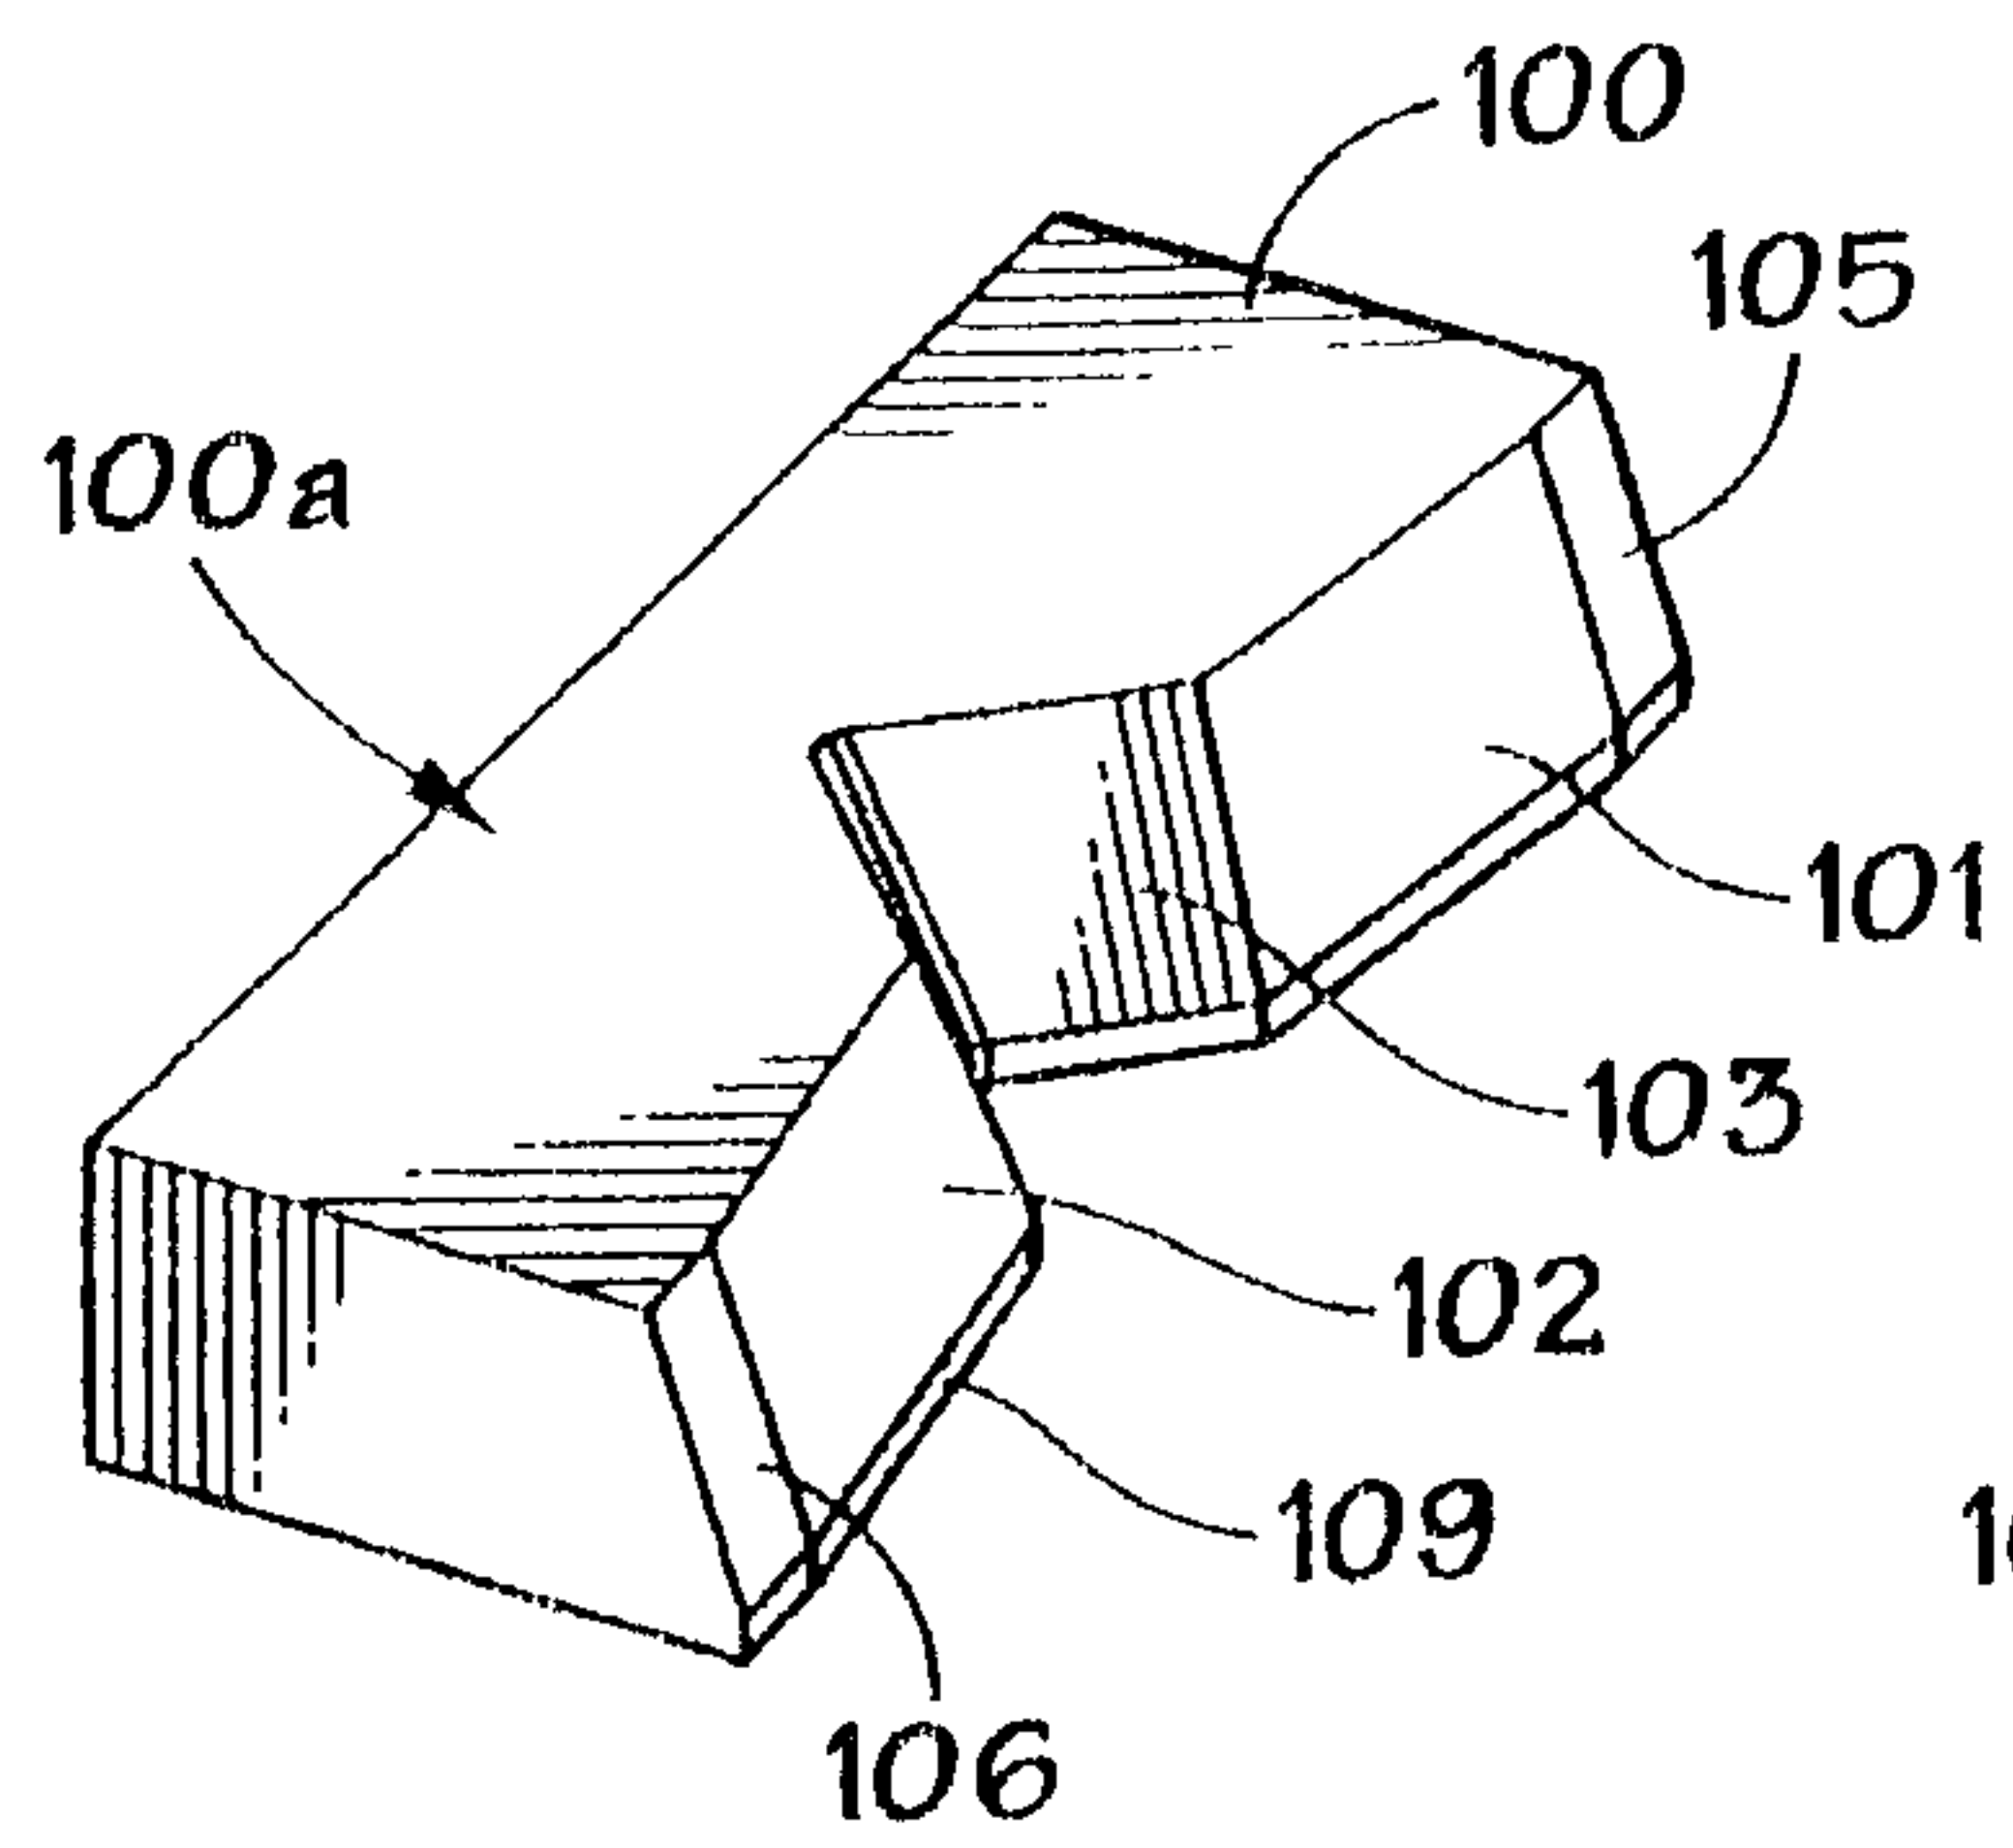
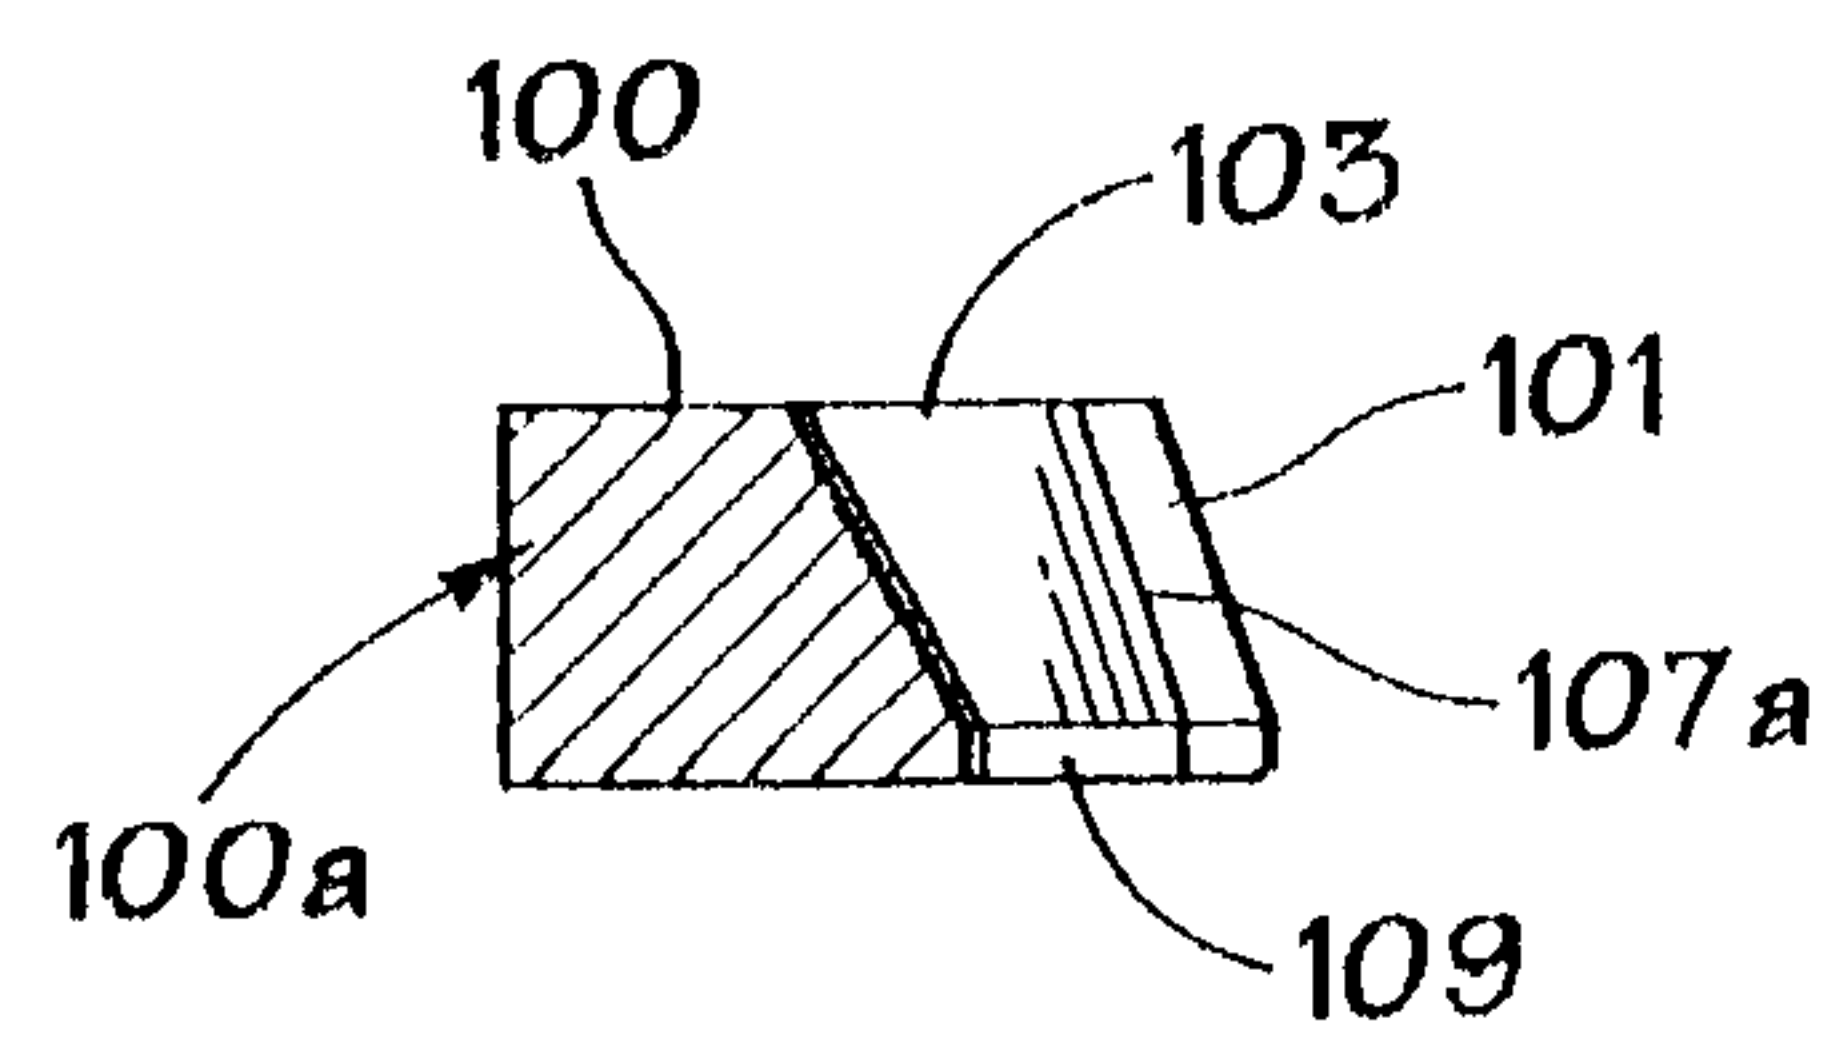
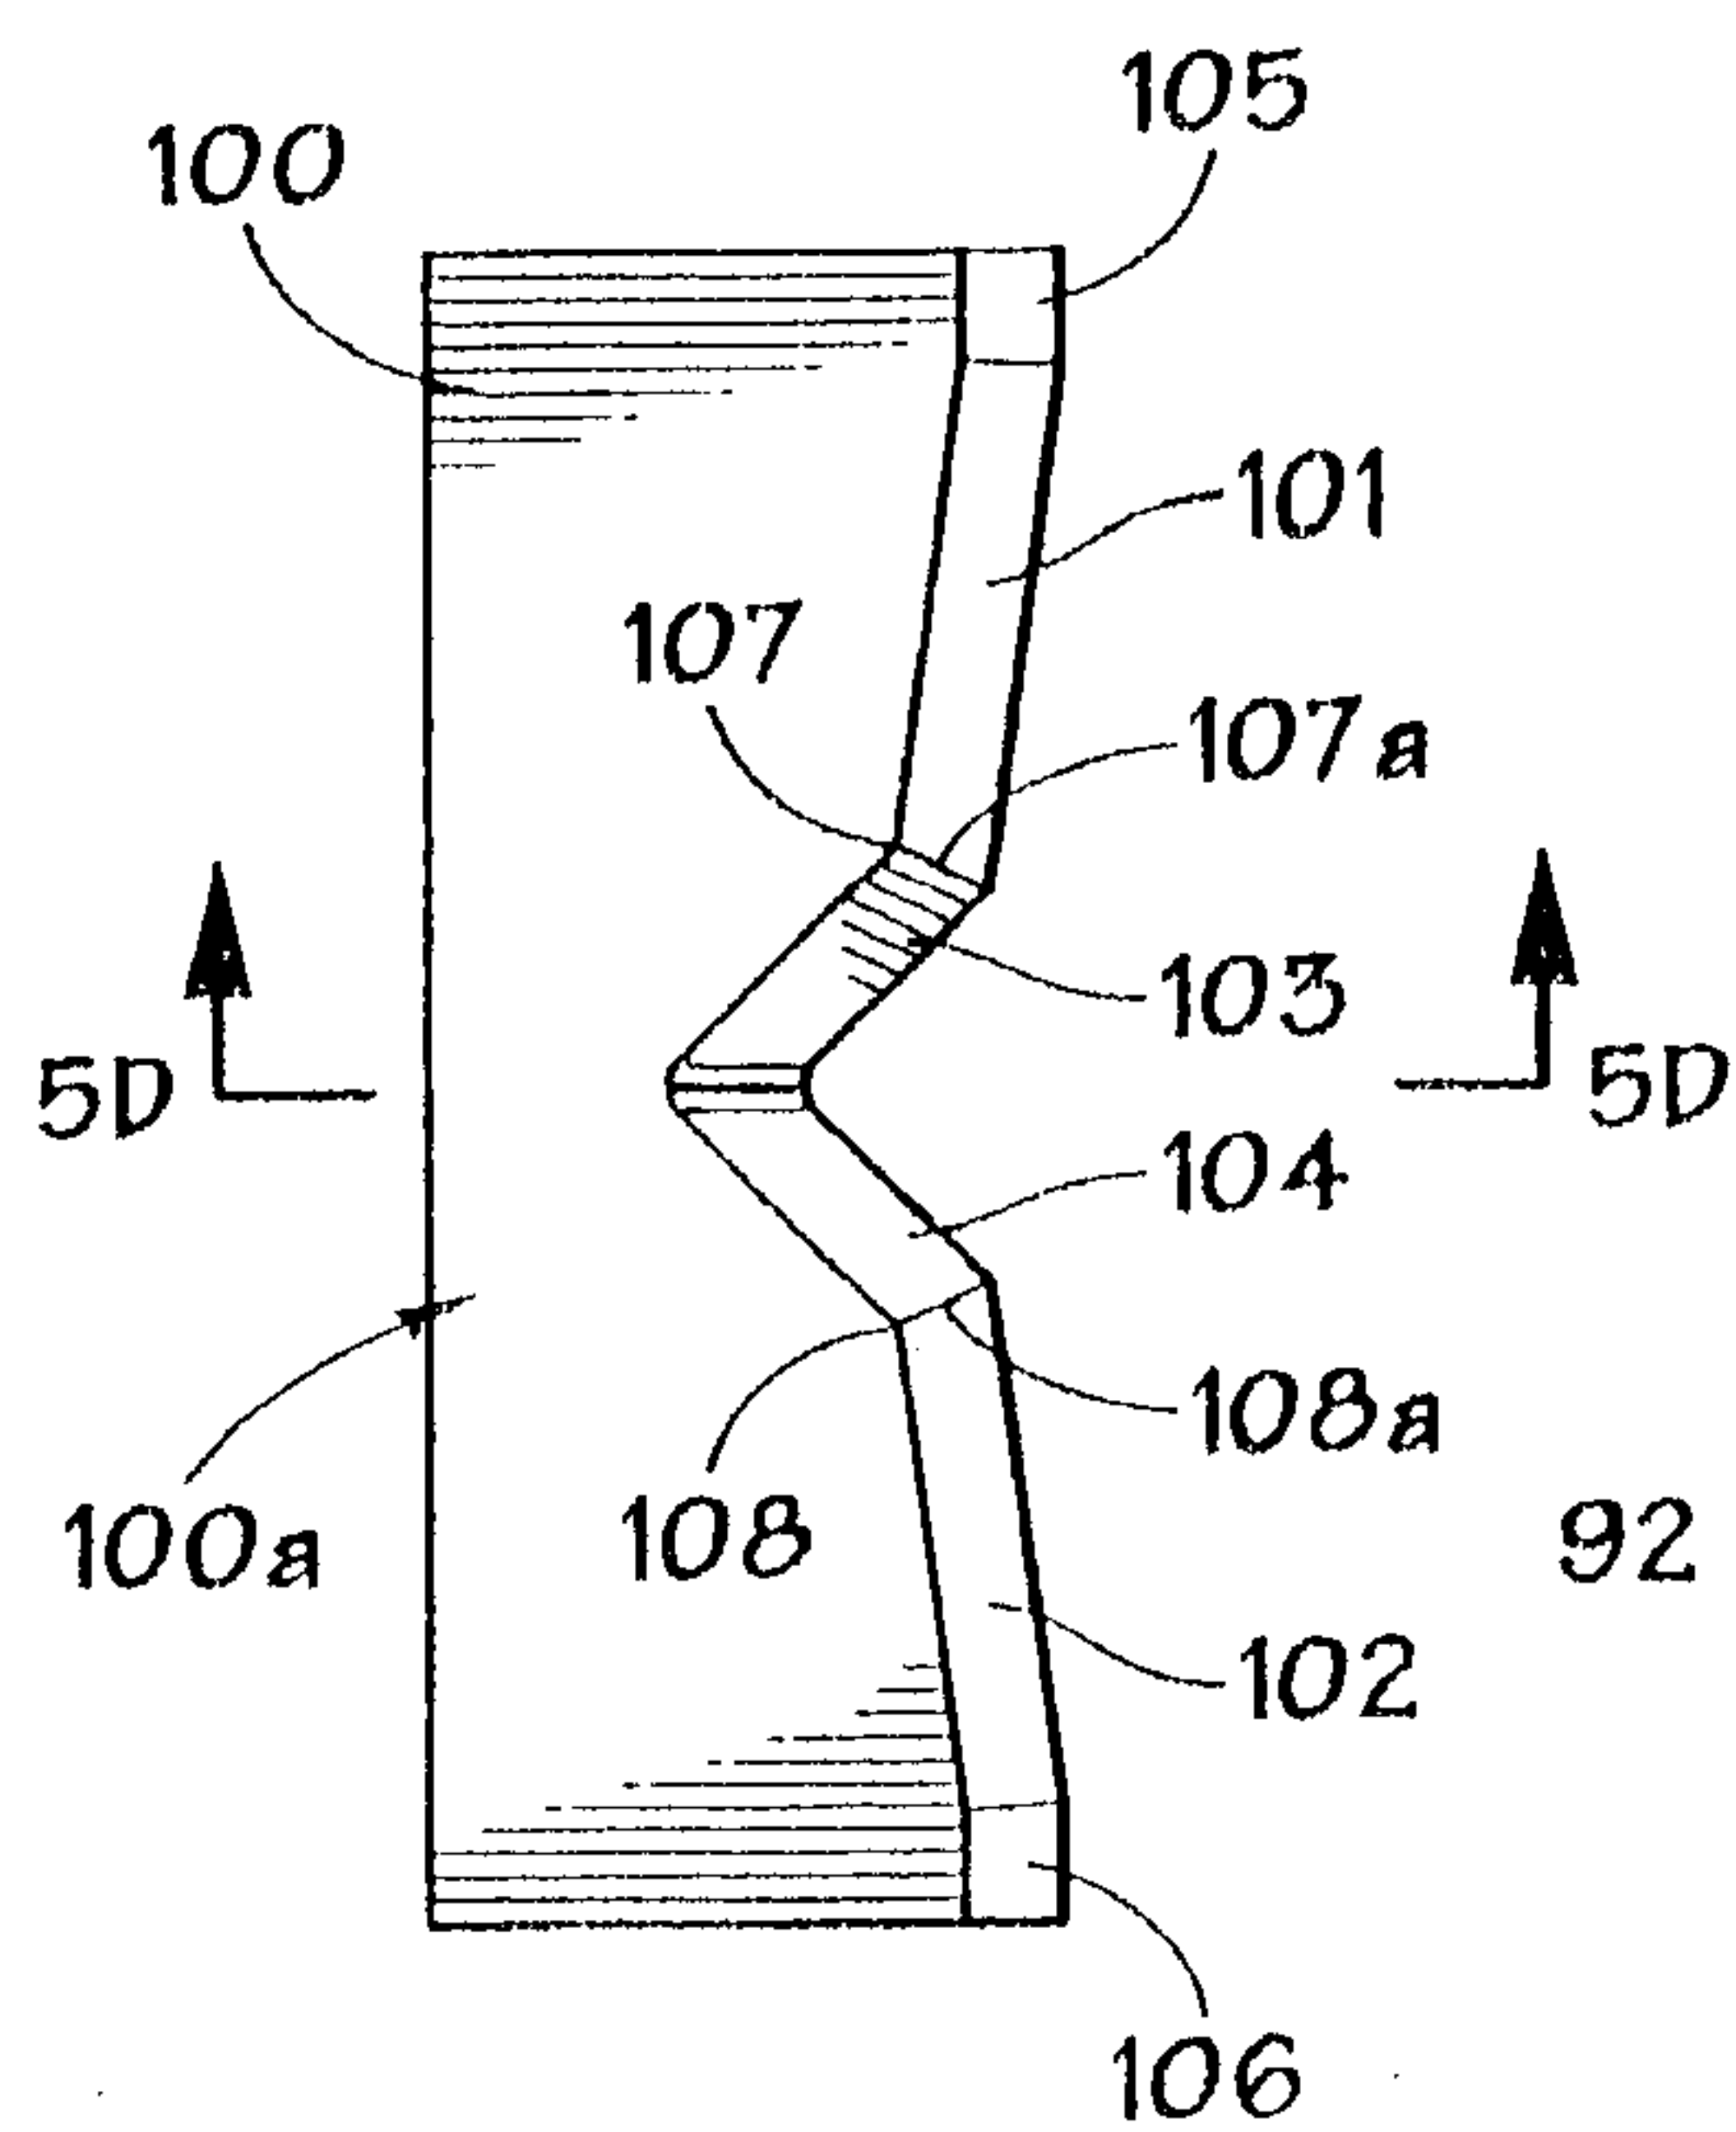
FIG. 5A**FIG. 5B****FIG. 5C****FIG. 5D**

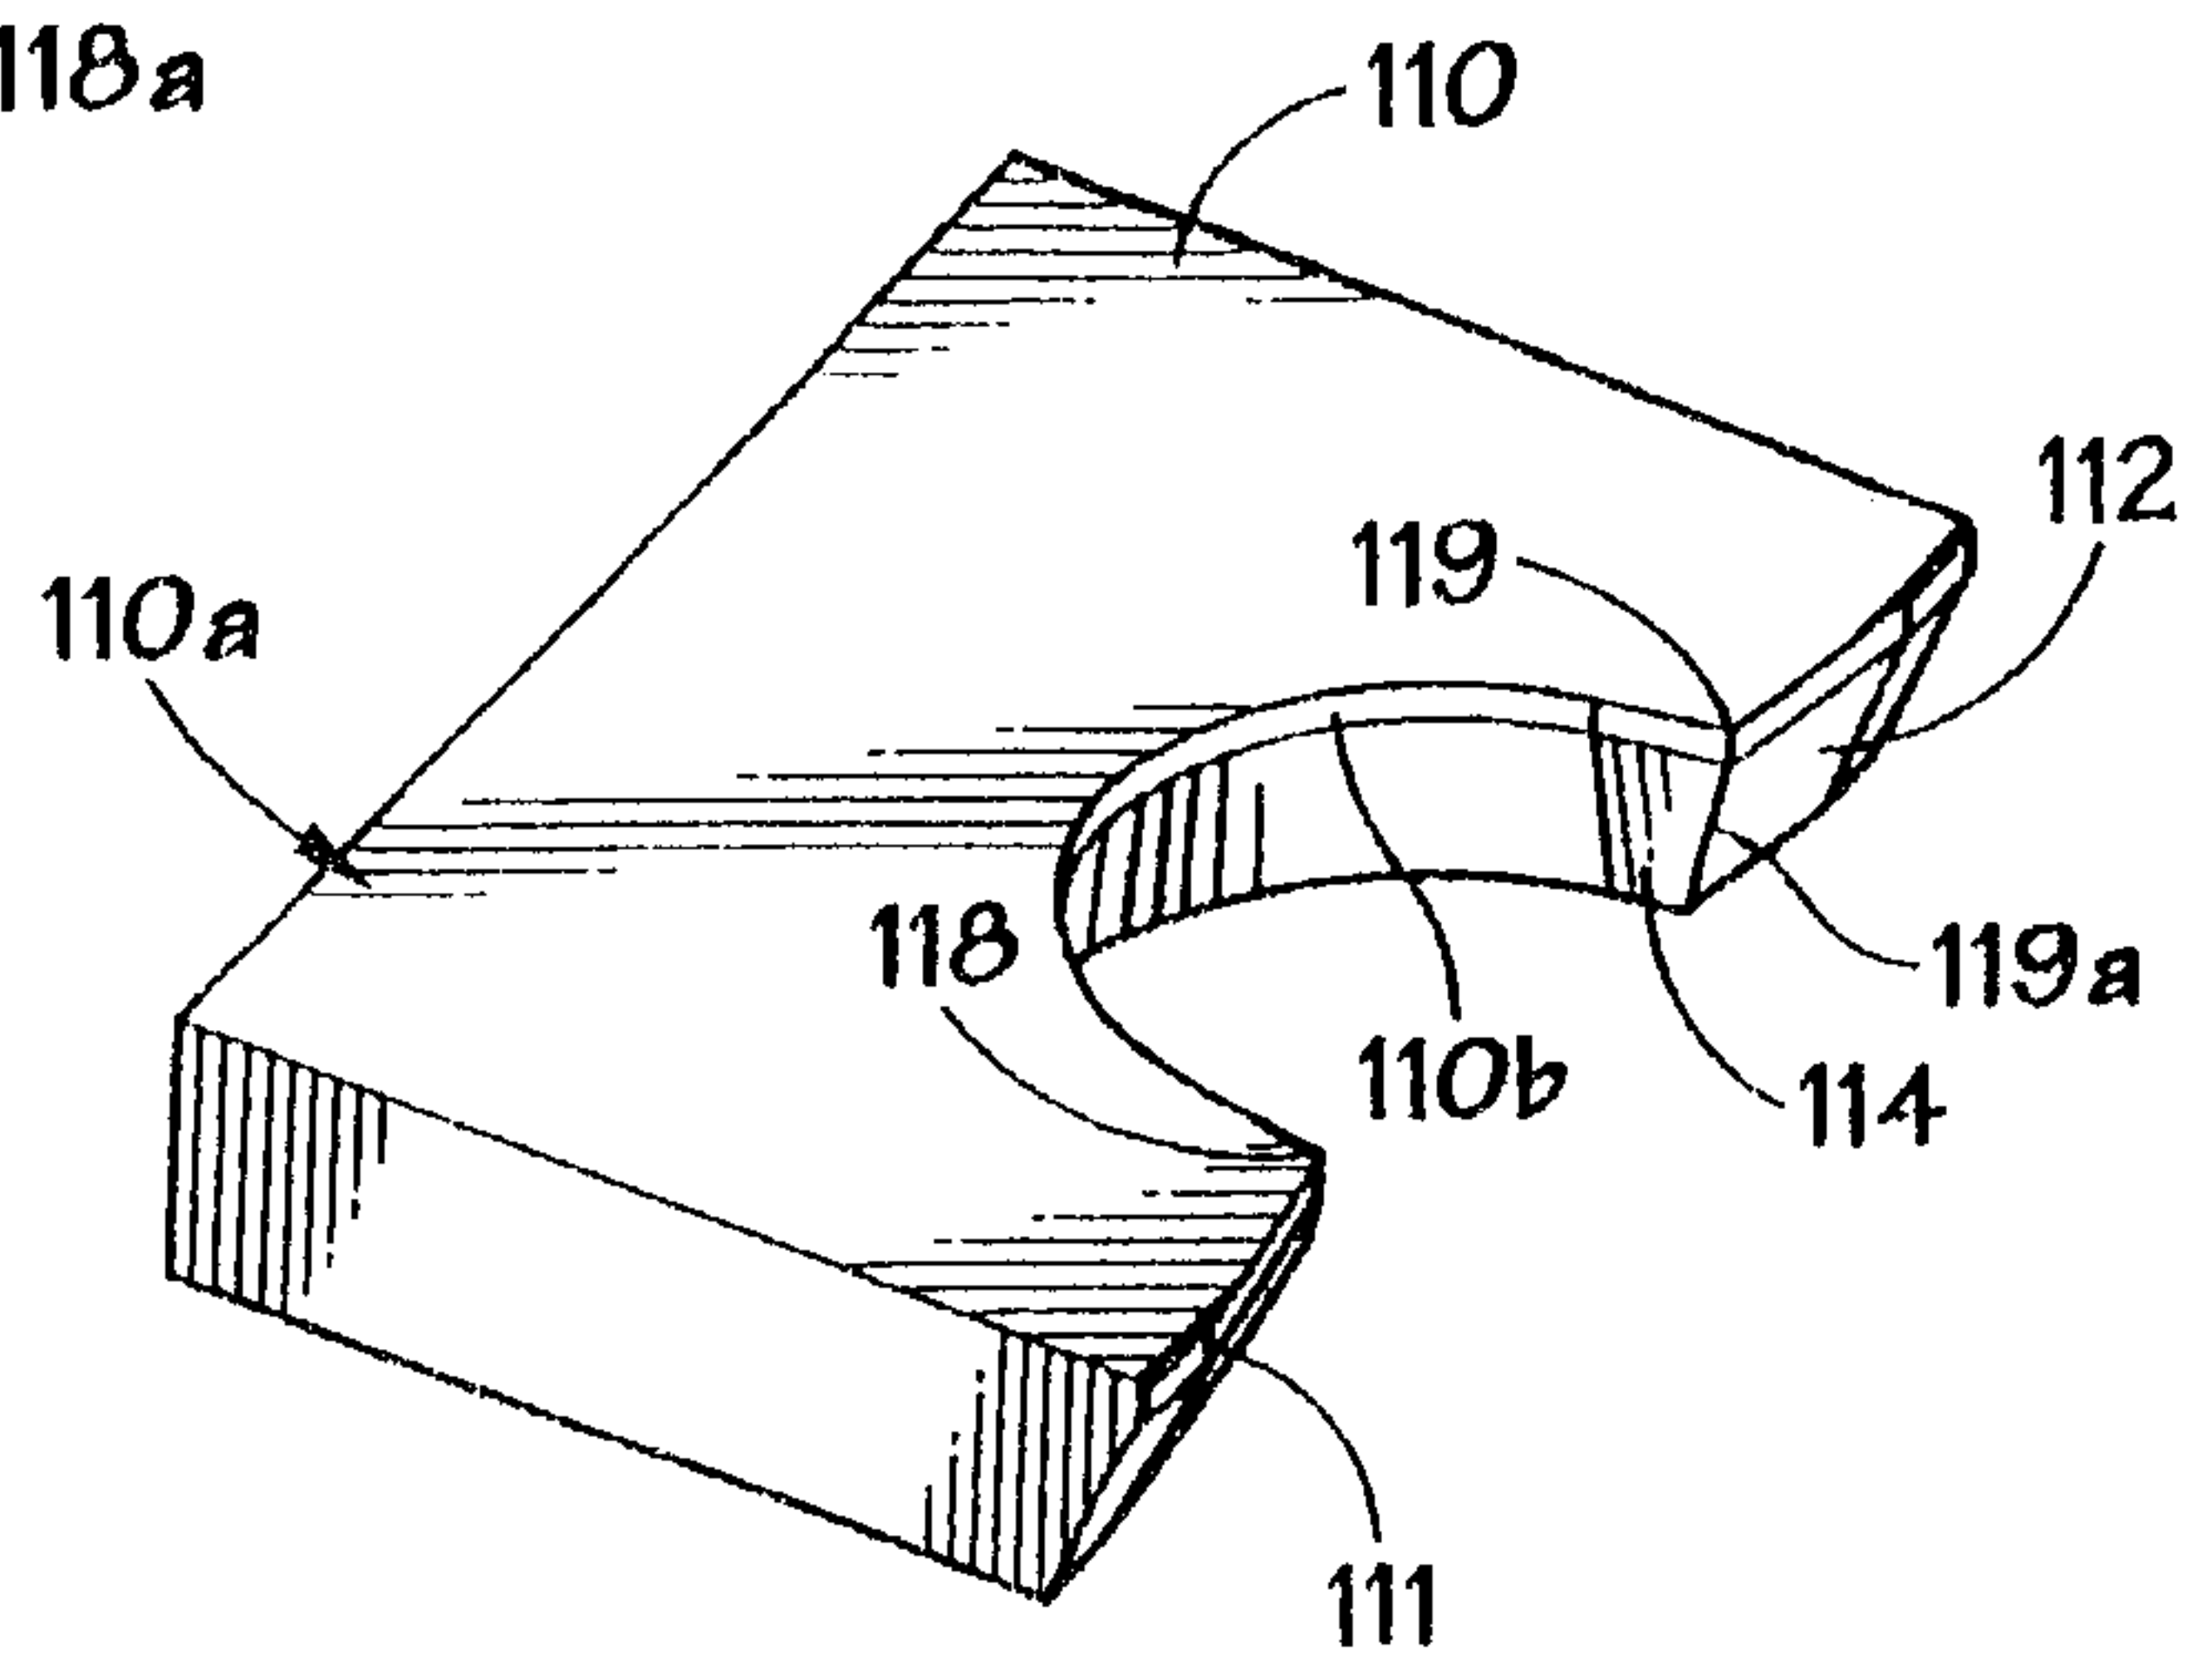
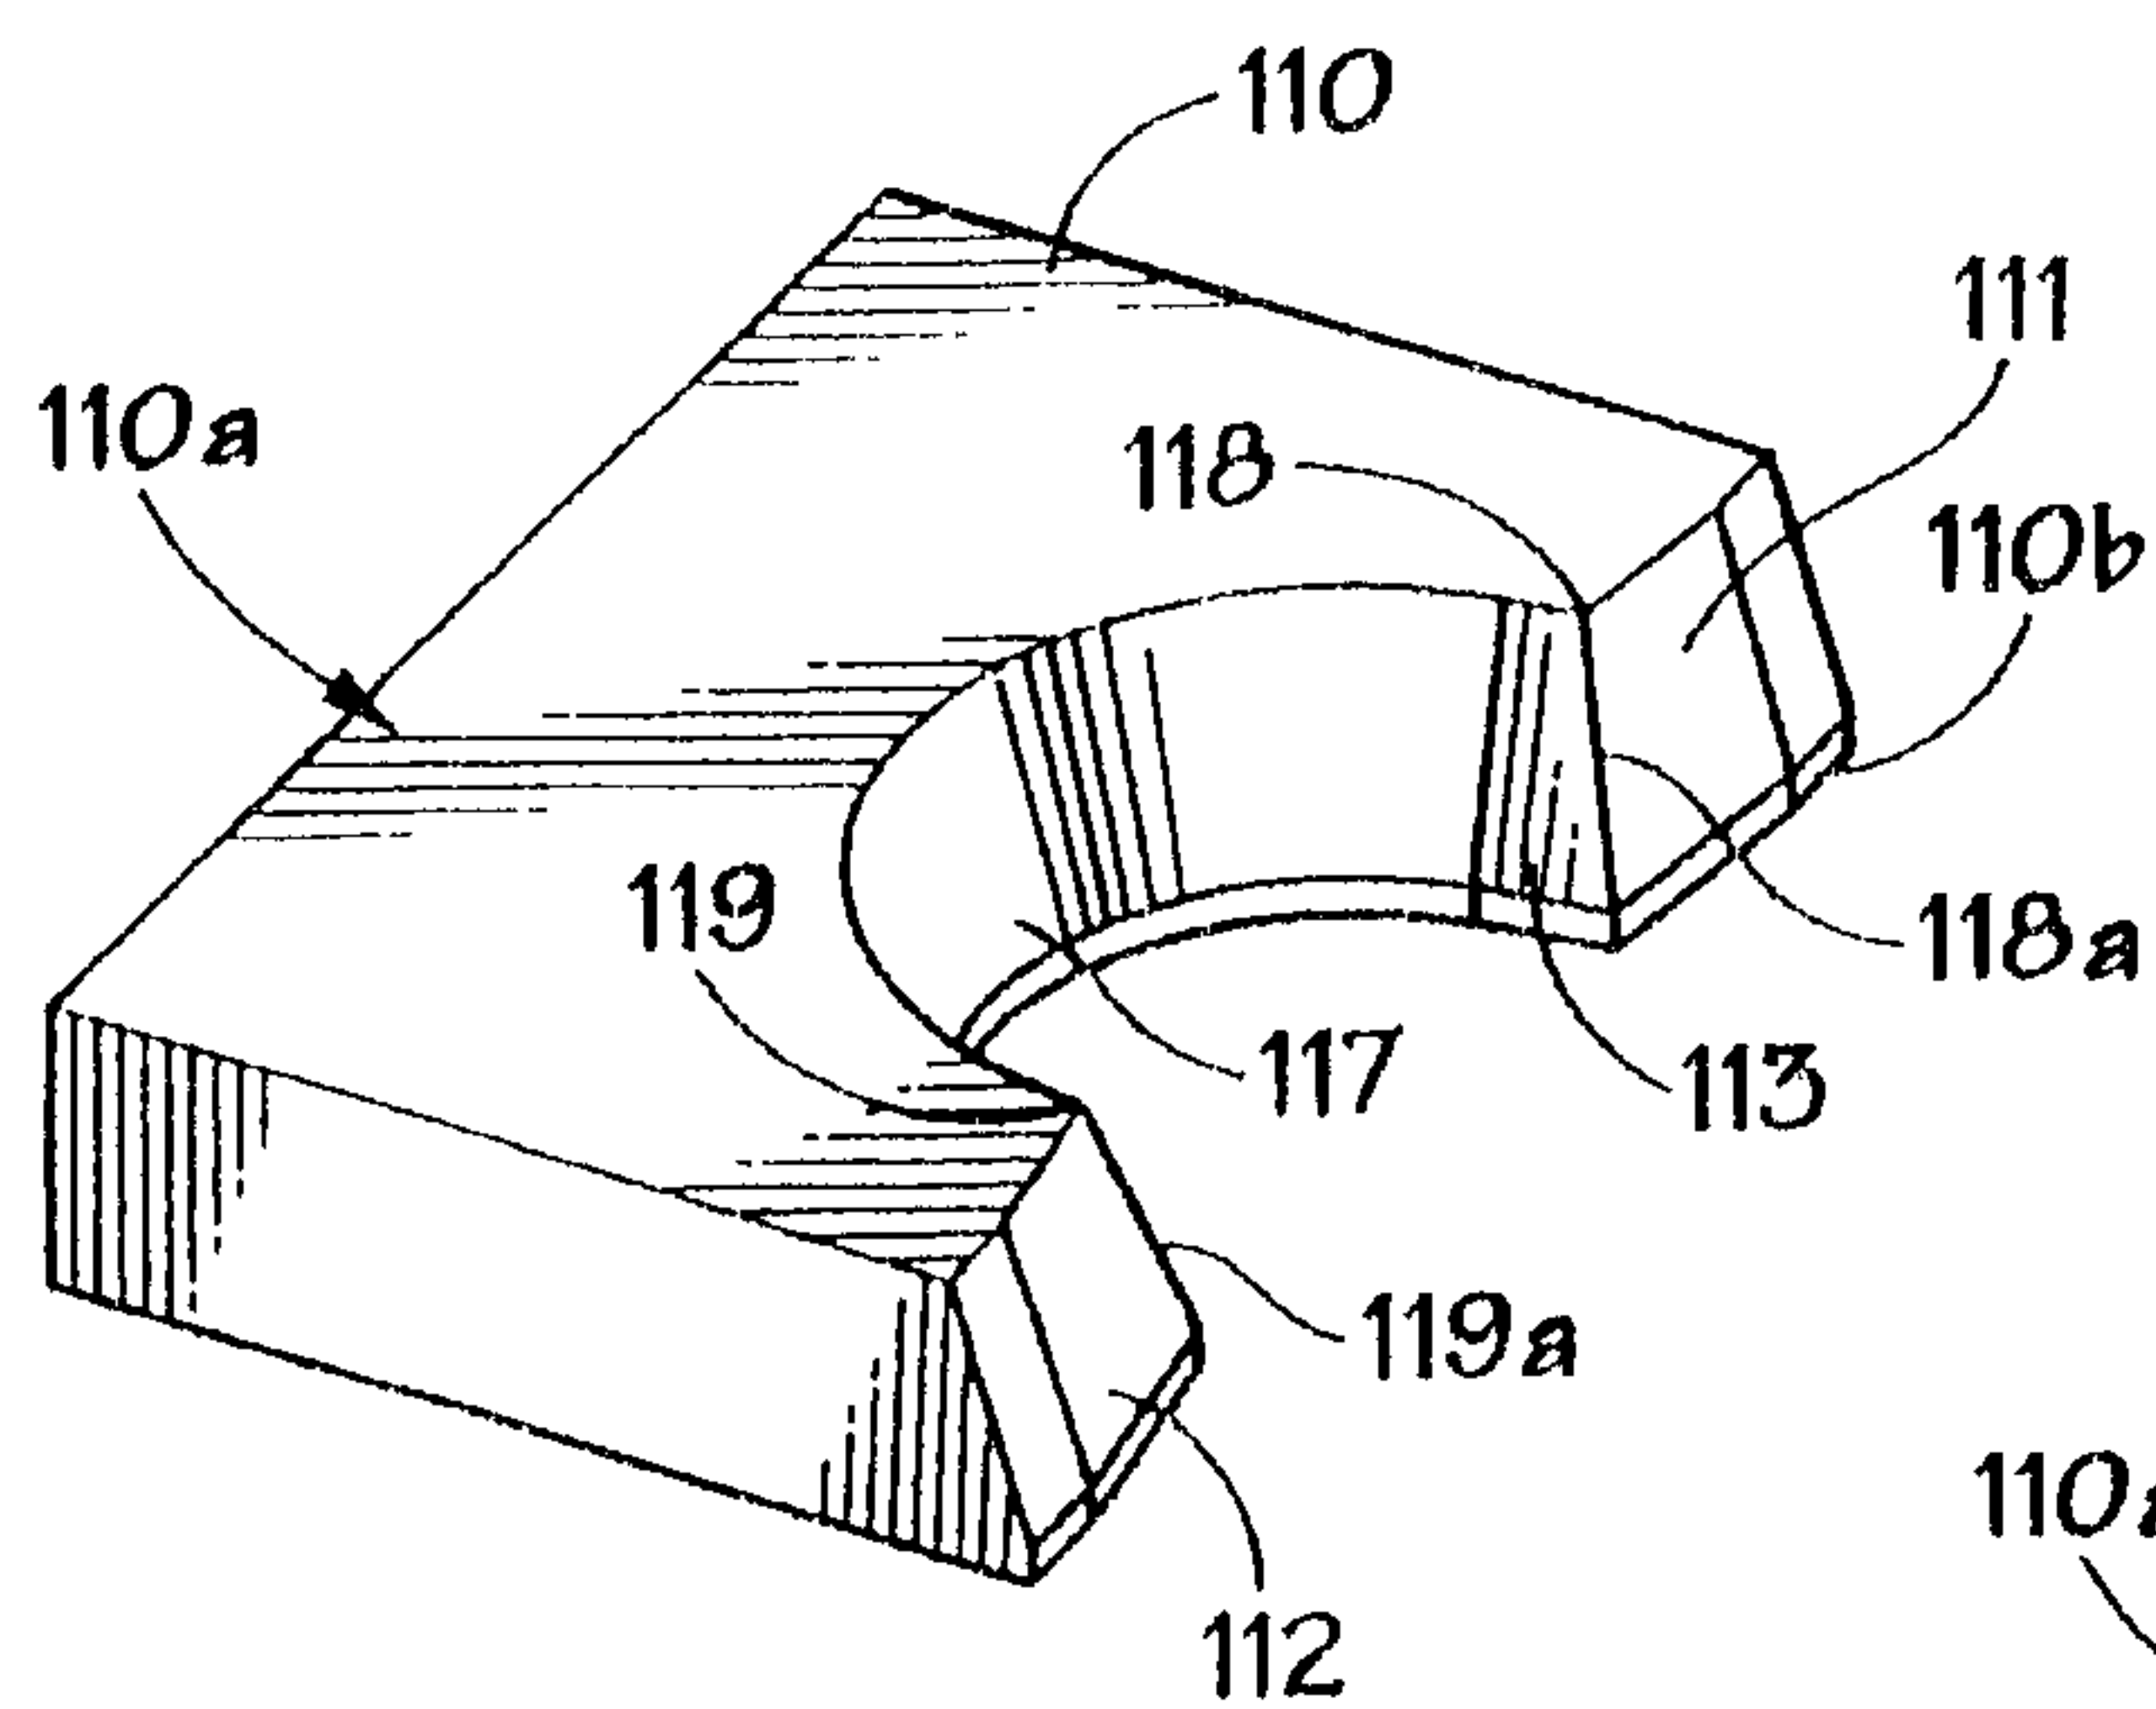
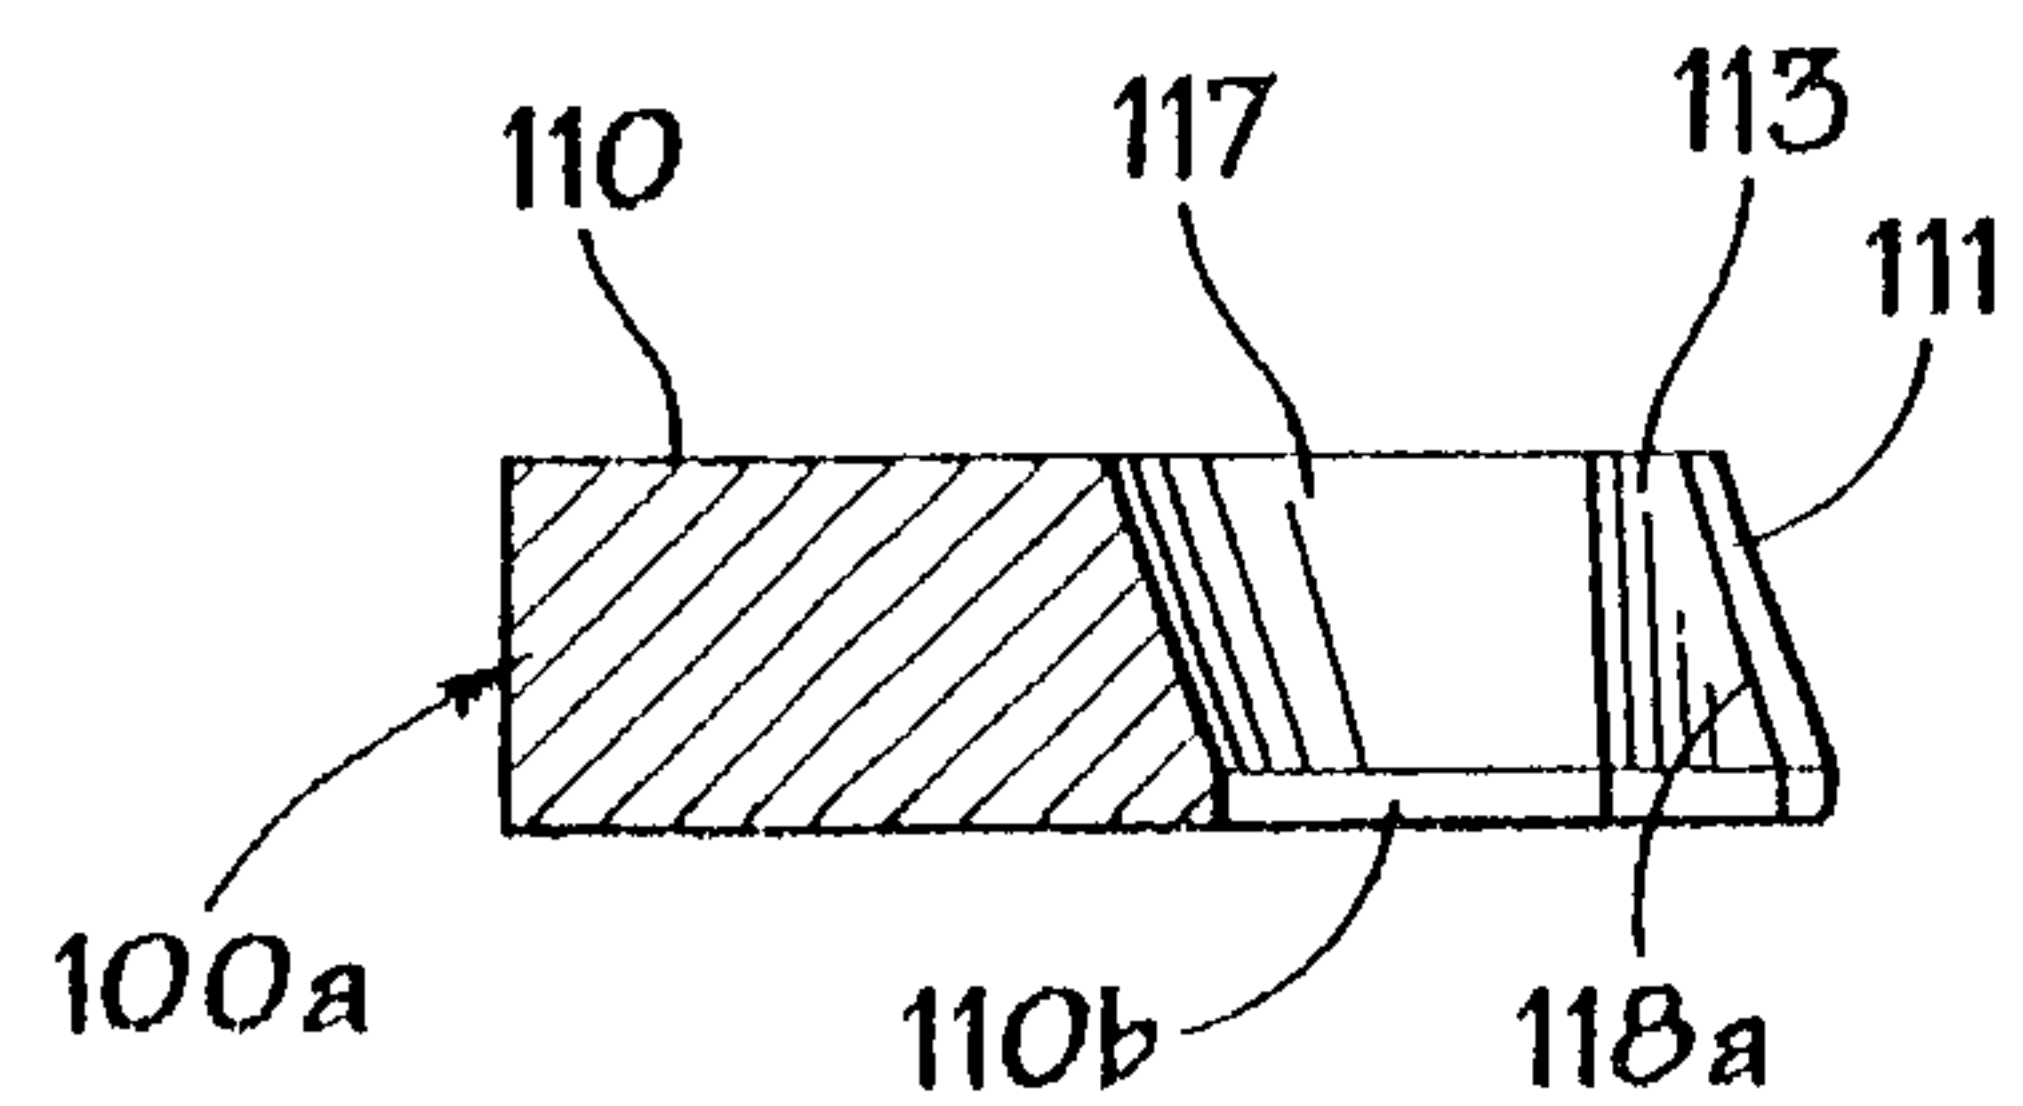
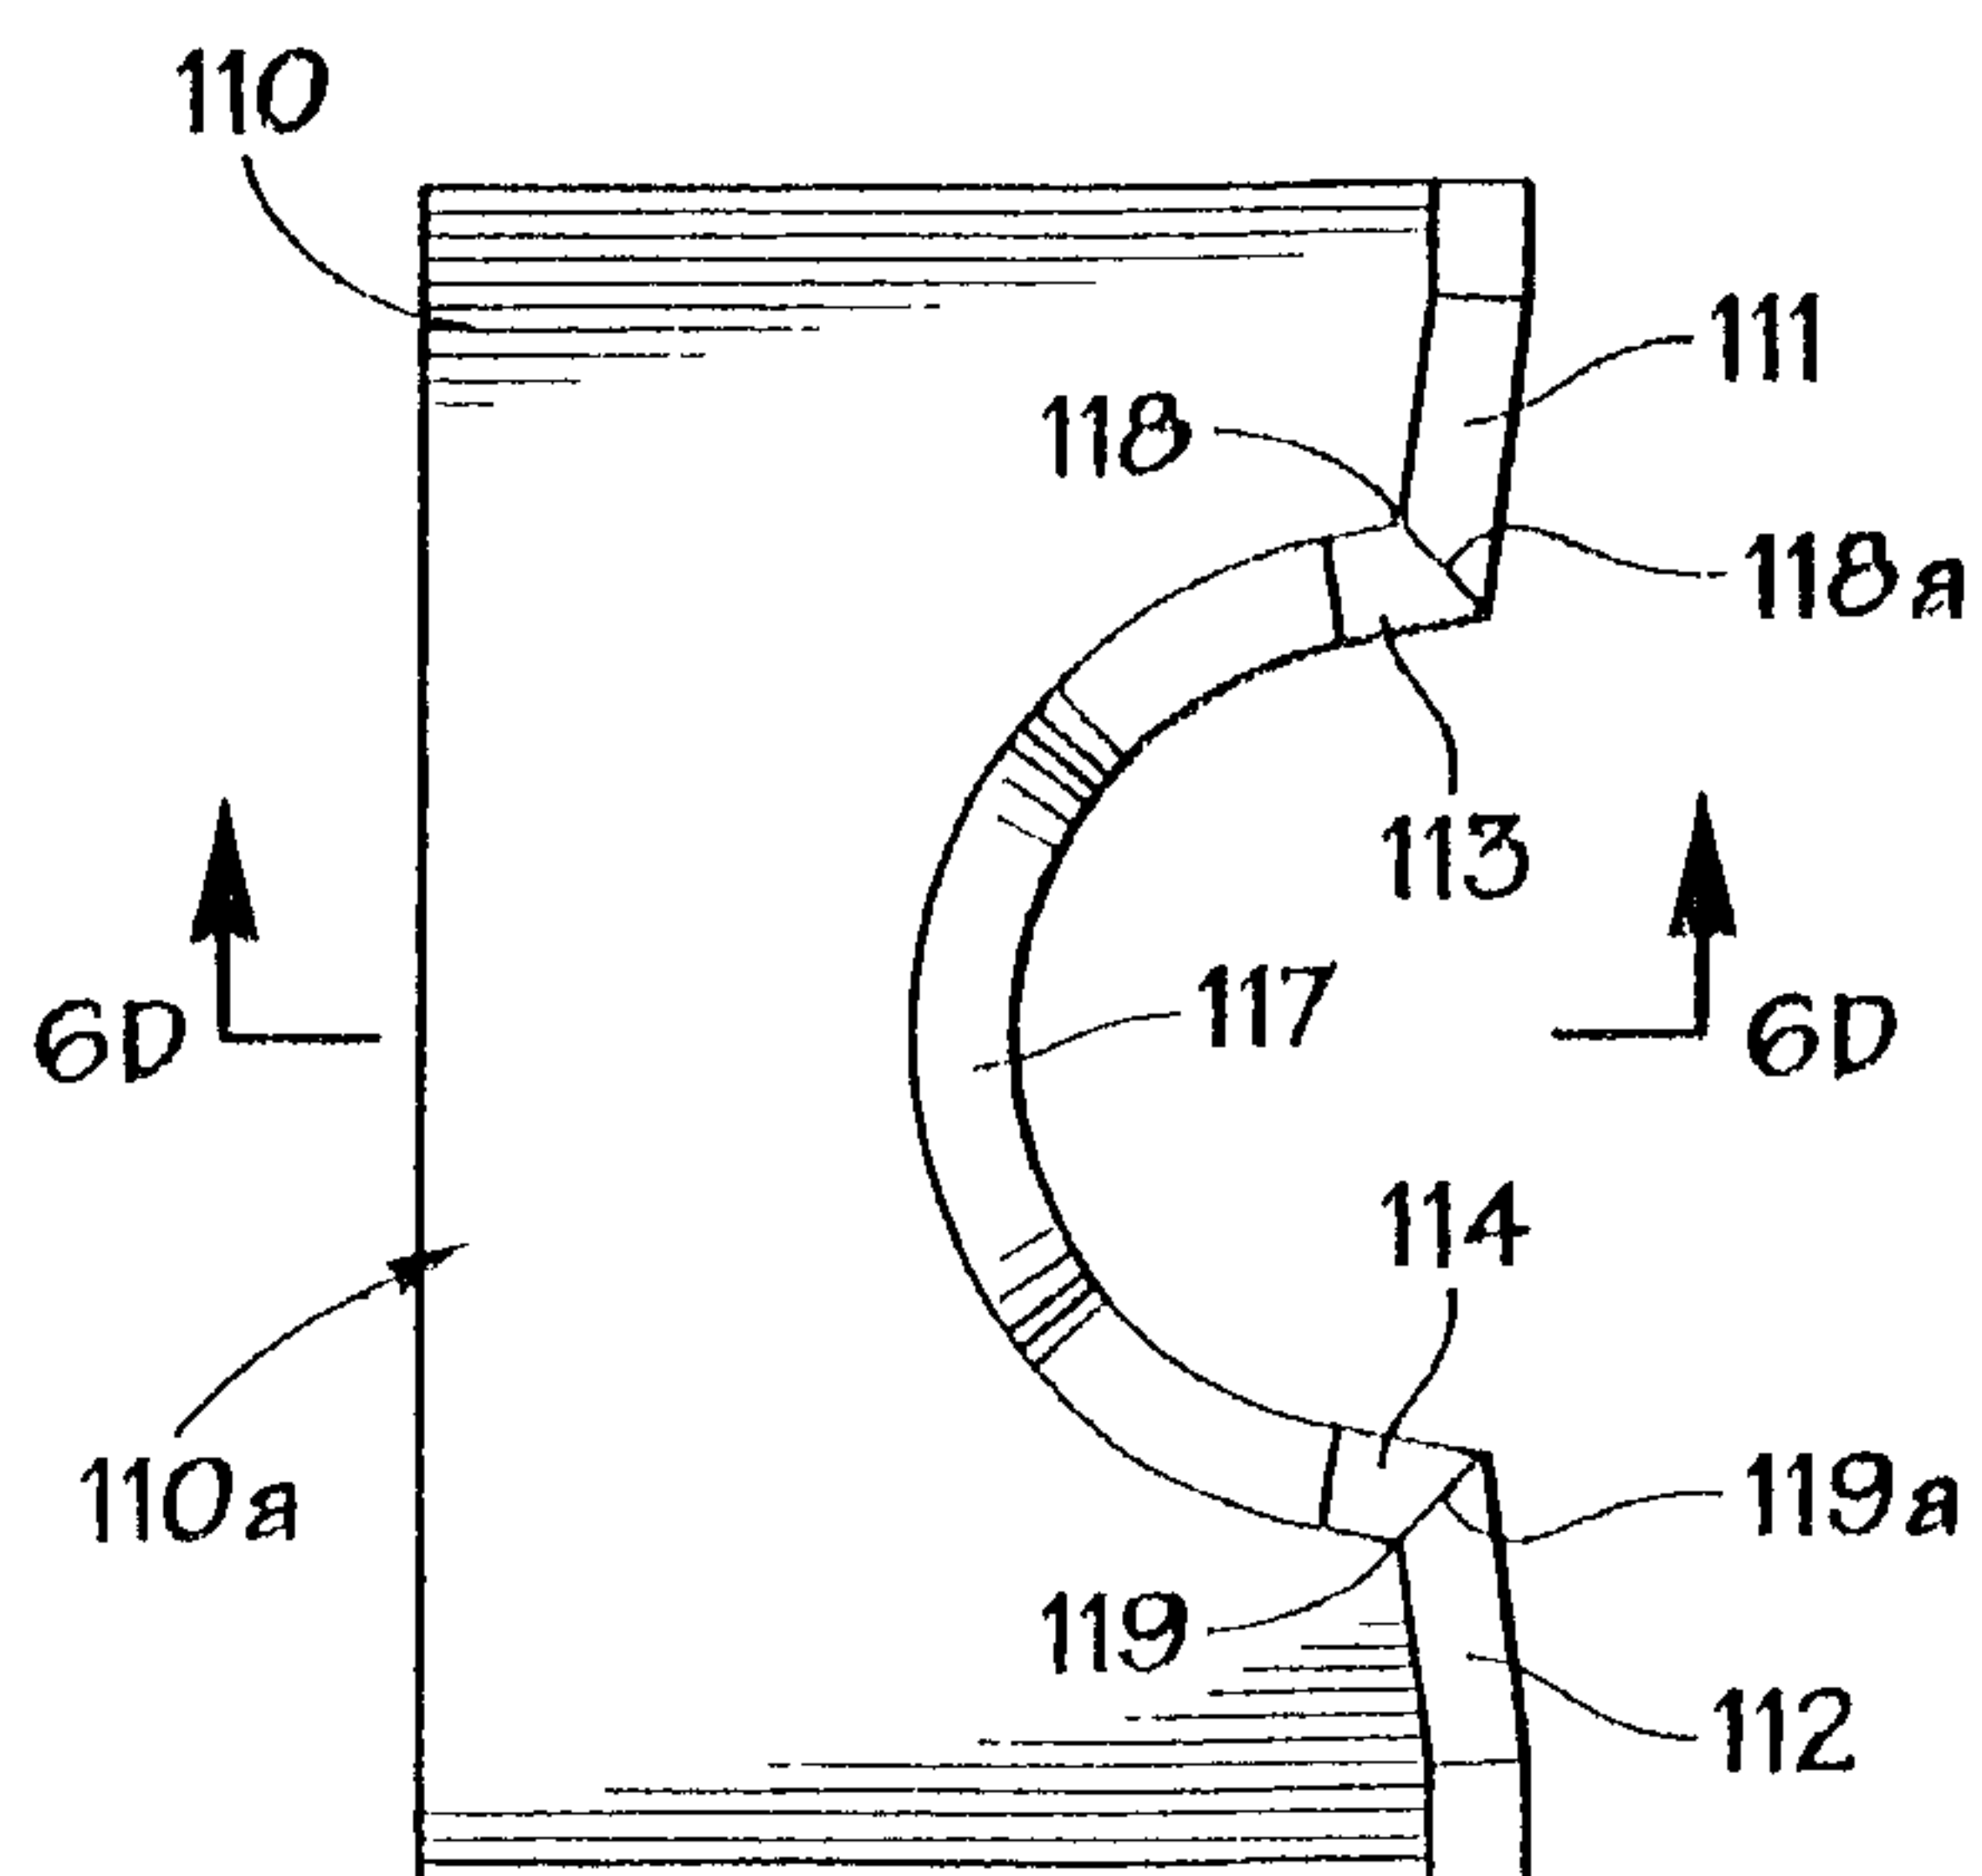
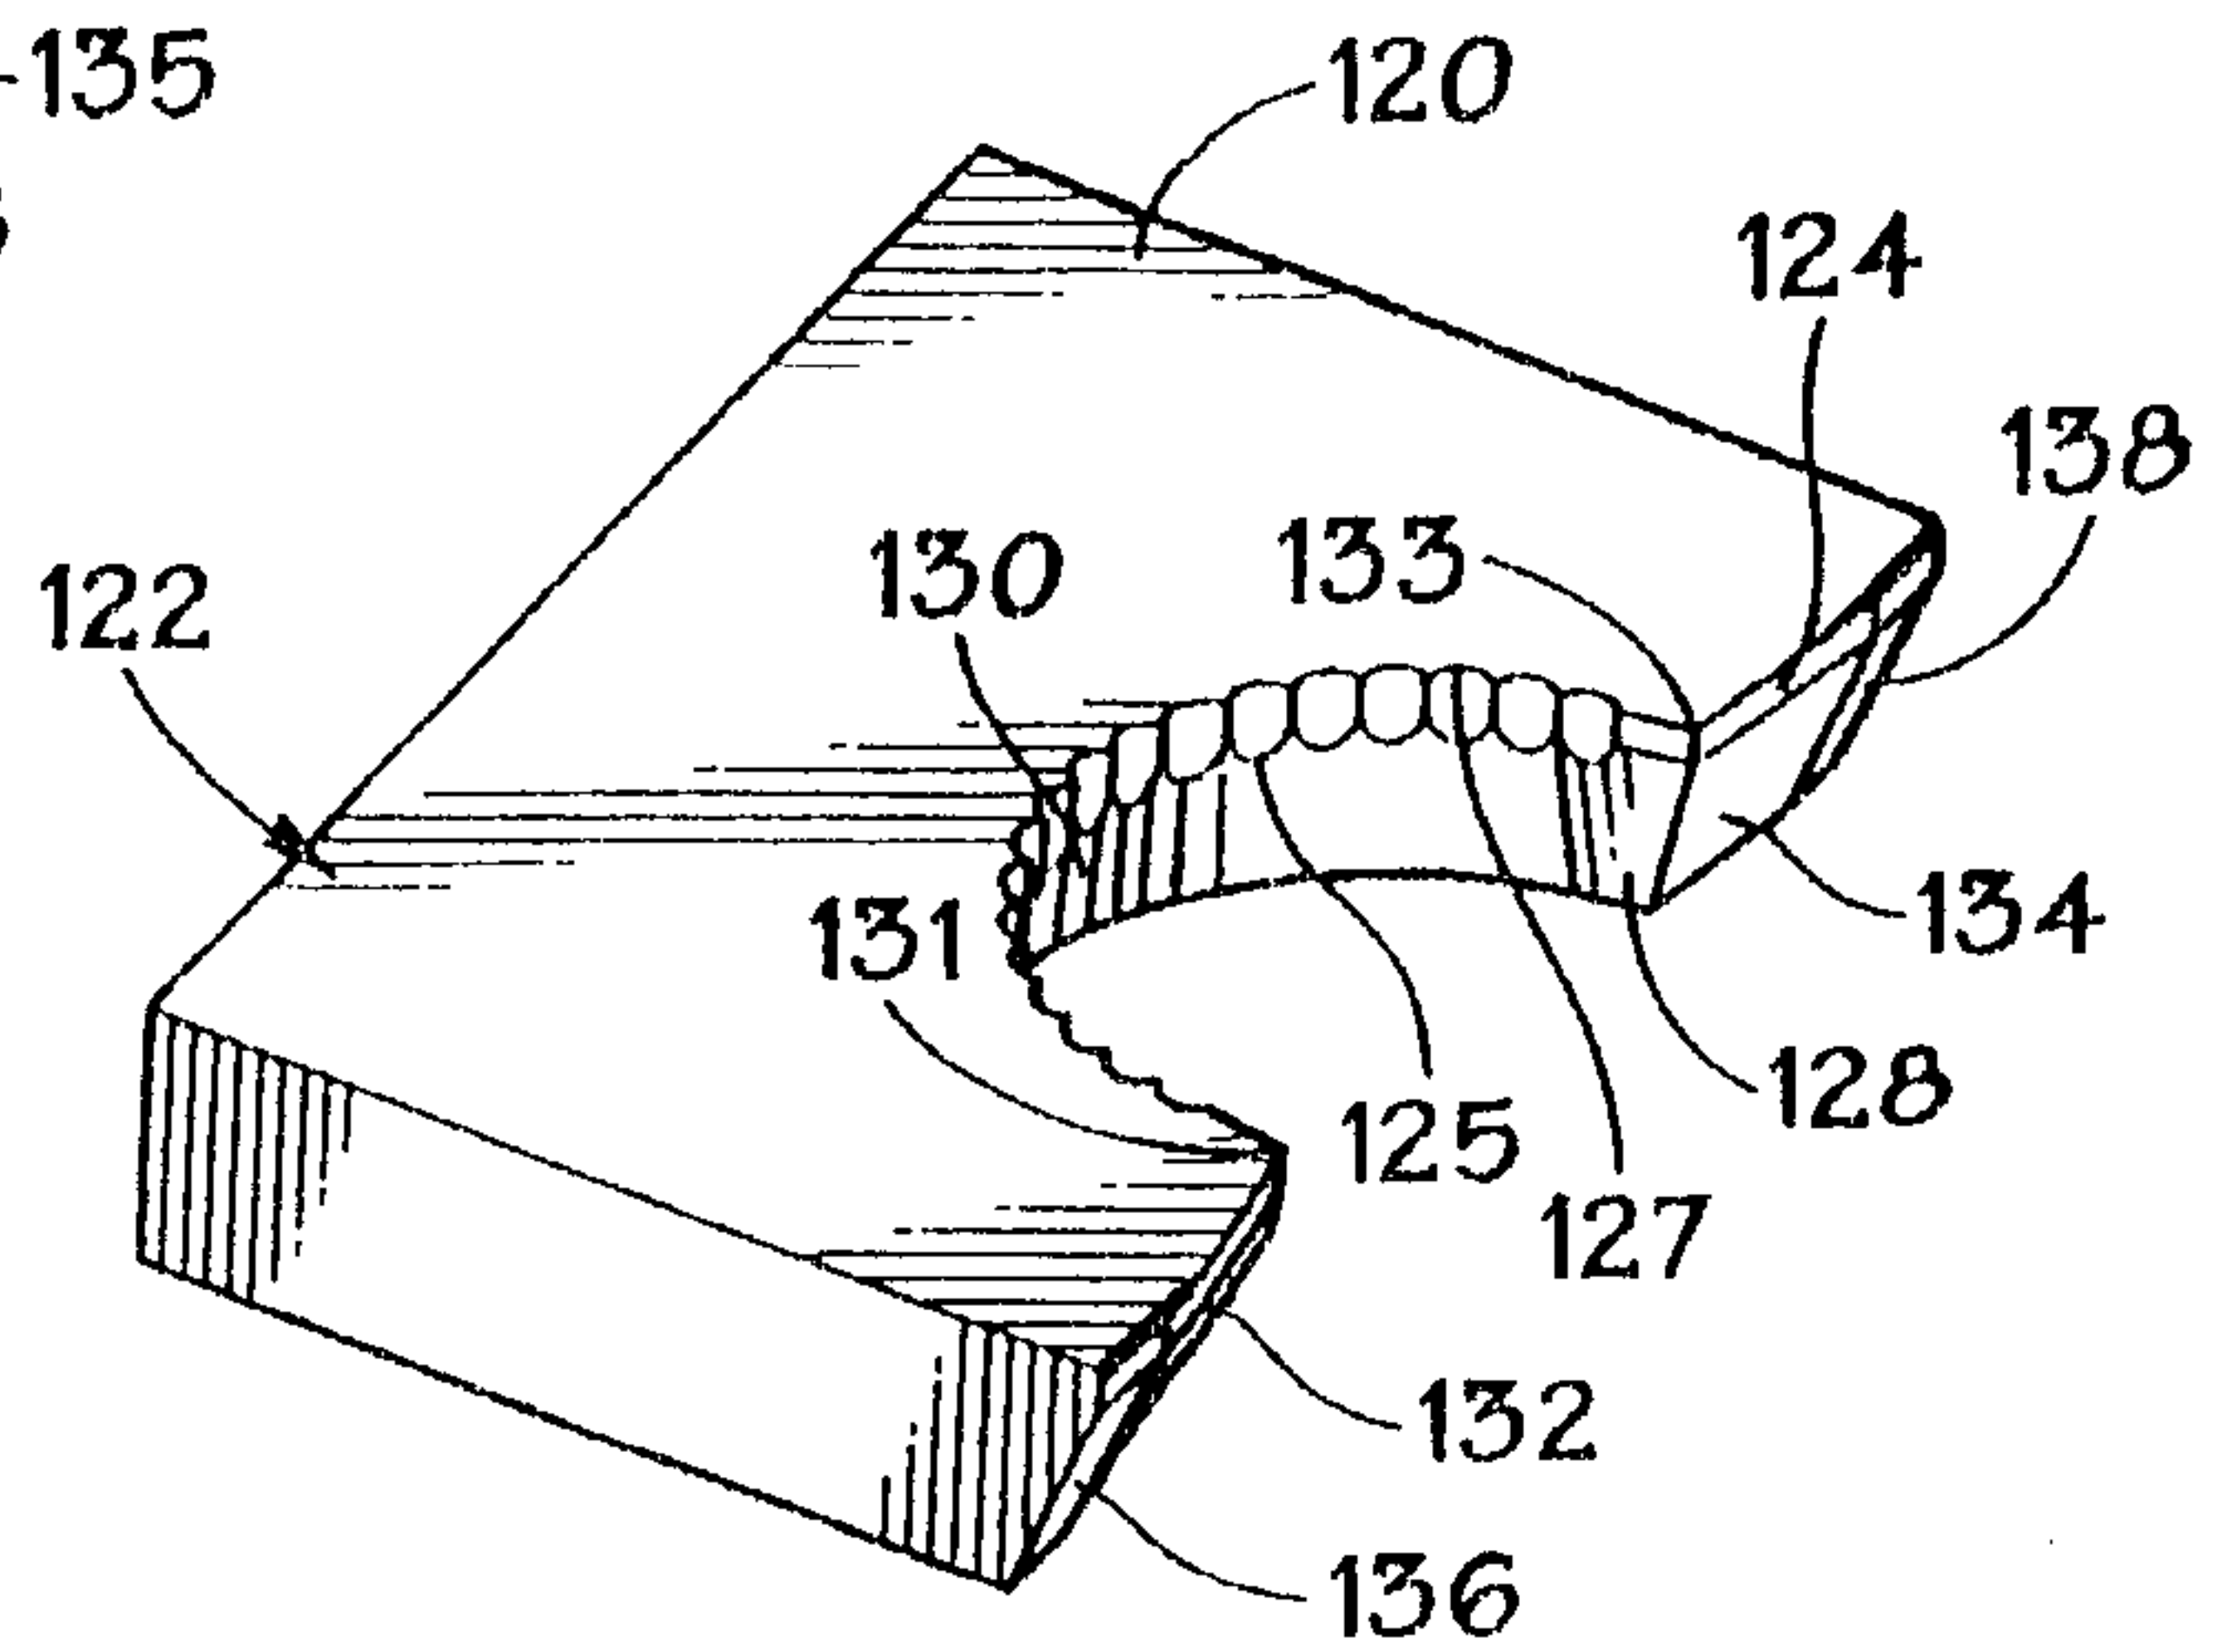
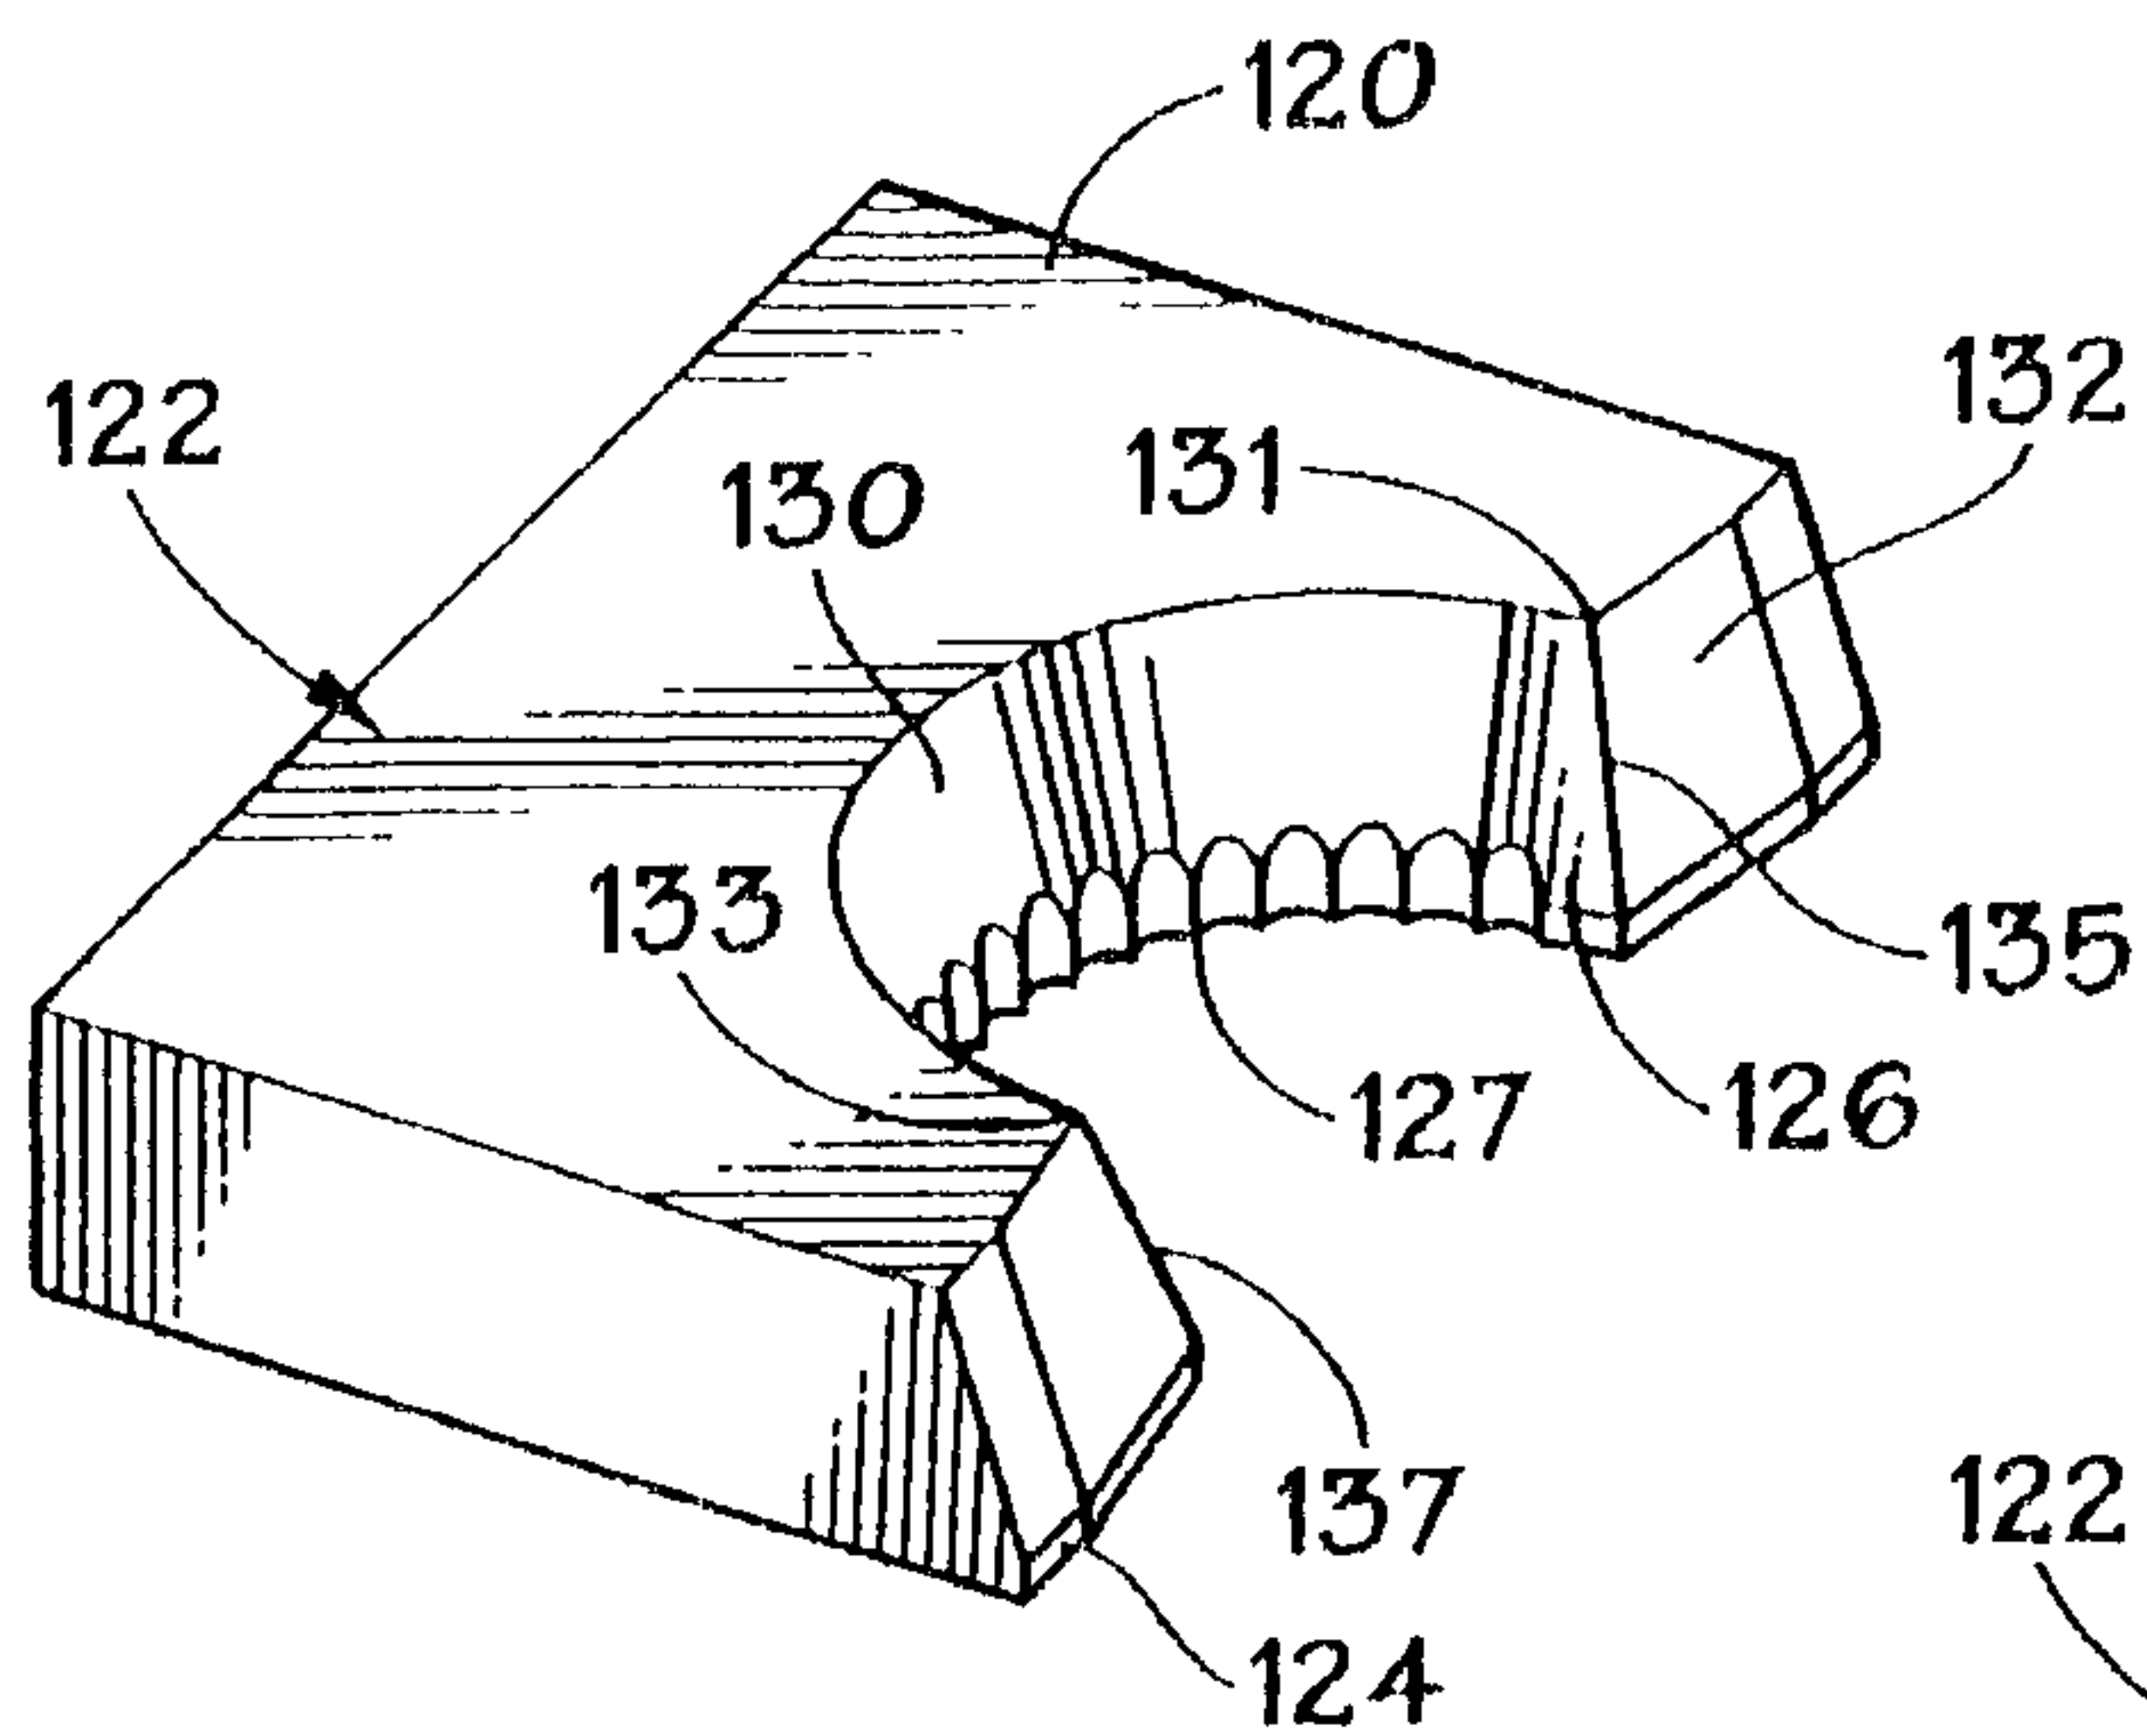
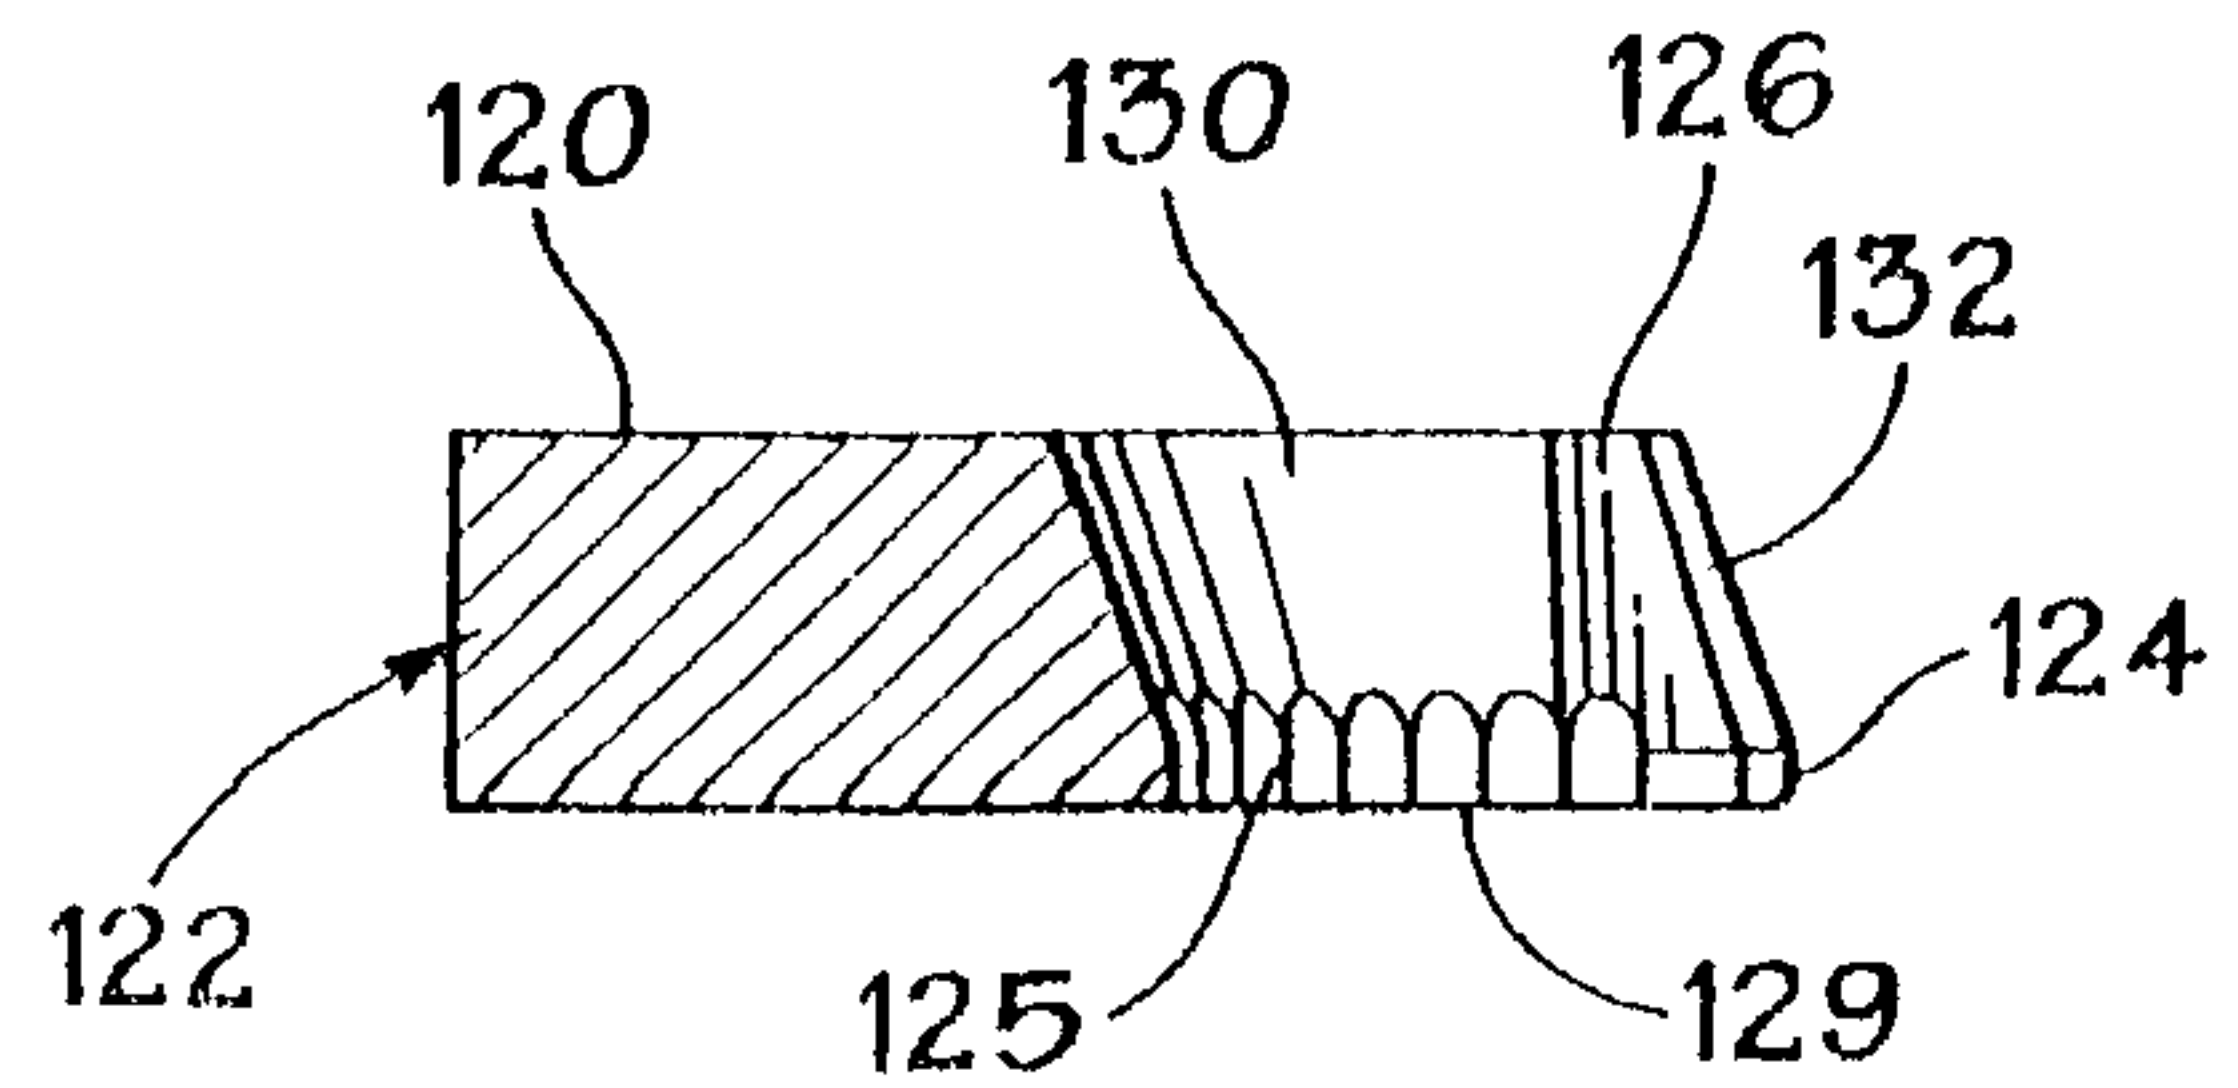
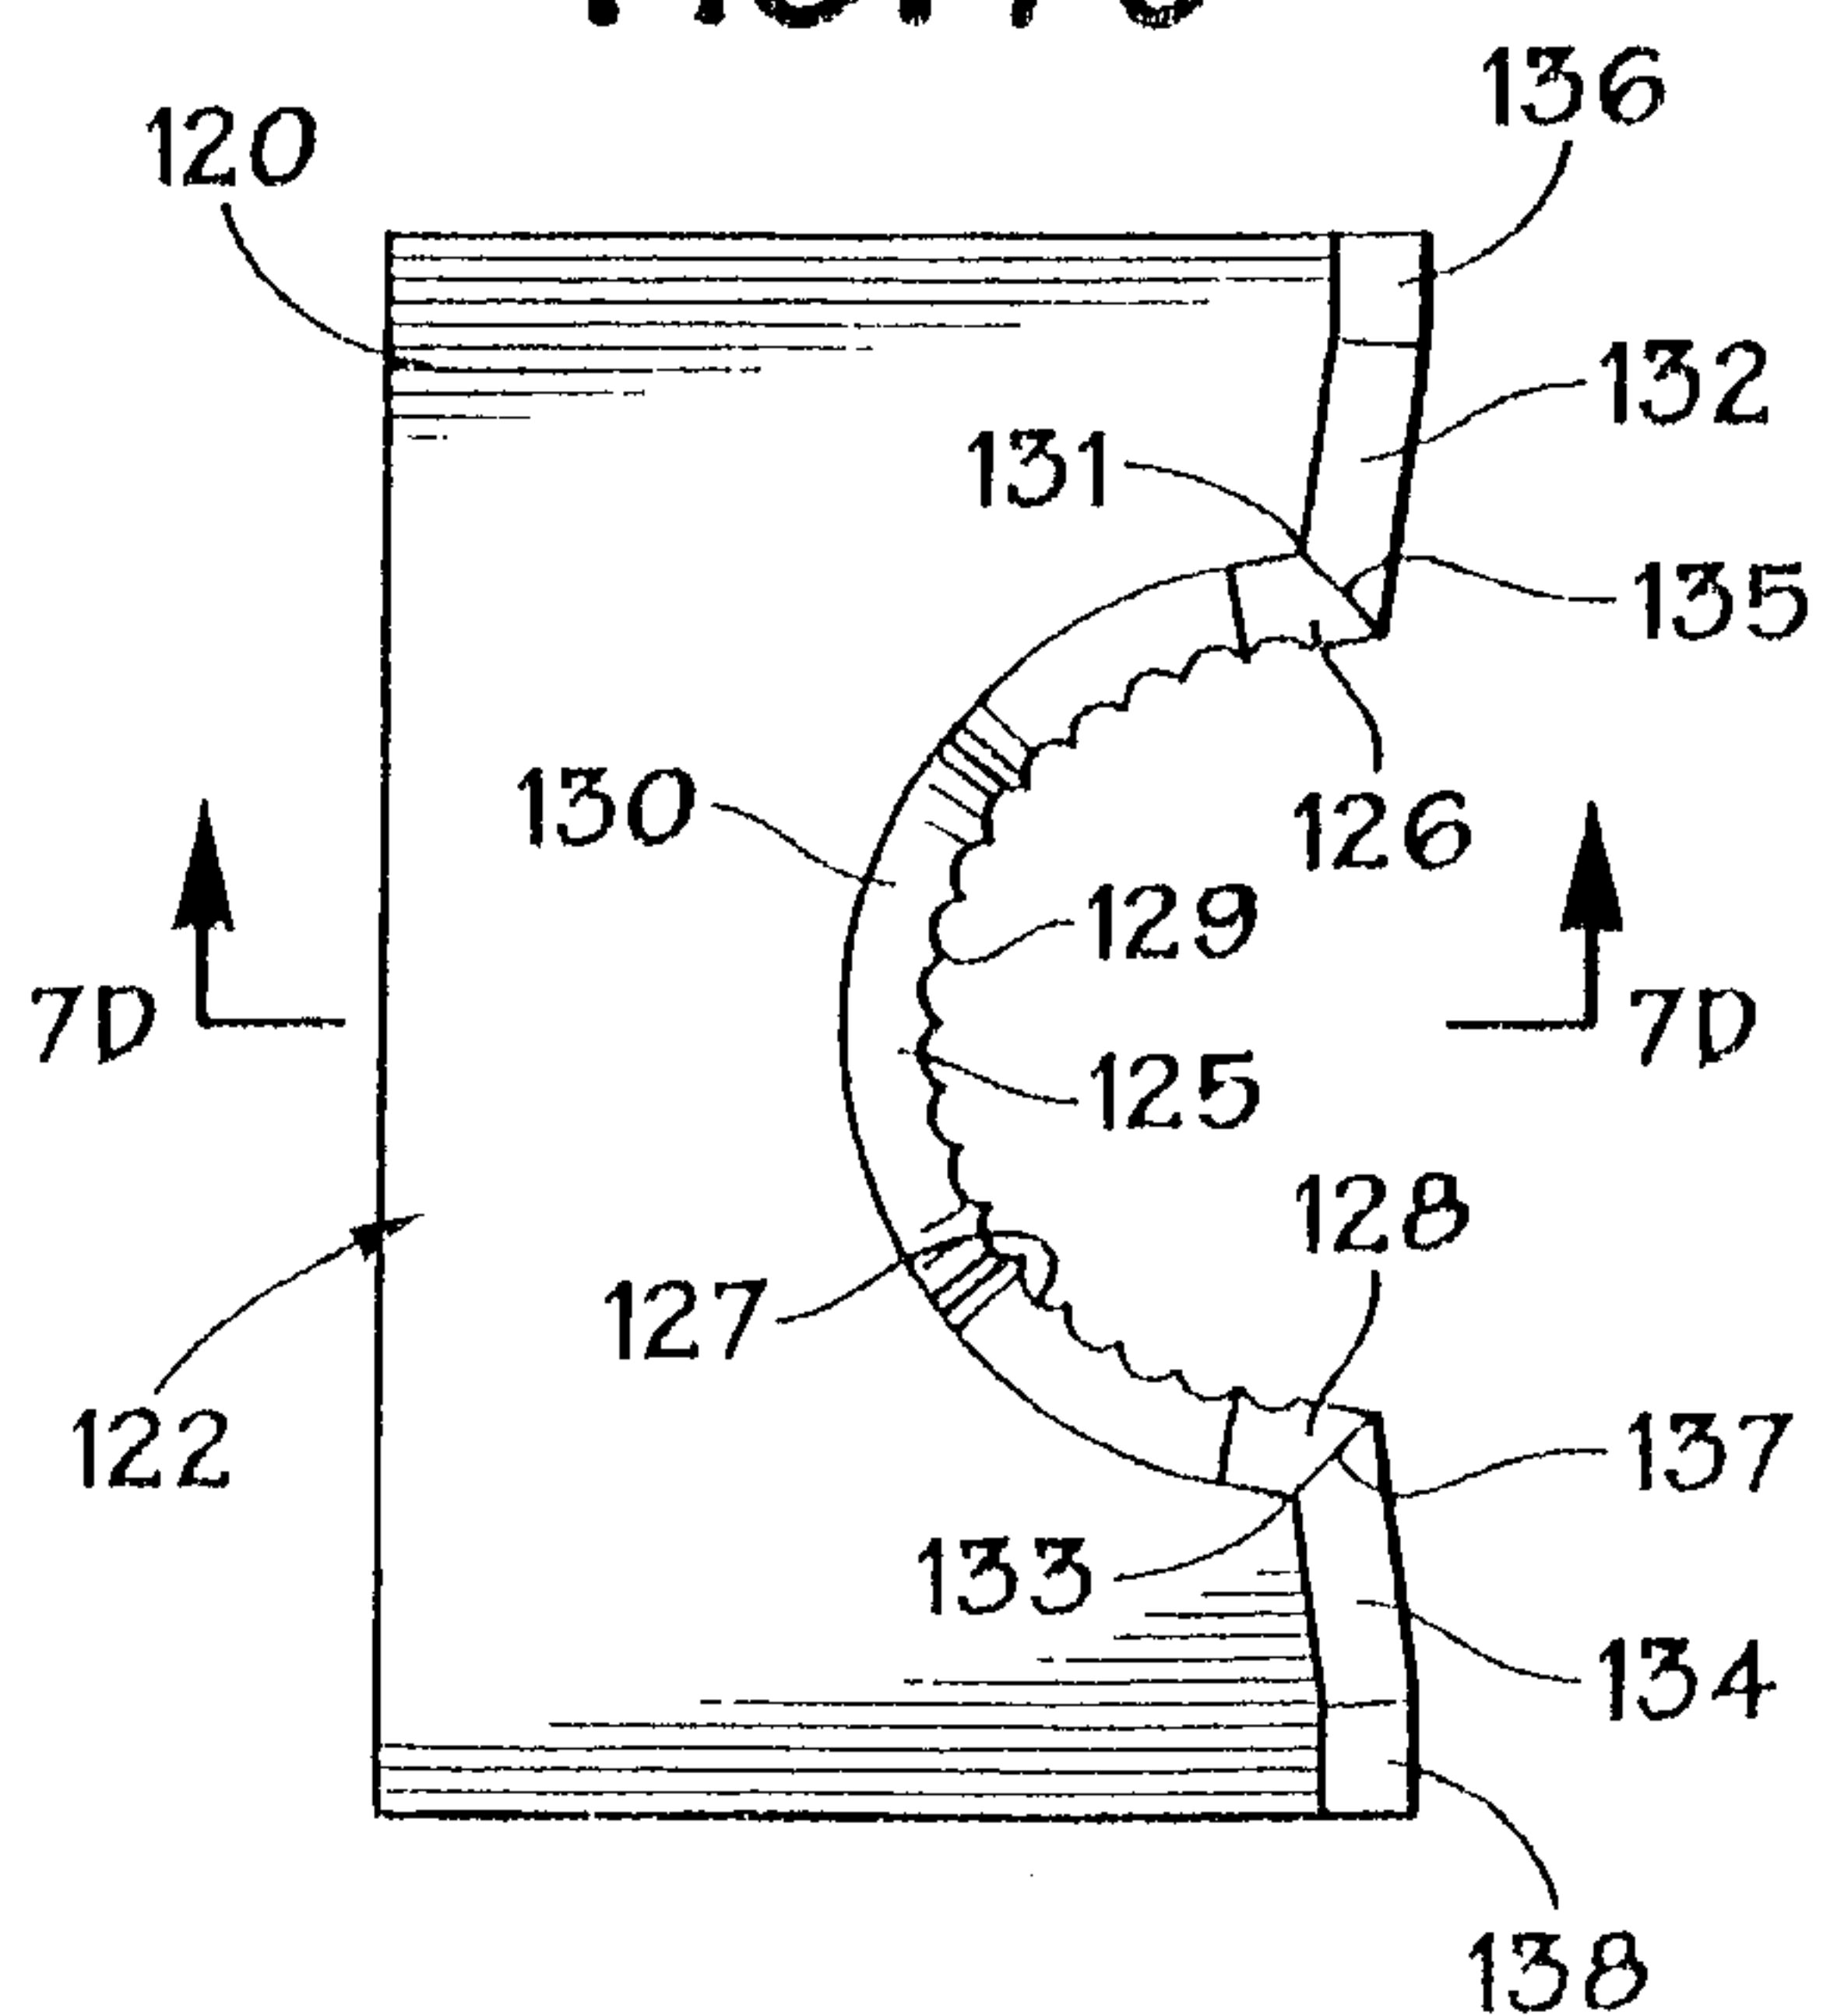
FIG. 6A**FIG. 6B****FIG. 6C****FIG. 6D**

FIG. 7A**FIG. 7B****FIG. 7C****FIG. 7D**

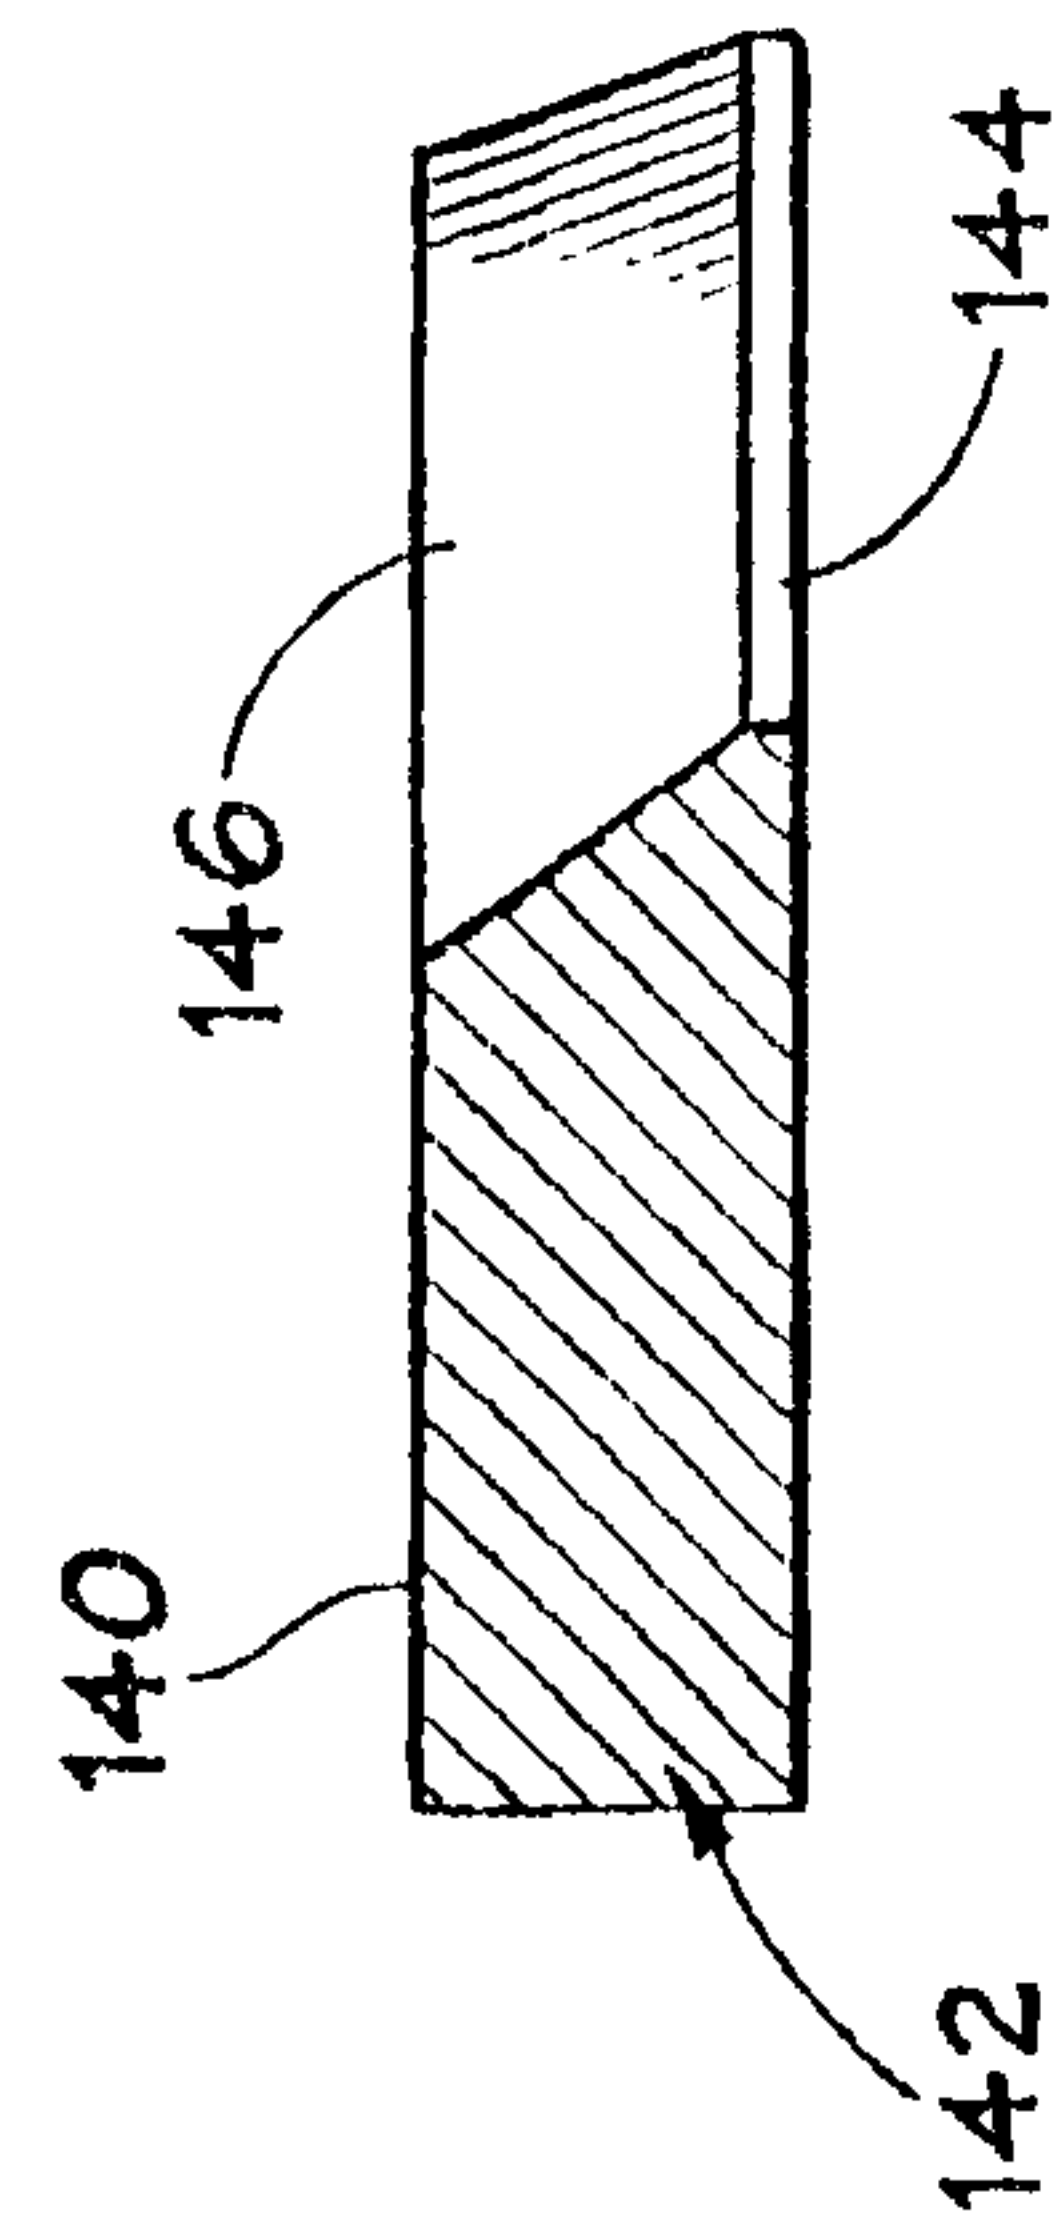
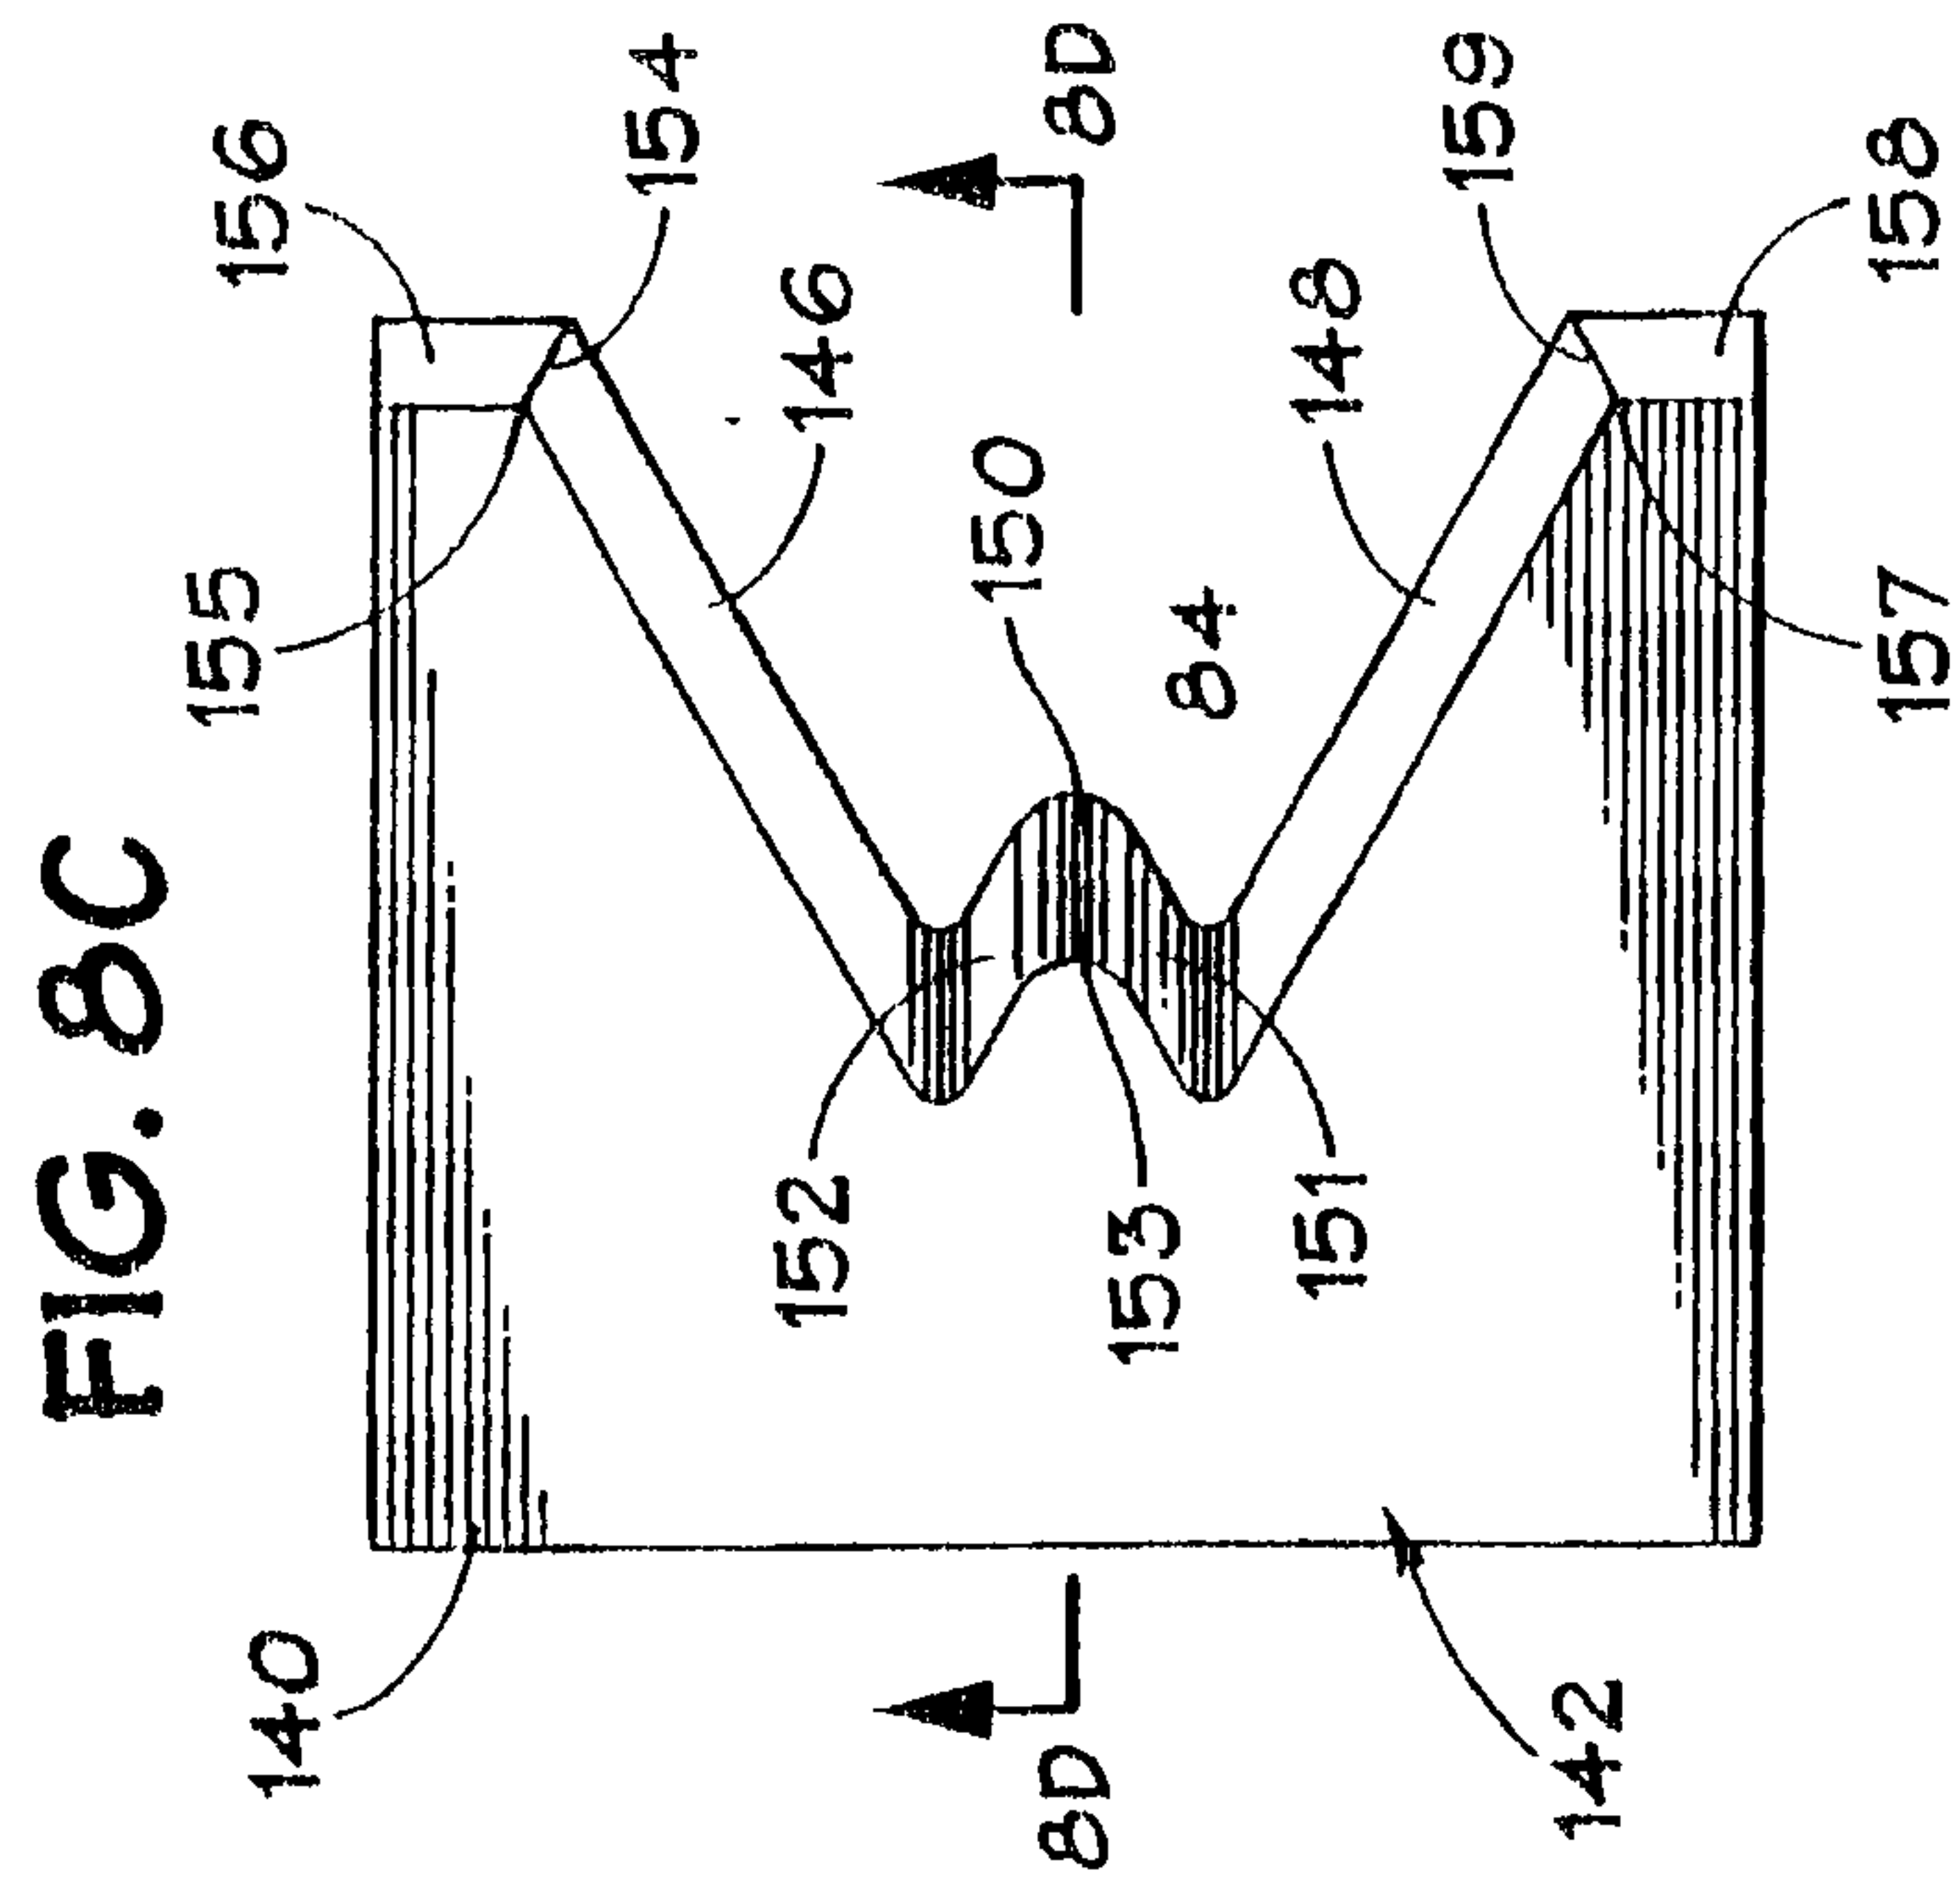
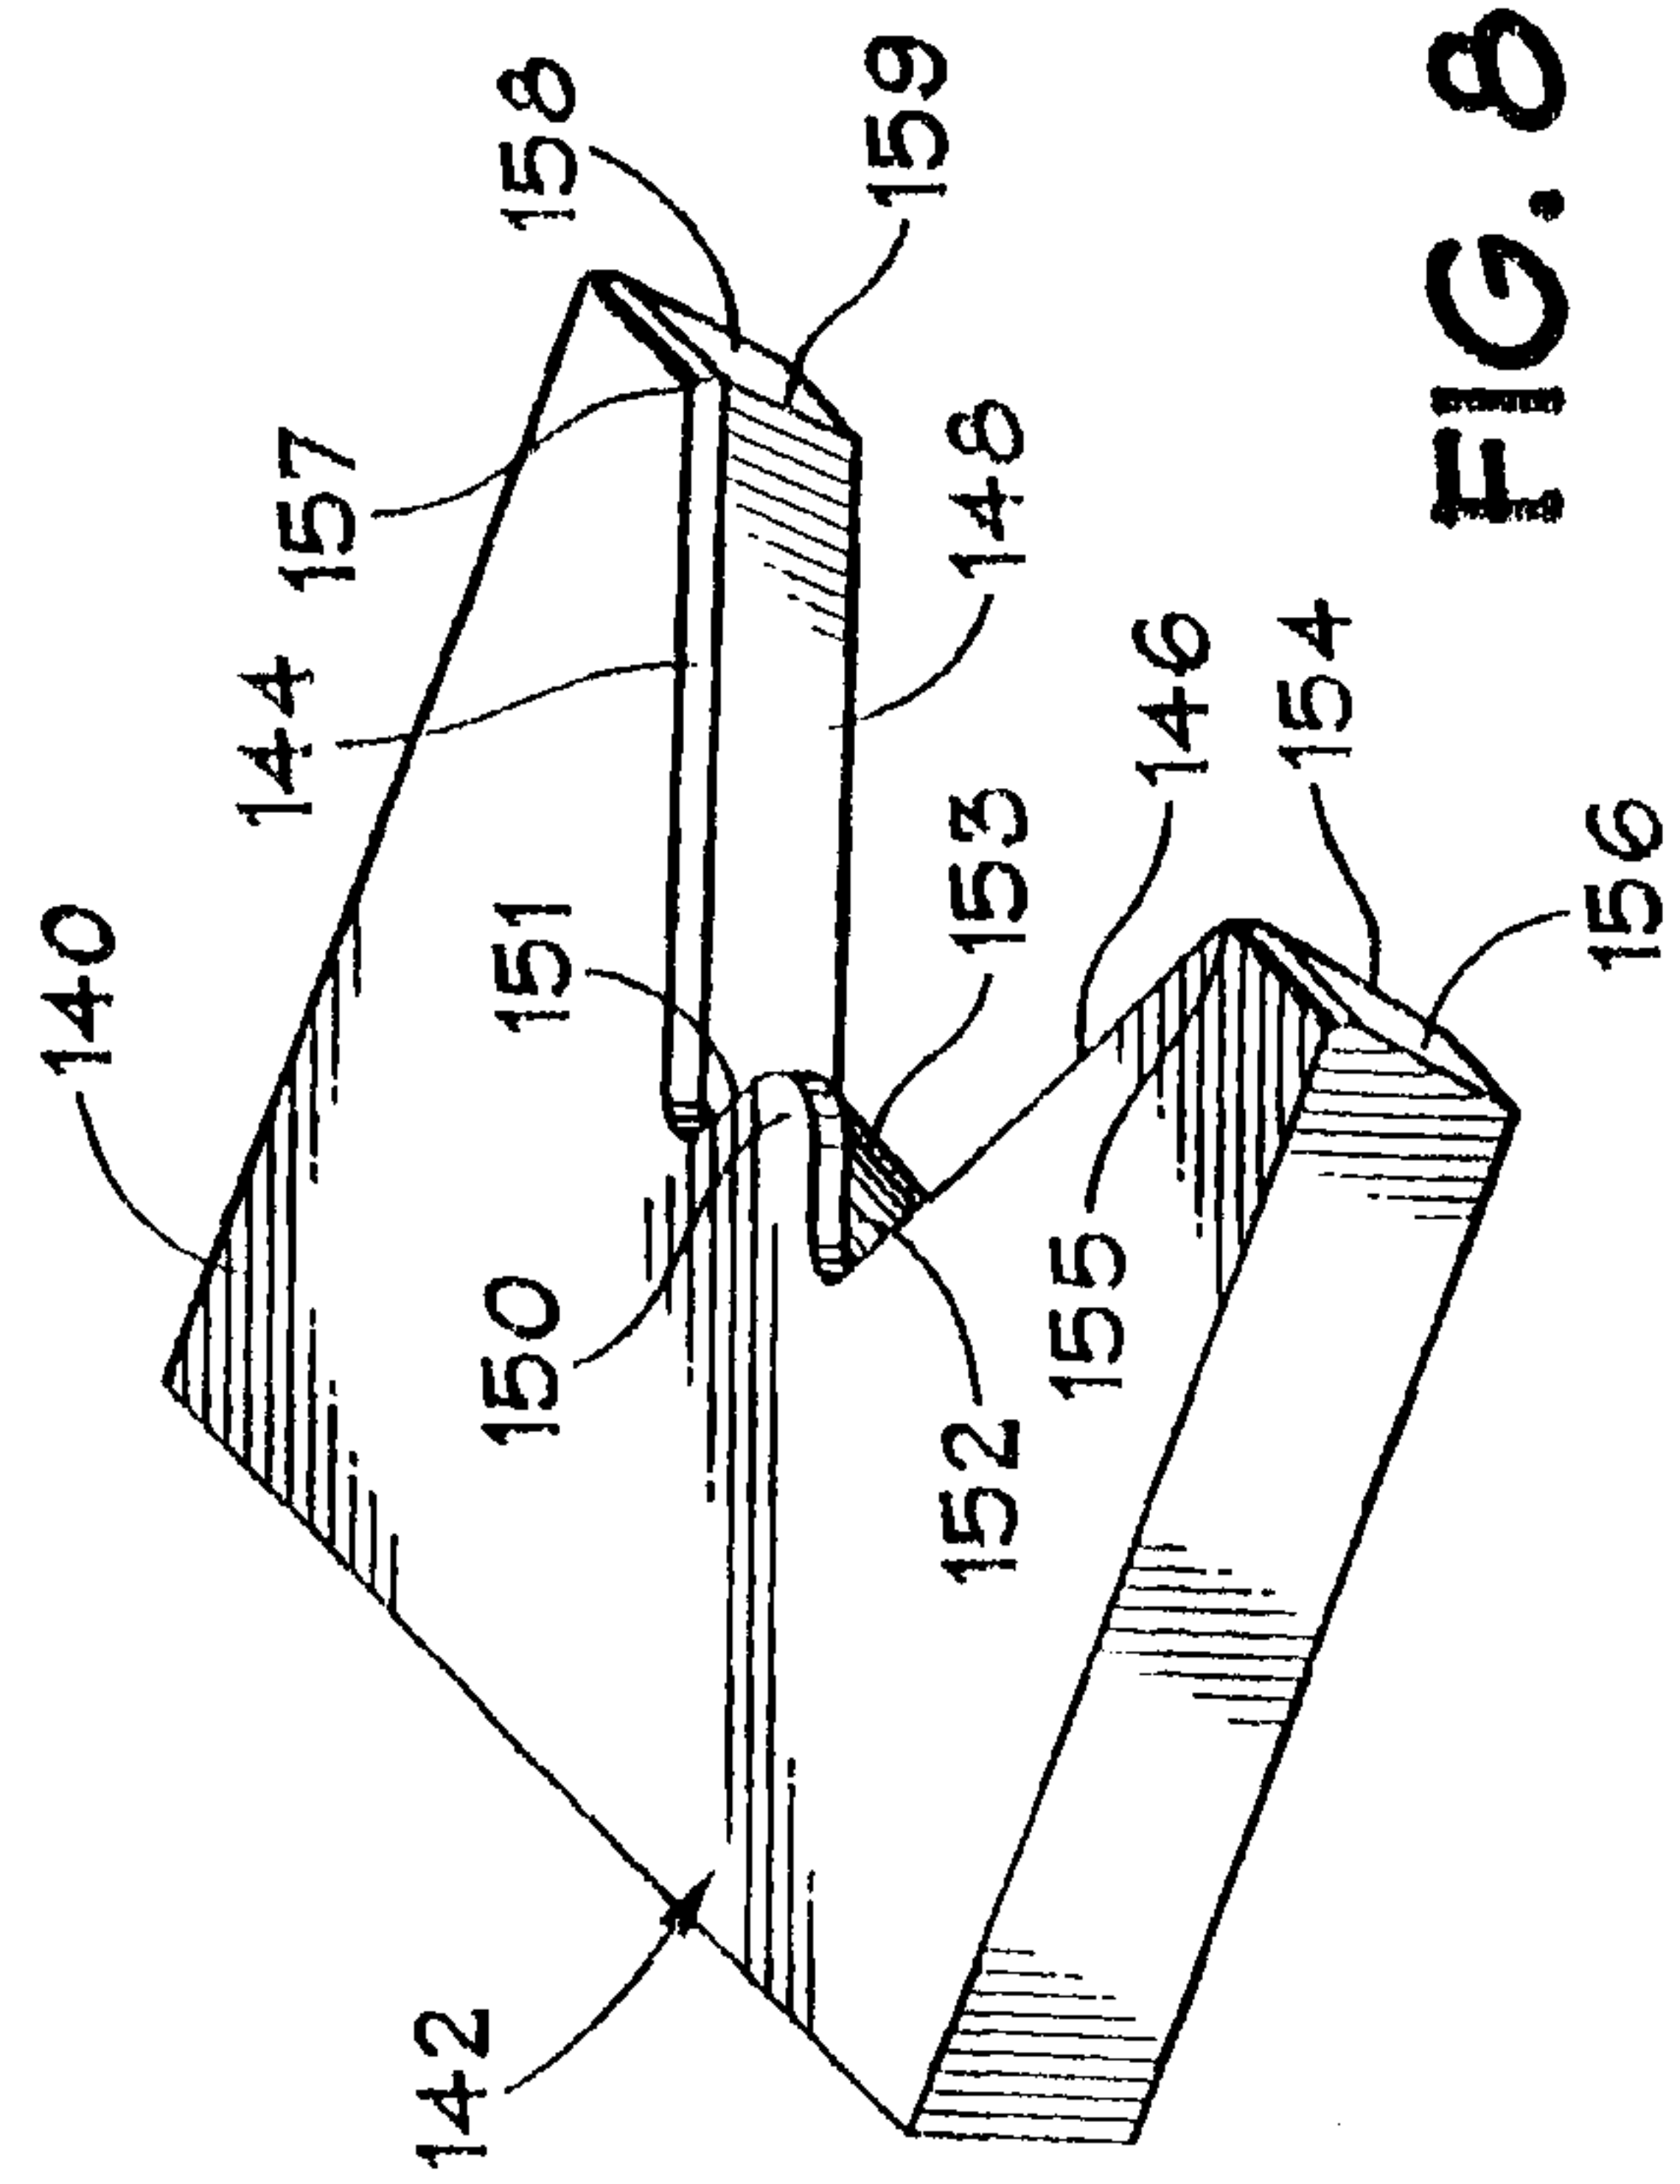
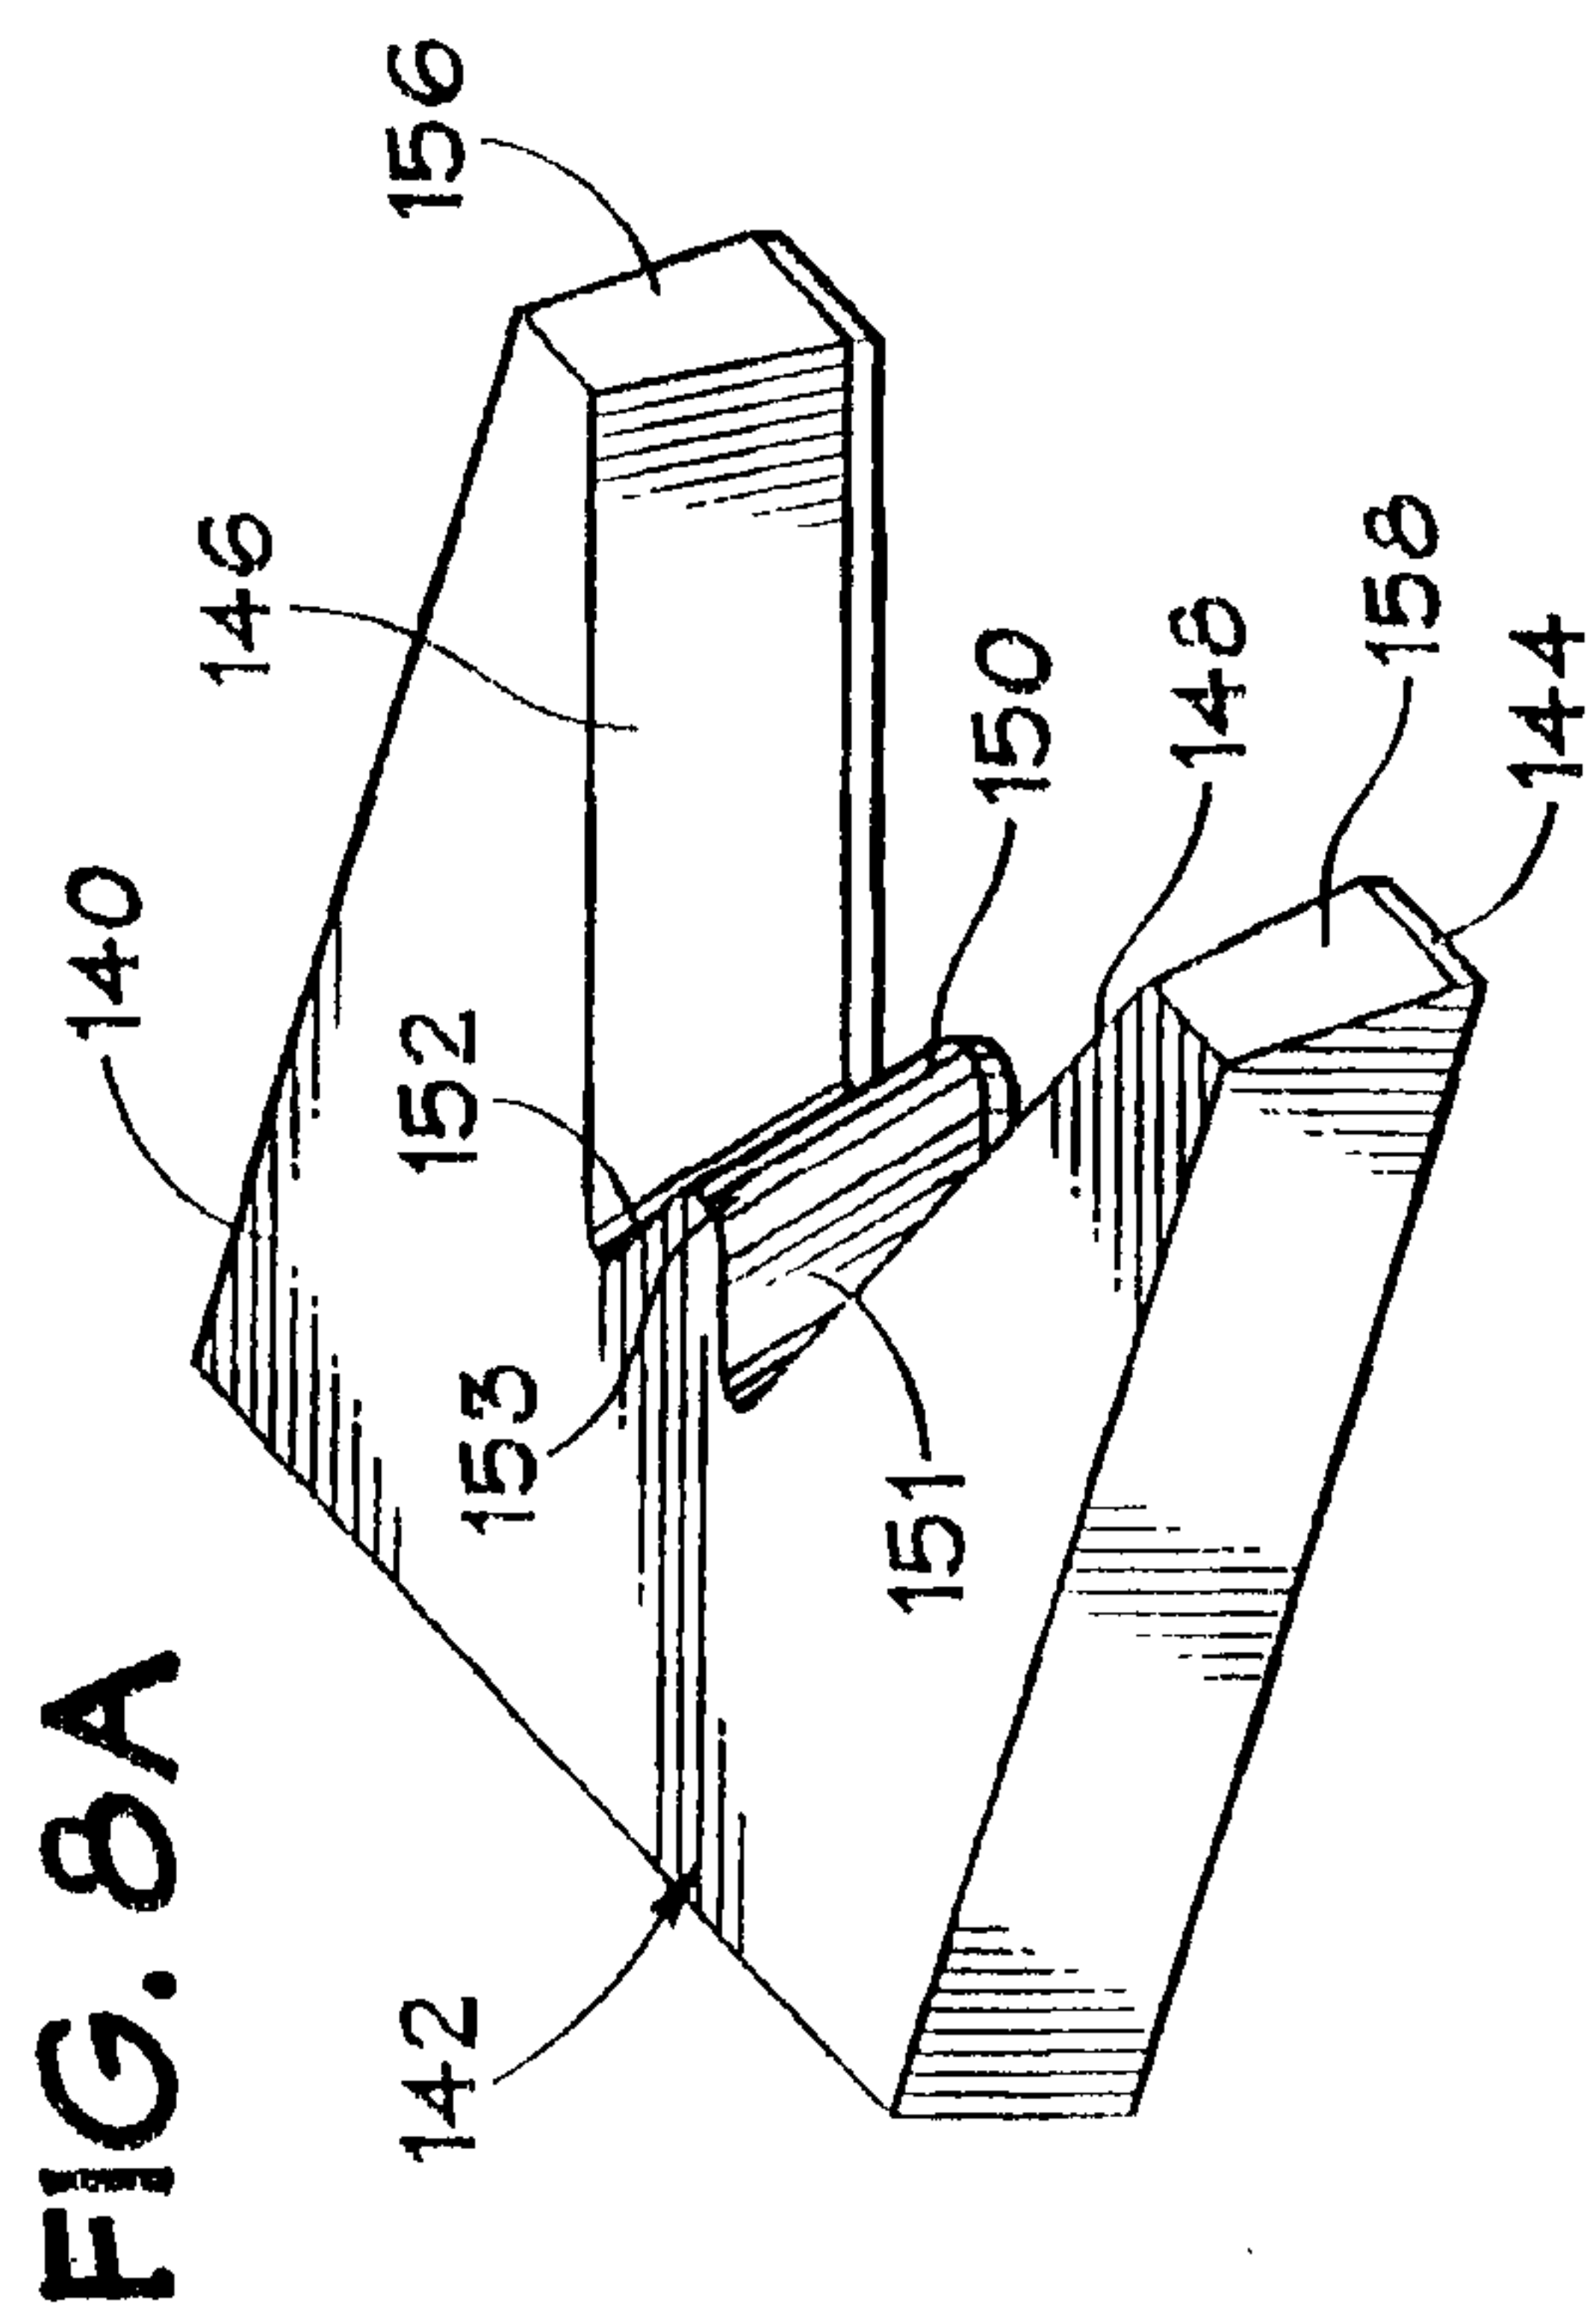
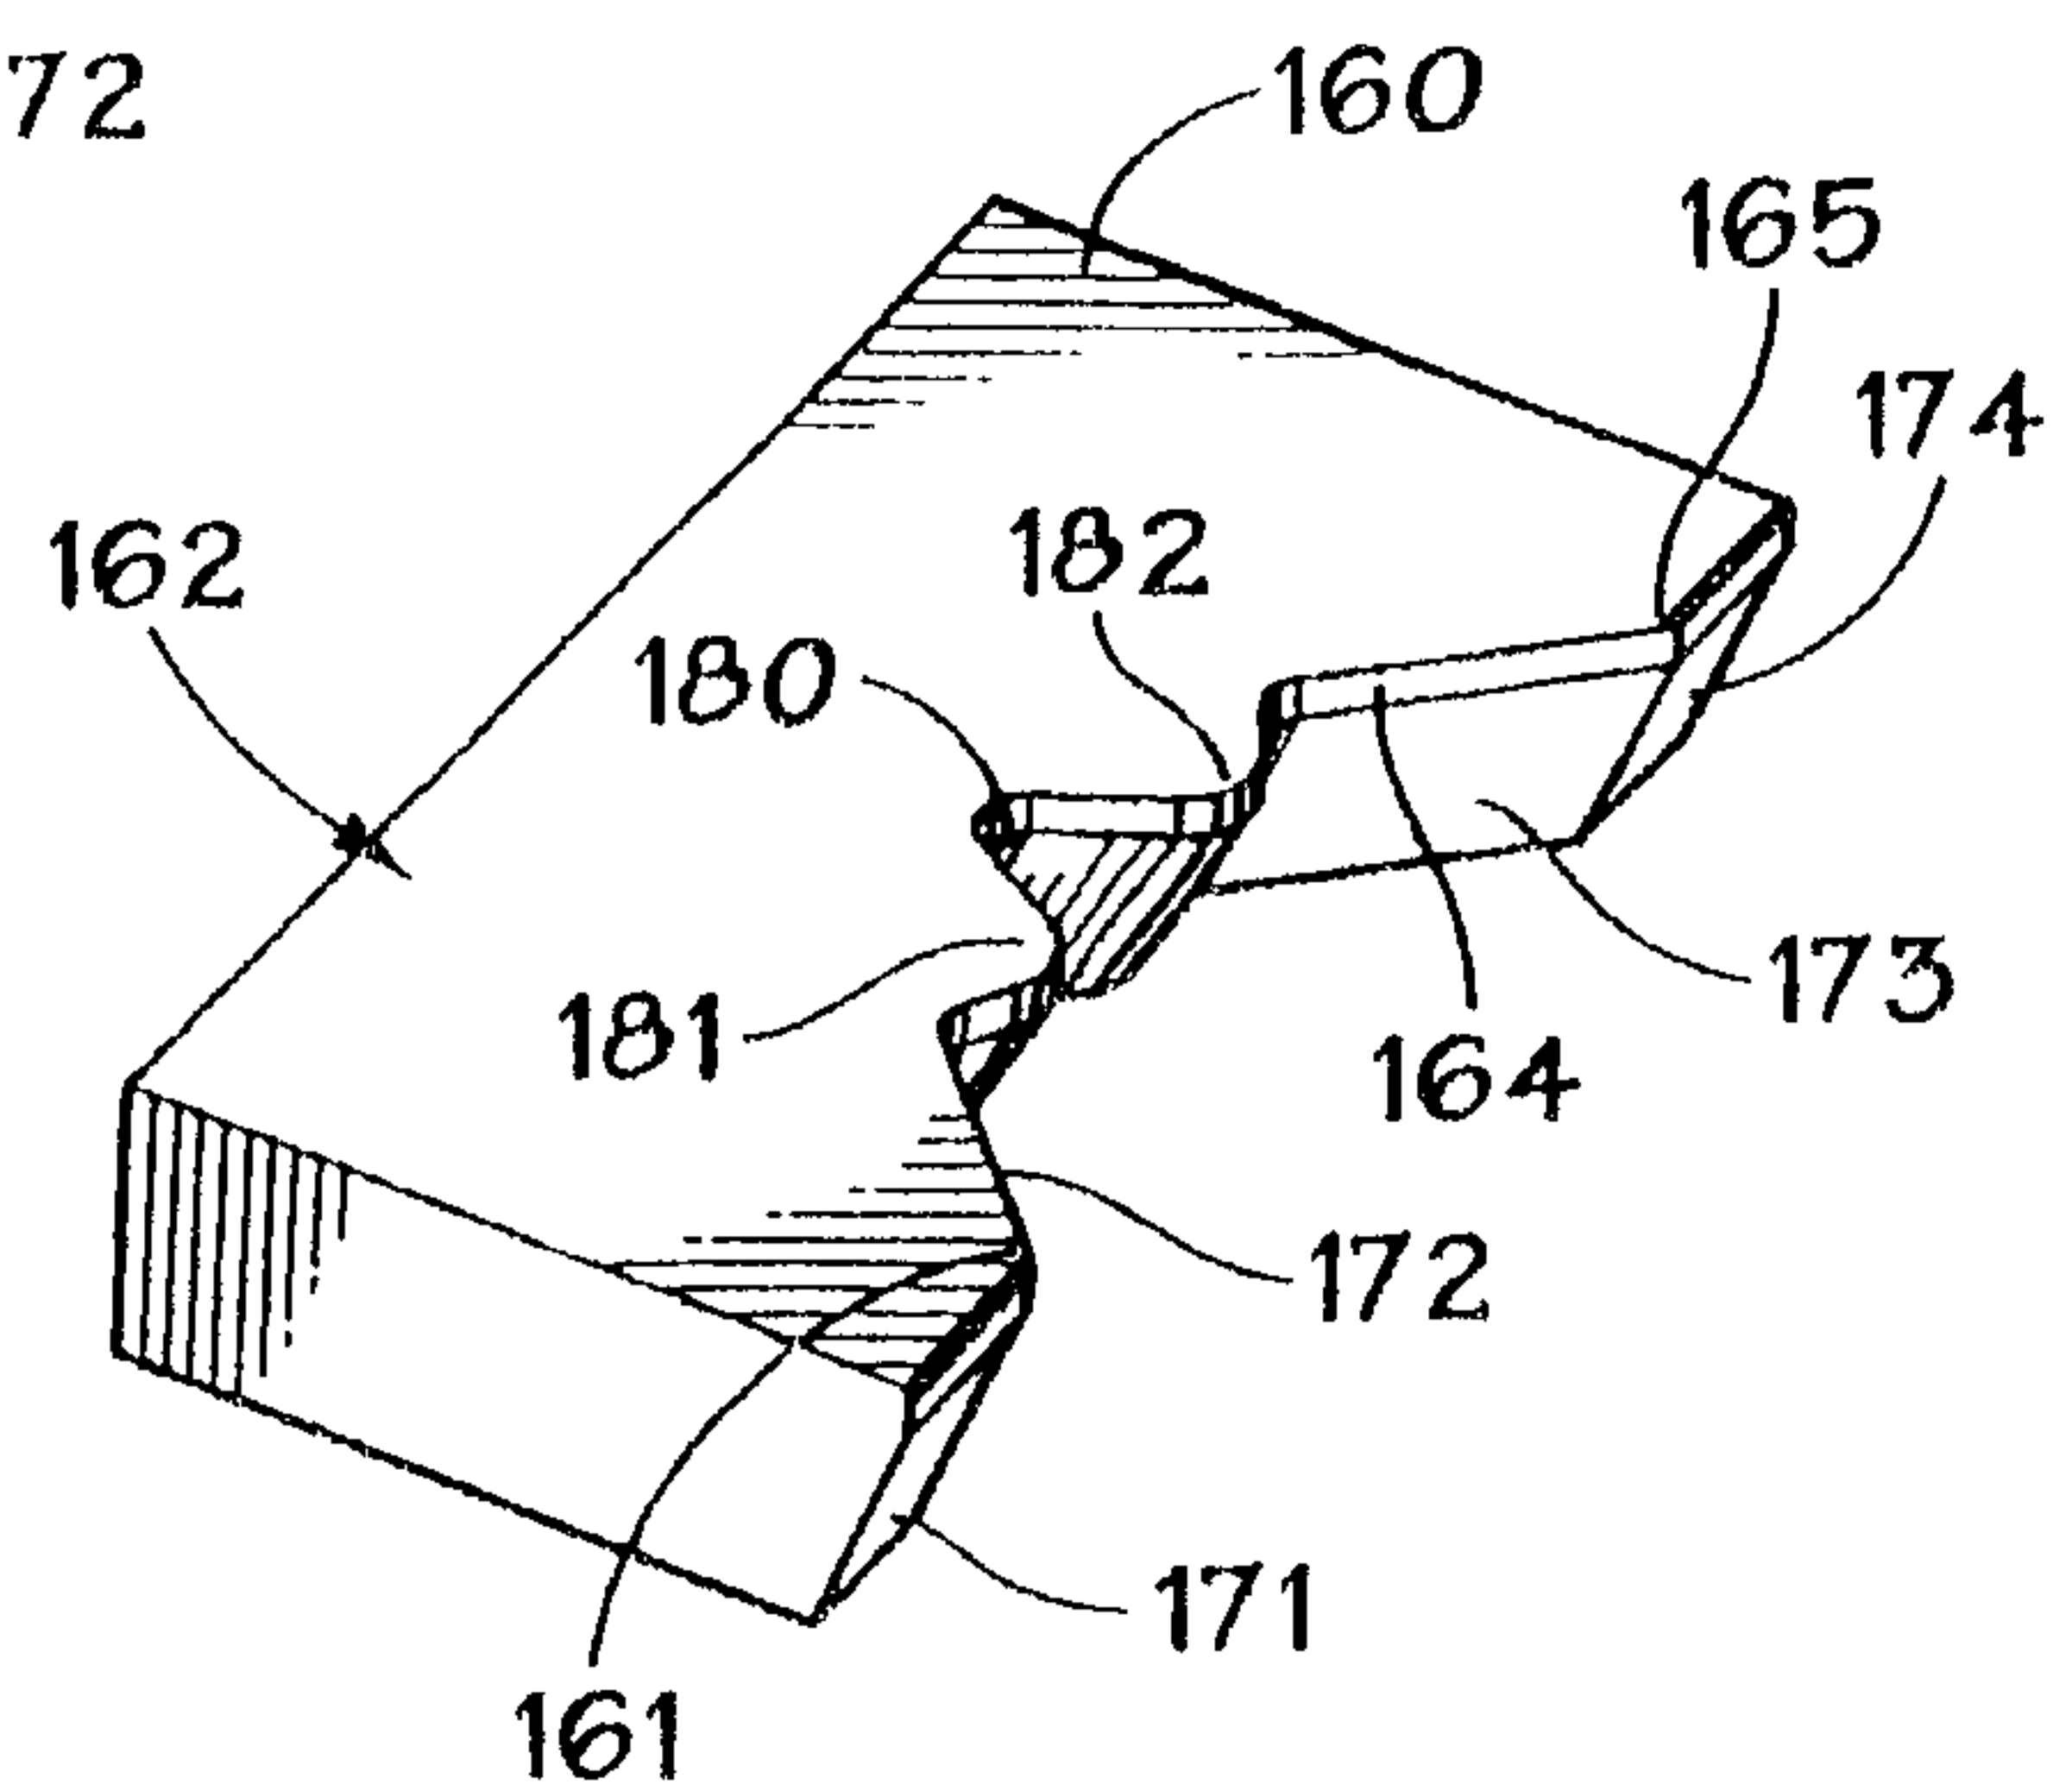
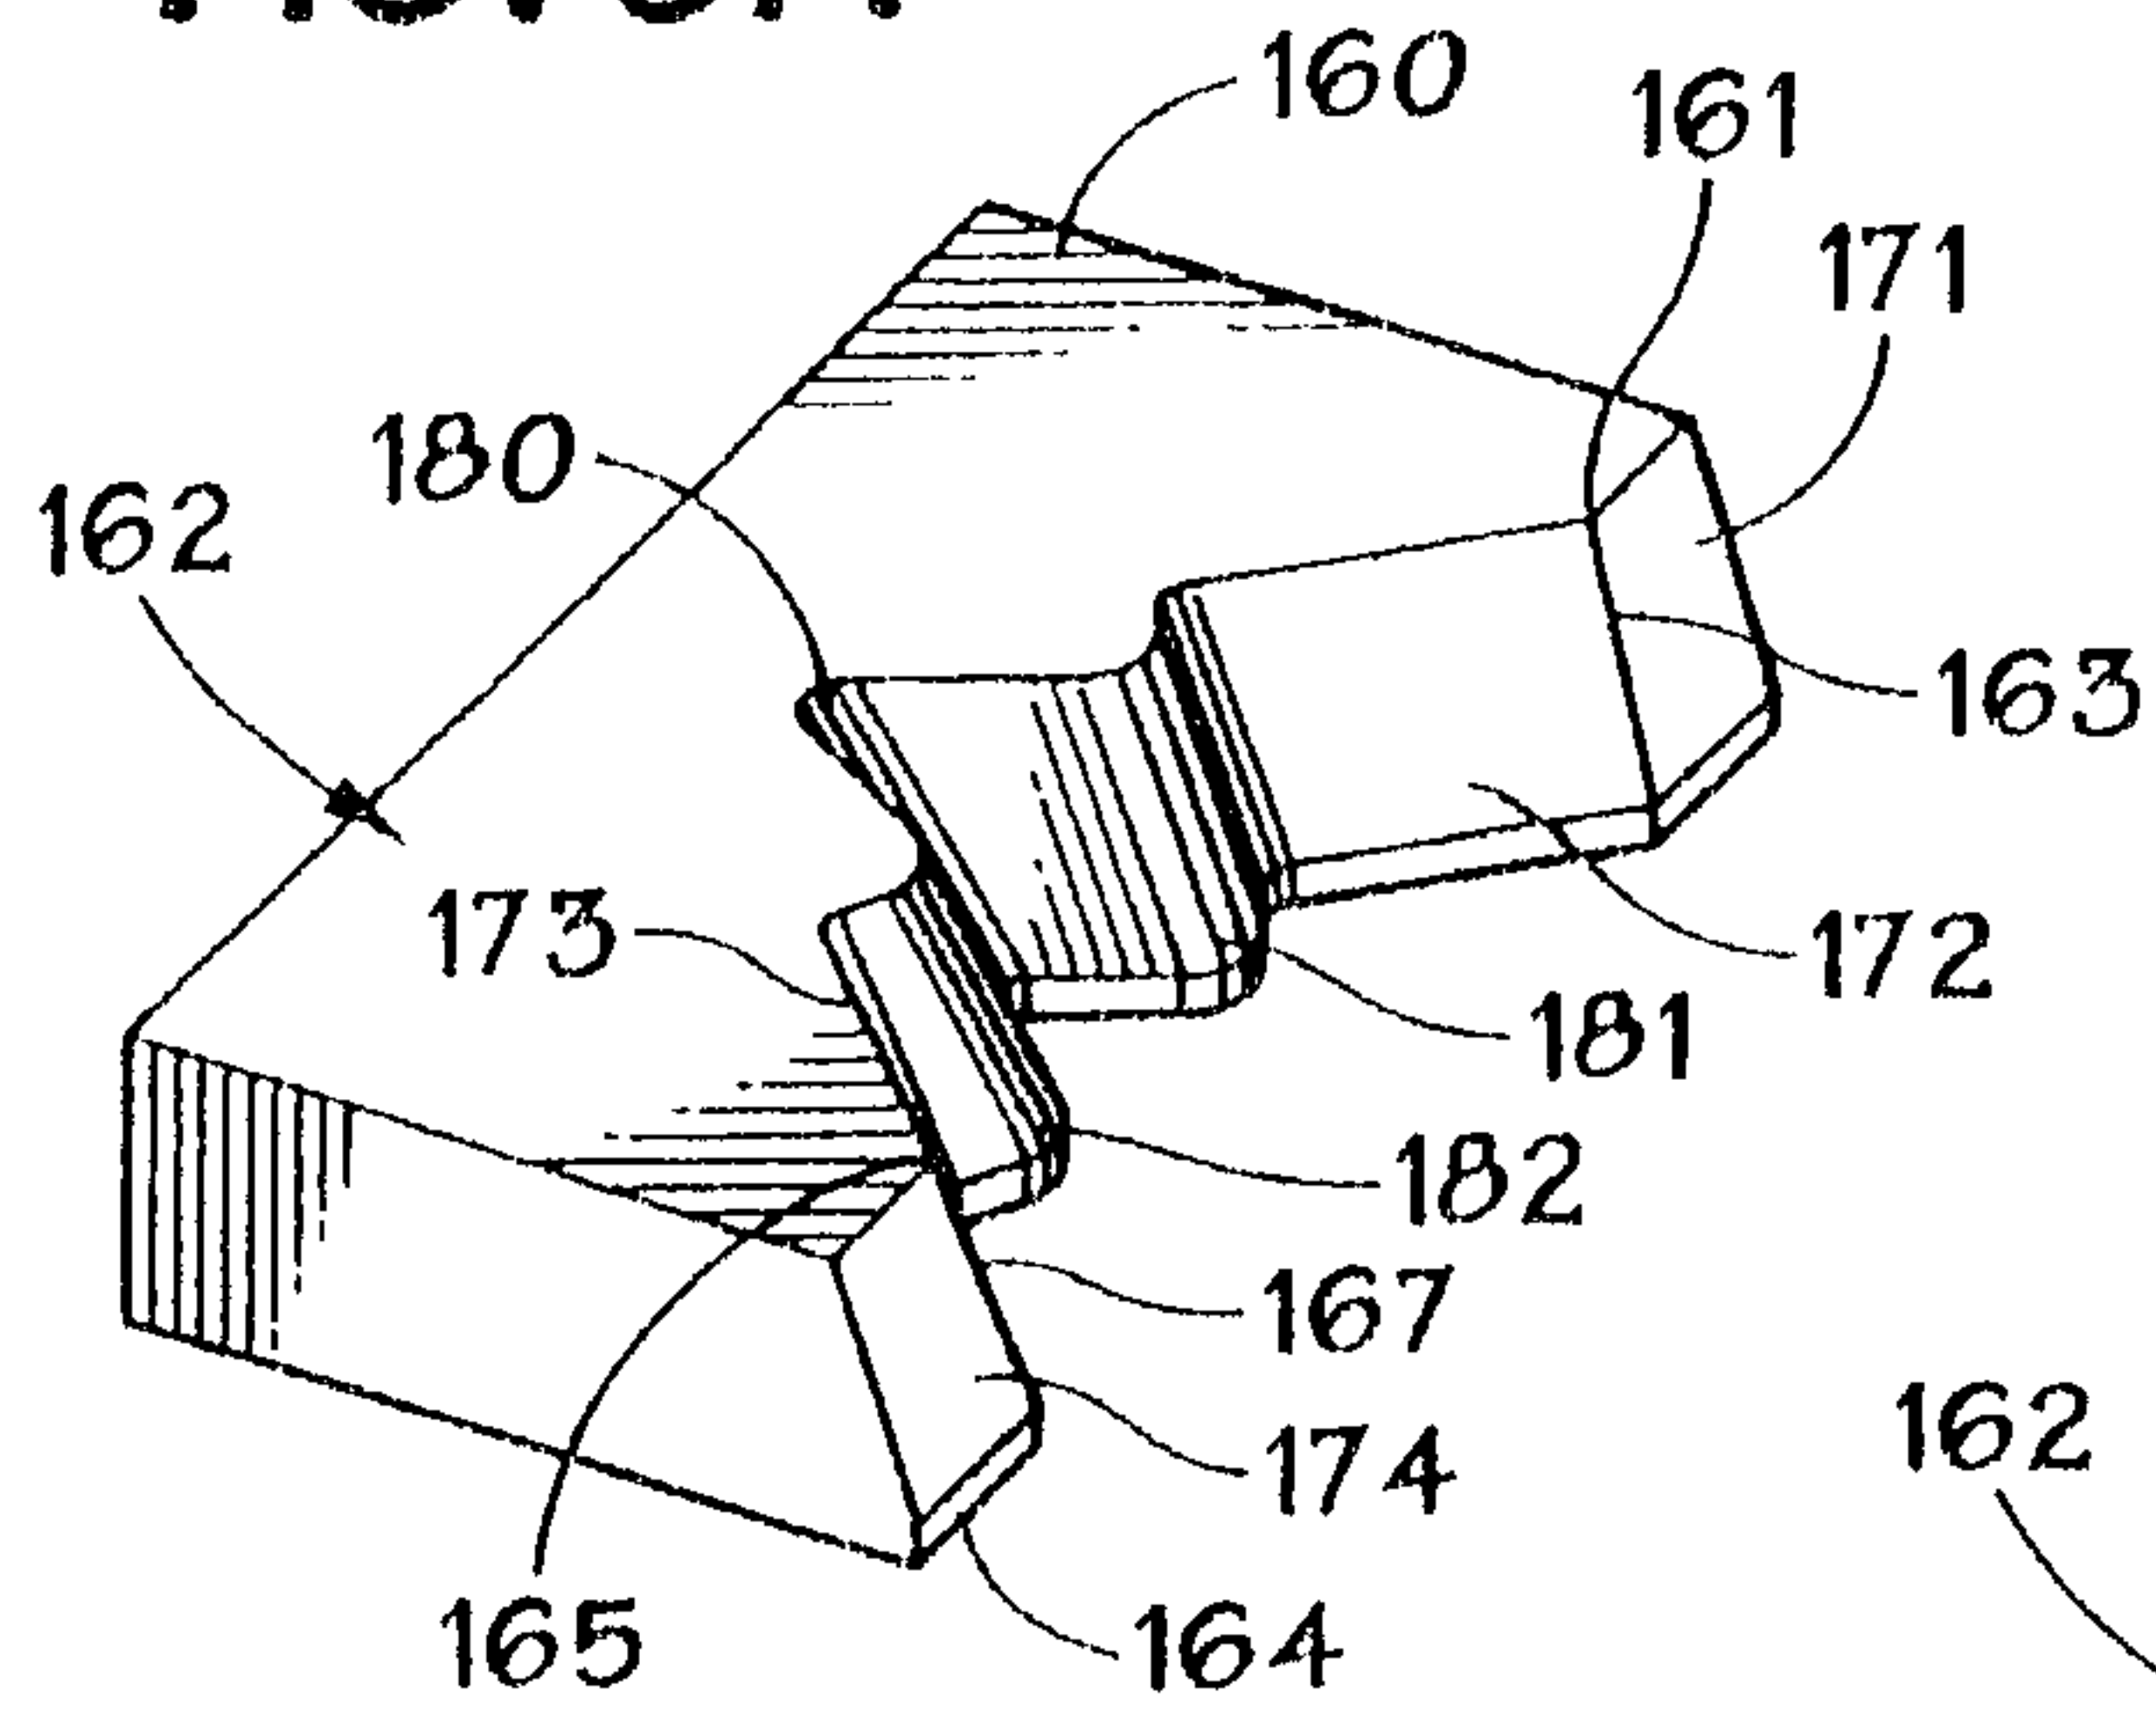
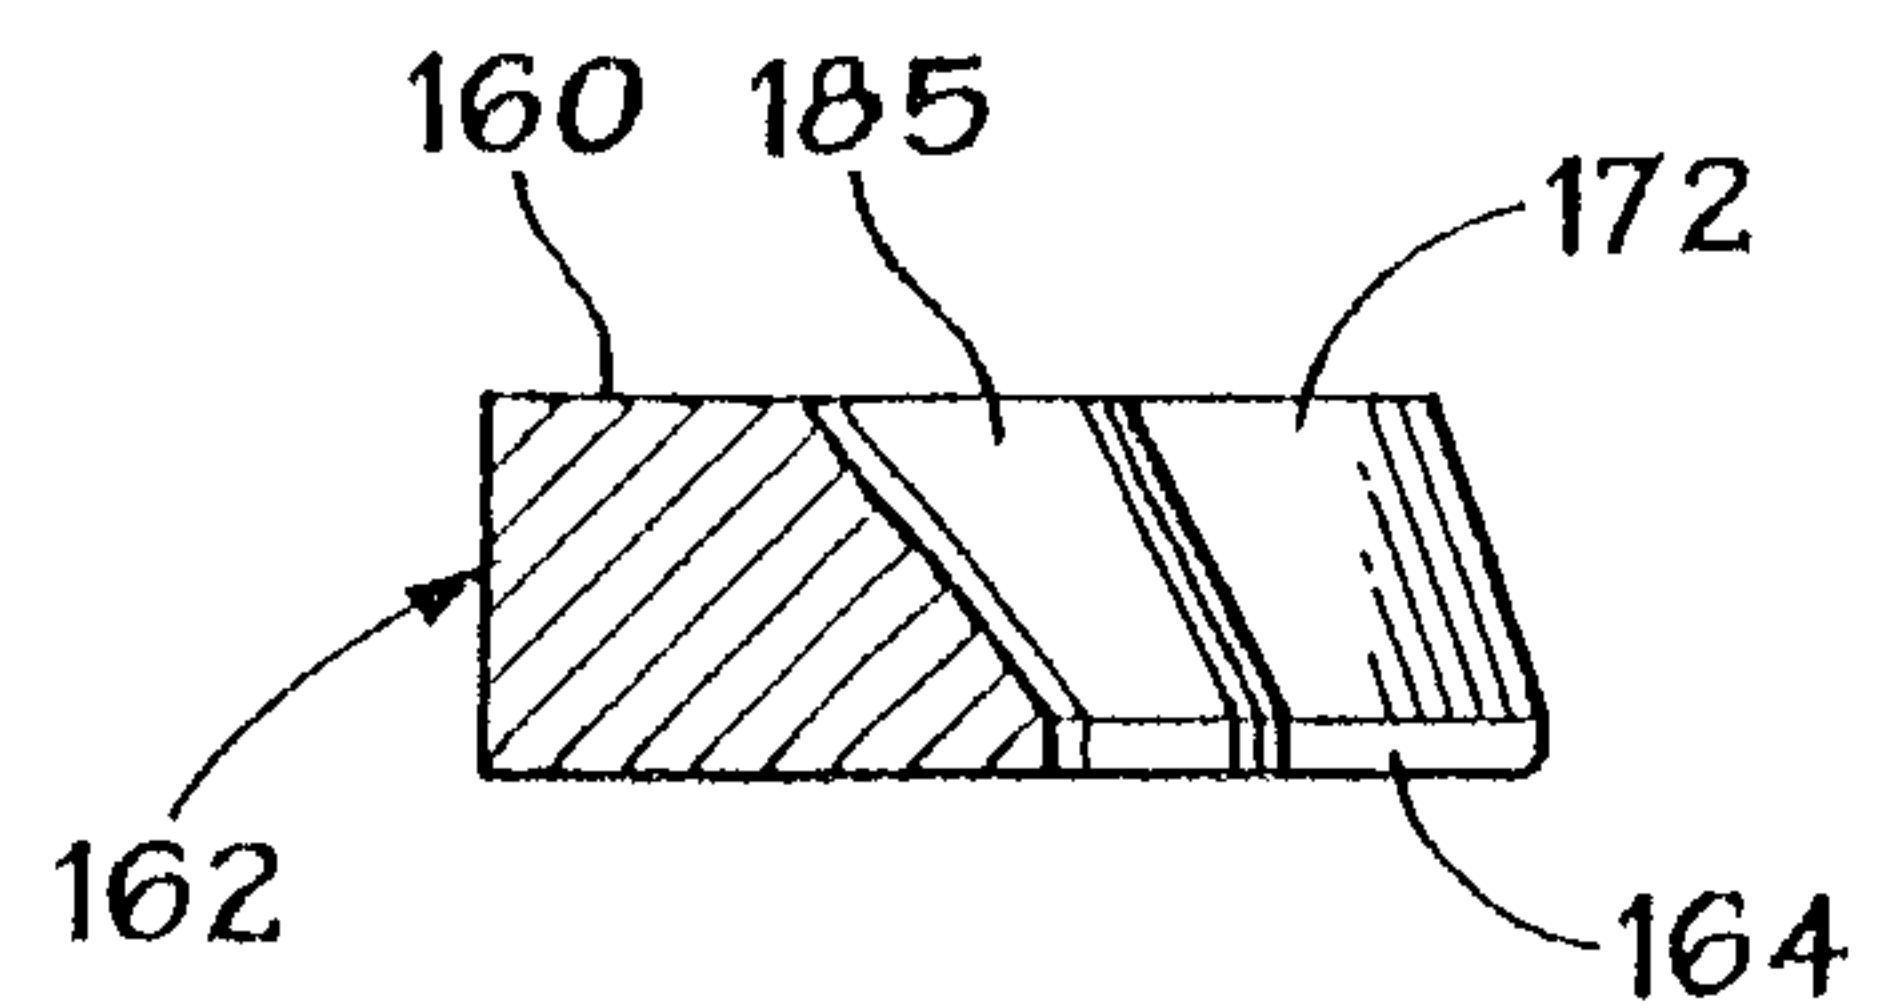
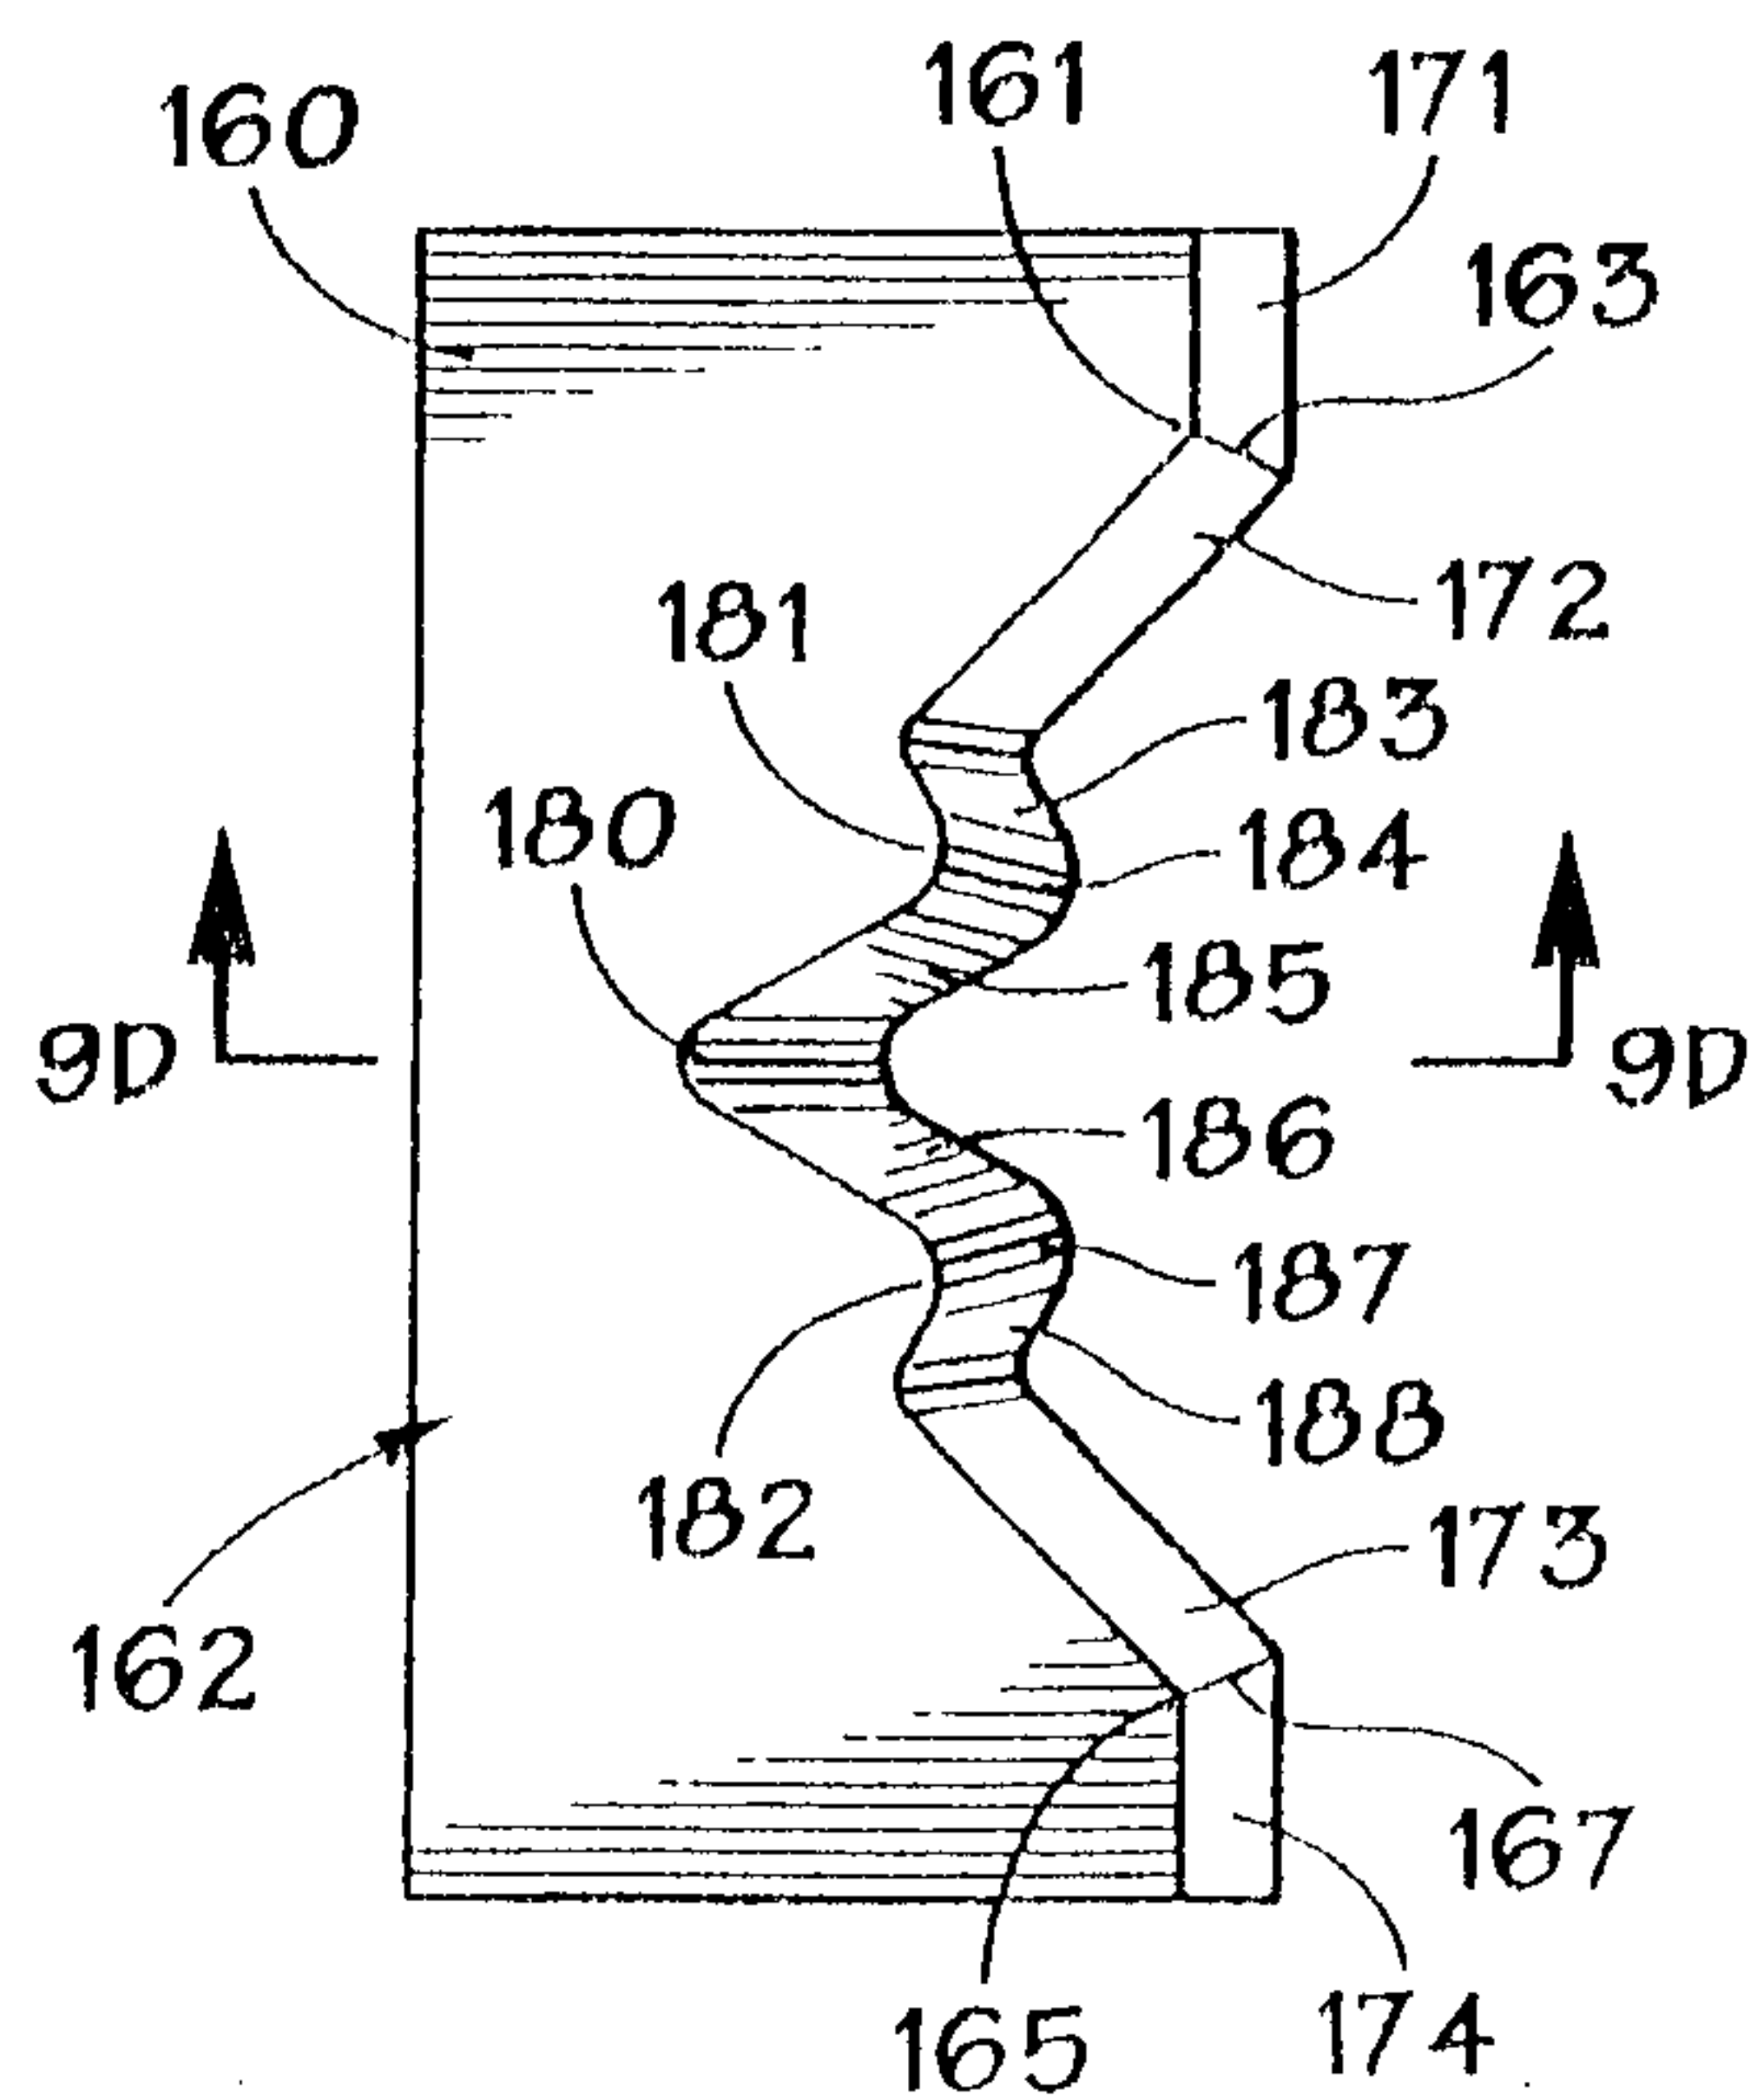
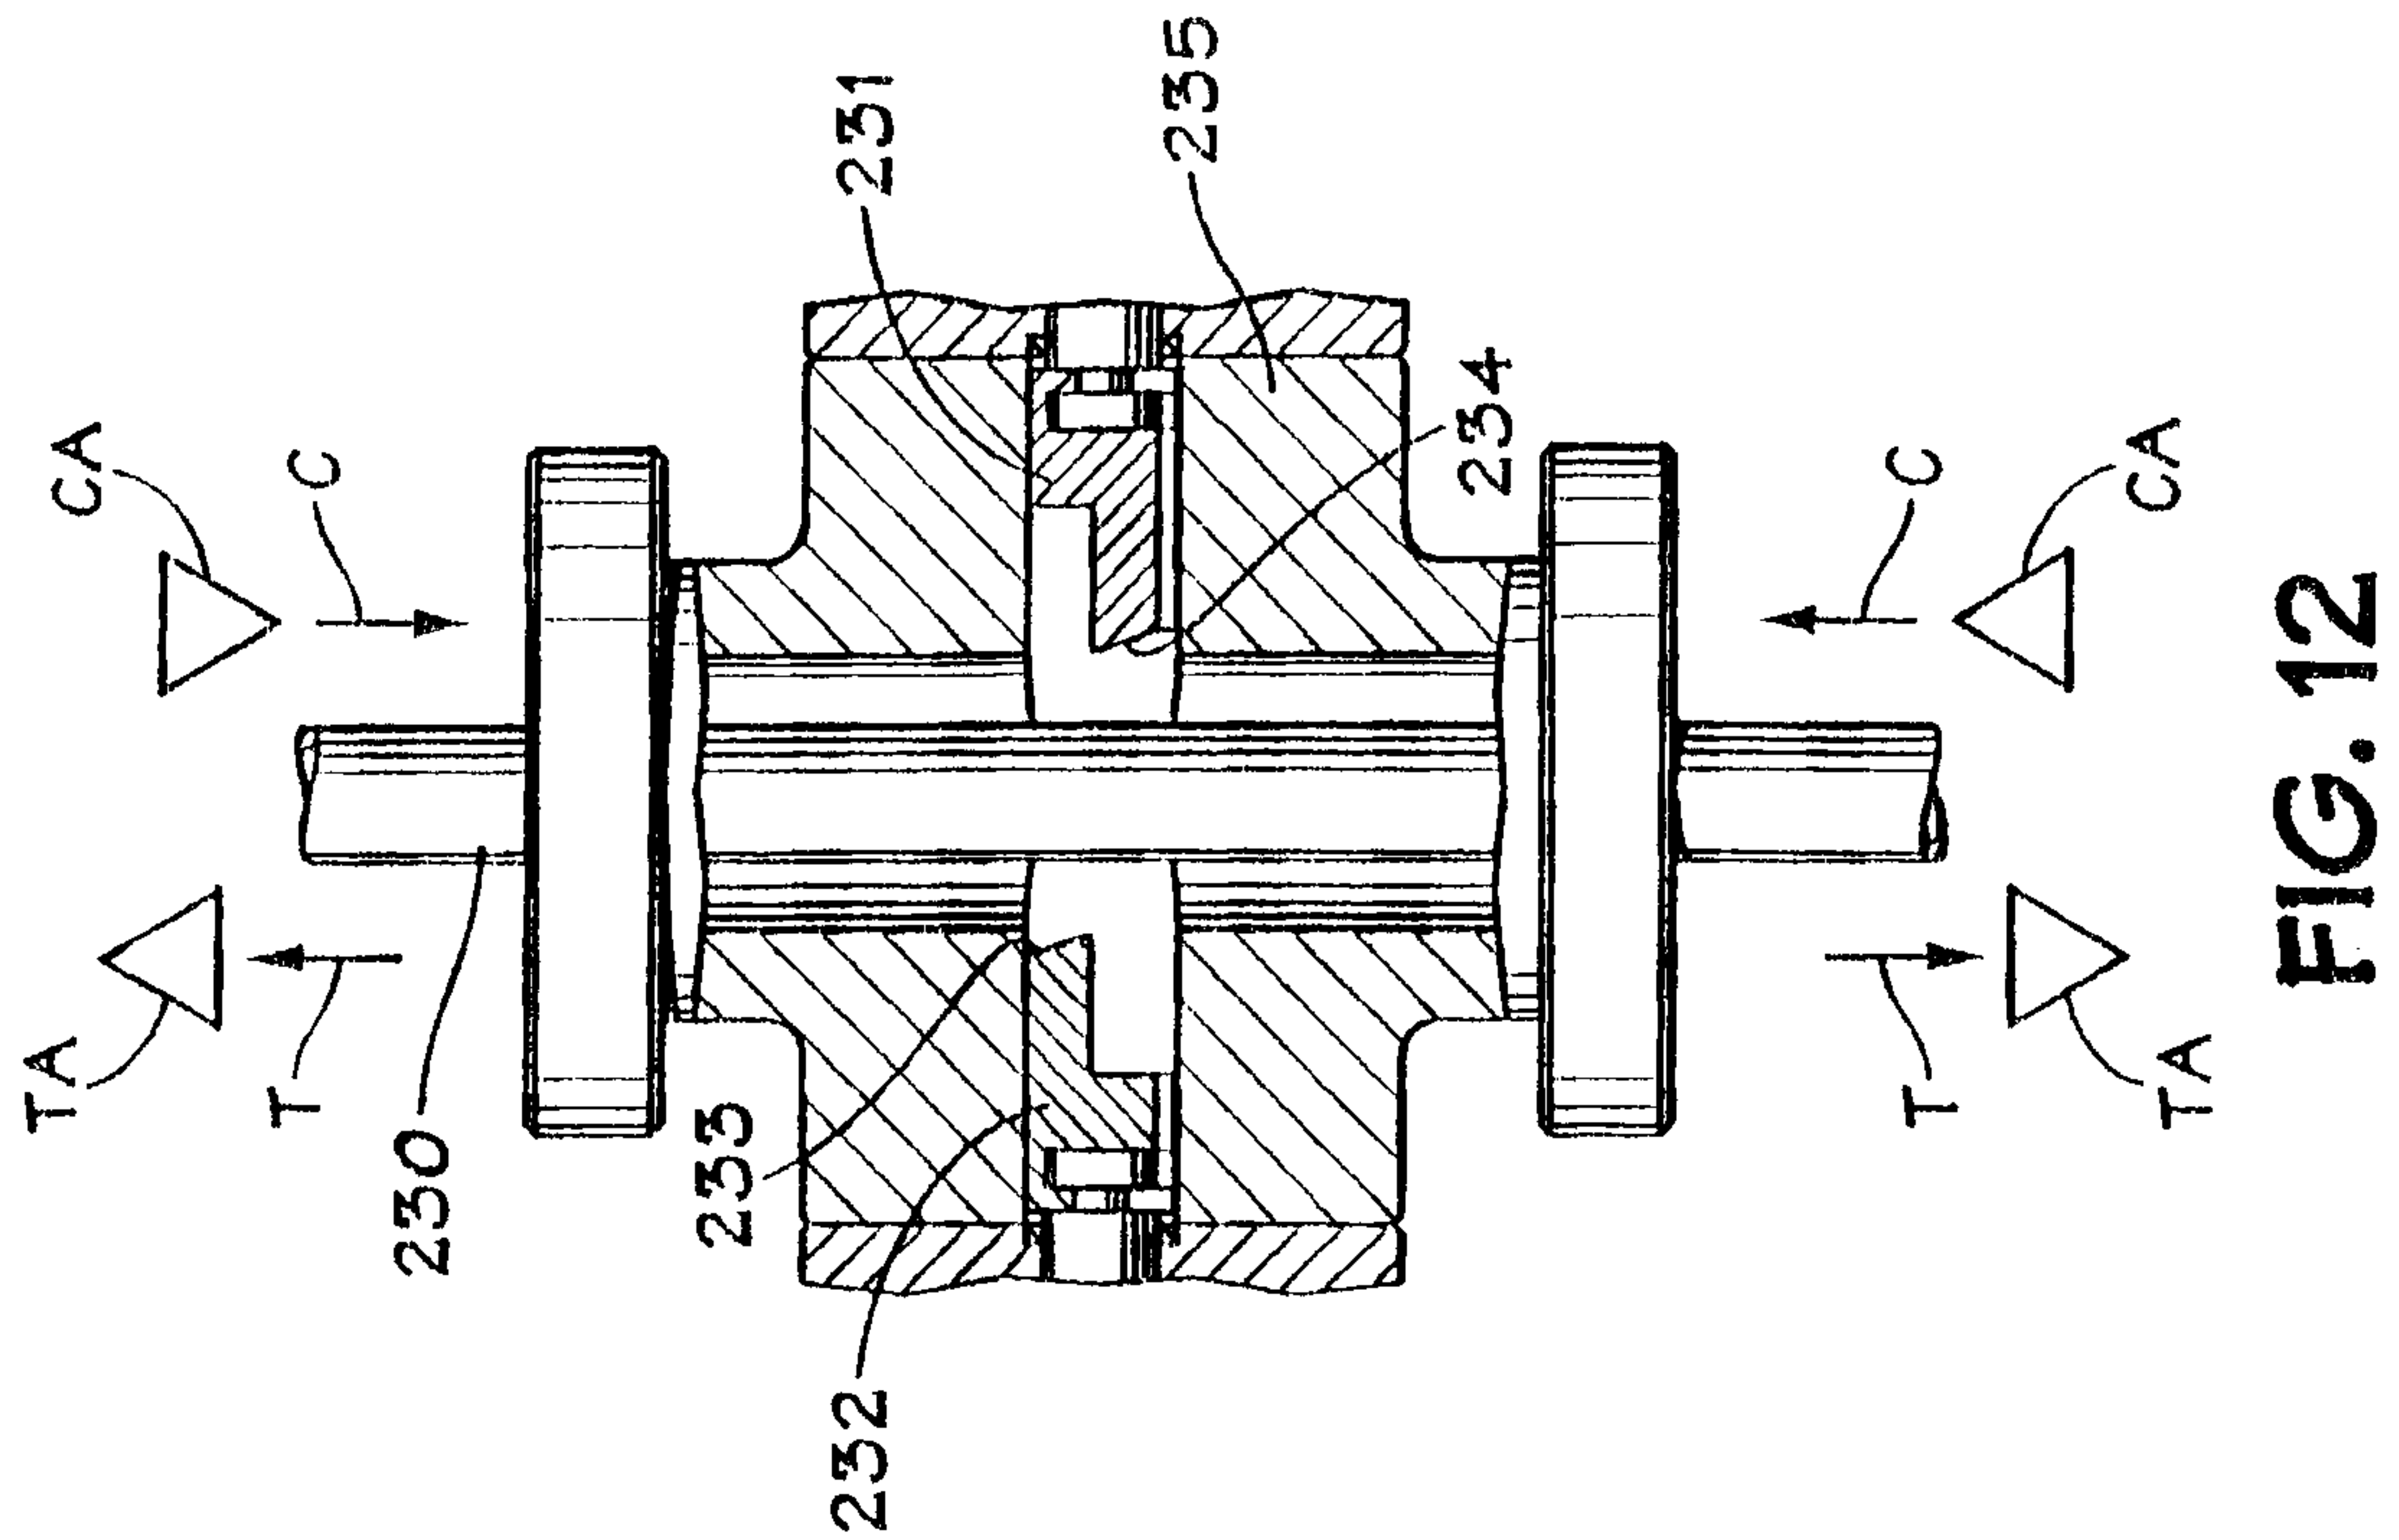
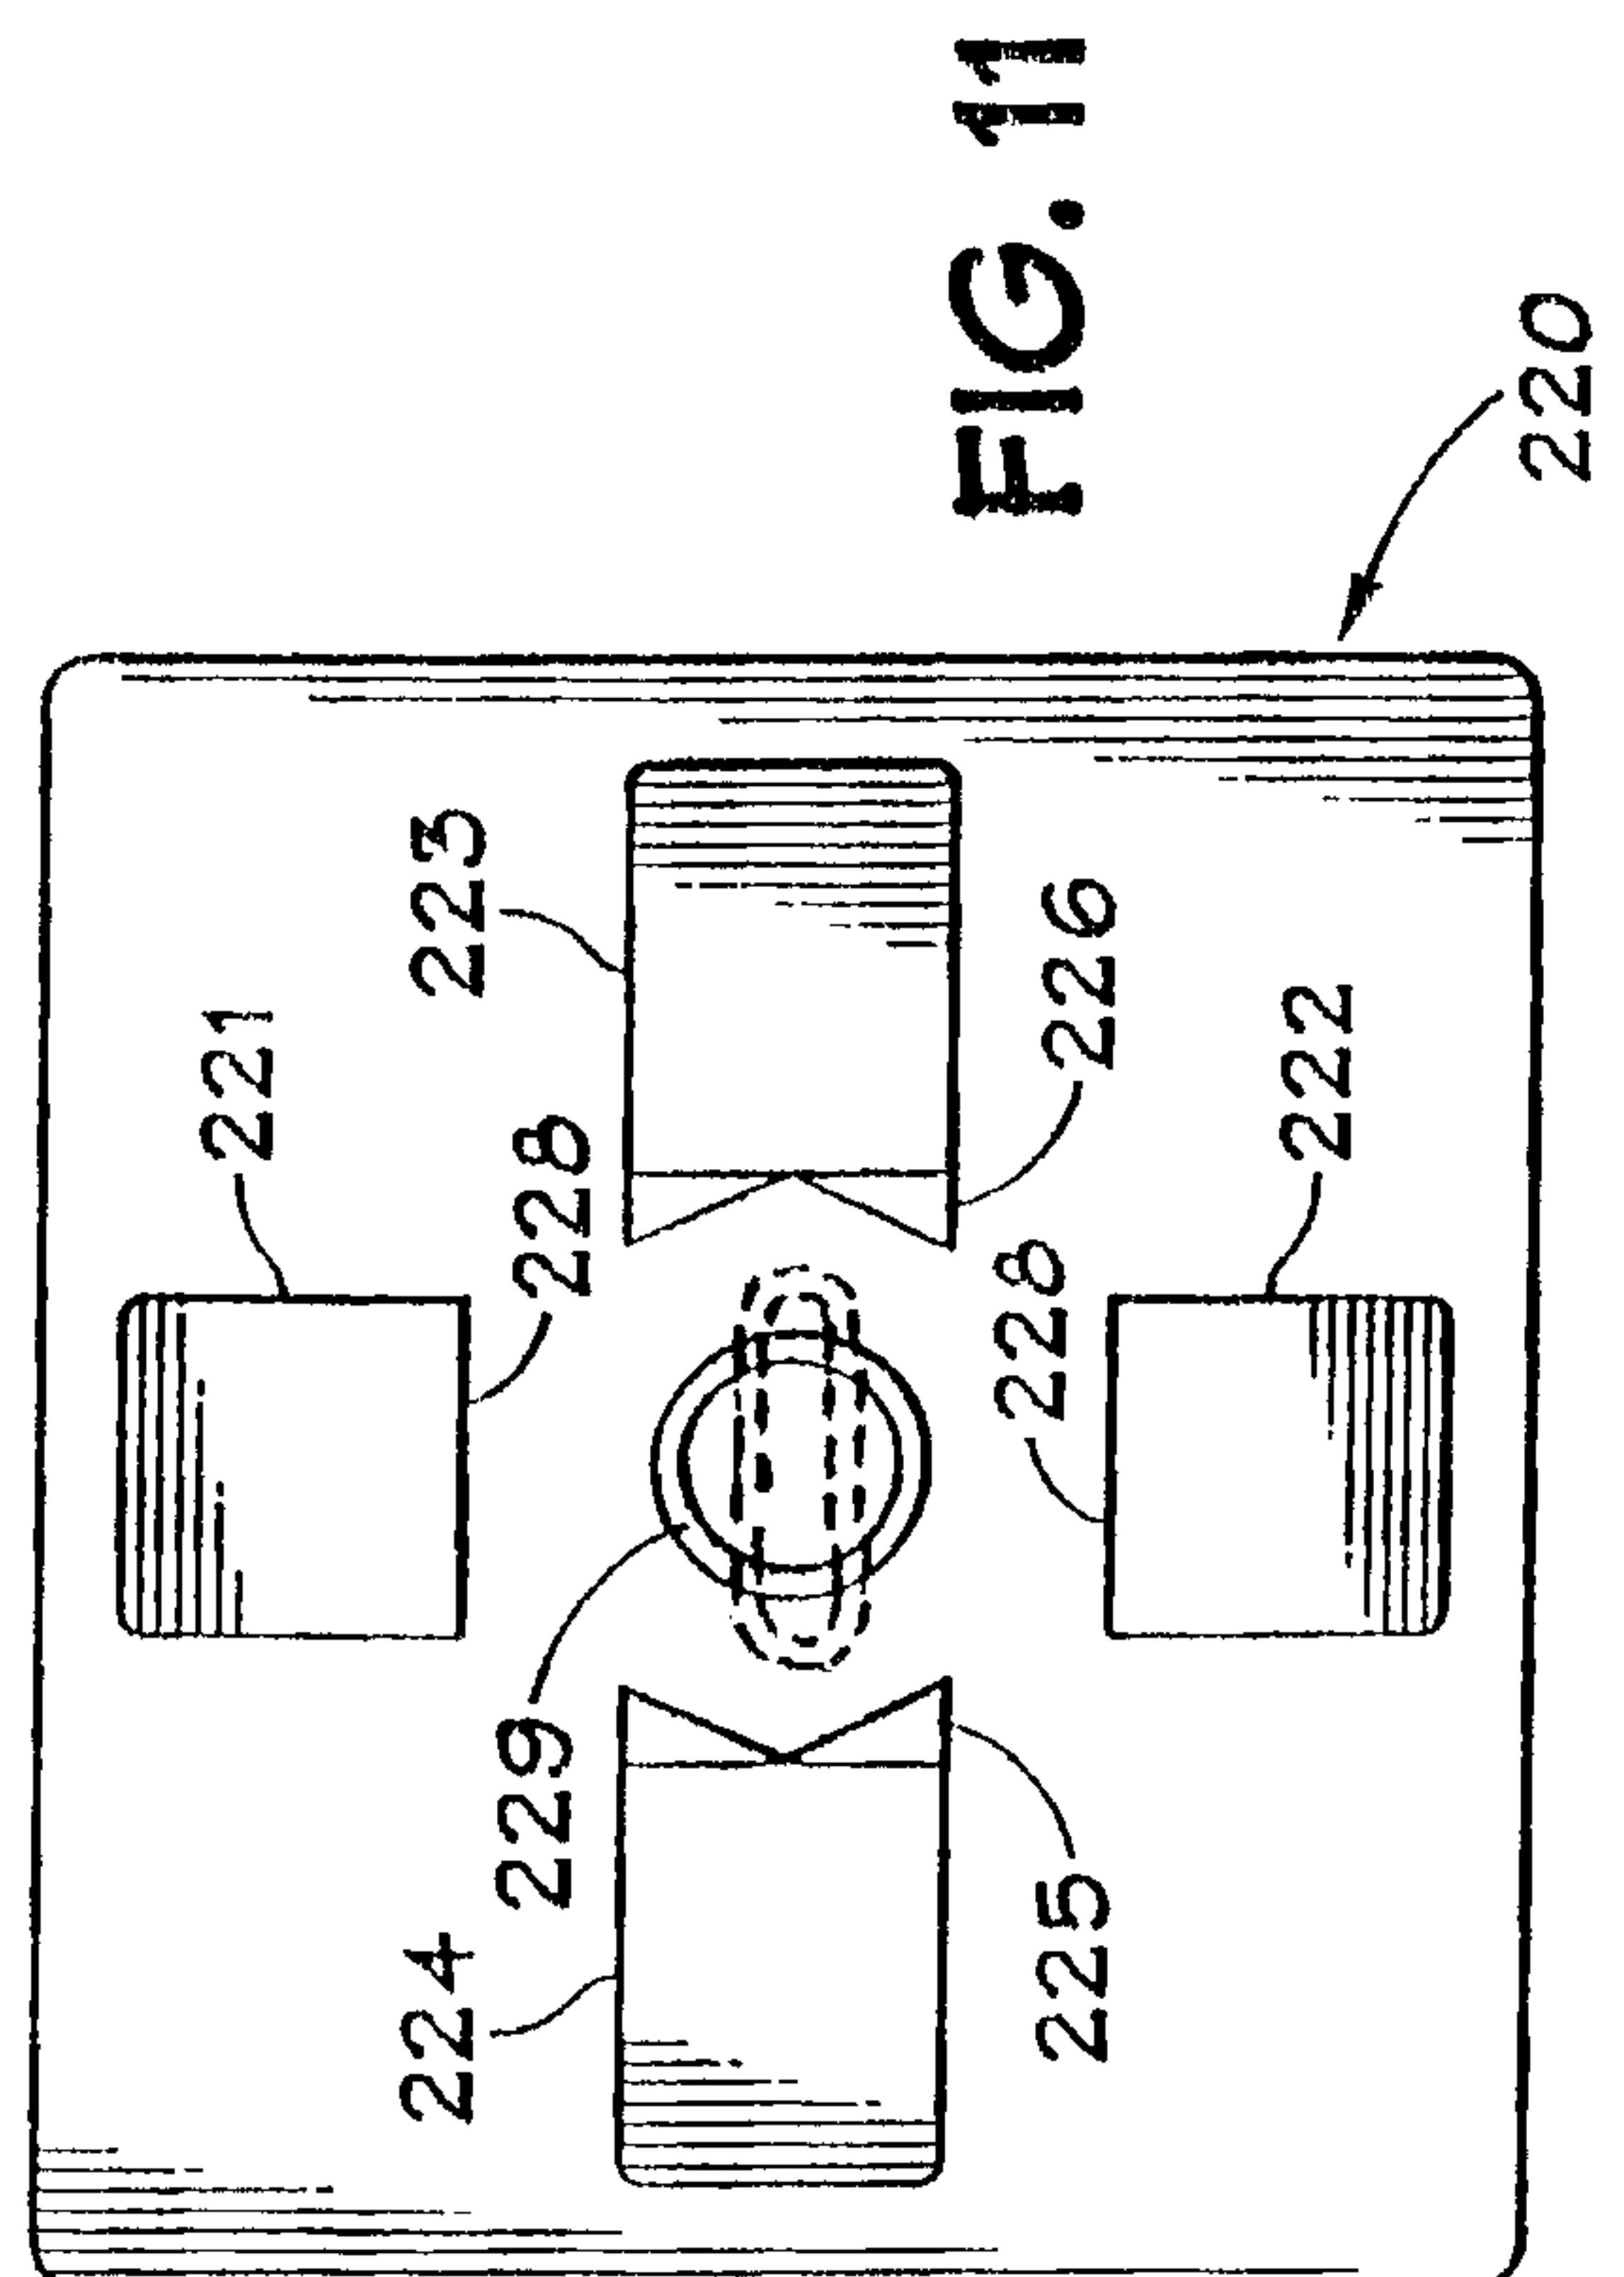
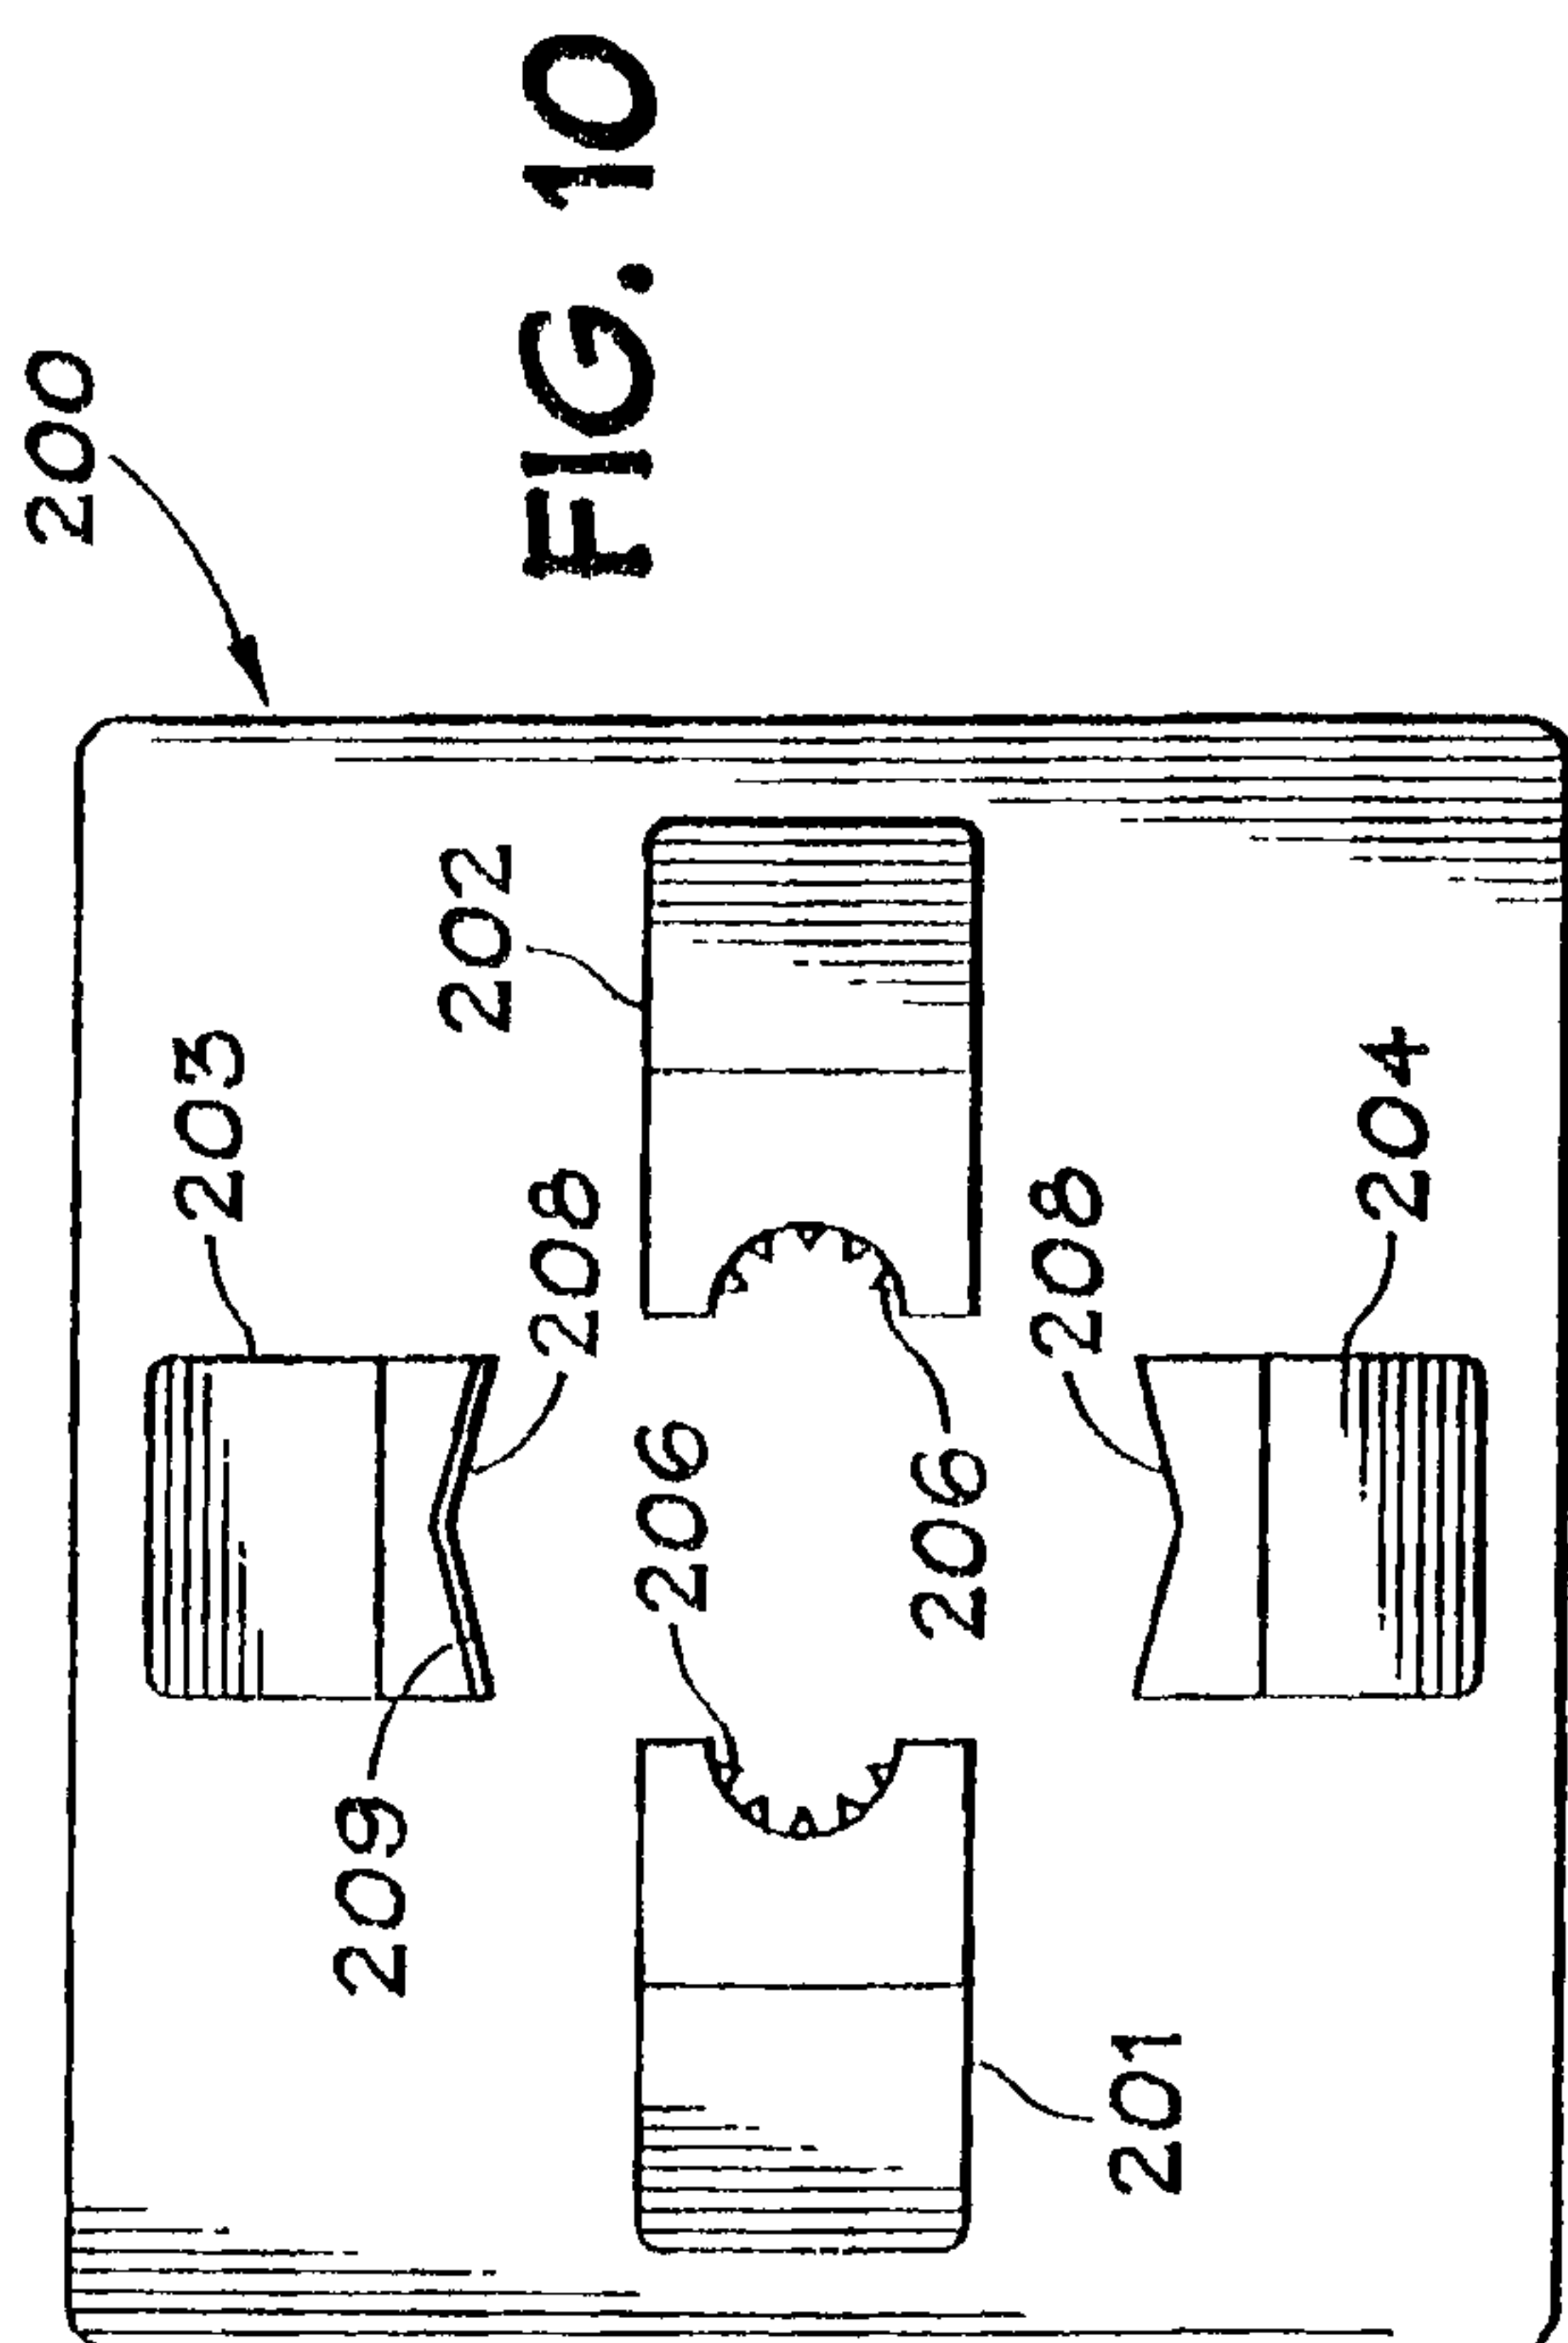
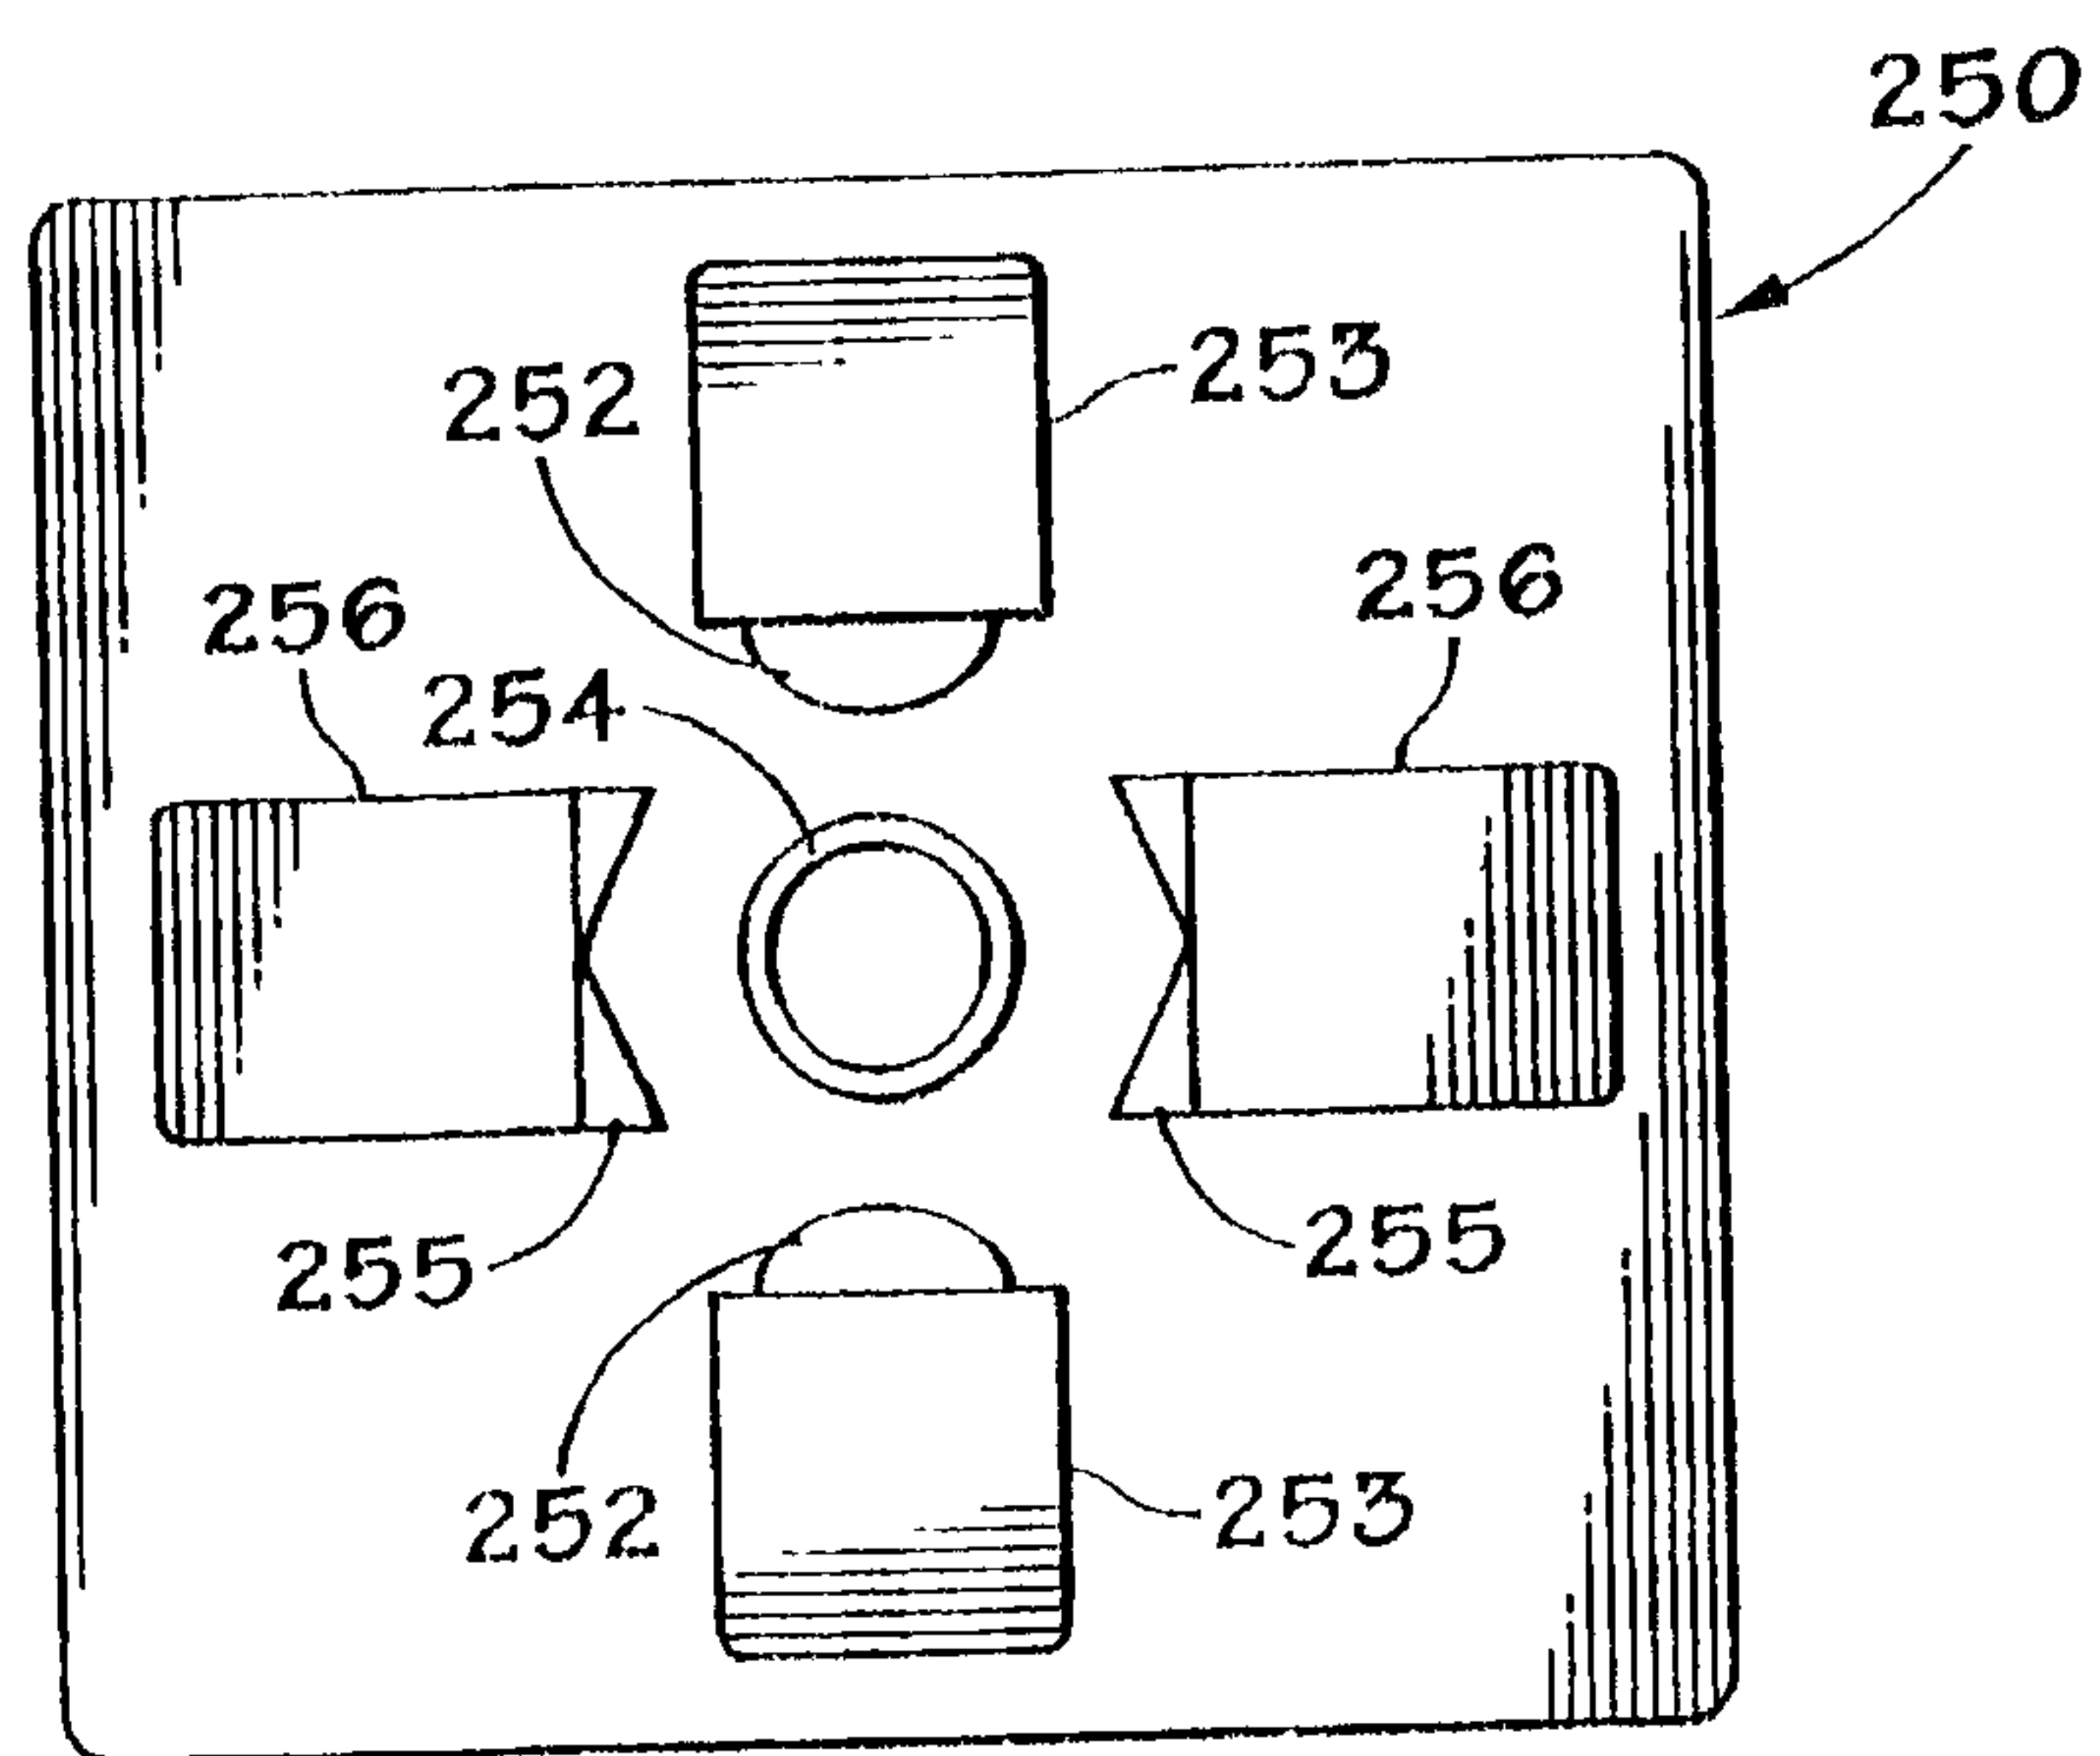
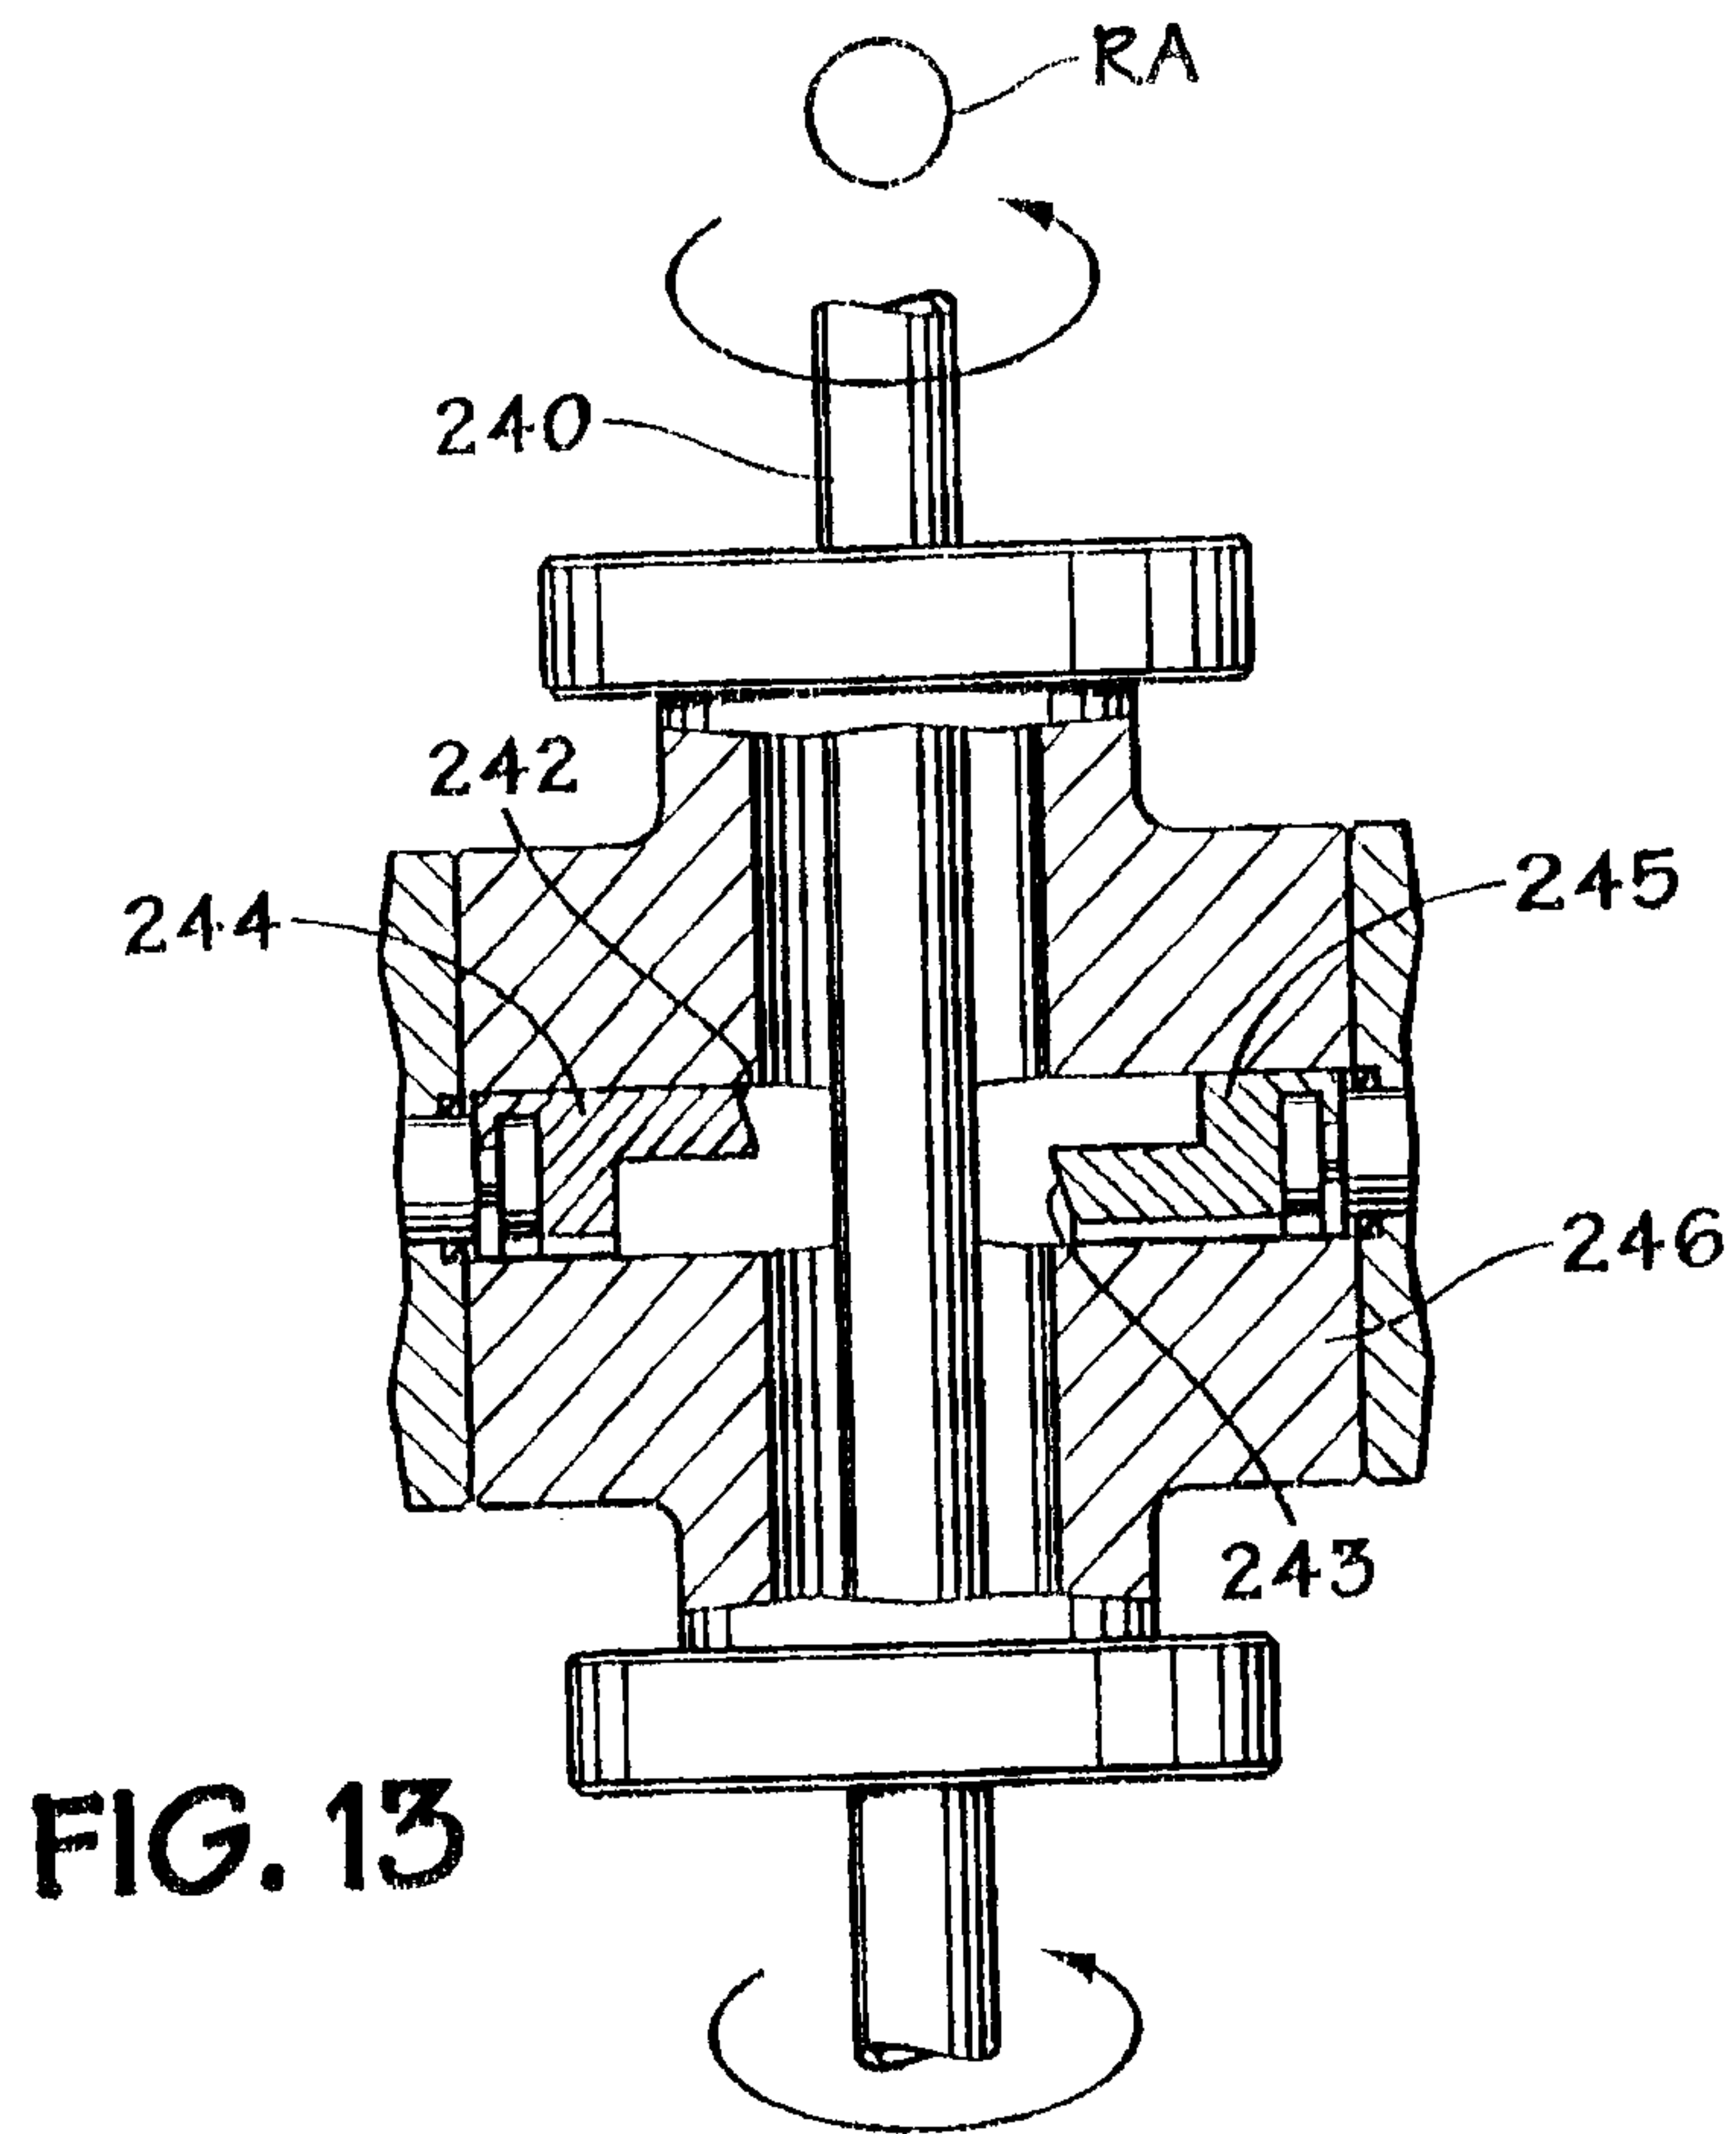


FIG. 9A**FIG. 9B****FIG. 9C****FIG. 9D**





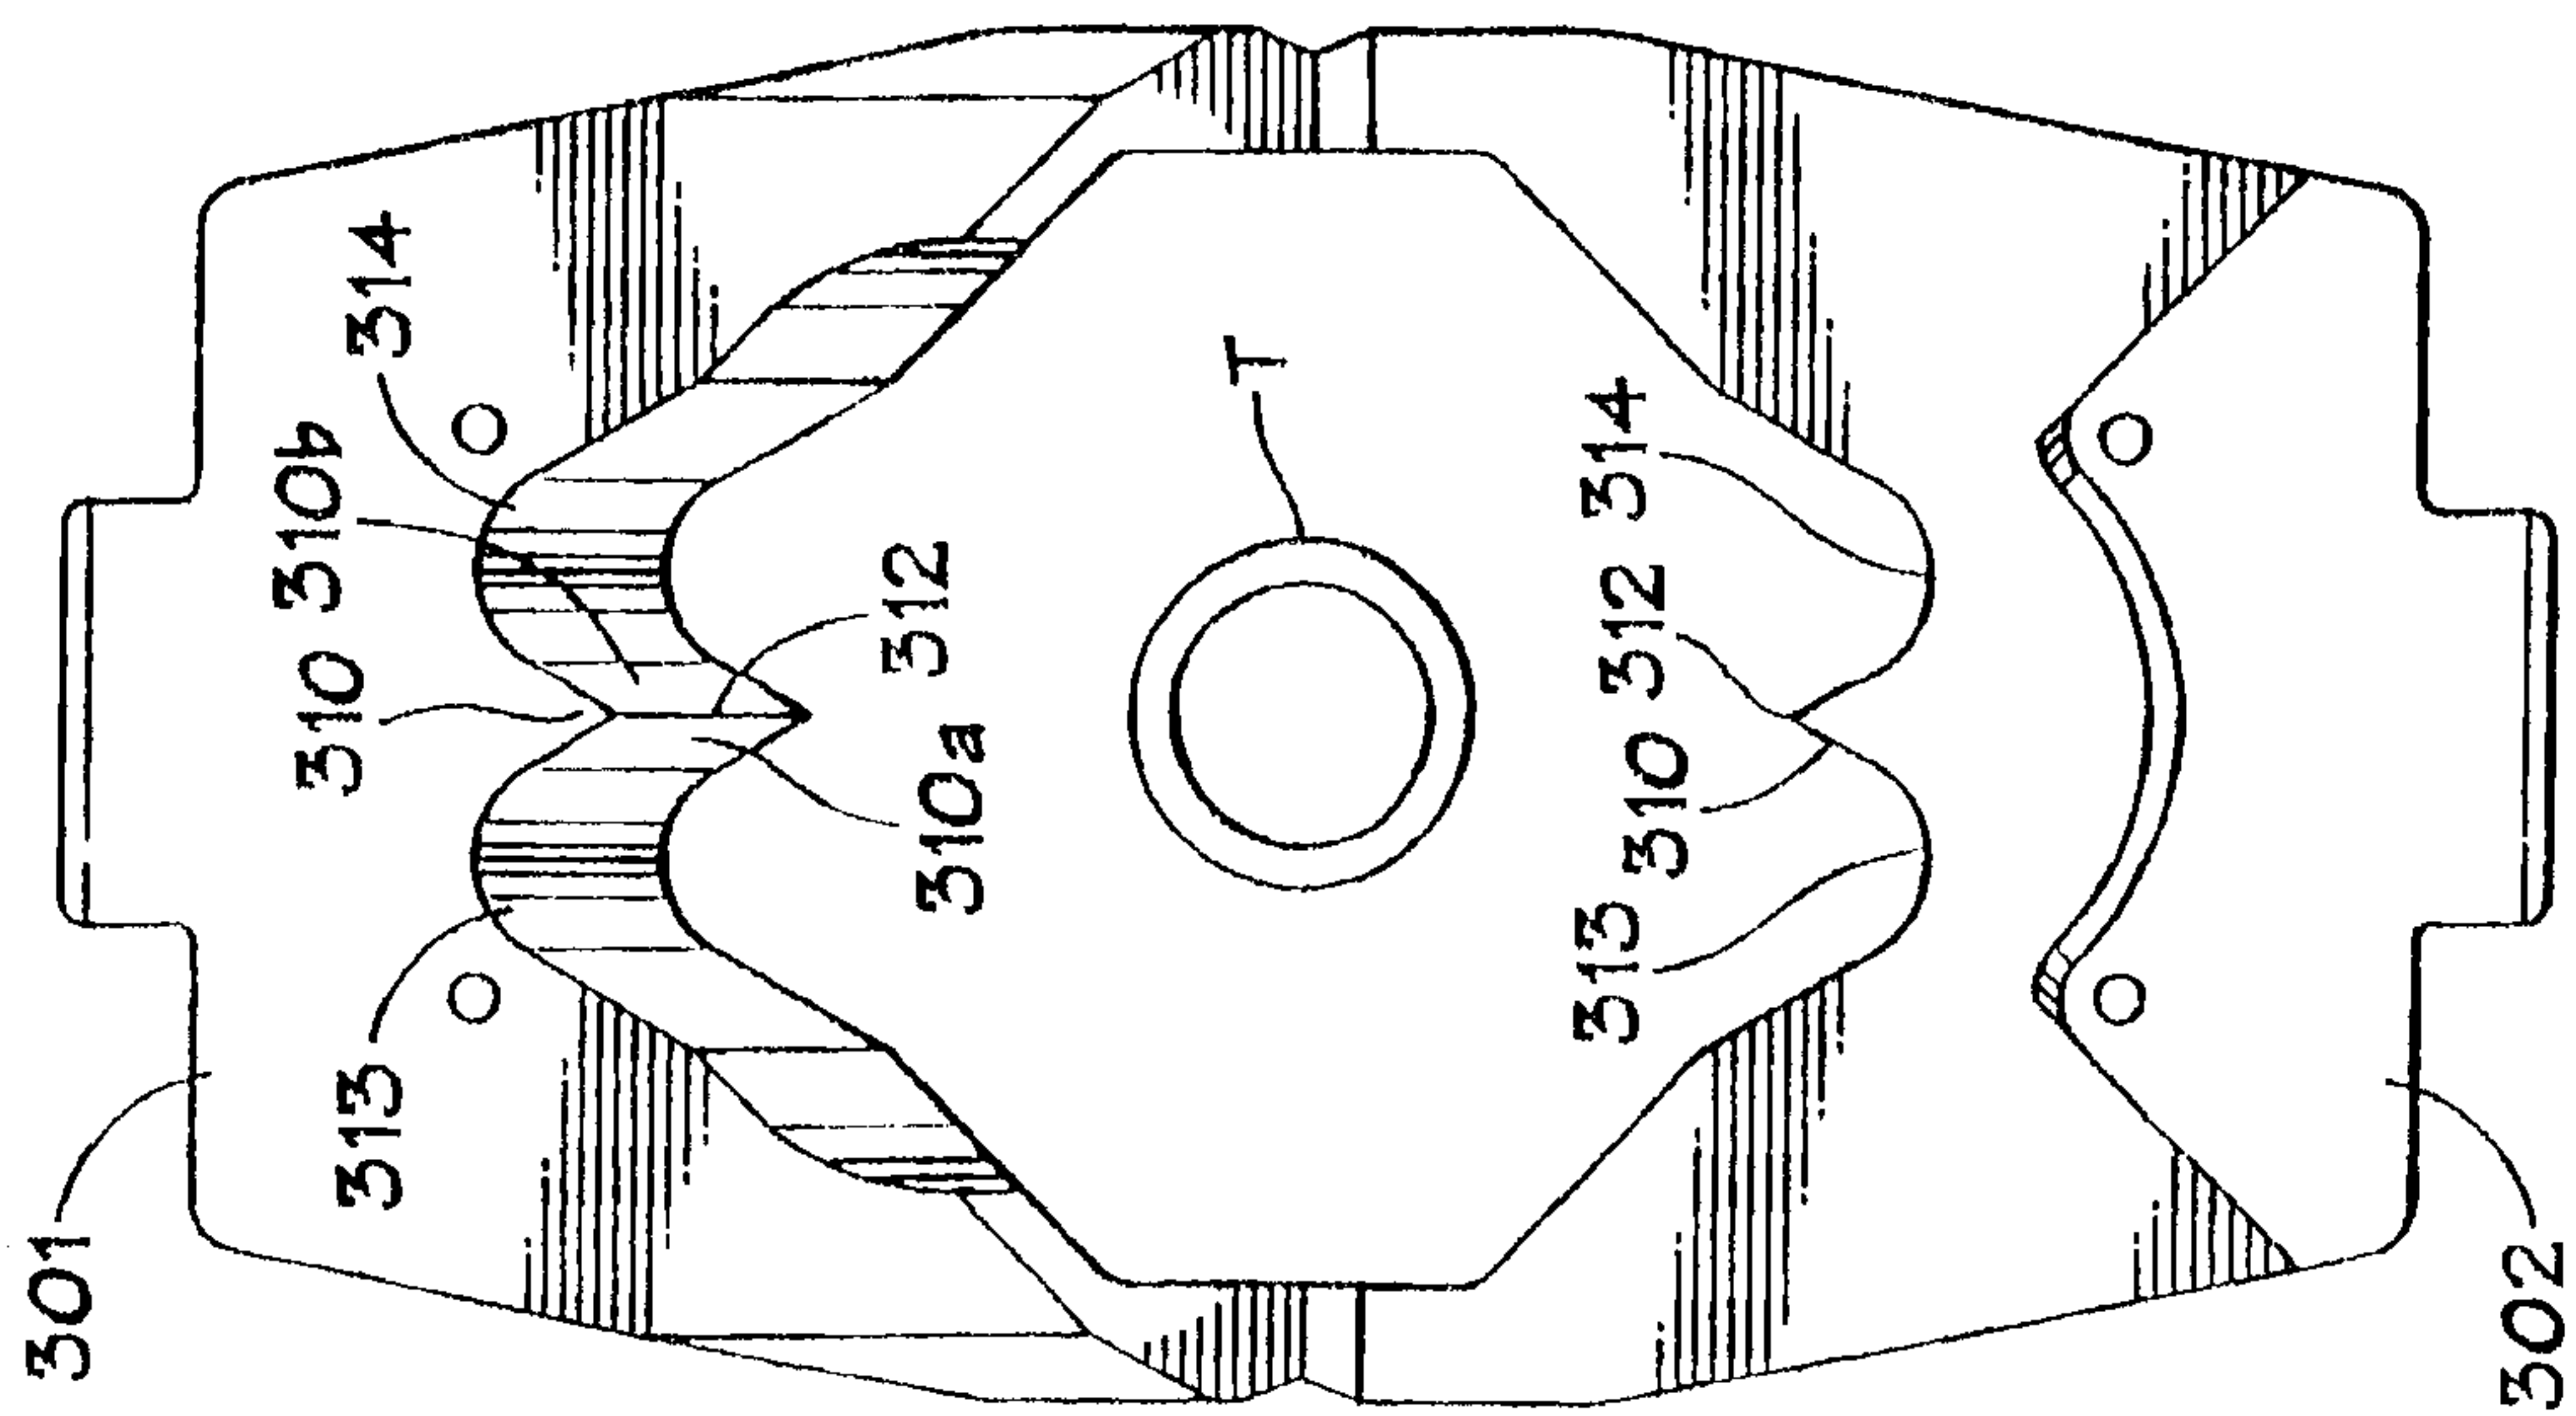


FIG. 15A

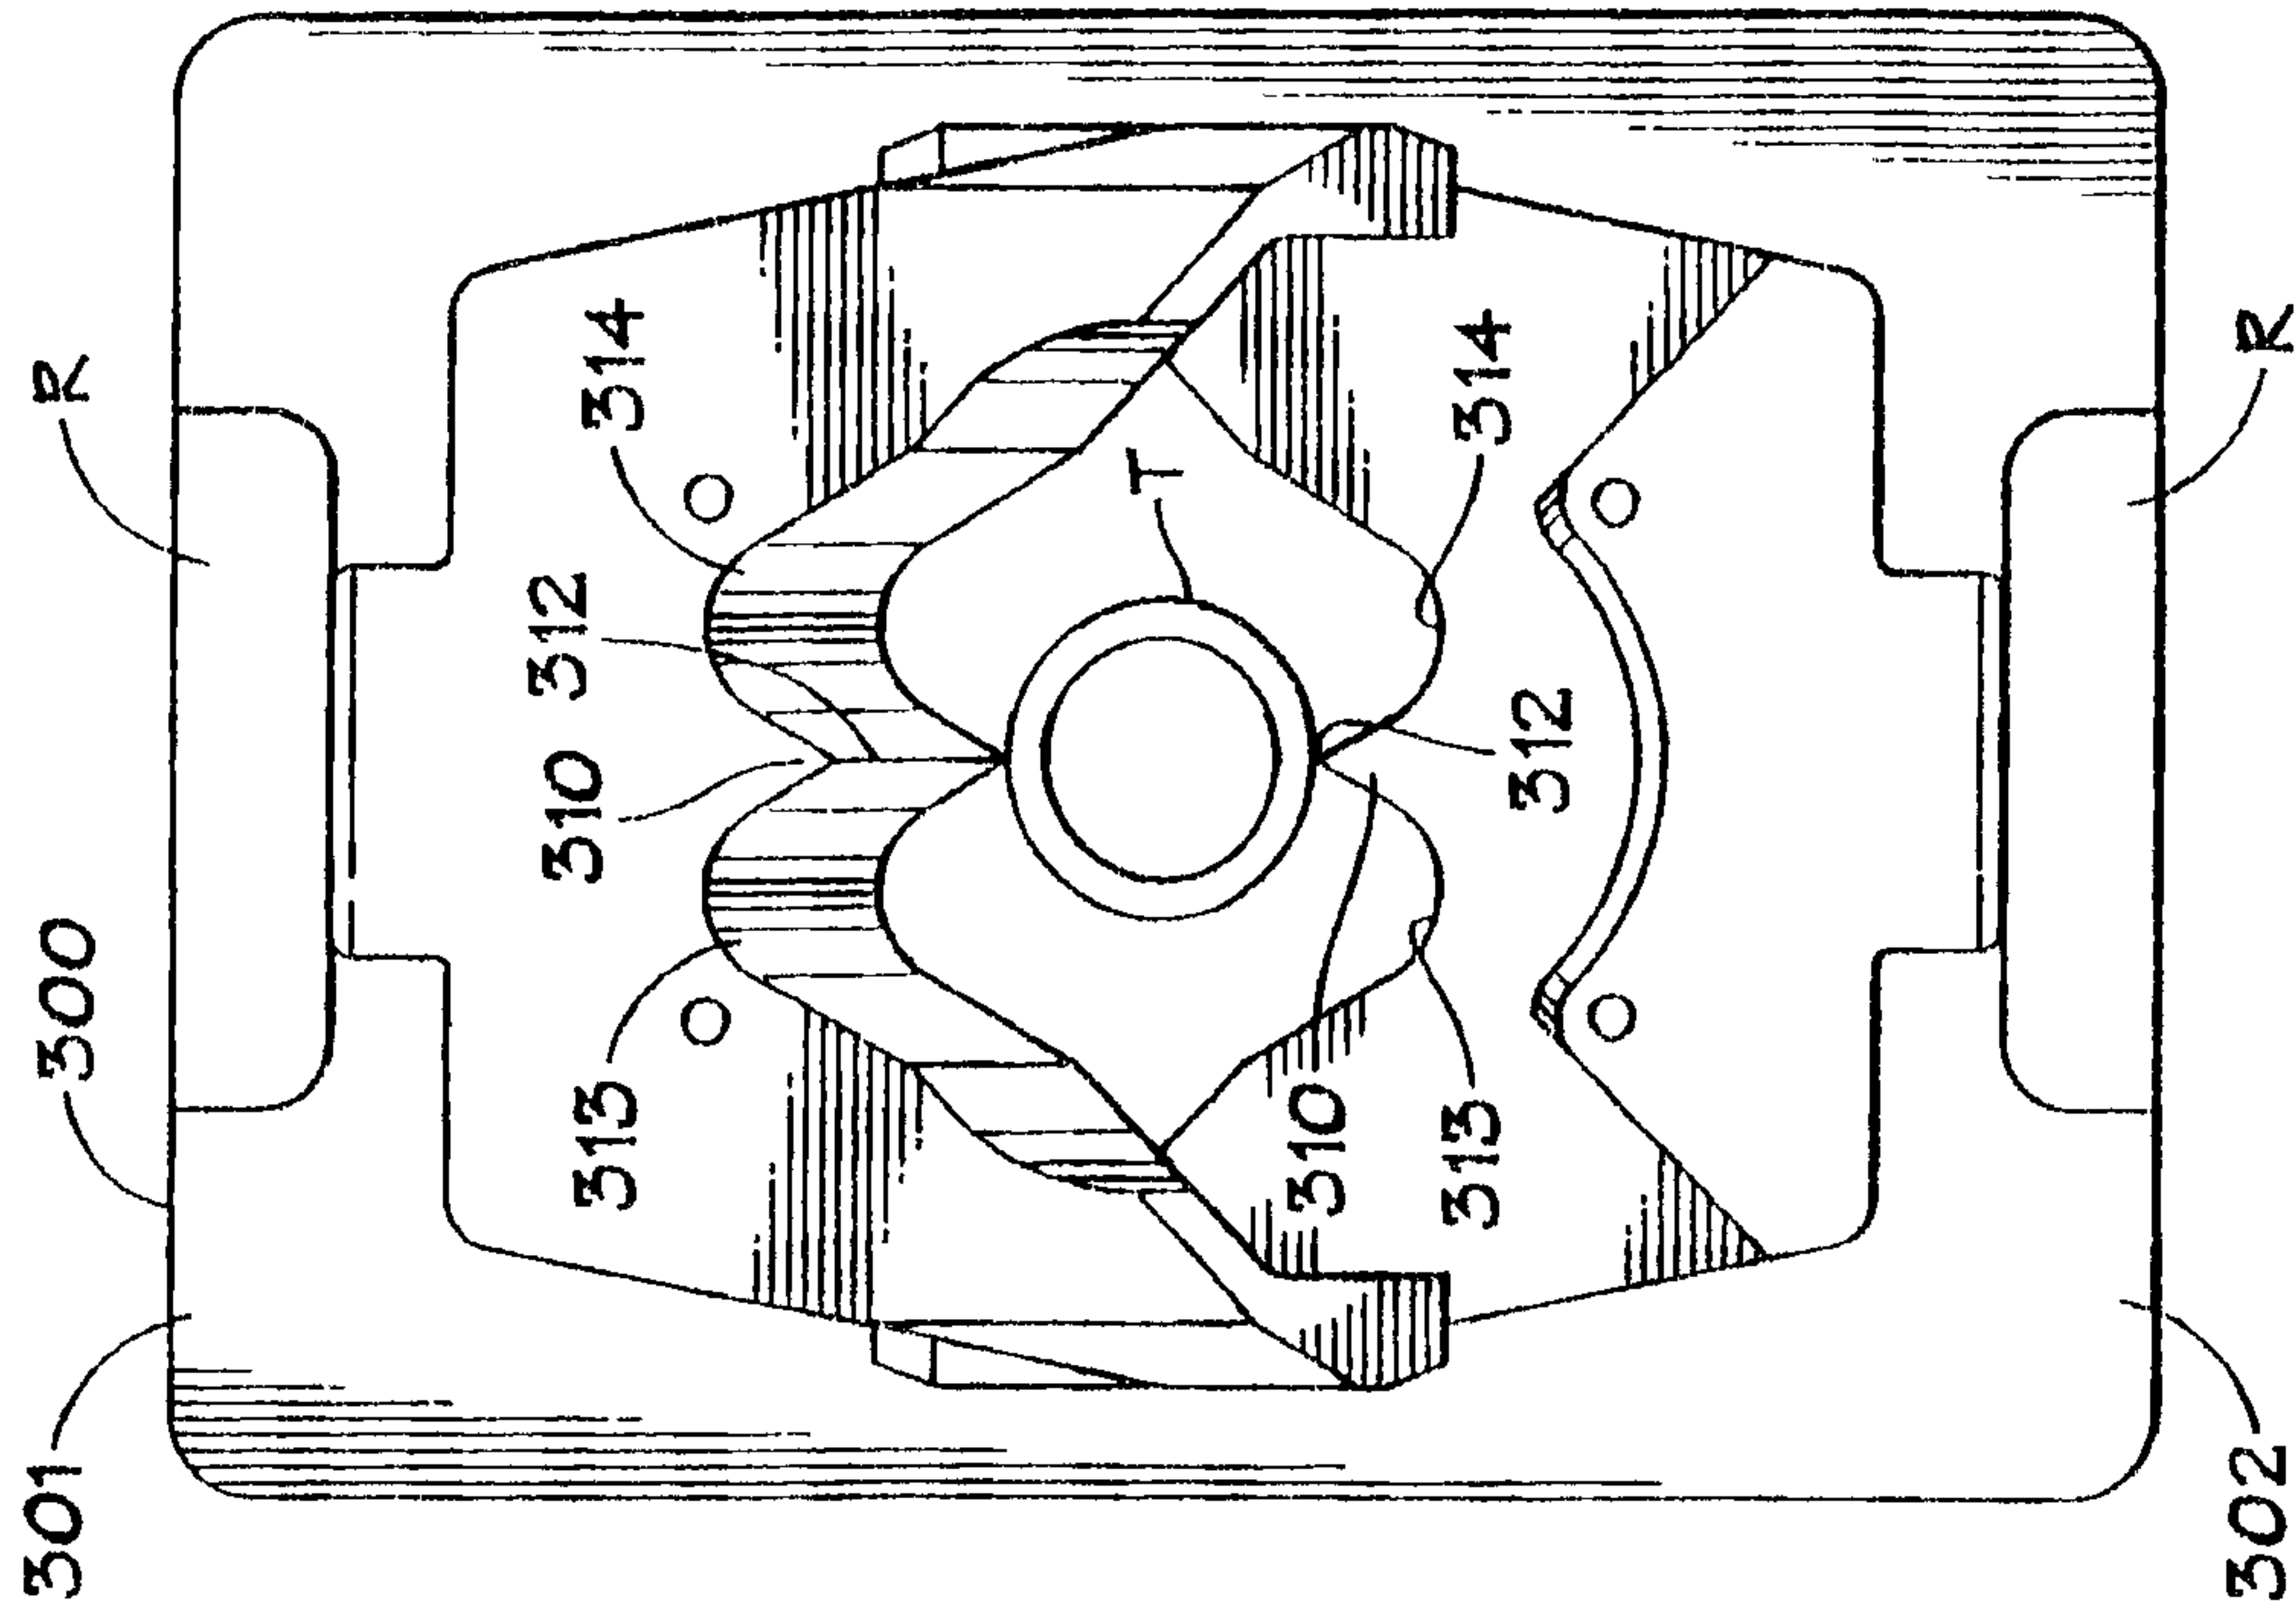


FIG. 15B

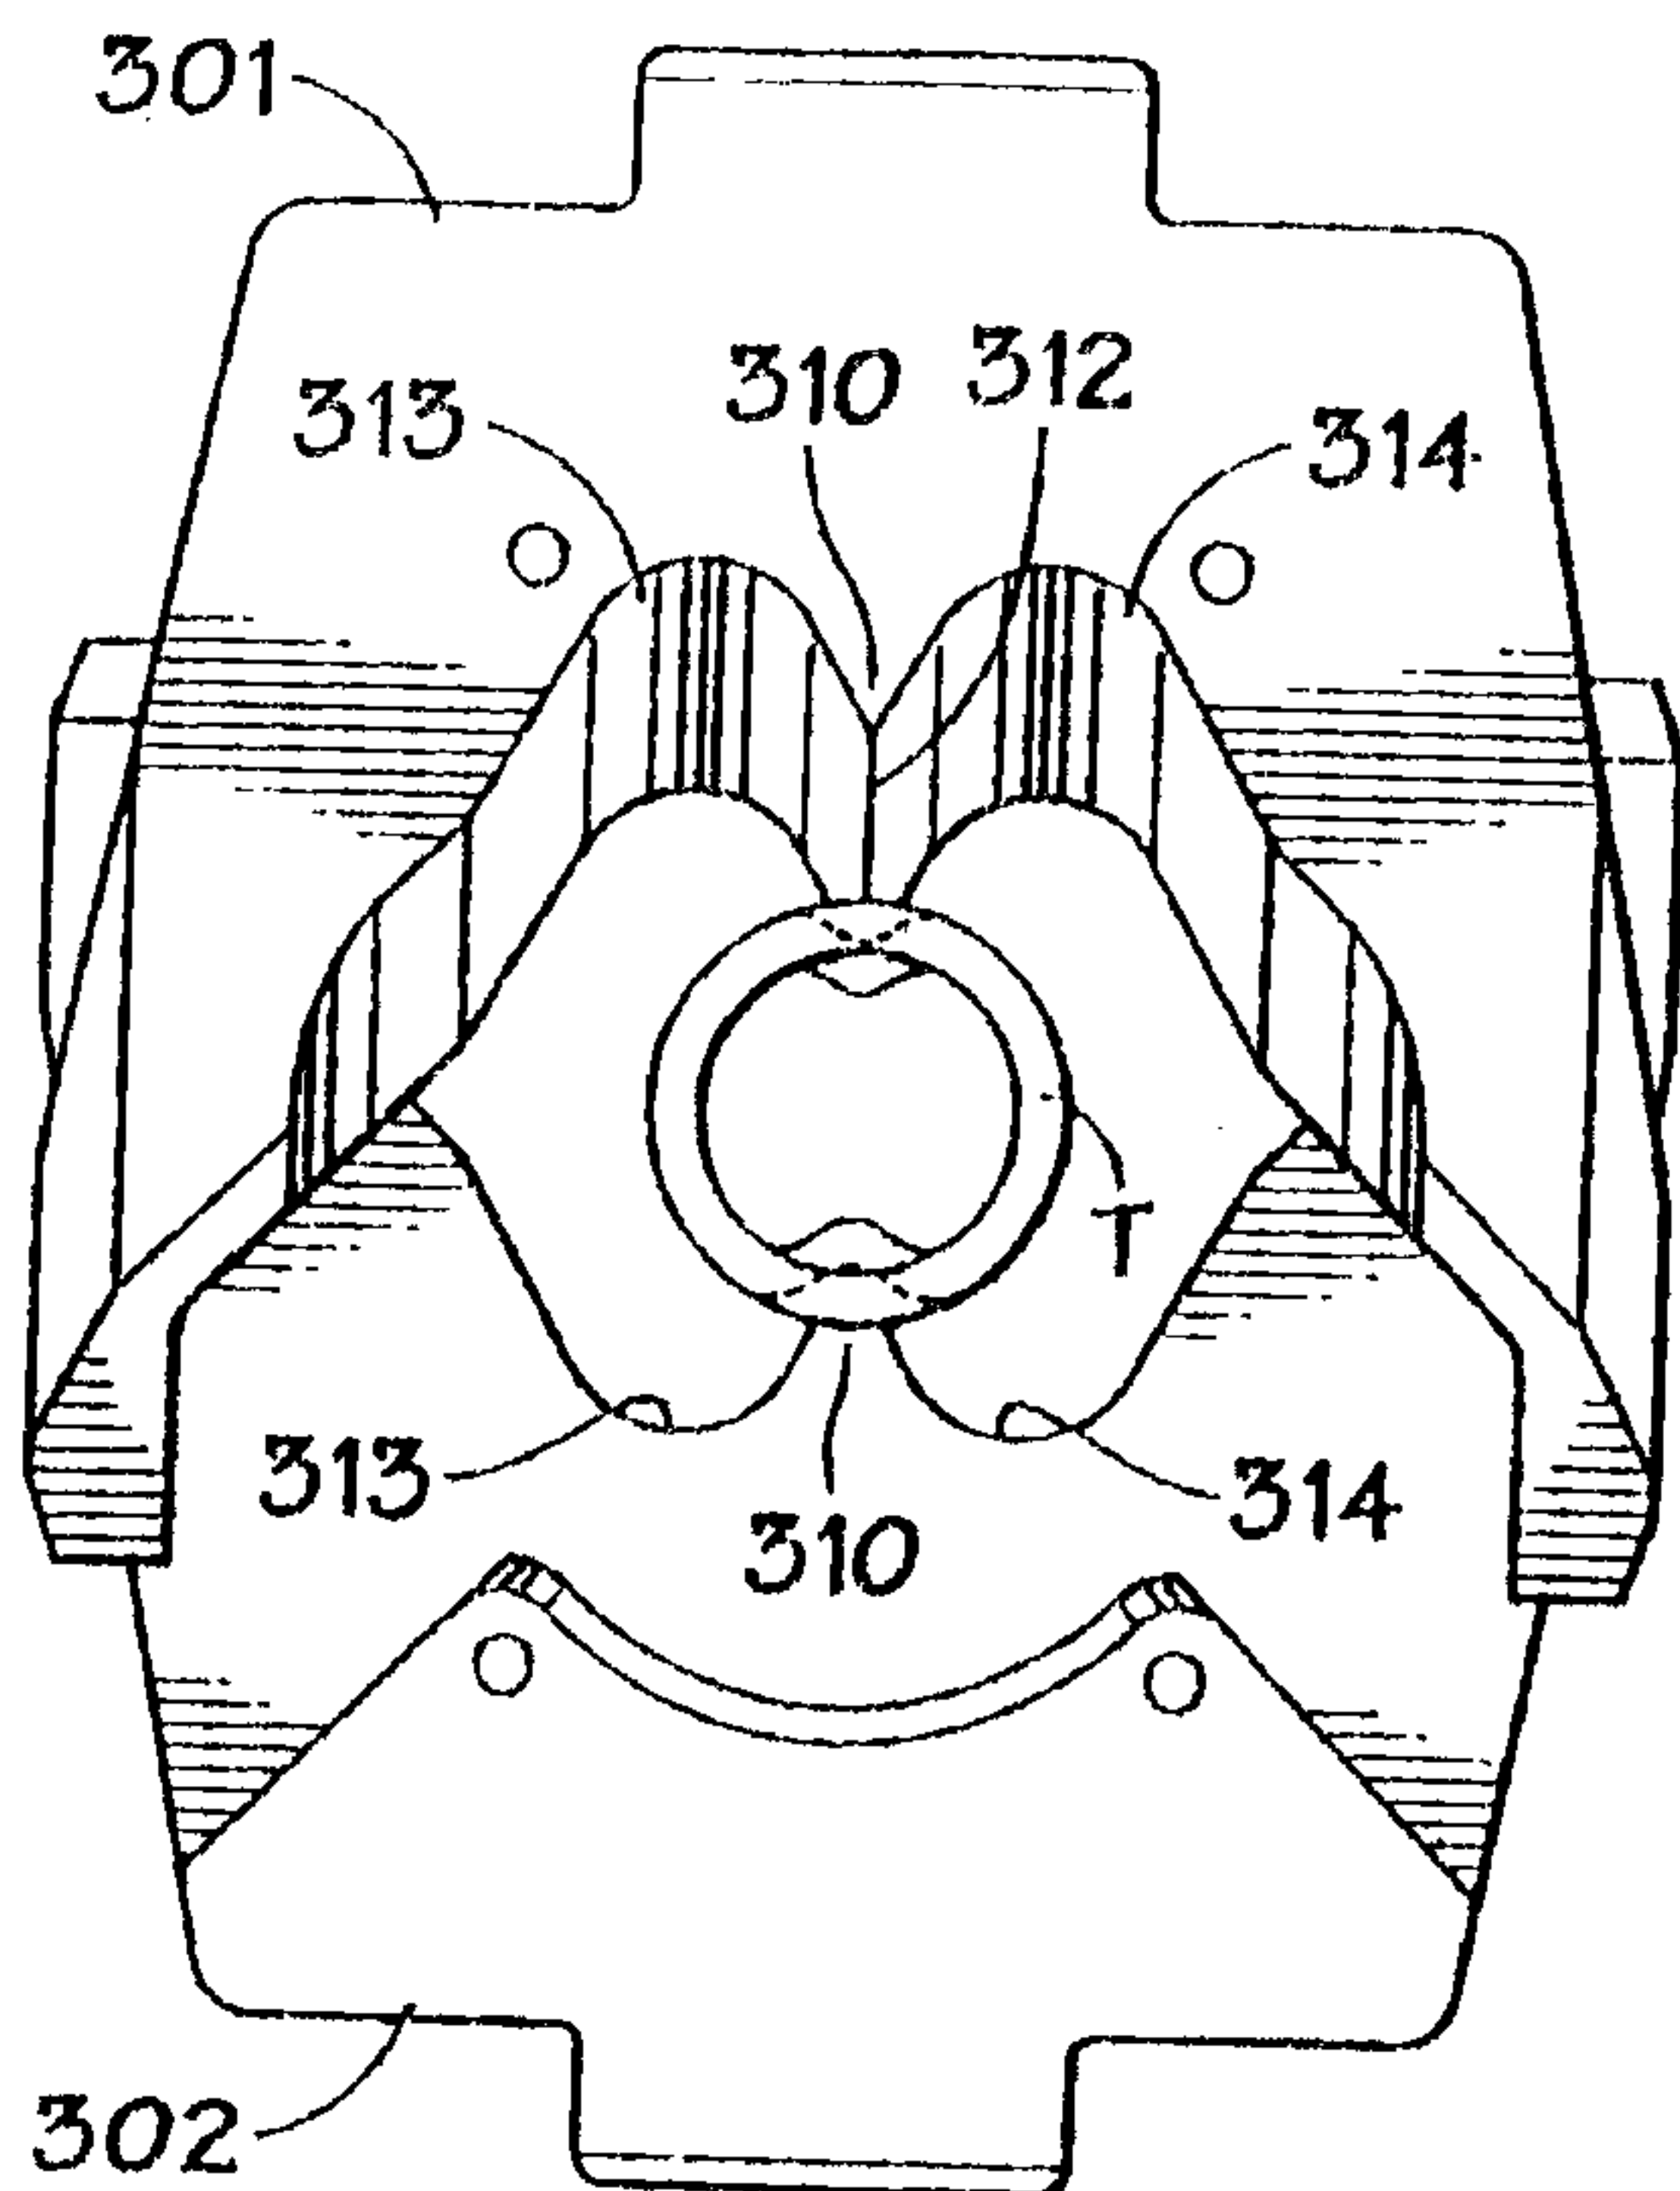


FIG. 15C

FIG. 15D

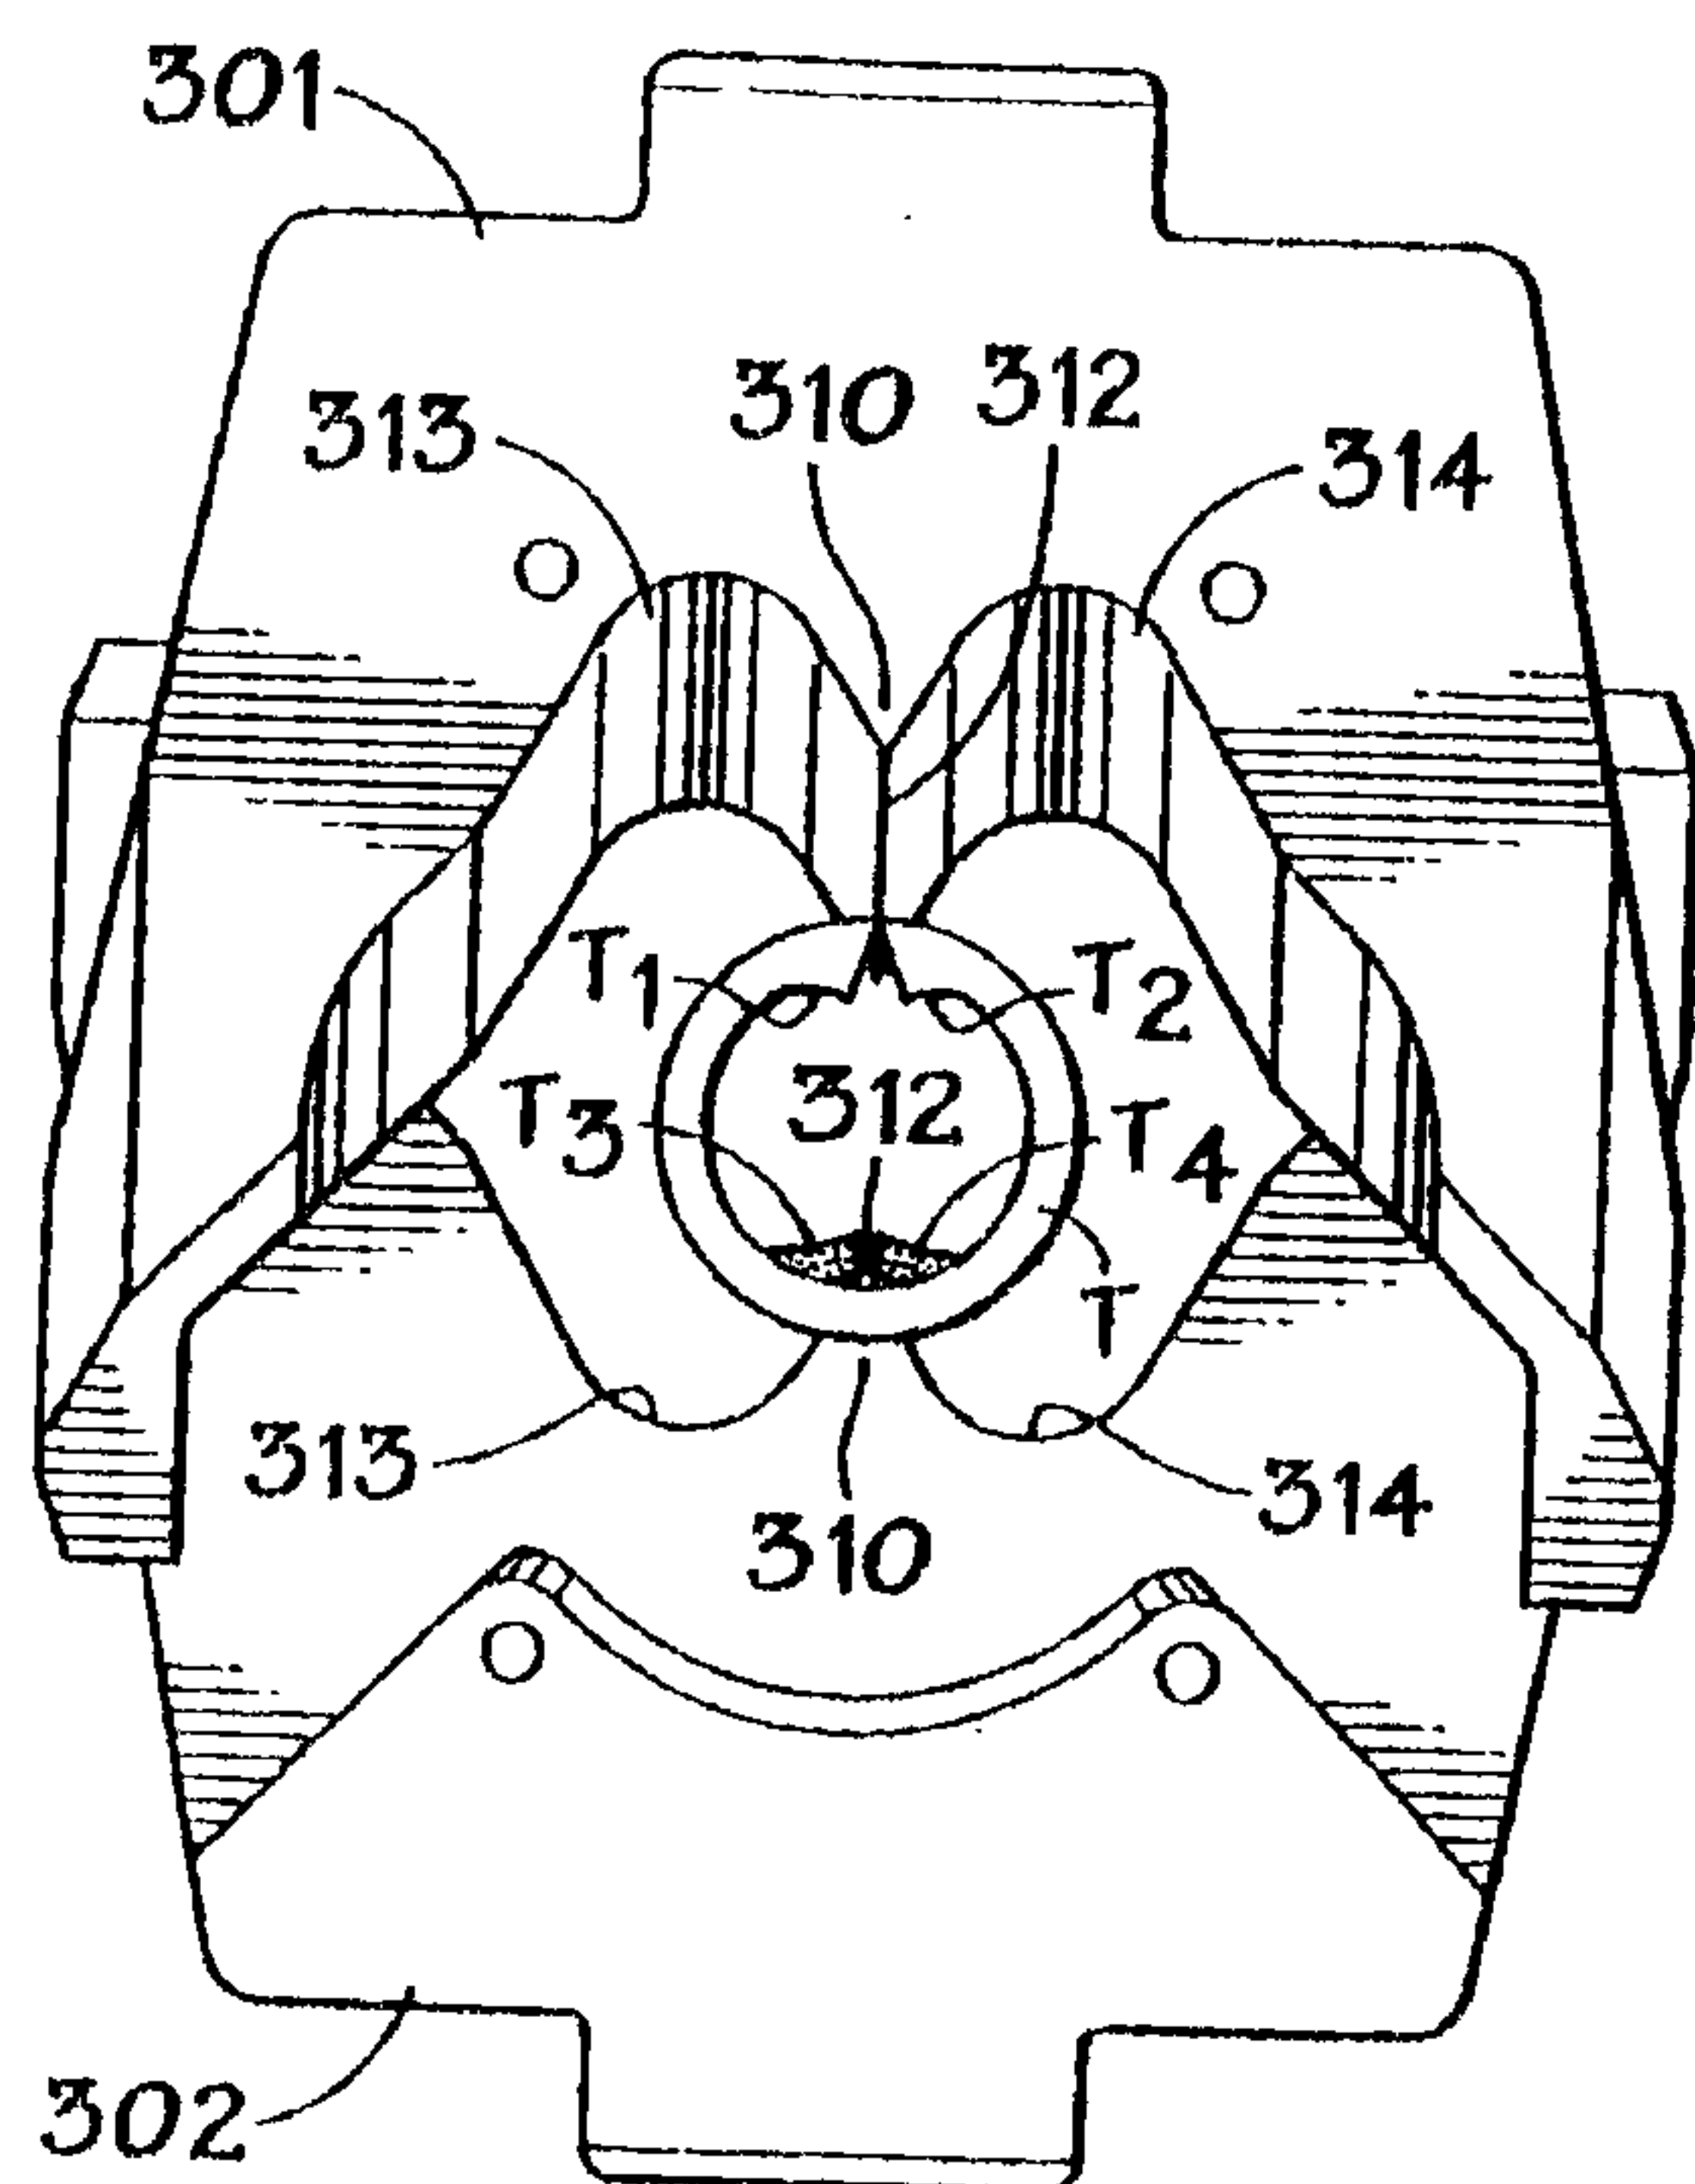
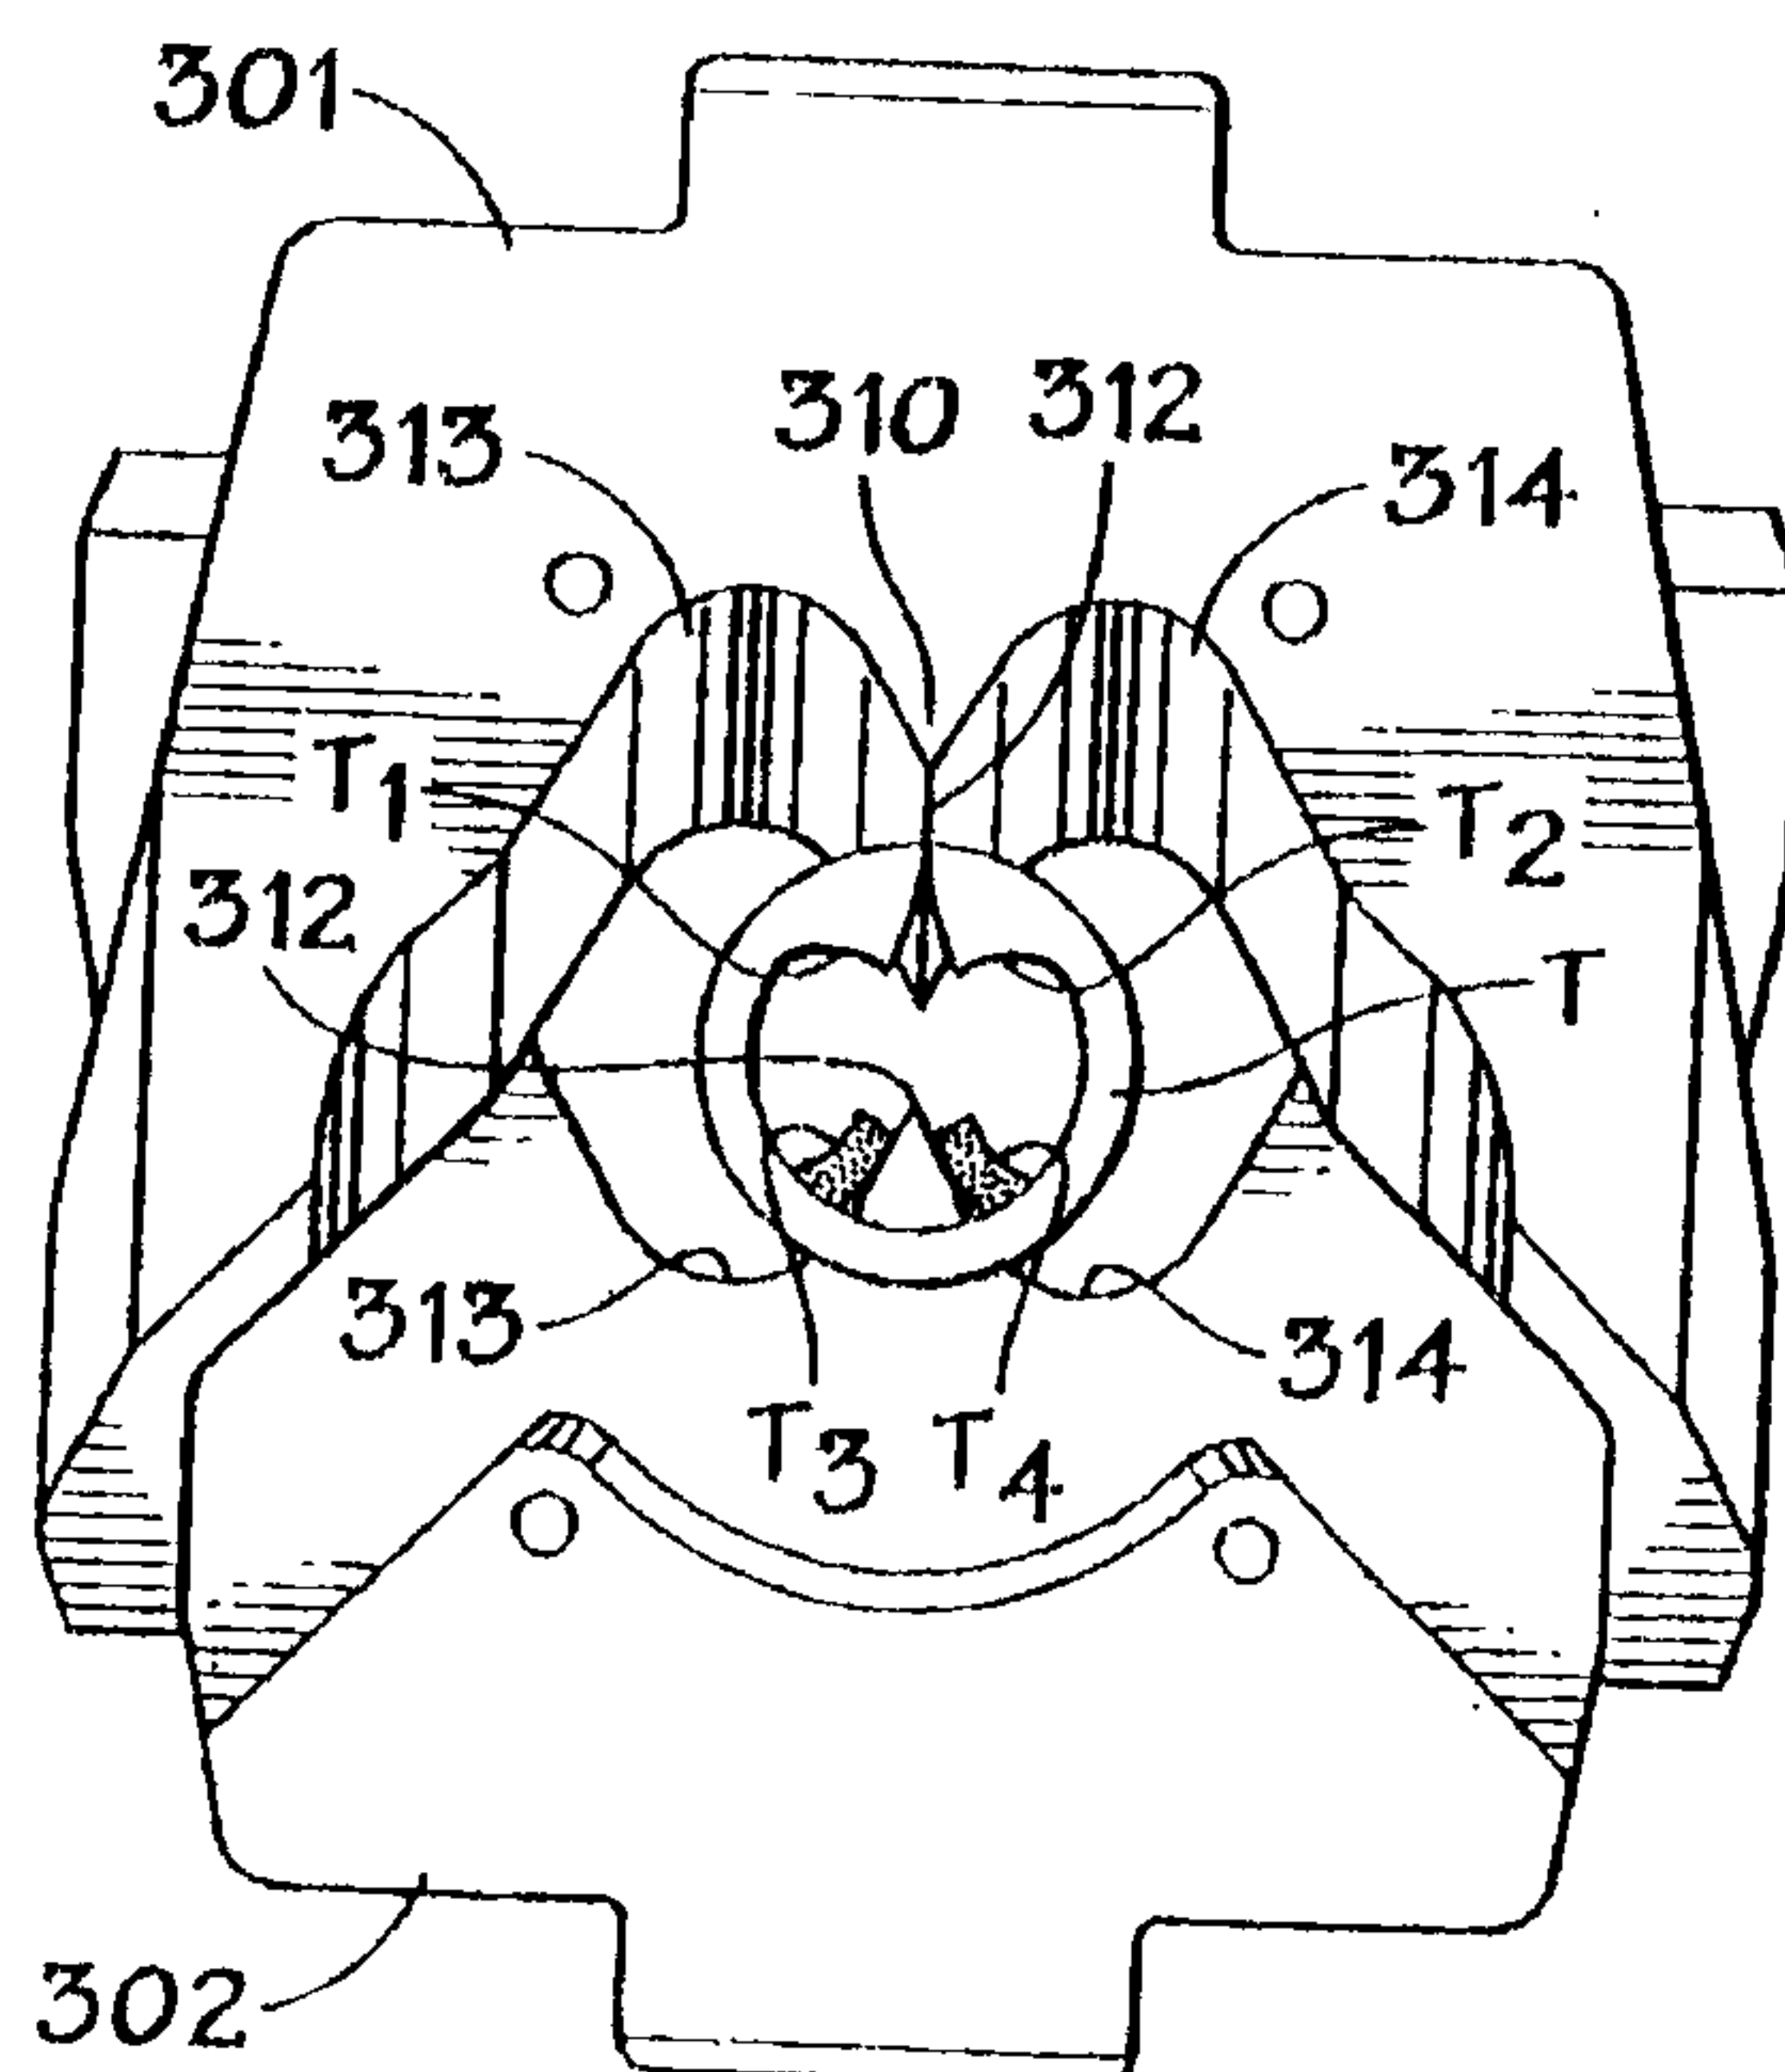


FIG. 15E



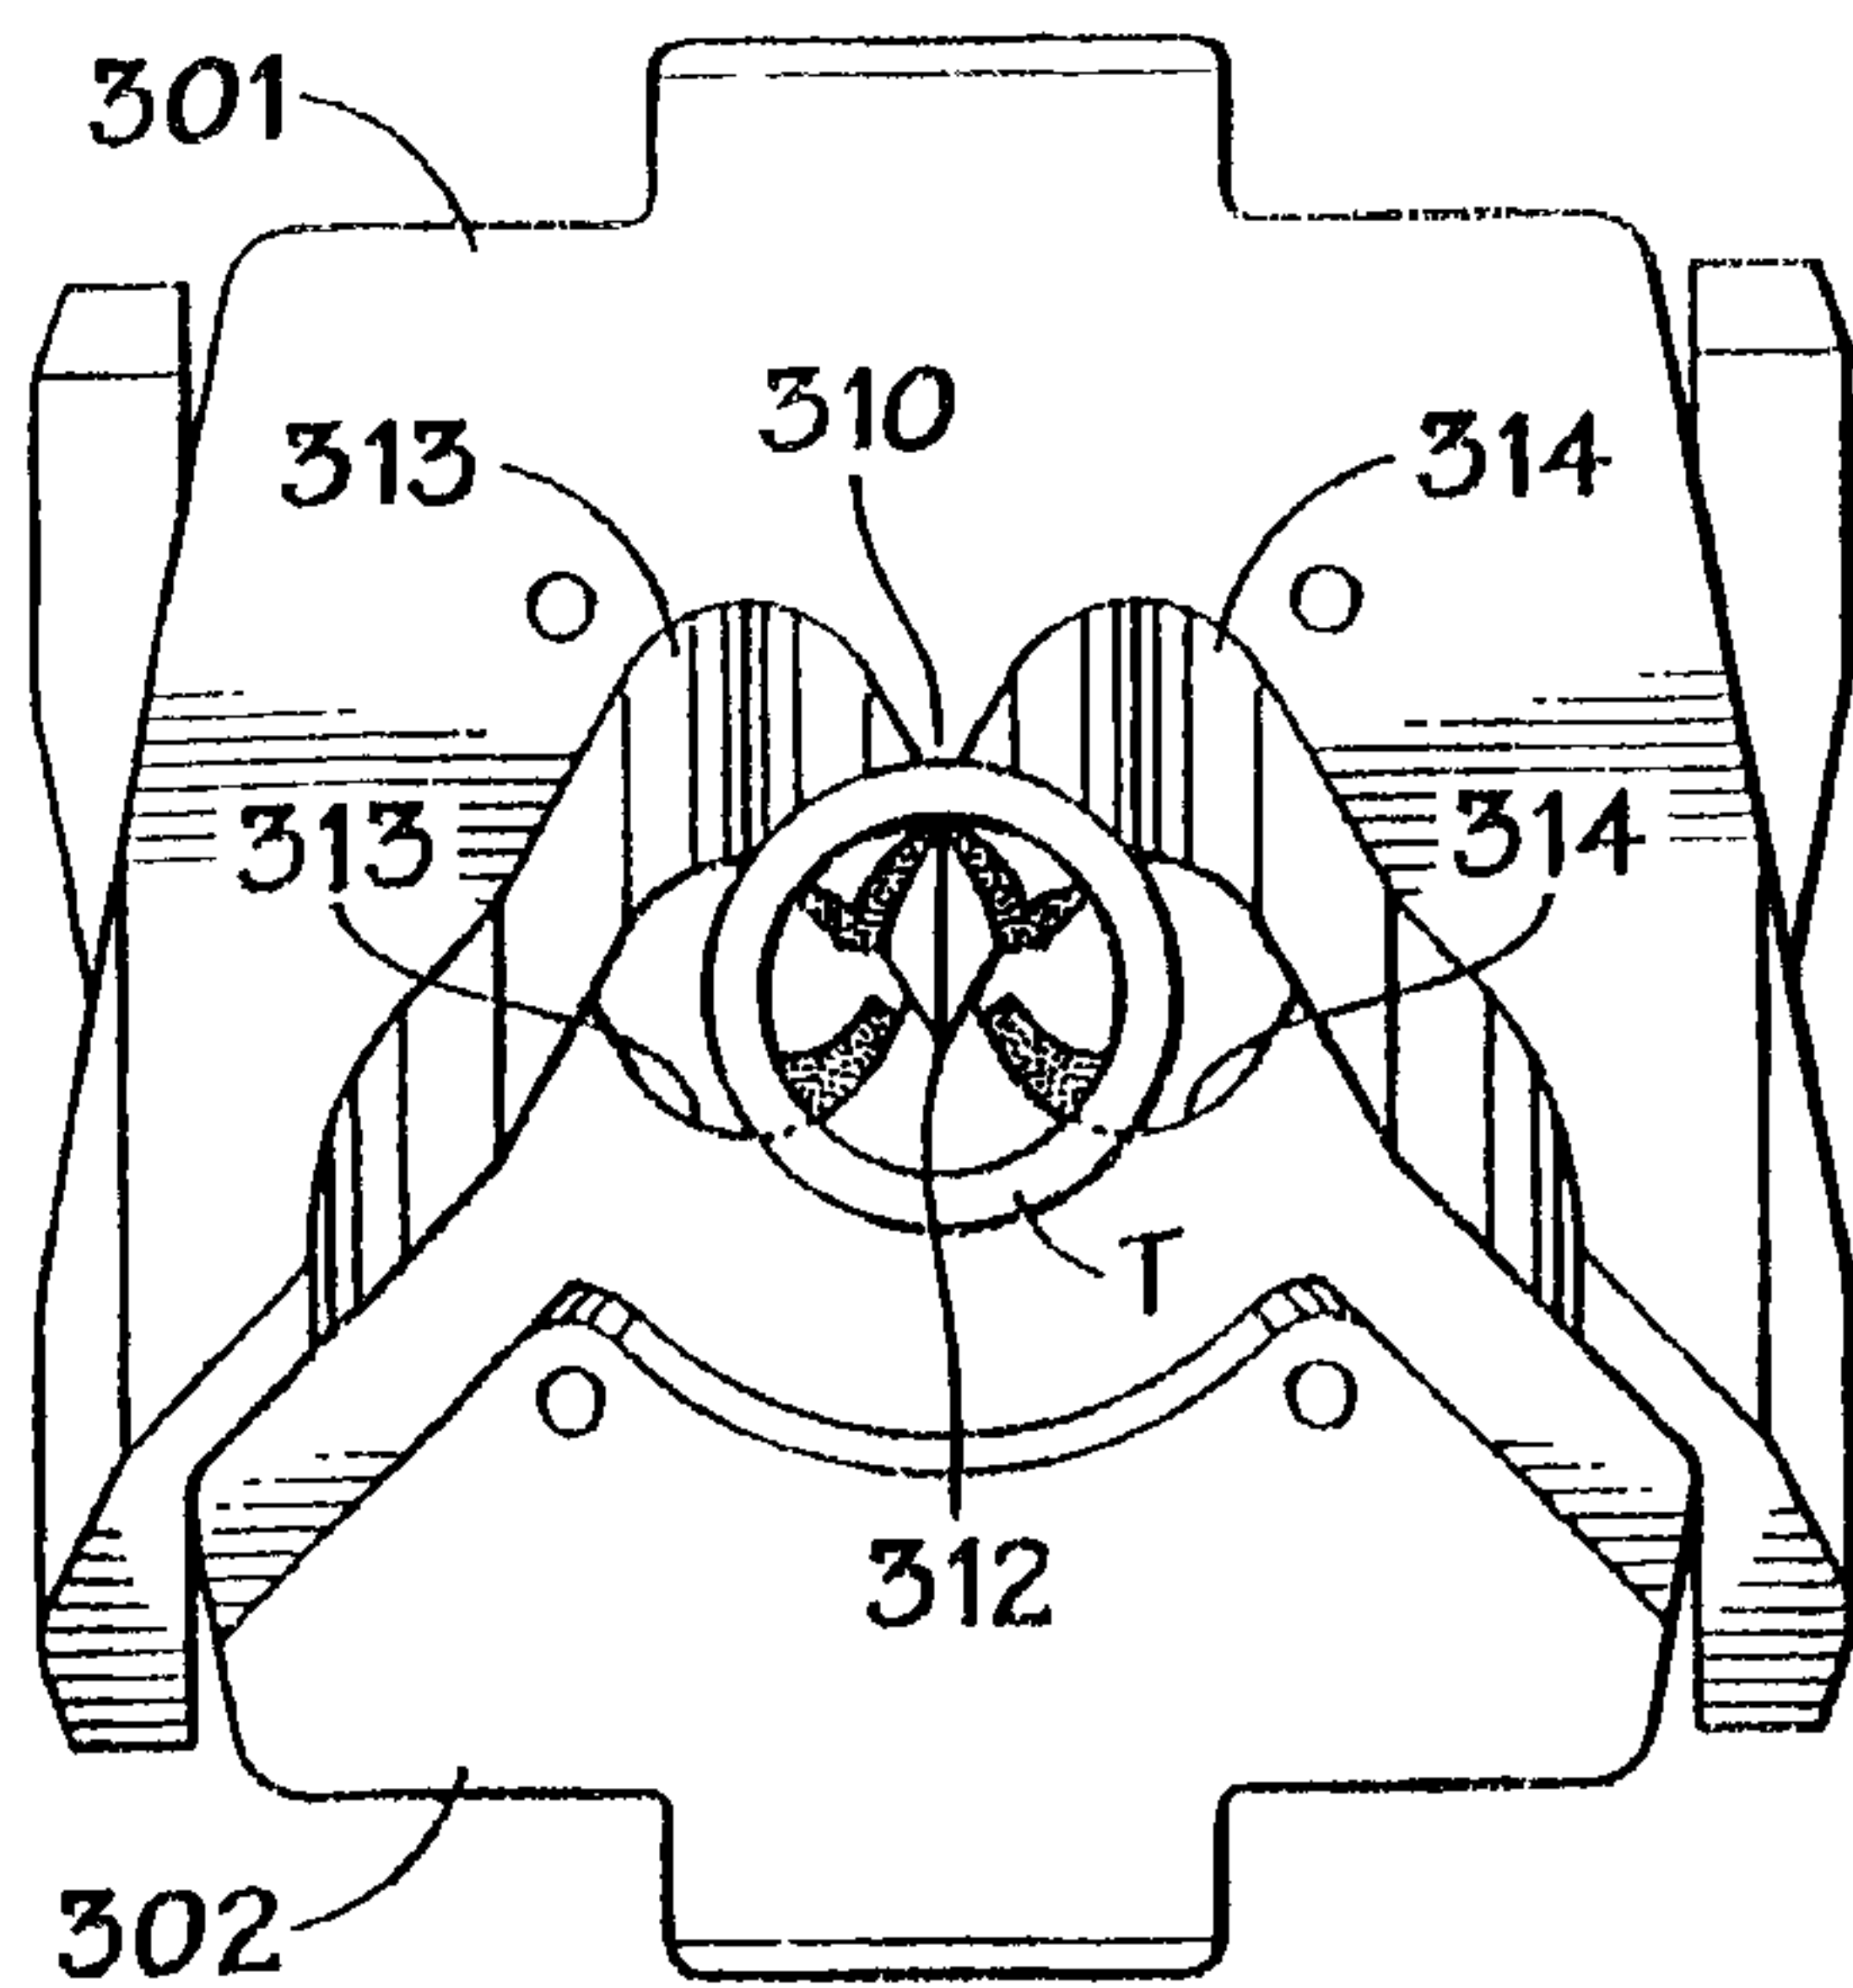


FIG. 15F

FIG. 15G

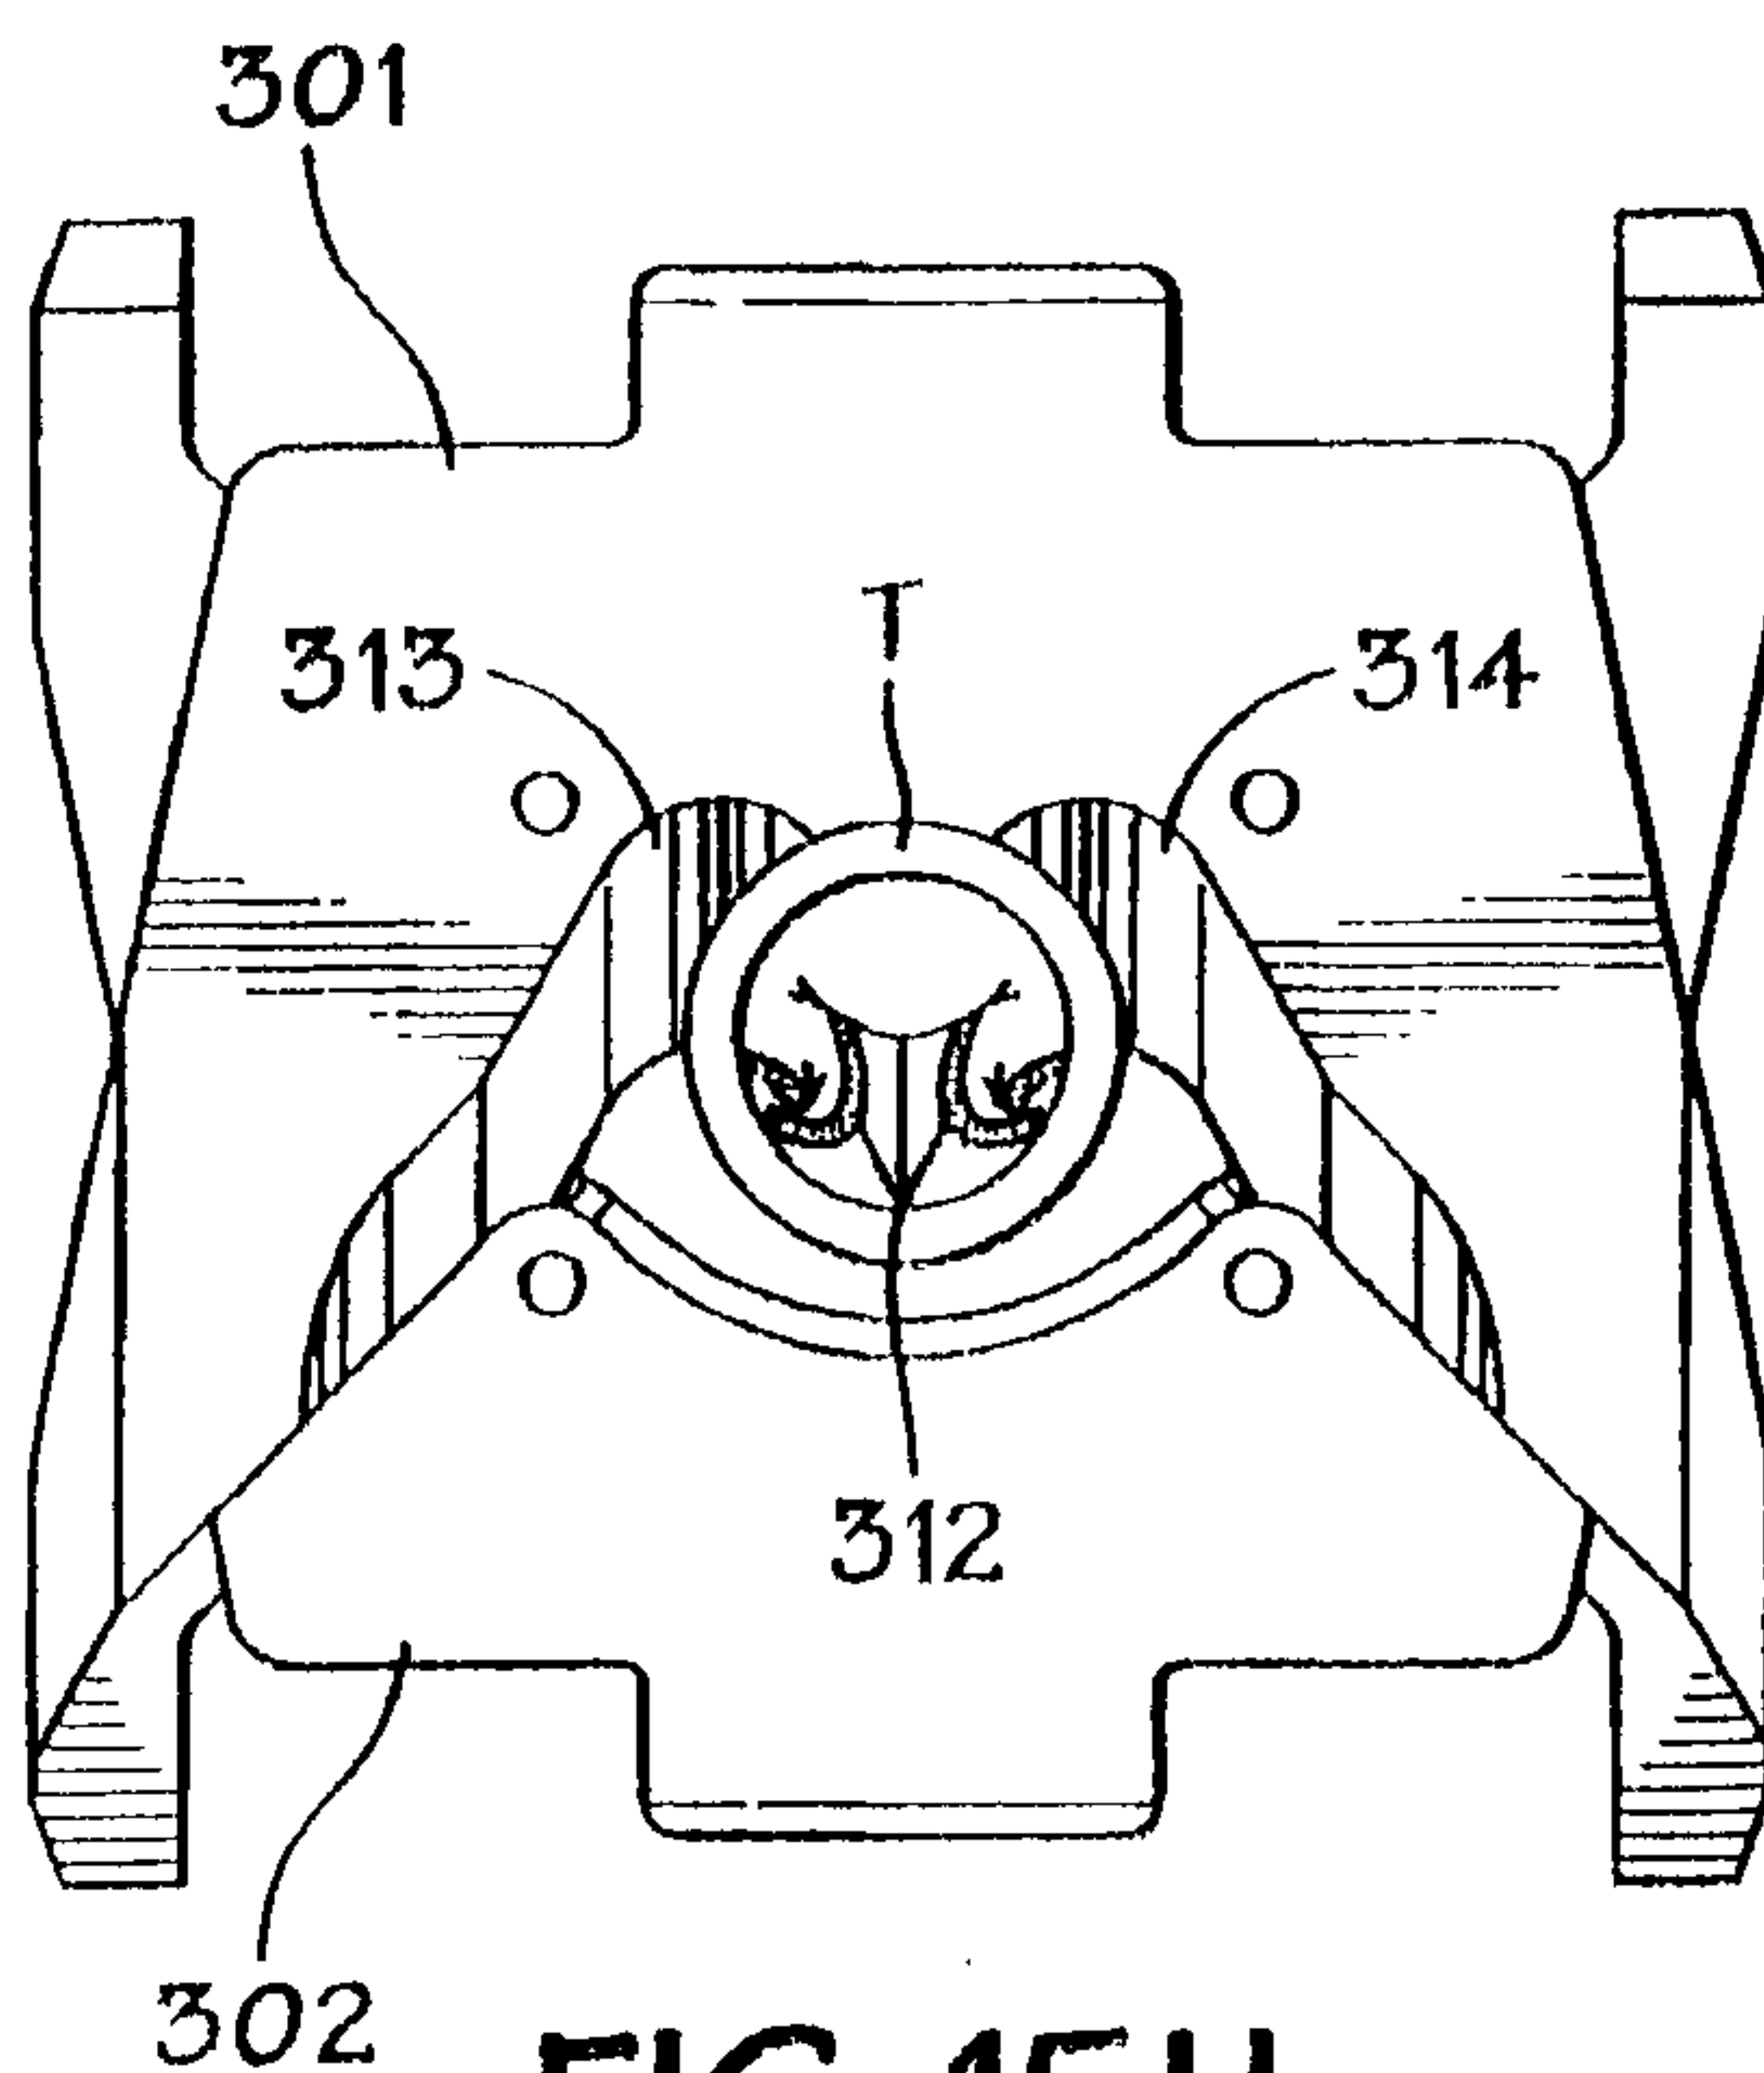
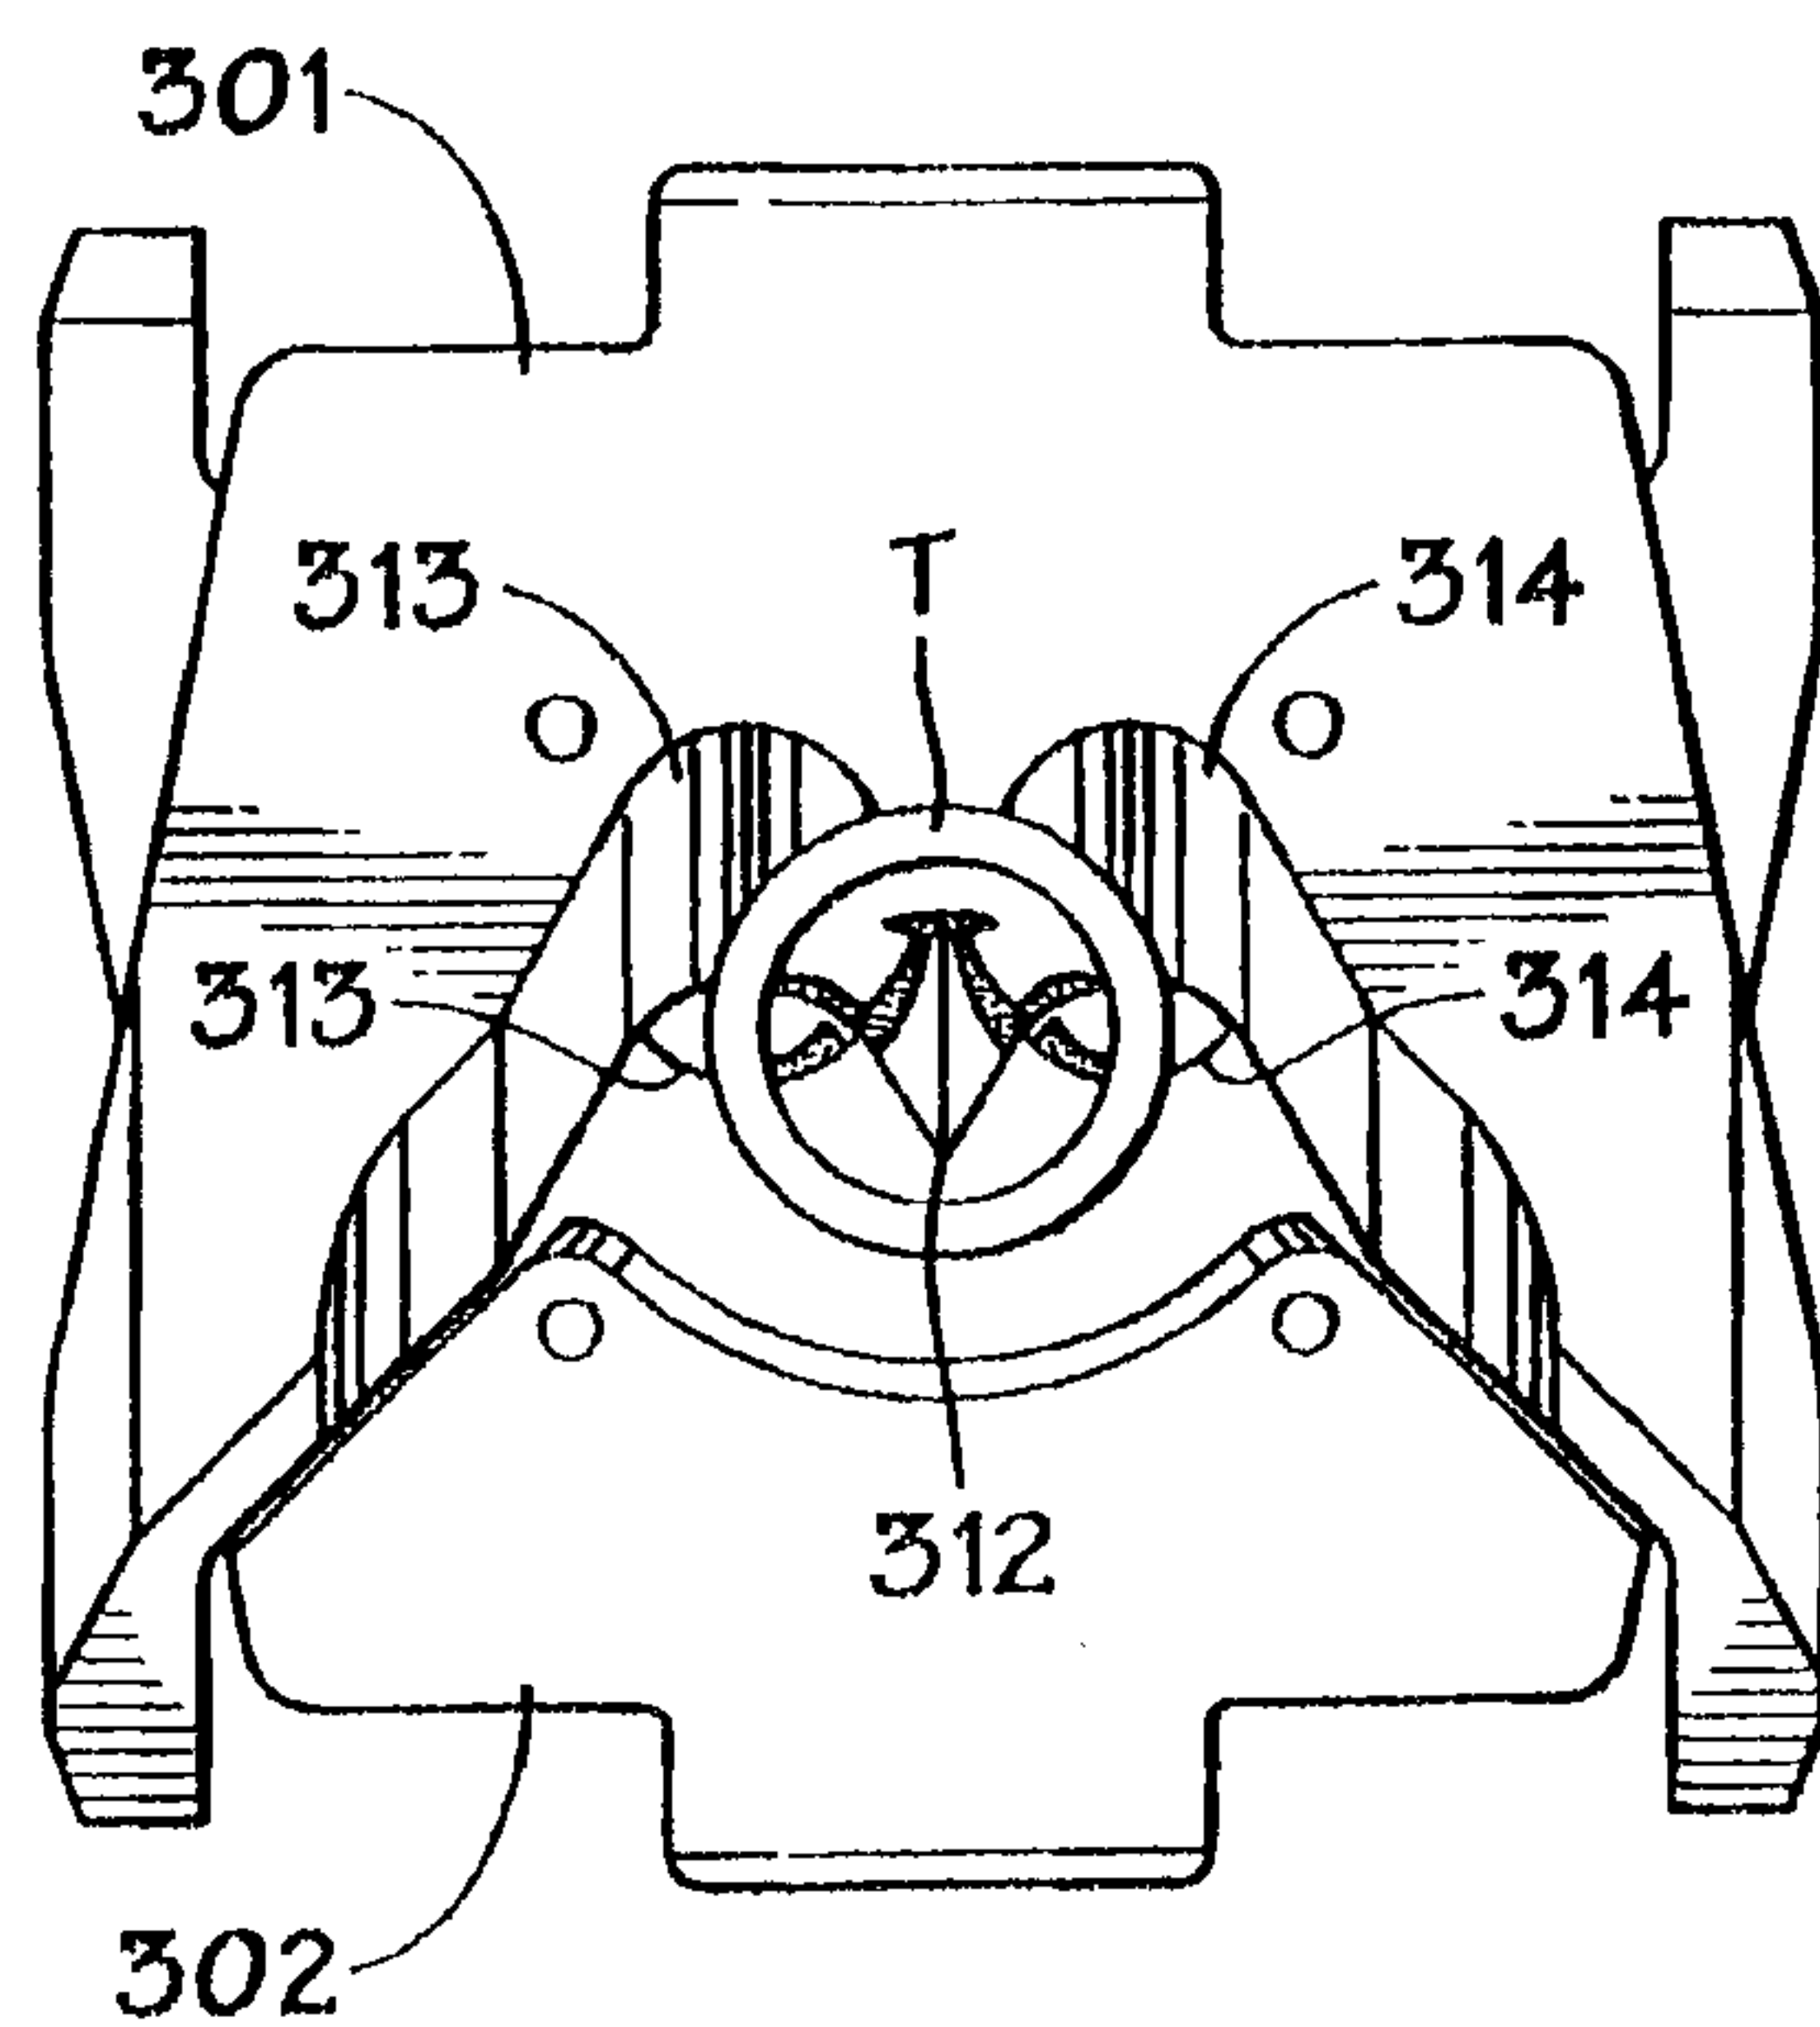


FIG. 15H

