

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2008 (21.08.2008)

PCT

(10) International Publication Number
WO 2008/100033 A1

(51) International Patent Classification:
C12M 1/36 (2006.01)

(74) Agent: SON, Min; 19th floor, City Air Tower 159-9, Sam-seong-dong, Gangnam-gu, Seoul 135-973 (KR).

(21) International Application Number:
PCT/KR2008/000688

(22) International Filing Date: 4 February 2008 (04.02.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2007-0016834

16 February 2007 (16.02.2007) KR

(71) Applicant (for all designated States except US): **KOREA UNIVERSITY INDUSTRIAL & ACADEMIC COLLABORATION FOUNDATION** [KR/KR]; 1, Anam-dong 5-ga, Seongbuk-gu, Seoul 136-701 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEE, Eunil** [KR/KR]; 101-1004 Hyundai Family Apt., 59-3, Jamwon-dong, Seocho-gu, Seoul 137-907 (KR). **OH, Sangnam** [KR/KR]; 202-303, Daelim 2-cha Apt., Seongnae 2-dong, Gangdong-gu, Seoul 134-032 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(54) Title: PRESSURE CONTROLLABLE INCUBATION SYSTEM

[Fig. 1]

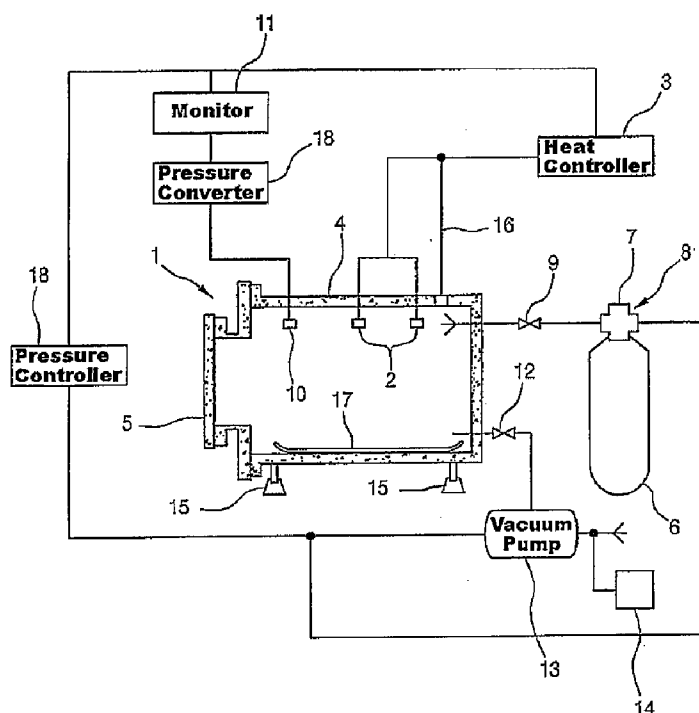

(57) Abstract: A pressure controllable incubation apparatus is provided for constantly maintaining a concentration of carbon dioxide while keeping a pressure chamber, in which living organisms to be cultured are placed, at a pressure higher than atmospheric pressure. The pressure controllable incubation apparatus comprises a bomb that stores air containing 5 to 10 wt.% of carbon dioxide to be injected into a pressure chamber and supplies the air into the pressure chamber, and a heat controller that constantly maintains temperature in the pressure chamber. The pressure controllable incubation system constantly maintains culture conditions such as pressure, temperature, and concentration of carbon dioxide which the user wants for a long time, so that it can be effectively applied to the culture of various living organisms.

Description

PRESSURE CONTROLLABLE INCUBATION SYSTEM

Technical Field

- [1] The present invention relates generally to a pressure controllable incubation system. More particularly, the present invention relates to a pressure controllable incubation system capable of constantly maintaining a concentration of carbon dioxide while keeping a pressure chamber, in which living organisms to be cultured are placed, at a pressure higher than atmospheric pressure.

[2]

Background Art

- [3] Such an incubation system is applied to a research on the diseases of the circulatory system relating to endothelial and muscular cells of blood vessels, glomerular cells, etc. of various animals cultured under pressure (about 1.2 ata) corresponding to high blood pressure of a human being, a research on the dentistry relating to alveolar bone and periodontal ligament cells, a research on the influence which mechanical and physical stimuli such as pressure exert on differentiation of incubation system is also applied to a research on hyperbaric oxygen therapy that has been used to cure injuries, hypoxia, decompression sickness, diver's disease, carbon monoxide poisoning, etc. for a long time by pressurizing 100% oxygen outside the organism at 2 through 4 ata for a short time, and a research on oxidative stress and antioxidants of cells or individuals.
- [4] In order to study biological influences which the pressure exerts on the cells or organisms such as nematodes indispensable to make this research, various conditions such as pressure, temperature, concentration of carbon dioxide, etc. must be invariably maintained. To this end, an apparatus or system for applying the pressure to the cells or organisms such as nematodes has been provided.
- [5] This related apparatus or system includes a technique of injecting 95% air and 5% carbon dioxide into a big bottle using a 25-gauge needle (Watanabe et al., Saga University in Japan, 1987), a technique of directly inserting a pressure chamber into a carbon dioxide incubator and adjusting a concentration of carbon dioxide to 5% (Kato et al., Kurume University in Japan, 1994), and so on. Further, a technique of installing a variety of lead ingots on a piston and adjusting pressure (Yamamoto et al., Osaka University in Japan, 1991) was proposed. Recently, a technique of measuring and adjusting pressure in an incubator using a solid-state sensor and a compressor at the same time (Chris Healey et al., The University of Vermont in USA, 2003) has been proposed.
- [6] Most of these related incubation systems employ the technique of applying pressure

to a chamber using an air or oil pump system and a solenoid valve, and are not suitable to meet experimental conditions for culturing the cells or organisms such as nematodes, i.e. conditions for maintaining the carbon dioxide concentration of 5% for a long time. For this reason, the related pressure controllable incubation systems for culturing living organisms have difficulty in obtaining reliable accurate results.

- [7] Further, these incubation systems are structurally complicated to increase a volume of constituents installed therein, and require careful management due to troublesome operation and frequent malfunction. Furthermore, these incubation systems are not suitable for an experiment of applying the pressure to the nematodes, which are small experimental animals having a very high value of the biological research. Thus, the influences which the pressure exerts on the organisms are merely observed within the limits of the animal cells. Consequently, the researches on the influences which the pressure exerts on the individuals make difficult progress.

[8]

[9]

Disclosure of Invention

Technical Problem

- [10] Accordingly, the present invention has been made keeping in mind the above problems occurring in the prior art, and an object of the present invention is to provide a pressure controllable incubation system, which stably maintains specific values of pressure, temperature, and concentration of carbon dioxide that are basic conditions for culturing living organisms for a long time, and provides easy operation and small volume through a compact structure.

- [11] Another object of the present invention is to provide a pressure controllable incubation system, which enables conversion into necessary culture conditions according to each target to be cultured.

[12]

Technical Solution

- [13] To accomplish the above objects, according to one aspect of the present invention, there is provided a pressure controllable incubation apparatus for culturing living organisms. The pressure controllable incubation apparatus comprises: a pressure chamber that placing the living organisms to be cultured; a bomb that is coupled with the pressure chamber, and stores air containing 5 to 10 wt.% of carbon dioxide to be injected into the pressure chamber; a vacuum pump that is coupled with the pressure chamber, and discharges the air in the pressure chamber; a heat controller that detects temperature in the pressure chamber through a temperature sensor, and supplies heat to the pressure chamber based on the detected temperature; a pressure converter that

detects pressure in the pressure chamber through a pressure sensor, and converts the detected pressure into a numerical value; and a monitor that displays the converted pressure value.

- [14] The pressure controllable incubation apparatus may further comprise: a pressure applying valve that is installed on a hose connecting the bomb and the pressure chamber, and adjusts an amount of the air containing 5 to 10 wt.% of carbon dioxide introduced into the pressure chamber; and a pressure releasing valve that is installed on a hose connecting the vacuum pump and the pressure chamber, and adjusts an amount of the air containing 5 to 10 wt.% of carbon dioxide discharged from the pressure chamber to the vacuum pump.
- [15] The pressure controllable incubation apparatus may further comprise an air heater that heats the air containing 5 to 10 wt.% of carbon dioxide introduced from the bomb into the pressure chamber at a predetermined temperature before the air containing 5 to 10 wt.% of carbon dioxide is introduced into the pressure chamber.
- [16] Meanwhile, the pressure chamber may comprise: a heat insulating jacket that is enclosed around the pressure chamber; a plurality of bearing legs that support the pressure chamber on a ground surface, and adjust a height of the pressure chamber with respect to the ground surface; and an openable door 5 that includes a pressure window 19 so as to be able to observe the living organisms placed in the pressure chamber.
- [17] Further, the pressure chamber may include a cylindrical chamber that has an inner diameter of 300 mm and a length of 600 mm.
- [18] Meanwhile, the heat controller may comprise a heat supply that supplies electrical energy to the pressure chamber when the temperature in the pressure chamber is lowered and increases the temperature in the pressure chamber.
- [19] The heat controller may further comprise at least one current-voltage monitor that displays values of current and voltage supplied to the pressure chamber through the heat supply.

[20]

[21]

[22]

[23]

[24]

Advantageous Effects

- [25] As can be seen from the foregoing, the pressure controllable incubation system according to an embodiment of the present invention constantly maintains culture conditions such as pressure, temperature, concentration of carbon dioxide, etc. which

the user wants for a long time, so that it can be effectively applied to the culture of various living organisms. Further, the inventive pressure controllable incubation system stores the air containing high-concentration carbon dioxide that is calculated and prepared at a desired concentration in one bomb, and injects the stored air into the pressure chamber, so that it can adjust the concentration of carbon dioxide and the air pressure at the same time. Furthermore, the inventive pressure controllable incubation system makes use of the heat controller operated with electric energy, so that it can perform precise temperature adjustment. The inventive pressure controllable incubation system employs the pressure chamber having the shape of a small cylinder, so that it can be operated in a narrow place. In addition, with the inventive pressure controllable incubation system, the culture of the living organisms for the research influencing the human body can be effectively performed at the level of high blood pressure, so that the technical development of related research fields can be induced

[26]

Brief Description of the Drawings

[27] The above and other objects, features and other advantages of the present invention will be more clearly understood from the following detailed description when taken in conjunction with the accompanying drawings, in which:

[28] FIG. 1 is a layout view illustrating a pressure controllable incubation apparatus according to an embodiment of the present invention;

[29] FIG. 2 is a perspective view illustrating a pressure chamber of the pressure controllable incubation apparatus of FIG. 1;

[30] FIG. 3 is a perspective view illustrating a bomb of the pressure controllable incubation apparatus of FIG. 1;

[31] FIG. 4 is a perspective view illustrating a heat controller and a monitor of the pressure controllable incubation apparatus of FIG. 1;

[32] FIG. 5 is a graph illustrating pressure over time in a pressure chamber while the pressure controllable incubation apparatus of FIG. 1 is operated; and

[33] FIG. 6 is a graph illustrating temperature over time in a pressure chamber while the pressure controllable incubation apparatus of FIG. 1 is operated.

[34]

Best Mode for Carrying Out the Invention

[35] Hereinafter, a pressure controllable incubation apparatus according to an embodiment of the present invention will be described in detail with reference to the accompanying drawings.

[36] Referring to FIG. 1, the pressure controllable incubation apparatus according to an embodiment of the present invention comprises a pressure chamber 1 in which living

organisms to be cultured are placed, a bomb 6 that stores air containing high-concentration carbon dioxide injected into the pressure chamber 1 and is connected with the pressure chamber 1, a vacuum pump 13 that is connected with the pressure chamber 1 and discharges the air in the pressure chamber 1, a heat controller 3 that detects an internal temperature of the pressure chamber 1 through at least one temperature sensor 2 and applies heat to the pressure chamber 1, a pressure converter 18 that converts the internal pressure of the pressure chamber 1 which is measured by a pressure sensor 10 into a numerical value, and a monitor 11 that displays the converted pressure value. Further, the pressure controllable incubation system includes a carbon dioxide sensor 14 that detects a concentration of carbon dioxide in the air pumped by the vacuum pump 13.

[37] The pressure chamber 1 includes at least one tray 20 that contains the living organisms to be cultured, and a drain tray 17 that adjusts moisture in the pressure chamber 1 (see FIG. 2).

[38] Further, both the temperature sensor 2 for measuring the temperature in the pressure chamber 1 and the pressure sensor 10 are installed in the pressure chamber 1. And they are each connected with the heat controller 3 and the pressure converter 18 through a temperature sensor coupler 2' and a pressure sensor coupler 10' which communicate with the outside of the pressure chamber 1 respectively (see FIG. 2), so that they provide information on the temperature and pressure in the pressure chamber 1.

[39] Herein, the temperature sensor coupler 2' and the pressure sensor coupler 10' are collectively defined as "couplers." Further, these "couplers" include a pressure applying coupler 9' and a pressure releasing coupler 12', to which hoses for connecting the bomb 6 and the vacuum pump 13 to the pressure chamber 1 are coupled. These "couplers" are preferably produced under the same standards such that they can be changed in position according to circumstances.

[40] Each "hose" refers to a pipe having an internal space in order to deliver an ordinary liquid or fluid. Although the connection between the respective constituents is plotted as a straight line in FIG. 1, the hoses are naturally used for portions where gas flows in the pressure controllable incubation apparatus according to an embodiment of the present invention, and so the description thereof will be omitted.

[41] A heat insulating jacket 4 is enclosed around the pressure chamber 1 in order to constantly maintain the internal temperature of the pressure chamber 1. Preferably, the heat insulating jacket 4 is made of silicon, and is hermetically sealed around the pressure chamber 1. However, in either case, as long as the internal temperature of the pressure chamber 1 can be prevented from being lowered due to a temperature difference between the pressure chamber 1 and the external air, any material can be used.

- [42] Referring to FIGS. 1 and 2, the pressure chamber 1 is preferably provided with an openable door 5 that includes a pressure window 19 so as to be able to observe the living organisms placed in the pressure chamber from the outside, and a plurality of bearing legs 15 that support the pressure chamber 1 on the ground surface and adjust a height of the pressure chamber 1 with respect to the ground surface.
- [43] The pressure window 19 is made of material, such as glass, having rigidity capable of sufficiently withstanding the atmospheric pressure or more. Of course, the material can be replaced with plastic. In either case, it will do if the material has transparency so as to be able to observe the inside of the pressure chamber and enough rigidity to withstand the atmospheric pressure or more, e.g. the pressure from 1 ata to 5 ata.
- [44] The door 5 is installed on one side of the pressure chamber 1, and is formed so as to be opened and closed using a hinge (not shown). Alternatively, the door 5 may be formed so as to be separated from the pressure chamber 1 without a hinge. In either case, the door 5 must be able to hermetically close the pressure chamber 1. Thus, as illustrated in FIG. 2, a plurality of fasteners 5' are preferably installed along the outer circumference of the circular door at regular intervals. The fasteners 5' can be firmly fastened using screwed bolts. Further, an elastic member (not shown) is preferably interposed between the door and the pressure chamber, and thereby the door 5 is sealed so as to prevent the air in the pressure chamber 1 from leaking out when closed.
- [45] The bearing legs 15 adjust the pressure chamber 1 with respect to the ground surface such that the pressure chamber 1 is horizontal to the ground surface. Thus, when the ground surface is uneven, the pressure chamber 1 can be horizontally maintained by adjusting the height of each bearing leg 15. As illustrated in FIG. 2, the number of bearing legs 15 is preferably set properly. Each bearing leg 15 is preferably screwed to the pressure chamber 1, so that the height thereof can be adjusted by rotation. Of course, the height of each bearing leg 15 may be adjusted using a proper physical structure other than the screwed structure. In either case, the height of each bearing leg 15 must be able to be adjusted freely.
- [46] The pressure chamber 1 is not specially limited in size. However, the pressure chamber 1 included in the pressure controllable incubation apparatus according to an embodiment of the present invention preferably has an inner diameter of 300 mm and a length of 600 mm. Further, the pressure chamber 1 has a weight of 50 kg, and thus is very lightweight compared to that of an existing incubation system. However, as a result of testing, the pressure chamber 1 could sufficiently accommodate a total of 50 culture plates having a diameter of 100 mm. In addition, the pressure chamber can be very easily moved due to the shape of a small cylinder, meet desired experimental conditions within a short time due to a volume reduced to a maximum extent, and prevent excessive consumption of energy due to reduction of an unnecessary space.

- [47] Referring to FIGS. 1 and 3, the pressure controllable incubation apparatus according to an embodiment of the present invention includes the bomb 6, an air heater 8 coupled to the bomb 6, and a pressure controller 7 coupled to the air heater 8.
- [48] The bomb 6 refers to an ordinary container used to store and transport compressed gas. The bomb 6 is stored therein with air containing high-concentration carbon dioxide.
- [49] In the related art, in order to constantly maintain a concentration of carbon dioxide as the culture conditions, ordinary air and carbon dioxide gas are separately stored, are injected into an incubator, and are mixed in the incubator. In contrast, in the present invention, air containing high-concentration carbon dioxide, which is calculated and prepared at a desired concentration, is previously stored in the bomb 6, and then is injected into the pressure chamber 1 through a hose (not shown) coupled to the pressure chamber 1, so that the carbon dioxide concentration and the air pressure can be adjusted in the pressure chamber 1 at the same time. This is based on the principle of static dilution used in preparing standard gas.
- [50] Referring to Table 1 below, in the event that the air containing carbon dioxide at a concentration of 5 to 10 wt.% is injected, the carbon dioxide concentration in the pressure chamber 1 according to various values of pressure is represented. This is ultimately to make the carbon dioxide concentration of 5%, which is a theoretical experimental value that can be adjusted within the range of $5 \pm 0.15\%$. The carbon dioxide concentration in the pressure chamber 1 can be made as shown in Table 1 by repeating injection and discharge of the air containing high-concentration carbon dioxide for a short time (about 3 minutes). In Table 1, the parts making the atmosphere absolute (ata) value with an asterisk (*) are subjected to discharge of the air containing high-concentration carbon dioxide in order to adjust the pressure after the air containing high-concentration carbon dioxide is injected. Because external air can't be inflowed, so they have low experimental error in the carbon dioxide concentration and maintain pH within a stable range.
- [51] Table 1

[Table 1]

[Table]

Atmosphere Absolute(ata)	1(in chamber)	1.2*	1.2*	1.2*	1.2	InjectedGas
Bar(displayed pressure)	0	0.203	0.203	0.203	0.203	10% CO ₂ + 90% air (O ₂ 18.9% + N ₂ 70.2%) pH range:7.4±0.2)
CO ₂ (%)	0.030	1.692	3.076	4.23	5.192	
O ₂ (%)	21.000	20.650	20.358	20.115	19.913	
N ₂ (%)	78.000	76.700	75.617	74.714	73.962	
Balance(%)	0.970	0.958	0.949	0.941	0.934	
Total	100.000	100.000	100.000	100.000	100.000	
Atmosphere Absolute(ata)	1(in chamber)	1.4*	1.4			
Bar(displayed pressure)	0	0.405	0.405			
CO ₂ (%)	0.030	2.879	4.913			
O ₂ (%)	21.000	20.400	19.971			
N ₂ (%)	78.000	75.771	74.180			
Balance(%)	0.970	0.950	0.936			
Total	100.000	100.000	100.000			
Atmosphere Absolute(ata)	1(in chamber)	1.6*	1.4*	1.6		
Bar(displayed pressure)	0	0.608	0.405	0.608		
CO ₂ (%)	0.030	3.769	3.769	4.807		
O ₂ (%)	21.000	20.213	20.213	19.994		
N ₂ (%)	78.000	75.075	75.075	74.263		
Balance(%)	0.970	0.944	0.944	0.936		
Total	100.000	100.000	100.000	100.000		

Atmosphere Absolute(ata)	1(in chamber)	1.8*	1.7*	1.8		10% CO ₂ + 90% air (O ₂ 18.9% + N ₂ 70.2%) pH range:7.4±0.2
Bar(displayed pressure)	0	0.811	0.709	0.811		
CO ₂ (%)	0.030	4.461	4.461	4.965		
O ₂ (%)	21.000	20.067	20.067	19.961		
N ₂ (%)	78.000	47.533	74.533	74.139		
Balance(%)	0.970	0.939	0.939	0.935		
Total	100.000	100.000	100.000	100.000		
Atmosphere Absolute(ata)	1(in chamber)	2.0				
Bar(displayed pressure)	0	1.013				
CO ₂ (%)	0.030	5.015				
O ₂ (%)	21.000	19.950				
N ₂ (%)	78.000	74.100				
Balance(%)	0.97	0.935				
Total	100.000	100.000				
Atmosphere Absolute(ata)	1(in chamber)	2.2*	2.2*	2.2*	2.2	Injected Gas

Bar(displayed pressure)	0	1.216	1.216	1.216	1.216	5% CO ₂ + 95% air (O ₂ 19.9% + N ₂ 74.1%) pH range:7.3±0.2
CO ₂ (%)	0.030	2.741	3.973	4.533	4.788	
O ₂ (%)	21.000	20.427	20.167	20.049	19.995	
N ₂ (%)	78.000	75.873	74.906	74.466	74.266	
Balance(%)	0.97	0.959	0.954	0.952	0.951	
Total	100.000	100.000	100.000	100.000	100.000	
Atmosphere Absolute(ata)	1(in chamber)	2.4*	2.4*	2.4*	2.4	
Bar(displayed pressure)	0	1.419	1.419	1.419	1.419	
CO ₂ (%)	0.030	2.929	4.137	4.640	4.850	
O ₂ (%)	21.000	20.388	20.132	20.026	19.982	
N ₂ (%)	78.000	75.725	74.777	74.382	74.218	
Balance(%)	0.970	0.958	0.953	0.951	0.951	
Total	100.000	100.000	100.000	100.000	100.000	
Atmosphere Absolute(ata)	1(in chamber)	2.6*	2.6*	2.6*	2.6	
Bar(displayed pressure)	0	1.621	1.621	1.621	1.621	
CO ₂ (%)	0.030	3.088	4.265	4.717	4.891	
O ₂ (%)	21.000	20.354	20.105	20.010	19.973	
N ₂ (%)	78.000	75.600	74.677	74.322	74.185	
Balance(%)	0.970	0.958	0.953	0.951	0.950	
Total	100.000	100.000	100.000	100.000	100.000	

Atmosphere Absolute(ata)	1(in chamber)	2.8*	2.8*	2.8*	2.8	5% CO ₂ + 95% air (O ₂ 19.9% + N ₂ 74.1%) pH range:7.3±0.2
Bar(displayed pressure)	0	1.824	1.824	1.824	1.824	
CO ₂ (%)	0.030	3.255	4.366	4.774	4.919	
O ₂ (%)	21.000	20.325	20.084	19.998	19.967	
N ₂ (%)	78.000	75.493	74.597	74.278	74.163	
Balance(%)	0.970	0.957	0.953	0.951	0.950	
Total	100.000	100.000	100.000	100.000	100.000	
Atmosphere Absolute(ata)	1(in chamber)	3*	3*	3*	3	
Bar(displayed pressure)	0	2.027	2.027	2.027	2.027	
CO ₂ (%)	0.030	3.343	4.448	4.816	4.939	
O ₂ (%)	21.000	20.300	20.067	19.989	19.963	
N ₂ (%)	78.000	75.400	74.533	74.244	74.148	
Balance(%)	0.970	0.957	0.952	0.951	0.950	
Total	100.000	100.000	100.000	100.000	100.000	

- [52] Referring to FIGS. 1 and 2, the air containing high-concentration carbon dioxide is injected from the bomb 6 into the pressure chamber 1 through the hose (not shown) connecting the bomb 6 and the pressure chamber 1.
- [53] A pressure applying valve 9 is installed on a hose (not shown) coupled to the pressure applying coupler 9' so that it can adjust an amount of the air containing high-concentration carbon dioxide introduced into the pressure chamber 1.
- [54] A pressure releasing valve 12 is installed on a hose (not shown) coupled to the pressure releasing coupler 12', so that it can adjust an amount of the air in the pressure chamber 1 released to the vacuum pump 13.
- [55] A pressure applying valve 9 and a pressure releasing valve 12 are controlled to maintain the pressure of the pressure chamber 1 to 1~3 bar.
- [56] The pressure in the pressure chamber 1 is measured by the pressure sensor 10, is converted into a numerical value by the pressure converter 18, and is displayed on the monitor 11. Here, the pressure converter 18 can be interpreted as including the

pressure sensor 10.

- [57] The monitor 11 refers to a device that converts the numerical value converted by the pressure converter 18 into an electrical signal and then displays the electrical signal into a symbol such as a figure which the user can recognize. As illustrated in FIG. 4, the monitor 11 can be independent of the heat controller 3, or be integrated with the heat controller 3. Alternatively, the monitor 11 may also perform the function of a current-voltage monitor.
- [58] The user looks at the pressure value displayed on the monitor 11 to adjust the pressure applying valve 9 and the pressure releasing valve 12, so that he/she can set the pressure in the pressure chamber 1 to a proper value. Of course, in the event that the pressure applying valve 9, the pressure releasing valve 12, the pressure converter 18, the pressure sensor 10, and the monitor 11 are connected to a controller (not shown) having electronic circuitry, this can be established into an automatic control system in which, when a pressure value (target value) to be set is input, the target value can be automatically adjusted to a change in pressure.
- [59] Referring to FIG. 3 again, the air containing high-concentration carbon dioxide supplied from the bomb 6 passes through the air heater 8 prior to the injection into the pressure chamber 1 such that it can be pre-heated to meet an optimal temperature condition (e.g. 37°C) of the living organisms that will be placed and cultured in the pressure chamber 1. The air heater 8 is powered to maintain a stable temperature in connection with the heat controller 3. Of course, the electrical energy may be replaced by another type of energy such as chemical energy. Preferably, in order to accurately adjust a proper temperature which the user wants, an electronic circuitry based control system capable of uniformly controlling current and voltage of supplied electrical energy is used.
- [60] The pressure controller 7 functions to introduce the supplied air containing high-concentration carbon dioxide into the pressure chamber 1 while constantly maintaining the pressure of the supplied air. This pressure controller 7 can make use of an existing pressure regulator, or the like.
- [61] Referring to FIG. 4, the heat controller 3 includes a heat supply 16 (see FIG. 1) that supplies electrical energy to the pressure chamber 1 when the temperature in the pressure chamber 1 is lowered and thus increases the temperature in the pressure chamber 1, and at least one current-voltage monitor 21 that displays values of current and voltage supplied to the pressure chamber through the heat supply.
- [62] The temperature sensor 2 is installed in the pressure chamber 1 through the temperature sensor coupler 2', detects the temperature in the pressure chamber 1, and transmits the detected temperature to the heat controller 3.
- [63] The heat controller 3 determines whether the temperature in the pressure chamber 1

is higher or lower than a fixed temperature (e.g. 37°C) which the user wants on the basis of the information transmitted from the temperature sensor 2. In that case, the heat controller 3 blocks or increases the electrical energy supplied to the pressure chamber 1 through the heat supply 16, thereby constantly maintaining the temperature in the pressure chamber 1.

[64] The heat supply 16 includes a heat supply line 16', which is connected between the heat controller 3 and the pressure chamber 1. The pressure chamber 1 can be provided with an electric resistor (not shown) so as to supply heat thereto. Thereby, the supplied electrical energy can be converted into thermal energy.

[65] Because the heat controller 3 is equipped with the current-voltage monitor 21 capable of displaying the values of the current and voltage supplied through the heat supply line, the user can adjust the heat controller so as to supply proper current and voltage. Of course, in order to automatically maintain the target temperature that is preset in the pressure chamber 1 by the user, use may be made of a control system of allowing the heat controller 3 to receive the temperature detected by the temperature sensor 2 and to automatically control the electrical energy to be supplied to the pressure chamber 1 through the heat supply 16 when the received temperature is higher or lower than the target temperature.

[66] In the embodiment of the present invention, the temperature in the pressure chamber 1 was $37.1 \pm 0.33^\circ\text{C}$ with respect to the temperature of 37°C set by the user, and thus shown a slight change and a very stable state. Furthermore, after the air of 2 ata is injected into the pressure chamber 1, the pressure controllable incubation system according to the present invention is continuously operated for 2 to 3 weeks. Even in this case, the temperature and pressure in the pressure chamber 1 are constantly maintained.

[67] Referring to FIGS. 5 and 6, it can be found that the temperature and pressure in the pressure chamber 1 are constantly maintained while the pressure controllable incubation apparatus according to an embodiment of the present invention is operated. Especially, it can be found that the pressure chamber maintains 2 ata for a long time of 40 hours or more, reaches the target temperature of 37°C within 30 minutes after operated, and maintains a uniform temperature for a long time.

[68] The pressure controllable incubation apparatus according to an embodiment of the present invention can be used to culture *caenorhabditis elegans* (nematode), which is simple in the structure of an individual and is treated as an important experimental animal because the equivalence to a human gene is highly estimated. This *caenorhabditis elegans* is cultured at a temperature of 25°C without carbon dioxide. For this reason, in order to culture the *caenorhabditis elegans*, the temperature in the pressure chamber 1 is maintained at 25°C , and the bomb 6 filled with the ordinary air rather

than the air containing high-concentration carbon dioxide is coupled to the pressure chamber 1, and injects the air until the pressure chamber 1 reaches a desired pressure value. At this time, the air heater 8 is not operated. In this manner, the pressure controllable incubation system according to an embodiment of the present invention can easily make various experimental conditions according to various targets to be cultured.

[69] Although an exemplary embodiment of the present invention has been described for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

[70]

Claims


- [1] A pressure controllable incubation apparatus for culturing living organisms, comprising:
a pressure chamber that placing the living organisms to be cultured;
a bomb that is coupled with the pressure chamber, and stores air containing 5 to 10 wt.% of carbon dioxide to be injected into the pressure chamber;
a vacuum pump that is coupled with the pressure chamber, and discharges the air in the pressure chamber;
a heat controller that detects temperature in the pressure chamber through a temperature sensor, and supplies heat to the pressure chamber based on the detected temperature;
a pressure converter that detects pressure in the pressure chamber through a pressure sensor, and converts the detected pressure into a numerical value; and
a monitor that displays the converted pressure value.
- [2] The pressure controllable incubation apparatus as claimed in claim 1, further comprising:
a pressure applying valve that is installed on a hose connecting the bomb and the pressure chamber, and adjusts an amount of the air containing 5 to 10 wt.% of carbon dioxide introduced into the pressure chamber; and
a pressure releasing valve that is installed on a hose connecting the vacuum pump and the pressure chamber, and adjusts an amount of the air that is released from the pressure chamber to the vacuum pump.
- [3] The pressure controllable incubation apparatus as claimed in claim 1, further comprising an air heater that heats the air containing 5 to 10 wt.% of concentration carbon dioxide introduced from the bomb into the pressure chamber at a predetermined temperature before the air is introduced into the pressure chamber.
- [4] The pressure controllable incubation apparatus as claimed in claim 1, wherein the pressure chamber comprises:
a heat insulating jacket that is enclosed around the pressure chamber in order to maintain the internal temperature of the pressure chamber ;
a plurality of bearing legs that support the pressure chamber on a ground surface, and adjust a height of the pressure chamber with respect to the ground surface; and
an openable door that includes a pressure window so as to be able to observe the living organisms placed in the pressure chamber.
- [5] The pressure controllable incubation apparatus as claimed in claim 4, wherein

the pressure chamber includes a cylindrical chamber that has an inner diameter of below 300 mm and a length of below 600 mm.


- [6] The pressure controllable incubation apparatus as claimed in claim 1, wherein the heat controller comprises a heat supply that supplies electrical energy to the pressure chamber when the temperature in the pressure chamber is lowered and increases the temperature in the pressure chamber.

- [7] The pressure controllable incubation apparatus as claimed in claim 6, wherein the heat controller further comprises at least one current-voltage monitor that displays values of current and voltage supplied to the pressure chamber through the heat supply.


[Fig. 1]

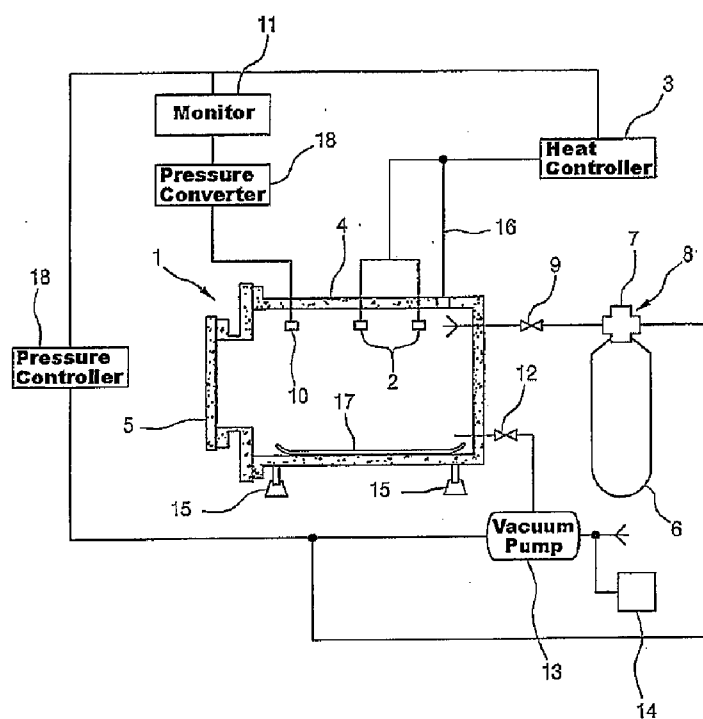


[Fig. 2]

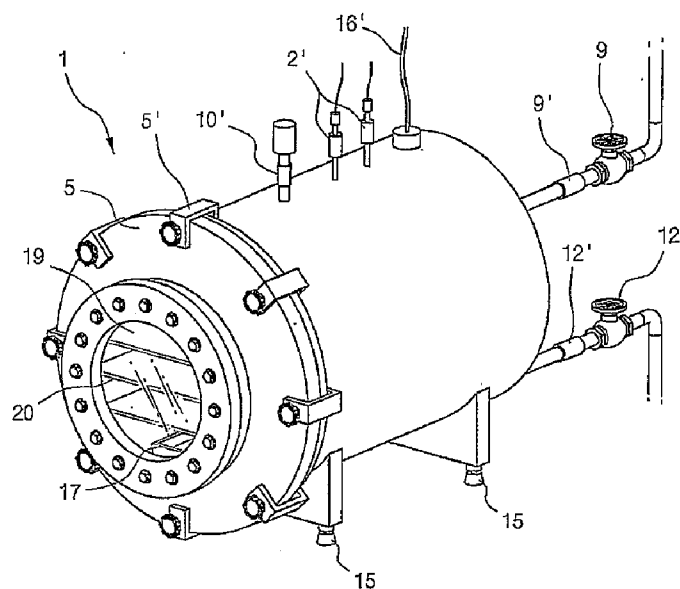


[Fig. 3]

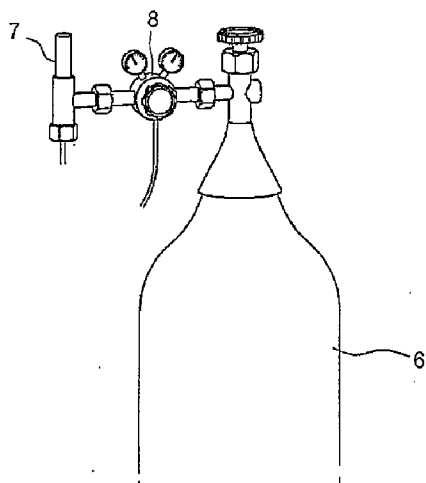


[Fig. 4]

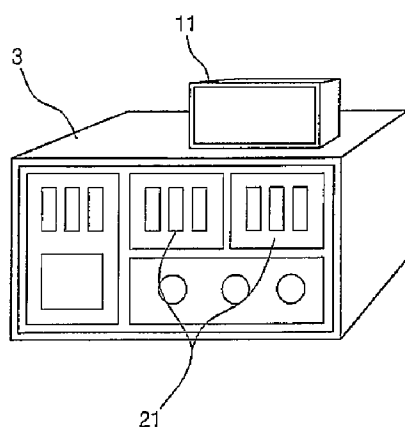

[Fig. 5]

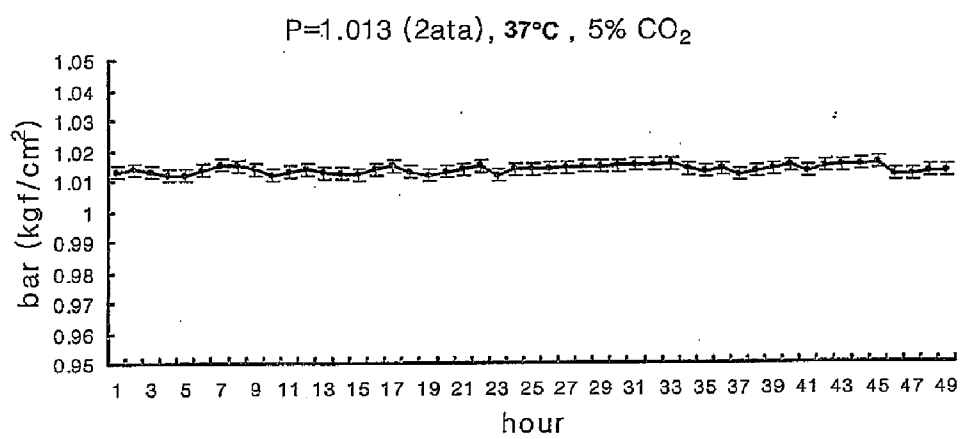

[Fig. 6]

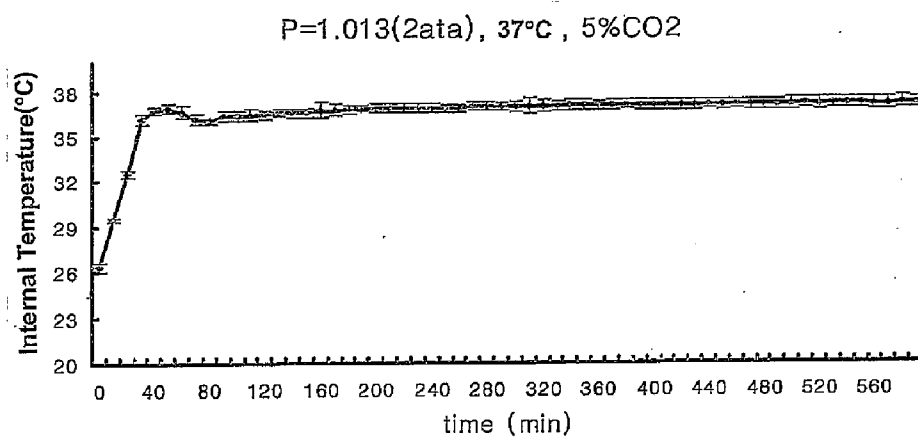

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2008/000688**A. CLASSIFICATION OF SUBJECT MATTER***C12M 1/36(2006.01)i*

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 8: C12M 1/36, C12M 3/00, C12M 1/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKIPASS(KIPO internal), ScienceDirect (pressure, control, incubation, culture, animal cell, carbon dioxide, and similar terms)**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KR100425779 B1 (SUL, D.G.) 01 APRIL 2004 See Abstract, Figure 1, Claims 1-5.	1-7
A	US20060057712 A1 (YAMASHITA, K. & ISHIKAWA, T.) 16 MARCH 2006 See Abstract, Figure 15.	1-7
A	KR1019890004805 B1 (KIYOSHI, K. et al.) 27 NOVEMBER 1989 See Figures 1 & 2, Claims 1-3.	1-7
A	JP05000077 A (SANYO ELECTRIC CO.) 08 JANUARY 1993 See the entire document.	1-7

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

07 APRIL 2008 (07.04.2008)

Date of mailing of the international search report

07 APRIL 2008 (07.04.2008)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 139 Seonsa-ro, Seo-
gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

JEONG, JAE CHEOL

Telephone No. 82-42-481-8385



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2008/000688

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR100425779B1	18.07.2003	NONE	
US2006057712A1	16.03.2006	EP1619240A1 W02004090092A1 JP2004305137A	25.01.2006 21.10.2004 04.11.2004
KR1019890004805B1	01.06.1988	CN87106371A DE3786213C0 DE3786213T2 EP0260627A2 EP0260627B1 JP06055127B4 JP63079584A2 US4833089A	27.04.1988 22.07.1993 30.09.1993 23.03.1988 16.06.1993 27.07.1994 09.04.1988 23.05.1989
JP05000077A	08.01.1993	JP03021789B2	15.03.2000