

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
27 September 2007 (27.09.2007)

PCT

(10) International Publication Number
WO 2007/109474 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2007/063971

(22) International Filing Date: 14 March 2007 (14.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/276,901 17 March 2006 (17.03.2006) US(71) Applicant (for all designated States except US): 3M
INNOVATIVE PROPERTIES COMPANY [US/US];
3M Center, Post Office Box 33427, Saint Paul, Minnesota
55133-3427 (US).(72) Inventors: SCHULTZ, John C.; 3M Center, Post Office
Box 33427, Saint Paul, Minnesota 55133-3427 (US).
O'BRYAN, Nelson B.; 3M Center, Post Office Box 33427,
Saint Paul, Minnesota 55133-3427 (US).(74) Agents: JENSEN, Stephen, C., et al.; 3M Center, Office
of Intellectual Property Counsel, Post Office Box 33427,
Saint Paul, Minnesota 55133-3427 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS,
LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ,
NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU,
SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**Declarations under Rule 4.17:**


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ILLUMINATION ASSEMBLY WITH ENHANCED THERMAL CONDUCTIVITY

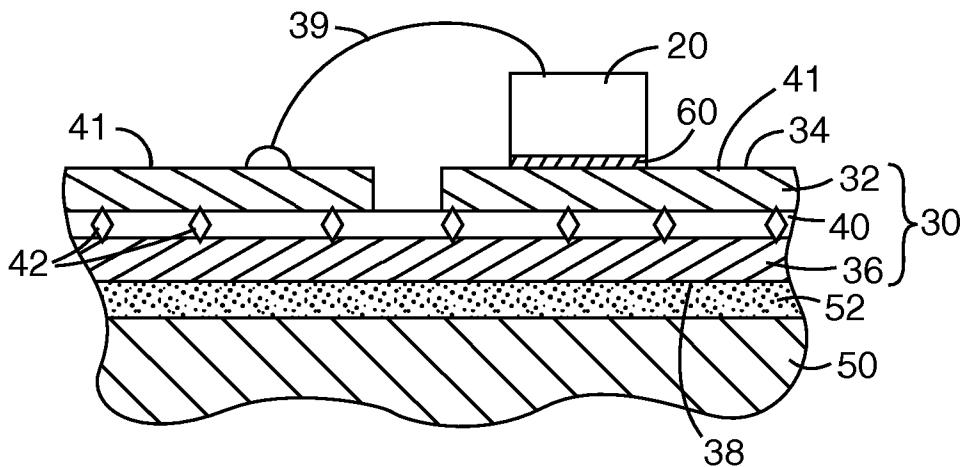

(57) **Abstract:** Illumination assemblies include a substrate having a first and second electrically conductive layer separated by an electrically insulating layer. The insulating layer includes a polymer material loaded with thermally conductive particles. At least a portion of the thermally conductive particles simultaneously contact both the first and second electrically conductive layers. A plurality of light sources such as LEDs or other miniature light sources are preferably disposed on the first conductive layer.

Illumination Assembly With Enhanced Thermal Conductivity

FIELD OF THE INVENTION

The present invention relates to electronic devices that generate substantial heat,
5 and specifically light sources such as light emitting diode (LED) devices and their use
with liquid crystal display (LCD) devices, components thereof, and related articles and
processes.

BACKGROUND

10 LEDs are a desirable choice of light source in part because of their relatively small
size, low power/current requirements, rapid response time, long life, robust packaging,
variety of available output wavelengths, and compatibility with modern circuit
construction. These characteristics may help explain their widespread use over the past
few decades in a multitude of different end use applications. Improvements to LEDs
15 continue to be made in the areas of efficiency, brightness, and output wavelength, further
enlarging the scope of potential end-use applications.

Recently, LEDs have begun to be used in illumination units for backlighting
purposes in LCD television devices, as well as other types of lighting, signage, and display
systems. For most lighting applications, it is necessary to have a plurality of LEDs to
20 supply the required light intensity. Because of their relatively small size, a plurality of
LEDs can be assembled in arrays having small dimensions and a high luminance or
irradiance particularly if unpackaged or bare die LEDs are used.

It is possible to achieve an increase in the light density of an array of LEDs by
increasing the packing density of the individual LEDs within the array. An increase in
25 packing density can be achieved by increasing the number of LEDs within the array
without increasing the space occupied by the array, or by maintaining the number of LEDs
within the array and decreasing the array dimensions. However, tightly packing large
numbers of LEDs in an array is a long term reliability concern since local heating, even
with a globally efficient thermal conduction mechanism, can reduce the lifespan of the
30 LEDs. Therefore, dissipating the heat generated by the array of LEDs becomes more
important as the packing density of the LEDs increases.

In other applications, even those without high packing densities, the driving voltages/currents, size and brightness of LED dies are increasing, leading to increases in local temperatures around the LED dies. Consequently, there is a need for better heat dissipation at the location of each LED die, as well as across the array.

5 Conventional LED mounting techniques use packages like that illustrated in U.S. Patent Application Publication 2001/0001207A1 (Shimizu et al.), that are unable to quickly transport the heat generated in the LED away from the LED. As a consequence, performance of the device is limited. More recently, thermally enhanced packages have become available, in which LEDs are mounted and wired on electrically insulating but thermally conductive substrates such as ceramics, or with arrays of thermally conductive vias (e.g., U.S. Patent Application Publication 2003/0001488A1 (Sundahl)), or use a lead frame to electrically contact a die attached to a thermally conductive and electrically conductive thermal transport medium (e.g., U.S. Patent Application Publication 2002/0113244A1 (Barnett et al.)). An illumination assembly having improved thermal properties is disclosed in U.S. Patent Application Publication 2005/0116235A1 (Schultz et al.), in which an illumination assembly includes a plurality of LED dies disposed on a substrate having an electrically insulative layer on a first side of the substrate and an electrically conductive layer on a second side of the substrate. Each LED die is disposed in a via extending through the electrically insulative layer on the first side of the substrate to the electrically conductive layer on the second side of the substrate, and each LED die is thermally and electrically connected through the via to the electrically conductive layer. The electrically conductive layer is patterned to define a plurality of electrically isolated heat spreading elements which are in turn disposed adjacent a heat dissipation assembly.

10

15

20

25

Although the more recent approaches improve the thermal properties of LED arrays, there remains a continuing need for improved thermal properties, lower cost and simpler fabrication processes.

BRIEF SUMMARY

The present application discloses, *inter alia*, illumination assemblies that include a substrate having a first and second electrically conductive layer separated by an electrically insulating layer. The insulating layer includes a polymer material loaded with thermally conductive particles. At least a portion of the thermally conductive particles simultaneously contact both the first and second electrically conductive layers. A plurality of light sources are preferably disposed on the first conductive layer. The thermally conductive particles produce a lower thermal impedance than an electrically insulating layer loaded with particles substantially smaller than the insulating layer thickness.

In exemplary embodiments, the thermally conductive particles are distributed near the LED dies. In some embodiments, the first and second electrically conductive foils and the electrically insulating layer are altered to control the optical properties of the substrate. The insulating layer may also include the same polymer material loaded with particles with a high relative dielectric constant that are in electrical contact with both electrically conducting layers. At least a portion of the dielectric particles simultaneously contact both the first and second electrically conductive layers producing a higher effective dielectric constant than could be obtained by loading the dielectric layer with particles substantially smaller than the dielectric layer thickness.

These and other aspects of the present application will be apparent from the detailed description below. In no event, however, should the above summaries be construed as limitations on the claimed subject matter, which subject matter is defined solely by the attached claims, as may be amended during prosecution.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective illustration of a portion of an illumination assembly;

FIG. 2 is a top plan view of a portion of the illumination assembly of FIG. 1, showing a larger surface area of the illumination assembly;

FIG. 3 is an enlarged cross-sectional illustration taken along line 3-3 of FIG. 2, showing uniformly distributed thermally conductive particles;

FIG. 4 is an enlarged cross-sectional illustration showing another illumination assembly having uniformly distributed thermally conductive particles;

FIGS. 5A-5C are greatly enlarged cross-sectional illustrations of embedded and deformed thermally conductive particles;

FIG. 6 is an enlarged cross-sectional illustration similar to FIG. 3, but showing non-uniformly distributed thermally conductive particles;

5 FIG. 7 is an enlarged cross-sectional illustration similar to FIG. 6, showing optional use with an encapsulant and optical film;

FIG. 8 is a schematic illustration of one method of making an illumination assembly; and

10 FIGS. 9A-9D are schematic illustrations of one method of making a substrate with enhanced thermal conductivity.

In the Figures, like reference numerals designate like elements. The Figures are idealized, not drawn to scale, and intended for illustrative purposes only.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

15 The following Description describes an illumination assembly including LED dies. In this regard, “light emitting diode” or “LED” refers to a diode that emits light, whether visible, ultraviolet, or infrared. It includes incoherent encased or encapsulated semiconductor devices marketed as “LEDs”, whether of the conventional or super radiant variety, and whether of the forward-emitting or side-emitting variety, the latter of which is often advantageous in display applications. If the LED emits non-visible light such as ultraviolet light, and in some cases where it emits visible light, it can be packaged to include an organic or inorganic phosphor (or it may illuminate a remotely disposed phosphor) to convert short wavelength light to longer wavelength visible light, in some cases yielding a device that emits white light. An “LED die” is an LED in its most basic form, i.e., in the form of an individual component or chip made by semiconductor processing procedures. For example, the LED die is ordinarily formed from a combination of one or more Group III elements and of one or more Group V elements (III-V semiconductor). Examples of suitable III-V semiconductor materials include nitrides, such as gallium nitride, and phosphides, such as indium gallium phosphide. Other types of III-V materials can be used also, as might inorganic materials from other groups of the periodic table. The component or chip can include electrical contacts suitable for application of power to energize the device. Examples include solder reflow, wire

20

25

30

bonding, tape automated bonding (TAB), or flip-chip bonding. The individual layers and other functional elements of the component or chip are typically formed on the wafer scale, and the finished wafer can then be diced into individual piece parts to yield a multiplicity of LED dies. The LED die may be configured for surface mount, chip-on-board, or other known mounting configurations. Some packaged LEDs are made by forming a polymer encapsulant formed over an LED die and an associated reflector cup.

5 Turning now to FIG. 1, a perspective view of a portion of an illumination assembly 10 is illustrated. The illumination assembly 10 includes a plurality of LED dies 20 disposed in an array on a substrate 30. LED dies 20 can be selected to emit a preferred wavelength, such as in the red, green, blue, ultraviolet or infrared spectral regions. LED dies 20 can each emit in the same spectral region, or in different spectral regions. In some 10 cases, LED dies 20 are nominally 250 μm tall.

15 Substrate 30 includes a first electrically conductive layer 32 defining a top surface 34 of the substrate, and a second electrically conductive layer 36 defining a bottom surface 38 of the substrate 30. First and second electrically conductive layers 32, 36 are separated by an electrically insulating layer 40 having enhanced thermal conductivity provided by electrically insulating, thermally conductive particles 42 (illustrated in FIGS 3-7). As 20 illustrated, first electrically conductive layer 32 is patterned to form electrical circuit traces 41, and LED dies 20 are disposed on and electrically connected to first conductive layer 32. The illustrated circuit traces 41 are exemplary only.

25 In the illumination assembly 10 of FIG. 1, LED dies 20 are of the type having electrical contacts on opposed sides of the LED die, referred to as the base and top surface of the die. The contact on the base of each LED die 20 is electrically and thermally connected to a circuit trace 41 immediately beneath the LED die 20. The contact on the top of each LED die 20 is electrically connected to another portion of circuit trace 41 by a wirebond 39 extending from LED die 20. To facilitate good wirebonding, first conductive layer 32 can include a surface metallization of nickel and gold, for example.

30 First and second electrically conductive layers 32, 36 comprise an electrically conductive material, such as a metal or conductive plastic, e.g., a polymer loaded with conductive material such as silver flakes. In exemplary embodiments, first and second electrically conductive layers 32, 36 comprise or consist essentially of a metal foil. Suitable metals include copper, aluminum, nickel, gold, silver, palladium, tin, lead, and

combinations thereof, for example aluminum clad copper foil. When first and second electrically conductive layers **32, 36** are metal, the metal preferably has an anneal temperature which is at or below the temperature for curing the polymer material of electrically insulating layer **40**, or the metal is annealed before electrically insulating layer **40** is coated.

In some embodiments, the material of first conductive layer **32** is selected to provide the desired optical properties (e.g., reflectance, color, scattering, diffraction, or a combination of these properties) for the particular application. In other embodiments, the optical properties of top surface **34** of first conductive layer **32** are enhanced by plating and/or coating to provide the desired optical properties. In some embodiments, top surface **34** is plated, and then the exposed surface of the plating is coated to improve the optical performance. Suitable coating and plating materials include silver, passivated silver, gold, rhodium, aluminum, enhanced reflectivity aluminum, copper, indium, nickel (e.g., immersion, electroless or electroplated nickel), chromium, tin, and alloys thereof. In some embodiments, a coating may comprise a white coating such as a highly reflective white polymer, e.g., Starbrite EF reflective coatings sold by Spraylat Corporation, Pelham, NY. Multilayer dielectric stacks can also be deposited on surface **34** of first electrically conductive layer **32** for enhanced reflectivity. Suitable coatings may also include metal and semiconductor oxides, carbides, nitrides, as well as mixtures and compounds thereof. These coatings may be electrically conductive or insulating depending upon the intended application. Suitable coating methods include sputtering, physical vapor deposition, and chemical vapor deposition. The coating process may optionally be ion assisted. The optical properties of conductive layer **32** and platings or coatings thereon can also be modified by controlling the surface texture of surface **34** and/or the platings and coatings described previously. For example an optically smooth surface finish may be preferred in some cases, a matte or somewhat roughened surface finish in other cases. In other embodiments, optical films, such as Vikuiti™ Enhanced Specular Reflectivity (ESR) film sold by 3M Company, may also be applied to one or both major surfaces of first electrically conductive layer **32** to increase desirable optical properties, e.g., specular or diffuse reflectivity.

Typically, first and second electrically conductive layers **32, 36** have a thickness ranging from 0.5 to 8 mils (approximately 10 to 200 μm), more preferably 0.5 to 1.5 mils

(approximately 10 to 38 μm). In some cases, it is desirable for first and second electrically conductive layers **32, 36** to each be thicker than electrically insulating layer **40**. In other cases, it is desirable for first and second electrically conductive layers **32, 36** to each or singularly be thinner than electrically insulating layer **40**. In some cases, the thickness of first electrically conductive layer **32** is approximately the same as that of second electrically conductive layer **36**. In other cases, the thickness of first electrically conductive layer **32** is different than that of second electrically conductive layer **36**. In some cases, the thickness of second electrically conductive layer **36** is greater than that of first electrically conductive layer **32**, such that second conductive layer **36** functions to more effectively spread heat laterally from the location of an LED die **20**, while permitting fine circuit features on first electrically conductive layer **32**.

Second electrically conductive layer **36** of substrate **30** is disposed adjacent a heat sink or heat dissipation assembly **50**, and is thermally coupled thereto by a layer **52** of thermal interface material. Heat dissipation assembly **50** can be, for example, a heat dissipation device, commonly called a heat sink, made of a thermally conductive metal such as aluminum or copper, or a thermally conductive electrically insulating material such as a carbon-filled polymer or combinations thereof. Layer **52** of thermal interface material may comprise any suitable material, including adhesives, greases, and solder. The thermal interface material of layer **52** may be, for example, a thermally conductive, electrically insulating adhesive such as a boron nitride loaded polymer (e.g., 3MTM Thermally Conductive Adhesive TC-2810 sold by 3M Company), or a thermally conductive, electrically conductive material such as a silver filled compound (e.g., Arctic SilverTM 5 High-Density Polysynthetic Silver Thermal Compound sold by Arctic Silver Incorporated of Visalia, Calif., U.S.A.). Preferably, heat dissipation assembly **50** has a thermal impedance as small as possible, preferably less than 1.0 $^{\circ}\text{C}/\text{W}$. In some cases, heat dissipation assembly **50** preferably has a thermal impedance in the range of 0.5 to 4.0 $^{\circ}\text{C}/\text{W}$. The material of layer **52** desirably has a thermal conductivity in the range of 0.1 to 100 $\text{W}/\text{m}\cdot^{\circ}\text{C}$, preferably at least 1 $\text{W}/\text{m}\cdot^{\circ}\text{C}$.

In one embodiment, second electrically conductive layer **36** and thermal interface material of layer **52** are eliminated, such that electrically insulating layer **40** is in direct contact with heat dissipation assembly **50**.

The pattern of first conductive layer **32** of FIG. 1 is best seen in FIG. 2. As described above, first conductive layer **32** is patterned to define a plurality of circuit traces **41**. Each circuit trace **41** is positioned for electrical and thermal coupling to an associated LED die **20** and also to an associated wirebond **39**, such that at least some LED dies **20** are 5 electrically connected in series, in parallel or combinations thereof as shown in Fig. 2, based on requirements of the particular application. As best seen in FIG. 2, instead of patterning first conductive layer **32** to provide only narrow conductive wiring traces to electrically connect the LED dies **20**, first conductive layer **32** can be patterned to remove 10 only as much conductive material as is necessary to electrically isolate circuit traces **41**, leaving as much of first conductive layer **32** as possible to act as a reflector for the light emitted by LED dies **20**. Leaving as much of first conductive layer **32** as possible also results in wider circuit traces **41** and allows high electrical drive currents needed by high 15 power devices such as LEDs. The wide circuit traces also help spread the LED heat source laterally on layer **32**. In some embodiments, second electrically conductive layer **36** may be also be patterned for additional circuit complexity, particularly when using an electrically insulating thermal interface material layer **52**.

Portions of substrate **30** may be patterned to receive a single LED die, die clusters or banks or rows of LED dies. LED dies may include complementary color diodes, or different white color temperatures. In some embodiments, more than one LED (e.g., 20 LEDs having respective red, green and blue color outputs) are closely positioned in a localized area to generate apparent white light. The positioning of the LED dies, or the positioning of the LED dies in combination with an optional encapsulant and/or an optical film can be configured to enhance color mixing.

FIG. 3 is an enlarged sectional view taken along line 3-3 of FIG. 2. LED die **20** is 25 positioned on top surface **34** of first conductive layer **32** and electrically connected to circuit trace **41** of first conductive layer **32** by wirebond **39**, and also with a layer **60** of either isotropically conductive adhesive (for example, Metech 6144S, available from Metech Incorporated of Elverson, Pa., U.S.A.), or an anisotropically conductive adhesive, or solder. Solder typically have a lower thermal resistance than adhesives, but not all 30 LED dies have solderable base metallization. Solder attachment can also have the advantage of LED die **20** self-alignment, due to the surface tension of the molten solder during processing. Some LED dies **20** may be supplied with a high temperature 80/20

gold/tin solder which can be reflowed to form a very stable, low thermal resistance interface capable of withstanding subsequent soldering processes up to 260° C. However, some LED dies **20** may be sensitive to solder reflow temperatures, making an adhesive preferable in layer **60**.

5 Referring now to FIG. 4, a cross-sectional illustration of another illumination assembly shows an LED die **20'** having both electrical contact pads on the same side of the LED die, rather than on opposite sides of the diode as in the wirebonded embodiments of FIGS. 1-3. Depending upon the design of LED die **20'**, light is emitted from the side of the diode **20'** that is opposite the contact pads, or from the side of diode **20'** that is on the same side as the contact pads. As with the wirebond LED dies **20** of FIGS. 1-3, electrically conductive adhesives, anisotropically conductive adhesives, or solder re-flow are among the attachment methods that can be used to attach LED die **20'** to first conductive layer **32**.

10

15 As illustrated in FIGS. 3 and 4, electrically insulating layer **40** of substrate **30** comprises an electrically insulating polymer adhesive material loaded with electrically insulating, thermally conductive particles **42** that enhance the thermal conductivity of insulating layer **40**. At least a portion of thermally conductive particles **42** are of a size large enough to simultaneously contact both first and second electrically conductive layers **32, 36**. Large thermally conductive particles **42** (i.e., particles of the same or larger size than the thickness of insulating layer **40**) provide higher thermal conductivity than highly loaded small thermally conductive particles (i.e., particles of smaller size than the thickness of insulating layer **40**), because large thermally conductive particles **42** provide a direct thermal path through insulating layer **40** without intervening dielectric materials of insulating layer **40** adversely affecting the thermal conductivity. Thus, the thermal impedance between first and second electrically conductive layers **32, 36** is limited only by the thermal conductivity of thermally conductive particles **42** and the horizontal loading of thermally conductive particles **42** within insulating layer **40**. The polymer material of insulating layer **40** provides adhesion between first and second electrically conductive layers **32, 36** and thermally conductive particles **42**.

20

25

30 In addition to large thermally conductive particles that simultaneously contact both the first and second electrically conductive layers **32, 36**, insulating layer **40** can also include other particles that do not simultaneously contact both the first and second

electrically conductive layers **32**, **36**, e.g., that are smaller than the thickness of insulating layer **40**. In some embodiments, these other particles further enhance the thermal conductivity of insulating layer **40**. In some embodiments, these other particles enhance other properties (whether electrical, optical, and/or mechanical) of the insulative layer **40**.

5 In one embodiment, the other particles that do not simultaneously contact both the first and second electrically conductive layers **32**, **36** have a dielectric constant of at least 100.

In one embodiment, all or a portion of the large particles **42** (e.g., particles that simultaneously contact both the first and second electrically conductive layers **32**, **36**) consist of a material with a dielectric constant of at least 10. These large, high permittivity particles in contact with the electrically conductive layers **32**, **36** can increase the effective dielectric constant and hence the capacitance of the insulating layer **40**. As in the thermal case, small dielectric and/or thermally conductive particles (e.g., particles that do not simultaneously contact both the first and second electrically conductive layers **32**, **36**) can be intermixed with the large particles to provide further enhancement of the thermal conductivity and/or relative dielectric constant of the material.

In FIGS. 3 and 4, the thermally conductive particles **42** are illustrated as extending partially into, or deforming, both the first and second electrically conductive layers **32**, **36**. Depending upon the relative hardness of particles **42**, first conductive layer **32** and second conductive layer **36**, particles **42** either deform or are deformed by first and second electrically conductive layers **32**, **36**. Referring to FIGS. 5A-5C, particle **42A** is shown deforming both conductive layers **32**, **36** (FIG. 5A); particle **42B** is shown deforming one conductive layer (i.e., conductive layer **32**) and deformed by the other conductive layer (i.e., conductive layer **36**) (FIG. 5B); and particle **42C** is shown deformed by both conductive layers **32**, **36** (FIG. 5C).

25 In FIGS. 3 and 4, thermally conductive particles **42** are uniformly distributed throughout insulating layer **40**. Uniformly distributing thermally conductive particles **42** having a size larger than the final thickness of insulating layer **40** can be achieved by, for example, depositing particles on a previously formed layer **40** or by using a solvent coating process. Particles **42** can be coated onto a layer **40**, previously formed by either solvent or solventless coating processes, by spraying, sifting or otherwise depositing particles to form a globally uniform, though locally random density of particles on the layer **40**. Particles **42** can also be combined with the resin matrix prior to coating. For

example, a wet layer of resin loaded with thermally conductive particles **42** can be coated on one or both of first and second electrically conductive layers **32, 36**, the wet layer having an initial thickness that may be larger than the size of thermally conductive particles **42**. Drying the wet resin shrinks the thickness of the material and results in a 5 final adhesive thickness that is thinner than thermally conductive particles **42**. Typically, the thickness of the electrically insulating layer **40** ranges from about 0.5 to about 50 μm .

Suitable resins include epoxies and blends thereof. Commercially available 10 epoxies include EponTM 1001F epoxy resin sold by Resolution Performance Products and XP71756 epoxy sold by Vantico Inc. Exemplary resins can withstand temperatures that would be encountered in a typical solder reflow operation, for example, in the range of about 180° to about 290° C. Preferably, the resin can withstand short term exposure to 15 temperatures over 300° C needed to reflow 80/20 gold/tin solder commonly used for LED die attachment. These resins may be dried or cured to form the electrically insulating layer **40**.

In other embodiments, as illustrated in FIG. 6, thermally conductive particles **42** 15 are non-uniformly distributed throughout insulating layer **40** in specific patterns. In one embodiment, thermally conductive particles **42** are patterned so as to be more concentrated or present only in the regions to which high power devices requiring good thermal 20 dissipation, such as LED dies **20**, integrated circuit chips, etc., are to be attached. In FIG. 6, thermally conductive particles **42** are clustered near LED die **20**. Patterning of 25 thermally conductive particles **42** can be achieved by dispensing thermally conductive particles **42** separately from the coating of the polymer adhesive material of insulating layer **40**. Separating the placement of thermally conductive particles **42** from the adhesive coating process is possible because high loadings of particles are not required to achieve 30 low thermal impedance due to the direct contact of the large thermally conductive particles **42** with both first and second electrically conductive layers **32, 36**. The thermal impedance of the insulating layer **40** is a function of the particle **42** loading, the degree to which particles **42** deform and/or are deformed by conductive layers **32, 36**, and also the type and crystallography of the particles **42** themselves.

For example, the thermally conductive particles **42** can be patterned onto a 30 previously coated adhesive layer using at least one mask (e.g., a stencil, template, cellular type material, mesh, etc.) having openings therein and sifting or otherwise dispersing the

thermally conductive particles **42** through openings in the mask onto a carrier or substrate capable of supporting or carrying temporarily and/or permanently at least some of the particles. The assembly of the mask and the carrier receives a quantity of the particles, some of which go through the openings of the mask and are fixed to or rest on the carrier and another portion of which go onto the mask and rest on the mask between the openings. 5 The outer surface of the mask (opposite the surface adjacent the carrier) is preferably provided with affixing means to which the particles will adhere to hold the particles on the outer surface of the mask. Then, the mask having the particles adhered thereto is separated from the carrier, the separated mask thereby effectively and efficiently removing 10 the plurality of particles that will not form a part of the final product. The result is a distributed pattern of particles on the carrier. The particles are distributed on the carrier according to the design of the mask primarily according to the size, shape and distribution of the openings of the mask as well as by the size and shape of the particles. Thus a programmed or non-random distribution of the particles is provided on the carrier. 15

The support or temporary retention of the particles on the carrier can be provided by the characteristics of the carrier and/or the particles as well as the surface characteristics of the carrier or particles, such as coating materials applied to the carrier and/or particles, moisture content, humidity, weight, (utilization of gravity temperature) temperature (e.g., negative temperature), magnetization, static electricity, discharge 20 conditions, etc. In addition, after placing of the particles on the carrier, further substances can be applied to more permanently affix the particles to the carrier. The mask can be removed from the carrier before, during, or after such fixing of the particles to the carrier. After placing the particles on the carrier and removal of the mask, this assembly is subjected to further processing. 25

As a result of this further processing, the particles **42** are loaded into insulating layer **40**. In one embodiment, the carrier is at least one of conductive layers **32, 36** having an adhesive resin coated thereon. The use of a mask and carrier for distributing abrasive particles as described in U.S. Patent 6,478,831 (Tselesin) is illustrative.

Particles **42** may be preferentially oriented such that a majority of the particles **42** 30 protrude from the adhesive resin of insulating layer **40**, using electrostatic or magnetic coating techniques known in the art of applying particles to backings. During electrostatic coating, electrostatic charges are applied to the particles and this propels the particles

toward the binder precursor-coated article. Magnetic coating involves using magnetic fields to force abrasive particles toward and into the binder precursor.

As described above, particles **42** are selected to enhance the thermal conductivity of the insulating layer **40**. Any suitable materials can be chosen for this purpose. In 5 exemplary embodiments, the particles **42** are composed of silicon carbide, aluminum oxide, boron nitride, diamond, or more complex, engineered materials such as metallic particles with electrically insulating coatings or nanoparticles. Particles **42** are dielectric (electrically insulating) to prevent electrical shorting between conductive layers **32, 36**. However, in some embodiments, electrical connection between conductive layers **32, 36** 10 may be desired at specific locations, and large electrically conductive particles can be included in layer **40** at those locations.

Exemplary relatively high dielectric particles include barium titanate, barium strontium titanate, titanium oxide, lead zirconium titanate, boron, boron nitride, diamond, alumina, beryllium, silicon, as well as other carbides, oxides, and nitrides of those 15 materials, and compounds or mixtures thereof. A commercially available barium titanate is available from Nippon Chemical Industrial Co., Tokyo, Japan, under the trade designation “BESPA AKBT.”

Exemplary electrically conductive particles may comprise electrically conductive or semiconductive materials such as carbon, graphite, metal or metal alloy particles, where 20 the metal may be silver, gold, nickel, copper tin, or metal coated polymeric particles or metal coated shaped polymeric particles.

Thermally conductive particles **42** may be any shape and may be regularly or 25 irregularly shaped. Exemplary shapes include spheres, platelets, cubes, needles, oblate, spheroids, pyramids, prisms, flakes, rods, plates, fibers, chips, whiskers, and combinations thereof. The particle size, i.e., the smallest dimension of the particle, typically ranges from about 0.05 to about 50 μm . Particles can be substantially the same size, or mixtures of different sizes of particles can be used. The shape and size of thermally conductive particles **42** are selected to ensure at least a portion of particles **42** simultaneously contact both first and second electrically conductive layers **32, 36**. At least a portion of the 30 particles **42** have a size sufficient to simultaneously contact both the first and second electrically conductive layers **32, 36**. In some embodiments, the average size of the particles **42** can be greater than the thickness of the electrically insulating layer **40**. In

some embodiments, substantially every particle **42** has a size greater than the thickness of the electrically insulating layer **40**.

The loading of particles **42** in the polymer is typically 10% to 75% by volume, based on the total volume of the electrically insulating layer **40**. As discussed above, distribution of particles **42** may be uniform or patterned. High loading of particles **42** in the polymer may be may cause a decrease in adhesion between the polymer and electrically conductive layers **32, 36**. However, techniques for improving adhesion as are known in the art may be employed. For example, surfaces of the first and second electrically conductive layers **32, 36** that adjoin insulating layer **40** can be treated to provide improved adhesion with the insulating layer **40**. Exemplary surface treatments that are useful in providing improved adhesion include 5-aminobenzotriazole and 3-glycidoxypropyltrimethoxysilane, corona discharge, plasma ashing/etching, self-assembled monolayers, and reactive layers to bind the resin matrix material to the first and second electrically conductive layers **32, 36**. Metal layers can also be treated with anti-corrosion treatments to improve adhesion (e.g., the use of zinc/chromium treatments for copper). In another technique for improving adhesion, particle-free resin matching the particle-containing resin may be skin-coated onto one or both conductive layers **32, 36** and partially cured. The partially cured particle-free resin is then brought into contact with the particle-containing resin and fully cured. Of course, particles **42** can also be surface treated in an analogous manner, to improve adhesion to the polymer.

In addition to altering the thermal properties of insulating layer **40**, the polymer material and/or particles **42** can also be selected to alter the electrical, optical and/or mechanical properties of the insulating layer **40**. When the electrical design includes large areas of exposed electrically insulating layer **40** near the LEDs, the optical properties (e.g., reflectivity, diffusivity, transparency) of the electrically insulating layer **40** can also be enhanced.

The polymer material and/or particles **42** can be selected to enhance the reflectivity of the insulating layer **40**. For example, insulating layer **40** can be loaded with white, diffusely reflective materials e.g., BaSO₄, TiO₂, or with high refractive index materials, e.g., diamond, SiC, Al₂O₃, or with reflective materials, e.g., silver flakes or nanoparticle materials or materials oriented with electrical/magnetic means for desired optical properties such as ferroelectrics, e.g., PLZT. Alternatively, the polymer material and/or

5 particles **42** can be selected to cause the insulating layer **40** to be substantially transparent. In this case the optical properties of the coated side of the second electrically conductive layer **36** may be selected or altered to provide desired characteristics (e.g., reflectivity, diffusivity). In other embodiments, the polymer material and/or particles **42** are selected to cause the insulating layer **40** to have a desired apparent color.

10 In each of these embodiments, an encapsulant may be provided on each LED die **20** to help couple light out of the die, and/or to preferentially direct the emitted light towards the insulating layer **40** to be reflected (whether specularly or diffusely), polarized, or waveguided by the insulating layer **40**. The macro, micro and nanostructure of the insulating layer **40** can be engineered for specific optical properties by pre-forming the inner major surfaces of conductive layers **32, 36** (i.e., the interface of electrically insulating layer **40** with first electrically conductive layer **32** and with second electrically conductive layer **36**. For example the inner surface of a copper foil can be structured by chemical (grain etching), mechanical (embossing), or optical (laser ablation) means. This structure is impressed onto the insulating layer **40**, the surface of which takes on an inverse or mirror image of the metal film pre-form. The optical properties of the insulating layer **40** can also be modified by the addition of one or more phosphor or fluorescent materials into the insulating layer **40** so that a shift in the wavelength of the incident radiation occurs. Efficient removal of the Stokes shift energy in these cases of wavelength conversion is an additional benefit.

15

20

The exemplary embodiments described herein are particularly useful when used in combination with known encapsulants and/or known optical films. For example, encapsulants having a phosphor layer (for color conversion) or otherwise containing a phosphor can be used on or around the LED die **20** without degrading the LED die light output. FIG. 7 shows a portion of an illumination assembly similar to that of FIG. 6, but wherein an optional encapsulant **90** covers the LED die **20**, and one or more optional optical film(s) **92**, such as a diffusing film, a polarizing film (such as any of the Vikuiti™ DBEF films available from 3M Company), or a structured surface film (such as any of the Vikuiti™ BEF films available from 3M Company), are used in combination with the assembly. If desired, a single encapsulant can encapsulate multiple LED dies, whether of the same or different emitted colors.

25

30

Referring now to FIG. 8, in making an illumination assembly **10**, the substrate **30** as described above is provided, such as by unwinding a supply roll **100** of the substrate, and the first electrically conductive layer **32** is patterned at patterning station **102** to form the desired circuit traces **41**. Patterning of layer **32** may be accomplished using any 5 traditional circuit construction technique. LED dies **20** are attached to the patterned first electrically conductive layer **32** at die attach station **104** using known and conventional die attach and wire bonding methods as described above. Next, encapsulant **90** is optionally applied at encapsulation station **106** and thereafter cured before the substrate **30** with LED dies **20** thereon is wound onto take-up roll **110**. In some cases, rather than being 10 processed in a roll-to-roll manner, substrate **30** is panelized and batch processed on a rigid or semi-rigid carrier. In some cases, instead of being wound onto take-up roll **110**, the substrate **30** having LED dies **20** thereon is cut at intervals to provide a plurality of illumination assembly strips, panels, or other shapes suitable for mounting in a backlight, for use e.g., in backlit displays, signs, or graphics. In still other cases, the take-up roll **110** 15 can become a supply roll for subsequent processing steps.

Referring now to FIGS. 9A-9D, an exemplary method for making the substrate **30** as described above is illustrated. The second conductive layer **36** is provided, such as by unwinding a supply roll **120** of the conductive layer **36**, and at an adhesive coating station **122**, a layer **124** of electrically insulative adhesive is applied to the conductive layer **36**. 20 Adhesive layer **124** is optionally loaded with dielectric particles (not shown). At a thermal particle application station **126**, thermally conductive particles **42** are applied on the adhesive layer **124**. In one embodiment, thermally conductive particles **42** are uniformly applied on the adhesive layer **124**. In another embodiment, thermally conductive particles **42** are applied on the adhesive layer in a predetermined pattern. In one embodiment, 25 particles **42** are applied in a wet resin using solvent coating methods as are known in the art, such that upon drying of the resin, particles **42** project above the surface of the dried resin layer **128**. At a laminating station **130**, first conductive layer **32** (optionally having a layer **124'** of electrically insulative adhesive, which may also include particles **42**) provided from supply roll **134** and pressed against second conductive layer **36** and particles **42** thereon, such that particles **42** are forced through adhesive layers **124**, **124'** 30 and partially deform and/or are deformed by electrically conductive layers **32**, **36** to form substrate **30**. The substrate **30** is then wound onto take-up roll **140**. Take-up roll **140** can

become supply roll **100** for subsequent processing steps as described with respect to FIG. 8. In some cases, instead of being wound onto take-up roll **140**, processing of substrate **30** proceeds directly to the processing steps as described with respect to FIG. 8.

5 Example 1

A substrate was made using diamond particles dispersed in a binder. The dispersion was 92% by weight diamond, and included a mixture of diamond particle sizes. The average of the particle size distributions were 0.25, 3 and 30 micron, and the weight ratio of each particle size was 1:2:4. Within these particle size distributions, the maximum particle size, as measured by the vendor, was up to 47 microns. The adhesive binder was a thermoset epoxy available under the trade designation Heloxy 71 from Resolution Performance Products. Before coating, the 100% solids mixture was diluted with methyl isobutyl ketone. Using a knife coater with a 100 micron gap, as rolled 1 oz. copper foil was coated with the diamond loaded adhesive and air dried for four hours at room temperature. After air drying, a 24 inch nip roller at 140°C and 40 pounds loading was used to laminate the coated copper foil to an identical, uncoated foil. When the coating was laminated, there was some flow of the diamond loaded adhesive, which resulted in a lower coating thickness. The laminate was then cured for 3 hours at 160°C. The maximum particle size, which, together with the lamination pressure, determined the final dielectric thickness, was up to 47 microns. The resulting substrate had a 40 micron thick dielectric layer. The diamond particles appeared to deform both layers of copper. The 40 micron dielectric thickness in the sample had a thermal impedance of approximately 1 cm² °C/W as measured at 3M using custom thermal impedance measurement equipment. Notably, the thermal impedance of the 40 micron thick sample was approximately the same as the thermal impedance of an 8 micron C-ply sample (available from 3M Company under the trade designation 3M™ Embedded Capacitor Material), despite the five-fold difference in thickness.

20 Example 2

25 A diamond epoxy coating as described in Example 1 was laminated and cured using a vacuum press at 24 inches of vacuum and 180°C for 2 hours. The resulting

dielectric thickness of the sample made by this method was 30 microns; thinner than the sample prepared by hot roll lamination in Example 1.

The disclosed substrate can be used not only with LED dies as discussed above, 5 but with other circuit components, particularly other types of miniature light sources or other components that generate substantial heat. Thus, we contemplate assemblies similar to the foregoing disclosed illumination assemblies but wherein some or all of the LED dies are replaced by one or more of: laser diodes, organic light emitting diodes (OLEDs), power transistors, integrated circuits (ICs), and organic electronics.

10 Unless otherwise indicated, all numbers expressing quantities, measurement of properties and so forth used in the specification and claims are to be understood as being modified in all instances by the term "about." Accordingly, unless indicated to the contrary, the numerical parameters set forth in the specification and claims are approximations that can vary depending upon the desired properties sought to be obtained 15 by those skilled in the art utilizing the teachings of the present invention. At the very least, and not as an attempt to limit the application of the doctrine of equivalents to the scope of the claims, each numerical parameter should at least be construed in light of the number of reported significant digits and by applying ordinary rounding techniques. Notwithstanding that the numerical ranges and parameters setting forth the broad scope of 20 the invention are approximations, the numerical values set forth in the specific examples are reported as precisely as possible. Any numerical value, however, inherently contains certain errors necessarily resulting from the standard deviations found in their respective testing measurements.

The foregoing description is illustrative and is not intended to limit the scope of the 25 invention. Variations and modifications of the embodiments disclosed herein are possible, and practical alternatives to and equivalents of the various elements of the embodiments would be understood to those of ordinary skill in the art upon study of this patent document. These and other variations and modifications of the embodiments disclosed herein may be made without departing from the scope and spirit of the invention.

CLAIMS

1. An illumination assembly, comprising:
 - a substrate comprising a first and second electrically conductive layer separated by an electrically insulating layer, the insulating layer comprising a polymer material loaded with thermally conductive particles, wherein at least a portion of the thermally conductive particles simultaneously contact both the first and second electrically conductive layers; and
 - a plurality of light sources disposed on the first conductive layer.
- 10 2. The assembly of claim 1, wherein the light sources are selected from the group of LEDs, laser diodes, and OLEDs.
- 15 3. The assembly of claim 1, wherein the thermally conductive particles comprise particles selected from the group of barium titanate, barium strontium titanate, titanium oxide, lead zirconium titanate, boron, boron nitride, diamond, alumina, beryllium, silicon, and any carbides, oxides, and nitrides thereof.
- 20 4. The assembly of claim 1, further comprising dielectric particles having a dielectric constant of at least 100 loaded in the polymer material of the insulating layer, wherein the dielectric particles do not simultaneously contact both the first and second electrically conductive layers.
- 25 5. The assembly of claim 1, wherein the thermally conductive particles are non-uniformly distributed in the insulating layer.
6. The assembly of claim 4, wherein the thermally conductive particles are concentrated near the light sources.
- 30 7. The assembly of claim 1, wherein the thermally conductive particles deform at least one of the first and second electrically conductive layers.

8. The assembly of claim 1, wherein the thermally conductive particles are deformed by at least one of the first and second electrically conductive layers.

9. The assembly of claim 1, wherein at least one of the first and second electrically 5 conductive layers comprises a foil.

10. The assembly of claim 1, wherein the first electrically conductive layer is patterned to form one or more traces.

10 11. The illumination assembly of claim 1, wherein the second electrically conductive layer comprises a heat sink.

12. The assembly of claim 1 in combination with:
a heat sink; and
15 a layer of thermal interface material disposed between the heat sink and the second conductive layer.

13. A backlight for a display, comprising the assembly of claim 1.

20 14. A method of making an illumination assembly, the method comprising:
supplying a substrate comprising a first and second electrically conductive layer
separated by an electrically insulating layer, the insulating layer comprising
thermally conductive particles that simultaneously contact both the first and
second electrically conductive layers;
25 patterning the first electrically conductive layer; and
providing a plurality of light sources on the patterned first electrically conductive
layer.

15. The method of claim 14, wherein the supplying step comprises:
30 applying a layer of electrically insulative polymer material on the second
electrically conductive layer;
applying the thermally conductive particles on the layer of polymer material; and

laminating the first electrically conductive layer over the thermally conductive particles to force the thermally conductive particles into simultaneous contact with both the first and second electrically conductive layers.

5 16. The method of claim 15, wherein applying a layer of electrically insulative polymer material comprises loading the polymer material with particles that are smaller than a thickness of the layer of electrically insulative polymer material, the particles having a dielectric constant of at least 100.

10 17. The method of claim 15, wherein applying the thermally conductive particles comprises applying the thermally conductive particles in a pattern.

15 18. The method of claim 14, wherein the supplying step comprises:
applying a layer of electrically insulative polymer material having the thermally conductive particles dispersed therein on at least one of the first or second electrically conductive layer; and
laminating the first electrically conductive layer over the thermally conductive particles to force the thermally conductive particles into simultaneous contact with both the first and second electrically conductive layers.

20 19. The method of claim 14, wherein the supplying step comprises unwinding a roll of the substrate.

25 20. The method of claim 19, further comprising cutting the substrate at intervals to provide a plurality of illumination assembly strips, panels, or other shapes suitable for mounting in an illumination unit.


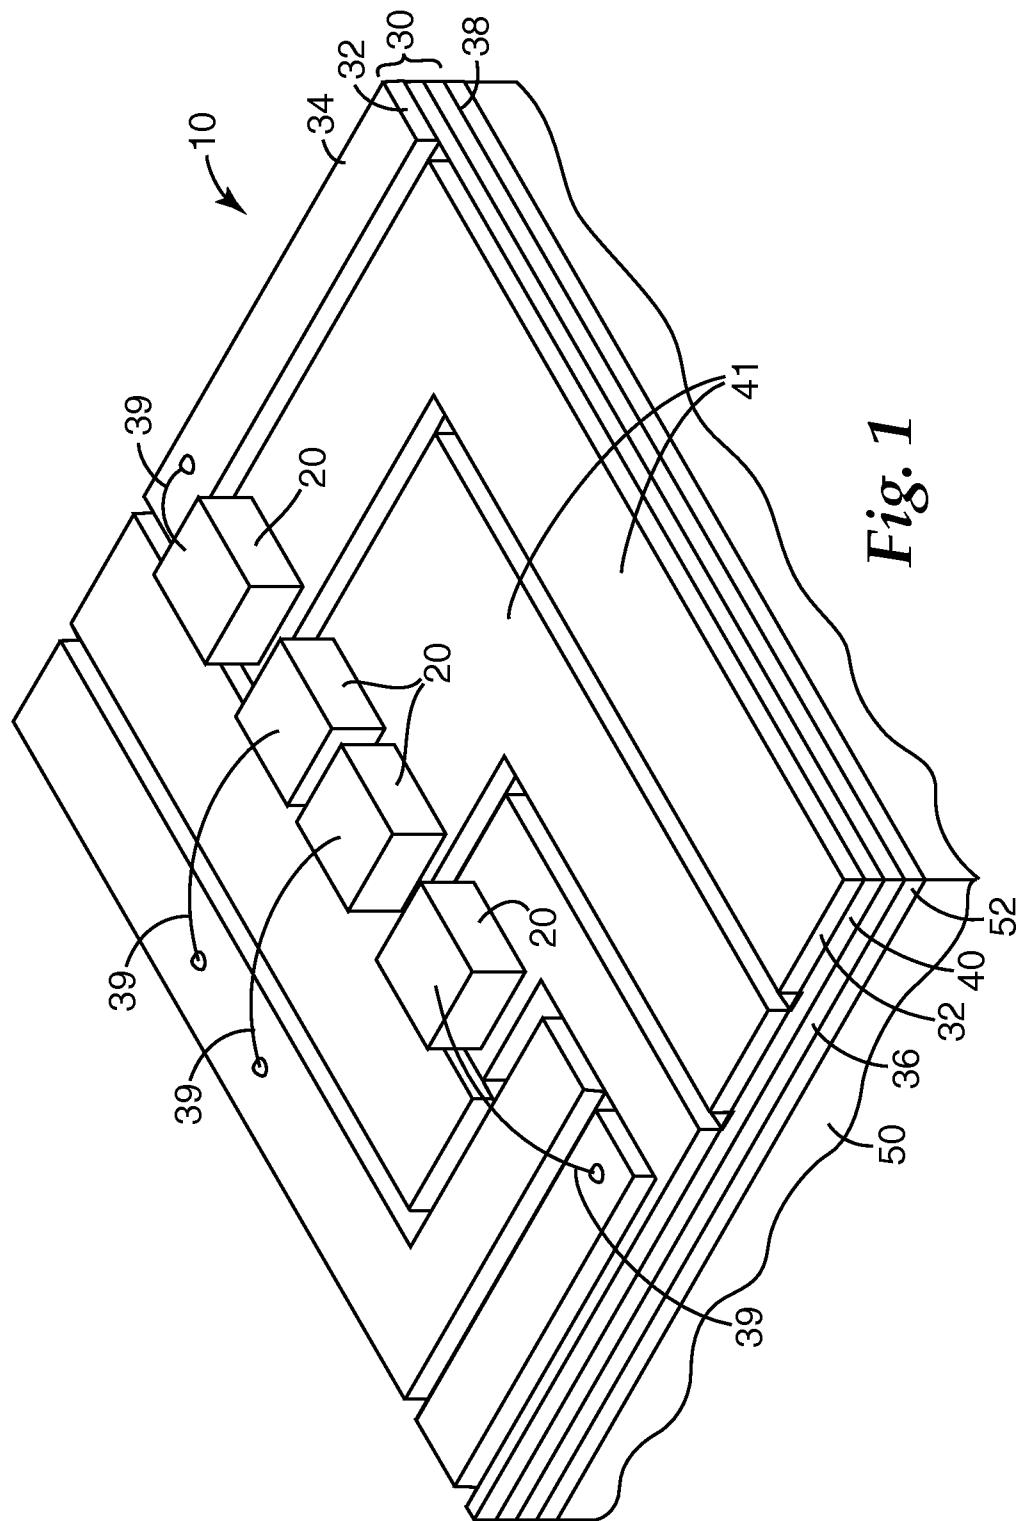


Fig. 1

Fig. 2

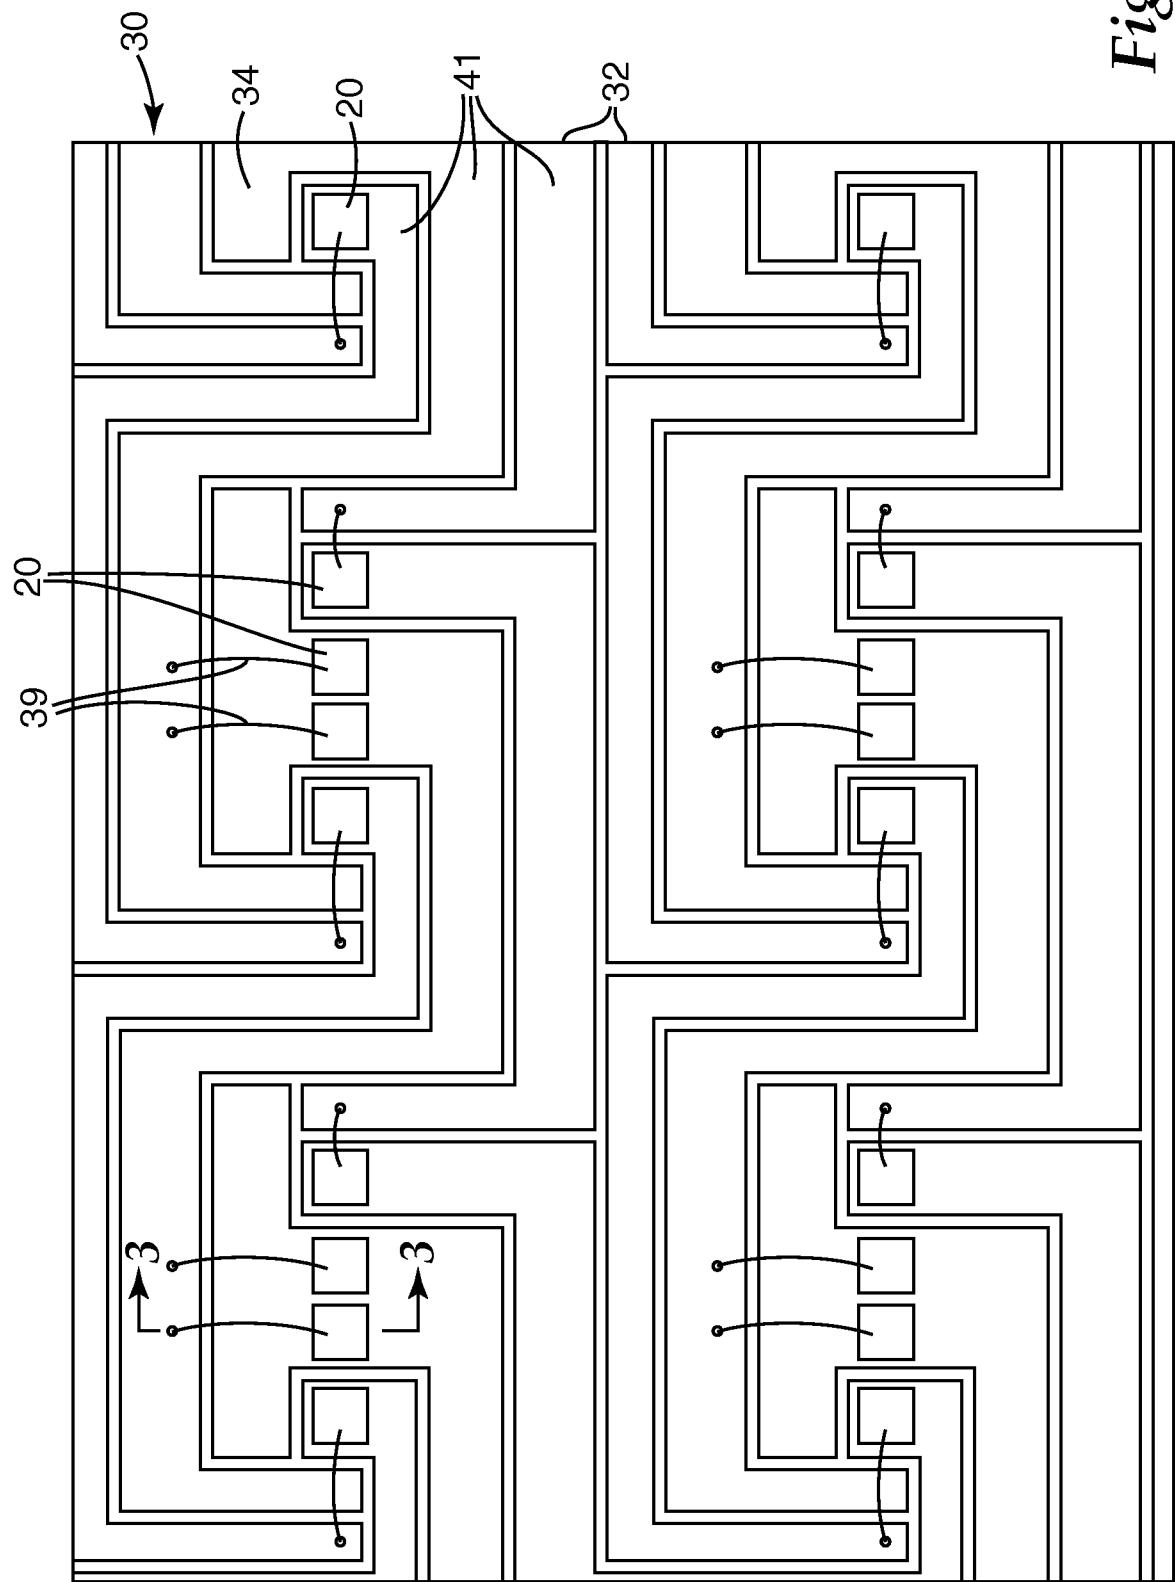

3/6

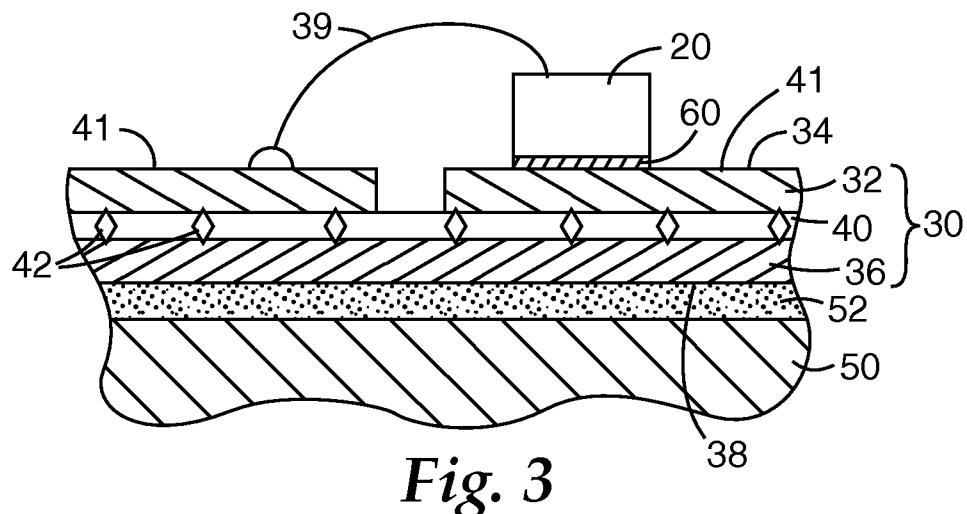


Fig. 3

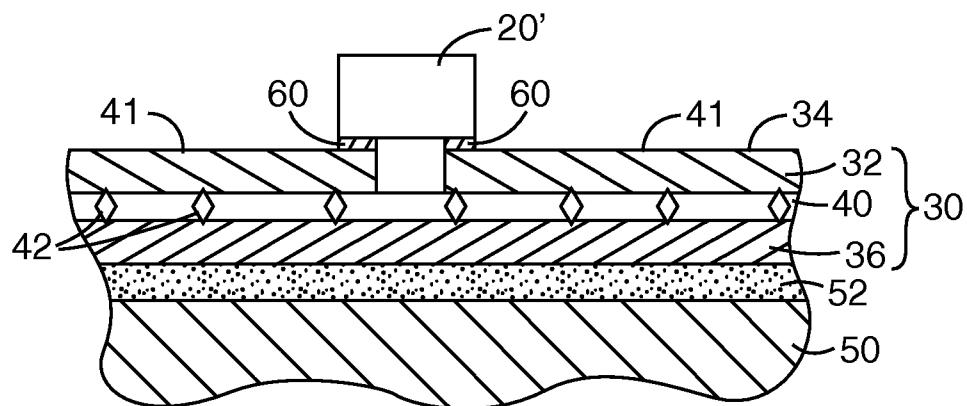


Fig. 4

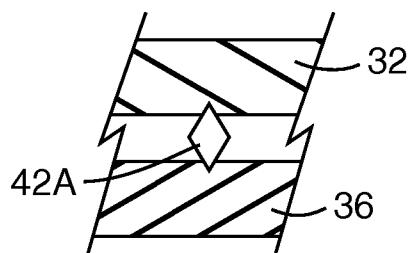


Fig. 5A

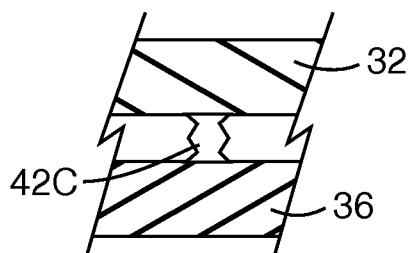


Fig. 5C

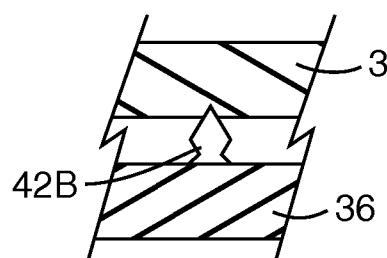


Fig. 5B

4/6

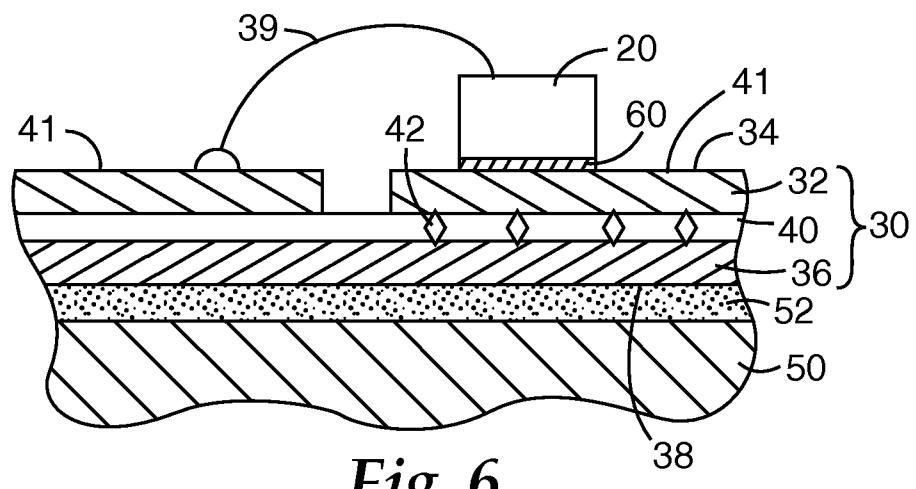


Fig. 6

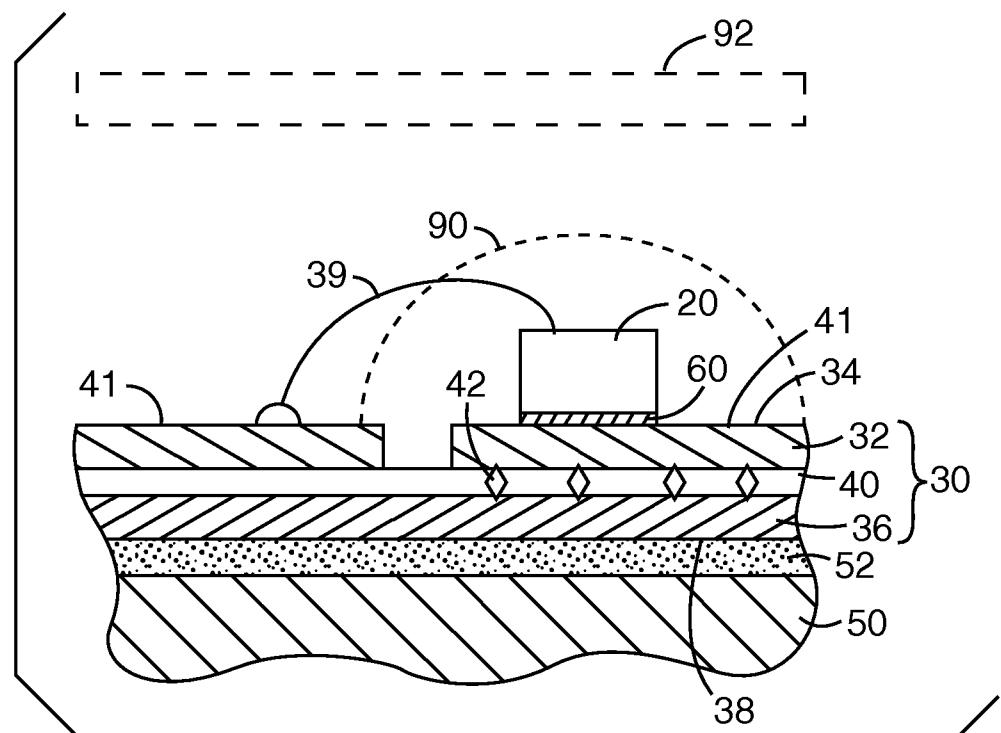


Fig. 7

5/6

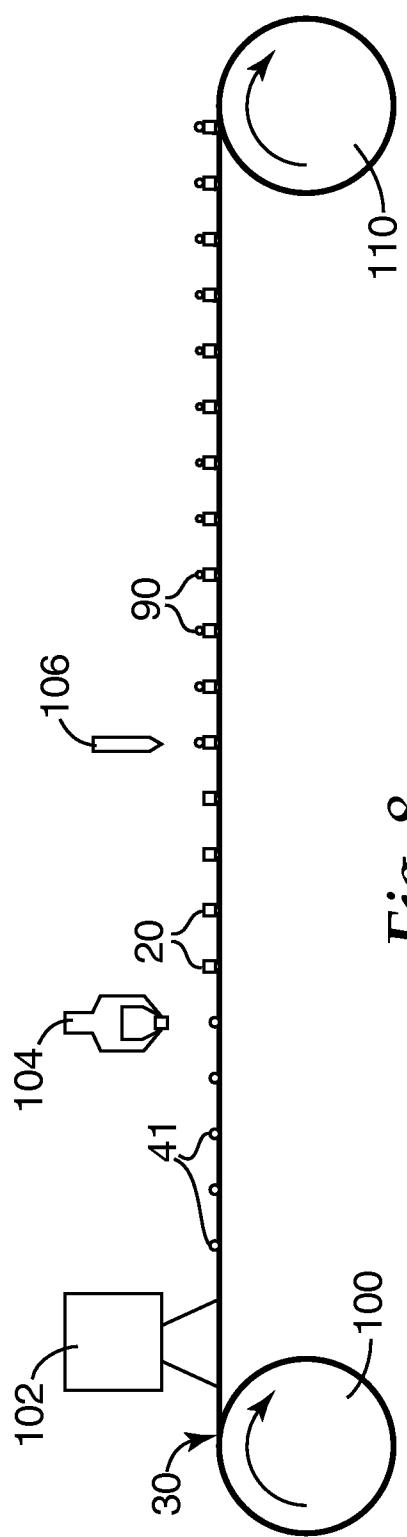


Fig. 8

6/6

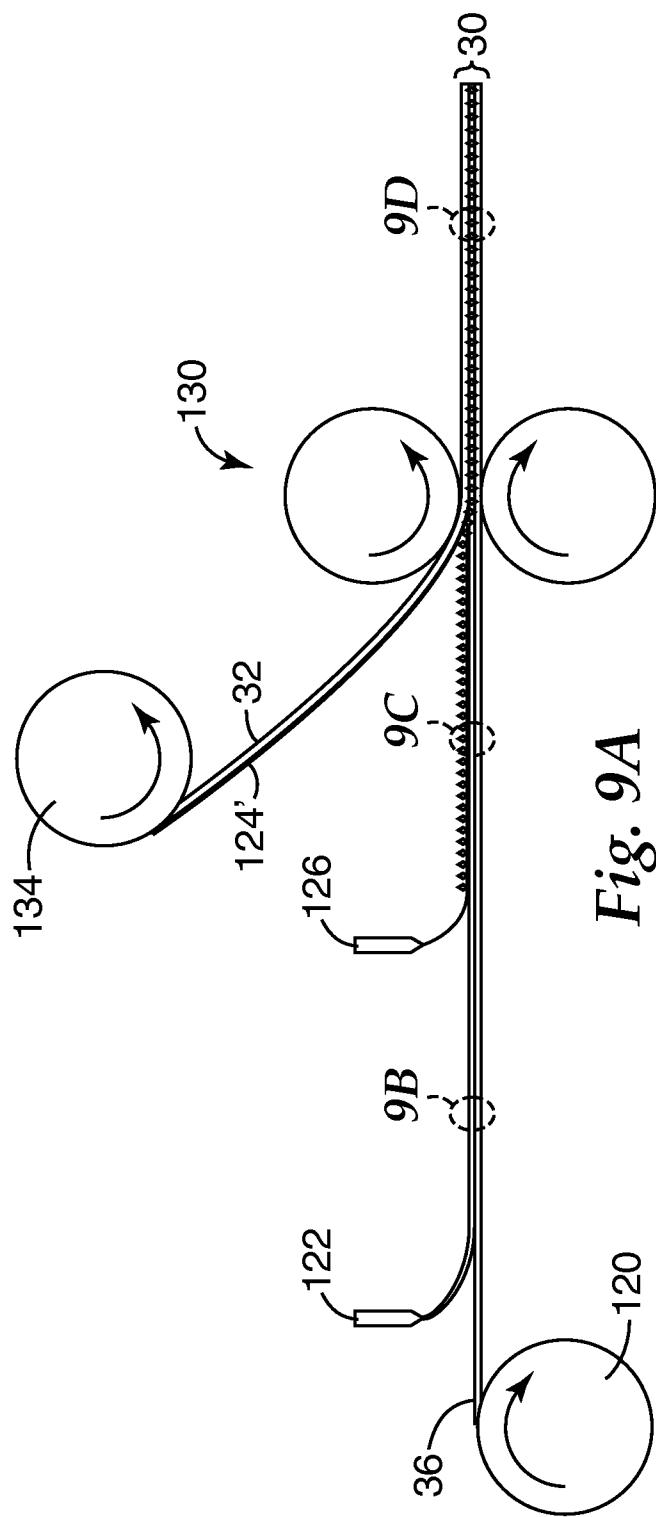


Fig. 9A

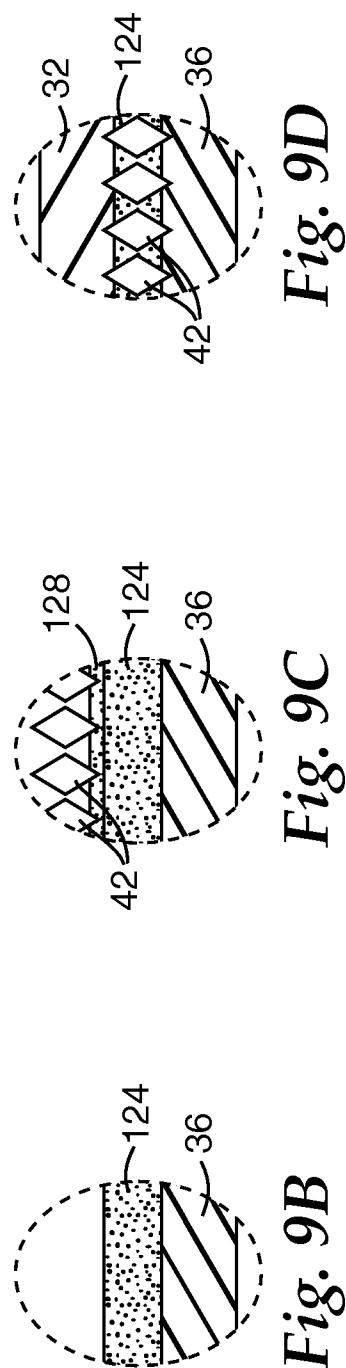


Fig. 9C

Fig. 9D

Fig. 9B