

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
26 June 2003 (26.06.2003)

PCT

(10) International Publication Number  
WO 03/052339 A1

(51) International Patent Classification<sup>7</sup>: F28F 3/00, F28D 9/00

(21) International Application Number: PCT/SE02/02086

(22) International Filing Date: 15 November 2002 (15.11.2002)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data: 0104281-1 18 December 2001 (18.12.2001) SE

(71) Applicant (for all designated States except US): ALFA  
LAVAL CORPORATE AB [SE/SE]; Box 73, S-221 00  
Lund (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BLOMKGREN, Ralf,  
Erik [SE/SE]; Älgvägen 13, S-239 34 Skänör (SE). VÄN-  
NMAN, Erik [SE/FR]; 18, Allé des Terrasses de Criel,  
F-38500 Voiron (FR).

(74) Agents: BERGLUND, Stefan et al.; Bjerkéns Patentbyrå  
KB, Östermalmsgatan 58, S-114 50 Stockholm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A HEAT EXCHANGER PLATE

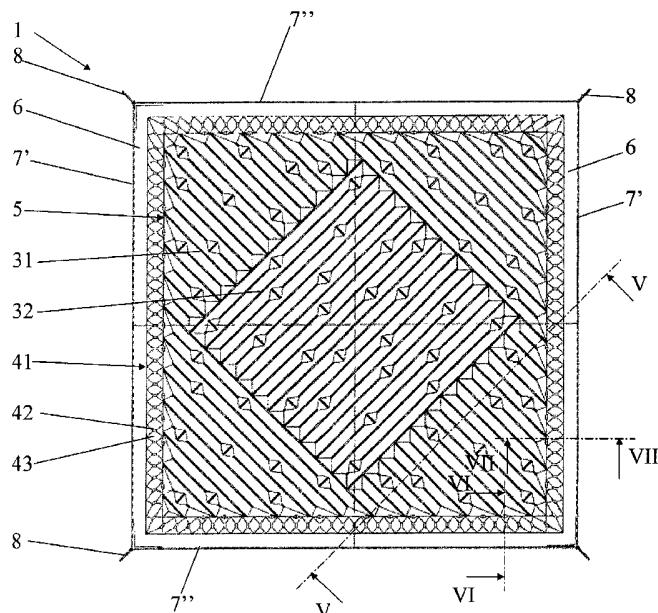

WO 03/052339 A1

(57) Abstract: The invention refers to a heat exchanger plate (4) for a plate heat exchanger, a plate package, and a plate heat exchanger. The plate includes an edge, which extends around the plate, an edge area (6) which extends around the plate inside the edge, and a heat exchanging surface (5) with a corrugation of ridges and valleys which extend in at least a first direction (A, B) over the plate (4). Furthermore, the plate includes a support area (41), which extends around the heat exchanging surface (5) inside the edge area (6) and includes a corrugation of ridges (42) and valleys (43).



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## A Heat Exchanger Plate

### THE BACKGROUND OF THE INVENTION AND PRIOR ART

10 The present invention refers to a heat exchanger plate for a plate heat exchanger, wherein the plate includes an edge, which extends around the plate, an edge area, which extends around the plate inside the edge, and a heat exchanging surface with a corrugation of ridges and valleys, which extend in at least a first direction over the plate. The invention also refers to a plate package for a plate heat exchanger, and to a plate heat exchanger.

20 Such heat exchanger plates for rotation of a quarter of a round are known from EP-A-165 179. The plates have a substantially square shape and form a plate package where the inlets and the outlets extend through the sides of the plate package, i. e. the heat exchanger media flow into and out of the plate package in a direction which is substantially parallel to the main extension plane of the plates. Each plate has four side edges, wherein two opposite side edges are folded downwardly and the two other opposite side edges are folded upwardly. Every second plate is rotated 90° in the plate package, wherein the downwardly folded side edges of a plate abut the upwardly folded side edges of an adjacent plate, wherein these side edges are connected to each other by means of a weld joint. In each corner of each plate a tab is formed, which extends along a diagonal direction and in a plane that is substantially perpendicular to the extension plane of the plates.

30 35 The plates disclosed in EP-A-165 179 have an active heat exchanging surface with a corrugation of ridges and valleys, which extend in a diagonal direction that is inclined 45° to the side edges

of the plates. In the plate package the ridges and valleys of adjacent plates will cross and support each other in a plurality of support points. In an inner area of the heat exchanging surface each support point will carry a load corresponding to the pressure

5 multiplied by the square spacing, but in an outer area of the heat exchanging surface in the proximity of the side edges the load in each support point becomes significantly larger. Due to reasons of the manufacturing technology, a corrugation may not extend to the side edges but there has to be an edge area in order to enable, for

10 instance, bending of the edge. The edge area may in principle be only a substantially line-shaped bending area but preferably the edge area has a substantially plane surface that has a width of 10-15 mm. The design means that the loaded surface becomes significantly larger for the outer support points than for the inner

15 support points. In the two corners, which have support points most far out in the corners, the support points are especially heavily loaded since these are to carry the load from two plane edge areas meeting in the corners.

20 The pressure performance of a plate is determined by the most loaded support point, which in this case are the two support points in the corners. The load to be carried by these support points is twice the load carried by the inner support points. For a large plate these two support points may be less than 0,1% of the number of

25 support points, which means that more than 99,9% of the plate is over-dimensioned with 100%.

## SUMMARY OF THE INVENTION

30 The object of the present invention is to overcome the problems mentioned above. In particular, it is aimed at a plate, a plate package with such a plate and a plate heat exchanger with such a plate package, wherein the plate is more equally loaded in the plate package and the plate heat exchanger.

35 This object is achieved by the heat exchanger plate initially defined, which is characterised in that it includes a support area, which

extends around the heat exchanging surface inside the edge area and includes a corrugation of ridges and valleys.

In such a corrugated support area, the ridges and valleys may be given a direction which is favourable for the specific position in which they will be located in the complete plate package in such a way that the load is equalised between the different support points. By such a particular corrugation for the support area, the number of support points in this area in the proximity of the side edges of the plate may be substantially increased. At least a large number of the ridges and valleys in the support area may thus extend in a direction deviating from the diagonal direction of the ridges and the valleys of the heat exchanging surface. The ridges and the valleys of the support area will be short in their extension direction in comparison with the ridges and valleys of the heat exchanging surface. Advantageously, the plate includes a marked border line between the heat exchanging surface and the support area. The total area of the edge area and the support area is preferably substantially smaller than the total area of the heat exchanging surface.

According to an embodiment of the invention, the plate has a polygonal shape with at least four side edges and at least four corners. The support area may, in each corner, have such a ridge or valley that extends in a direction which substantially coincides with a diagonal line between the corners. Furthermore, substantially each ridge or valley of the support area along a central part of the side edges may extend in a direction which is substantially perpendicular to the side edge which lies most closely to said ridge or valley. By such a design of the support area, the number of support points in this area may be increased with up to 50%. Furthermore, the ridges and the valleys in the support area may have substantially the same spacing as the ridges and the valleys of the heat exchanging surface. Advantageously, the direction of the ridges and the valleys of the support area changes successively from the substantially diagonal direction in the corners to the substantially perpendicular direction in the central parts.

According a further embodiment of the invention, the plate includes an extension plane which extends in and in parallel with the edge area, wherein said valleys of the support area are located below the

5 extension plane and wherein said ridges of the support area are located above the extension plane. Said border line may be located at the extension plane. Furthermore, said valleys of the heat exchanging surface may be located at the extension plane and said ridges of the heat exchanging surface above the extension plane.

10 According to a further embodiment of the invention, the plate is substantially square and has four side edges, wherein two first of said side edges are parallel and folded in a first direction along a respective folding line extending in said edge area in parallel with the side edge in question, wherein two second of said side edges are parallel and folded in a second direction along a respective folding line extending in said edge area in parallel with the side edge in question, and wherein the first direction is opposite to the second direction.

15

20 According to a further embodiment of the invention, the heat exchanging surface includes at least a first area with a corrugation of ridges and valleys, the plurality of which extends in a first direction, and at least a second area with a corrugation of ridges and valleys, the plurality of which extends in a second direction, wherein the plate has a central rotary axis extending in parallel with a normal line of the plate and wherein said areas have a respective contour coinciding with a respective imaginary stationary contour in a first rotary position of the plate with regard to said rotary axis and after a rotation of 90° to a second rotary position of the plate with regard to said rotary axis. Since the heat exchanging surface includes two areas, which have a corrugation extending in a respective direction, the deformation of the shape in one of the areas may be counteracted by the deformation of the shape in the other area and vice versa. Consequently, the total deformation of the shape of the plate may be prevented or reduced, and the original outer shape may substantially be maintained also after the

25

30

35

compression moulding of the plate. The definition contour refers to an outer and inner contour of an area. One of said areas may for instance be completely enclosed in another of said areas, wherein the border of the latter outer area to the inner area form the inner 5 contour of the outer area.

According to an embodiment of the invention, the area of said first area is substantially equal to the area of said second area. Furthermore, the first direction is advantageously substantially 10 perpendicular to the second direction. By such a design of the plate, the deformation of the shape may substantially completely be prevented. Furthermore, the first direction may be substantially parallel to the diagonal line. Advantageously, the plate has a contour which coincides with an imaginary stationary contour in said 15 first rotary position and in said second rotary position.

The object is also obtained by a plate package for a plate heat exchanger, which includes a number of plates as defined above, which are arranged on each other. The plates in the plate package 20 may be arranged in such a way that every second plate is rotated 90° around said rotary axis and in such a way that interspaces are formed between adjacent plates, wherein said areas have such a shape that the contour of the first area coincides for all plates in the plate package, that the contour of the second area coincides for all 25 plates in the plate package, and that the contour of the support area coincides for all plates in the plate package. The plates in the plate package may be welded to each other, wherein the plates are arranged on each other in such a way that said first side edges of a plate abut said second side edges of an adjacent plate, and 30 wherein these side edges are connected to each other by means of a weld joint. Advantageously, substantially all plates are substantially identical. Furthermore, said interspaces may include a number of first interspaces and a number of second interspaces, wherein the first interspaces are arranged to convey a first medium 35 through the plate package and the second interspaces are arranged to convey a second medium through the plate package.

The object is also achieved by a plate heat exchanger, which includes a plate as defined above.

5 The object is also obtained by a plate heat exchanger, which includes a plate package as defined above.

## BRIEF DESCRIPTION OF THE DRAWINGS

10 The present invention is now to be explained more closely by a description of various embodiments disclosed by way of example and with reference to the drawings attached hereto.

- Fig. 1 discloses a side view of a plate heat exchanger.
- Fig. 2 discloses a sectional view along the line II-II in Fig. 1.
- 15 Fig. 3 discloses a sectional view along the line III-III in Fig. 2.
- Fig. 4 discloses a plan view of a plate package of the plate heat exchanger.
- Fig. 5 discloses a sectional view along the line V-V in Fig. 4.
- Fig. 6 discloses a sectional view along the line VI-VI in Fig. 4.
- 20 Fig. 7 discloses a sectional view along the line VII-VII in Fig. 4.
- Fig. 8 discloses a plan view of a plate according to a second embodiment.
- Fig. 9 discloses a plan view of a plate according to a third embodiment.
- 25 Fig. 10 discloses a plan view of a plate according to a fourth embodiment.

## 30 DETAILED DESCRIPTION OF VARIOUS EMBODIMENTS OF THE INVENTION

35 Figs 1-3 disclose a plate heat exchanger 1. The plate heat exchanger 1 includes an outer casing 2 and a plate package 3, which is arranged inside the casing 2. The plate package 3 includes a number of heat exchanger plates 4 which are stacked on and attached to each other.

The plates 4 have a central rotary axis x, which extends in parallel with a normal line of a main extension plane p of each plate 4. All plates 4 are substantially identical and have in the embodiment disclosed a substantially square shape with four corners. It is to be  
5 noted that the plates 4 also may have another polygonal or circular shape. The plates 4 are rotatable around the axis x in such a way that the outer contour of the plates 4 coincides with an imaginary stationary contour in a first rotary positioned and after rotation 90° to a second rotary position.

10

Each plate 4 has a heat exchanging surface 5 with a corrugation of ridges and valleys, see Fig. 4. Each plate 4 also has an edge, which extends round the plate 4, and a substantially line-shaped or surface-shaped edge area 6, which extends around the heat  
15 exchanging surface 5 inside the edge. In the embodiment disclosed, the edge forms four side edges 7', 7''. Two 7' of the side edges are parallel to each other and folded downwardly in a first direction along a respective folding line that extends in the edge area 6 in parallel with the side edge 7' in question. The two second 7'' side  
20 edges are also parallel to each other and folded upwardly in a second opposite direction along a respective folding line extending in the edge area 6 in parallel with the side edge 7'' in question. In each corner of each plate 4 a tab 8 is formed when folding the side edges, which extends along a diagonal direction and in a plane  
25 which is substantially perpendicular to the extension plane p of the plates 4. These tabs 8 function as attachment members for mounting the plates 4 and the plate package 3 in the casing 2. More specifically, the tabs 8 are directly or indirectly attached in longitudinal grooves in four corner posts 9 which are arranged in a  
30 respective corner in the inner space of the casing 2. The corner posts 9 also function to delimit four part spaces 10 between the casing 2 and the plate package 3.

Every second plate 4 in the plate package 3 is rotated 90° around  
35 the rotary axis x, wherein the plates 4 are arranged in the plate package 3 in such a way that interspaces 13', 13'' are formed between adjacent plates 4 and that the first side edges 7' of a plate

4 abut the second side edges 7" of an adjacent plate 4. The adjacent side edges 7' and 7" are attached to each other by means of a weld joint 14, see Fig. 7. The weld joint 14 may be obtained by means of laser beam welding or electron beam welding. The 5 interspaces 13', 13" include a number of first interspaces 13' and a number of second interspaces 13", see Figs. 4-7. In such a way, the plate package 3, seen from two opposite sides, will be open with regard to the first interspaces 13' and closed with regard to the second interspaces 13". Seen from the two other opposite sides, 10 the plate package 3 will be closed with regard to the first interspaces 13' and opened with regard to the second interspaces 13". The first interspaces 13' are arranged to convey a first medium through the plate package 3 and second interspaces 13" are arranged to convey a second medium through the plate package 3.

15 The plate heat exchanger 1 includes a first inlet 16 and a first outlet 17 for the first medium, and a second inlet 18 and a second outlet 19 for the second medium. The inlets and the outlets to the plate package 3 proper extend through the sides of the plate package 3, i. 20 e. the heat exchanger media flow into and out of the plate package 3 in a direction that is substantially parallel to the main extension plane p of the plates 4. In the embodiment disclosed, the plate package 3 includes three part packages a, b, c. The part packages a, b, c are delimited from each other by means of two delimiting 25 plates 21, 22. It is to be noted that the plate package 3 may include another number of part packages, for instance 1, 2, 4 or more such part packages.

30 In the embodiment disclosed, the first medium is conveyed in through the first inlet 16 into the part package a through one side to the first interspaces 13'. The first medium leaves the part package a through the opposite side and is conveyed into the part space 10. In the part space 10, the first media is conveyed passing the delimiting plate 21 and into the part package b through a side to the first 35 interspaces 13'. The media leaves the part package b through the opposite side and enters the opposite part space 10. In this part space 10 the first media is conveyed passing the second delimiting

plate 22 and into the part package c through the side to the first interspaces 13'. Thereafter, the first media leaves to plate heat exchanger 1 via the opposite side of the part package c, the part space 10 and the second outlet 17. In a corresponding manner the 5 second media is conveyed into the first inlet 18 through the plate heat exchanger 1 and via the second inlet 19. It is to be noted that the second media also may be conveyed in counterflow to the first media in such a way that the outlet 19 forms an inlet and the inlet 18 an outlet.

10

The heat exchanging surface 5 includes in the embodiment disclosed in Fig. 4 a first area 31 with a corrugation of ridges and valleys, and a second area 32 with a corrugation of ridges and valleys. The valleys of both the areas 31, 32 of the heat exchanging 15 surface 5 are located at or at the level of the extension plane p and the ridges of both the areas 31, 32 of the heat exchanging surface 5 are located above the extension plane p.

The ridges and the valleys in the first area 31 extend in a first 20 direction A, and the ridges and the valleys in the second area extend in a second direction B. The first direction A is substantially perpendicular to the second direction B. Furthermore, the first direction A is substantially parallel to a diagonal line extending between two opposite corners of the plate 4, and the second 25 direction B is parallel to a diagonal line extending between the other two opposite corners of the plate 4. It is to be noted that the ridges and the valleys of the areas 31, 32 of the heat exchanging surface 5 may extend along other directions than those disclosed. The ridges and valleys in the first area 31 do not need to extend 30 perpendicularly to the ridges and valleys in the second area 32 but it is important that the ridges and valleys in the first area 31 form an angle to the ridges and valleys in the second area 32. The ridges and valleys of the areas 31, 32 of the heat exchanging surface 5 may also extend along curved path and have larger or smaller 35 interruptions or irregularities, for instance in order to form support points in relation to adjacent surfaces or in order to influence the

flow through the plate heat exchanger 1. Inserted portions with deviating patterns may also be present for other reasons.

5 The area of the first area 31 is substantially equal to the area of the second area 32. Each of the areas 31, 32 also has an outer and/or inner contour which coincides with a respective imaginary stationary contour in the first rotary position of the plate 4 with regard to the rotary axis x and after a rotation of 90° to the second rotary position of the plate 4 with regard to the rotary axis x. The second inner 10 area 32 is square and rotated 45° in relation to the first outer area 31, which also is square. The outer contour of the inner area 32 forms or coincides with the inner contour of the outer area 31. In the plate package 4 a ridge of the heat exchanging surface 5 will substantially always abut a valley of the heat exchanging surface 5 15 of an adjacent plate 4, wherein this ridge crosses this valley in such a way that a support point or a small support area is formed.

20 Each plate 4 includes a support area 41, which extends around the heat exchanging surface 5 inside the edge area 6. The support area 41 also includes a corrugation of ridges 42 and valleys 43. The border between the support area 41 and the heat exchanging surface 5 is marked with a border line 44 that is located at or at the level of the extension plane p. The valleys 43 of the support area 41 25 are located below the extension plane p and the ridges 42 of the support area 41 are located above the extension plane p.

30 In the proximity of each corner, the support area 41 has such a ridge 42 or valley 43 extending in a direction that substantially coincide with a diagonal line between the corners. Along a central part of the side edges, substantially each ridge 42 and valley 43 of the support area 41 extends inside one of the side edges in a direction which is substantially perpendicular to the side edge which lies most closely to said ridge 42 and valley 43. The direction of the ridges 42 and the valleys 43 of the support area 41 changes 35 successively from the diagonal direction in the corners to the perpendicular direction in the central parts.

The ridges 42 and the valleys 43 of the support area 41 are thus positioned in such a way that each valley 43 in the support area 41 of a plate 4 abuts a ridge 42 in the support area of a plate 4 lying therebelow, see Figs. 6 and 7. In such a way support lines, or 5 elongated support surfaces, will always be formed between all adjacent plates 4 in the plate package 3, which support lines extend in the directions of the ridges 42 and the valleys 43. Also the support area 41 has such a shape that the outer and inner contour of the support area 41 coincide for all plates 4 in the plate package 10 3.

Fig 8 discloses a plate 4 with a heat exchanging surface 5 which is divided in into two areas 31, 32 according to a second embodiment. The inner area 32 is shaped as a square that is positioned in such a 15 way that the side edges of the outer contour of the inner area 32 extend in parallel to the most closely lying side edges of the outer contour of the outer area 31.

Fig 9 discloses a plate 4 with a heat exchanging surface 5 that is 20 divided into two areas 31, 32 according to a third embodiment. The inner area 32 is shaped as a circle that is positioned in such a way that the centre point of the circle coincides with the centre point of the outer area 31.

Fig. 10 discloses a plate 4 with a heat exchanging surface 5 which 25 is divided into a plurality of areas according to a fourth embodiment. The plate 4 has two mains areas 31, 32, wherein one of the main areas 31 includes a central square area 33 and four triangular corner areas 34, one in each corner.

All plates according to Figs. 8-10 are as the plate in Fig. 4 also 30 shaped in such a way that each area 31, 32, 33, 34 has a respective outer and/or inner contour, which coincide with a respective imaginary stationary contour in the above-mentioned first 35 rotary position of the plate 4 with regard to the rotary axis x, and after a rotation of 90° to the above-mentioned second rotary position of the plate 4 with regard to the rotary axis x. The total area

of one of the areas 31, or the main area 31, is substantially equal to the total area of the other area 32, or the main area 32.

It is to be noted that the support area 41 is not indicated in Figs. 8-5 10, but these embodiments may of course also include a support area 41 of the type described above.

The invention is not limited to the embodiments disclosed but may be varied and modified within the scope of the following claims.

10

It is to be noted that the invention is applicable also to plates with a heat exchanging surface which merely has one area of ridges and valleys extending in one single, preferably substantially diagonal direction.

15

Claims

1. A heat exchanger plate (4) for a plate heat exchanger (1), wherein the plate includes
  - 5 an edge, which extends around the plate (4),
    - an edge area (6), which extends around the plate inside the edge, and
      - 10 a heat exchanging surface (5) with a corrugation of ridges and valleys, which extend in at least a first direction (A, B) over the plate,
    - characterised in that the plate includes a support area (41), which extends around the heat exchanging surface (5) inside the edge area (6) and includes a corrugation of ridges (42) and valleys (43).
  - 15 2. A plate according to claim 1, characterised in that the plate (4) includes a marked border line (44) between the heat exchanging surface (5) and the support area (41).
  - 20 3. A plate according to the any one of claims 1 and 2, characterised in that the plate (4) has a polygonal shape with at least four side edges and at least four corners.
  - 25 4. A plate according to claim 3, characterised in that in each corner, the support area (41) has such a ridge (42) or valley (43) which extends in a direction that substantially coincides with a diagonal line between the corners.
  - 30 5. A plate according to claim 3, characterised in that substantially each ridge (42) and valley (43) of the support area (41) along a central part of the side edges extends in a direction which is substantially perpendicular to the side edge that is most close to said ridge (42) and valley (43).
  - 35 6. A plate according to claims 4 and 5, characterised in that the direction of the ridges (42) and valleys (43) of the support area (41) changes successively from the diagonal direction in the corners to the perpendicular direction in the central parts.

7. A plate according to any one of the preceding claims, characterised in that the plate (4) includes an extension plane (p), which extends in and in parallel to the edge area (6), wherein said 5 valleys (43) of the support area (41) are located below the extension plane (p) and wherein said ridges (43) of the support area (41) are located above the extension plane (p).

8. A plate according to claims 2 and 7, characterised in that said 10 border line (44) is located at the extension plane (p).

9. A plate according to any one of claims 7 and 8, characterised in that said valleys of the heat exchanging surface (5) are located at the extension plane (p) and in that said ridges of the heat 15 exchanging surface (5) are located above the extension plane (p).

10. A plate according to any one of the preceding claims, characterised in that the plate (4) is substantially square and has four side edges (7', 7''), wherein two (7') of said side edges are 20 parallel and folded in a first direction along a respective folding line extending in said edge area (6) in parallel with the side edge (7') in question, wherein two second (7'') of said side edges are parallel and folded in a second direction along a respective folding line extending in said edge area (6) in parallel with the side edge (7'') in 25 question and wherein the first direction is opposite to the second direction.

11. A plate according to any one of the preceding claims, characterised in that the heat exchanging surface (5) includes at 30 least a first area (31, 33, 34) with a corrugation of ridges and valleys, the plurality of which extends in a first direction (A), and at least a second area (32) with a corrugation of ridges and valleys, the plurality of which extends in a second direction (B), wherein the plate (4) has a central rotary axis (x) extending in parallel with a 35 normal line of the plate (4) and wherein said areas (31-34) have a respective contour coinciding with a respective imaginary stationary contour in a first rotary position of the plate (4) with regard to said

rotary axis (x) and after a rotation of 90° to a second rotary position of the plate (4) with regard to said rotary axis (x).

5 12. A plate according to claim 11, characterised in that the area of said first area (31, 33, 34) is substantially equal to the area of said second area (32).

10 13. A plate according to any one of claims 11 and 12, characterised in that the first direction (A) is substantially perpendicular to the second direction (B).

15 14. A plate according to any one of claims 11-13, characterised in that the first direction (A) is substantially parallel to the diagonal line.

15 15. A plate according to any one of the claims 11-14, characterised in that the plate (4) has a contour which coincides with an imaginary stationary contour in said first rotary position and in said second rotary position.

20 16. A plate package for a plate heat exchanger, characterised in that the plate package (3) includes a number of plates according to any one of claims 1-15, which are arranged on each other.

25 17. A plate package according to claim 16, characterised in that the plates in the plate package (3) are arranged in such a way that every second plate (4) is rotated 90° about said rotary axis (x) and in such a way that an inter space (13', 13'') is formed between adjacent plates (4), wherein said areas (31-34) have such a shape 30 that the contour of the first area (31, 33, 34) coincides for all plates (4) in the plate package (3), that the contour of the second area (32) coincides for all plates (4) in the plate package (3) and in that the contour of the support area (41) coincides for all plates (4) in the plate package (3).

18. A plate package according to any one of claims 16 and 17, characterised in that the plates (4) in the plate package (3) are welded to each other.

5 19. A plate package according to claim 18 including plates according to claim 10, characterised in that the plates (4) are arranged on each other in such a way that said first side edges (7') of a plate (4) abut said second side edges (7'') of an adjacent plate (4), wherein these side edges (17', 17'') are connected to each 10 other by means of a weld joint (14).

20. A plate package according to any one of claims 16-19, characterised in that substantially all plates (4) are substantially identical.

15 21. A plate package according to any one of claim 16-20, characterised in that said interspaces (13', 13'') includes a number of first interspaces (13') and a number of second interspaces (13''), wherein the first interspaces (13') are arranged to convey a first medium through the plate package (3) and the second interspaces (13'') are arranged to convey a second medium through the plate 20 package (3).

22. A plate heat exchanger, characterised in that the plate heat 25 exchanger includes a plate (4) according to any one of claims 1-15.

23. A plate heat exchanger, characterised in that the plate heat exchanger includes a plate package (3) according to any one of claims 16-21.




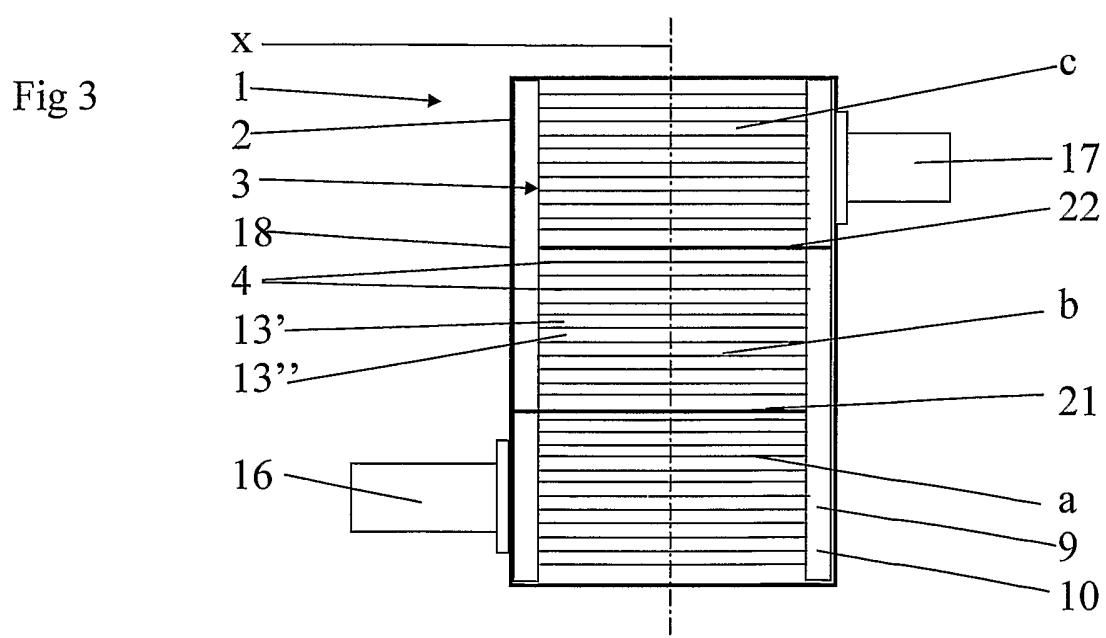


Fig 4

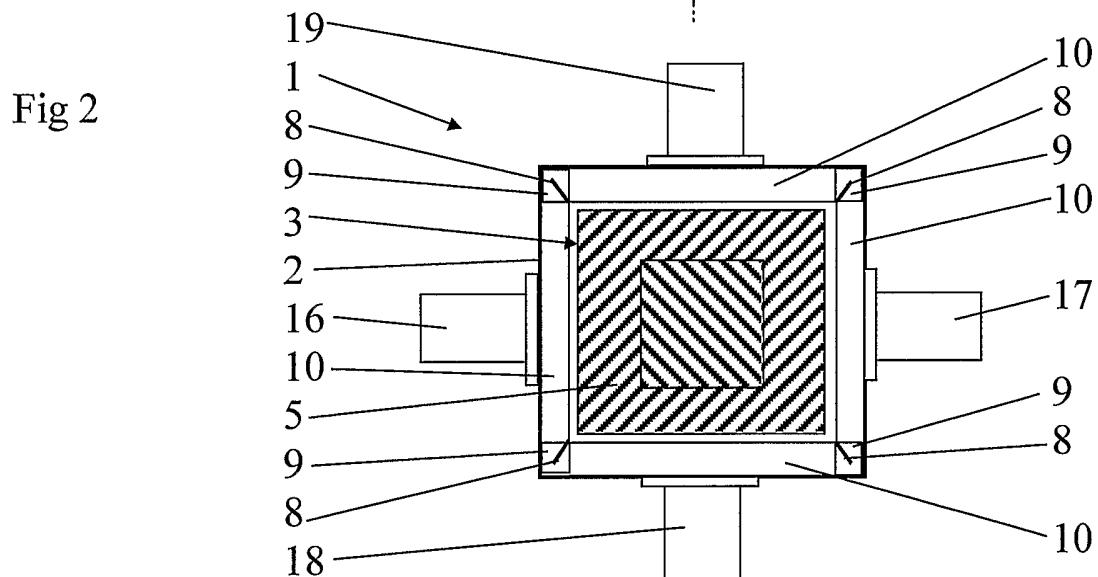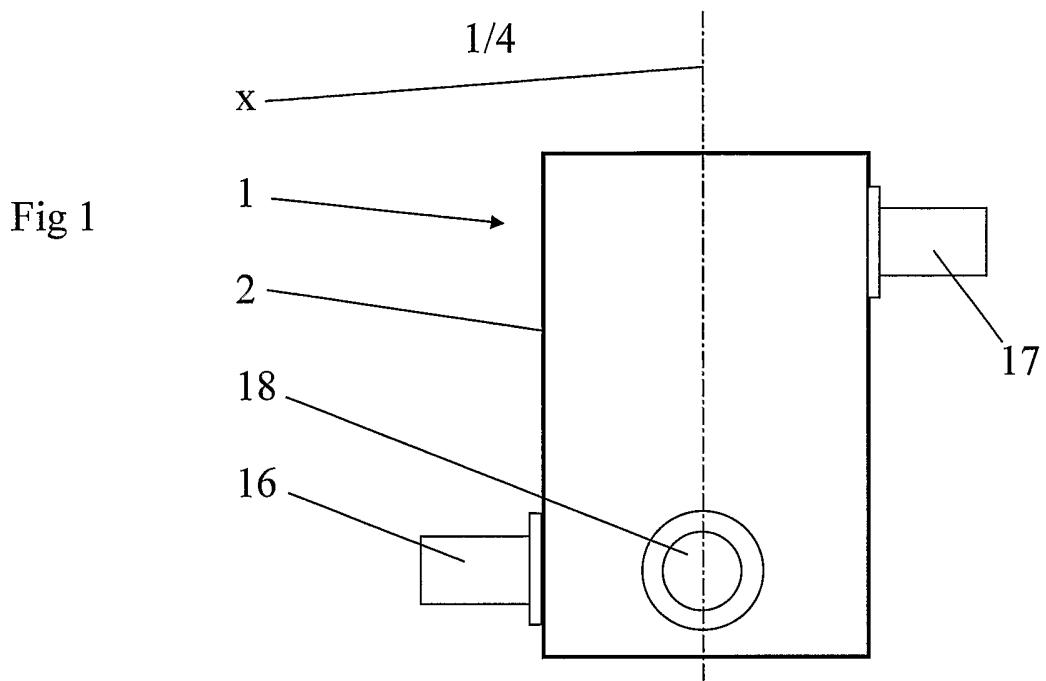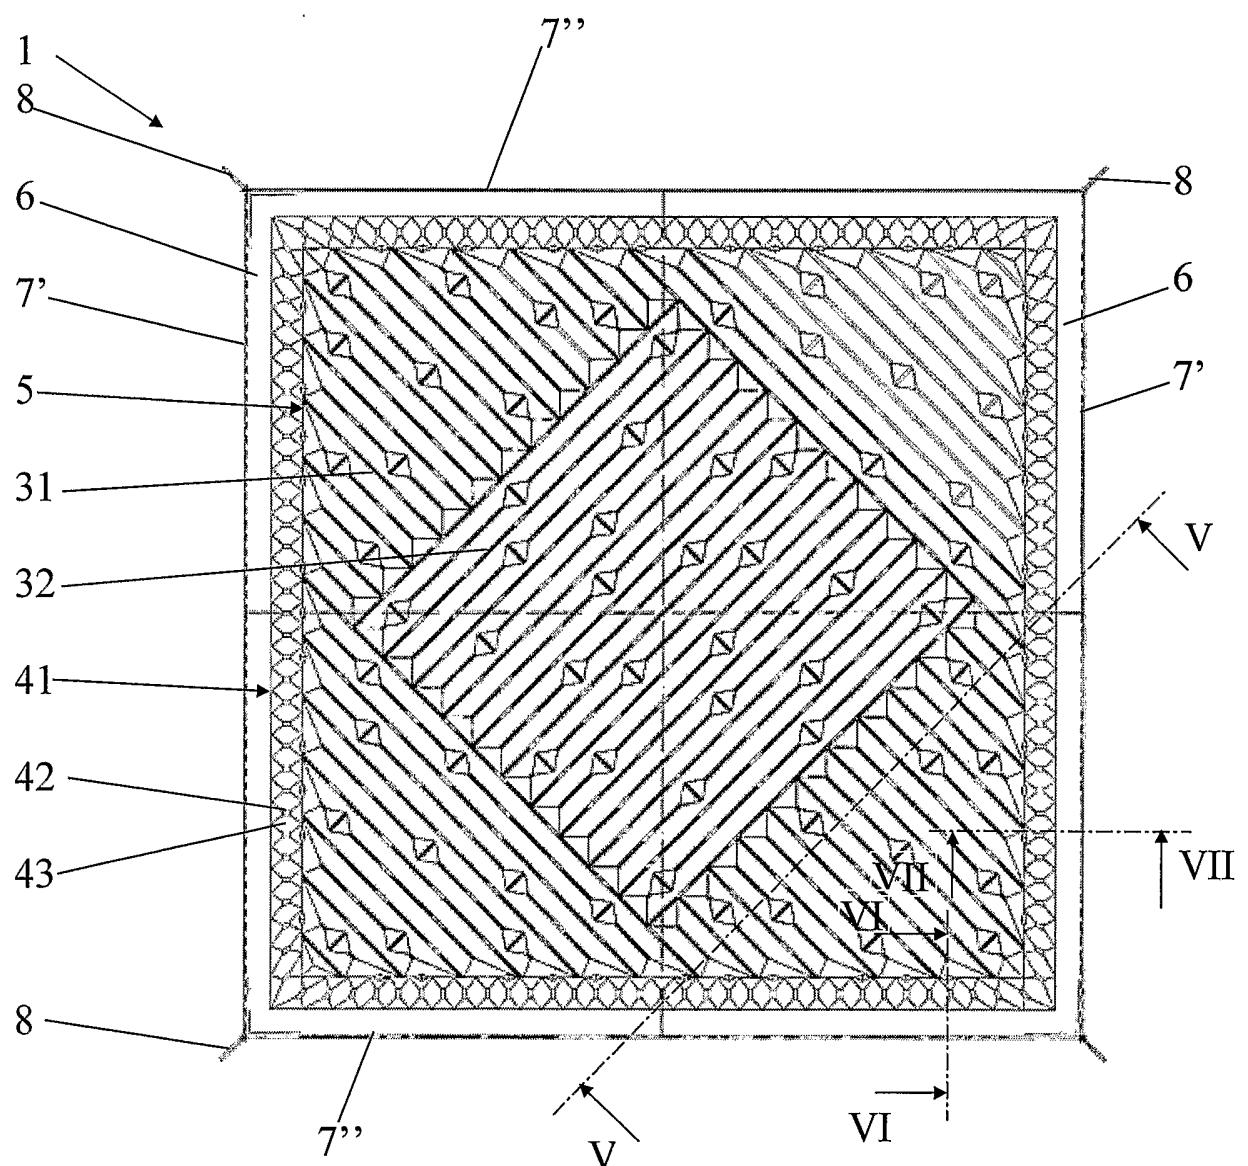

3/4

Fig 5

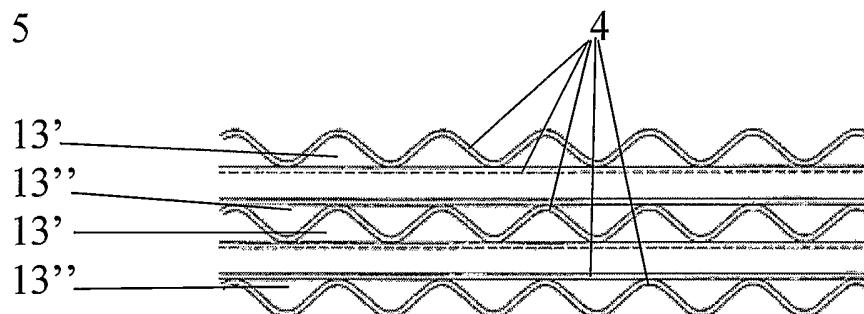


Fig 6


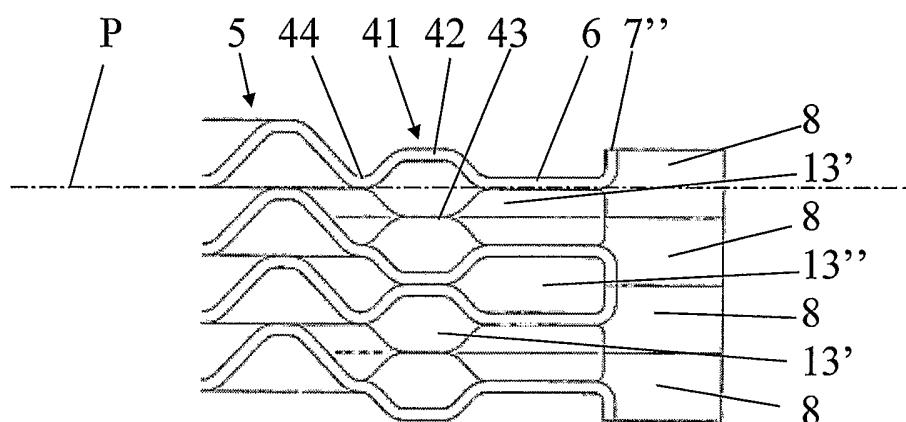


Fig 7

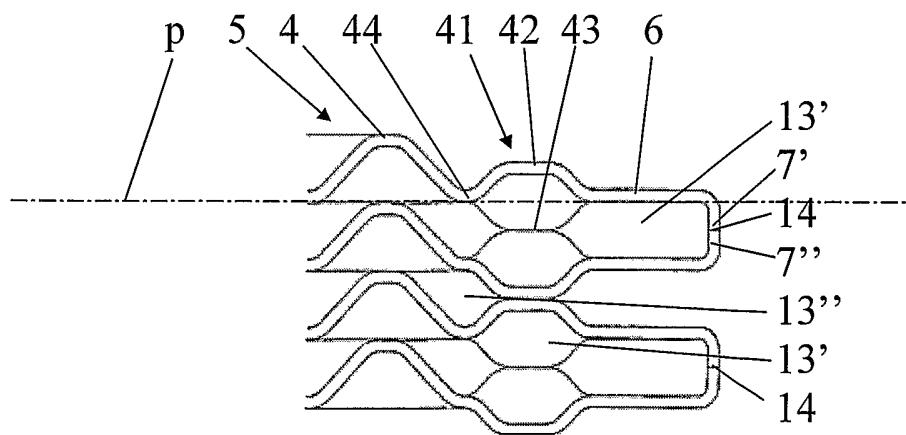

4/4

Fig 8

B  
A  
4  
6  
5  
31  
32

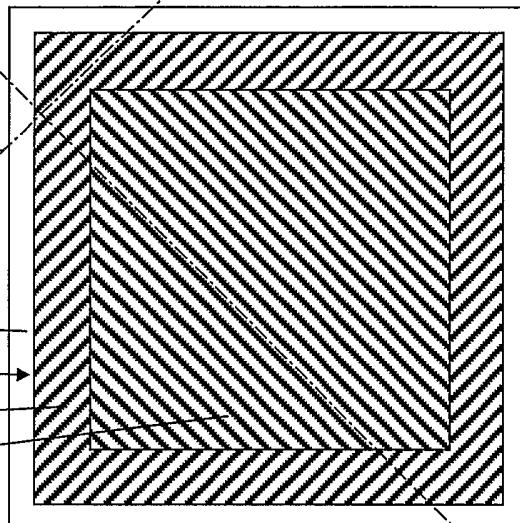


Fig 9

B  
A  
4  
6  
5  
31  
32


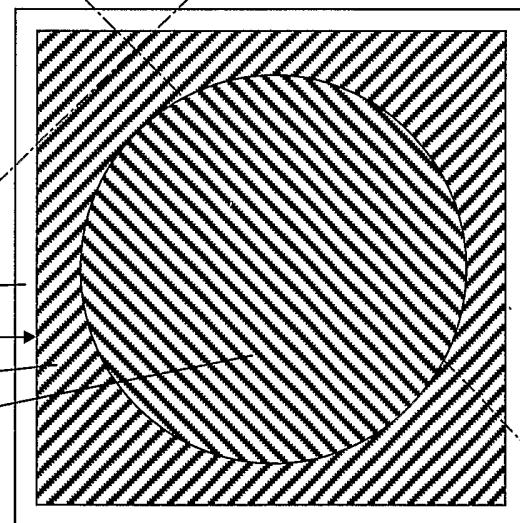


Fig 10

34  
4  
6  
5  
32  
33  
34

A  
B

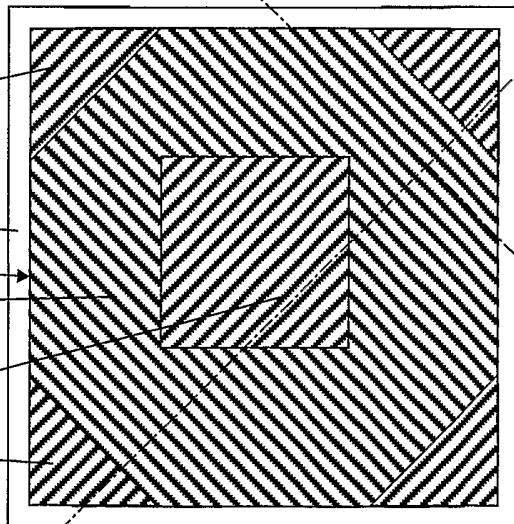

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/02086

## A. CLASSIFICATION OF SUBJECT MATTER

**IPC7: F28F 3/00, F28D 9/00**

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

**IPC7: F28F, F28D**

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

**SE,DK,FI,NO classes as above**

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**EPO-INTERNAL, WPI DATA, PAJ**

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	AT 393162 B (BRÖCKL, GERHARDT AL), 26 August 1991 (26.08.91) --	
A	GB 1339542 A (A.P.V. COMPANY LIMITED), 5 December 1973 (05.12.73) --	
A	EP 0165179 A1 (VICARB SOCIETE ANONYME), 18 December 1985 (18.12.85) --	
A	US 4678030 A (ALMQVIST), 7 July 1987 (07.07.87) --	

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

18 March 2002

Date of mailing of the international search report

19/02/2003

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. + 46 8 666 02 86Authorized officer  
Innette Riedel / JA A  
Telephone No. + 46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/SE 02/02086

**C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5088552 A (RAUNIO), 18 February 1992 (18.02.92) --	
A	US 5226474 A (HALLGREN), 13 July 1993 (13.07.93) -- -----	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

30/12/02

International application No.

PCT/SE 02/02086

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
AT	393162	B	26/08/91	AT	175787 A
GB	1339542	A	05/12/73	DE	2109346 A
EP	0165179	A1	18/12/85	DE	3560735 D
				FR	2562997 A,B
				JP	1805162 C
				JP	5014196 B
				JP	60238697 A
				US	4719970 A
US	4678030	A	07/07/87	DE	3567536 D
				EP	0204880 A,B
				JP	1780502 C
				JP	4068556 B
				JP	61285392 A
				SE	458805 B,C
				SE	8502802 A
US	5088552	A	18/02/92	AT	82633 T
				AU	613068 B
				AU	2079188 A
				BR	8807611 A
				DE	3876100 A,T
				DK	10090 A
				DK	167293 B
				EP	0375691 A,B
				SE	0375691 T3
				FI	79409 B,C
				FI	873085 A
				JP	2504181 T
				JP	2582887 B
				NO	170241 B,C
				NO	900179 A
				SU	1823921 A
				WO	8900671 A

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

30/12/02

International application No.

PCT/SE 02/02086

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 5226474 A	13/07/93	BR 9105744 A		04/08/92
		DE 69102755 D, T		27/10/94
		DK 485555 T		01/08/94
		EP 0485555 A, B		20/05/92
		SE 0485555 T3		
		ES 2060386 T		16/11/94
		JP 2968042 B		25/10/99
		JP 4506996 T		03/12/92
		SE 466171 B, C		07/01/92
		SE 9001633 A		09/11/91
		WO 9117406 A		14/11/91