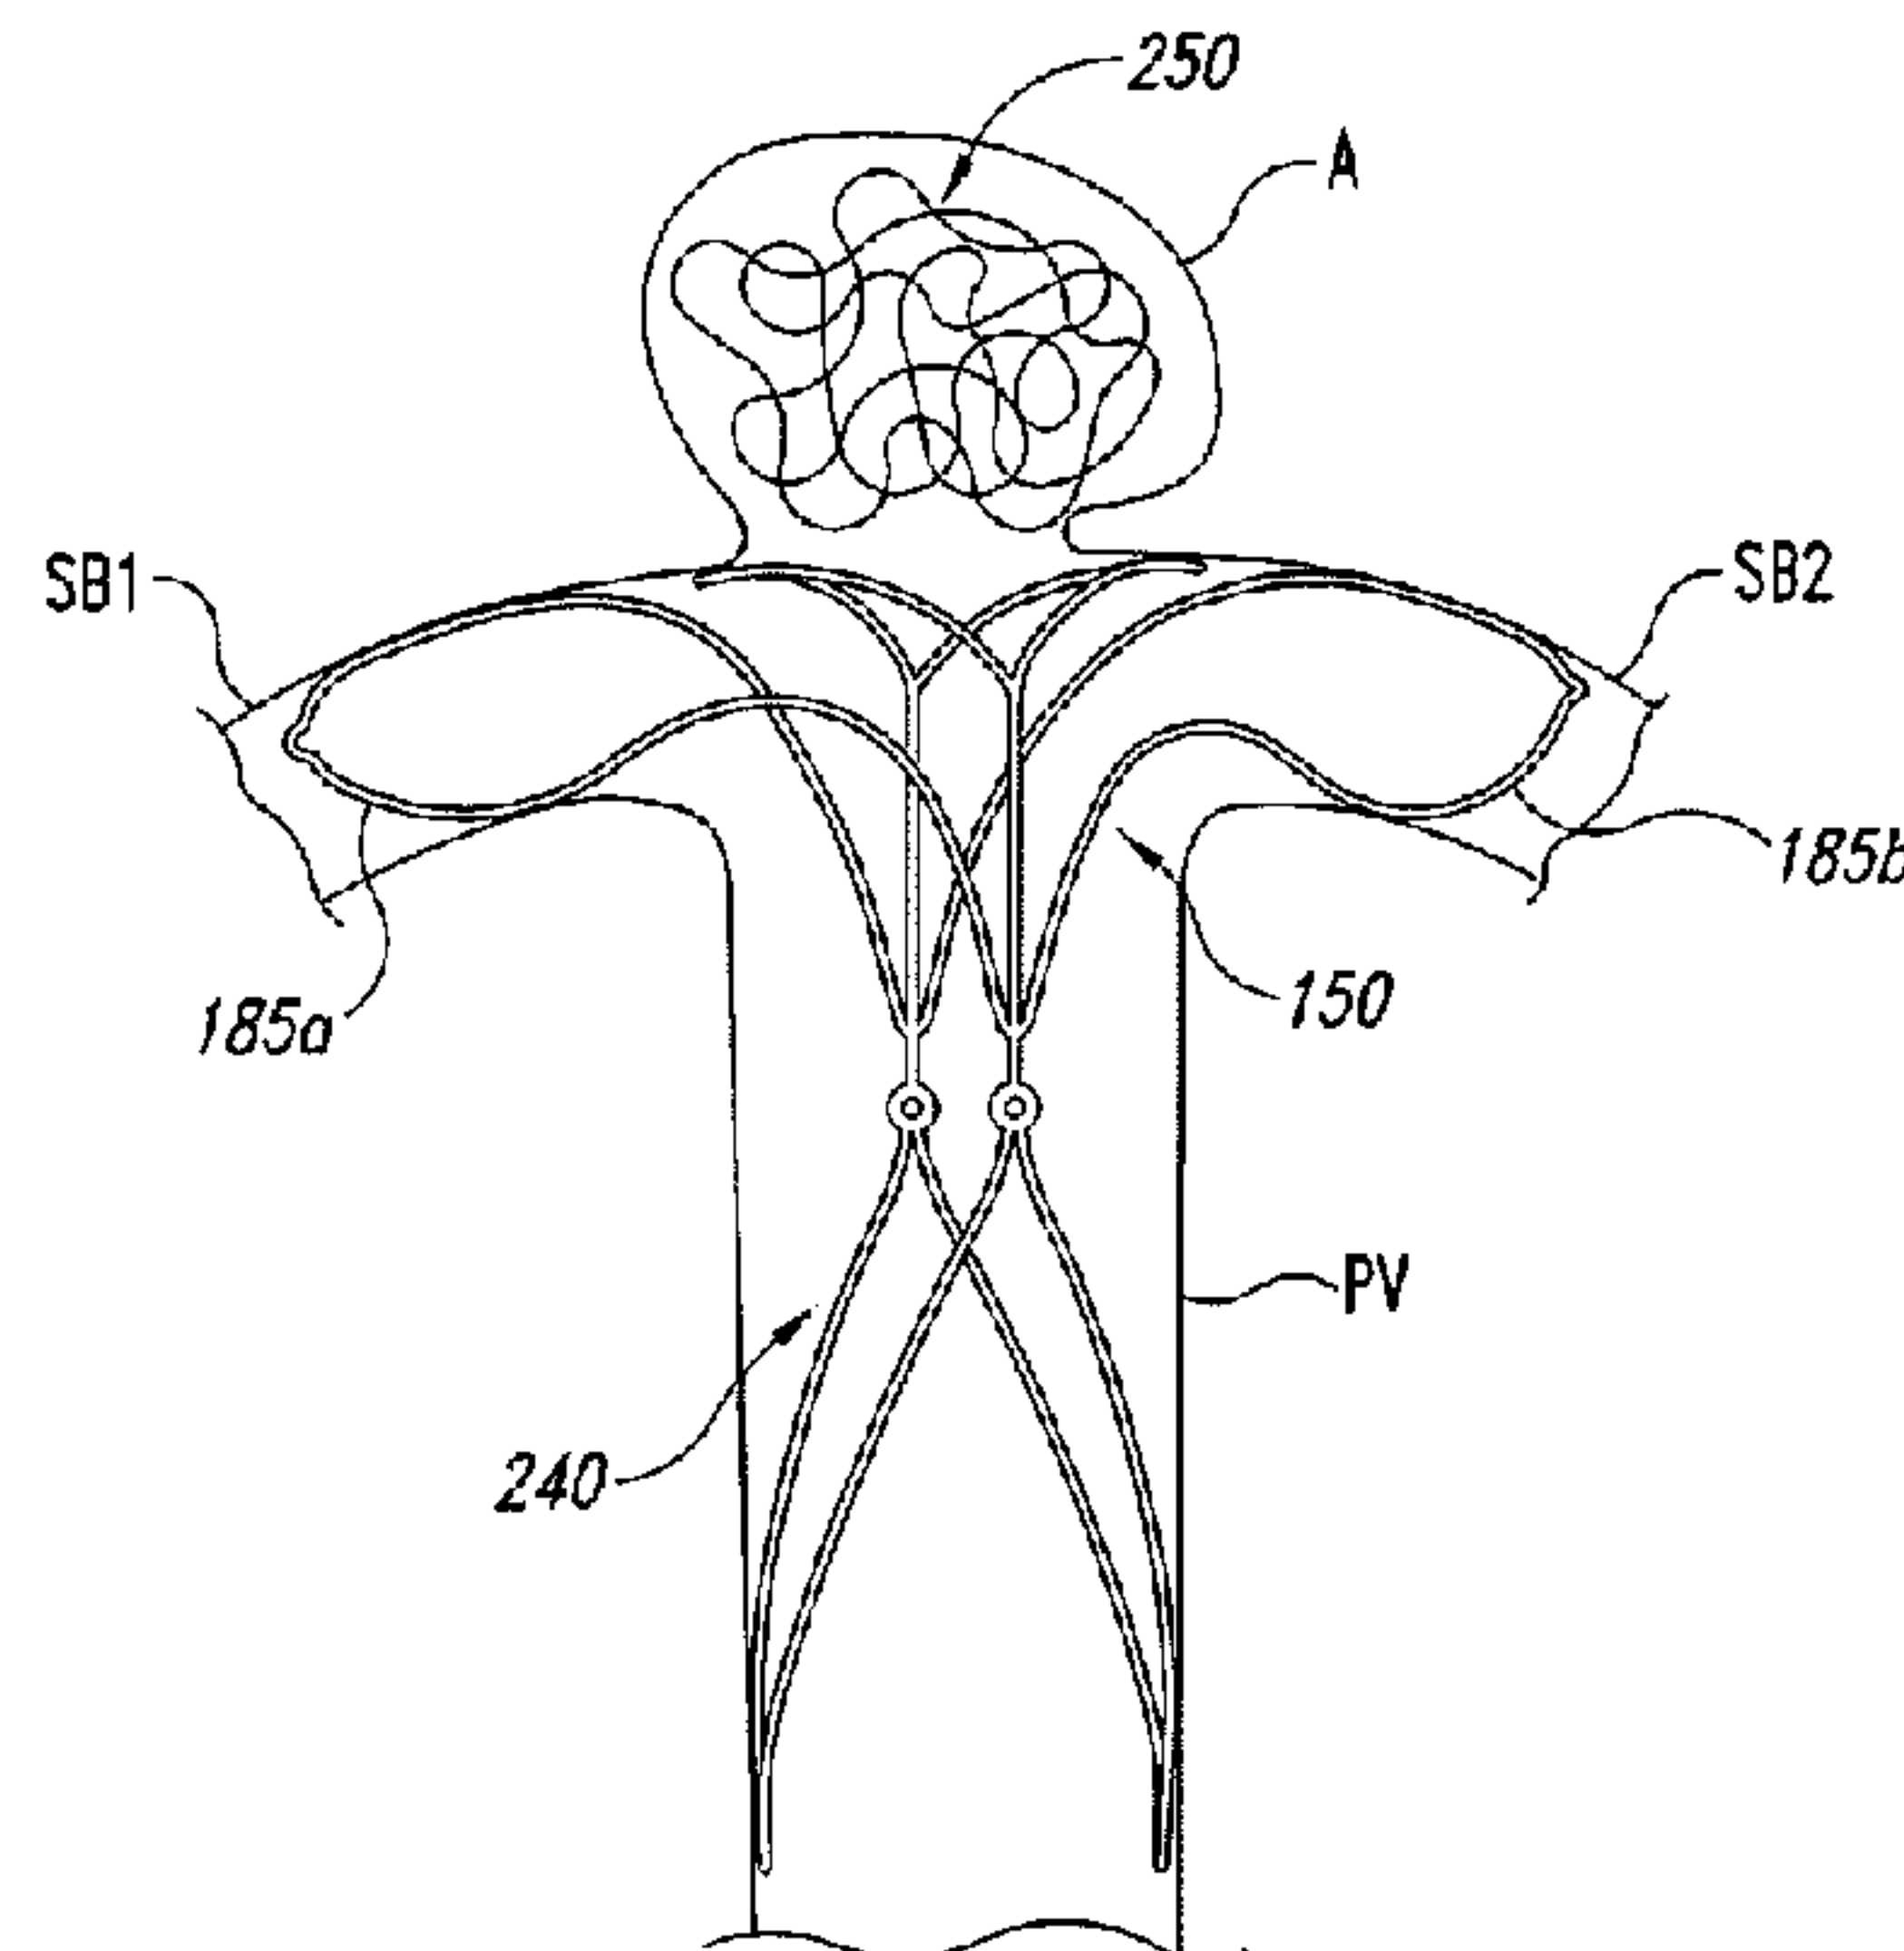




(86) Date de dépôt PCT/PCT Filing Date: 2012/06/01
(87) Date publication PCT/PCT Publication Date: 2012/12/06
(45) Date de délivrance/Issue Date: 2019/07/09
(85) Entrée phase nationale/National Entry: 2013/11/25
(86) N° demande PCT/PCT Application No.: US 2012/040558
(87) N° publication PCT/PCT Publication No.: 2012/167156
(30) Priorité/Priority: 2011/06/03 (US61/493,356)

(51) Cl.Int./Int.Cl. *A61B 17/12* (2006.01)
(72) Inventeur/Inventor:
GERBERDING, BRENT, US
(73) Propriétaire/Owner:
PULSAR VASCULAR, INC., US
(74) Agent: NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : DISPOSITIFS DE TRAITEMENT DE L'ANEVRISME AYANT DES MECANISMES D'ANCRAGE
SUPPLEMENTAIRES, SYSTEMES ET PROCEDES ASSOCIES
(54) Title: ANEURYSM DEVICES WITH ADDITIONAL ANCHORING MECHANISMS AND ASSOCIATED SYSTEMS AND
METHODS



(57) **Abrégé/Abstract:**

The present technology relates to aneurysm devices with additional anchoring mechanisms, and associated systems and methods. In some embodiments, the aneurysm devices are endovascularly deliverable to a site proximate an aneurysm near a parent artery with bifurcating branches. The aneurysm devices can include a closure structure (102) comprising a distal-facing aspect configured to at least partially occlude the aneurysm and a proximal-facing aspect configured to arch over lumina of the bifurcating branches. The devices further include a supplemental stabilizer (103) connected to the closure structure. The supplemental stabilizer is configured to reside in the parent artery. The closure structure includes a hinge point (175) where the closure structure folds to form a loop element configured for anchoring within at least one of the bifurcating branches.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
6 December 2012 (06.12.2012)(10) International Publication Number
WO 2012/167156 A1(51) International Patent Classification:
A61B 17/12 (2006.01)(21) International Application Number:
PCT/US2012/040558(22) International Filing Date:
1 June 2012 (01.06.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/493,356 3 June 2011 (03.06.2011) US(71) Applicant (for all designated States except US): **PULSAR VASCULAR, INC.** [US/US]; 4030 Moorpark Ave #110, San Jose, CA 95117 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GERBERDING, Brent** [US/US]; 1245 Settle Ave., San Jose, CA 95125 (US).(74) Agents: **CARMODY, Sarah, E.** et al.; Perkins Coie LLP, P.O. Box 1247, Seattle, WA 98111-1247 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

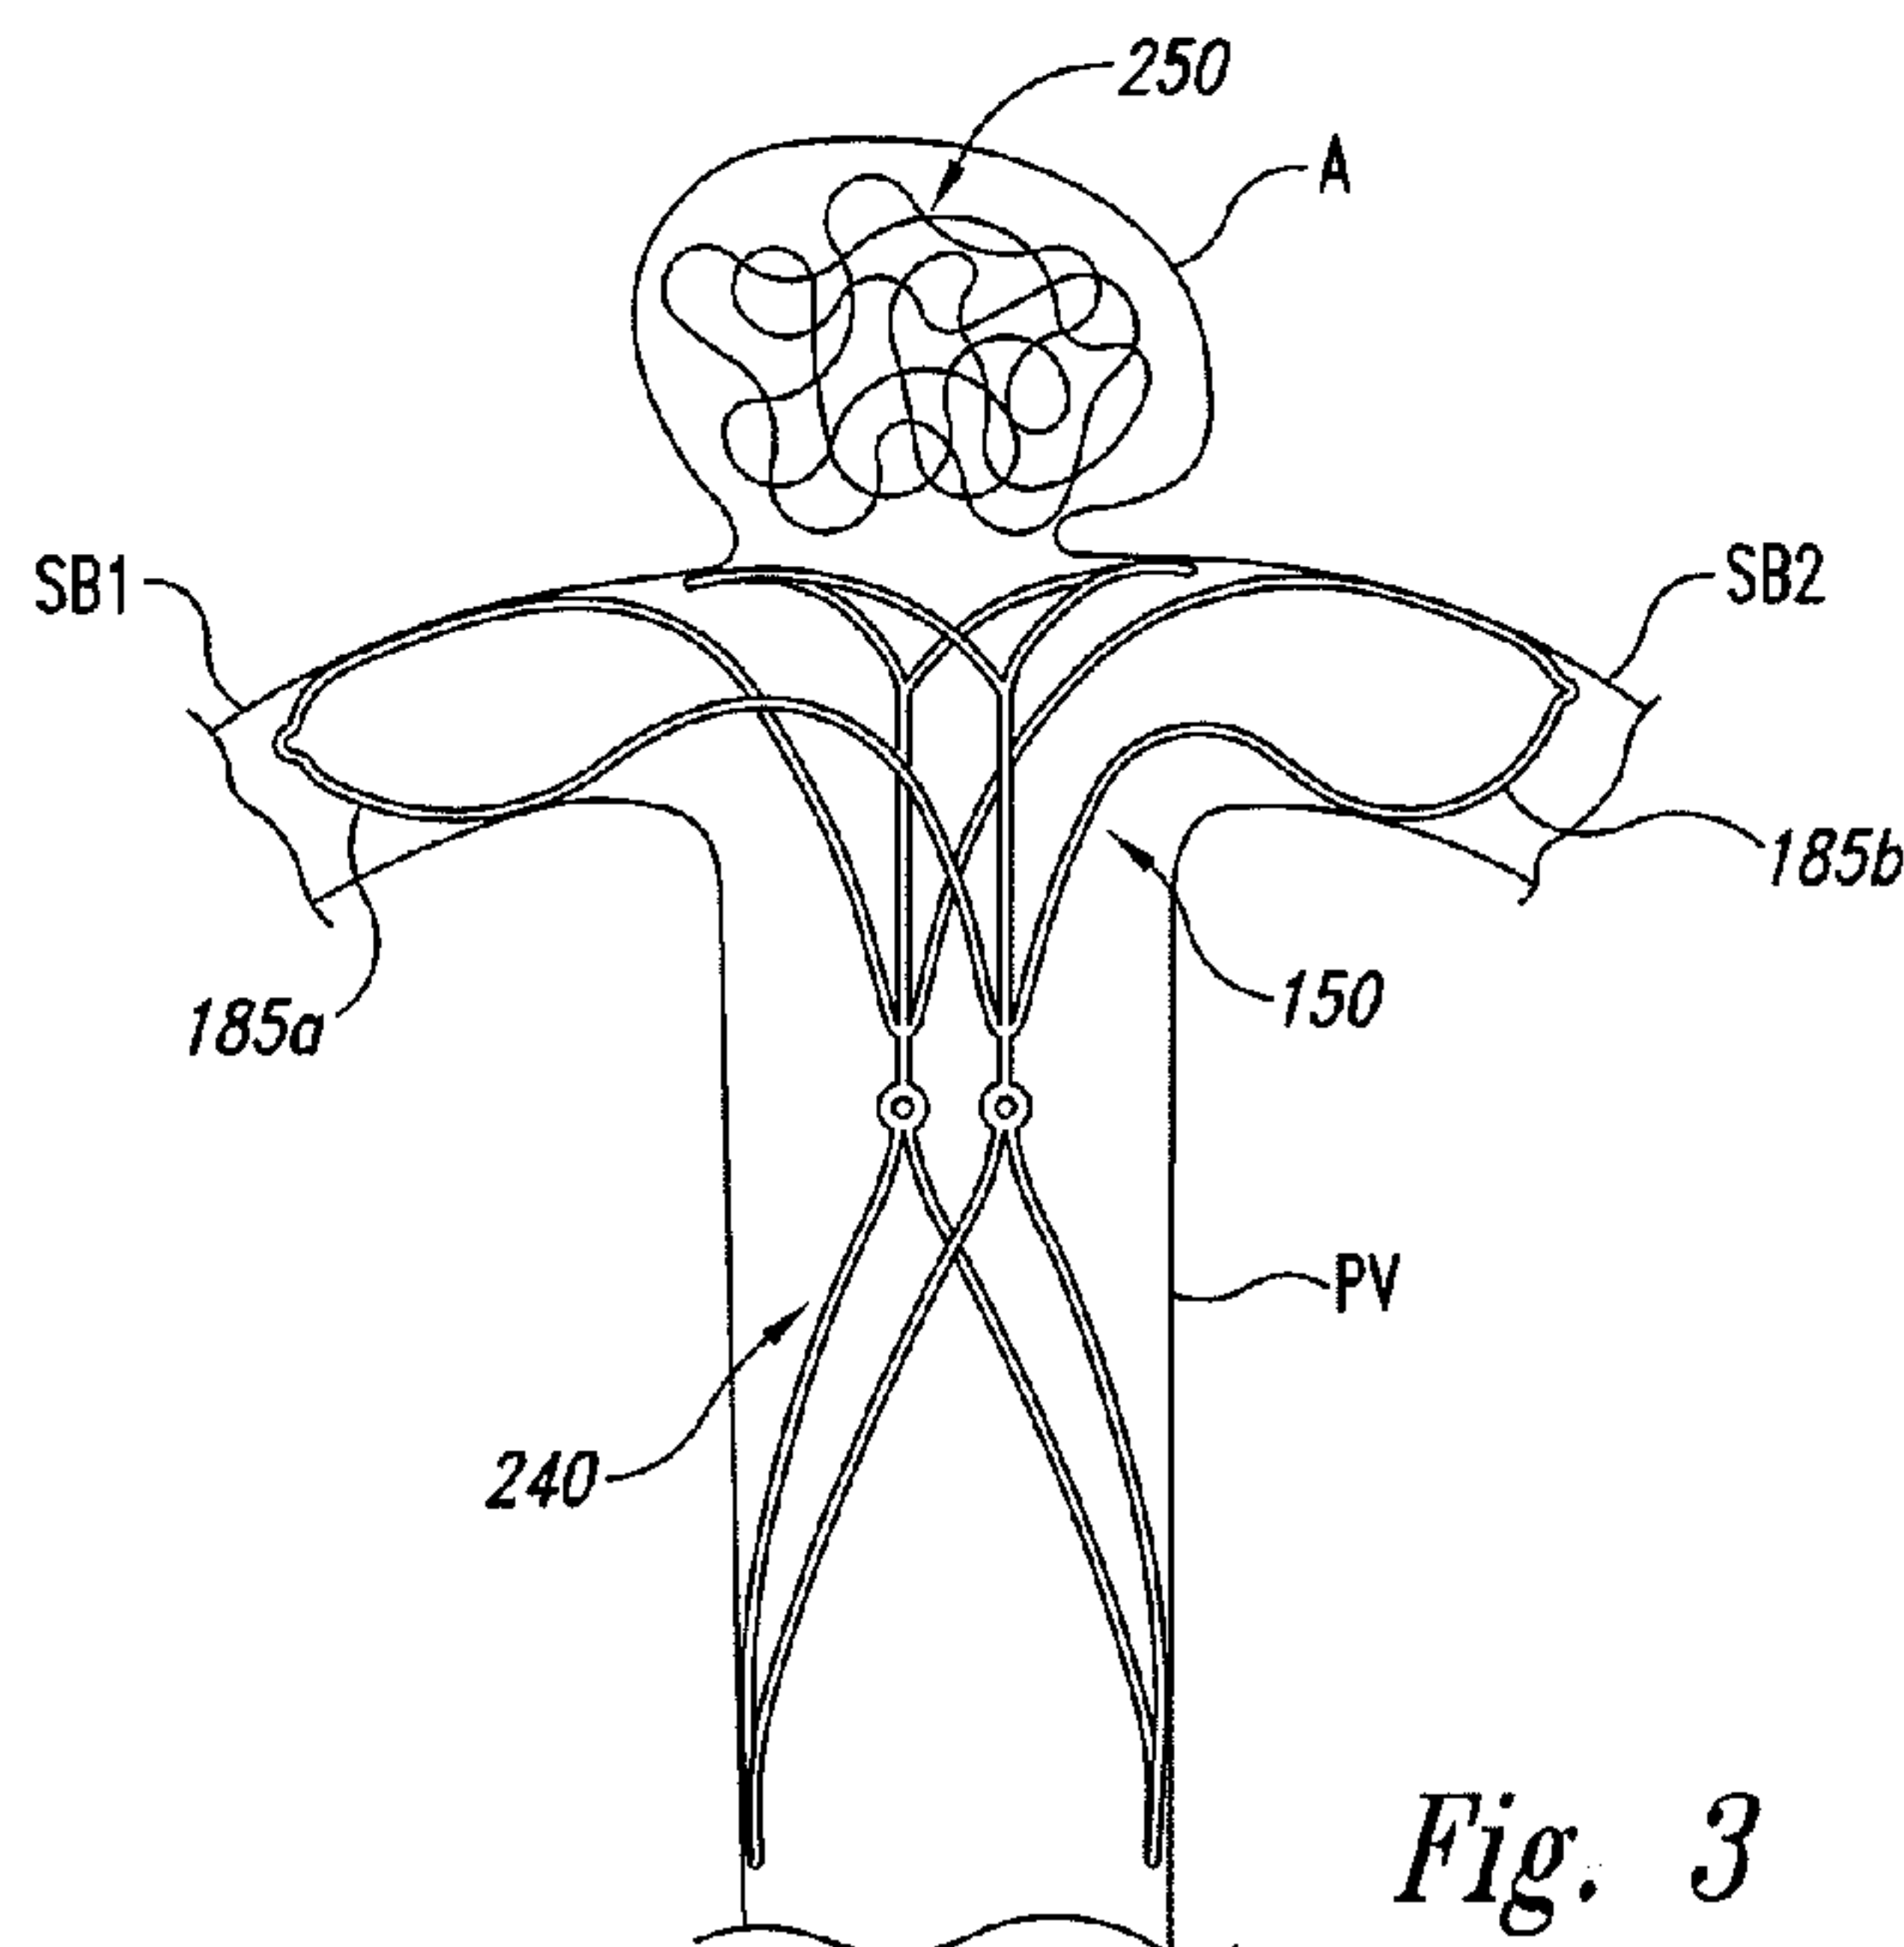
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: ANEURYSM DEVICES WITH ADDITIONAL ANCHORING MECHANISMS AND ASSOCIATED SYSTEMS AND METHODS

*Fig. 3*

(57) Abstract: The present technology relates to aneurysm devices with additional anchoring mechanisms, and associated systems and methods. In some embodiments, the aneurysm devices are endovascularly deliverable to a site proximate an aneurysm near a parent artery with bifurcating branches. The aneurysm devices can include a closure structure (102) comprising a distal-facing aspect configured to at least partially occlude the aneurysm and a proximal-facing aspect configured to arch over lumina of the bifurcating branches. The devices further include a supplemental stabilizer (103) connected to the closure structure. The supplemental stabilizer is configured to reside in the parent artery. The closure structure includes a hinge point (175) where the closure structure folds to form a loop element configured for anchoring within at least one of the bifurcating branches.

ANEURYSM DEVICES WITH ADDITIONAL ANCHORING MECHANISMS AND ASSOCIATED SYSTEMS AND METHODS

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application claims the benefit of pending U.S. Provisional Patent Application No. 61/493,356, filed on June 3, 2011.

TECHNICAL FIELD

[0002] The present technology relates to implantable therapeutic devices at a target site, such as an opening at a neck of an aneurysm. In particular, the present technology is generally directed to aneurysm devices with additional anchoring mechanisms and associated systems and methods.

BACKGROUND

[0003] Many of the currently available surgical approaches for closing openings and repairing defects in anatomical lumens and tissues (e.g., blood vessels), septal defects, and other types of anatomical irregularities and defects are highly invasive. Surgical methods for clipping brain aneurysms, for example, require opening the skull, cutting or removing overlying brain tissue, clipping and repairing the aneurysm from outside the blood vessel, and then reassembling tissue and closing the skull. The risks related to anesthesia, bleeding, and infection associated with these types of procedures are high, and tissue that is affected during the procedure may or may not survive and continue functioning.

[0004] Minimally invasive techniques for treating aneurysms are accordingly highly desirable. In general, the minimally invasive therapeutic objective is to prevent material that collects or forms in the aneurysm cavity from entering the bloodstream and to prevent blood from entering and collecting in the aneurysm. This is often accomplished by introducing various materials and devices into the aneurysm. For example, implantable vaso-occlusive metallic structures are well known and commonly used. Many conventional vaso-occlusive devices have helical coils constructed from a shape memory material or noble metal that forms a desired coil

configuration upon exiting the distal end of a delivery catheter. The function of the coil is to fill the space formed by an anatomical defect and to facilitate the formation of an embolus with the associated allied tissue. Multiple coils of the same or different structures may be implanted serially in a single aneurysm or other vessel defect during a procedure. Implantable framework structures are also used in an attempt to stabilize the wall of the aneurysm or defect prior to insertion of filling material such as coils.

[0005] It is crucial to accurately implant such vaso-occlusive devices within the internal volume of a cavity and to maintain the device within the internal volume of the aneurysm. Migration or projection of a vaso-occlusive device from the cavity may interfere with blood flow or nearby physiological structures and poses a serious health risk. In addition to the difficulties of delivering implantable occlusion devices, some types of aneurysms are challenging to treat because of structural features of the aneurysm or because of particularities of the site. Wide-neck aneurysms, for example, are known to present particular difficulty in the placement and retention of vaso-occlusive coils. Aneurysms at sites of vascular bifurcation are another example where the anatomical structure poses challenges to methods and devices that are effective in treating the typical sidewall aneurysms. It is therefore challenging to position conventional implantable devices during deployment, prevent shifting or migration of such devices after deployment, and preserve blood flow in neighboring vessels following after deployment.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] Figure 1 is a top plan view of an aneurysm device configured in accordance with an embodiment of the technology.

[0007] Figure 2 is a side view of the aneurysm device of Figure 1 in a partially deployed configuration.

[0008] Figure 3 is a view of the aneurysm device of Figures 1 and 2 deployed at the neck of an aneurysm and lodged at the bifurcated side artery branches.

DETAILED DESCRIPTION

[0009] The present disclosure describes implantable therapeutic devices and methods for endovascular placement of devices at a target site, such as an opening at a neck of an aneurysm.

In particular, selected embodiments of the present technology are directed to devices having additional anchoring mechanisms for lodging at bifurcated branches at the neck of the aneurysm. The following description provides many specific details for a thorough understanding of, and enabling description for, embodiments of the disclosure. Well-known structures, systems, and methods often associated with aneurysm treatment systems have not been shown or described in detail to avoid unnecessarily obscuring the description of the various embodiments of the disclosure. In addition, those of ordinary skill in the relevant art will understand that additional embodiments may be practiced without several of the details described below.

[0010] Figures 1 and 2 illustrate an embodiment of an aneurysm device 150 configured in accordance with the present technology. In particular, Figure 1 is a top plan view of the aneurysm device 150 in a substantially flat, pre-assembled configuration, and Figure 2 is a side view of the aneurysm device 150 in a deployed configuration. Referring to Figure 1, the aneurysm device 150 can comprise a closure structure 102 and a supplemental stabilizer or support 103 extending from the closure structure 102. The closure structure 102 can be a frame, scaffold, or other structure that at least partially occludes the neck of an aneurysm to prevent embolic coils or other coagulative material within the aneurysm from escaping into the bloodstream. The closure structure 102 includes a perimeter support 160 and an inner support 170. The perimeter support 160 and inner support 170 can be joined at junctions 162 and 164. The supplemental stabilizer 103 is shown in an unassembled stage in Figure 1. Once assembled, the proximally extending sides of the closure structure 102 and the supplemental stabilizer 103 hold the curved portion of the closure structure 102 at the neck of the aneurysm.

[0011] The aneurysm device 150 can have struts 180a-d projecting proximally from the junctions 162 and 164. Struts 180a and 180c can be connected at junction 162 and struts 180b and 180d are connected at junction 164 to form the supplemental stabilizer 103 with proximal anchoring segments. In one embodiment, the struts 180a-d each include a hinge point or bend point 175a-d. The hinge points 175a-d define collapse points and allow the struts 180a-d to preferentially fold down in a manner that forms additional supporting elements for the aneurysm device 150 that can be lodged in side artery branches at an aneurysm neck.

[0012] In the embodiment illustrated in Figure 1, the aneurysm device 150 is constructed from a substantially flat substrate by cutting, etching, stamping, or otherwise forming the framework of the closure structure 102, the unassembled supplemental stabilizer 103, and the

hinge points 175a-d. The closure structure 102 and the supplemental stabilizer 103 can be constructed from a flat sheet of material having substantially uniform thickness, but in other embodiments different regions of the sheeted material can have different thicknesses corresponding to the desired thickness for portions of the closure structure 102 and/or the supplemental stabilizer 103. Further, in other embodiments the aneurysm device 150 may be formed using different techniques and/or materials.

[0013] Figure 2 is a side view of the aneurysm device 150 in a partially deployed configuration. In particular, as the aneurysm device 150 is deployed from a delivery catheter 202, loop elements 185a and 185b form and begin to fully open. The loop elements 185a-b start to open as the delivery catheter 202 is being withdrawn and fully open when the delivery catheter 202 is fully withdrawn. As described in greater detail below with reference to Figure 3, the loop elements 185a-b are configured to provide a mechanism for the aneurysm device 150 to anchor in bifurcated side branches when deployed across the neck of an aneurysm. In other embodiments, the loop elements 185a-b can have a different arrangement and/or the aneurysm device 150 may include a different number of loop elements 185.

[0014] Figure 3 illustrates the aneurysm device 150 of Figures 1 and 2 deployed at the neck of an aneurysm A with anchoring legs 240. As mentioned above, when the aneurysm device 150 is deployed, the loop elements 185a-b open and can lodge in side branch vessels SB1 and SB 2, respectively. The lodging of the loop elements 185a-b within the side branch vessels SB 1 and SB 2 is expected to provide additional anchoring mechanisms for the aneurysm device 150 at the aneurysm A, and is expected to provide more secured lodging/deployment of the aneurysm device 150.

[0015] Figure 3 additionally illustrates the use of the aneurysm device 150 to retain debris and/or other materials, such as an embolic coil mass 250, within the aneurysm cavity. In one embodiment, for example, implantable devices of the present technology may be deployed to retain debris and/or previously placed materials within the aneurysm cavity. In another embodiment, implantable devices of the present technology may be deployed before placing materials, such as embolic materials, coils, and the like, in the aneurysmal cavity, and then the materials may be placed through the openings in the closure structure. In this situation, the aneurysm device may be retracted following placement of the embolic materials, or it may be detached and left at the site.

Examples

1. An aneurysm device endovascularly deliverable to a site proximate an artery with bifurcating branches, the aneurysm device comprising:
a closure structure comprising a distal-facing aspect configured to at least partially block an opening to the aneurysm and a proximal-facing aspect configured to arch over lumina of the bifurcating branches; and
a supplemental stabilizer connected to the closure structure, the supplemental stabilizer configured to reside in the artery;
wherein the closure structure includes a hinge point at which the closure structure folds to form a loop element configured for anchoring within at least one of the bifurcating branches.
2. The aneurysm device of example 1 wherein the closure structure comprises struts.
3. The aneurysm device of example 2 wherein the hinge point is formed on one of the struts.
4. The aneurysm device of example 1 wherein the closure structure comprises four hinge points.
5. The aneurysm device of example 1 wherein the closure structure is transformable between a compressed configuration and a deployed configuration.
6. The aneurysm device of example 5, further comprising a catheter configured to retain the closure structure in the compressed configuration.
7. The aneurysm device of example 1 wherein the closure structure comprises two loop elements, each individual loop element configured to lodge in one of the bifurcating branches.

8. The aneurysm device of example 1 wherein the closure structure comprises a shape memory material.

9. A system for treating an aneurysm, the system comprising:

a distal framework portion comprising a distal-facing aspect configured to enclose the aneurysm, wherein the distal framework includes a plurality of struts, and wherein individual struts include a hinge point; and

a proximal support framework connected to the distal framework portion, the support framework configured to reside in the parent artery and biased to press outward against a luminal wall thereof.

10. The system of example 9, further comprising a delivery sheath configured to temporarily retain the distal framework in a compressed configuration.

11. The system of example 9 wherein the struts comprise a generally flexible material that preferentially bends at the hinge point.

12. The system of example 9 wherein the individual struts comprise a loop shape that bends at the hinge point.

13. The system of example 9 wherein the distal framework portion is formed from a generally flat, unassembled component into a three-dimensional, assembled component.

14. A method of treating an aneurysm located at a site proximate to a parent artery that bifurcates into downstream branches, the method comprising:

expanding an axially-compressed framework comprising a distal portion and a proximal portion at a site proximate to the aneurysm, wherein the distal portion comprises a plurality of struts having bend points; and

arching the distal portion of the framework unobtrusively over lumina of the downstream branches, wherein the struts comprise loops bent at the bend points, the loops configured to lodge in the downstream branches.

15. The method of example 14, further comprising forming the framework from a substantially flat material.

16. The method of example 14, further comprising delivering the framework to the site with a catheter, wherein delivering the framework comprises temporarily restraining the framework in a generally compressed configuration.

17. The method of example 14, further comprising extracting the framework from the parent artery.

18. The method of example 17 wherein extracting the framework comprises restraining the framework in a catheter in a generally compressed configuration.

19. The method of example 14, further comprising substantially enclosing the aneurysm with the distal portion of the framework.

20. The method of example 14, further comprising detaching the framework from a delivery device.

[0016] The above detailed descriptions of embodiments of the technology are not intended to be exhaustive or to limit the technology to the precise form disclosed above. Although specific embodiments of, and examples for, the technology are described above for illustrative purposes, various equivalent modifications are possible within the scope of the technology, as those skilled in the relevant art will recognize. For example, while steps are presented in a given order, alternative embodiments may perform steps in a different order. The various embodiments described herein may also be combined to provide further embodiments. In particular, the clot removal devices described above with reference to particular embodiments can include one or more additional features or components, or one or more of the features described above can be omitted.

[0017] From the foregoing, it will be appreciated that specific embodiments of the technology have been described herein for purposes of illustration, but well-known structures and functions have not been shown or described in detail to avoid unnecessarily obscuring the description of

the embodiments of the technology. Where the context permits, singular or plural terms may also include the plural or singular term, respectively.

[0018] Moreover, unless the word "or" is expressly limited to mean only a single item exclusive from the other items in reference to a list of two or more items, then the use of "or" in such a list is to be interpreted as including (a) any single item in the list, B all of the items in the list, or (c) any combination of the items in the list. Additionally, the term "comprising" is used throughout to mean including at least the recited feature(s) such that any greater number of the same feature and/or additional types of other features are not precluded. It will also be appreciated that specific embodiments have been described herein for purposes of illustration, but that various modifications may be made without deviating from the technology. Further, while advantages associated with certain embodiments of the technology have been described in the context of those embodiments, other embodiments may also exhibit such advantages, and not all embodiments need necessarily exhibit such advantages to fall within the scope of the technology. Accordingly, the disclosure and associated technology can encompass other embodiments not expressly shown or described herein.

CLAIMS:

1. An aneurysm device endovascularly deliverable to a site proximate an artery with bifurcating branches, the aneurysm device comprising:
 - a closure structure; and
 - a supplemental stabilizer connected to the closure structure, the supplemental stabilizer configured to reside in the artery;the closure structure comprising
 - a distal-facing aspect configured to at least partially block an opening to the aneurysm;
 - a proximal-facing aspect configured to arch unobtrusively over lumina of the bifurcating branches; and
 - the proximal-facing aspect of the closure structure and the supplemental stabilizer being configured to hold the distal-facing aspect of the closure structure at the neck of the aneurysm; and wherein the closure structure further includes at least one strut; wherein the strut comprises a hinge point at which the strut folds to form a loop element configured to open and lodge within at least one of the bifurcating branches.
2. The aneurysm device of claims 1 wherein the closure structure comprises four hinge points.
3. The aneurysm device of claims 1 wherein the closure structure is transformable between a compressed configuration and a deployed configuration.
4. The aneurysm device of claim 3, further comprising a catheter configured to retain the closure structure in the compressed configuration.
5. The aneurysm device of claims 1, 3 and 4 wherein the closure structure comprises two loop elements, each individual loop element configured to lodge in one of the

bifurcating branches.

6. The aneurysm device of claim 1 wherein the closure structure comprises a shape memory material.

7. The aneurysm device according to claim 1, wherein the closure structure is a distal framework portion, said distal framework includes a plurality of struts, and wherein individual struts include the hinge point; and

wherein the supplemental stabilizer is a proximal support framework connected to the distal framework portion, the support framework configured to reside in the parent artery and biased to press outward against a luminal wall thereof.

8. The device of claim 7, further comprising a delivery sheath configured to temporarily retain the distal framework in a compressed configuration.

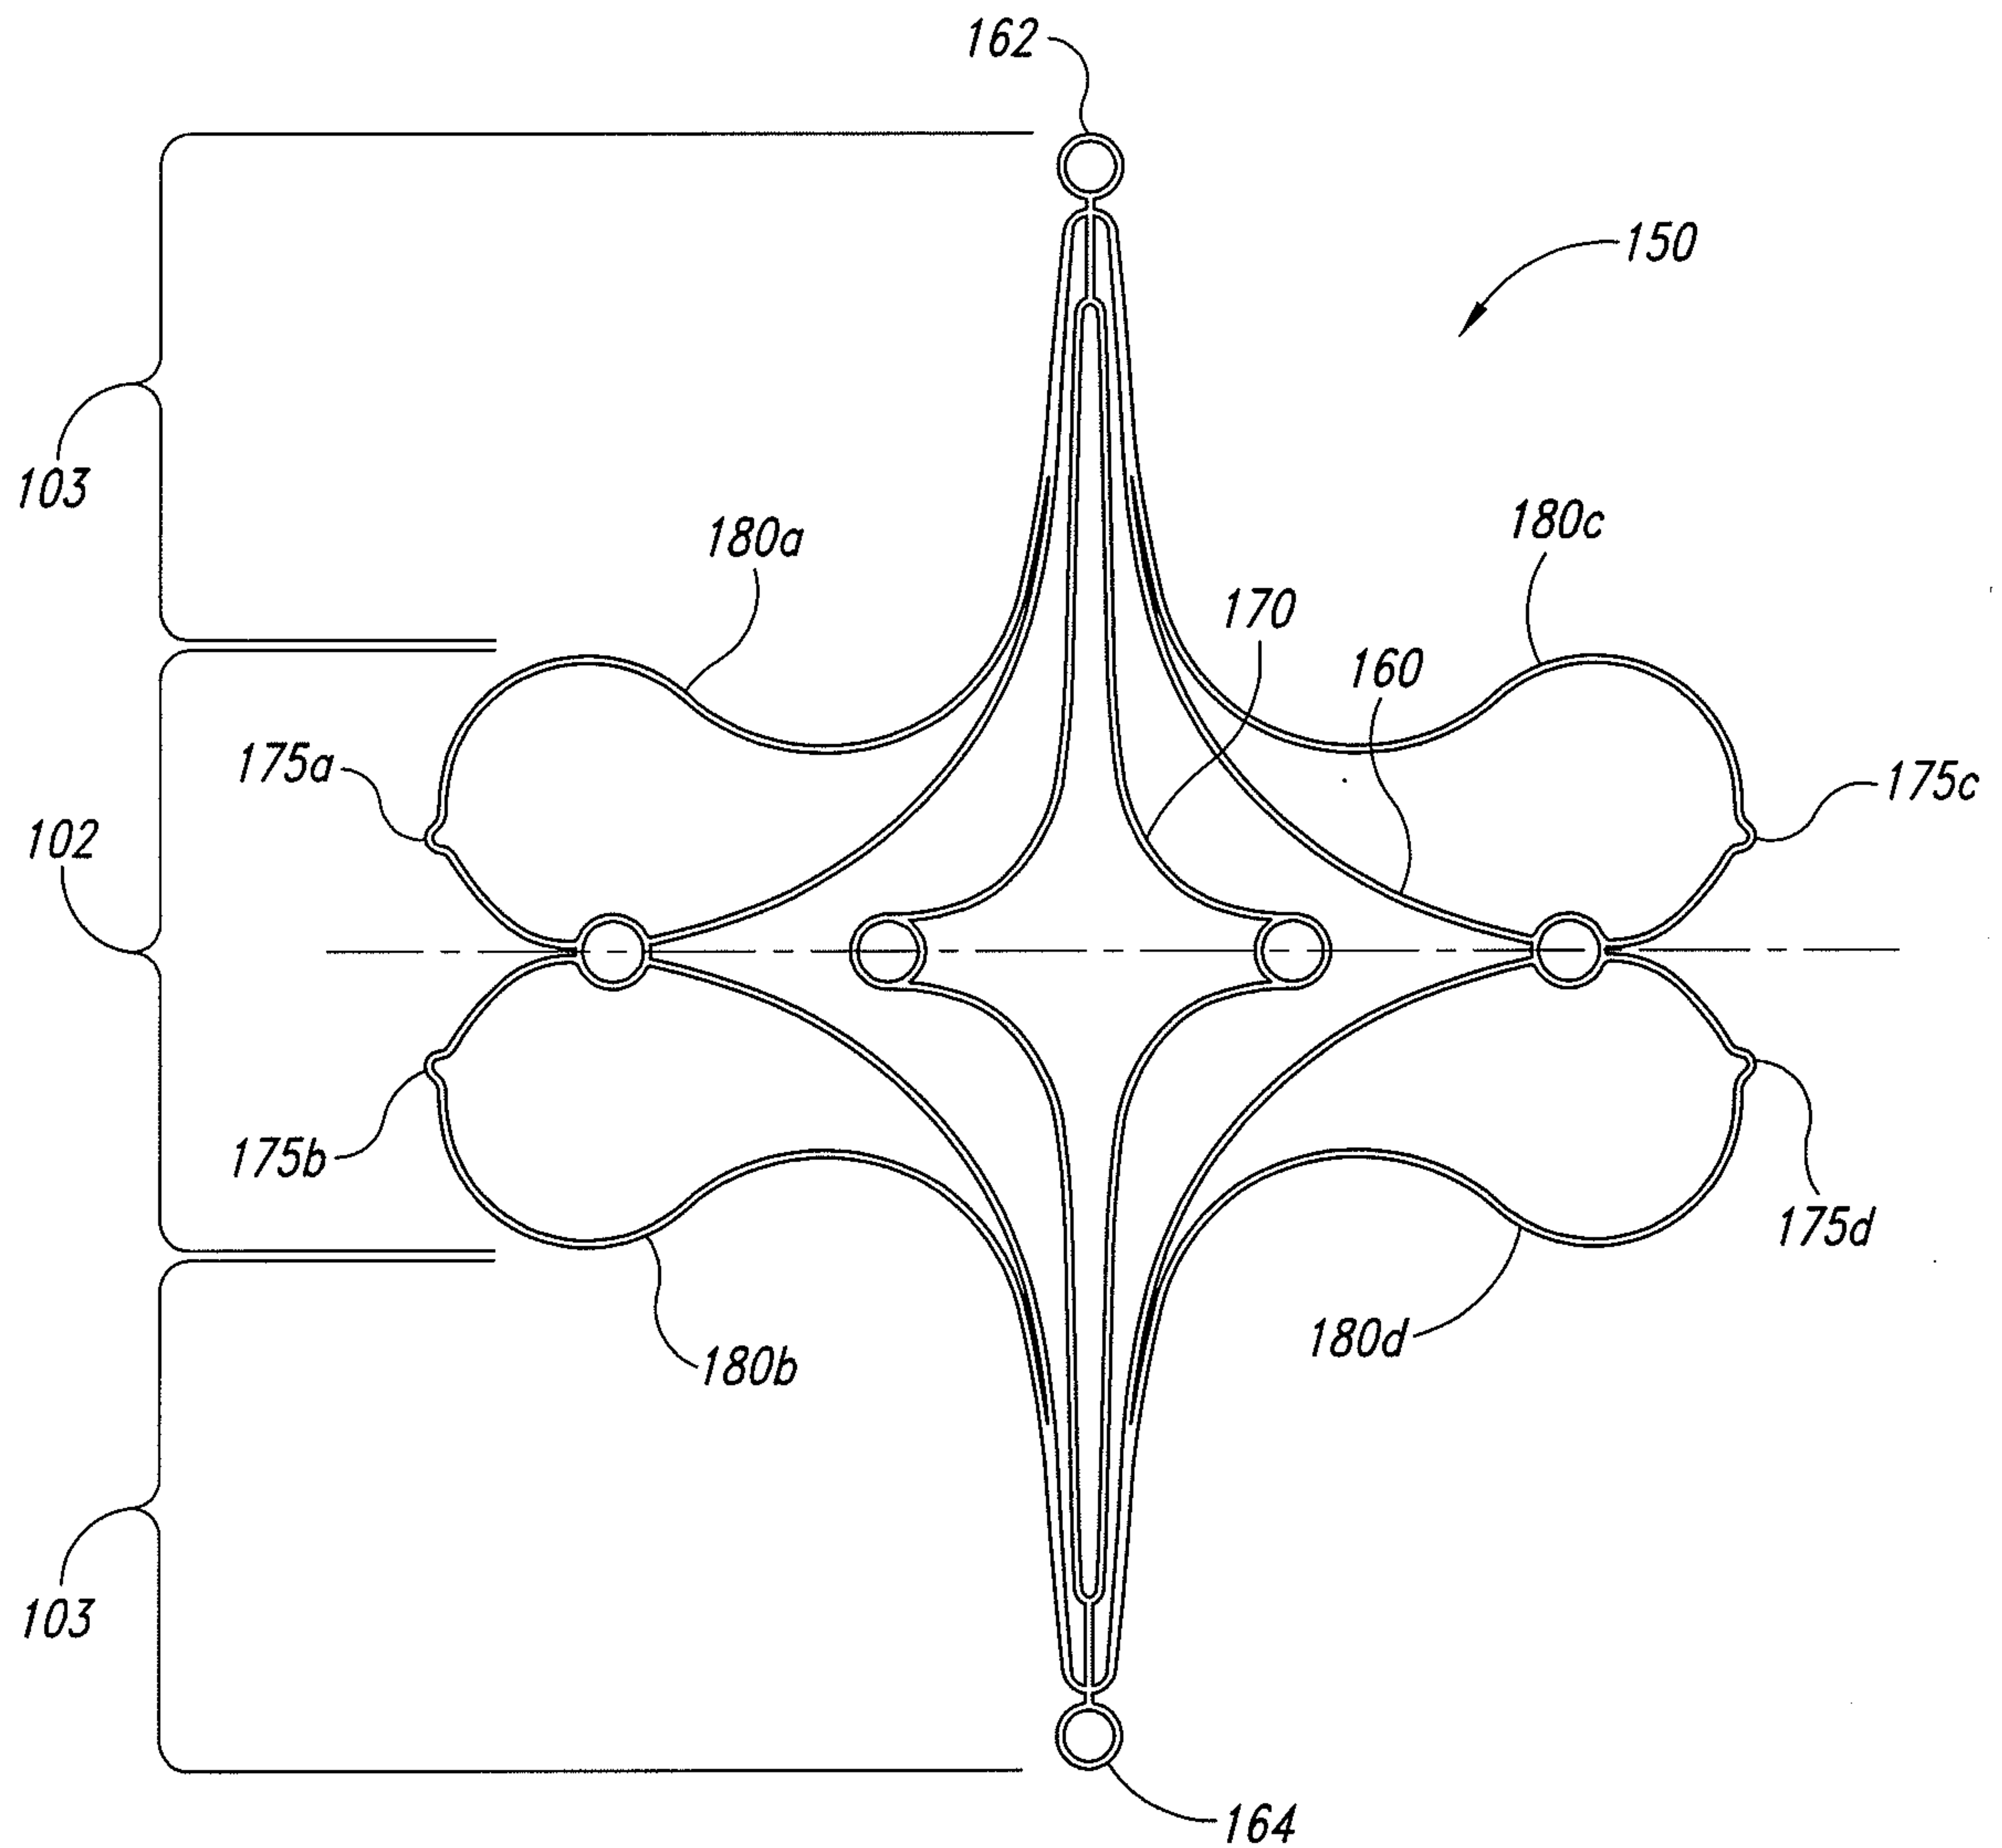
9. The device of claim 7 wherein the struts comprise a generally flexible material that preferentially bends at the hinge point.

10. The device of claim 7 wherein the individual struts comprise a loop shape that bends at the hinge point.

11. The device of claim 7 wherein the distal framework portion is formed from a generally flat, unassembled component into a three-dimensional, assembled component.

12. Use of the aneurysm device of any one of claims 1-11 for the treatment of an aneurysm located at a site proximate to a parent artery that bifurcates into downstream branches.

1/2

*Fig. 1*

