



(86) Date de dépôt PCT/PCT Filing Date: 2012/05/02
(87) Date publication PCT/PCT Publication Date: 2012/11/08
(85) Entrée phase nationale/National Entry: 2014/10/09
(86) N° demande PCT/PCT Application No.: US 2012/036150
(87) N° publication PCT/PCT Publication No.: 2012/151295
(30) Priorités/Priorities: 2011/05/02 (US61/481,553);
2011/11/16 (US61/560,560)

(51) Cl.Int./Int.Cl. *B67D 7/78* (2010.01),
B67D 7/06 (2010.01), *B67D 7/70* (2010.01)

(71) Demandeur/Applicant:
MOUSE TRAP DESIGN, LLC, US

(72) Inventeurs/Inventors:
WERNER, MELANIE R., US;
MULHAUSER, PAUL J., US;
KIRK, KARL D., III, US

(74) Agent: SMART & BIGGAR

(54) Titre : DISPOSITIF DE MELANGE ET DE DISTRIBUTION
(54) Title: MIXING AND DISPENSING DEVICE


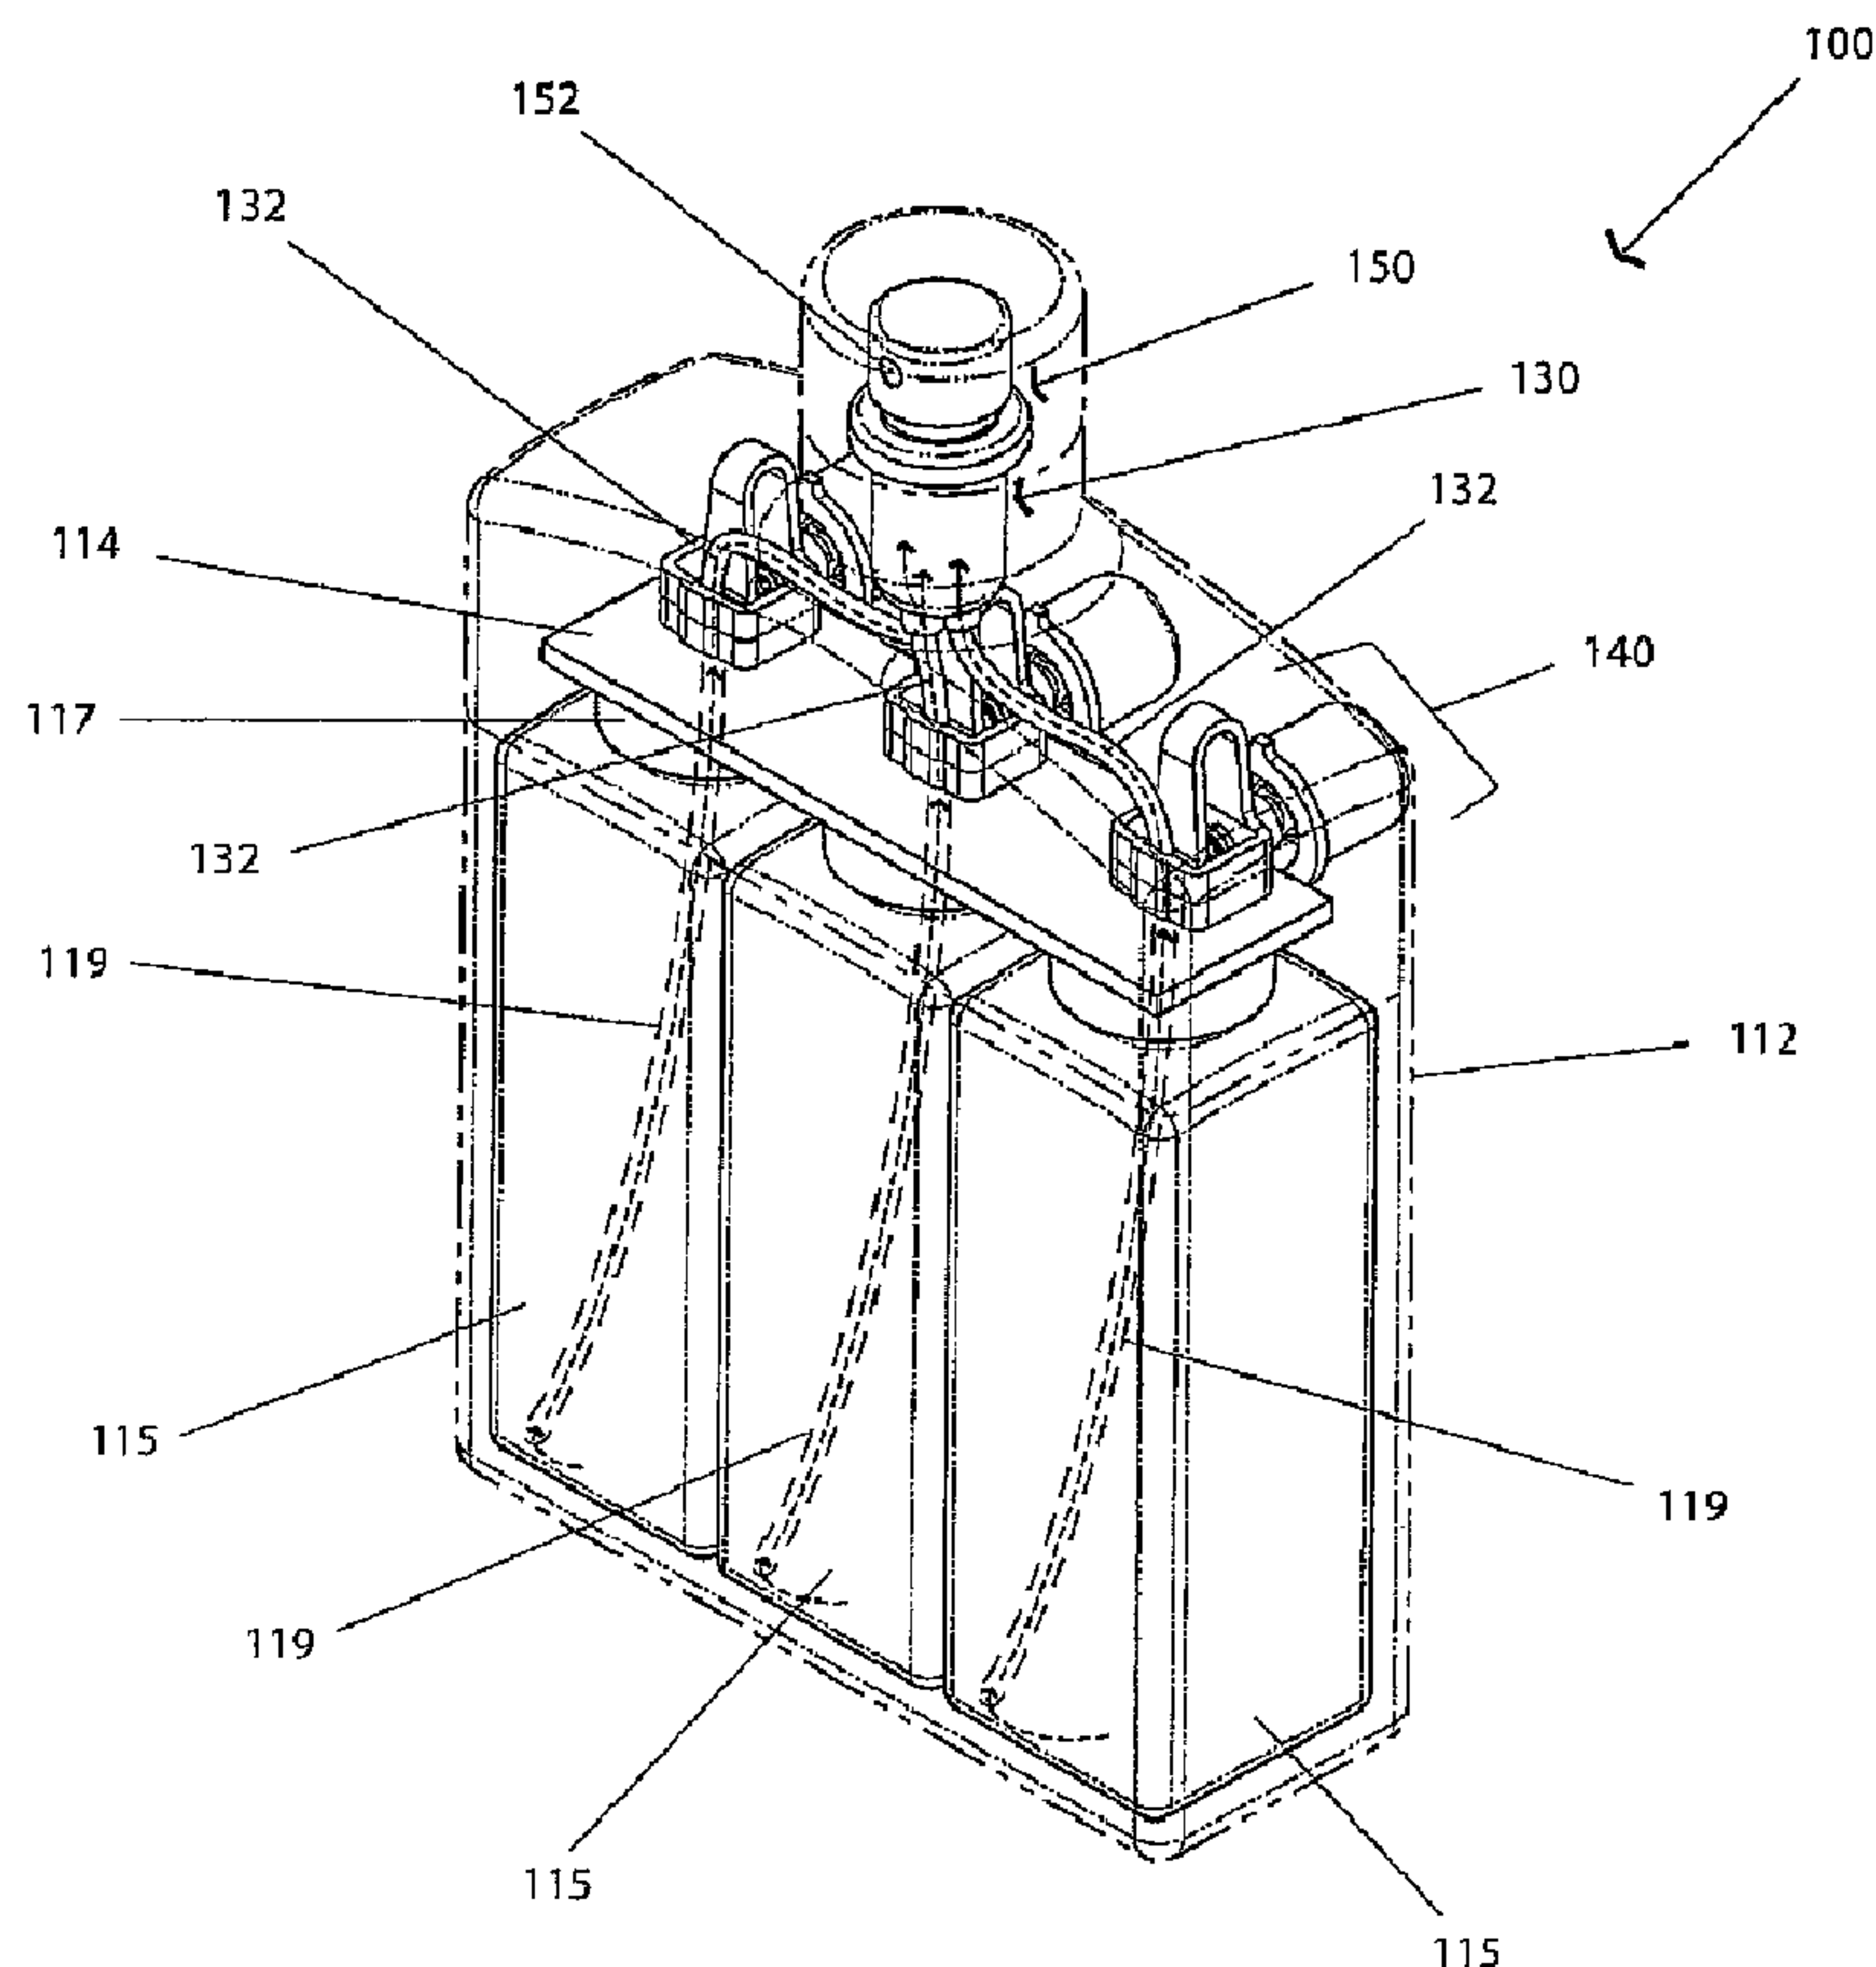


Fig. 1A

(57) Abrégé/Abstract:

A device (100) for dispensing a mixture of at least two fluids is disclosed. The device has a plurality of cartridges (120) that each contain a fluid. A flow channel (132) communicates with each cartridge. A valve (140) adjusts a mass flow rate of the fluid drawn

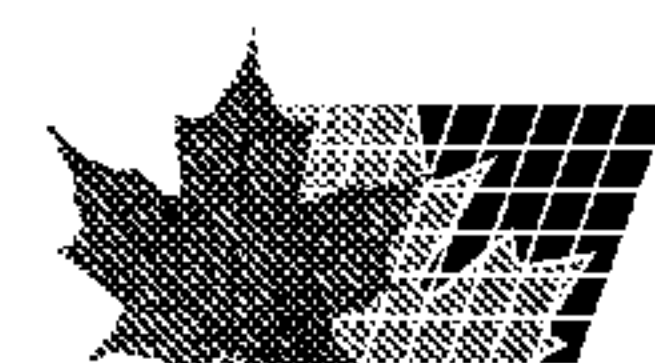

(57) **Abrégé(suite)/Abstract(continued):**

from the corresponding cartridge. A manifold (130) has a mixing chamber (137) and a plurality of inlets that each communicate with one of the flow channels. The manifold (130) has a spring and a seal that covers the inlets. A piston is between the seal and the spring (134). The spring is moveable between an extended position that positions the seal to substantially and simultaneously close the inlets from the flow channels (132) and a compressed position that positions the seal to substantially and simultaneously open the inlets to the flow channels (132). A dispensing pump (150) communicates with the manifold and draws fluid from each of the cartridges (120). A nozzle (152) dispenses the mixture.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2012/151295 A3(43) International Publication Date
8 November 2012 (08.11.2012)(51) International Patent Classification:
B05B 11/30 (2006.01)

(21) International Application Number:

PCT/US2012/036150

(22) International Filing Date:

2 May 2012 (02.05.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/481,553	2 May 2011 (02.05.2011)	US
61/560,560	16 November 2011 (16.11.2011)	US

(71) Applicant (for all designated States except US): **MOUSE TRAP DESIGN, LLC** [US/US]; 219 Centennial Avenue, Sewickley, PA 15143 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WERNER, Melanie, R.** [US/US]; 219 Centennial Avenue, Sewickley, PA 15143 (US). **MULHAUSER, Paul, J.** [US/US]; 69 Fifth Avenue, Apartment 15G, New York, NY 10003 (US). **KIRK, Karl, D., III** [US/US]; 104 Bedford Street, Apartment 3D, New York, NY 10014 (US).(74) Agent: **PASSERIN, Alicia, M.**; Pietragallo Gordon Alfano Bosick & Raspanti, LLP, One Oxford Centre, 38th Floor, 301 Grant Street, Pittsburgh, PA 15219 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MIXING AND DISPENSING DEVICE

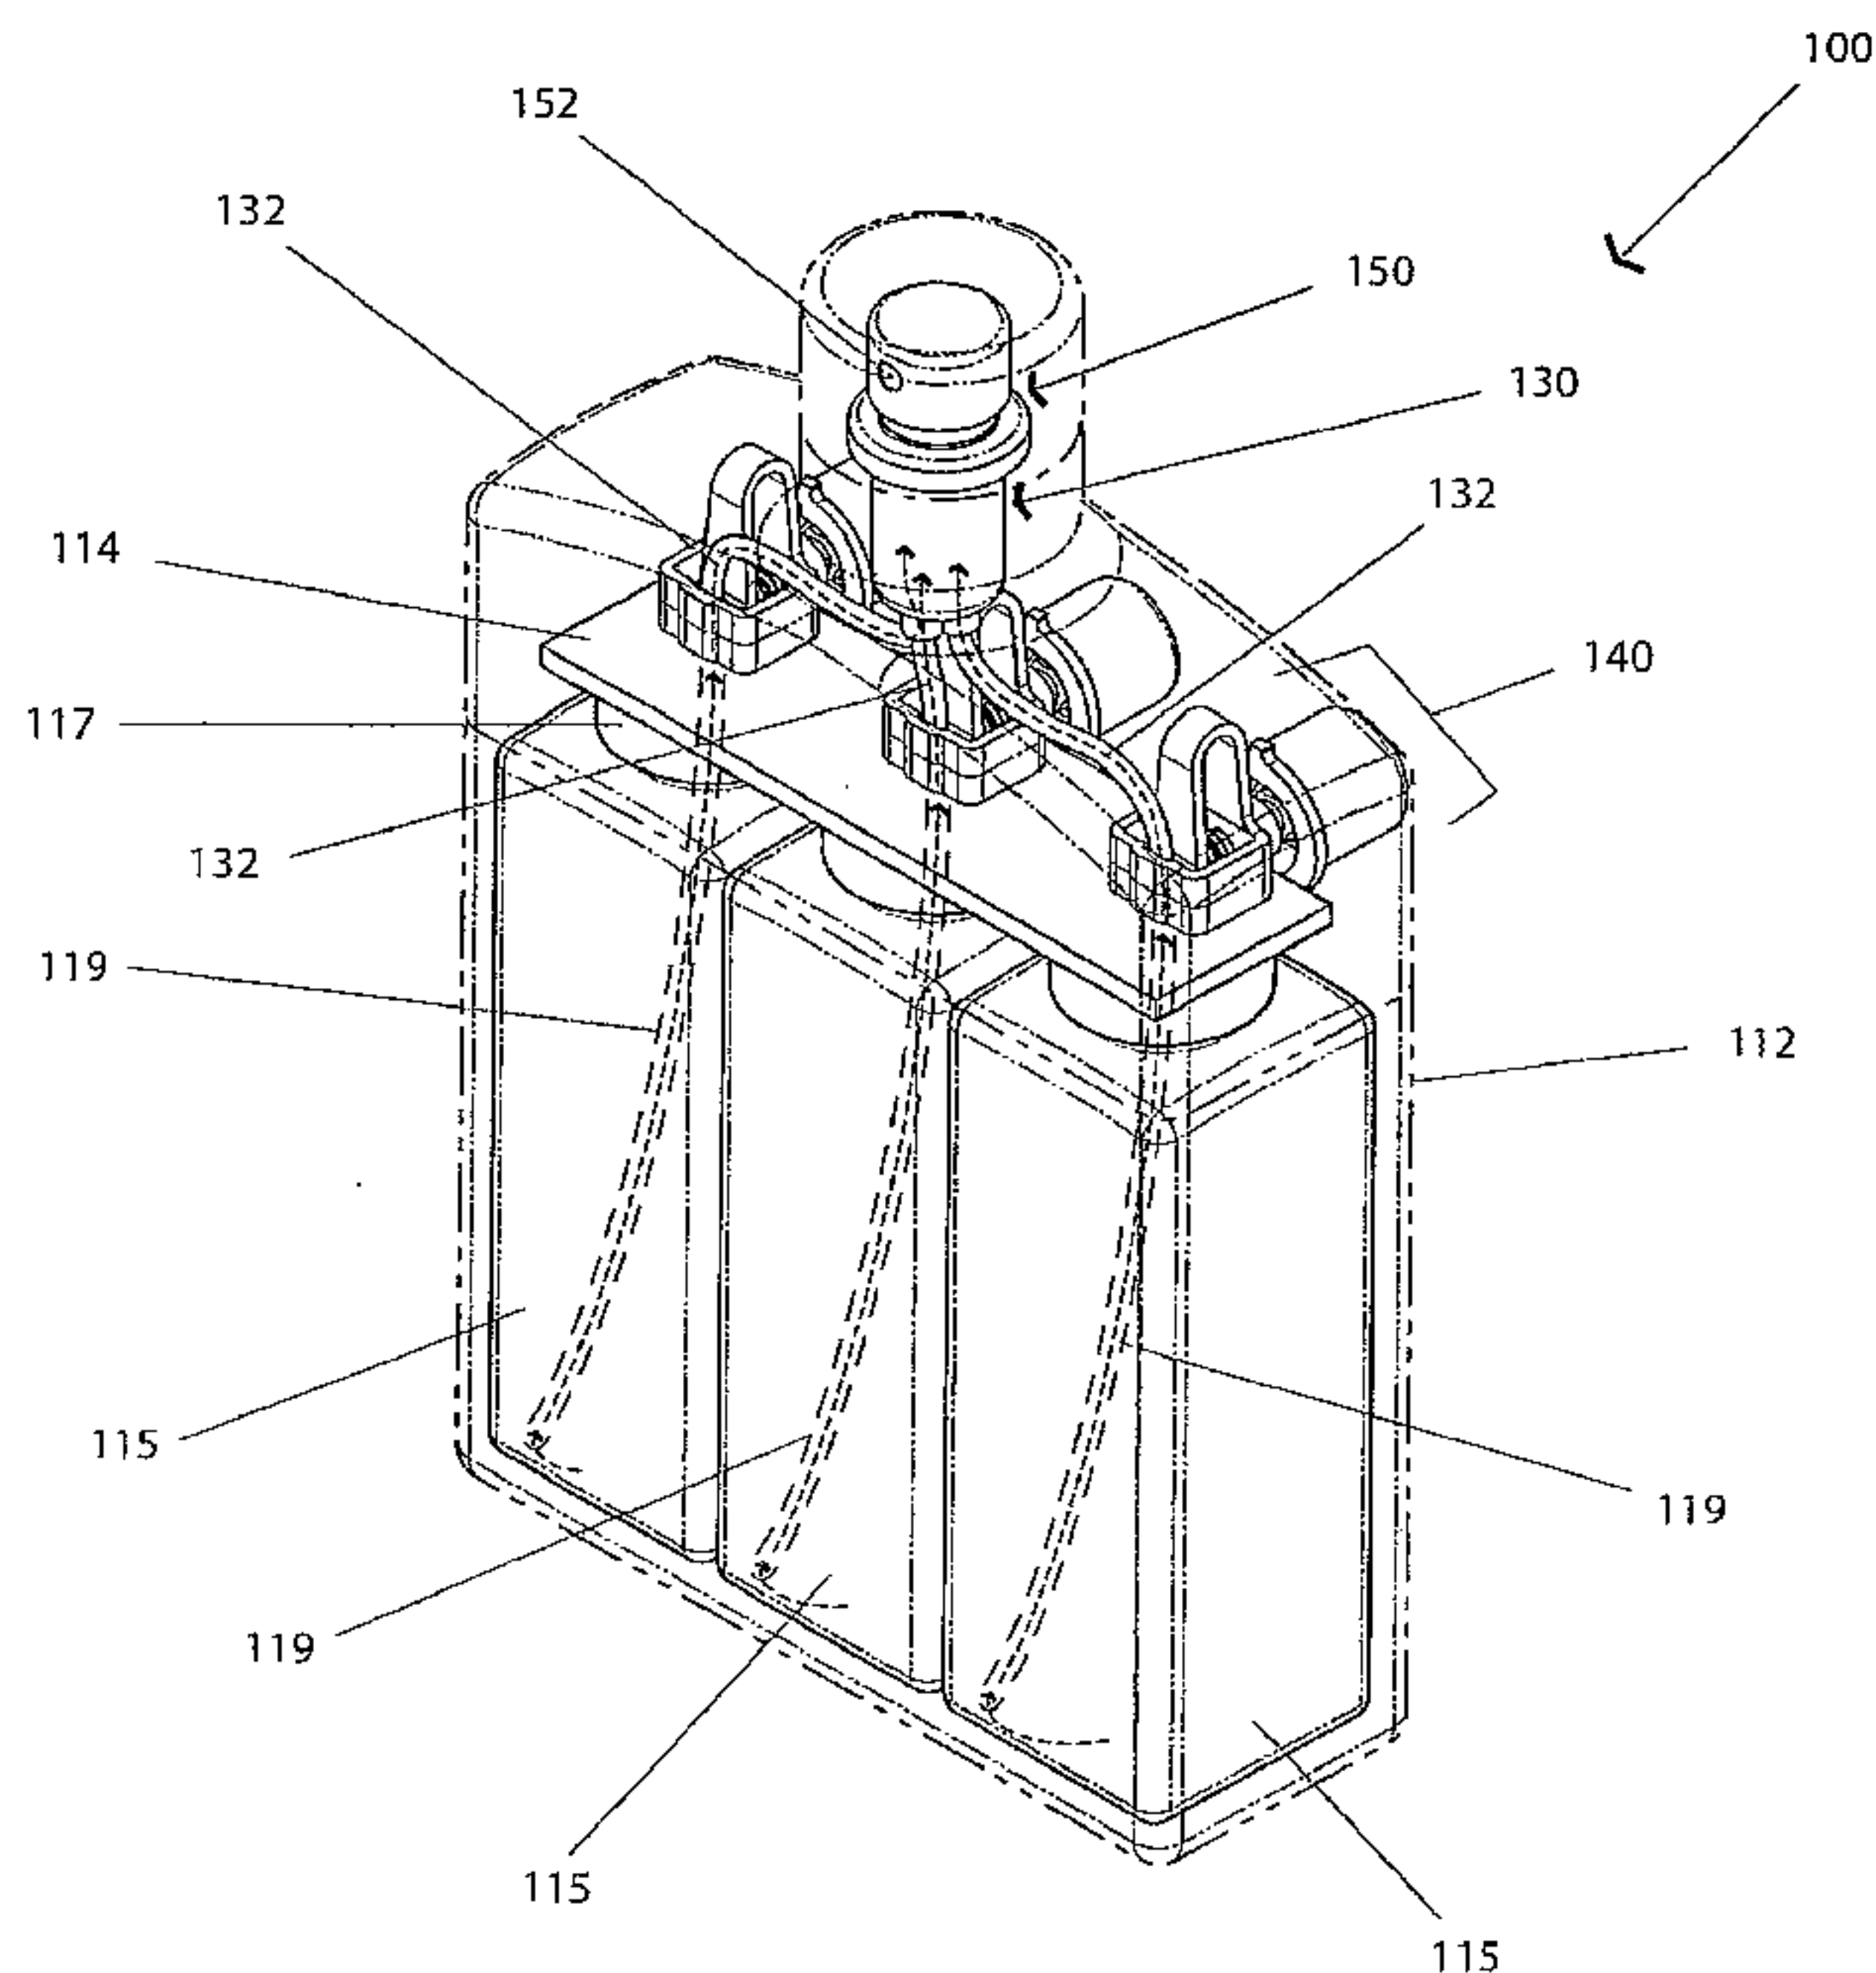


Fig. 1A

(57) Abstract: A device (100) for dispensing a mixture of at least two fluids is disclosed. The device has a plurality of cartridges (120) that each contain a fluid. A flow channel (132) communicates with each cartridge. A valve (140) adjusts a mass flow rate of the fluid drawn from the corresponding cartridge. A manifold (130) has a mixing chamber (137) and a plurality of inlets that each communicate with one of the flow channels. The manifold (130) has a spring and a seal that covers the inlets. A piston is between the seal and the spring (134). The spring is moveable between an extended position that positions the seal to substantially and simultaneously close the inlets from the flow channels (132) and a compressed position that positions the seal to substantially and simultaneously open the inlets to the flow channels (132). A dispensing pump (150) communicates with the manifold and draws fluid from each of the cartridges (120). A nozzle (152) dispenses the mixture.

WO 2012/151295 A3



Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:

3 January 2013

MIXING AND DISPENSING DEVICE

BACKGROUND

[0001] Various devices are known in the art to dispense fluids. Typically, dispensers hold a single fluid, however, it is often desirable for multiple fluids to be stored in separate storage containers within a single device, and then mixed and immediately dispensed as a mixture from the device. In various industries, including the fragrance industry, it is desirable to have a device that is configured to proportionally adjust the volumetric ratio of each fluid that comprises the mixture, in order to provide a customized fragrance or product that includes each of a plurality of fluids.

SUMMARY

[0002] In an embodiment, a device for mixing a plurality of fluids to formulate a mixture and for dispensing the mixture is disclosed. The device comprises a plurality of cartridge assemblies each comprising a cartridge configured to contain one of the plurality of fluids. There is a plurality of flow channels each having a central axis and each configured to communicate with a corresponding one of the cartridges. A plurality of valve assemblies is each positioned to communicate with one of the flow channels to adjust a mass flow rate of the fluid drawn from the corresponding cartridge. There is a manifold assembly positioned downstream to the valve assembly. The manifold assembly comprises a manifold body having a mixing chamber and a plurality of inlets each configured to communicate with a corresponding one of the flow channels through which the fluid from the cartridge of the corresponding cartridge assembly is drawn into the mixing chamber during operation of the device. The manifold assembly also has a seal disposed within the manifold body adjacent to and having a size and a shape that substantially covers the inlets. The manifold assembly has a spring disposed within the manifold body and a piston disposed within the manifold body between the seal and the spring. The spring is moveable between an extended position in which the spring engages the piston to move the seal to a closed position that substantially and simultaneously closes the inlets from the flow channels and a compressed position that moves the seal away from the inlets to substantially and simultaneously open the inlets to the flow channels. The device also has a dispensing pump assembly configured to communicate with the manifold assembly and configured to draw fluid from each of the cartridge assemblies. A nozzle is configured to communicate with the dispensing pump assembly and to dispense the mixture. During operation the dispensing pump draws a volume of fluid from

each cartridge through the corresponding flow channel and through the corresponding inlet into the mixing chamber to form the mixture. The mixture is drawn from the mixing chamber through the dispensing pump to the nozzle.

[0003] In another embodiment, a device for mixing a plurality of fluids to form a mixture and for dispensing the mixture is disclosed. The device has a plurality of cartridges each configured to contain one of the plurality of fluids. A plurality of flow channels each have a central axis and are each configured to communicate with a corresponding one of the cartridges. A plurality of independently adjustable valves are each positioned adjacent to one of the flow channels and are each adjustable along a second axis that is not parallel to the central axis to adjust a mass flow rate of the fluid drawn from the corresponding cartridge. A manifold body has a plurality of inlets each configured to communicate with a corresponding one of the flow channels through which the fluid from the corresponding cartridge is drawn into a mixing chamber during operation. A seal is disposed within the manifold body adjacent to and sized to substantially cover the inlets. A piston is disposed within the manifold body between the seal and a spring, wherein the spring is moveable between an extended position in which the spring engages the piston to move the seal to a closed position that substantially and simultaneously closes the inlets from the flow channels and a compressed position that moves the seal away from the inlets to substantially and simultaneously open the inlets to the flow channels. A dispensing pump is configured for communication with the mixing chamber and is configured to draw fluid from each of the cartridges. A nozzle is configured for communication with the dispensing pump and is configured to dispense the mixture. During operation the dispensing pump draws a volume of fluid from each cartridge through the corresponding flow channel and through the corresponding inlet into the mixing chamber to form the mixture. The mixture is drawn from the mixing chamber through the dispensing pump to the nozzle.

[0004] In another embodiment, a device for mixing a plurality of fluids to form a mixture and for dispensing the mixture is disclosed. There is a plurality of cartridge assemblies, each cartridge assembly comprising cartridge configured to contain one of the plurality of fluids and a plurality of flow channels. Each flow channel has a lumen having a cross-sectional area, a central axis, and is configured to communicate with a corresponding one of the cartridges, wherein the cross-sectional area of each flow channel is directly proportional to a mass flow rate of fluid drawn from the corresponding cartridge during operation of the device. The device has a manifold assembly that has a manifold body having a mixing chamber and a plurality of inlets each configured to communicate with a

corresponding flow channel through which the fluid from the cartridge of the corresponding cartridge assembly is drawn into the mixing chamber during operation. A seal is disposed within the manifold body adjacent to and sized to substantially and simultaneously close the inlets. A spring is disposed within the manifold body. A piston is disposed within the manifold body between the seal and the spring. The spring is moveable between an extended position in which the spring engages the piston to move the seal to a closed position that substantially and simultaneously closes the inlets from the flow channels and a compressed position that moves the seal away from the inlets to substantially and simultaneously open the inlets to the flow channels. A dispensing pump assembly is configured for communication with the manifold assembly and is configured to draw fluid from each of the cartridge assemblies. A nozzle is configured for communication with the dispensing pump assembly and is configured to dispense the mixture. During operation the dispensing pump draws the volume of fluid from each cartridge assembly through the corresponding inlet into the mixing chamber to form the mixture. The mixture is drawn from the mixing chamber through the dispensing pump to the nozzle.

[0005] Other objects, features, aspects and advantages of the mixing and dispensing device will become better understood or apparent from the following detailed description, drawings, and appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] Fig. 1 is an embodiment of a mixing and dispensing device illustrating a cartridge and valve assemblies in a linear array, showing (A) a front isometric view and including dashed arrows that illustrate the flow of fluid through the device when the device is in operation, (B) a rear isometric view, (C) a side elevation view, (D) an exploded view, (E) an exploded detail view of a valve, (F) an isometric detail view of a cartridge, (G) a cross-sectional view of a cartridge, and (H) an exploded view of a cartridge;

[0007] Fig. 2 is another embodiment of the mixing and dispensing device illustrating the cartridge and valve assemblies in a radial array, showing (A) a front isometric view and including dashed arrows that illustrate the flow of fluid through the device when the device is in operation, (B) a rear isometric view, and (C) a side elevation view;

[0008] Fig. 3 is another embodiment of the mixing and dispensing device illustrating inverted cartridge assemblies, showing (A) a front isometric view, (B) a rear isometric view, (C) a side elevation view and including dashed arrows that illustrate the flow of fluid through the device when the device is in operation, (D) an exploded view, (E) a cross-sectional view through an inverted cartridge in combination with the spike plate and showing the cartridge

detached from the spike plate, and (F) a cross-sectional view through an inverted cartridge in combination with the spike plate and showing the cartridge attached to the spike plate;

[0009] Fig. 4 is another embodiment of the mixing and dispensing device illustrating flow channels having lumens of differing cross-sectional areas, showing (A) a front isometric view and including dashed arrows that illustrate the flow of fluid through the device when the device is in operation, (B) a rear isometric view, (C) a side elevation view, and (D) an exploded view;

[0010] Fig. 5 is an embodiment of the manifold assembly, showing (A) an isometric view with the manifold body shown transparent for clarity, and (B) an exploded isometric view;

[0011] Fig. 6 is an orthographic front view of an embodiment of the manifold assembly illustrated in Fig. 5 (with the manifold body shown in cross-section for clarity) in combination with a dispensing pump and nozzle, and illustrating (A) the seal in the fully closed position, (B) horizontal cross-sectional views of the manifold assembly taken along lines 6aa, 6ab, and 6ac shown in Fig. 6A, and (C) the seal in the fully opened position;

[0012] Fig. 7 illustrates an orthographic front view of an embodiment of the manifold assembly (with the manifold body shown in cross-section for clarity), dispensing pump, and nozzle (A) in a resting state, (B) in an actuated state, and (C) in a rebound state;

[0013] Fig. 8 is a partial cross-sectional view of the mixing and dispensing device shown in Fig. 1 taken through the valve assembly and showing a screw-actuated pinch valve in (A) the fully opened position and (B) the fully closed position;

[0014] Fig. 9 is a partial cross-sectional view of an embodiment of a mixing and dispensing device taken through the valve assembly and showing a slider-actuated pinch valve in (A) the fully opened position and (B) the fully closed position;

[0015] Fig. 10 is (A) a partial cross-sectional view of an embodiment of a mixing and dispensing device taken through the valve assembly and showing a lever-arm actuated pinch valve in a partially opened position, (B) a partial cross-sectional side view detail through the lever-arm actuated pinch valve in a partially opened position, and (C) a rear view detail cross-sectional view through a lever-arm actuated pinch valve in a partially opened position;

[0016] Fig. 11 is a partial cross-sectional view of an embodiment of a mixing and dispensing device taken through the valve assembly and showing a needle valve in (A) the fully opened position and (B) the fully closed position; and

[0017] Figure 12 is an exploded view of another embodiment of the mixing and dispensing device illustrating the cartridge and valve assemblies in a non-linear array.

DETAILED DESCRIPTION

[0018] As shown generally in the Figures, embodiments of a device **100, 200, 300, 400, 1200** for mixing a plurality of fluids to formulate a mixture and dispensing the mixture are disclosed. As shown in Figs. 1 to 4 and 12, the device **100, 200, 300, 400, 1200** has at least two cartridge assemblies **120, 220, 320, 420, 1220** positioned relative to each other in a linear (Figs. 1, 3, 4), radial (Fig. 2), or non-linear (Fig. 12) array. Each cartridge assembly **120, 220, 320, 420, 1220** has a cartridge **115, 215, 315, 415, 1215** that is configured to hold a fluid. In various embodiments, the fluid in each cartridge **115, 215, 315, 415, 1215** is a fragrance oil, a solvent, a pigment, an ink, a dye, a medication, a dietary supplement, a flavoring, spirits, a cleaning substance, or any other such substance available in a liquid form. The device **100, 200, 300, 400, 1200** has at least two flow channels **132, 232, 332, 432, 1232** each associated with a corresponding cartridge **115, 215, 315, 415, 1215**. Embodiments (Figs. 1-3, 12) have adjustable valve assemblies **140, 240, 340, 1240** configured to adjust a mass flow rate of fluid from each cartridge **115, 215, 315, 1215**. The flow channels **132, 232, 332, 1232** are configured to communicate with a manifold assembly **130, 230, 330, 1230**. In the embodiments illustrated in Figs. 1-3 and 12, the manifold assembly **130, 230, 330, 1230** is positioned downstream from the adjustable valve assemblies **140, 240, 340, 1240**. Referring again generally to the Figures, a dispensing pump assembly **150, 250, 350, 450, 1250** is positioned downstream from the manifold assembly **130, 230, 330, 430, 1230** and is configured to communicate with a nozzle **152, 252, 352, 452, 1252** that is positioned downstream from the dispensing pump **150, 250, 350, 450, 1250**. In the embodiments illustrated in Figs. 1-3 and 12, the fluid communication between each cartridge **115, 215, 315, 1215**, its corresponding flow channel **132, 232, 332, 1232**, and the manifold assembly **130, 230, 330, 1230** is adjustable by the corresponding valve assembly **140, 240, 340, 1240**. Referring again to Figs. 1-4 and 12, the manifold assembly **130, 230, 330, 430, 1230**, dispensing pump assembly **150, 250, 350, 450, 1250** and nozzle **152, 252, 352, 452, 1252** are in fluid communication with each other when the dispensing pump assembly **150, 250, 350, 450, 1250** is actuated.

[0019] During operation, the device **100, 200, 300, 400, 1200** is configured to formulate a mixture of a plurality of fluids in the manifold assembly **130, 230, 330, 430, 1230** where each fluid is drawn through a corresponding flow channel **132, 232, 332, 432, 1232** to a mixing chamber **137, 237, 337, 437, 1237** disposed within the body **138, 238, 338, 438, 1238** of the manifold assembly at a mass flow rate that may be proportional to a preset volumetric ratio. The mixture of the plurality of fluids is drawn into the dispensing pump

assembly **150, 250, 350, 450, 1250** from which it is subsequently expelled through the nozzle **152, 252, 352, 452, 1252**. In embodiments of the device **100, 200, 300, 1200** such as those illustrate in Figs. 1-3 and 12, the volumetric ratio of each fluid comprising the mixture is adjusted by an adjustable valve **140, 240, 340, 1240** that independently adjusts the mass flow rate of each one of the fluids that is drawn from each cartridge through the corresponding flow channel during operation of the device. In another embodiment of the device **400** illustrated in Fig. 4, the volumetric ratio of each fluid comprising the mixture is directly proportional to the cross-sectional area of a lumen of each flow channel **432**, which determines the mass flow rate of the fluid therethrough during operation of the device **400**. Referring generally to the Figures, the result of operation of the device **100, 200, 300, 400, 1200** is the expulsion of a customized mixture from the nozzle **152, 252, 352, 452, 1252**.

[0020] When referring to the embodiments illustrated in Fig. 1, the device is designated as **100** with the corresponding reference numbers for component parts indicated in the **100** series, while the embodiment illustrated in Fig. 2 is designated as device **200** with the corresponding reference numbers for component parts indicated in the **200** series. For example, the cartridge assembly of device **100** is designated **120** while the cartridge assembly of device **200** is designated **220**. Devices **100, 200** are described together in the following description because the devices **100, 200** differ only in the configuration of the cartridge assemblies **120, 220** relative to each other and the resulting configuration of inlets **139, 239**.

[0021] In embodiments of the device **100, 200** illustrated in Figs. 1, 2, respectively, the device **100, 200** has at least two cartridge assemblies **120, 220** each comprising a cartridge **115, 215**. At least two flow channels **132, 232** are each configured to communicate with an interior of a corresponding one of the cartridges **115, 215**. The device **100, 200** has at least two adjustable valve assemblies **140, 240** each positioned to communicate with a corresponding one of the flow channels **132, 232** to adjust a mass flow rate of fluid that is drawn by the dispensing pump assembly **150, 250** from the corresponding cartridge **115, 215** through the flow channel **132, 232** each time the dispensing pump assembly **150, 250** rebounds to its resting state. By way of example, positioned to communicate includes positioned adjacent to the corresponding flow channel **132, 232** (e.g., Figs. 8-10) or positioned within the lumen of the corresponding flow channel **132, 232** (e.g., Fig. 11). Referring again to Figs. 1, 2, the device **100, 200** has a manifold assembly **130, 230** positioned downstream from the adjustable valve assembly **140, 240** and a dispensing pump assembly **150, 250** positioned downstream from the manifold assembly **140, 240**. The

dispensing pump assembly **150, 250** is configured to communicate with a downstream nozzle **152, 252**.

[0022] Optionally, the cartridge assemblies **120, 220**, flow channels **132, 232**, adjustable valve assemblies **140, 240** (except for the moveable control), manifold assembly **130, 230**, and dispensing pump assembly **150, 250** are enclosed in a body **112, 212**. In embodiments, the body **112, 212** is comprised of a single component or multiple components. In an embodiment, a portion of the body **112, 212** is removable or is configured to open or close to provide or restrict access, respectively, to the cartridges, for example, as useful to remove and replace a cartridge. Body **112, 212** may be made of plastic, such as injection molded polycarbonates, polystyrenes, etc.

[0023] As illustrated in Fig. 1D, each cartridge assembly **120** includes a cartridge **115** and a cartridge receptacle **117** configured to receive a neck of cartridge **115**. In an example, the neck and the cartridge receptacle **117** are configured to threadably engage. In another example, the cartridge **115** is snap-fit into the cartridge receptacle **117**. Optionally, the cartridge assembly **120** includes a spike plate **114**. The spike plate **114** is configured to communicate with the interior of a corresponding cartridge **115** such as for example by a port **114a** in the spike plate **114** or by a coupling (not shown) attached to or integral with the spike plate **114** that has a distal end that pierces the closure device (described below) of the cartridge and a proximal end that communicates with the corresponding flow channel **132**. Cartridge assembly **220** is the same as described herein with respect to cartridge assembly **120** in connection with Fig. 1D. One skilled in the art will appreciate that spike plate **114**, port **114a**, and cartridge receptacle **117** may be unitary components, such as an integrally injection molded part, or assembled parts.

[0024] Referring again generally to Figs. 1 and 2, in an embodiment, each cartridge **115, 215** is removable and replaceable. In another embodiment, each cartridge **115, 215** is permanently affixed onto or within the body **112**. The cartridges **115, 215** may be of differing or the same volume capacity, length, or diameter. In embodiments, the cartridges **115, 215** are made from, by way of example, glass, plastic, metallic materials, collapsible or pliable materials such as a bladder, or materials that are resistant to degradation by the fluids contained or to be contained therein. In an embodiment, the cartridges **115, 215** are clear to render the fluid contents visible. Optionally, a window (not shown) is positioned in a wall of an opaque cartridge to show the fluid contents thereof.

[0025] As illustrated in Figs. 1, 2, and particularly in Fig. 1D, each cartridge **115, 215** has a closure device **118, 218**, such as a cap, seal, or the like that substantially closes the

cartridge **115, 215** so that the fluid contained therein does not leak out. The closure device **118, 218** is either integral with the cartridge **115, 215** or assembled. A port **116, 216**, optionally positioned in or integral with the closure device **118, 218**, provides communication between the interior of cartridge **115, 215** and the corresponding flow channel **132, 232** when the port **116, 216** is in the opened position. Port **116, 216** is in the closed position when the cartridge **115, 215** is disconnected from the cartridge assembly **120, 220**. As illustrated in Fig. 1D, the port **116** is configured to receive a distal end of the corresponding flow channel **132** or a coupling (not shown), such as a spike, needle, nipple, zirk, or other such connector, that connects or couples the distal end of the corresponding flow channel **132** to the interior of the cartridge **115**. In an embodiment, the port **116** is a pierceable septum.

[0026] Each cartridge **115, 215** has a vent **113** (see Figs. 1D, 1F, 1G, 1H) that is configured for entry of atmospheric air into the cartridge **115, 215** as fluid is removed by the dispensing pump **150, 250**. The vent **113** substantially eliminates the buildup of vacuum in the cartridge **115, 215**. The vent **113** is configured to substantially prevent leakage of the fluid from the cartridge **115, 215**. Optionally, the vent **113** is positioned within or is integral with the closure device **118, 218** or the port **116, 216**. By way of example, the vent **113** is an elastomeric duck-bill valve, a flapper valve, an umbrella valve, a diaphragm, etc. In another example, the vent **113** is a spring-loaded assembly such as a ball or ball plunger that engages a sealing aperture.

[0027] Optionally, as illustrated in Fig. 1I, a bladder **193** is positioned in the interior of the cartridge **115** and is configured to hold the fluid. The port **116** is in communication with the interior of the bladder **193**. In embodiments, the bladder **193** is at least one of flexible, removable, replaceable, and refillable.

[0028] Optionally, as illustrated in Fig. 1D, a conduit **119**, such as a sipper tube, is included in each cartridge **115**. The conduit **119** is configured to draw fluid from the interior of the cartridge **115** and to communicate with the distal end of the corresponding flow channel **132**.

As illustrated in Figs. 1 and 2, a flow channel **132, 232** is in communication with the interior of a corresponding cartridge **115, 215** either directly or via connection to coupling (not shown). Each flow channel **132, 232** transports the fluid from the corresponding cartridge **115, 215** to the mixing chamber **137, 237** of the manifold **130, 230** when the dispensing pump assembly **150, 250** is rebounding. Each flow channel **132, 232** has proximal and distal ends, a central axis, and a lumen that has a cross section. In an embodiment, the port **116, 216** of the cartridge **115, 215** receives a distal end of the corresponding flow channel **132,**

232. In another embodiment, the port **116, 216** receives a distal end of coupling that is connected to the distal end of the corresponding flow channel **132, 232**.

[0029] As shown in Figs. 1, 2, and 5-11, the proximal end of each flow channel **132, 232** is in communication with one of the inlets **139, 239** of the manifold **130, 230**. In an embodiment, the flow channel **132, 232** is compressible or pliable, such as an elastomeric material made of, for examples, extruded PVC, silicone, etc. In another embodiment, the flow channel **132, 232** is made of a semi-rigid or rigid material.

[0030] As illustrated in Figs. 1, 2, and 8-11, in an embodiment, an adjustable valve assembly **140, 240** is positioned to communicate with a corresponding flow channel **132, 232**. Each adjustable valve assembly **140, 240** may be controlled independently from other adjustable valve assemblies **140, 240** in the device **100, 200**. Each adjustable valve assembly **140, 240** may function independently from other adjustable valve assemblies in the device. The adjustable valve assembly **140, 240** adjusts a mass flow rate of fluid that is drawn by the dispensing pump assembly **150, 250** from the corresponding cartridge **115, 215** through the flow channel **132, 232** each time the dispensing pump assembly **150, 250** rebounds. Each adjustable valve assembly **140, 240** has a moveable control **142, 242** that is configured for use by a user to adjust the adjustable valve assembly **140, 240** to a position that adjusts the mass flow rate of fluid from a corresponding cartridge **115, 215** through the adjacent flow channel **132, 232** when the device **100, 200** is in operation. The moveable control **142, 242** is, for examples, a rotary knob or screw (Figs. 1, 2, 8), a slider switch (Fig. 9), or a lever arm (Fig. 10). This list is not intended to be inclusive however, and the moveable control **142, 242** can be anything known by those skilled in the art to be functional in the device. Optionally, the moveable control **142, 242** has a scale or other indicator (not shown) that indicates the position of one adjustable valve assembly **140, 240** relative to the other adjustable valve assemblies, or the moveable control **142, 242** has incremental markings (not shown) that show the relative proportion of each fluid from each cartridge **115, 215** being mixed to form the mixture.

[0031] In an embodiment illustrated in Figs. 8-10, the adjustable valve assembly **140** is positioned adjacent to the corresponding flow channel **132** and is adjustable along an axis that is not parallel to the central axis of the corresponding flow channel **132** at the point along the flow channel at which the adjustable valve **140** is adjacent thereto. The adjustable valve assembly **140** may be configured to progressively decrease a mass flow rate of fluid drawn from the corresponding cartridge **115** when the device is in use by progressively constricting the cross-sectional area of the corresponding flow channel **132** by progressively moving the

movable control **142** to a position(s) that causes the adjustable valve **140** to progressively come into contact with an exterior surface of the flow channel **132** thereby constricting the cross-sectional area of the lumen of the flow channel **132** to decrease the mass flow rate of fluid moving therethrough. Conversely, the mass flow rate of fluid that is drawn out of the cartridge **115**, when the pump **150** is operational, is progressively increased by progressively moving the moveable control **142** to a position(s) that cause the adjustable valve to progressively retract from compressing an exterior surface of the flow channel **132**, thereby causing the lumen of the flow channel **132** to rebound and restoring the cross-sectional area of the lumen to increase the mass flow rate of fluid moving therethrough. Examples of such an embodiment are illustrated in Figs. 8-10, which illustrate a pinch valve (Fig. 8), a roller valve (Fig. 9), and a lever valve (Fig. 10). These examples are not intended to be limiting or inclusive, however, and any valve known to those skilled in the art is within the scope of this disclosure.

[0032] Fig. 8 illustrates a partial cross-sectional view of a device taken through the adjustable valve assembly **140** in which the adjustable valve assembly **140** is a screw-actuated pinch valve. The pinch valve **140** has a clamp **143** and a threaded shaft **144**. The threaded shaft **144** has a tip **145**. A control knob **142** mates with the threaded shaft **144** such that progressive axial rotation of the control knob **142** causes the threaded shaft **144** to progressively move axially towards or away from the clamp **143** to a closed (Fig. 8B) or an opened (Fig. 8A) position, respectively. In operation, the portion of the flow channel **132** between the cartridge **115** and the inlets **139** of the manifold body **138** is restricted by rotating the control knob **142** in a first direction to cause the threaded shaft **144** to move towards the clamp **143** until the clamp engages and at least partially compresses the flow channel **132** to constrict the cross-sectional area of the lumen of the flow channel **132** to decrease the mass flow rate of fluid through the flow channel **132**. Fig. 8B illustrates the pinch valve **140** in the fully closed position. The fluid connection is restored by rotating control knob **142** in a second direction to cause the threaded shaft **144** to move away from and decompress the flow channel **132** to cause the lumen of the flow channel **132** to rebound, thereby at least partially restoring the cross-sectional area of the lumen and increasing the mass flow rate of fluid through the flow channel **132**. Fig. 8A illustrates the pinch valve **140** in the fully opened position.

[0033] Referring to Fig. 9, a device **100** is illustrated in which the adjustable valve assembly **140** is a slide-actuated pinch valve. The pinch valve **140** has a ramp **148** and a roller **149**. The flow channel **132** is positioned between the ramp **148** and the roller **149**. The

axis of the ramp **148** is positioned at an angle relative to the axis of movement of the roller **149**. A slide switch control **142** mates with the roller **149** such that progressive linear movement of the slide switch **142** in a first direction causes the roller **149** to progressively move linearly across the ramp **148** from an open (Fig. 9A) to a closed (Fig. 9B) position to progressively compress the flow channel **132** between the roller **149** and the ramp **148** to constrict the cross-sectional area of the lumen of the flow channel **132** to progressively decrease the mass flow rate of fluid through the flow channel **132**. Progressive linear movement of the slide switch **142** in a second direction causes the roller **149** to progressively decompress the flow channel **132** between the roller **149** and the ramp **148** to cause the cross-sectional area of the lumen of the flow channel **132** to rebound to progressively increase the mass flow rate of fluid through the flow channel **132**.

[0034] Referring to Fig. 10, a device is illustrated in which the adjustable valve **140** is a lever-arm actuated pinch valve. The pinch valve **140** has a roller **149** and a ramp **149**. The flow channel **132** is positioned between the ramp **148** and the roller **149**. A lever arm control **142** pivotally mates with the roller **149** such that progressive pivoting of the lever arm **142** causes the roller **149** to progressively rotate from an open to a closed position. The progressive rotation of the lever arm **142** compresses the flow channel **132** between the roller **149** and the ramp **148** to progressively constrict the cross-sectional area of the lumen of the flow channel **132** to progressively decrease the mass flow rate of fluid through the flow channel **132**. Progressive rotation of the lever arm **142** in the opposite direction causes the roller **149** to progressively decompress the flow channel **132** between the roller **149** and the ramp **148** to cause the cross-sectional area of the lumen of the flow channel **132** to rebound to progressively increase the mass flow rate of fluid through the flow channel **132**. Figure 10 shows the pinch valve **140** in the partially open position.

[0035] In another embodiment illustrated in Fig. 11, the adjustable valve **140** is positioned within the lumen of the flow channel **132** and progressively decreases the mass flow rate of fluid that is drawn out of the corresponding cartridge **115** through the adjacent flow channel **132** by progressively advancing a needle tip **141** of the valve into the lumen of the flow channel **132** thereby progressively constricting the cross-sectional area thereof. Conversely, in operation, the adjustable valve increases the mass flow rate of fluid that is drawn out of the corresponding cartridge through the adjacent flow channel by progressively retracting the needle tip **141** of the valve from the lumen of the flow channel **132** thereby progressively increasing the cross-sectional area thereof. Examples of such an embodiment of the adjustable valve **140** include a needle valve (Fig. 11), a ball valve (not shown), or any

other type of valve known to those skilled in the art that progressively occludes or expands the fluid path.

[0036] Referring to particularly to Fig. 11, a device is illustrated in which the adjustable valve **140** is a needle valve that is positioned within the lumen of the flow channel. The needle valve **140** has a valve body **146**, a conical needle **147**, and a control knob **142**. The conical needle **147** is positioned within a conical channel (not shown) in the valve body **146** and includes a distal tip **141** and a proximal threaded shaft **144**. The control knob **142** is substantially aligned with the needle axis such that progressive rotation of the control knob **142** causes the needle **147** to move progressively axially within the flow channel of the valve body **146** to progressively adjust flow rate. Fig. 11A shows the needle valve **140** in the fully opened position and Fig. 11B shows the needle valve **140** in the fully closed position.

[0037] Referring now to Figs. 1, 2, and 5-7, the mixing and dispensing device **100**, **200** has a manifold assembly **130**, **230**. The system at rest is illustrated in Fig. 7A. As illustrated in Figs. 1, 2 and 7, the manifold assembly **130**, **230** is configured to communicate through inlets **139**, **239** with each of the flow channels **132**, **232** to receive fluid from each corresponding cartridge **115**, **215** and to mix the fluids to form a mixture during operation of the device **100**, **200**. As illustrated particularly in Fig. 7C, when the dispensing pump assembly **150** is in the rebound state, fluid is drawn by the dispensing pump assembly **150** into the mixing chamber **137** through an inlet **139** from the cartridge **115** of the corresponding cartridge assembly to mix the selected volume of fluids to formulate the mixture in the mixing chamber **137** and to transport the mixture to the dispensing pump assembly **150**. When the nozzle **152** is subsequently depressed (i.e., the dispensing pump assembly is in the actuated state), the mixture is expelled from the dispensing pump assembly **150** through the nozzle **152** (Fig. 7B).

[0038] As illustrated in Fig. 5, the manifold assembly **130** comprises a manifold body **138**. The manifold body **138** has at least one side wall and a base that define a mixing chamber **137**. See Figs. 5, 6. The volume capacity of the mixing chamber **137** varies with actuation and rebound of the dispensing pump assembly **150** (Fig. 7 and Fig. 4, described below). There is a plurality of inlets **139** on any surface of the manifold body **138**. As illustrated generally in the figures, inlets **139** are in the base of the manifold body **138**. In other embodiments (not shown), inlets **139** are in at least one side wall of the manifold body **138**. Each inlet **139** is configured to communicate with a flow channel **132** of a corresponding cartridge assembly **120**. In embodiments, the inlets **139**, **239** of the manifold assembly **130**, **230** are configured in a linear (Fig. 1) or a radial (Fig. 2) configuration.

[0039] As illustrated in Fig. 5, the manifold assembly **130** also has a seal **135** disposed within the mixing chamber **137** adjacent to the inlets **139** to substantially and simultaneously seal the inlets **139** as soon as the pump **150** is in a fully rebounded state and when the system is at rest in order to prevent the flow of fluid from the cartridges **115** through the flow channels **132** at any time other than when the dispensing pump assembly **150** is actuated. In embodiments, the seal **135** is a disc (Fig. 5B), a conical interface (not shown), or any other configuration that is sized and shaped to substantially and simultaneously seal the inlets **139**. The seal **135** is a face seal configured to substantially and simultaneously seal all of the inlets closed when the device **100** is not in operation to close communication between the mixing chamber **137** and the flow channels **132** in order to substantially prevent the anterograde movement of fluid from the cartridges **115** or flow channels **132** into the mixing chamber **137**, to substantially prevent the retrograde movement of fluid from the mixing chamber **137** into the flow channels **132** or the cartridges **115**, and cross-flow between flow channels **132** when the device **100** is not in operation. The configuration of the seal **135** to substantially and simultaneously seal the inlets **139** closed provides unexpected and surprising results in substantially preventing anterograde and retrograde fluid flow between the components **115**, **132**, **140** of the device when the device is not in use compared to other seals known in the art such as umbrella valves and the like, which cannot consistently open all of the inlets simultaneously, particularly where a plurality of flow channels each have a different mass flow rate.

[0040] Referring still to Fig. 5, the manifold assembly **130** also has a spring **134** disposed within the mixing chamber **137**. The spring **134** is moveable between a compressed position and an extended position. A piston **133** is disposed within the mixing chamber **137** between the seal **135** and the spring **134**. When the device **100** is not in operation, the inlets **139** are substantially sealed by the seal **135**. The outer diameter of the piston **133** is substantially the same as the inner diameter of the mixing chamber **137** to substantially limit the movement of the piston **133** within the mixing chamber **137** to a linear movement along a central axis within the mixing chamber **137**. In an embodiment, the side walls of the piston **133** have a plurality of channels **159** that extend substantially parallel to the central axis of the mixing chamber **137**. The channels **159** are configured to allow a small amount of fluid to flow past the piston **133** in order to decrease the frictional engagement of the outer surface of the piston side walls against the inner surface of the mixing chamber **137**.

[0041] As illustrated in Fig. 7, the mixing and dispensing device **100** also has a dispensing pump assembly **150** that is configured for communication with the mixing

chamber **137** and a nozzle **152** that is positioned downstream from the dispensing pump assembly **150**. The dispensing pump assembly **150** has a pump chamber (not shown) that is defined by a pump body **158** having side walls and a base. The dispensing pump assembly **150** is configured to draw fluid from each of the cartridge assemblies **120** through the flow channels **132** into the mixing chamber **137** via the inlets **139** and to the pump chamber. The dispensing pump assembly **150** may be any pumping system known to those skilled in the art that has a manual pumping action. In an embodiment, the pump chamber compressively drives the fluid through the nozzle **152**. In another embodiment (not shown), the dispensing pump assembly **150** is electronically actuated with a manually actuated button that electronically operates the dispensing pump assembly **150** by means of a motor drive, for example. In other embodiments (not shown), the dispensing pump assembly **150** includes a piston with wiper seals driven through a cylinder and in combination with at least one check valve or wiper seal and a return spring.

[0042] Referring generally to the figures, and particularly to Figs. 1, 2, and 7, the nozzle **152, 252** is configured for communication with the dispensing pump assembly **150, 250** and is configured to dispense the mixture when the device is in operation. The nozzle **152, 252** may be any of a variety of types of nozzle that is configured to dispense a spray, mist, drop, stream, etc. of a mixture of fluids.

[0043] Figs. 1A, 2A, and 7 illustrate the flow of fluids through the mixing and dispensing device. Referring to Figs. 1A, 2A, a fluid is contained in each cartridge **115, 215** and moves through the flow channels **132, 232** into the manifold assembly **130, 230** via the inlets **139, 239** and to the dispensing pump assembly **150, 250** for expulsion through the nozzle **152, 252**. At rest (Fig. 7A), there is substantially no fluid flow through the device **100**. As illustrated in Fig. 7A, the dispensing pump assembly **150** is positioned such that the spring **134** of the manifold assembly **130** is extended and engaged with the piston **133** of the manifold assembly **130** such that the piston **133** forces the seal **135** against the inlets **139** to substantially seal the inlets **139** closed. In operation of the device **100**, a user adjusts the adjustable valve assemblies **140** to adjust a mass flow rate of fluid through the flow channels **132**. The mixture of fluids is formulated by depressing the nozzle **152** (Fig. 7B) to actuate the dispensing pump **150** to express any prior mixture in the mixing chamber **137**. The rebound of the dispensing pump assembly **150** (Fig. 7C) draws fluids at the adjusted settings from the cartridge assemblies **120**. In the rebound state, the force of fluids being drawn from the cartridge assemblies **120** into the flow channels **132** and the inlets **139** forces the spring **134** to a compressed position that moves the seal **135** away from the inlets **139** to allow the

fluids to enter the mixing chamber **137** to formulate the mixture at the user-adjusted setting. The mixture is then expelled through the nozzle **152** by depressing the nozzle **152**.

[0044] Optionally, the mixing and dispensing device **100**, **200**, **300**, **400**, **1200** includes a purging assembly (not shown) to substantially remove any trace amounts of each fluid that remains in each flow channel following operation of the device. The purging assembly has a cartridge assembly that comprises a cartridge that contains a solvent and that communicates with the flow channels **132** of the device **100** to communicate with the manifold assembly **130**, the dispensing pump **150**, and the nozzle **152**. The cartridge assembly has an adjustable valve that opens or closes the flow channel to communication with an inlet in the manifold body to draw fluid into the mixing chamber, and pump the solvent through the mixing chamber and dispensing pump and out the nozzle. Optionally, a cartridge containing a solvent solution may be interchanged with one or each cartridge such that the solvent solution is flushed through the flow channels, manifold assembly, dispensing pump, and nozzle to substantially remove any fluids or mixture of fluids therefrom.

[0045] In another embodiment of the device illustrated in Fig. 3, the device **300** has at least two cartridge assemblies **320** each comprising a cartridge **315**. The cartridges **315** are the same as cartridges **115** described in connection with device **100**, except that each cartridge **315** is positioned within the cartridge assembly **320** in a position that is inverted relative to the position of cartridge **115** in the cartridge assembly **120**. The cartridge assemblies **320** are positioned linearly, non-linearly, or radially relative to each other as described in connection with the cartridge assemblies of the device **100**. The cartridge assemblies **320**, the manifold assembly **330**, and the pump **350** are enclosed in a body **312**. The body **312** is as described in connection with the body **112** of the device **100**.

[0046] As illustrated in Fig. 3, each cartridge **315** has closure device **318**, port **316**, vent **313**, optional bladder (not shown) as described in connection with the closure device **118**, the port **116**, and the vent **113**, respectively.

[0047] A spike plate **314** is positioned upstream to the cartridge assemblies **320** and has at least two cannulated spikes **314a** and at least two uptake ports (not shown). Each spike **314a** has a proximal end that is configured to communicate with an interior of a corresponding cartridge **315**.

[0048] The device **300** has at least two flow channels **332** each configured to communicate with an interior of a corresponding one of the cartridges **315** via coupling (not shown) that is mounted on or integral with the spike plate **314**. Each spike **314a** communicates with a corresponding coupling via a channel (not shown) that is formed below

a surface of the spike plate **314** to transfer fluid from the cartridge **315** to the flow channel **332**. The flow channels **332** are the same as flow channels **132** described in connection with device **100**. The distal end of the flow channel **232** is connected to the corresponding coupling or uptake port (not shown) and the proximal end of the flow channel **332** communicates with a corresponding inlet **339** of the manifold **330**.

[0049] The device **300** has at least two adjustable valves **340** each positioned to communicate with a corresponding one of the flow channels **332** and that adjusts mass flow rate of fluid that is drawn by the pump **350** from the corresponding cartridge **315** through the flow channel **332** each time the pump **350** rebounds. The adjustable valves **340** are the same as adjustable valves **140** described in connection with device **100**.

[0050] As illustrated in Fig. 3, the mixing and dispensing device **300** has a manifold assembly **330** positioned downstream to the adjustable valve **340**. The manifold assembly **330** is the same as the manifold assembly **130** described in connection with the device **100**. The manifold assembly **330** comprises a manifold body **338** that has at least one side wall and a base that define a mixing chamber **337**. There is a plurality of inlets **339** on any surface of the manifold body **338**. Manifold assembly **330** is the same as manifold assembly **130** illustrated in Fig. 5, and has a seal **135** disposed within the mixing chamber **137** adjacent the inlets **139** and a spring **134** disposed within the mixing chamber **137**. The spring **134** is moveable between a compressed and an extended position as described in connection with Fig. 7. A piston **133** is disposed within the mixing chamber **137** between the seal **135** and the spring **134**. Each inlet **339** is configured to communicate with a flow channel **332** of a corresponding cartridge assembly **320**.

[0051] As illustrated in Fig. 3, the mixing and dispensing device **300** also has a dispensing pump assembly **350** positioned downstream to the manifold assembly **330**. The dispensing pump assembly **350** is configured to communicate with a nozzle **352** that is positioned downstream thereto. The dispensing pump assembly **350** and nozzle **352** are as described in connection with the dispensing pump **150** and the nozzle **152**, respectively.

[0052] The flow of fluids through the device **300** is illustrated in Fig. 3A. During operation of the device, fluid is drawn by the dispensing pump **350** into the mixing chamber **337** through an inlet **339** and from the cartridge **315** of the corresponding cartridge assembly **320** to mix the selected volume of fluids to form the mixture and to expel the mixture from the nozzle **352** as described in connection with the device **100**, and particularly Fig. 7.

In another embodiment of the device **400** illustrated in Fig. 4, the device **400** has at least two cartridge assemblies **420** each comprising a cartridge **415**. The cartridges **415** and cartridge

assemblies **420** are the same as the cartridges **115** and the cartridge assemblies **120**, respectively, described in connection with the device **100**.

[0053] The cartridge assemblies **420** are positioned linearly, non-linearly, or radially relative to each other, as described in connection with the cartridge assemblies **120** of device **100**. As illustrated in Fig. 4, each cartridge assembly **420** includes a conduit **419**, a closure device **418**, port (not shown), vent (not shown), optional bladder (not shown) as described in connection with the closure device **118**, the port **116**, the vent **113** of the device **100**, respectively.

[0054] The device **400** also includes at least two flow channels **432**, a manifold assembly **430**, a dispensing pump **450**, and a nozzle **452**. The cartridge assemblies **420**, the flow channels **432**, the manifold assembly **430**, and the pump **450** are enclosed in a body **412**. The body **412** is as described in connection with the body **112**.

[0055] As illustrated in Fig. 4, the device **400** has at least two flow channels **432** each configured to communicate with the interior of a corresponding cartridge **415** and that transports the fluid from the cartridge **415** to the mixing chamber **437** of the manifold **430** when the device **400** is in operation. Each flow channel **432** has proximal and distal ends, a central axis, and a lumen that has a diameter that is proportional to a mass flow rate of fluid that is drawn by the pump **450** from the corresponding cartridge **415** through the flow channel **432** each time the pump **450** is activated. As shown in Fig. 4, the proximal end of the flow channel **432** is in communication with one of the inlets **439** of the manifold **430**. Optionally, the flow channel **432** is compressible or pliable, such as an elastomeric material, as described in connection with the flow channel **132**.

[0056] Optionally, the device **400** includes an adjustable valve (not shown) as described in connection with the adjustable valve **140** that is positioned adjacent to the flow channel **432** to additionally adjust the mass flow rate of fluid that is drawn from the corresponding cartridge **415**. In the device **400**, however, the adjustable valves **140** are not required because the diameter of the lumen of each flow channel **132** provides the variable mass flow rate of fluid from each cartridge **432** during operation of the device **400**.

[0057] As illustrated in Fig. 4, the mixing and dispensing device **400** has a manifold assembly **430** positioned downstream to the cartridge assembly **420**. The manifold assembly **430** is the same as the manifold assembly **130** described in connection with the device **100**. The manifold assembly **430** comprises a manifold body **430** that has at least one side wall and a base that define a mixing chamber **437**. There is a plurality of inlets **439** on any surface of the manifold body **438**. Manifold assembly **430** is the same as the manifold assembly **130**

illustrated in Fig. 5 and has a seal **135** disposed within the mixing chamber **137** adjacent to the inlets **139** and a spring **134** disposed within the mixing chamber **137**. As described in Fig. 7, the spring **134** is moveable between a compressed position and an extended position. A piston **133** is disposed within the mixing chamber **137** between the seal **135** and the spring **134**.

[0058] Each inlet **439** is configured to communicate with a flow channel **432** of a corresponding cartridge assembly **420**.

[0059] As illustrated in Fig. 4, the mixing and dispensing device **400** also has a dispensing pump assembly **450** positioned downstream to the manifold assembly **430**. The dispensing pump assembly **450** is configured to communicate with a downstream nozzle **452**. The dispensing pump assembly **450** and the nozzle **452** are as described in connection with dispensing pump assembly **150** and the nozzle **152**, respectively, of the device **100**. The flow of fluids through the device **400** is illustrated in Fig. 4A. During operation of the device **400**, fluid is drawn by the dispensing pump **450** into the mixing chamber **437** through an inlet **439** and from the corresponding cartridge **415** to mix the fluids to formulate a mixture and to expel the mixture from the nozzle **152** as described in connection with the device **100**, and particularly Fig. 7.

[0060] In another embodiment of the device illustrated in Fig. 12, the device **1200** has at least two cartridge assemblies **1220** each comprising a cartridge **1215**. The cartridges **1215** are the same as cartridges **115** described in connection with device **100**. As illustrated in Fig. 12, the cartridge assemblies **1220** are positioned non-linearly relative to each other, but the cartridge assemblies **1220** may alternatively be positioned linearly or radially relative to each other as described in connection with the cartridge assemblies of the device **100**. The cartridge assemblies **1220**, the manifold assembly **1230**, and the pump **1250** are enclosed in a body **1212**. The body **1212** is as described in connection with the body **112** of the device **100**.

[0061] As illustrated in Fig. 12, each cartridge **1220** has a closure device (not shown), port (not shown), vent **413**, optional bladder (not shown) as described in connection with the closure device **118**, the port **116**, and the vent **113**, respectively.

[0062] A spike plate **1214** is positioned downstream from the cartridge assemblies **1220** and has at least two cannulated spikes **1214a**. Each spike **1214a** has a proximal end that is configured to communicate with an interior of a corresponding cartridge **1215** and a distal end that is configured to communicate with one of flow channels **1232**. Each flow channel **1232** is integrally formed or molded into a compressible, such as elastomeric, silicone, or

thermo-plastic elastomer (TPE) layer **1299** that is positioned and sealed between the spike plate **1214** and a second plate **1298**. The proximal end of the flow channel **1232** communicates with a corresponding inlet **1239** of the manifold **1230** via a port or other such opening in the second plate **1298**.

[0063] The device **1200** has at least two adjustable valves **1240** each positioned to communicate with a corresponding one of the flow channels **1232** and that adjusts mass flow rate of fluid that is drawn by the pump **1250** from the corresponding cartridge **1215** through the flow channel **1232** each time the pump **1250** rebounds. The adjustable valves **1240** are the same as the adjustable valves **140** described in connection with the device **100**. In the embodiment shown in Fig. 12, the adjustable valve **1240** is a paddle-actuated valve. The valve **1240** has paddles **1291** that protrude through openings in the body **1212** to turn a threaded shaft **1292** that compresses layer **1299** thereby compressing the corresponding flow channel **1232** to reduce the mass flow rate of fluid through the flow channel **1232**. The paddle **1291** is rotated in an opposite direction to turn the threaded shaft **1292** to decompress the layer **1299** to decompress the corresponding flow channel **1232** to rebound the mass flow rate of fluid through the flow channel **1232**.

[0064] As illustrated in Fig. 12, the mixing and dispensing device **1200** has a manifold assembly **1230** positioned downstream to the adjustable valve **1240**. The manifold assembly **1230** is the same as the manifold assembly **130** described in connection with the device **100**. The manifold assembly **1230** comprises a manifold body **1238** that has at least one side wall and a base that define a mixing chamber **1237**. There is a plurality of inlets **1239** on any surface of the manifold body **1238**. As illustrated in Fig. 12, the manifold assembly **1230** also has a seal **1235** disposed within the mixing chamber **1237** adjacent the inlets **1239** and a spring **1234** disposed within the mixing chamber **1237**. The spring **1234** is moveable between a compressed and an extended position as described in connection with Fig. 7. A piston **1233** is disposed within the mixing chamber **1237** between the seal **1235** and the spring **1234**. The seal **1235**, the spring **1234**, and the piston **1233** are as described in connection with the seal **135**, the spring **134**, and the piston **133**, respectively. Each inlet **1239** is configured to communicate with a flow channel **1232** of a corresponding cartridge assembly **1220**.

[0065] As illustrated in Fig. 12, the mixing and dispensing device **1200** also has a dispensing pump assembly **1250** positioned downstream to the manifold assembly **1230**. The dispensing pump assembly **1250** is configured to communicate with a nozzle **1252** that is positioned downstream thereto. The dispensing pump assembly **1250** and the nozzle **1252**

are as described in connection with the dispensing pump **150** and the nozzle **152**, respectively.

During operation of the device **1200**, fluid is drawn by the dispensing pump **1250** into the mixing chamber **1237** through an inlet **1239** and from the cartridge **1215** of the corresponding cartridge assembly **1220** to mix the selected volume of fluids to form the mixture and to expel the mixture from the nozzle **1252** as described in connection with device **100**, and particularly Fig. 7

[0066] While the foregoing has been set forth in considerable detail, it is to be understood that the drawings and detailed embodiments are presented for elucidation and not limitation. Design variations, especially in matters of shape, size and arrangements of parts may be made but are within the principles described herein. Those skilled in the art will realize that such changes or modifications of the invention or combinations of elements, variations, equivalents or improvements therein are still within the scope of the mixing and dispensing device as defined in the appended claims.

We claim:

1. A device for mixing a plurality of fluids to formulate a mixture and for dispensing the mixture, the device comprising:

a plurality of cartridge assemblies each comprising a cartridge configured to contain one of the plurality of fluids;

a plurality of flow channels each having a central axis and each configured to communicate with a corresponding one of the cartridges;

a plurality of valve assemblies each positioned to communicate with one of the flow channels to adjust a mass flow rate of the fluid drawn from the corresponding cartridge;

a manifold assembly, comprising:

a manifold body having a mixing chamber and a plurality of inlets each configured to communicate with a corresponding one of the flow channels through which the fluid from the cartridge of the corresponding cartridge assembly is drawn into the mixing chamber during operation of the device;

a seal disposed within the manifold body adjacent to and having a size and a shape that substantially covers the inlets;

a spring disposed within the manifold body; and

a piston disposed within the manifold body between the seal and the spring, wherein the spring is moveable between an extended position in which the spring engages the piston to move the seal to a closed position that substantially and simultaneously closes the inlets from the flow channels and a compressed position that moves the seal away from the inlets to substantially and simultaneously open the inlets to the flow channels;

a dispensing pump assembly configured to communicate with the manifold assembly and configured to draw fluid from each of the cartridge assemblies; and

a nozzle configured to communicate with the dispensing pump assembly and to dispense the mixture;

wherein during operation the dispensing pump draws a volume of fluid from each cartridge through the corresponding flow channel and through the corresponding inlet into the mixing chamber to form the mixture, and

wherein during operation the mixture is drawn from the mixing chamber through the dispensing pump to the nozzle.

2. The device as in claim 1, wherein each cartridge assembly further comprises:

a closure device configured to substantially close the cartridge;
a conduit positioned within the cartridge;
a port positioned within the closure device and having an opened and a closed position and configured to communicate with the conduit and the corresponding flow channel in the opened position; and
a vent that is configured for entry of atmospheric air into the cartridge as fluid is removed when the dispensing pump is in a rebound state.

3. The device as in claim 1, further comprising a body encloses the cartridge assemblies, flow channels, valves, manifold assembly, and dispensing pump assembly.

4. The device as in claim 1, wherein a portion of the body is configured to open and close to provide access to the cartridge assemblies.

5. The device as in claim 1, wherein the cartridge assembly further comprises a bladder positioned in an interior of the cartridge and configured to hold the fluid.

6. The device as in claim 1, wherein the plurality of inlets is positioned in a base of the manifold body.

7. The device as in claim 1, wherein an outer surface of a side wall of the piston has at least one channel that extends substantially parallel to a central axis of the mixing chamber.

8. The device as in claim 1, wherein the adjustable valve is adjustable along a second axis that is not parallel to the central axis of the corresponding flow channel at a point along the flow channel at which the adjustable valve is adjacent and is configured to constrict a lumen of the flow channel to decrease the mass flow of fluid.

9. The device as in claim 8, wherein the adjustable valve comprises:

a control;

a threaded shaft that has a tip and that is mated to the control knob; and

a clamp into which the point along the flow channel is positioned;

wherein an axial rotation of the control in a first direction progressively moves the threaded shaft towards the clamp to a closed position that constricts the lumen of the flow channel; and

wherein an axial rotation of the control in a second direction progressively moves the threaded shaft away from the clamp to an opened position that rebounds the lumen of the flow channel.

10. The device as in claim 8, wherein the adjustable valve comprises:

a control;

a roller that is mated to the control;

a ramp that has an axis that is positioned at an angle relative to an axis of linear movement of the roller;

wherein the point along the flow channel is positioned between the roller and the clamp;

wherein a movement of the control in a first direction progressively moves the roller along the ramp to a closed position that constricts the lumen of the flow channel; and

wherein a movement of the control in a second direction progressively moves the roller along the ramp to an opened position that rebounds the lumen of the flow channel.

11. The device as in claim 1, wherein the adjustable valve is positioned within a lumen of the flow channel.

12. The device as in claim 11, wherein the adjustable valve comprises:

a control;

a needle having a tip and positioned within a valve body;

wherein the needle is mated to the control;

wherein an axial rotation of the control in a first direction axially advances the needle within the lumen of the flow channel;

wherein an axial rotation of the control in a second direction axially withdraws the needle within the lumen of the flow channel.

13. A device for mixing a plurality of fluids to form a mixture and for dispensing said mixture, comprising:

a plurality of cartridges each configured to contain one of the plurality of fluids;

a plurality of flow channels each having a central axis and each configured to communicate with a corresponding one of the cartridges;

a plurality of independently adjustable valves each positioned adjacent to one of the flow channels and adjustable along a second axis that is not parallel to the central axis to adjust a mass flow rate of the fluid drawn from the corresponding cartridge;

a manifold body having a plurality of inlets each configured to communicate with a corresponding one of the flow channels through which the fluid from the corresponding cartridge is drawn into a mixing chamber during operation;

a seal disposed within the manifold body adjacent to and sized to substantially cover the inlets;

a piston disposed within the manifold body between the seal and a spring, wherein the spring is moveable between an extended position in which the spring engages the piston to move the seal to a closed position that substantially and simultaneously closes the inlets from the flow channels and a compressed position that moves the seal away from the inlets to substantially and simultaneously open the inlets to the flow channels;

a dispensing pump configured for communication with the mixing chamber and configured to draw fluid from each of the cartridges; and

a nozzle configured for communication with the dispensing pump and configured to dispense the mixture,

wherein during operation the dispensing pump draws a volume of fluid from each cartridge through the corresponding flow channel and through the corresponding inlet into the mixing chamber to form the mixture, and

wherein during operation the mixture is drawn from the mixing chamber through the dispensing pump to the nozzle.

14. The device of claim 13, wherein each cartridge is removable.

15. The device of claim 13, further comprising at least two closure device each configured to substantially close a corresponding one of the cartridges.

16. The device of claim 13, further comprising:

a spike plate positioned downstream to the cartridges;

a second plate positioned downstream to the spike plate; and

a compressible layer positioned between the spike plate and second plate and into which flow channels are formed.

17. The device of claim 13, wherein an outer surface of a side wall of the piston has at least one channel that extends substantially parallel to a central axis of the mixing chamber.

18. The device of claim 13, wherein the closure device is positioned in an upstream portion of cartridges.

19. The device of claim 13, further comprising a spike plate positioned upstream to the cartridge and having at least two cannulated spikes configured to communicate with an interior of the cartridge and at least two uptake ports configured to communicate with the flow channels.

20. A device for mixing a plurality of fluids to form a mixture and for dispensing the mixture, comprising:

- a plurality of cartridge assemblies, each cartridge assembly comprising cartridge configured to contain one of the plurality of fluids;

- a plurality of flow channels each having a lumen having a diameter, a central axis, and each configured to communicate with a corresponding one of the cartridges, wherein the diameter of each flow channel is directly proportional to a mass flow rate of fluid drawn from the corresponding cartridge during operation of the device;

- a manifold assembly, comprising:

- a manifold body having a mixing chamber and a plurality of inlets each configured to communicate with a corresponding flow channel through which the fluid from the cartridge of the corresponding cartridge assembly is drawn into the mixing chamber during operation;

- a seal disposed within the manifold body adjacent to and sized to substantially and simultaneously close the inlets;

- a spring disposed within the manifold body; and

- a piston disposed within the manifold body between the seal and the spring, wherein the spring is moveable between an extended position in which the spring engages the piston to move the seal to a closed position that substantially and simultaneously closes the inlets from the flow channels and a compressed position that moves the seal away from the inlets to substantially and simultaneously open the inlets to the flow channels;

- a dispensing pump assembly configured for communication with the manifold assembly and configured to draw fluid from each of the cartridge assemblies; and

a nozzle configured for communication with the dispensing pump assembly and configured to dispense the mixture,

wherein during operation the dispensing pump draws the volume of fluid from each cartridge assembly through the corresponding inlet into the mixing chamber to form the mixture, and


wherein during operation the mixture is drawn from the mixing chamber through the dispensing pump to the nozzle.

21. The device of claim 20, wherein the diameter of each flow channel is different from the diameter of the other flow channels.

22. The device of claim 20, further comprising a plurality of independently adjustable valves each positioned to communicate with a corresponding one of the flow channels to adjust the mass flow rate of fluid drawn from the corresponding cartridge.

23. The device of claim 20, wherein an outer surface of a side wall of the piston has at least one channel that extends substantially parallel to a central axis of the mixing chamber.

1/37

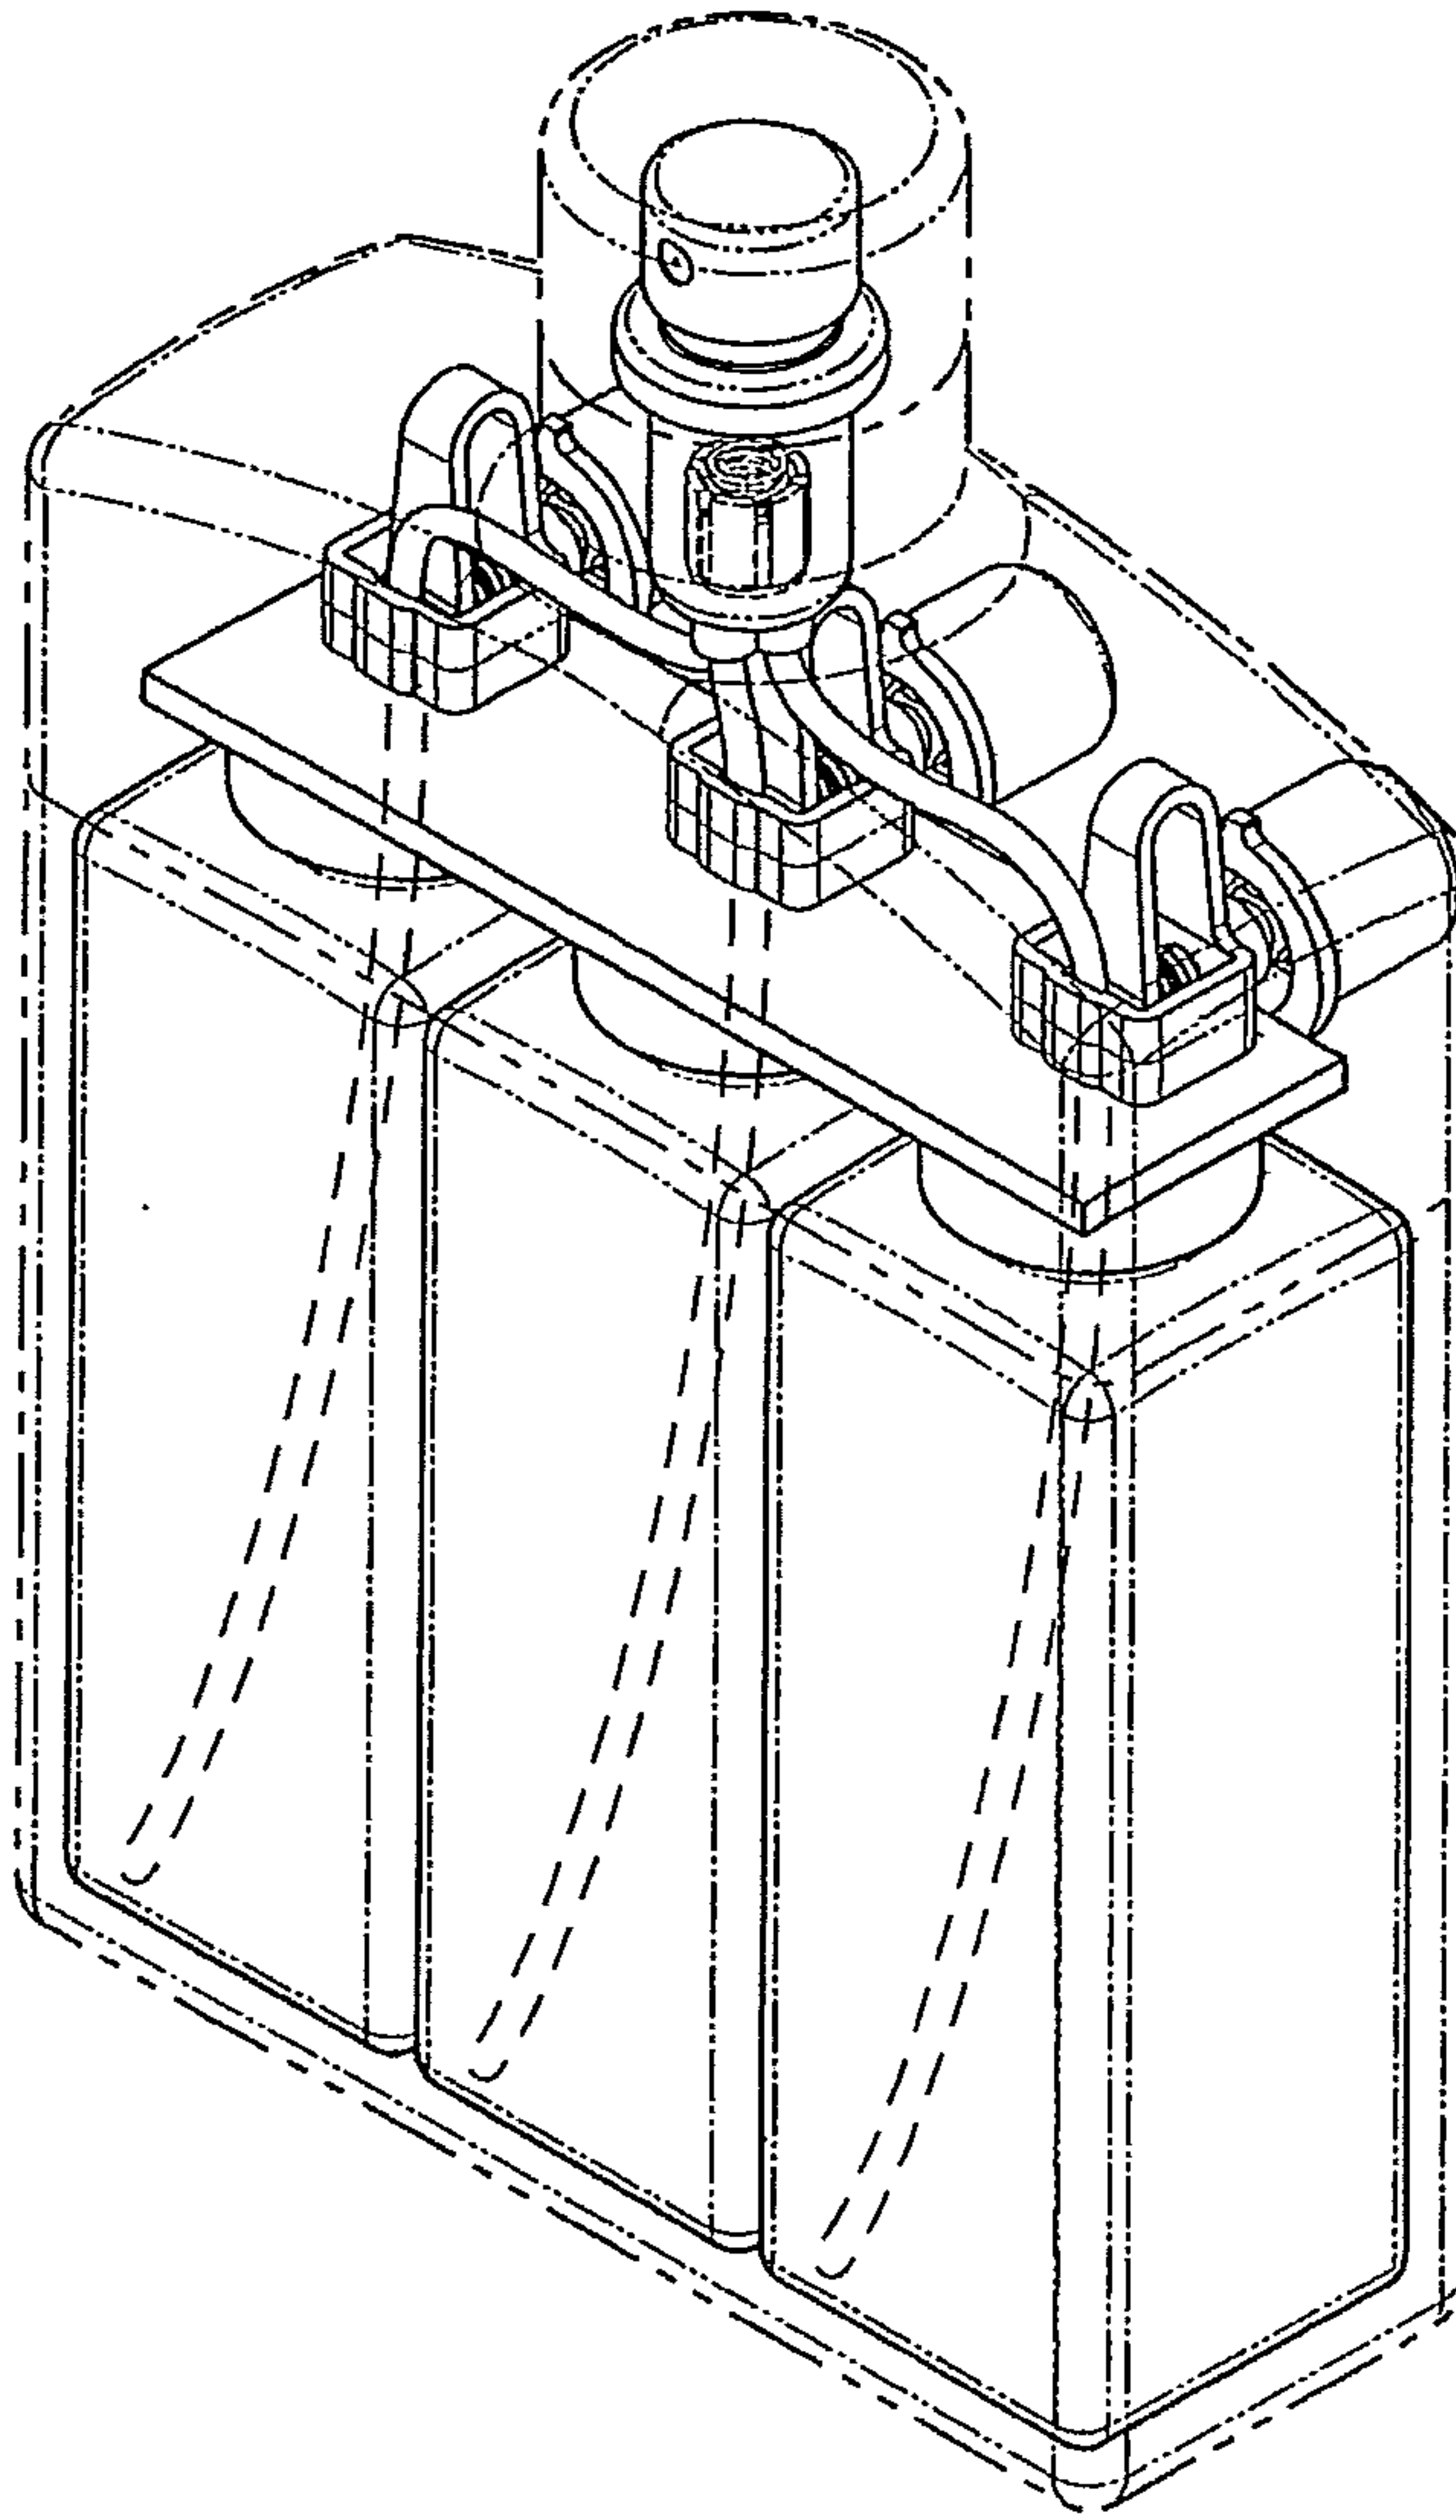

Picture Claim

2/37

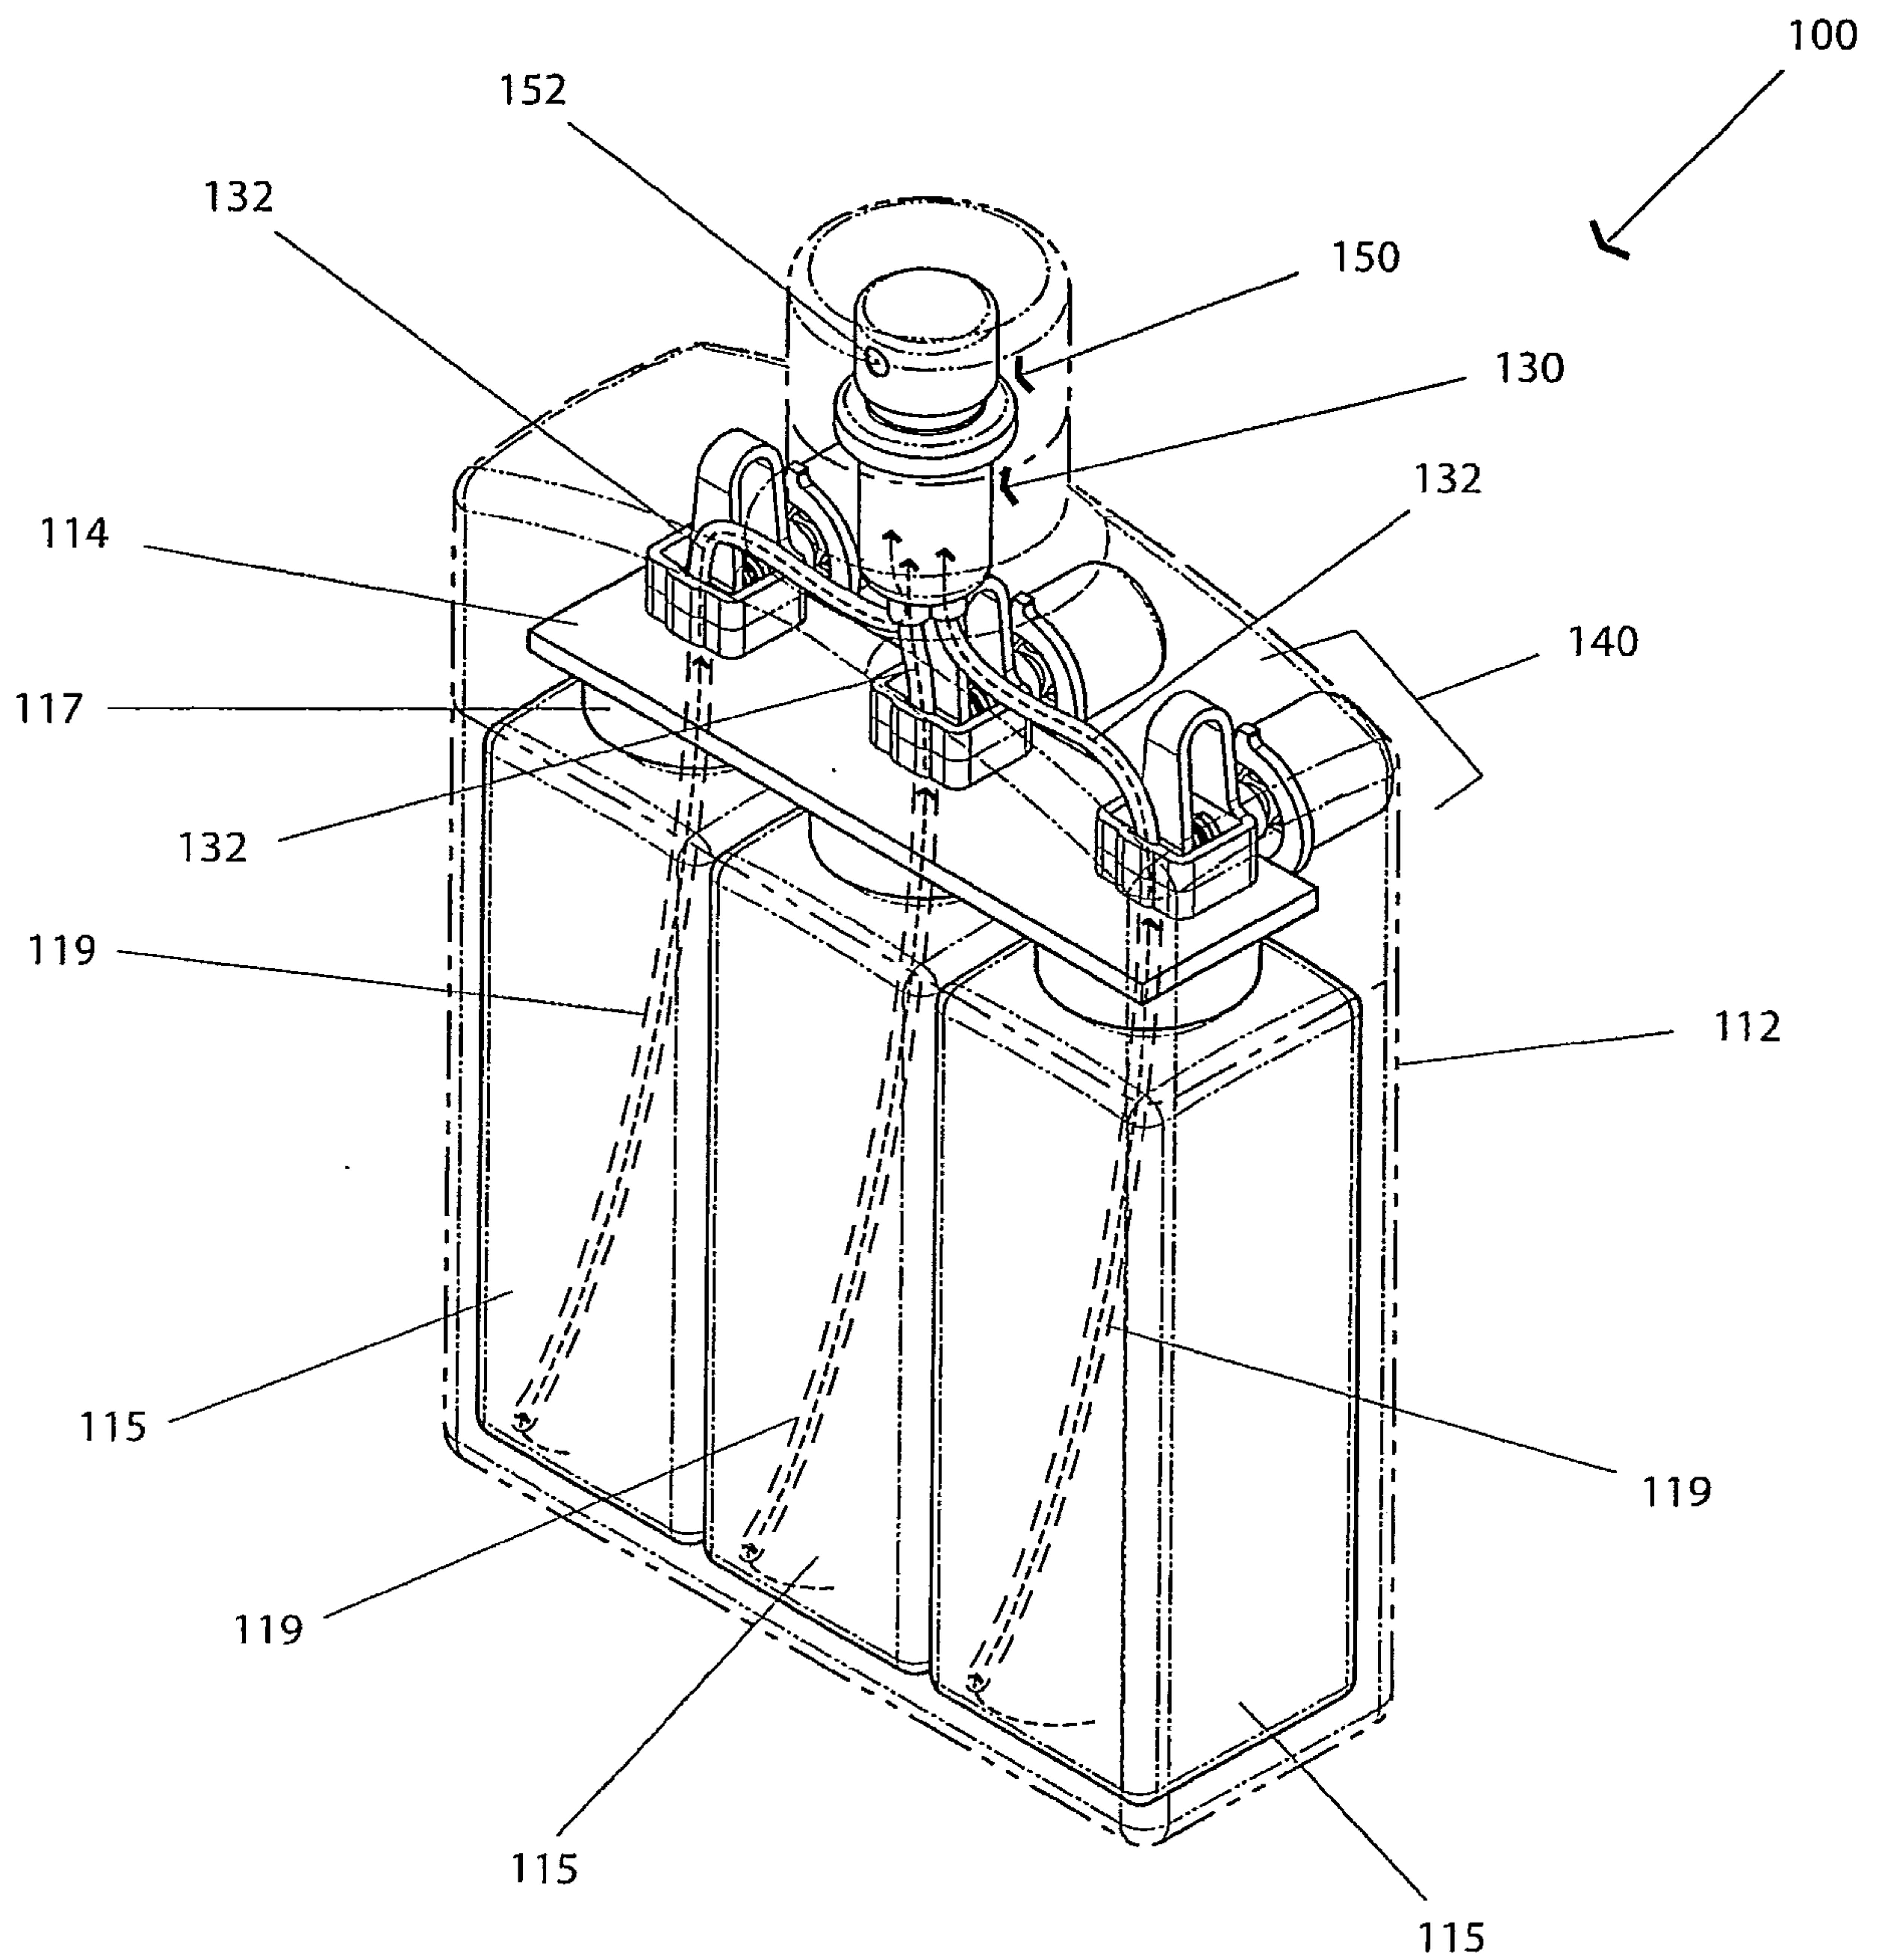


Fig. 1A

3/37

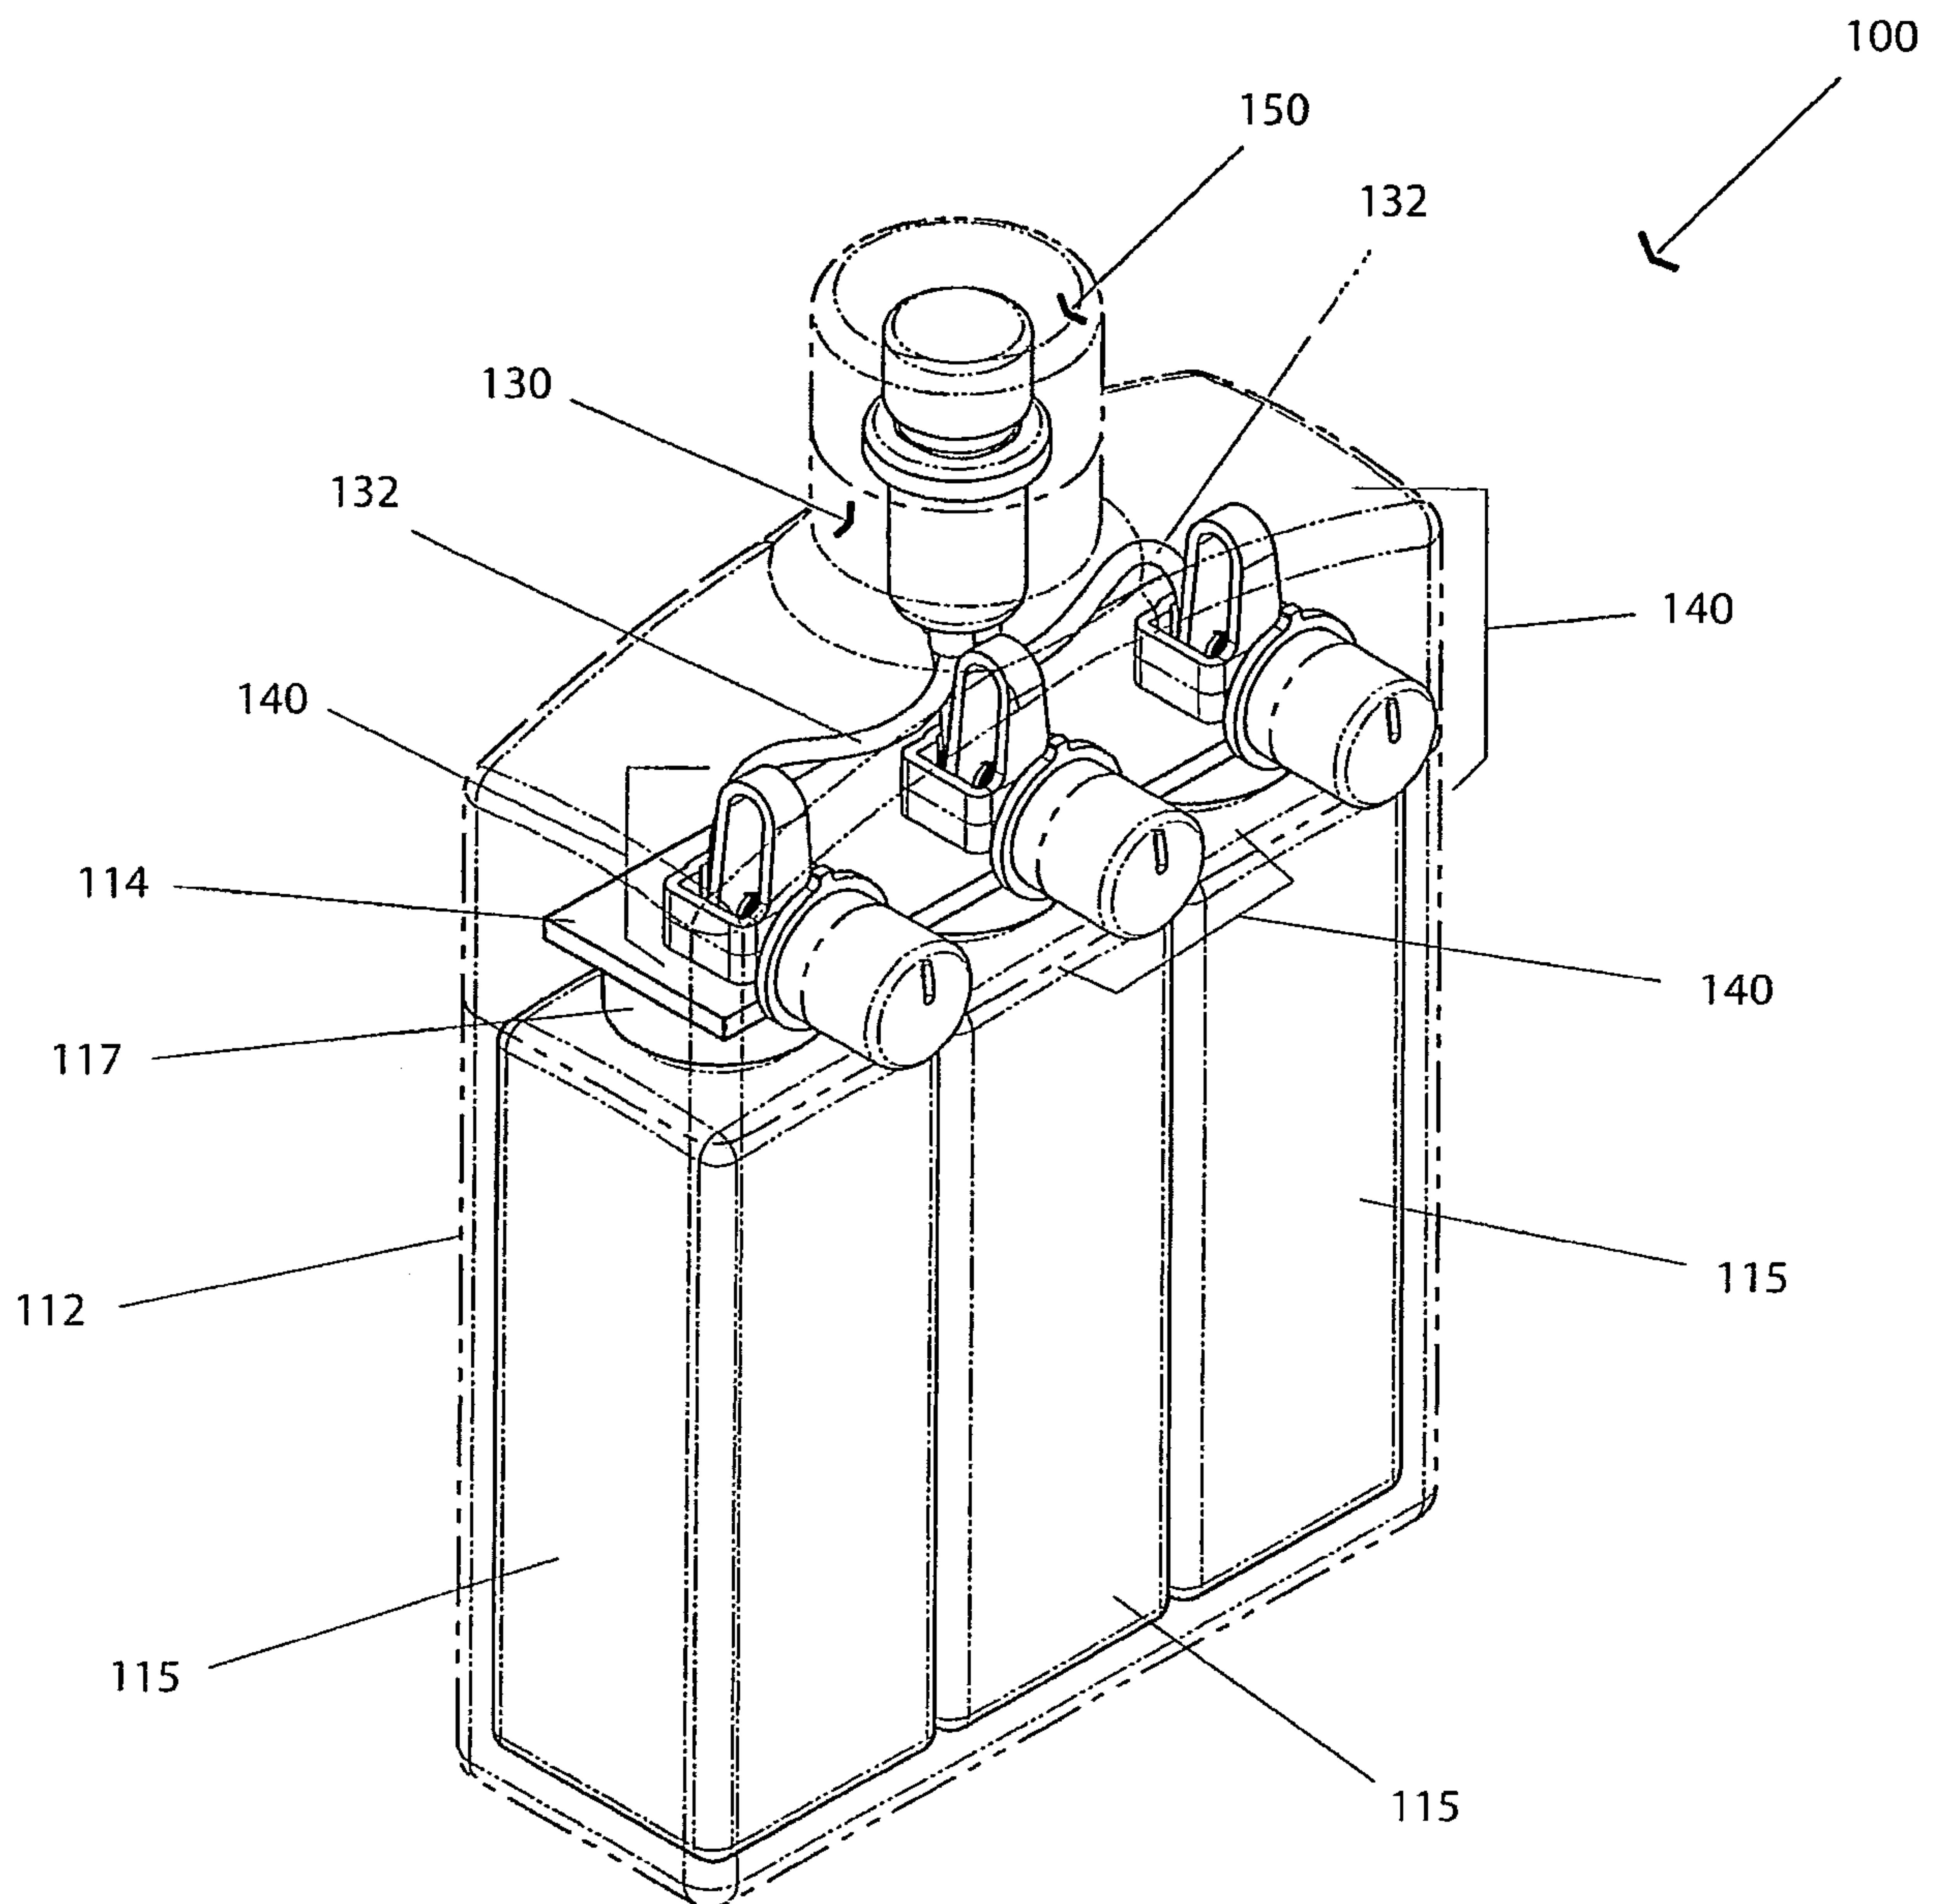


Fig. 1B

4/37


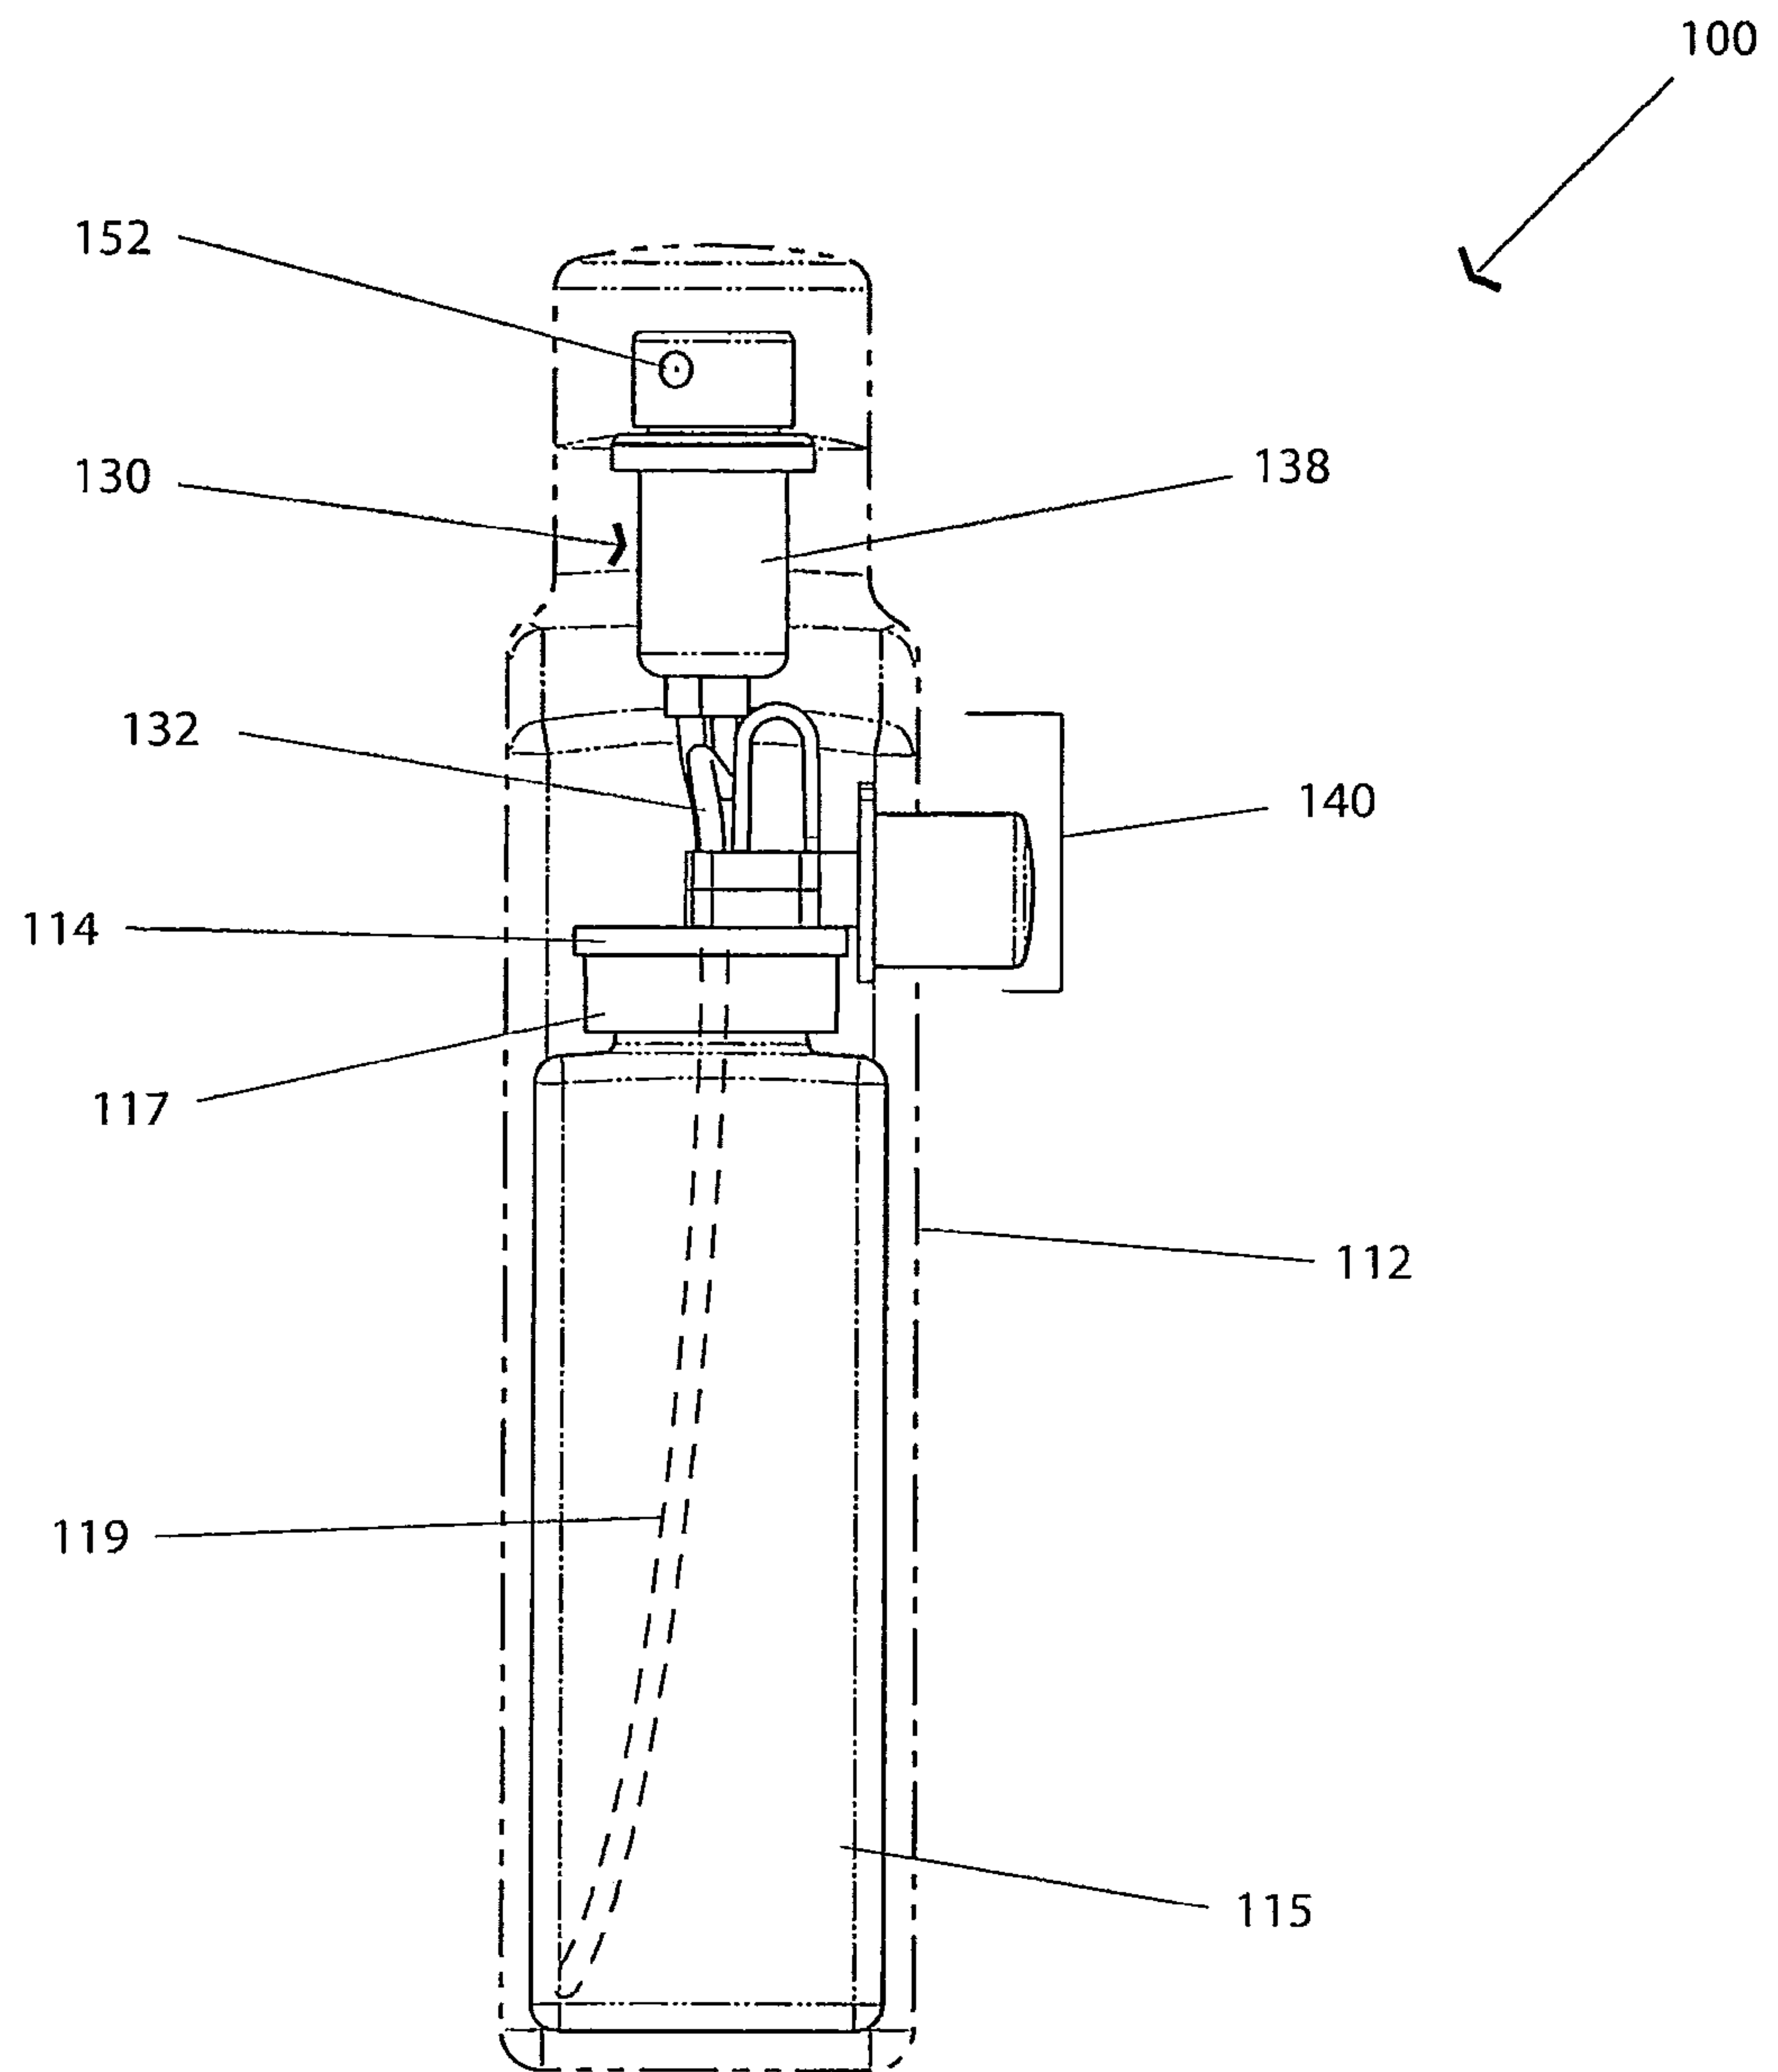


Fig. 1C

5/37

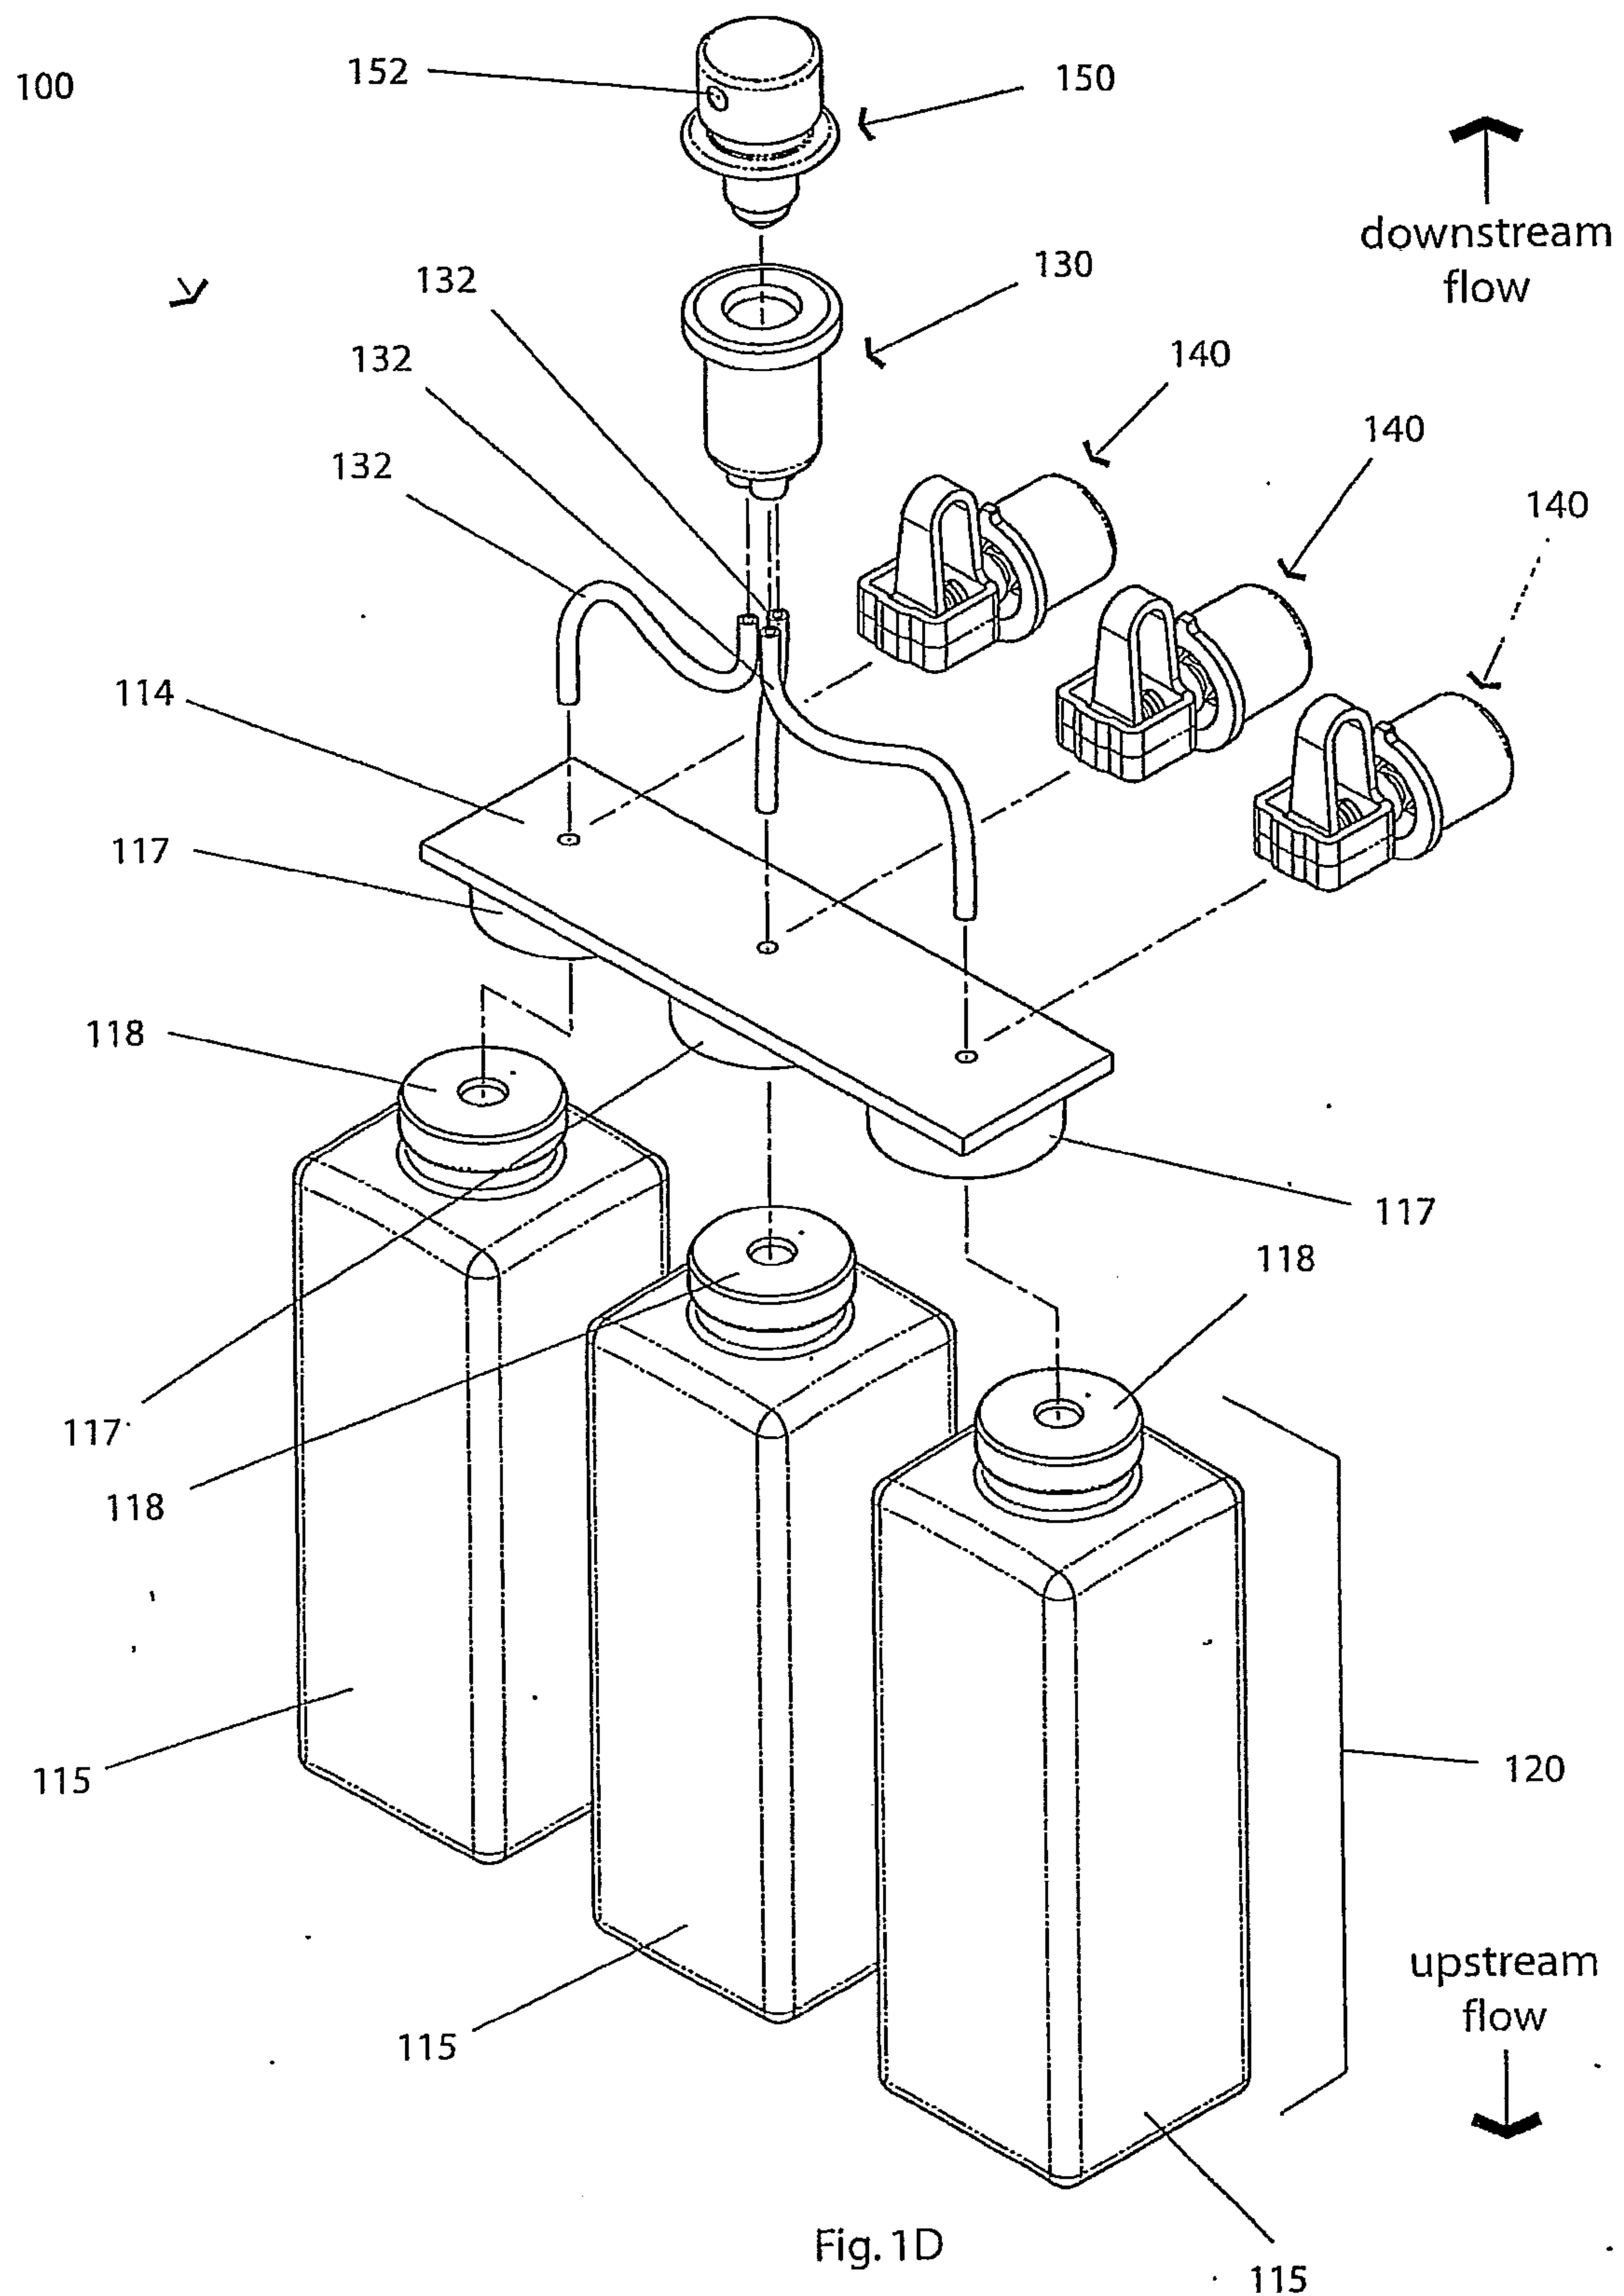

6/37

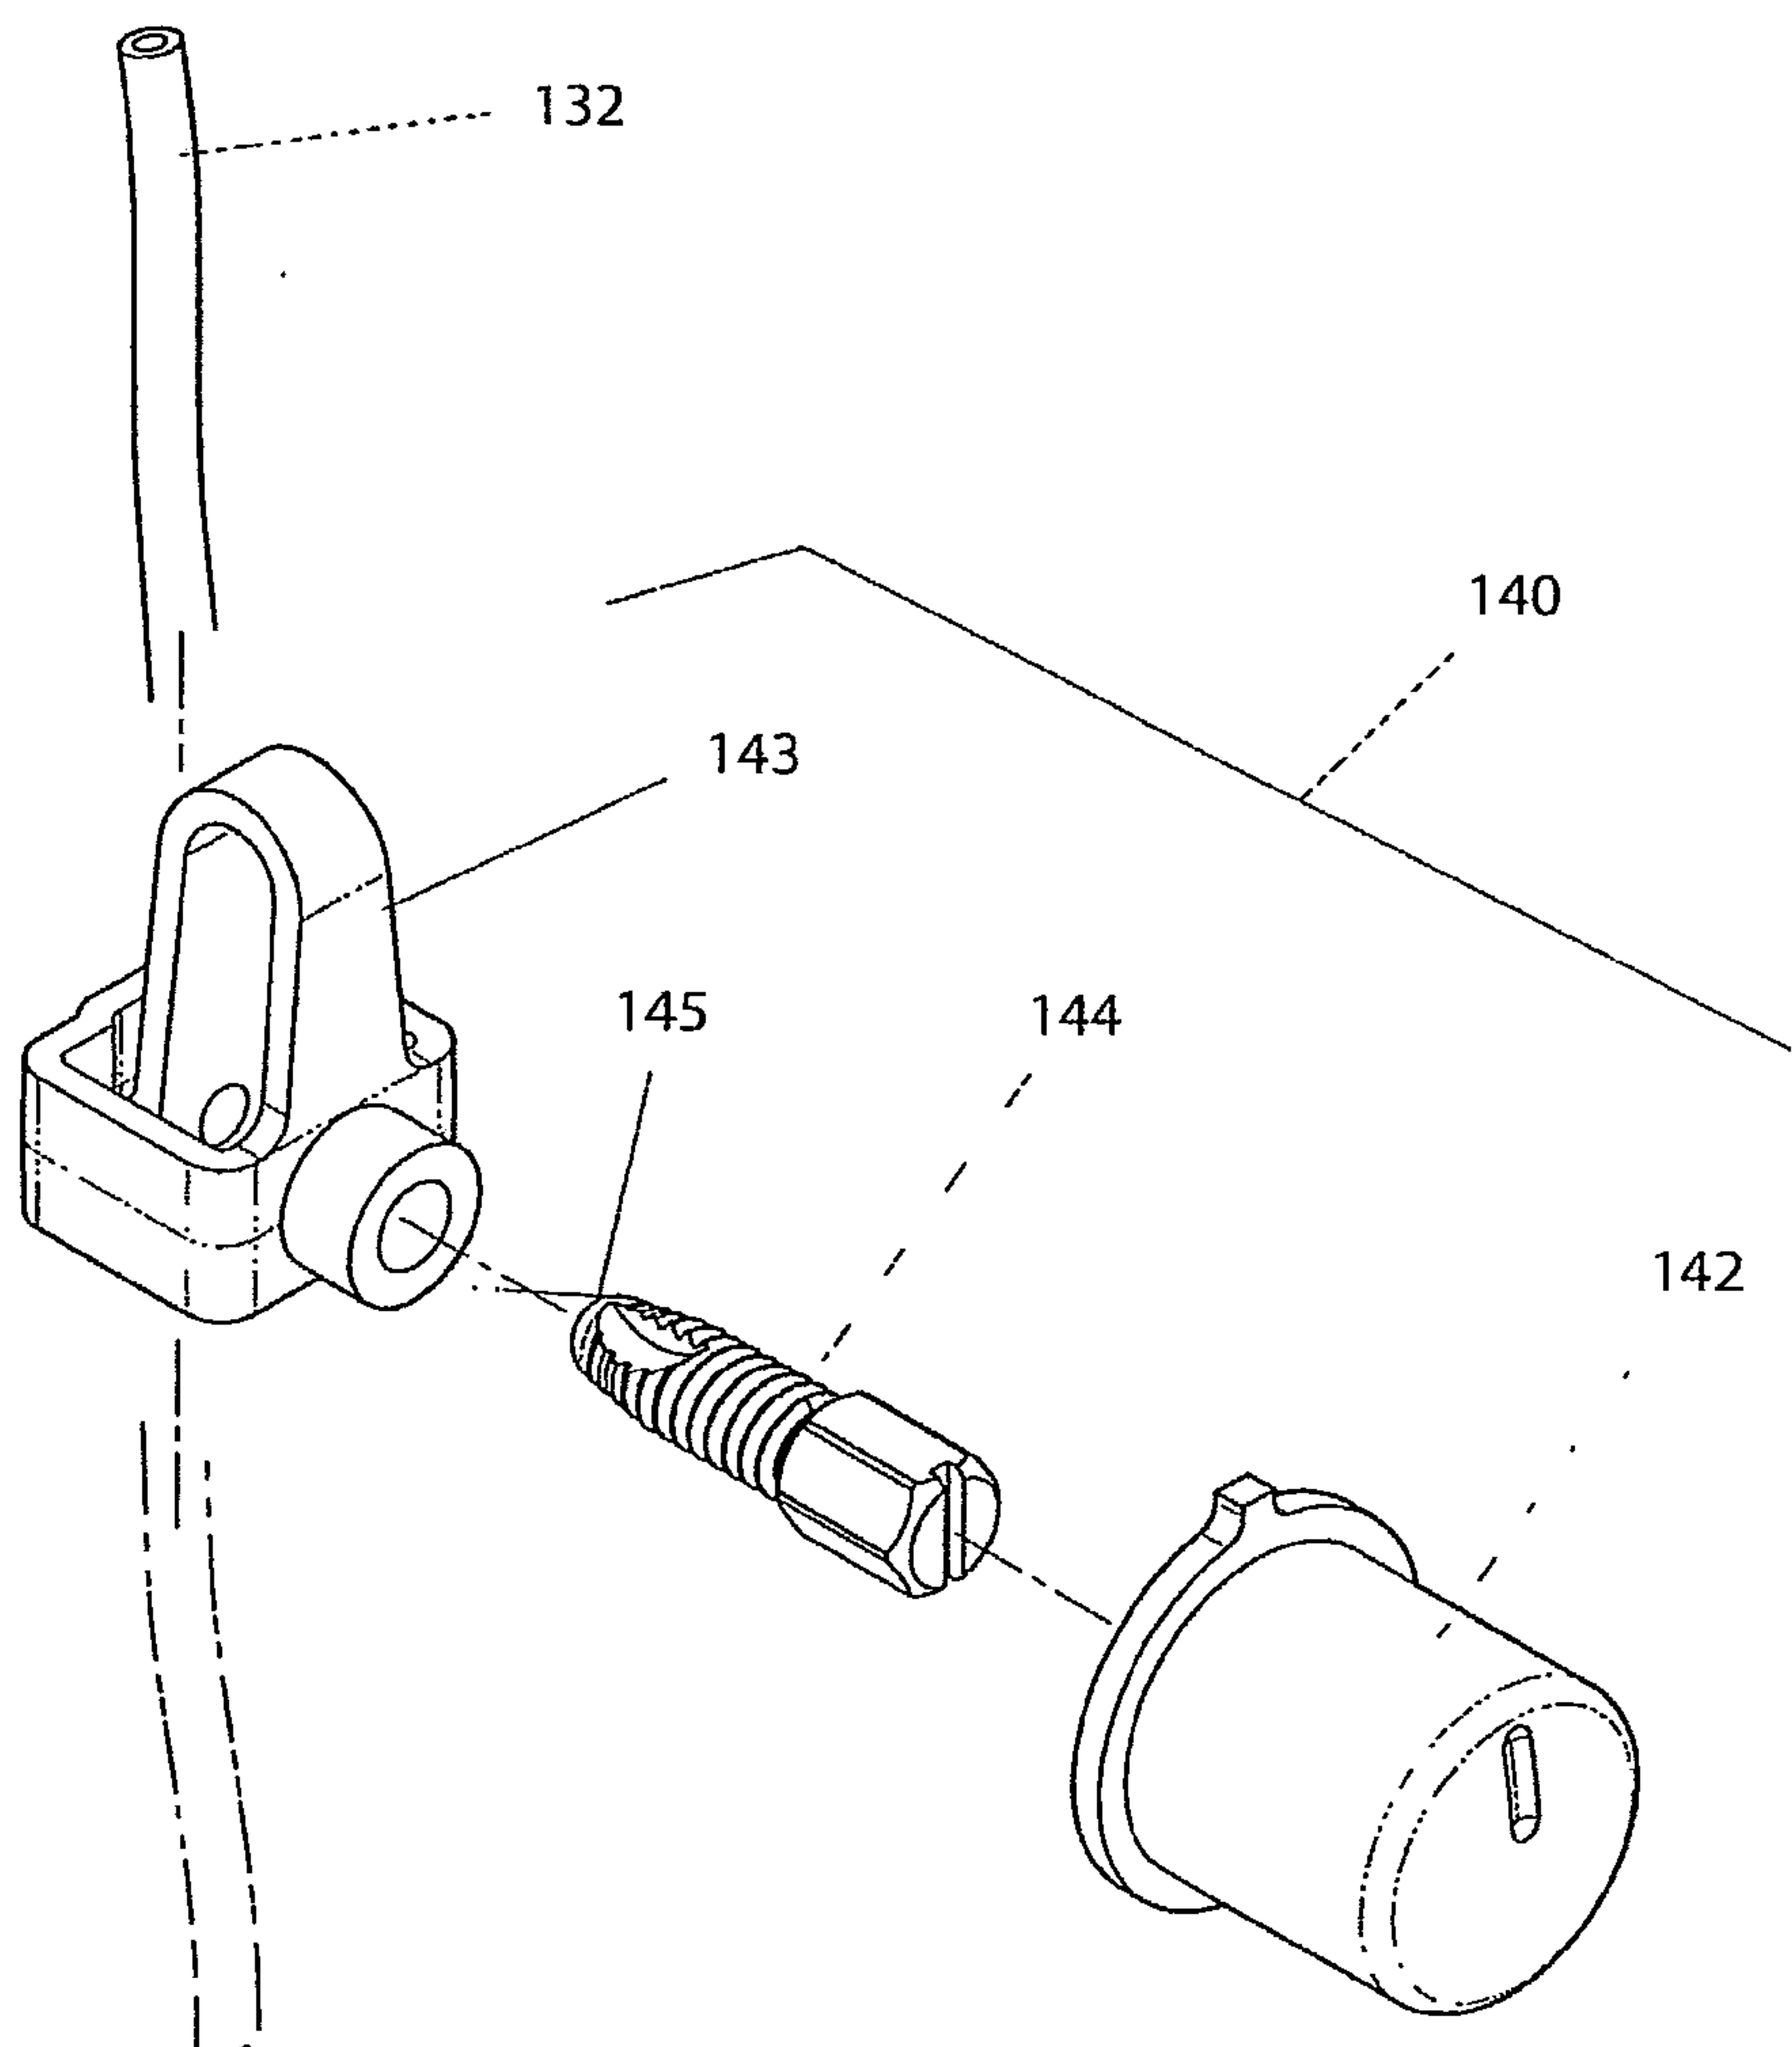


Fig. 1E

7/37

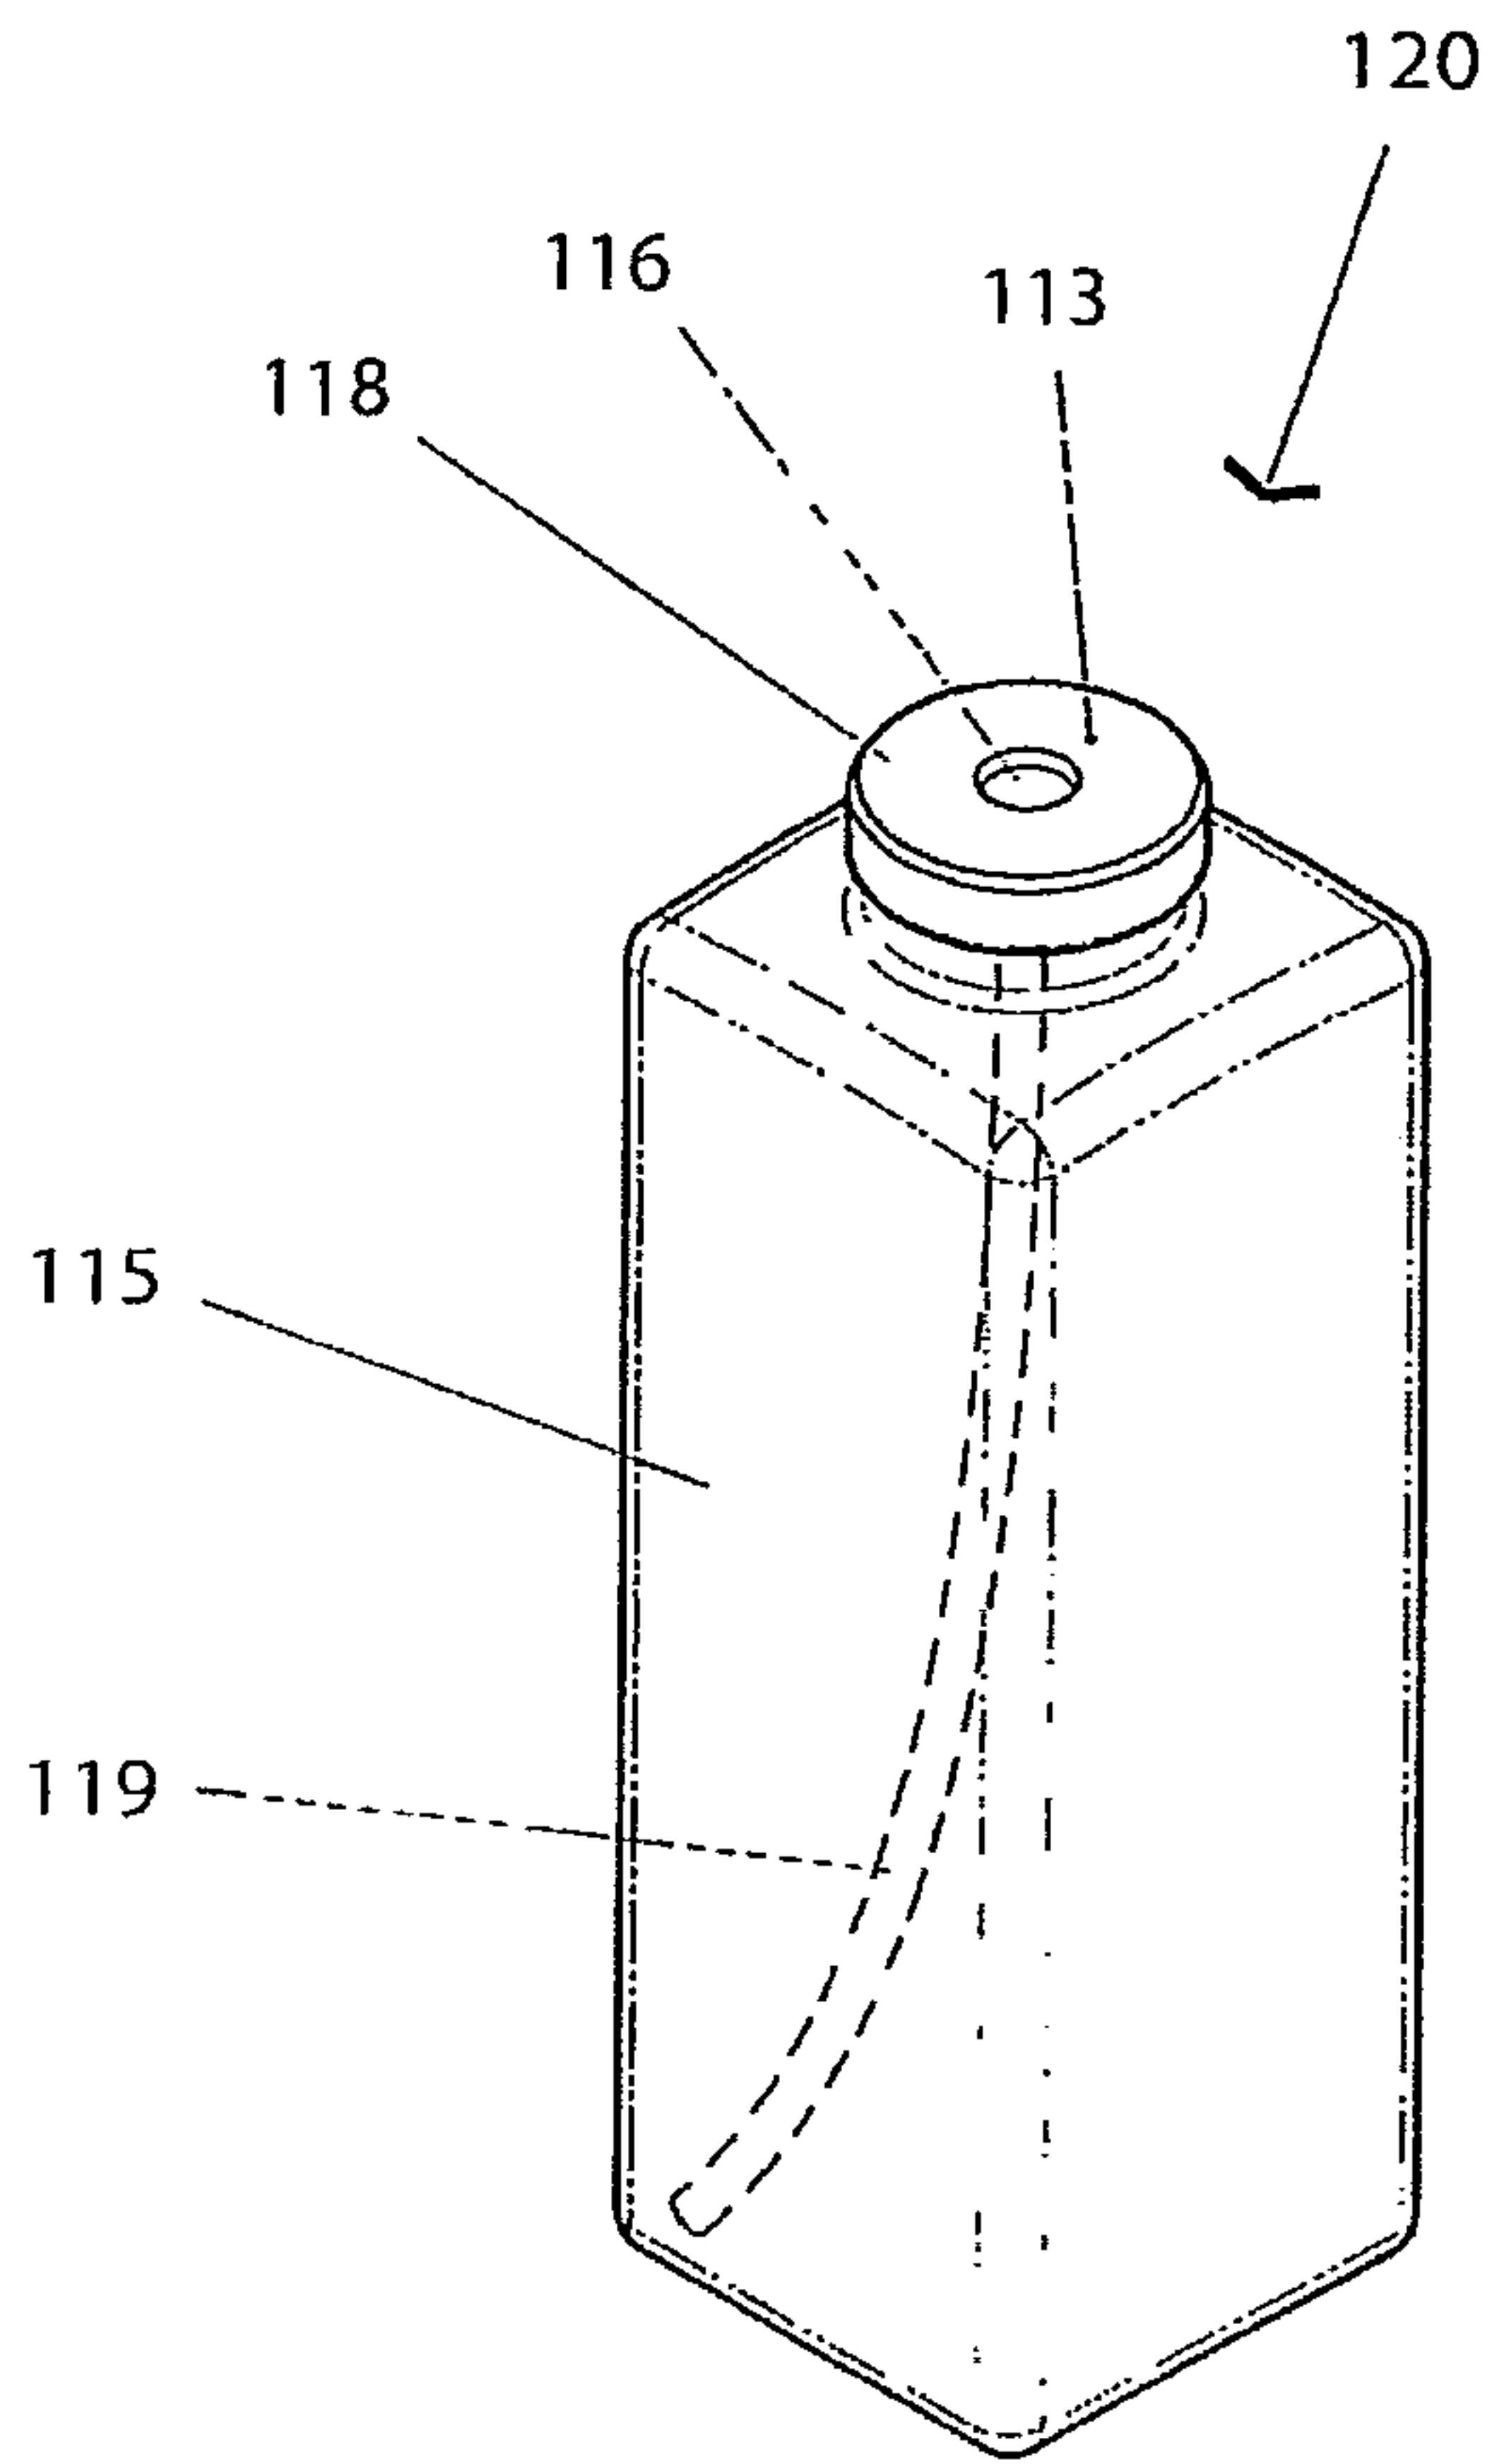


Fig. 1F

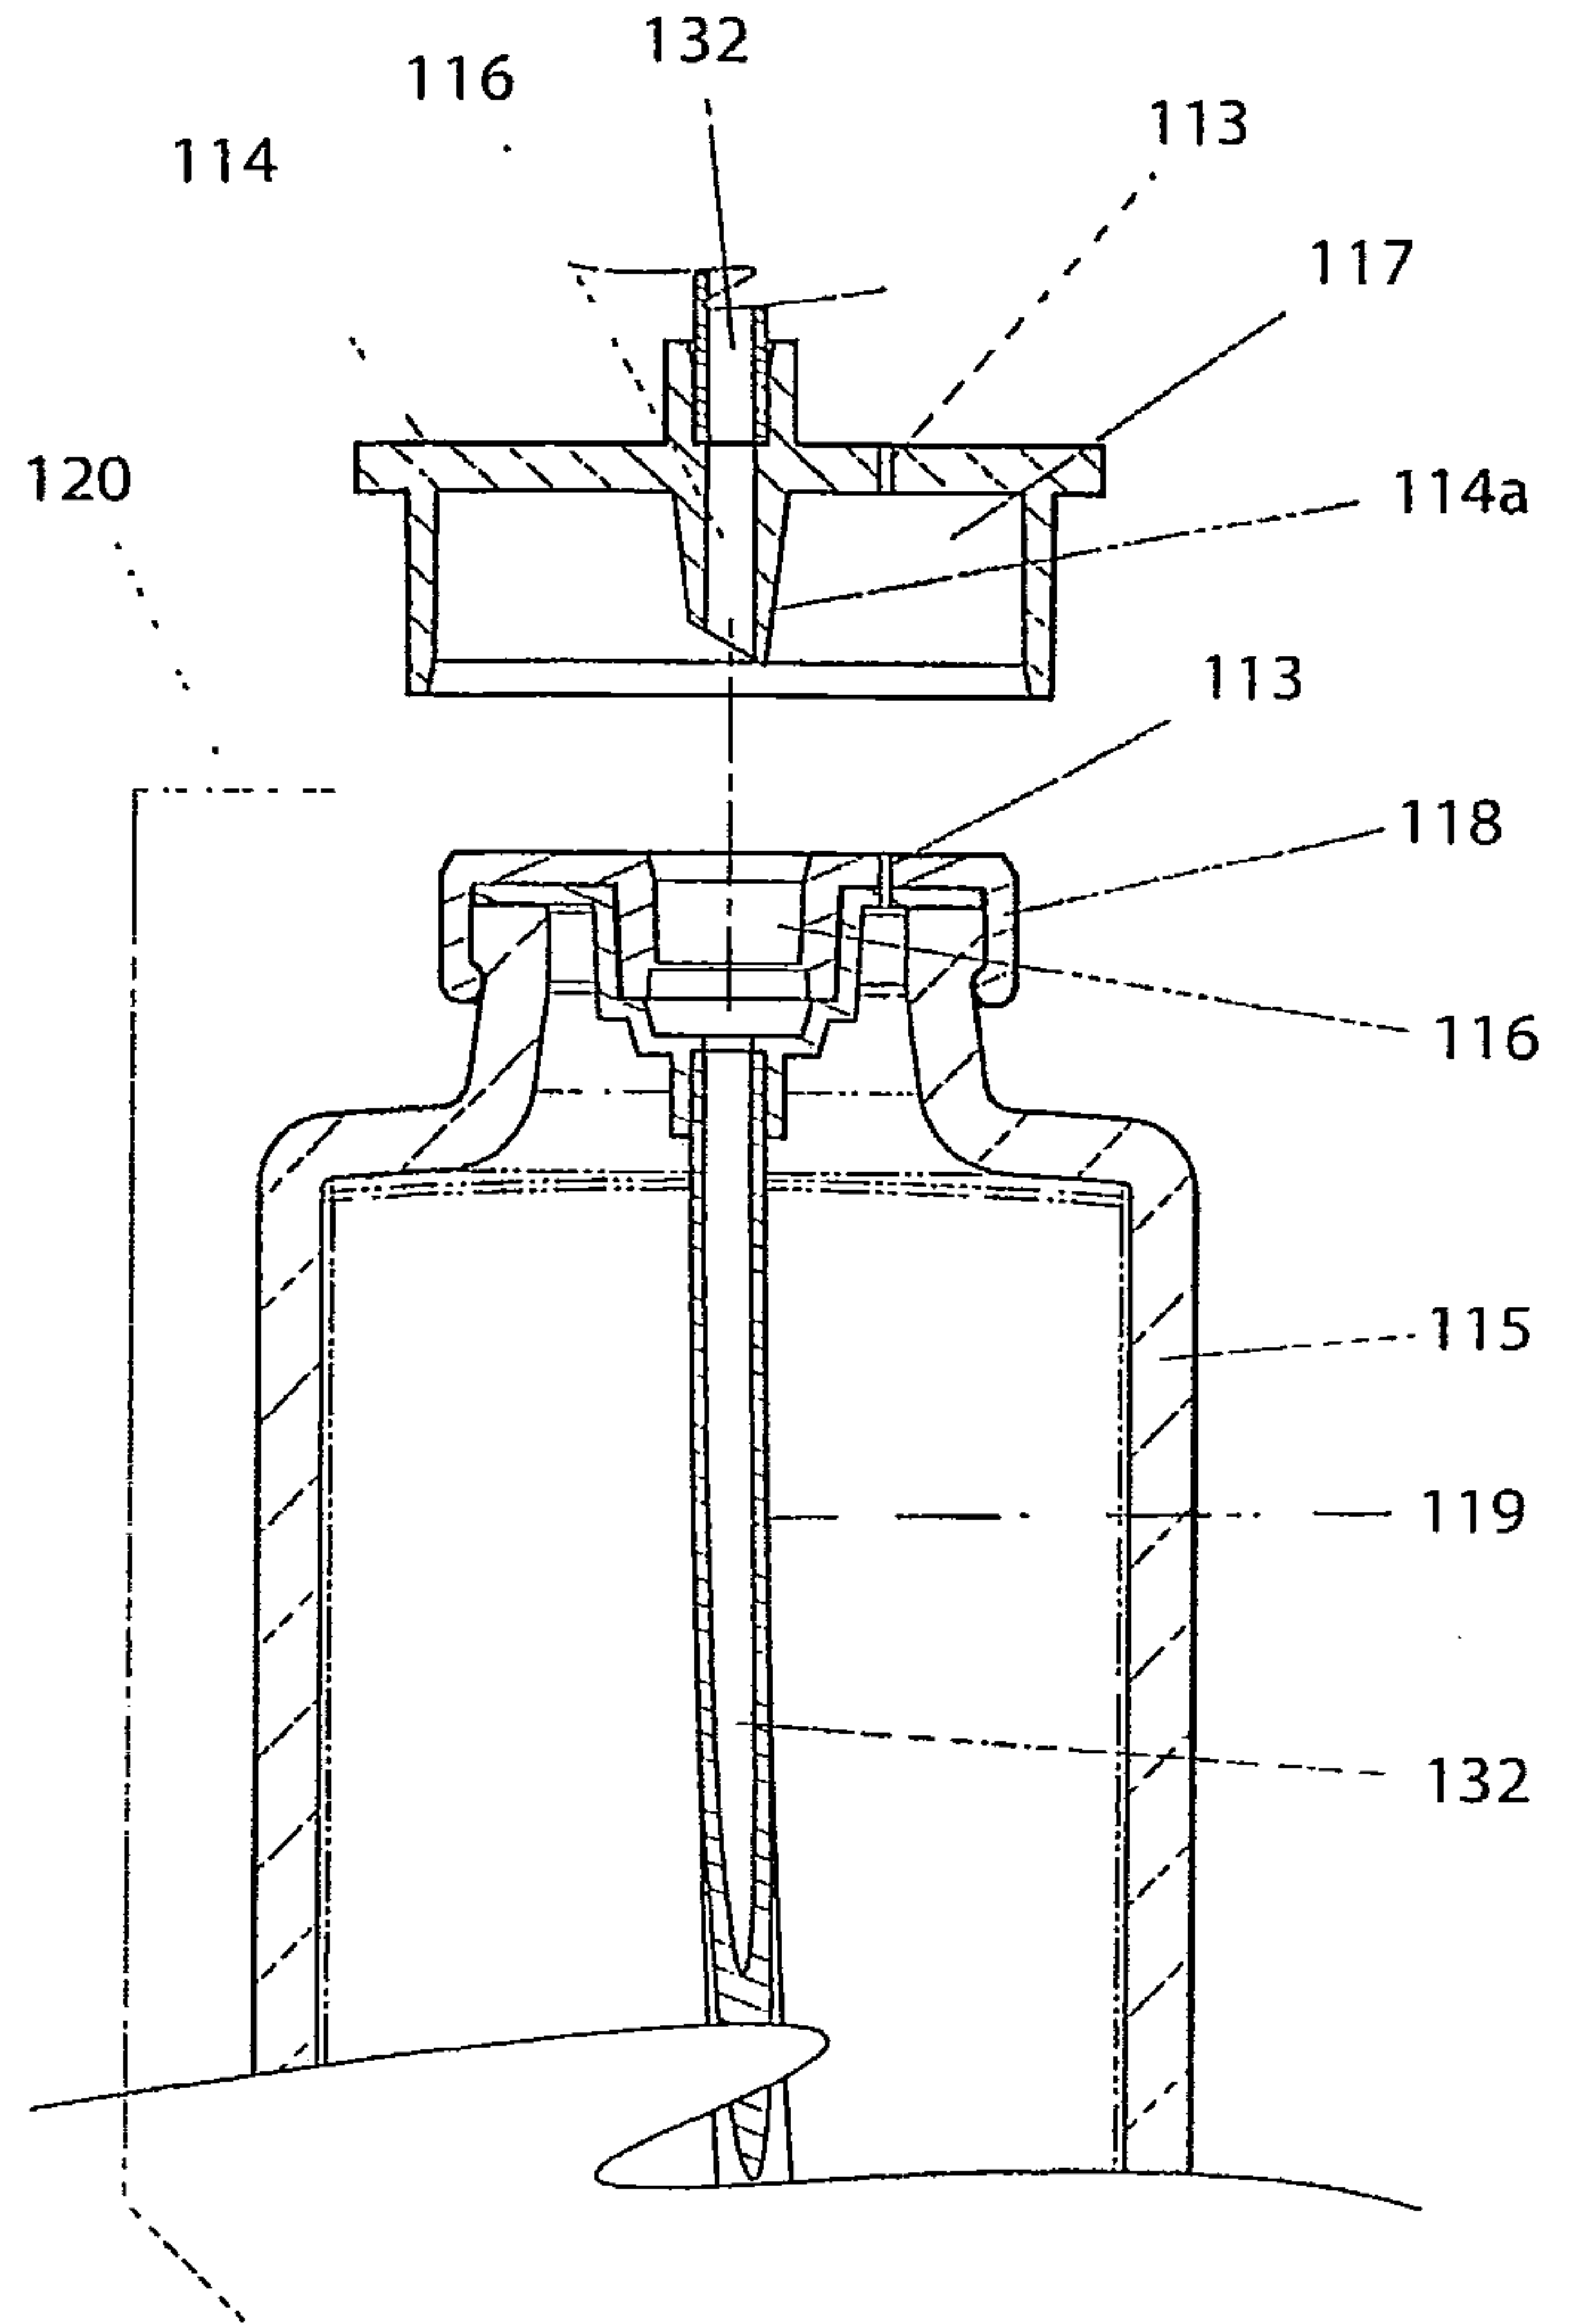


Fig. 1G

8/37

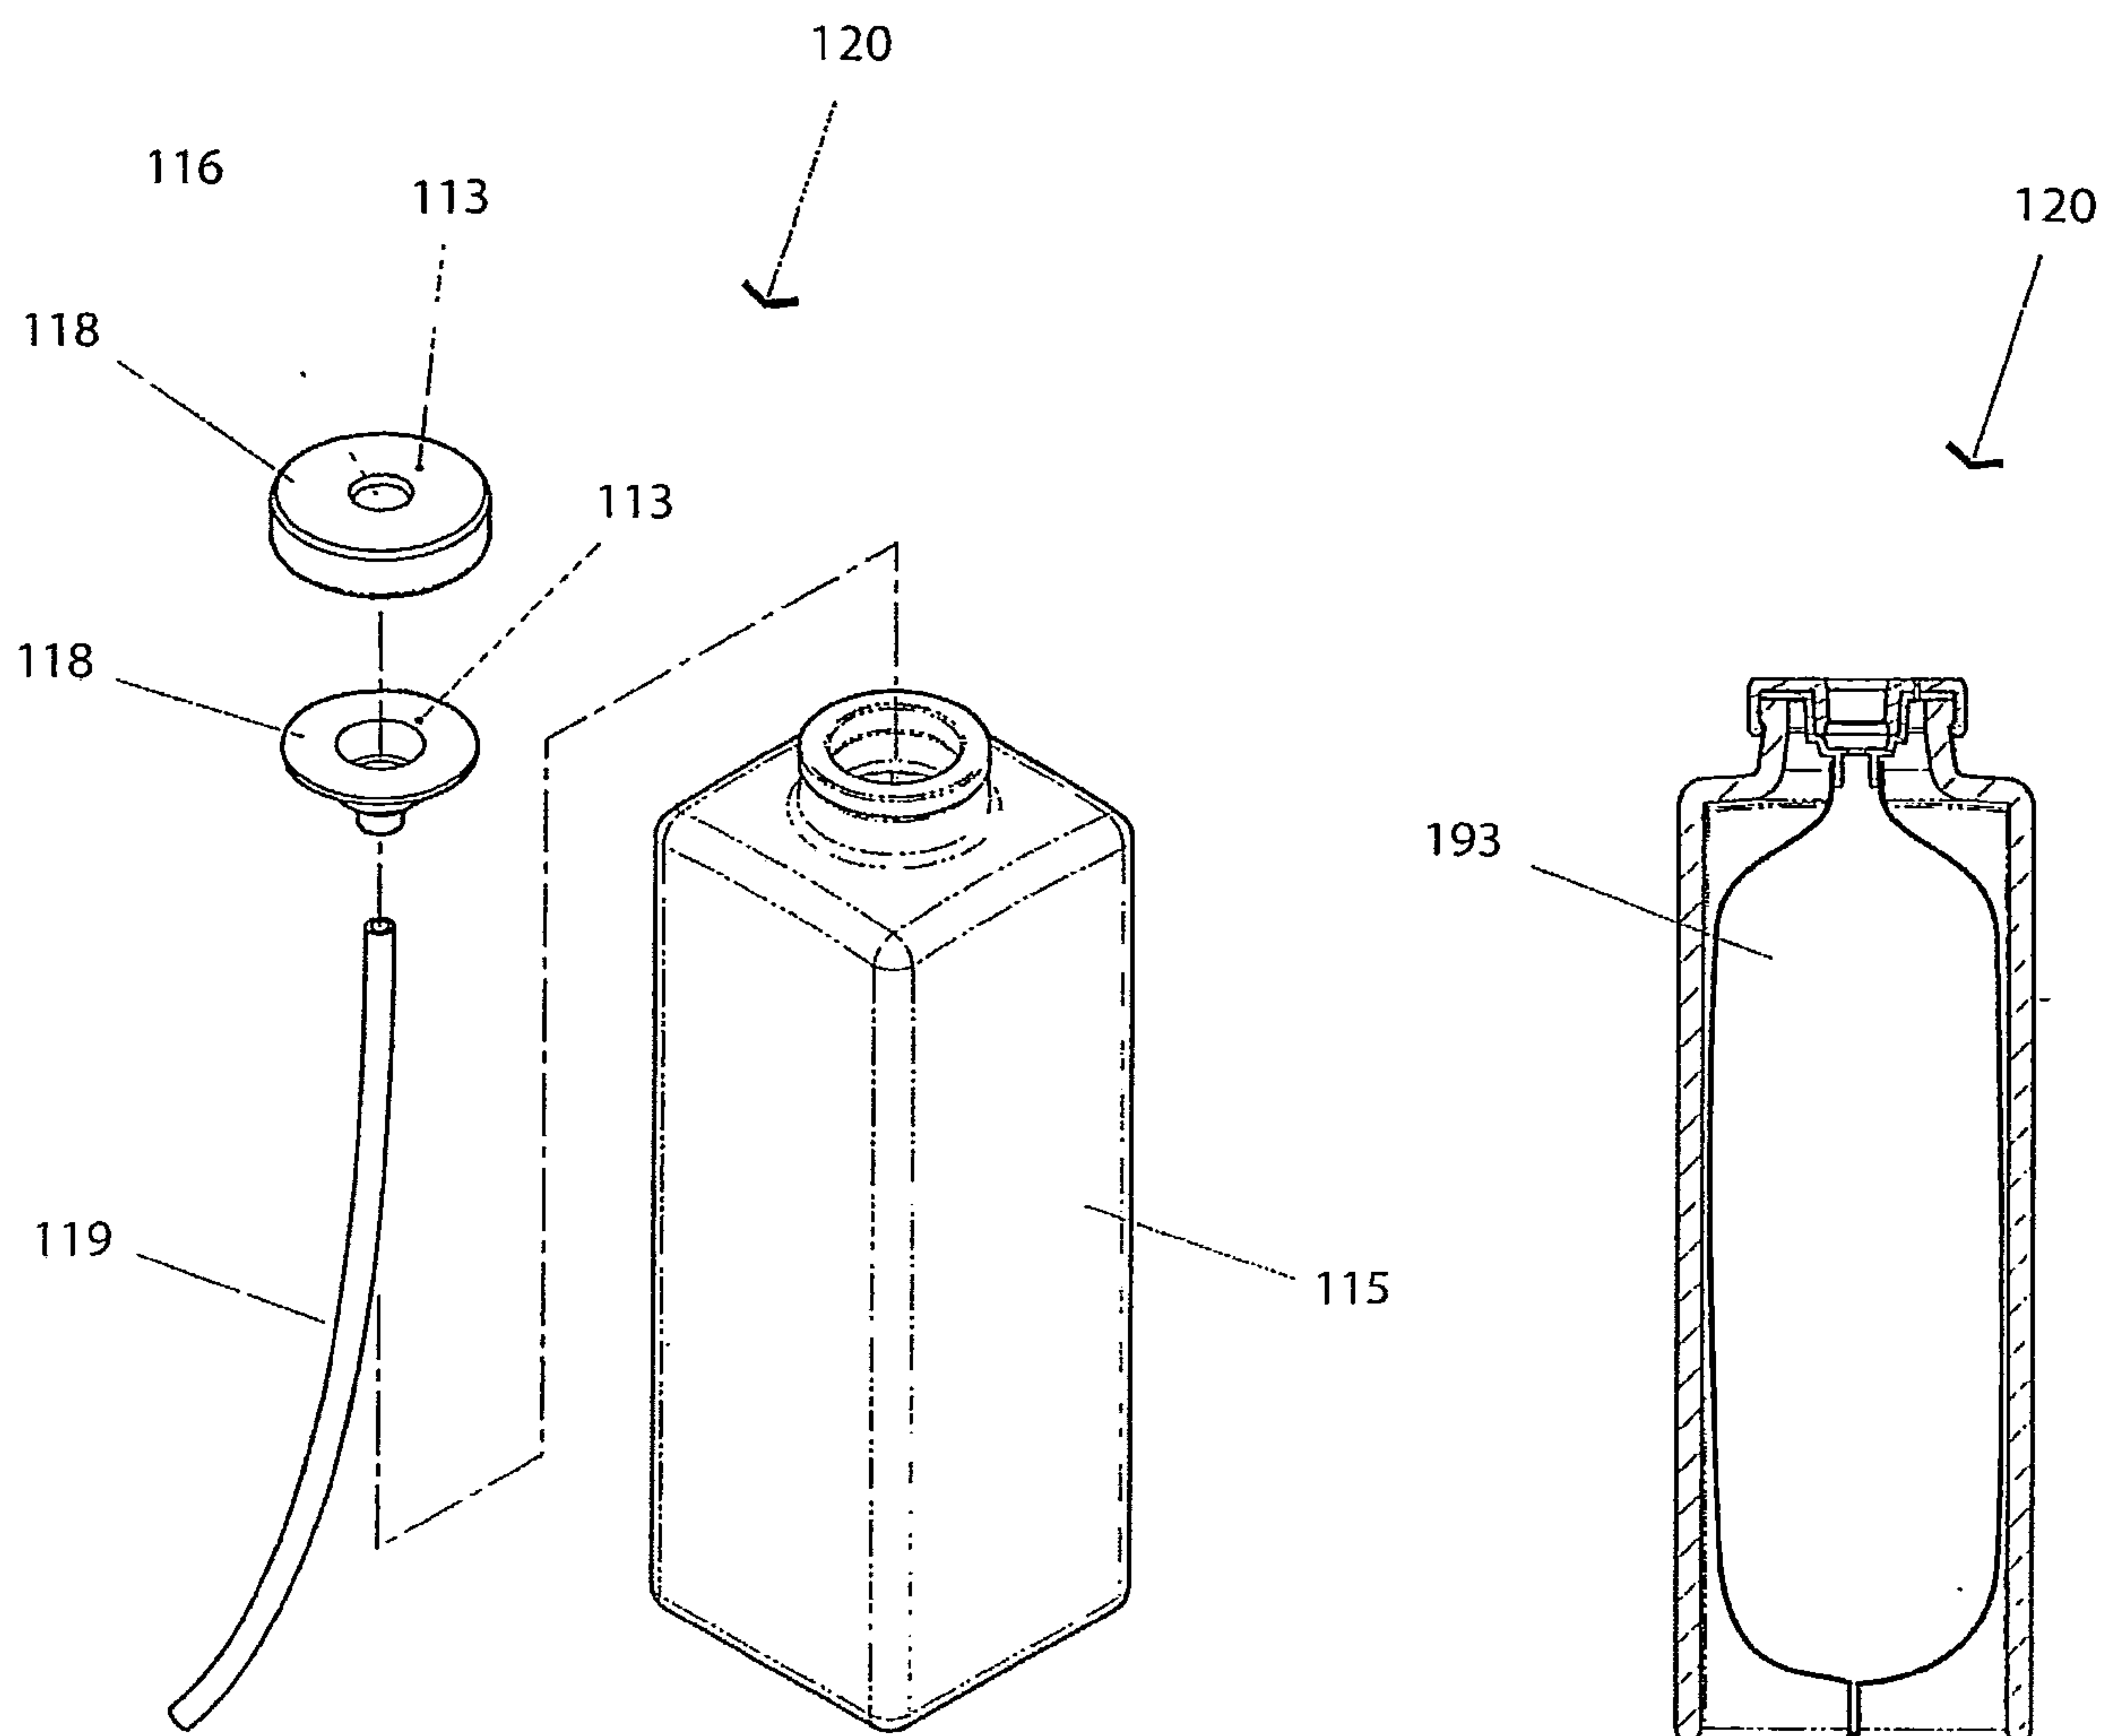


Fig. 1H

Fig. 1I

9/37

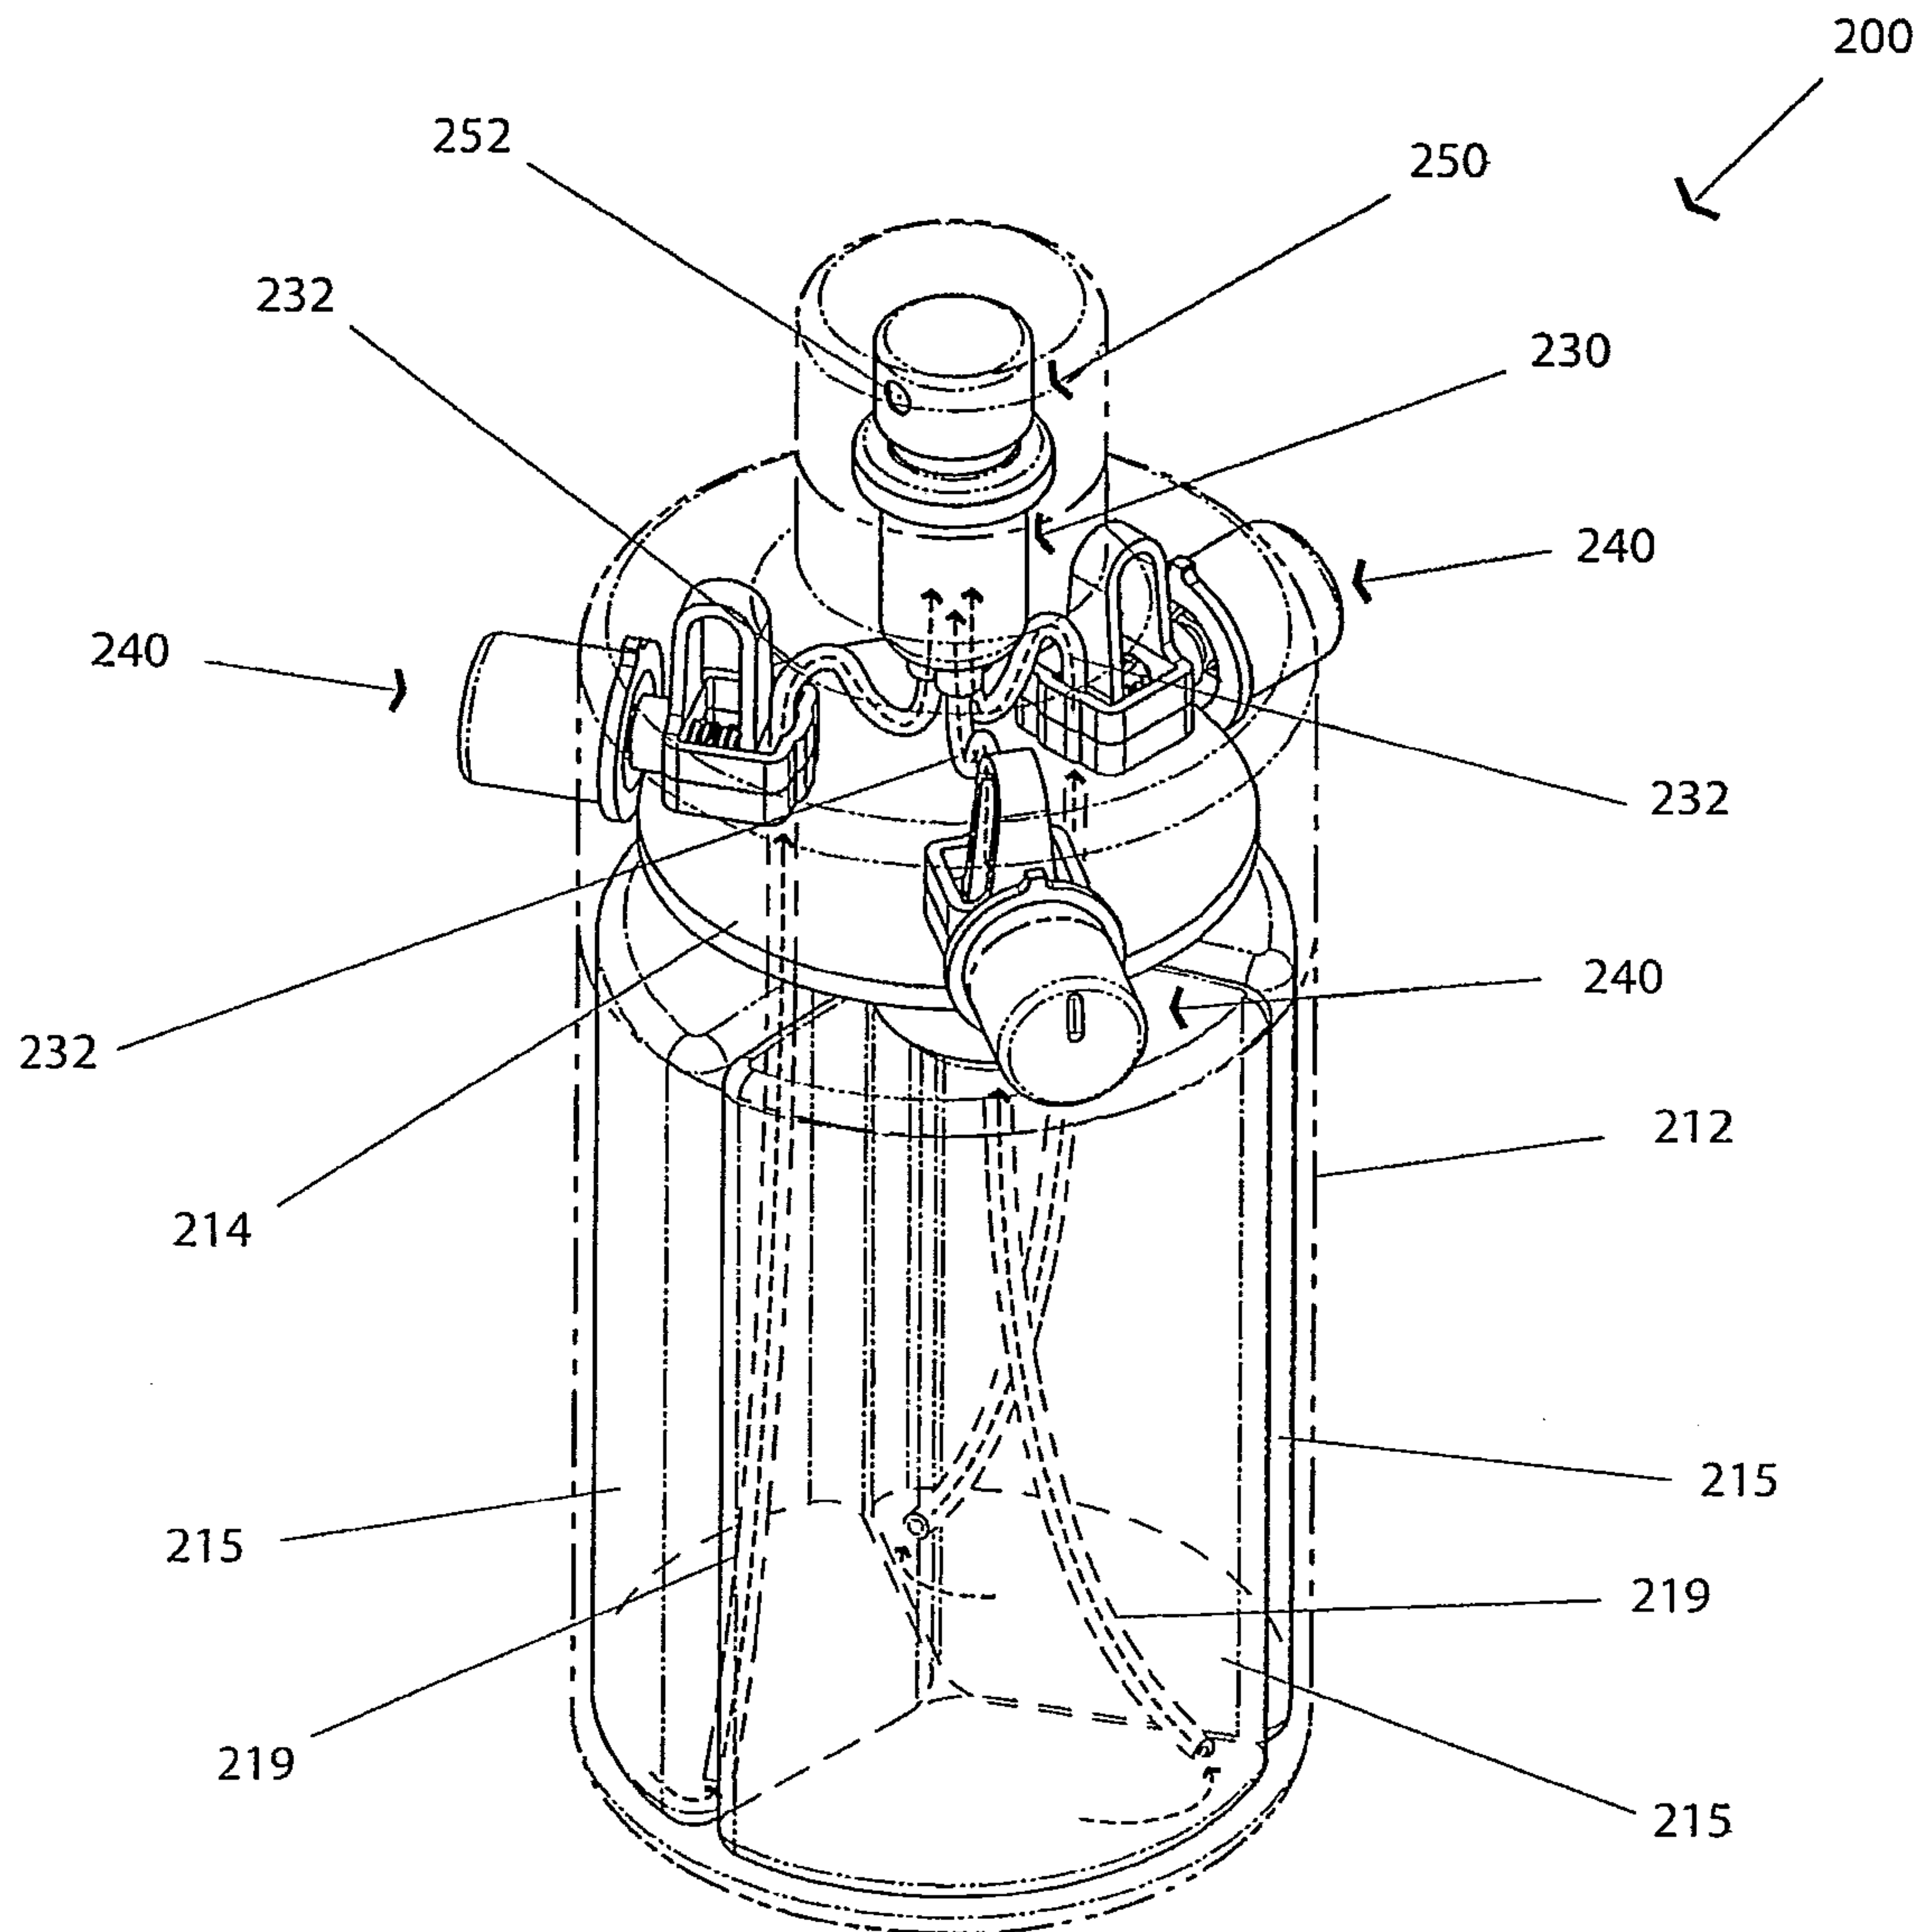


Fig. 2A

10/37

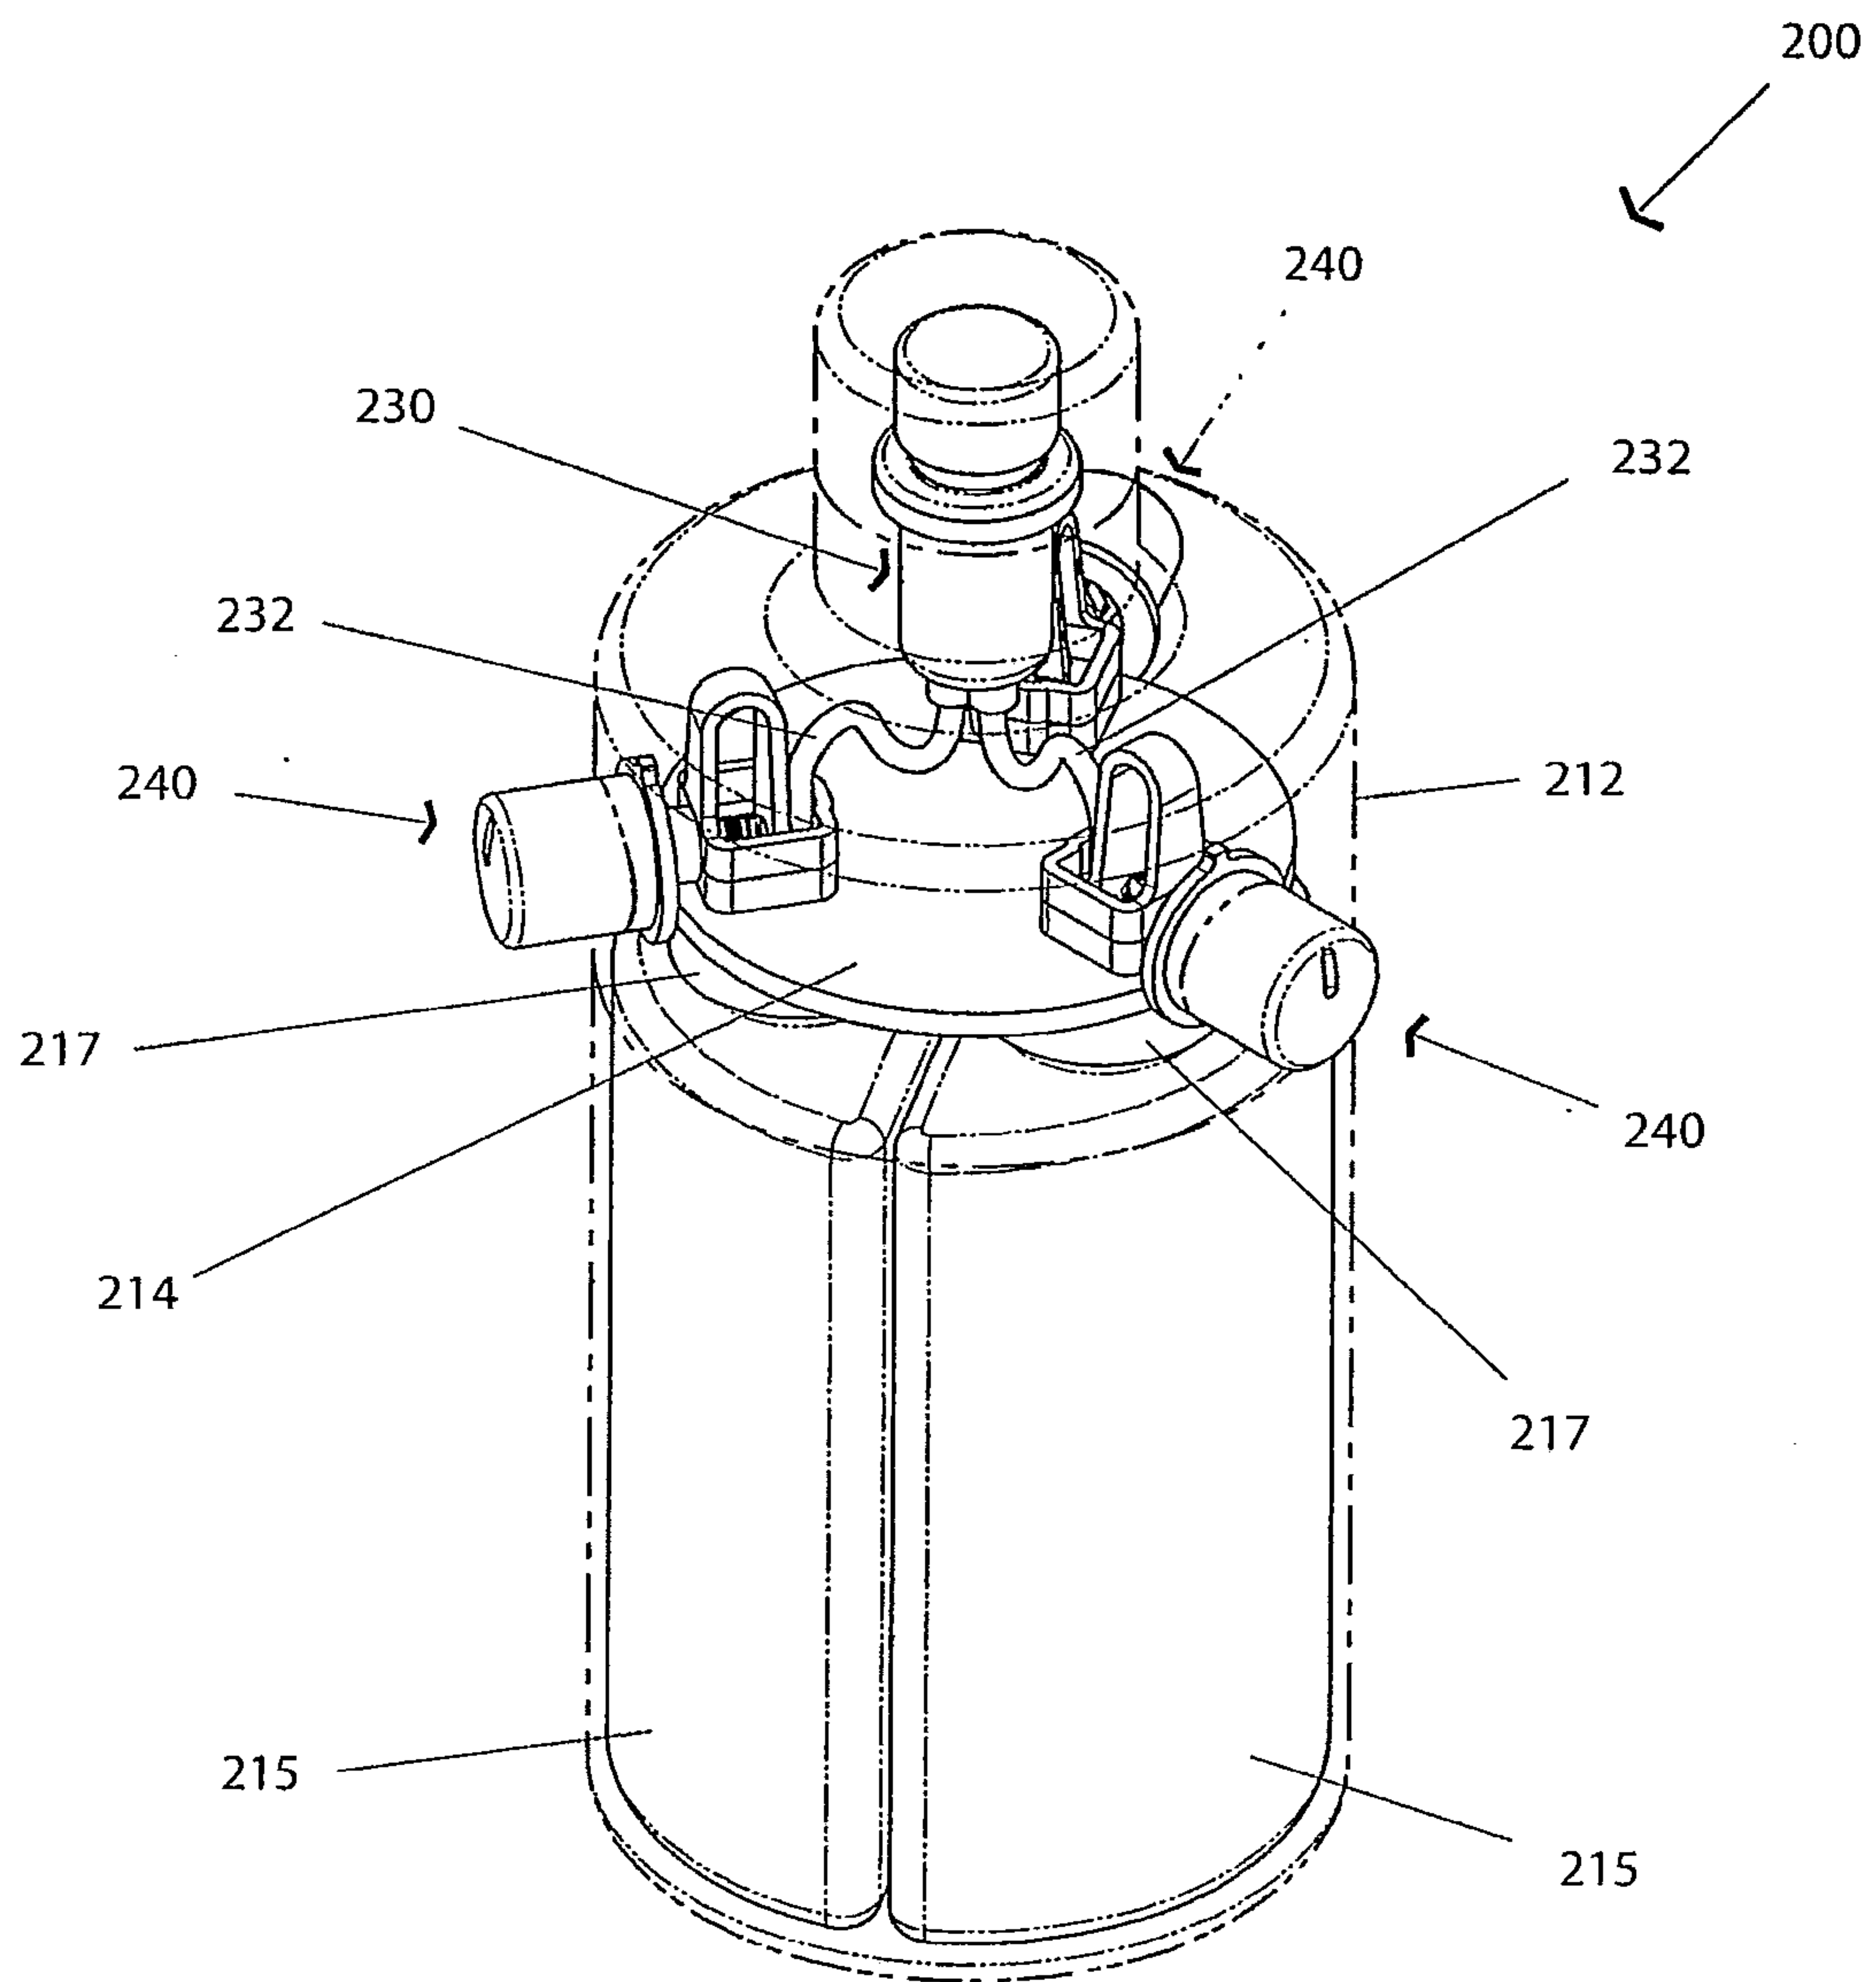


Fig. 2B

11/37

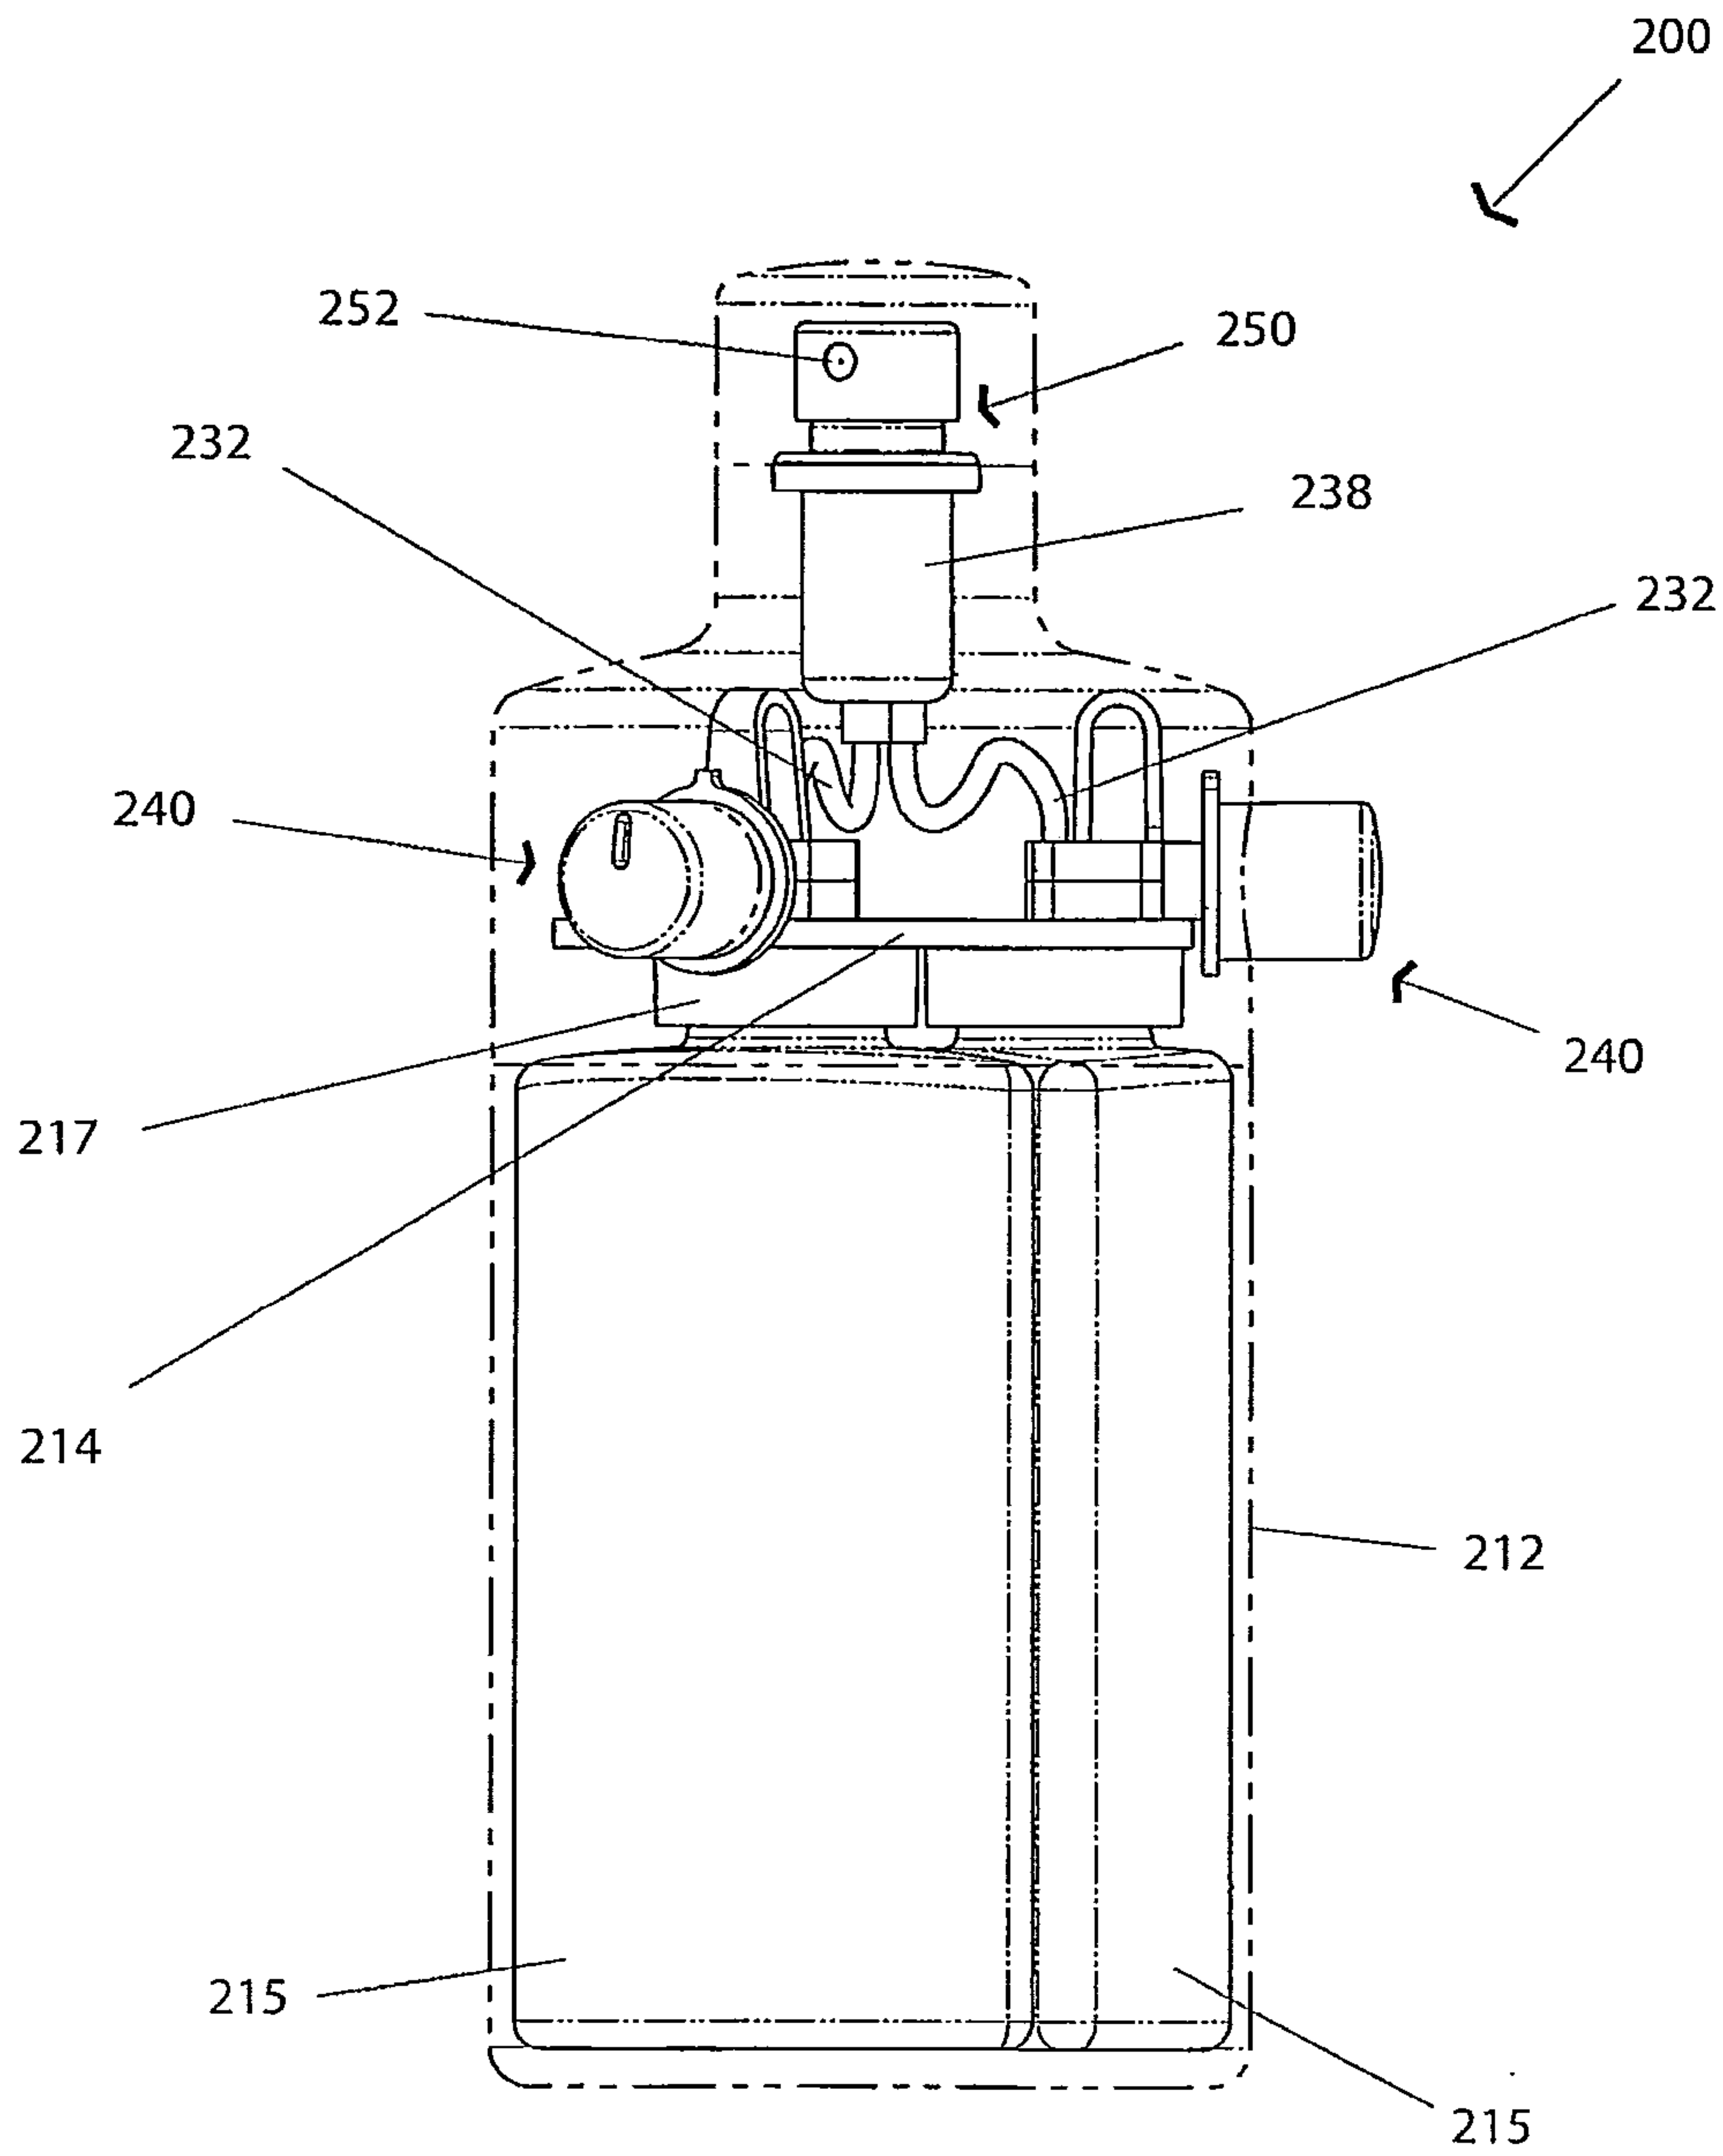


Fig. 2C

12/37


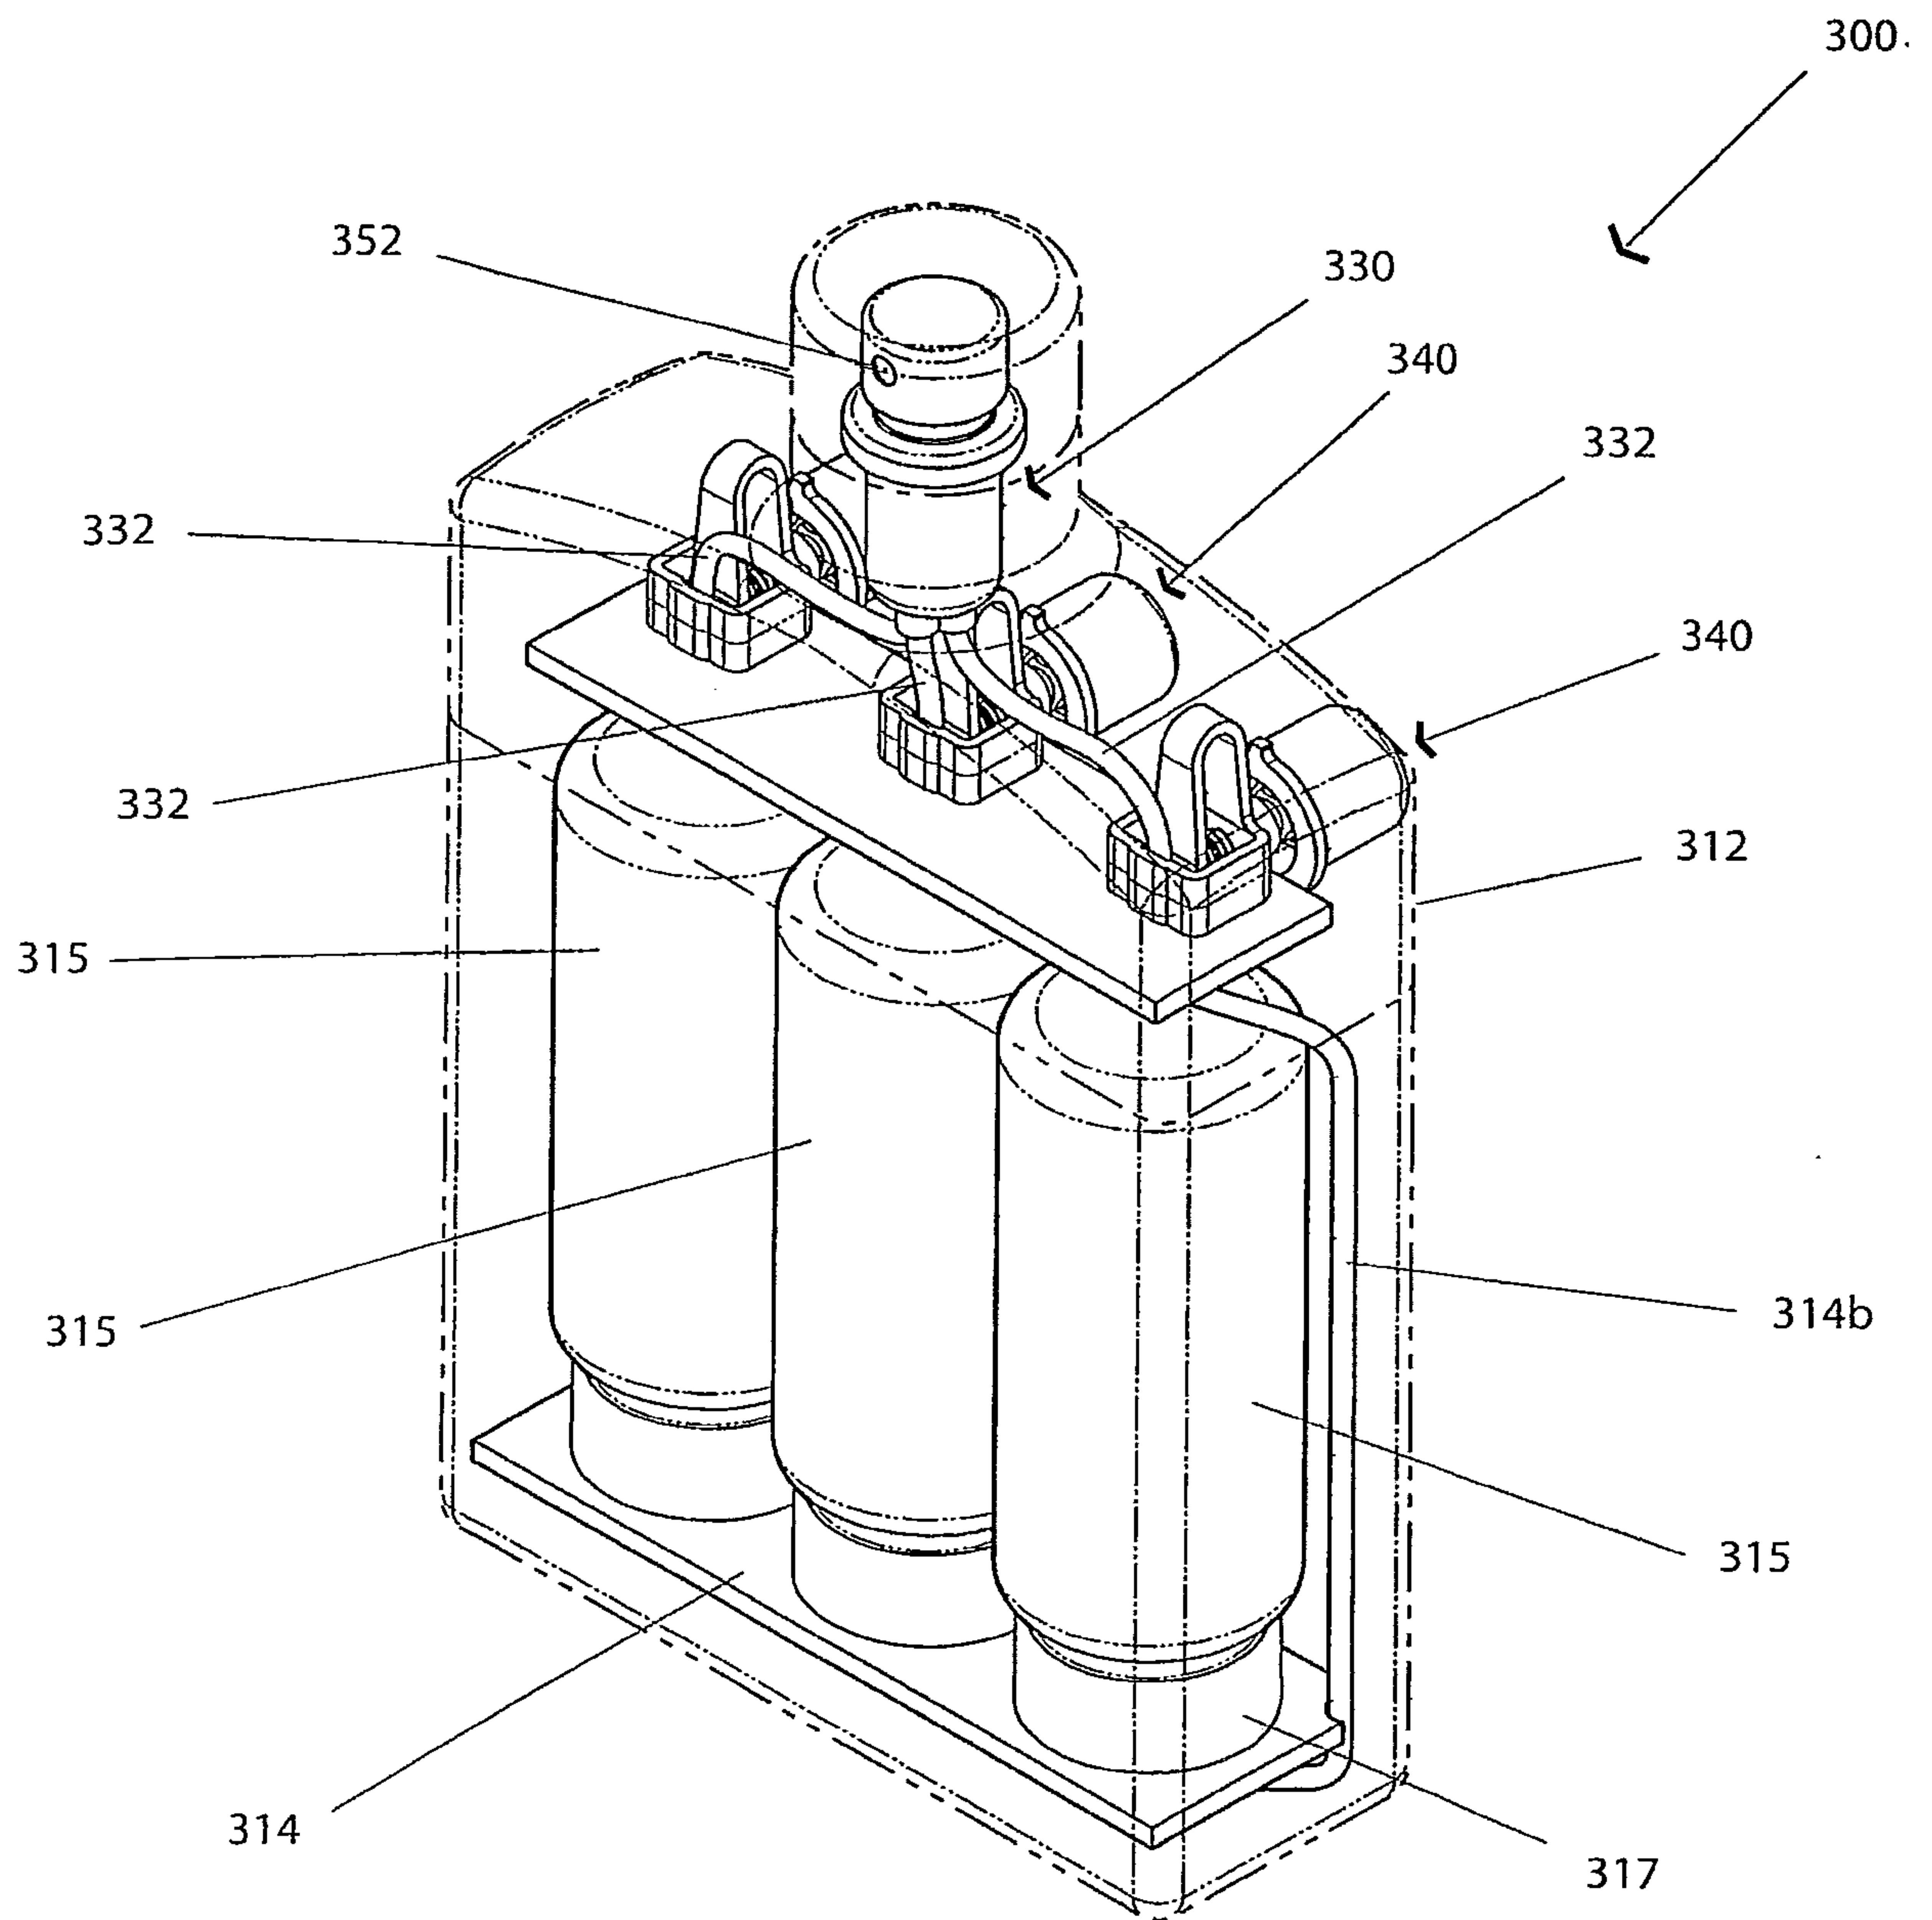


Fig. 3A

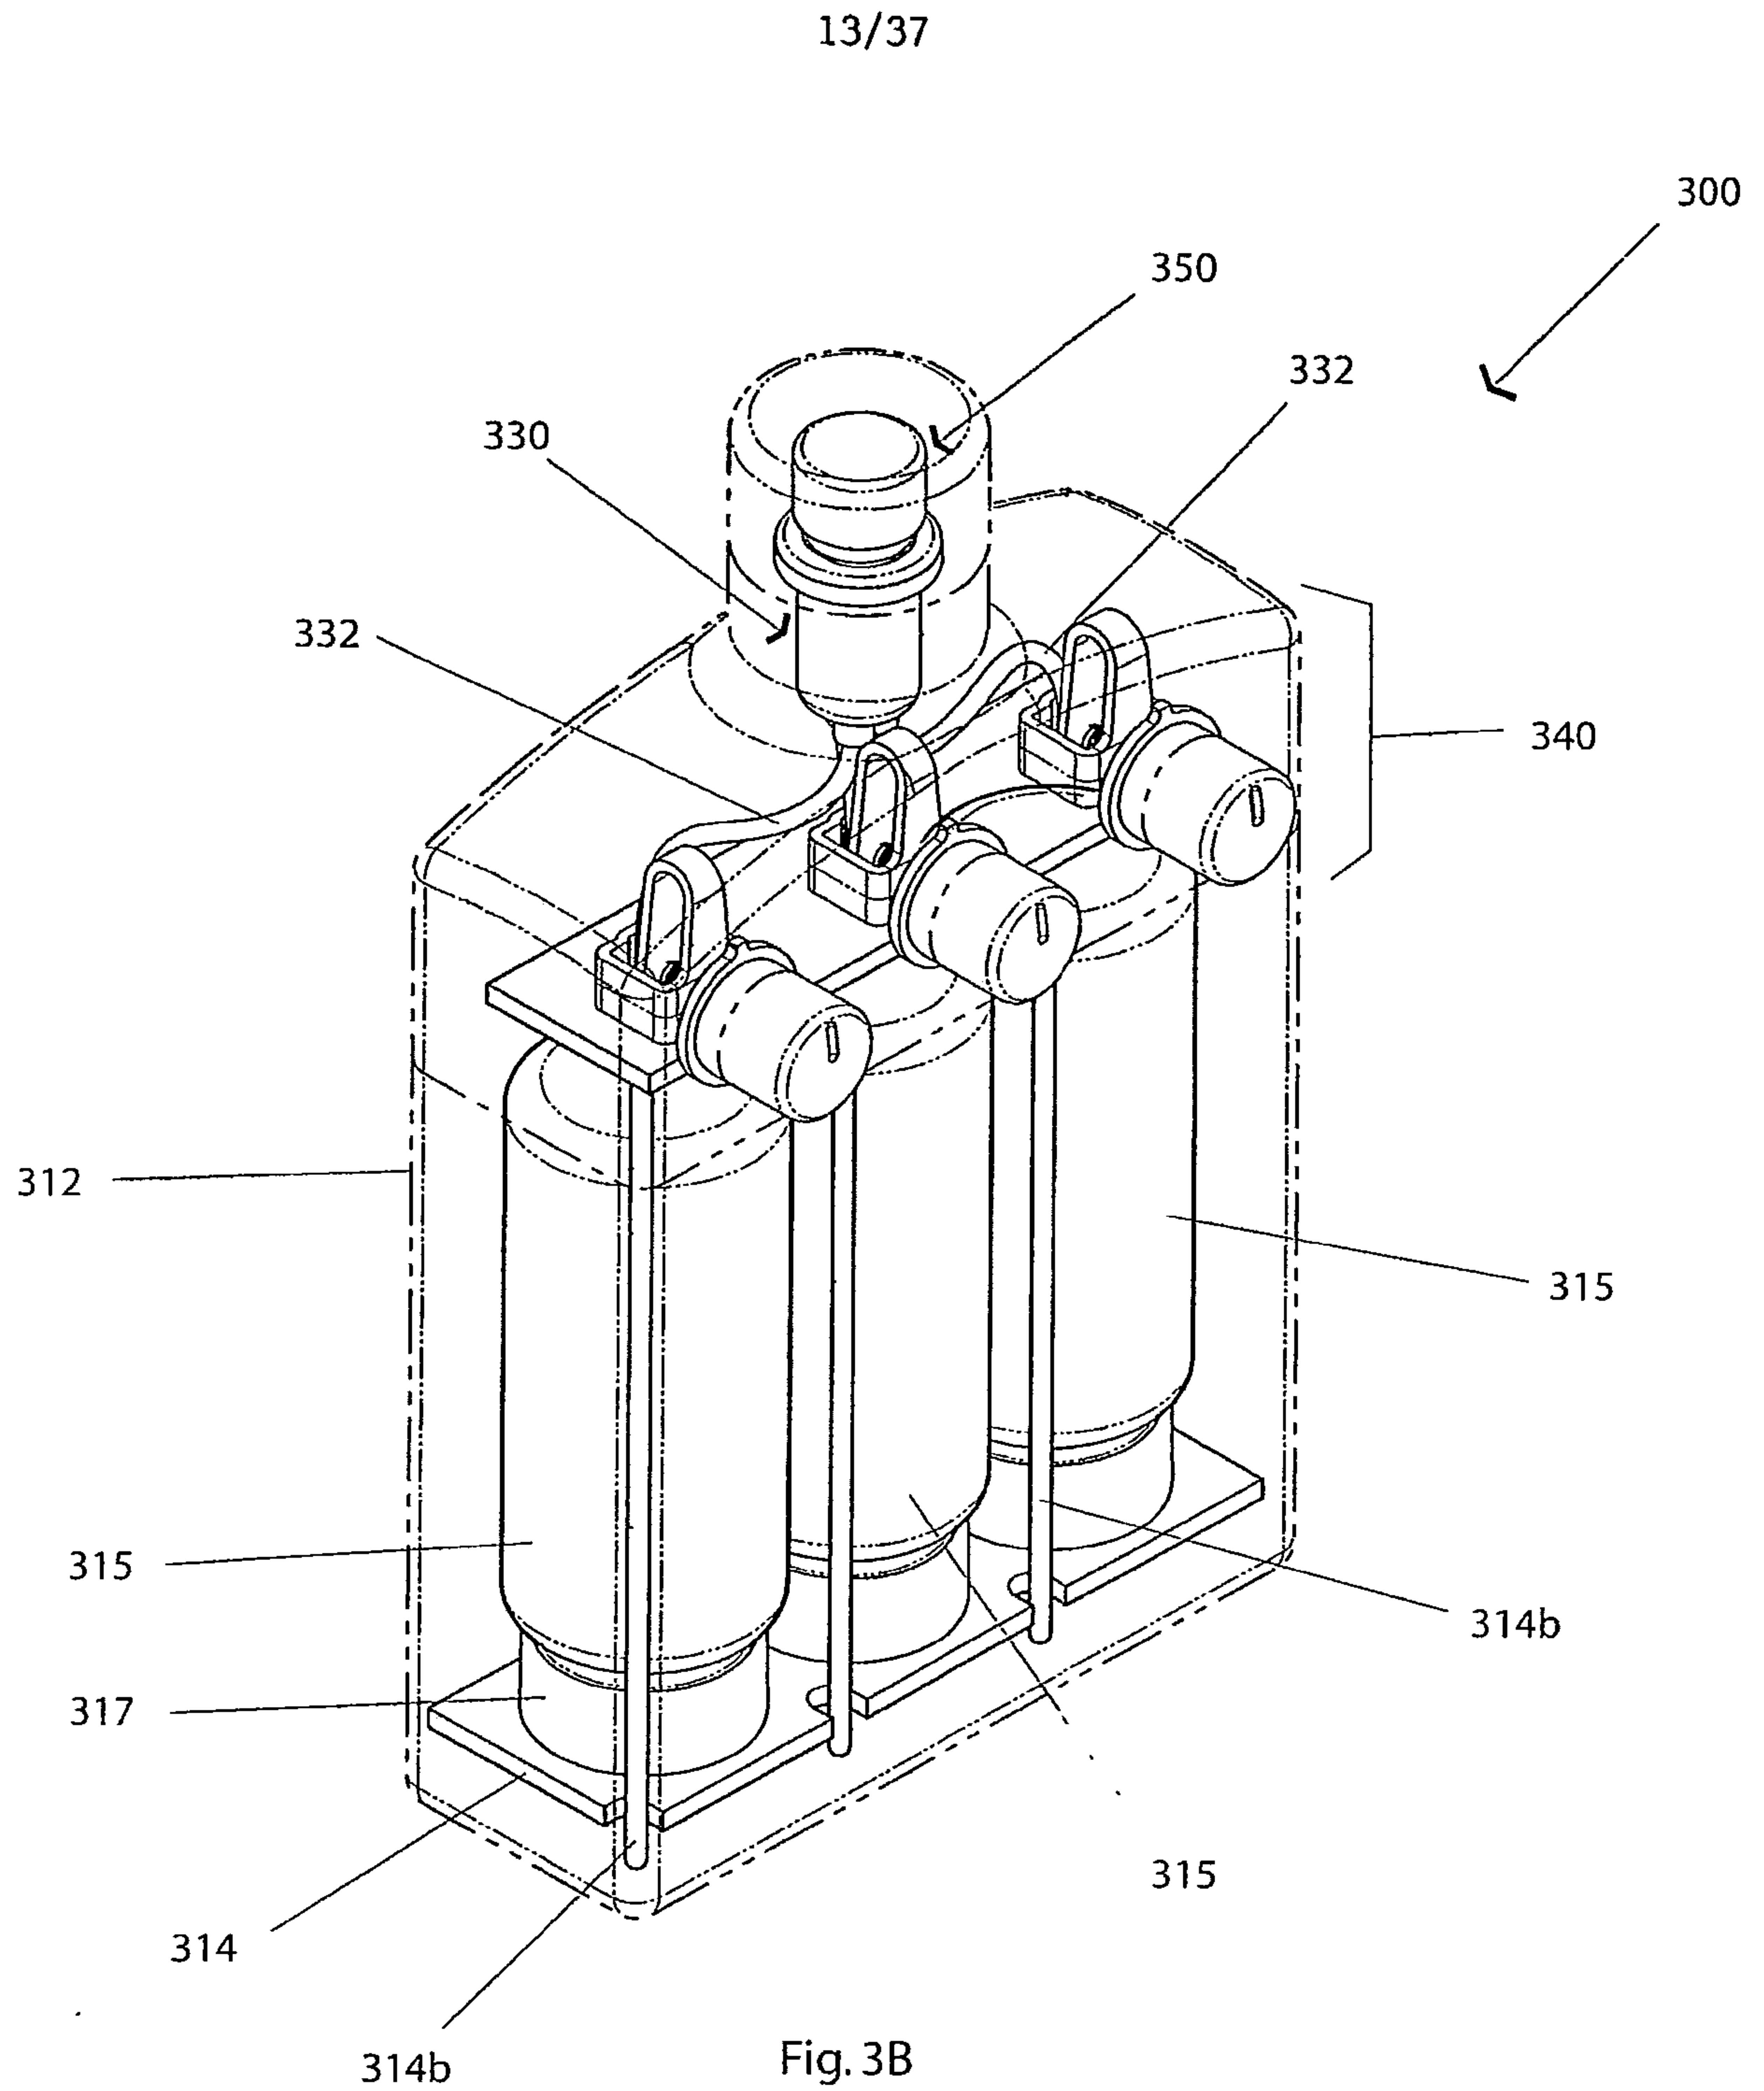

14/37

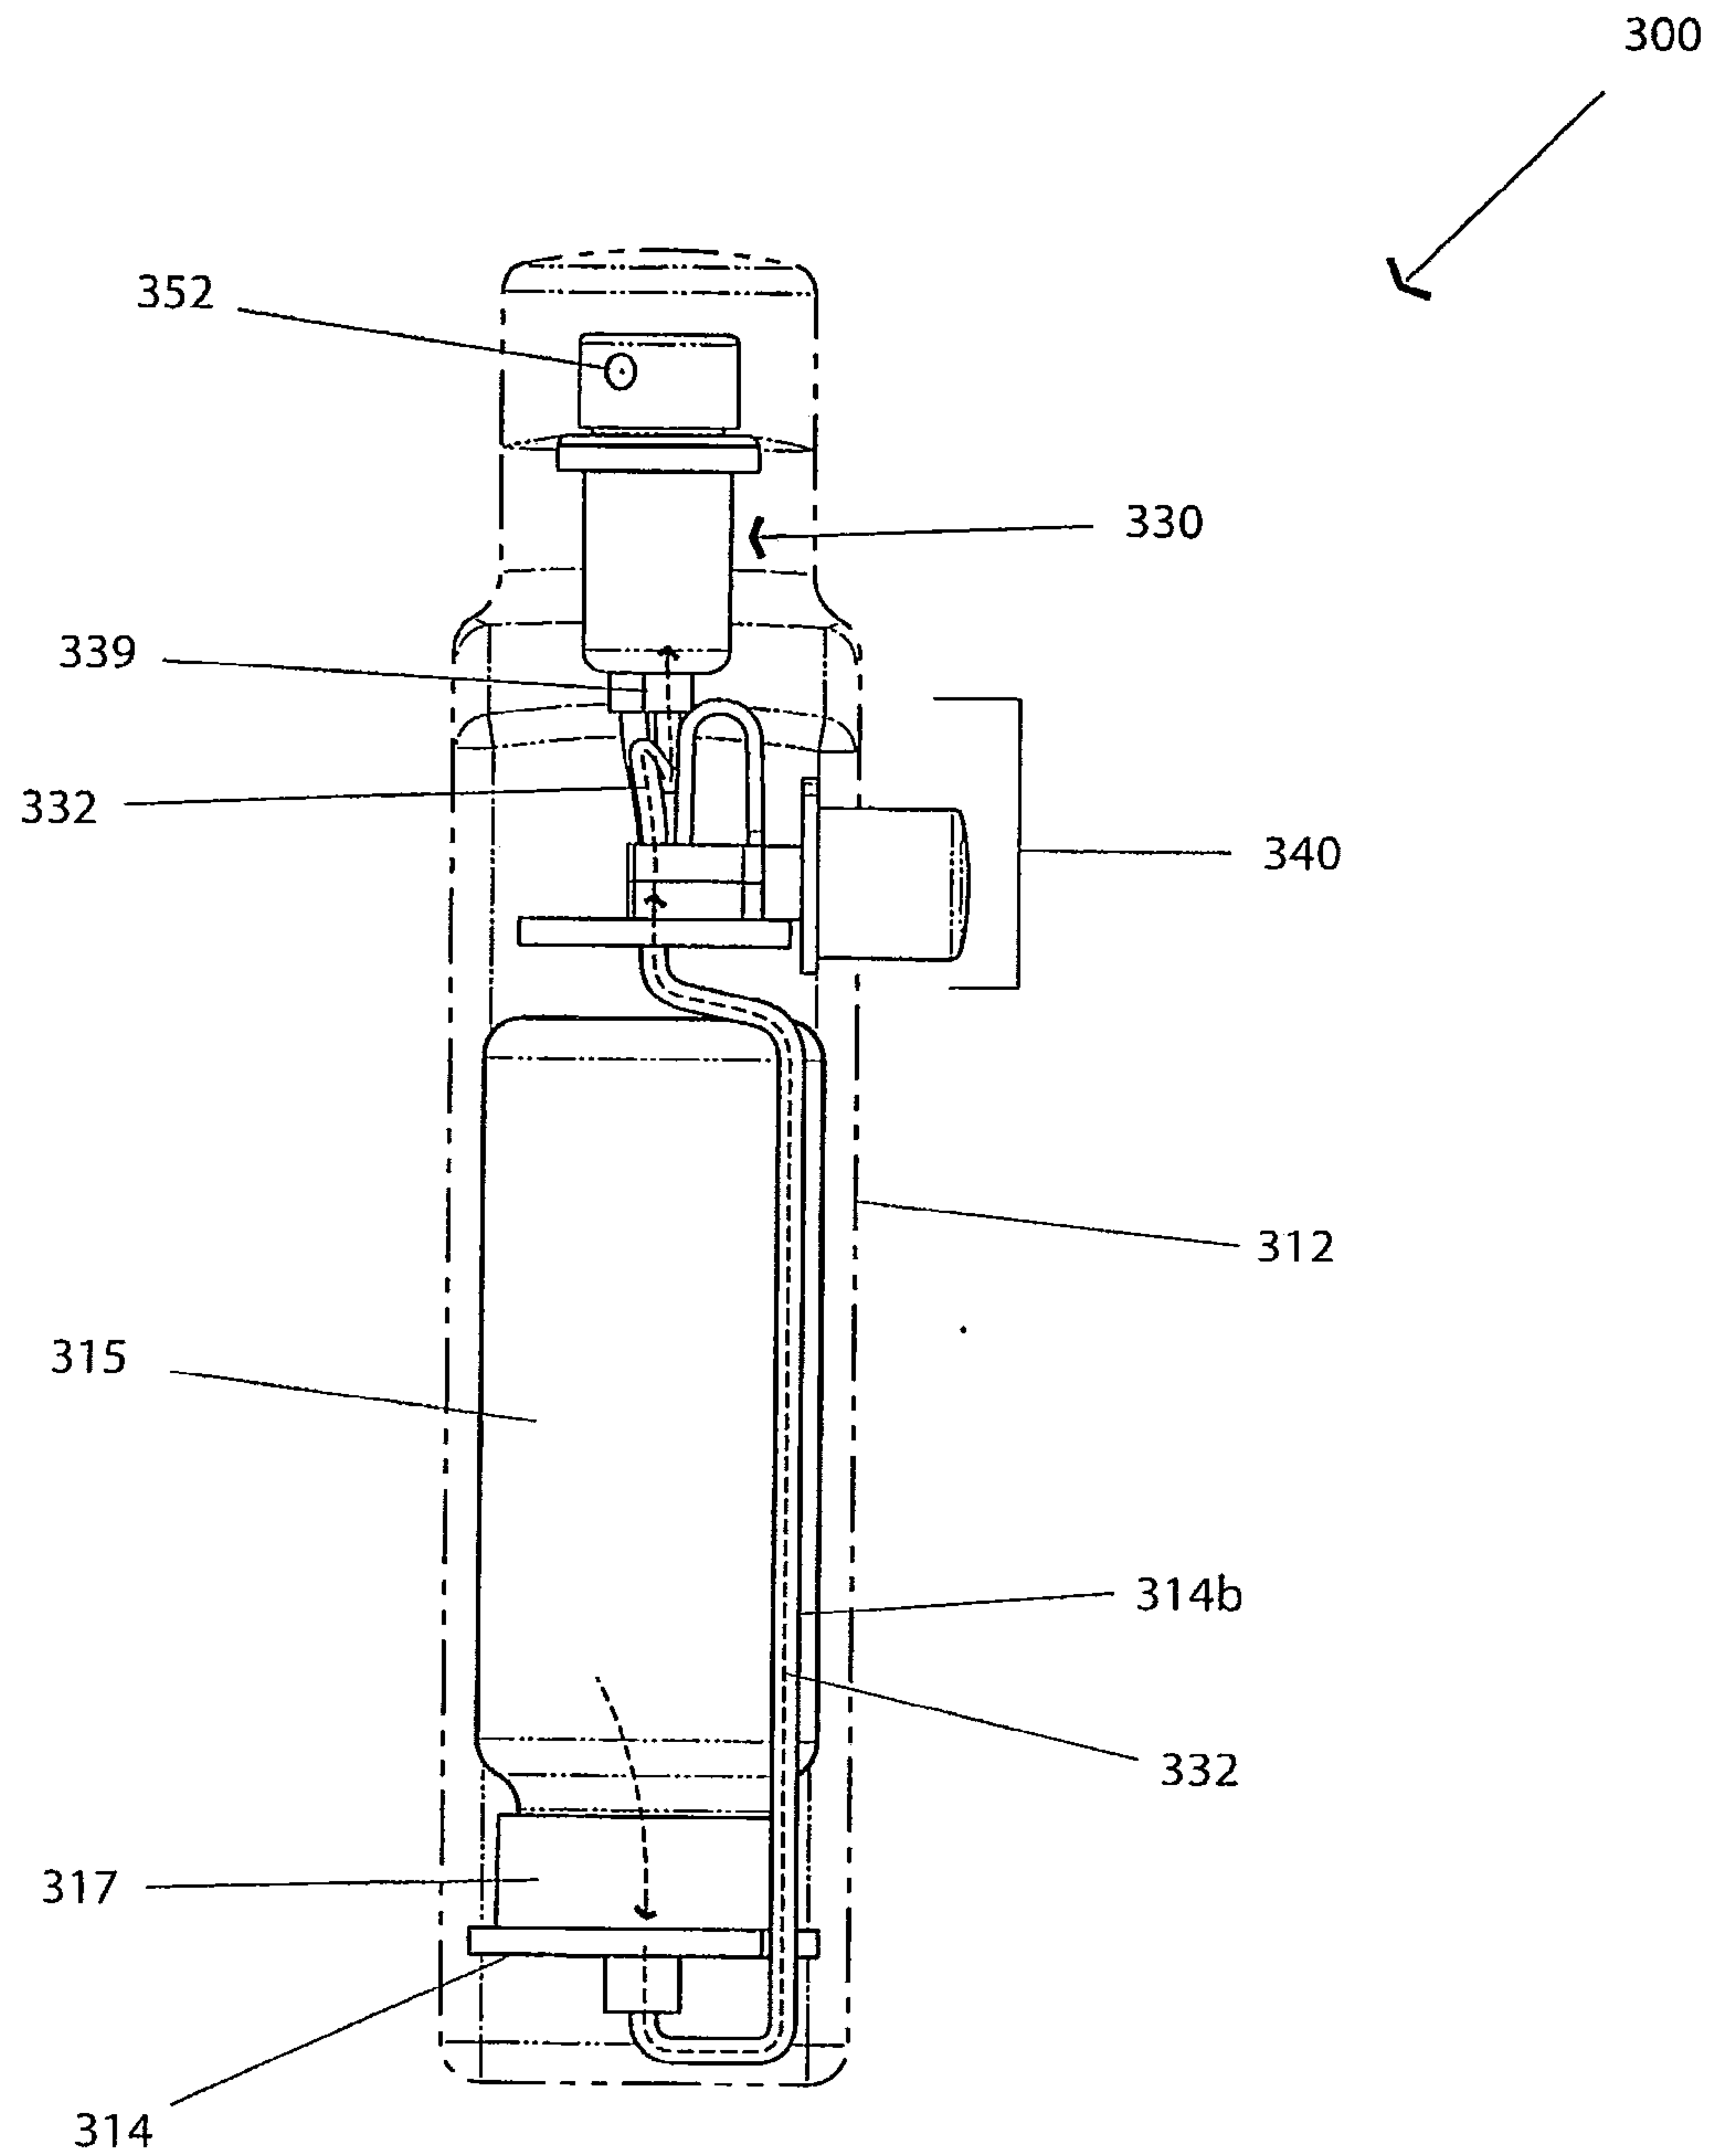


Fig. 3C

15/37


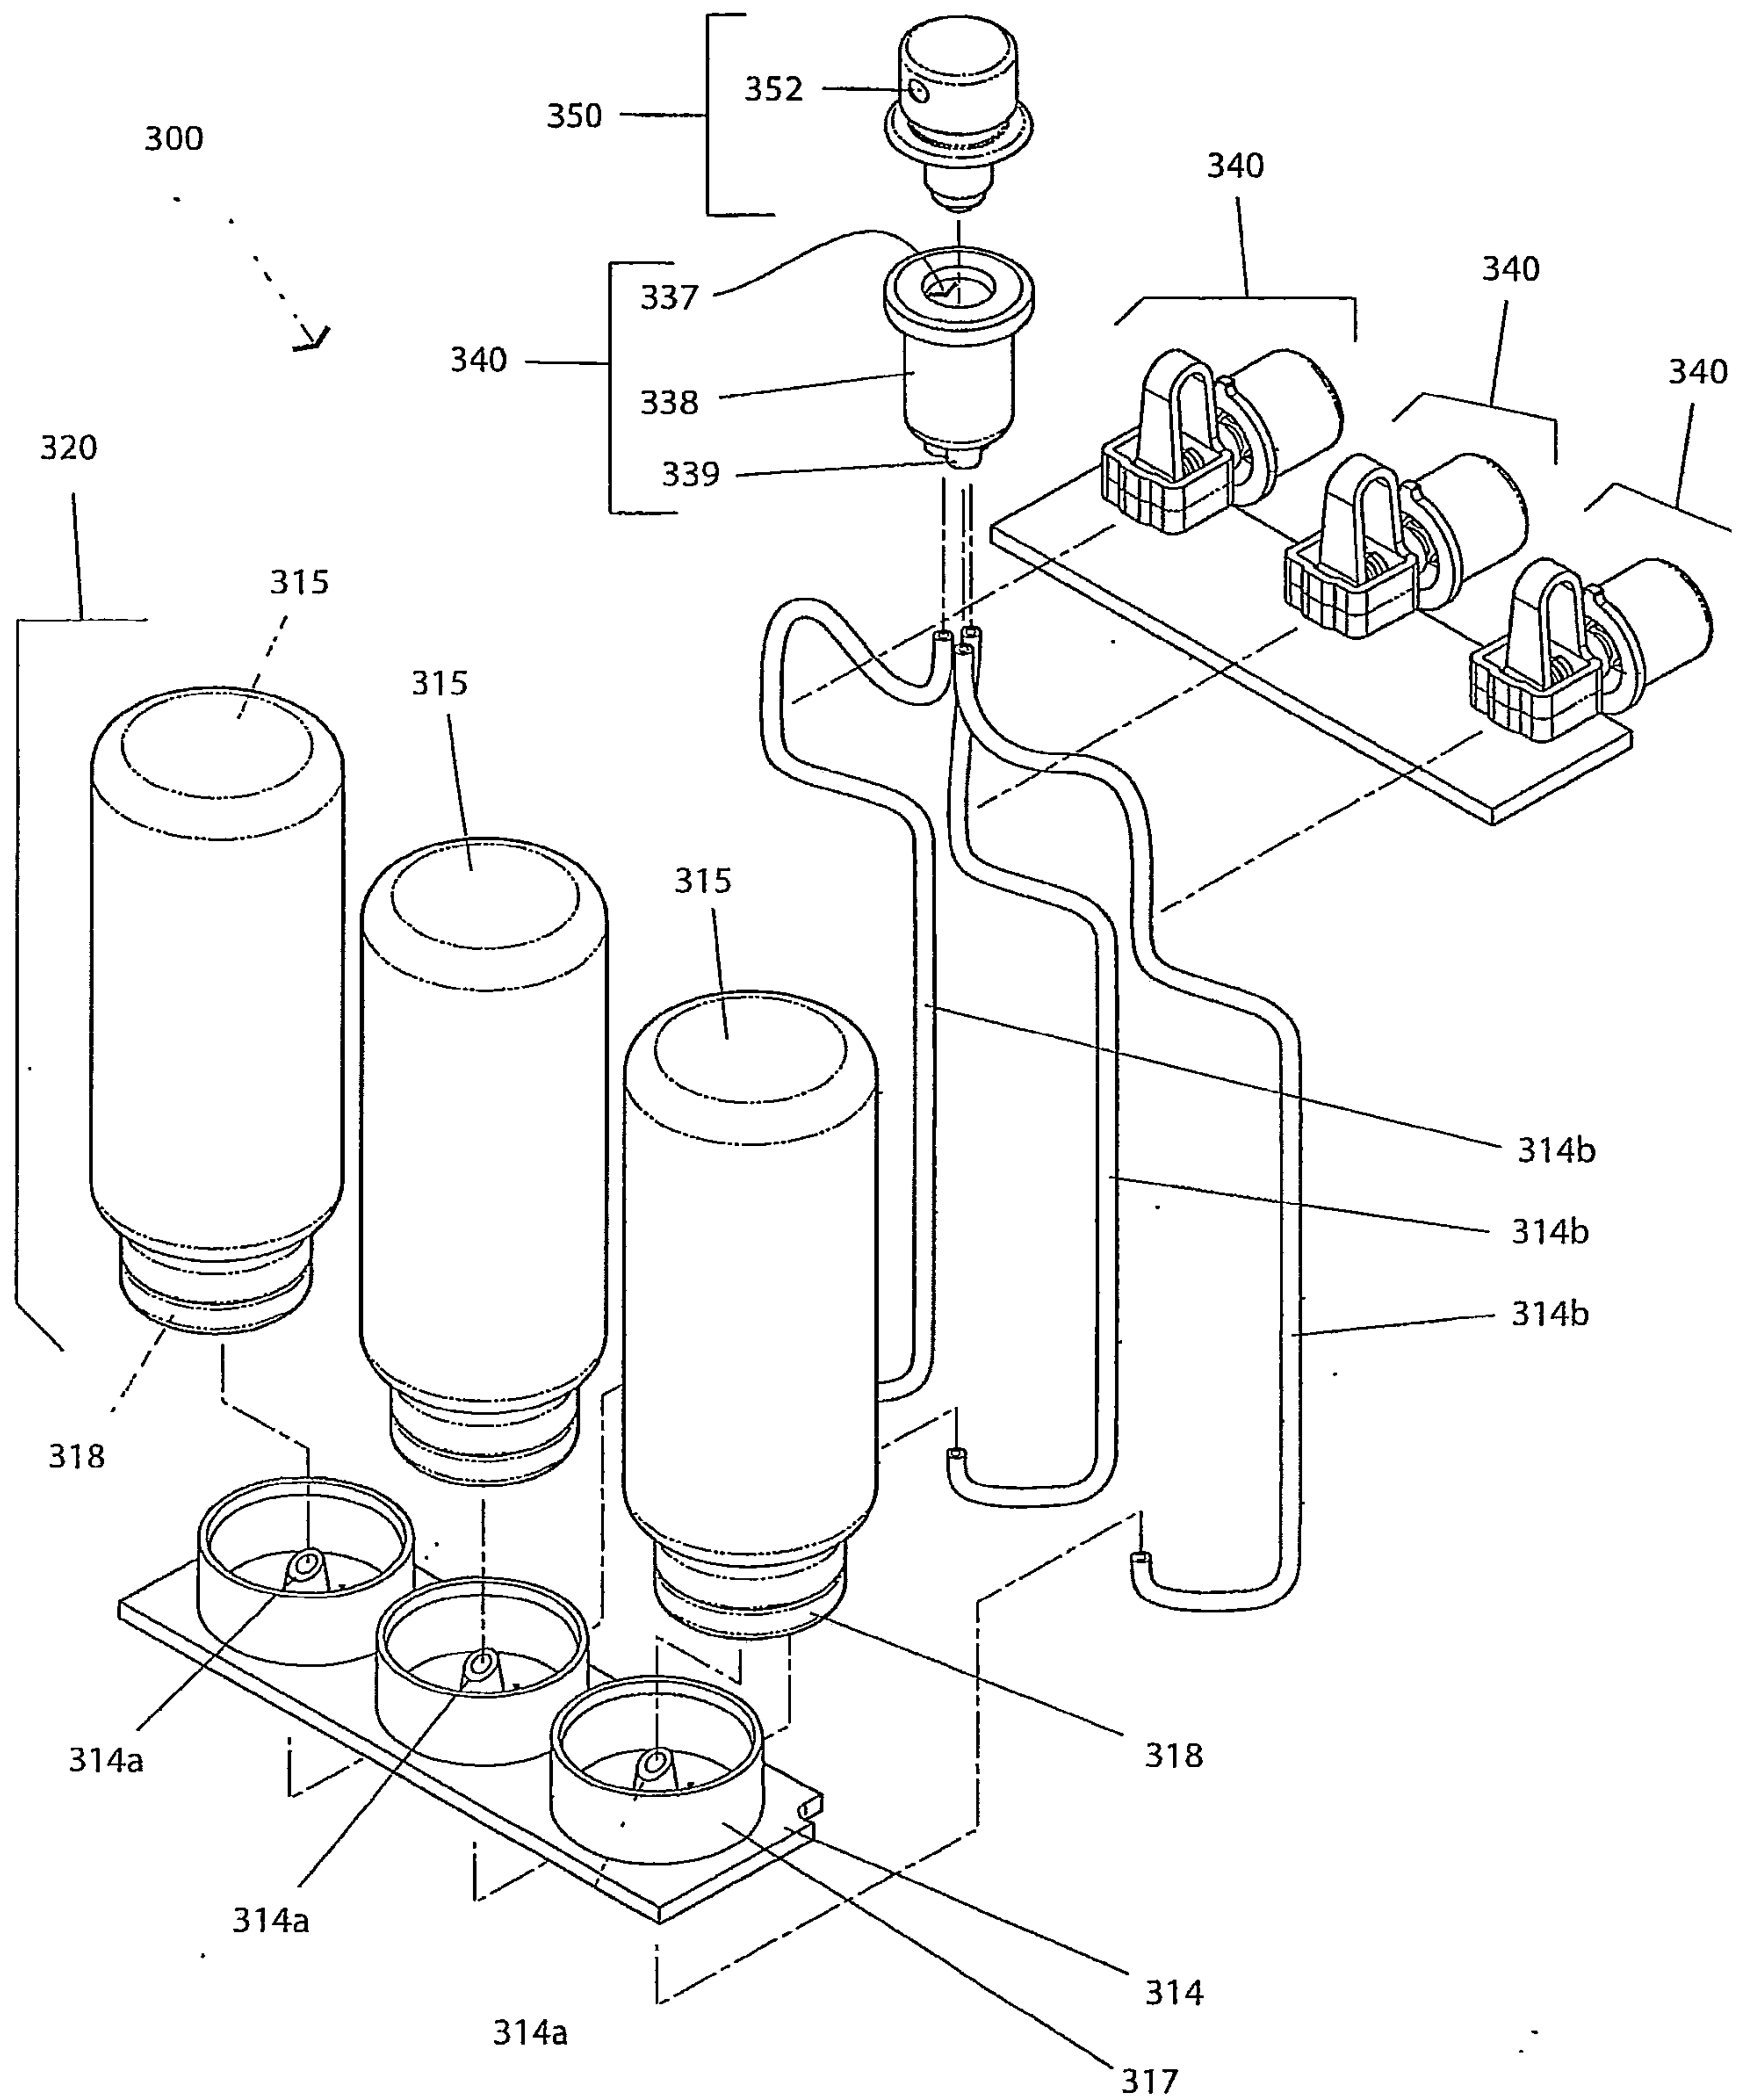


Fig. 3D

16/37

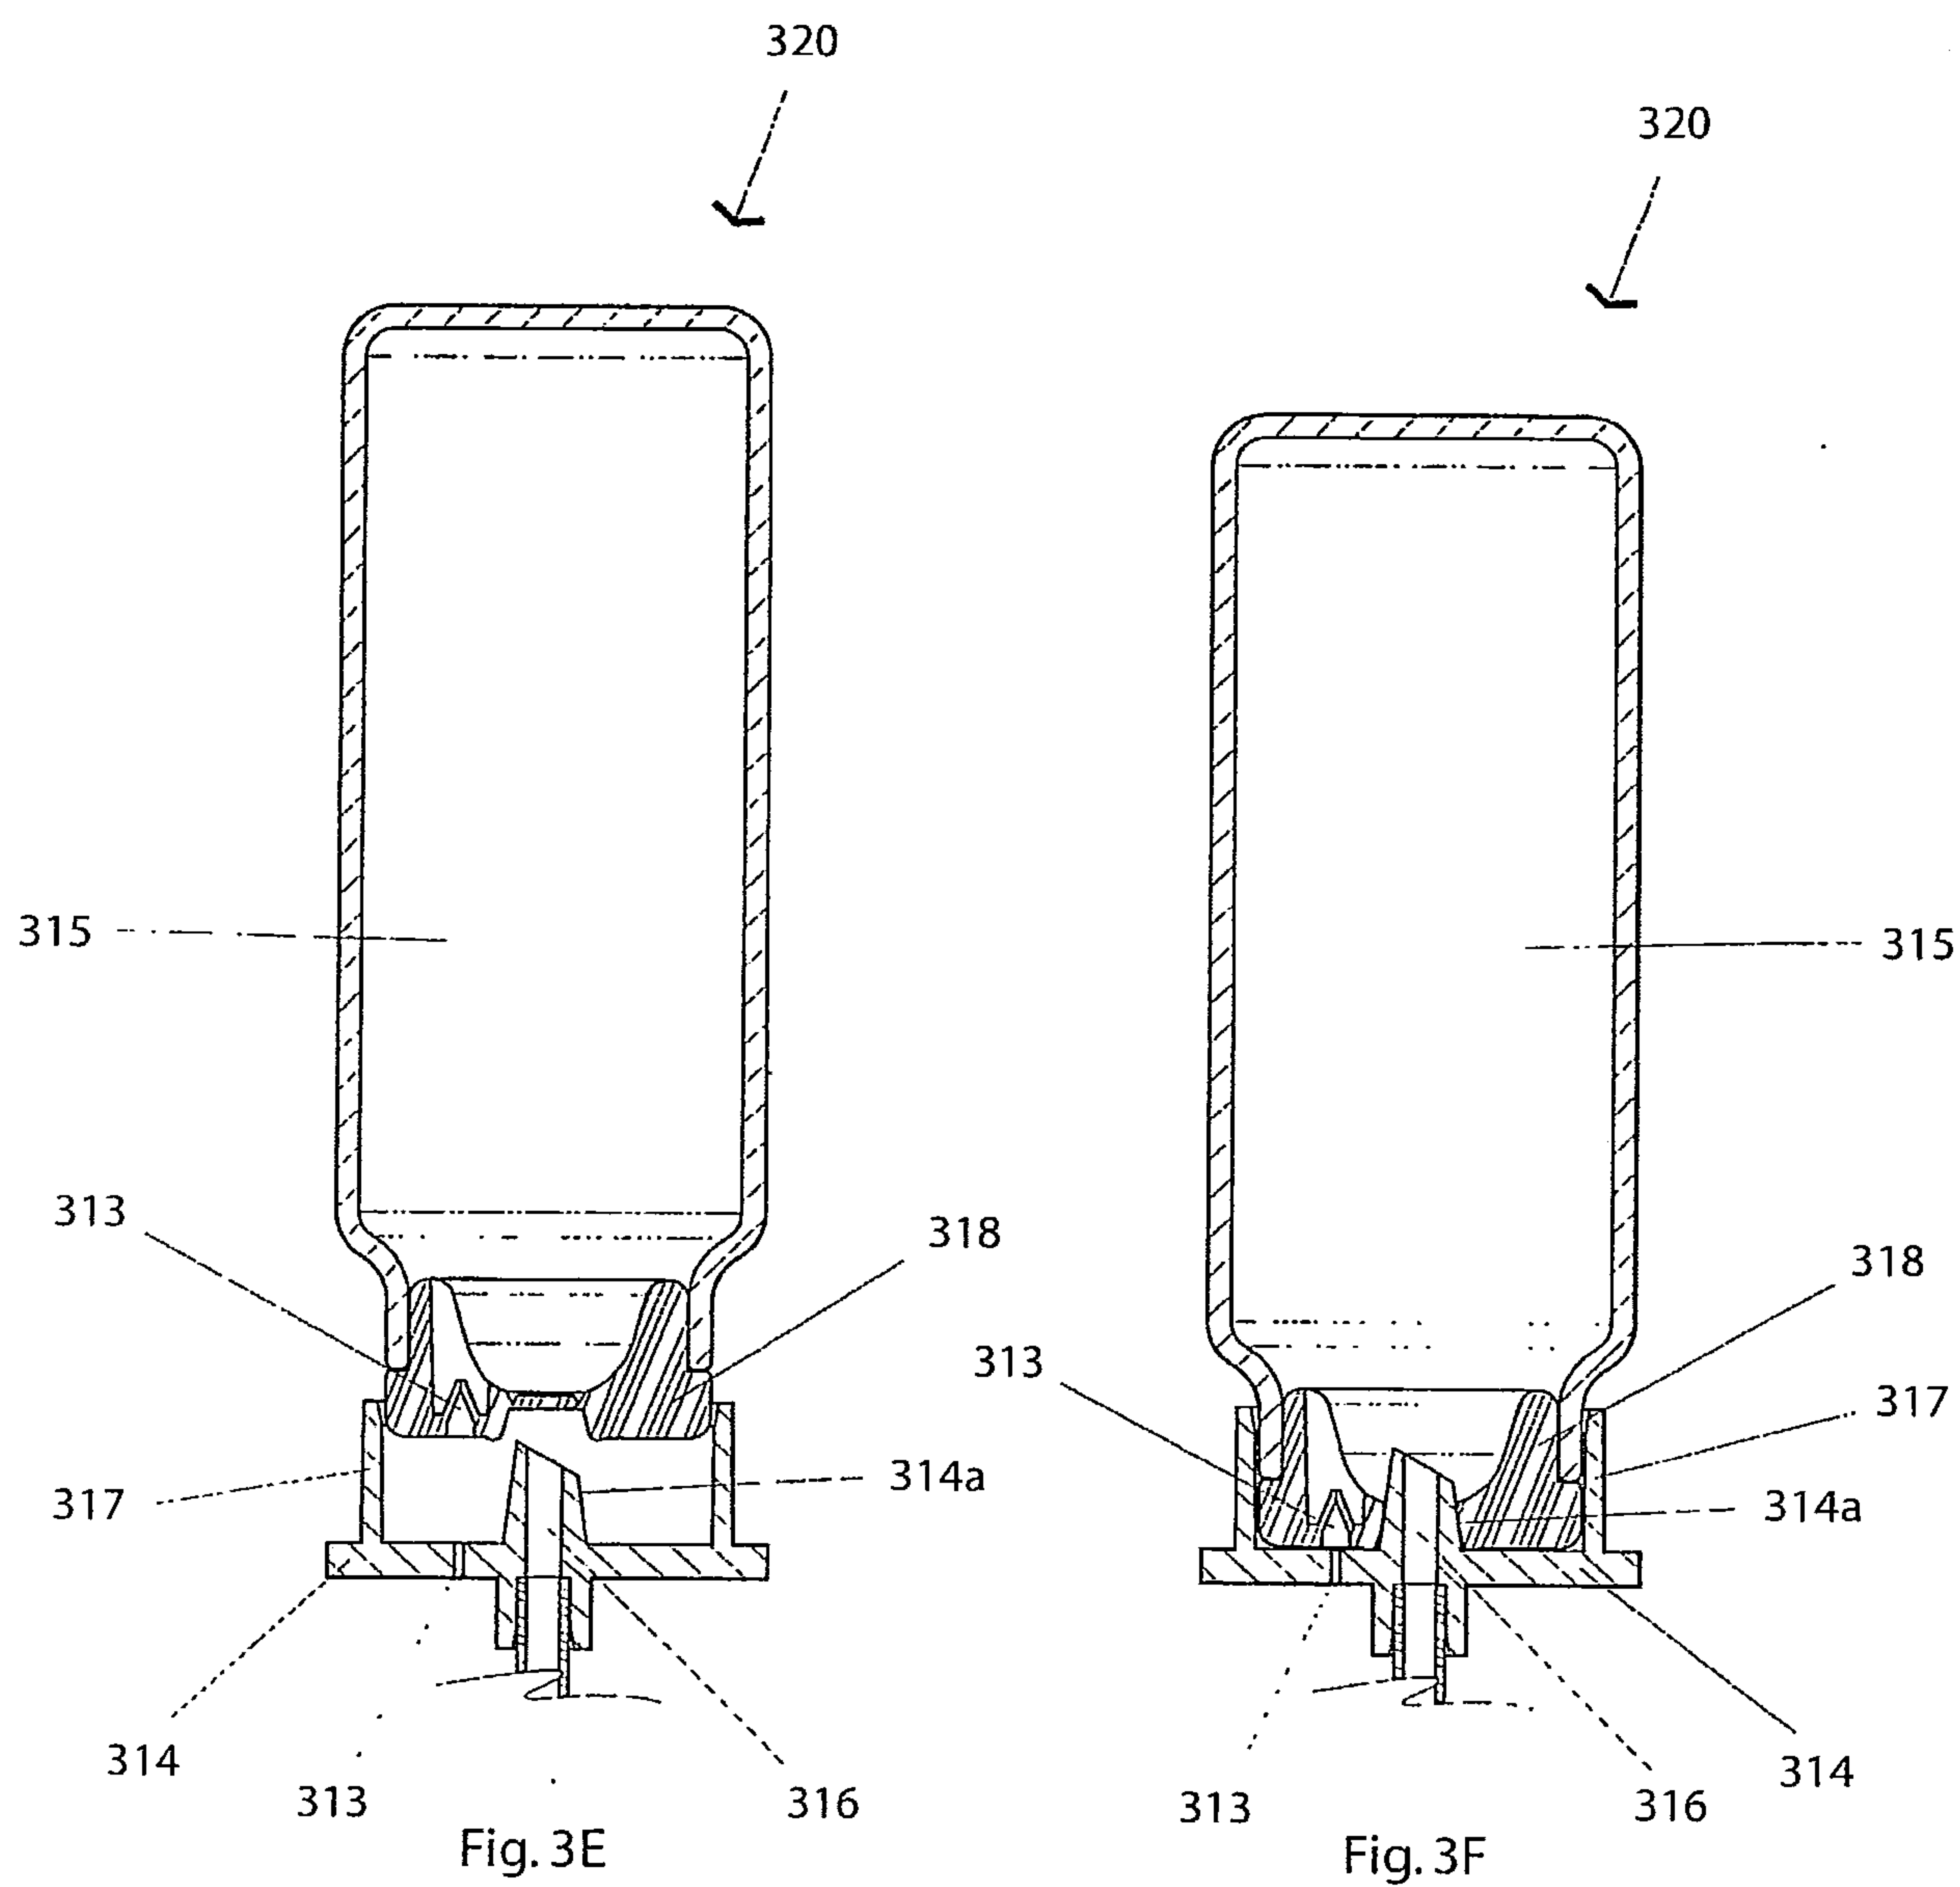

17/37

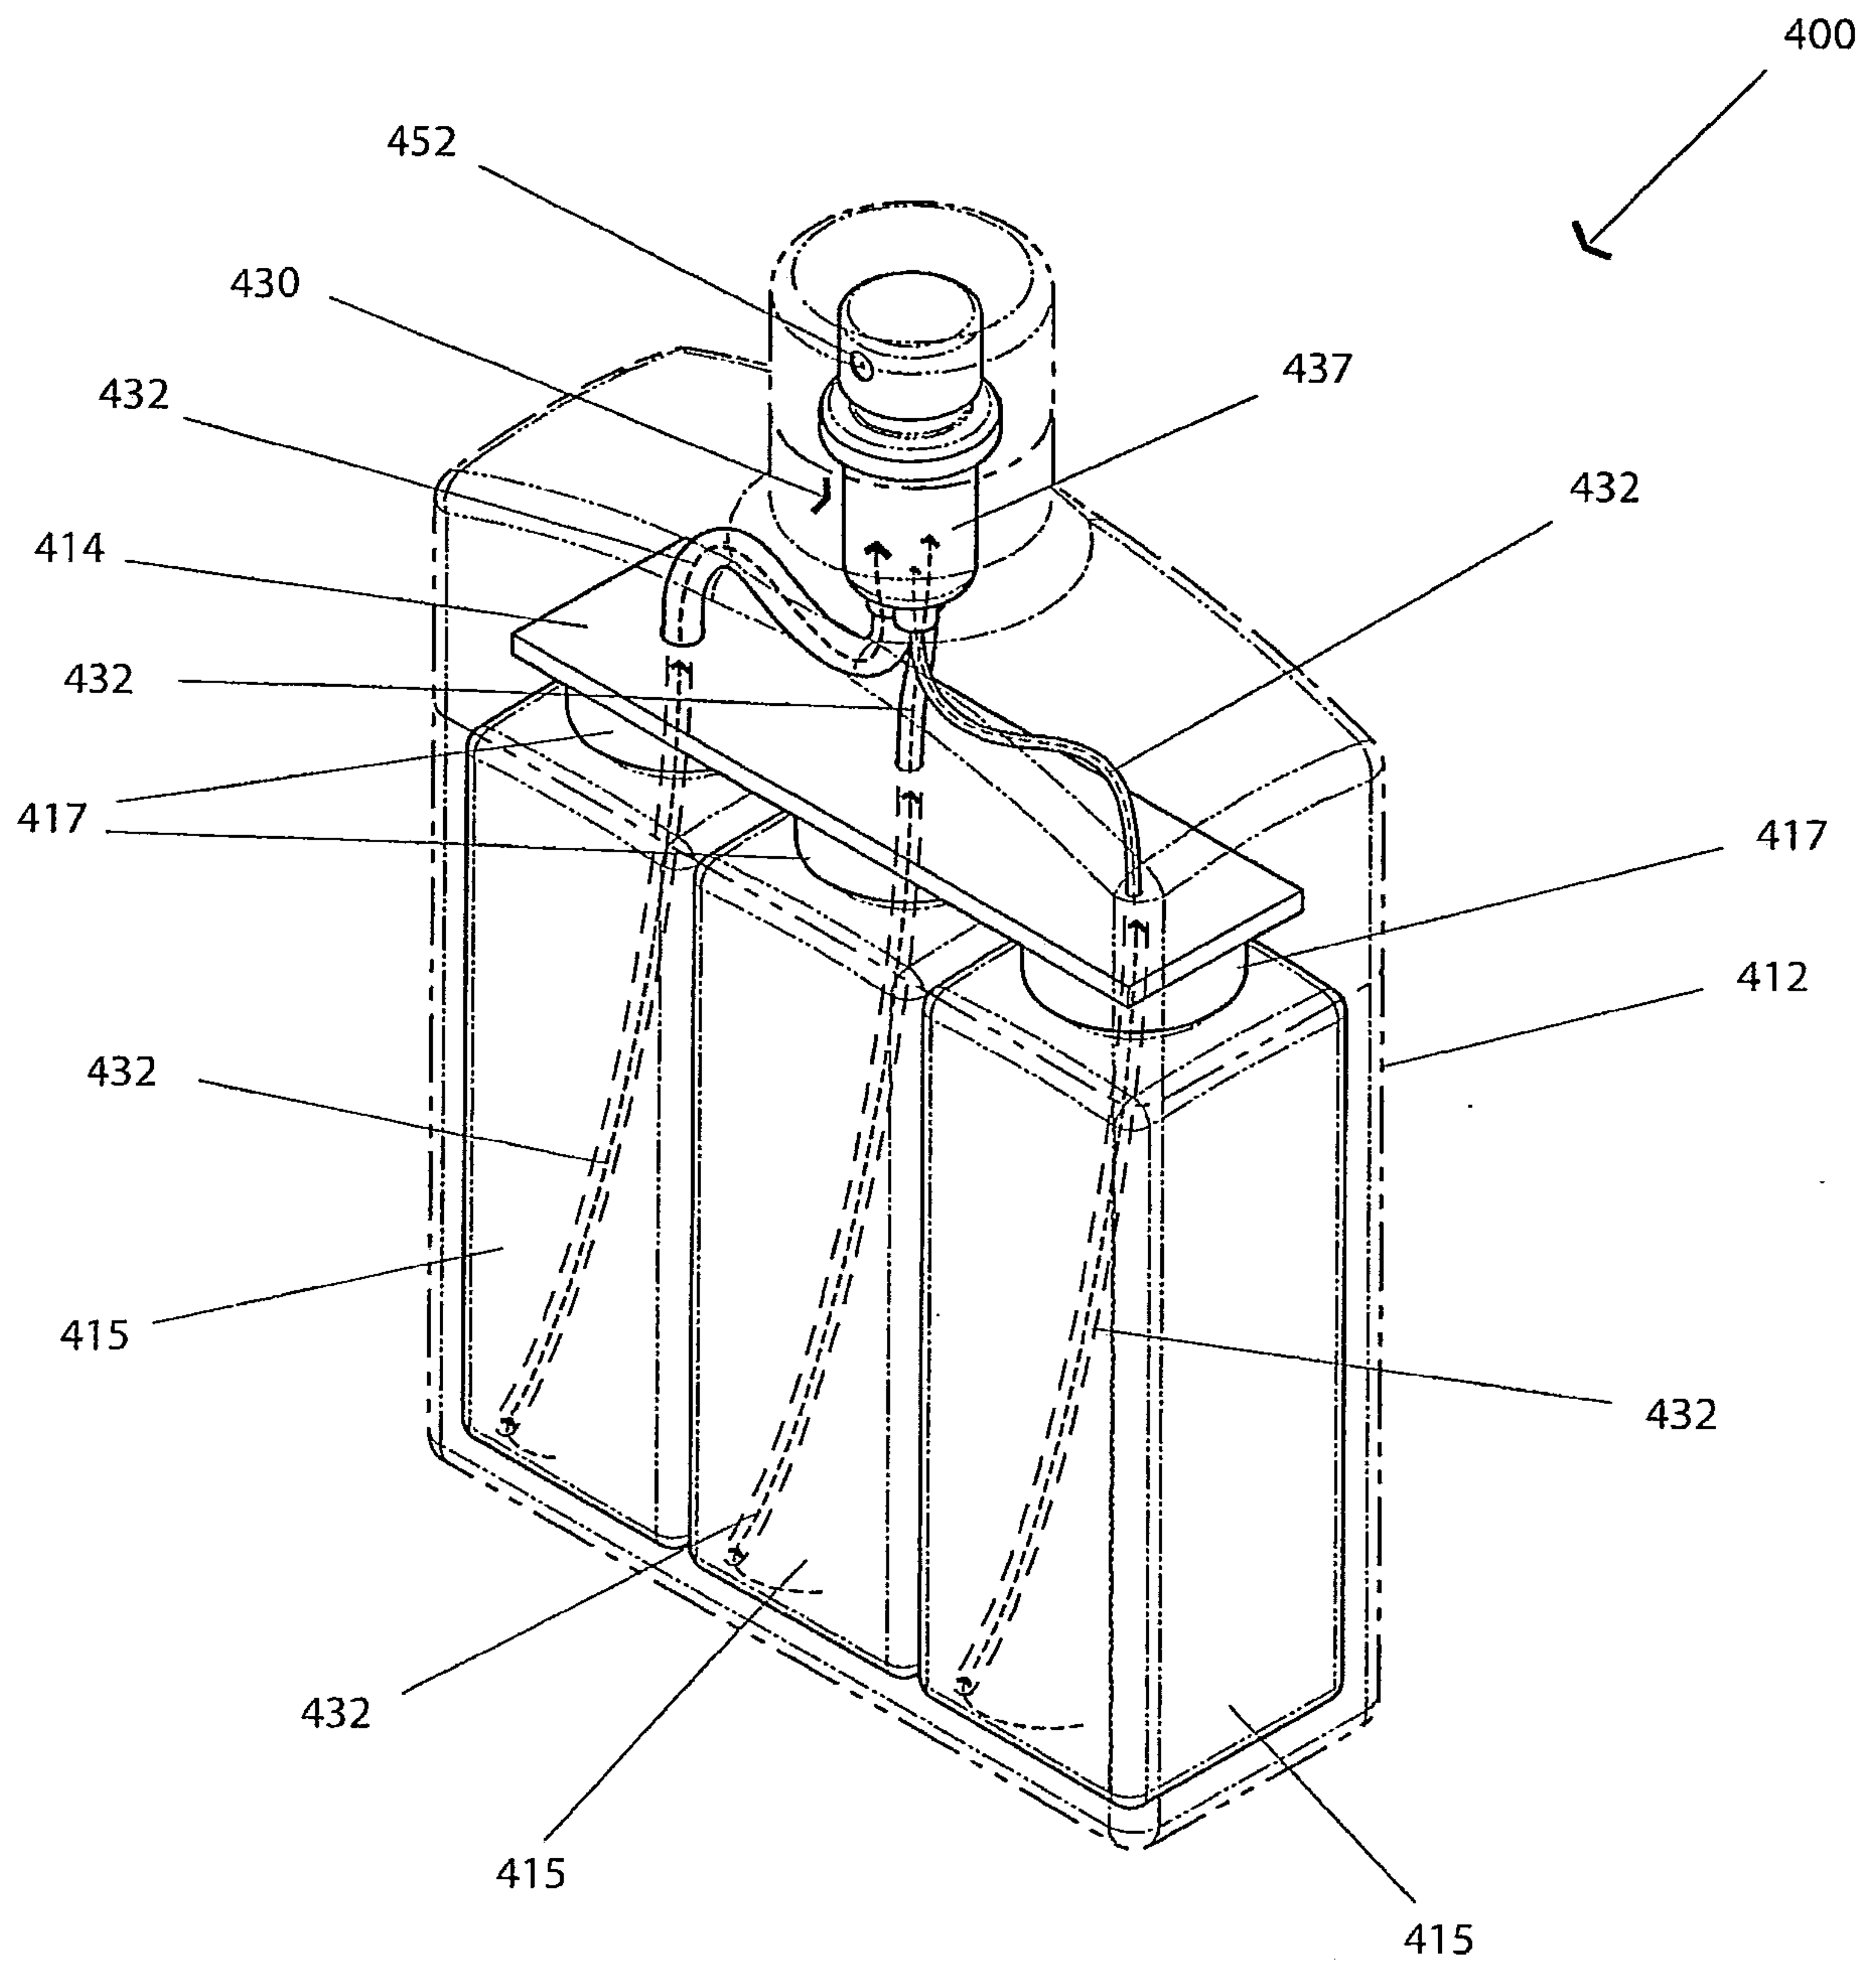


Fig. 4A

18/37

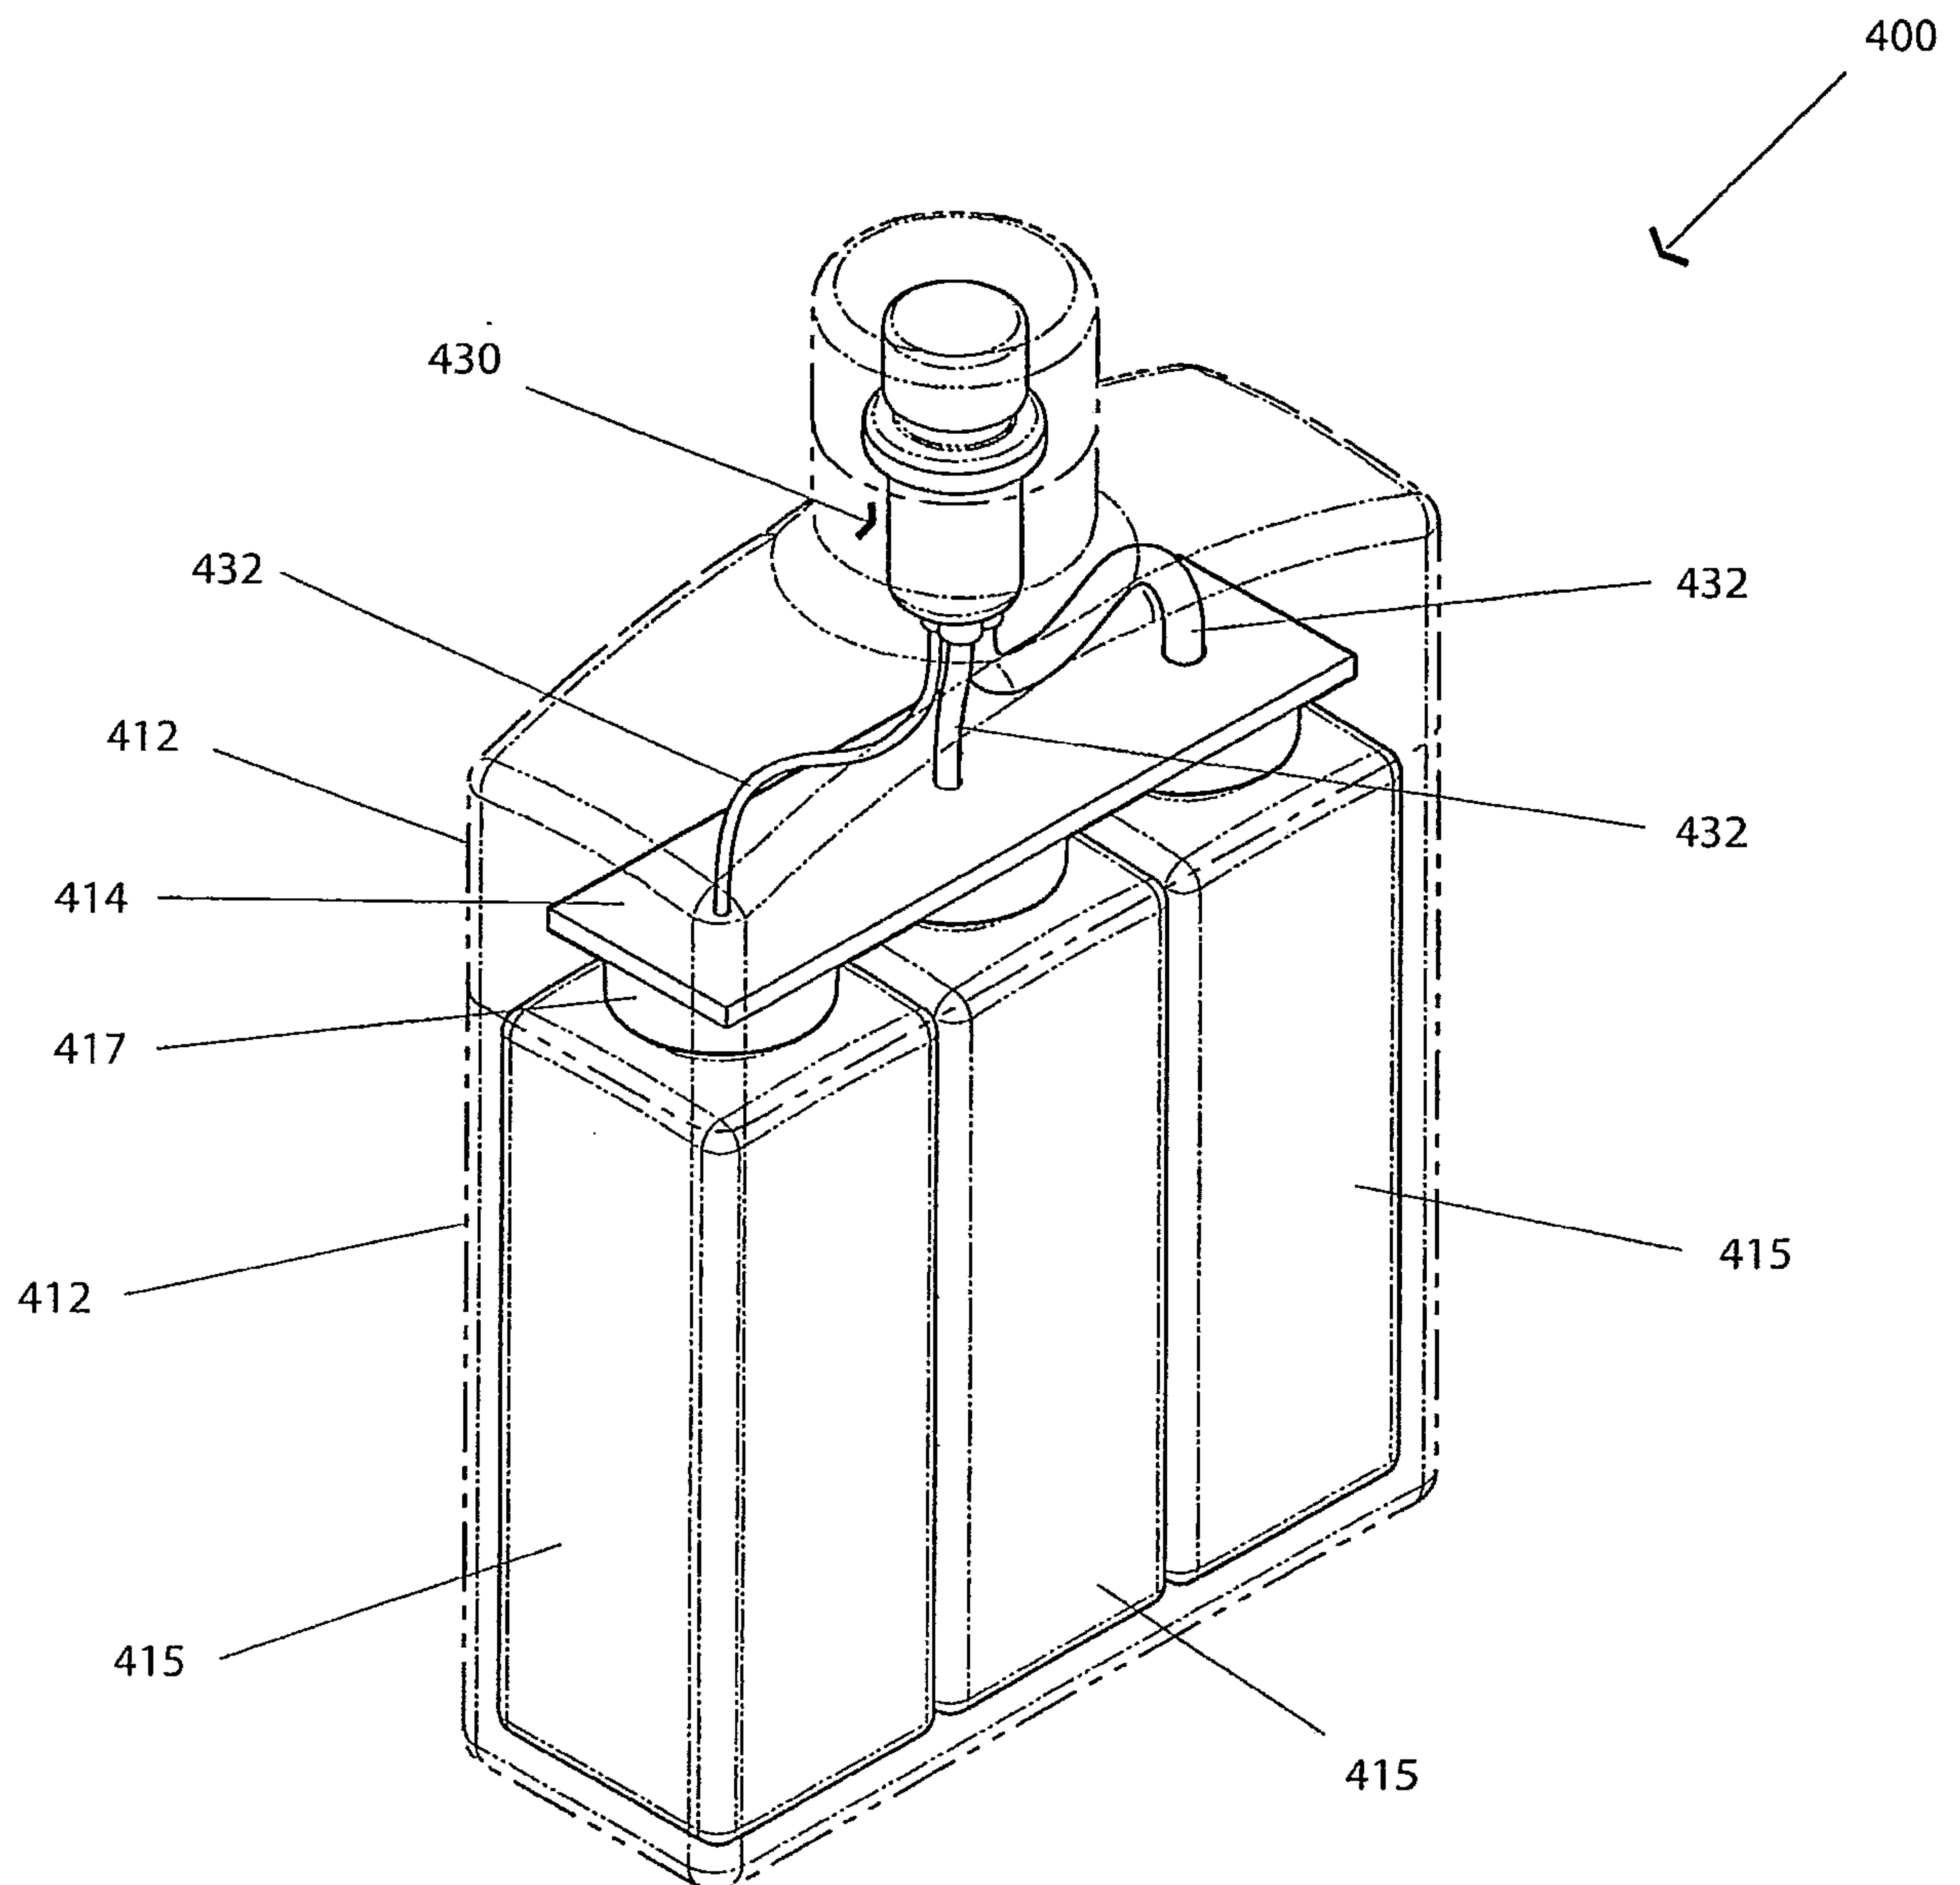


Fig. 4B

19/37

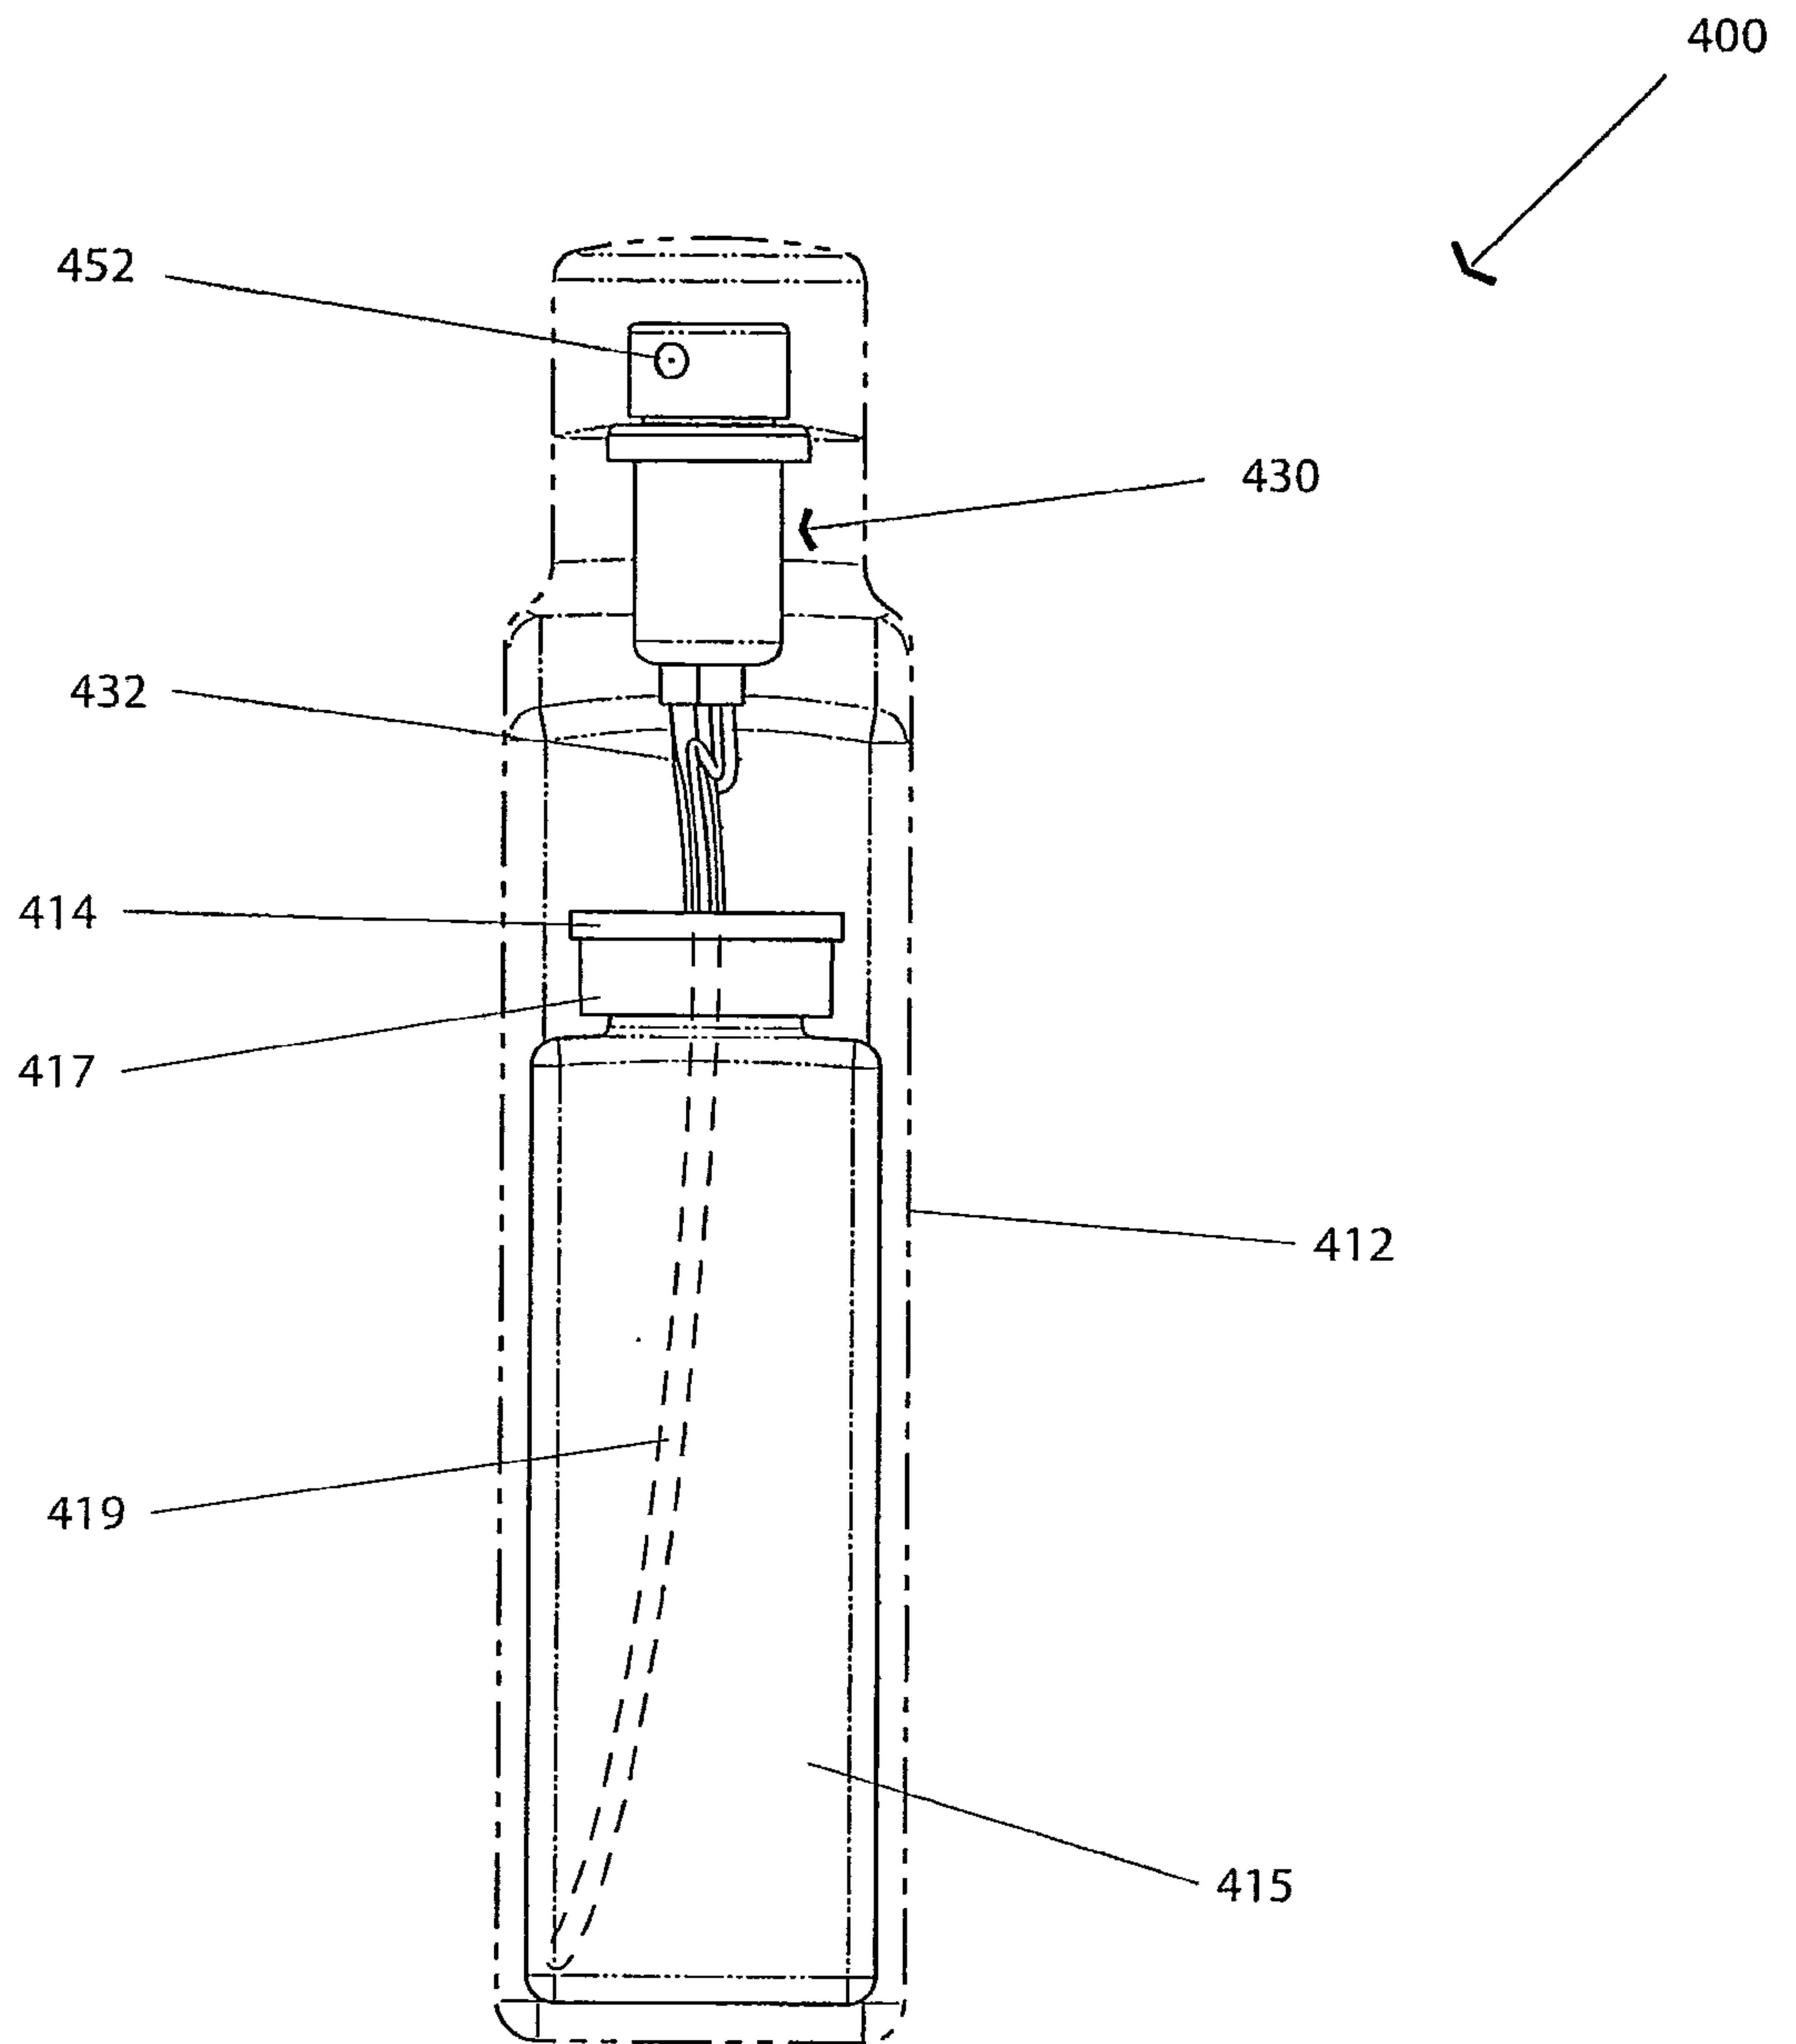


Fig. 4C

20/37


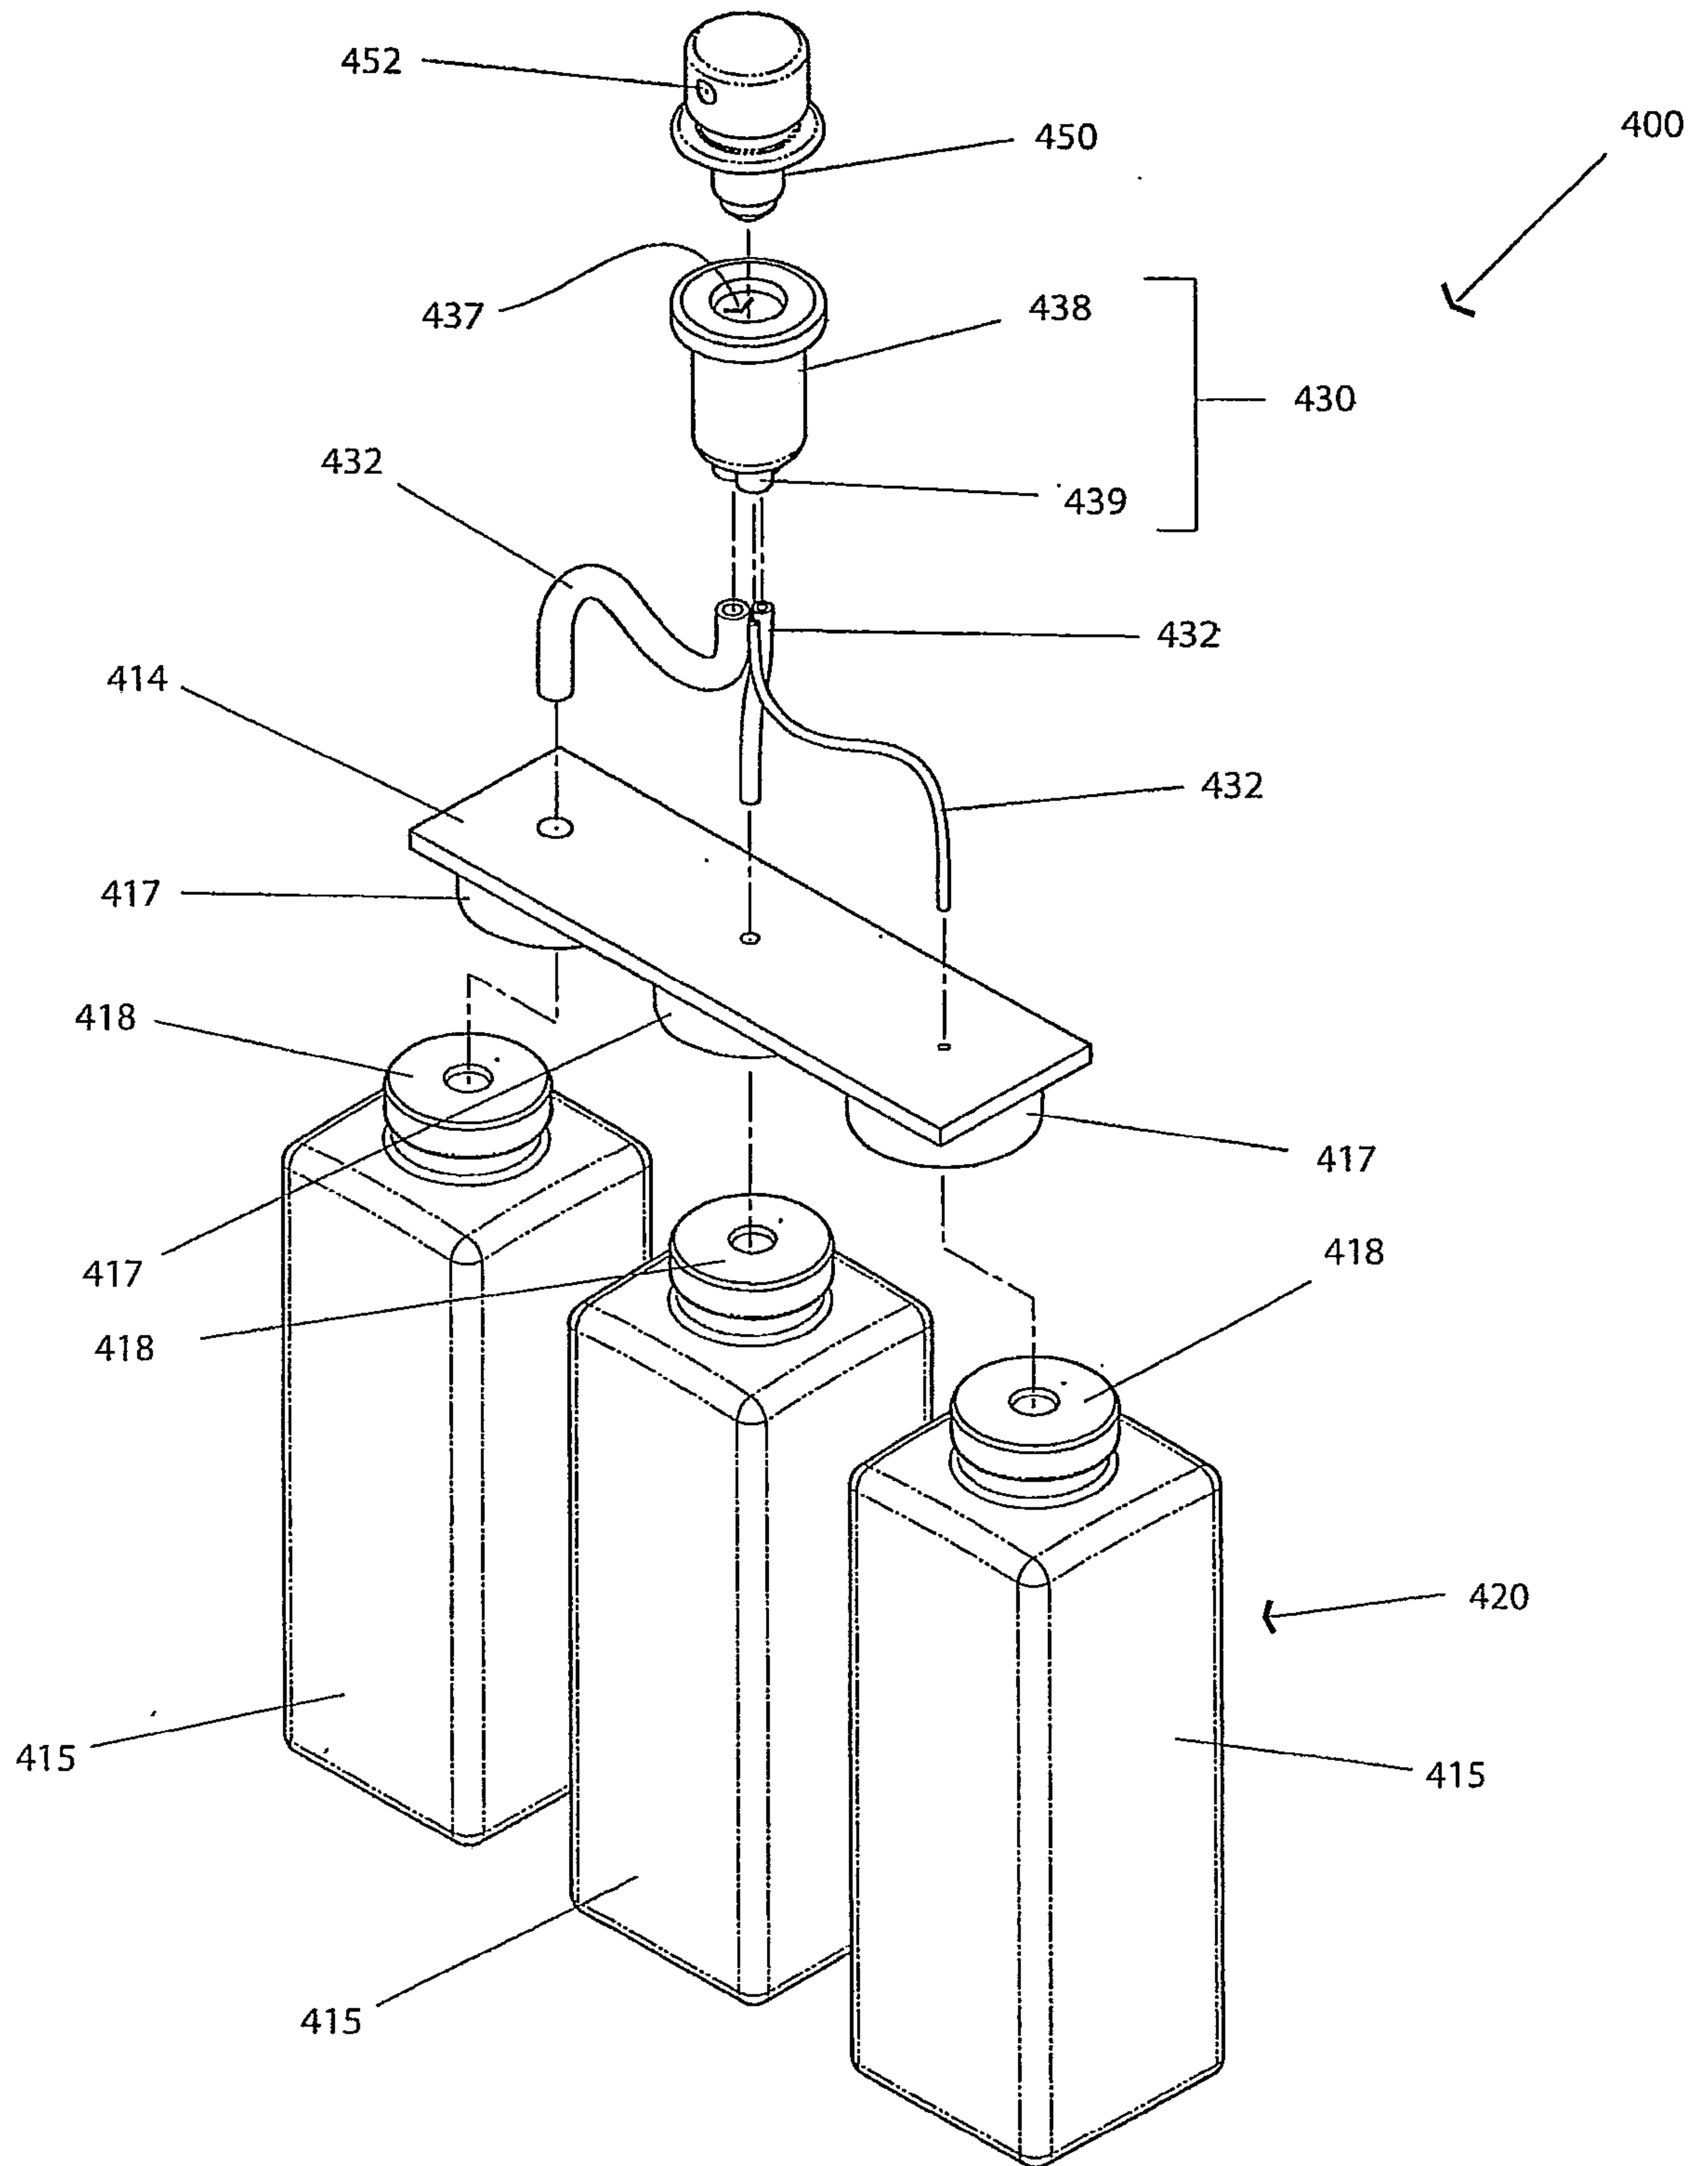


Fig. 4D

21/37

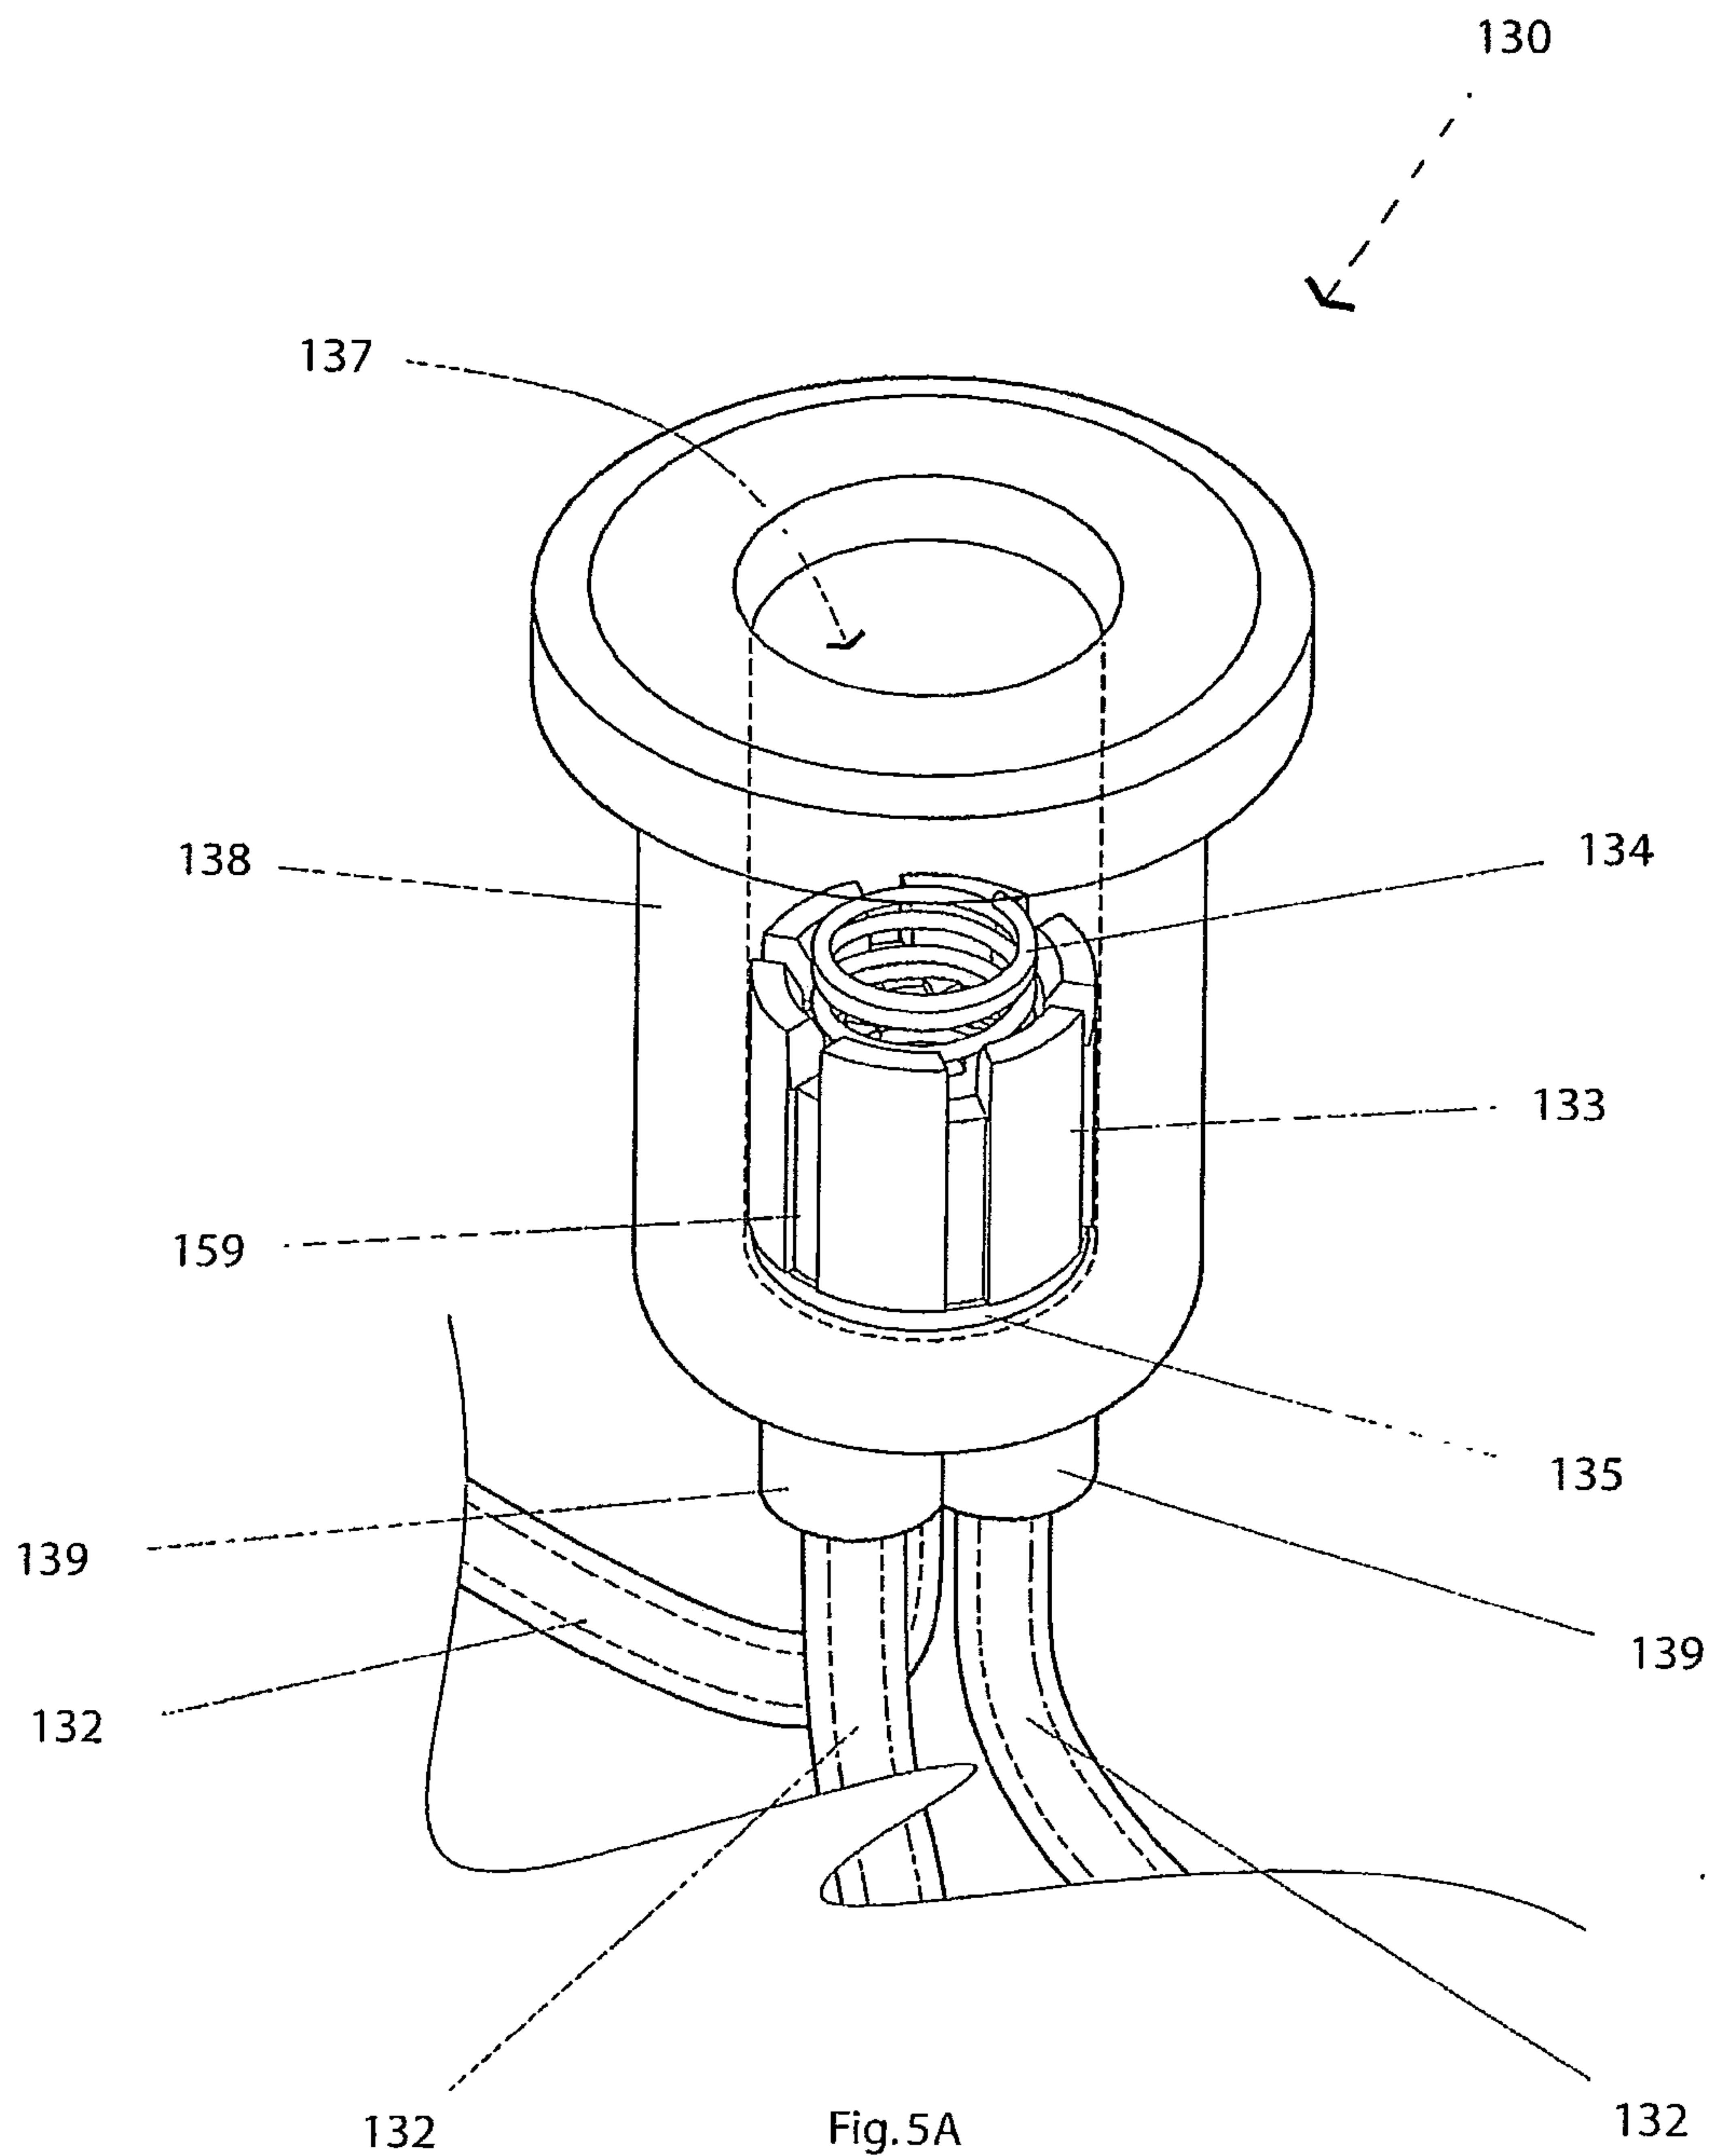

22/37


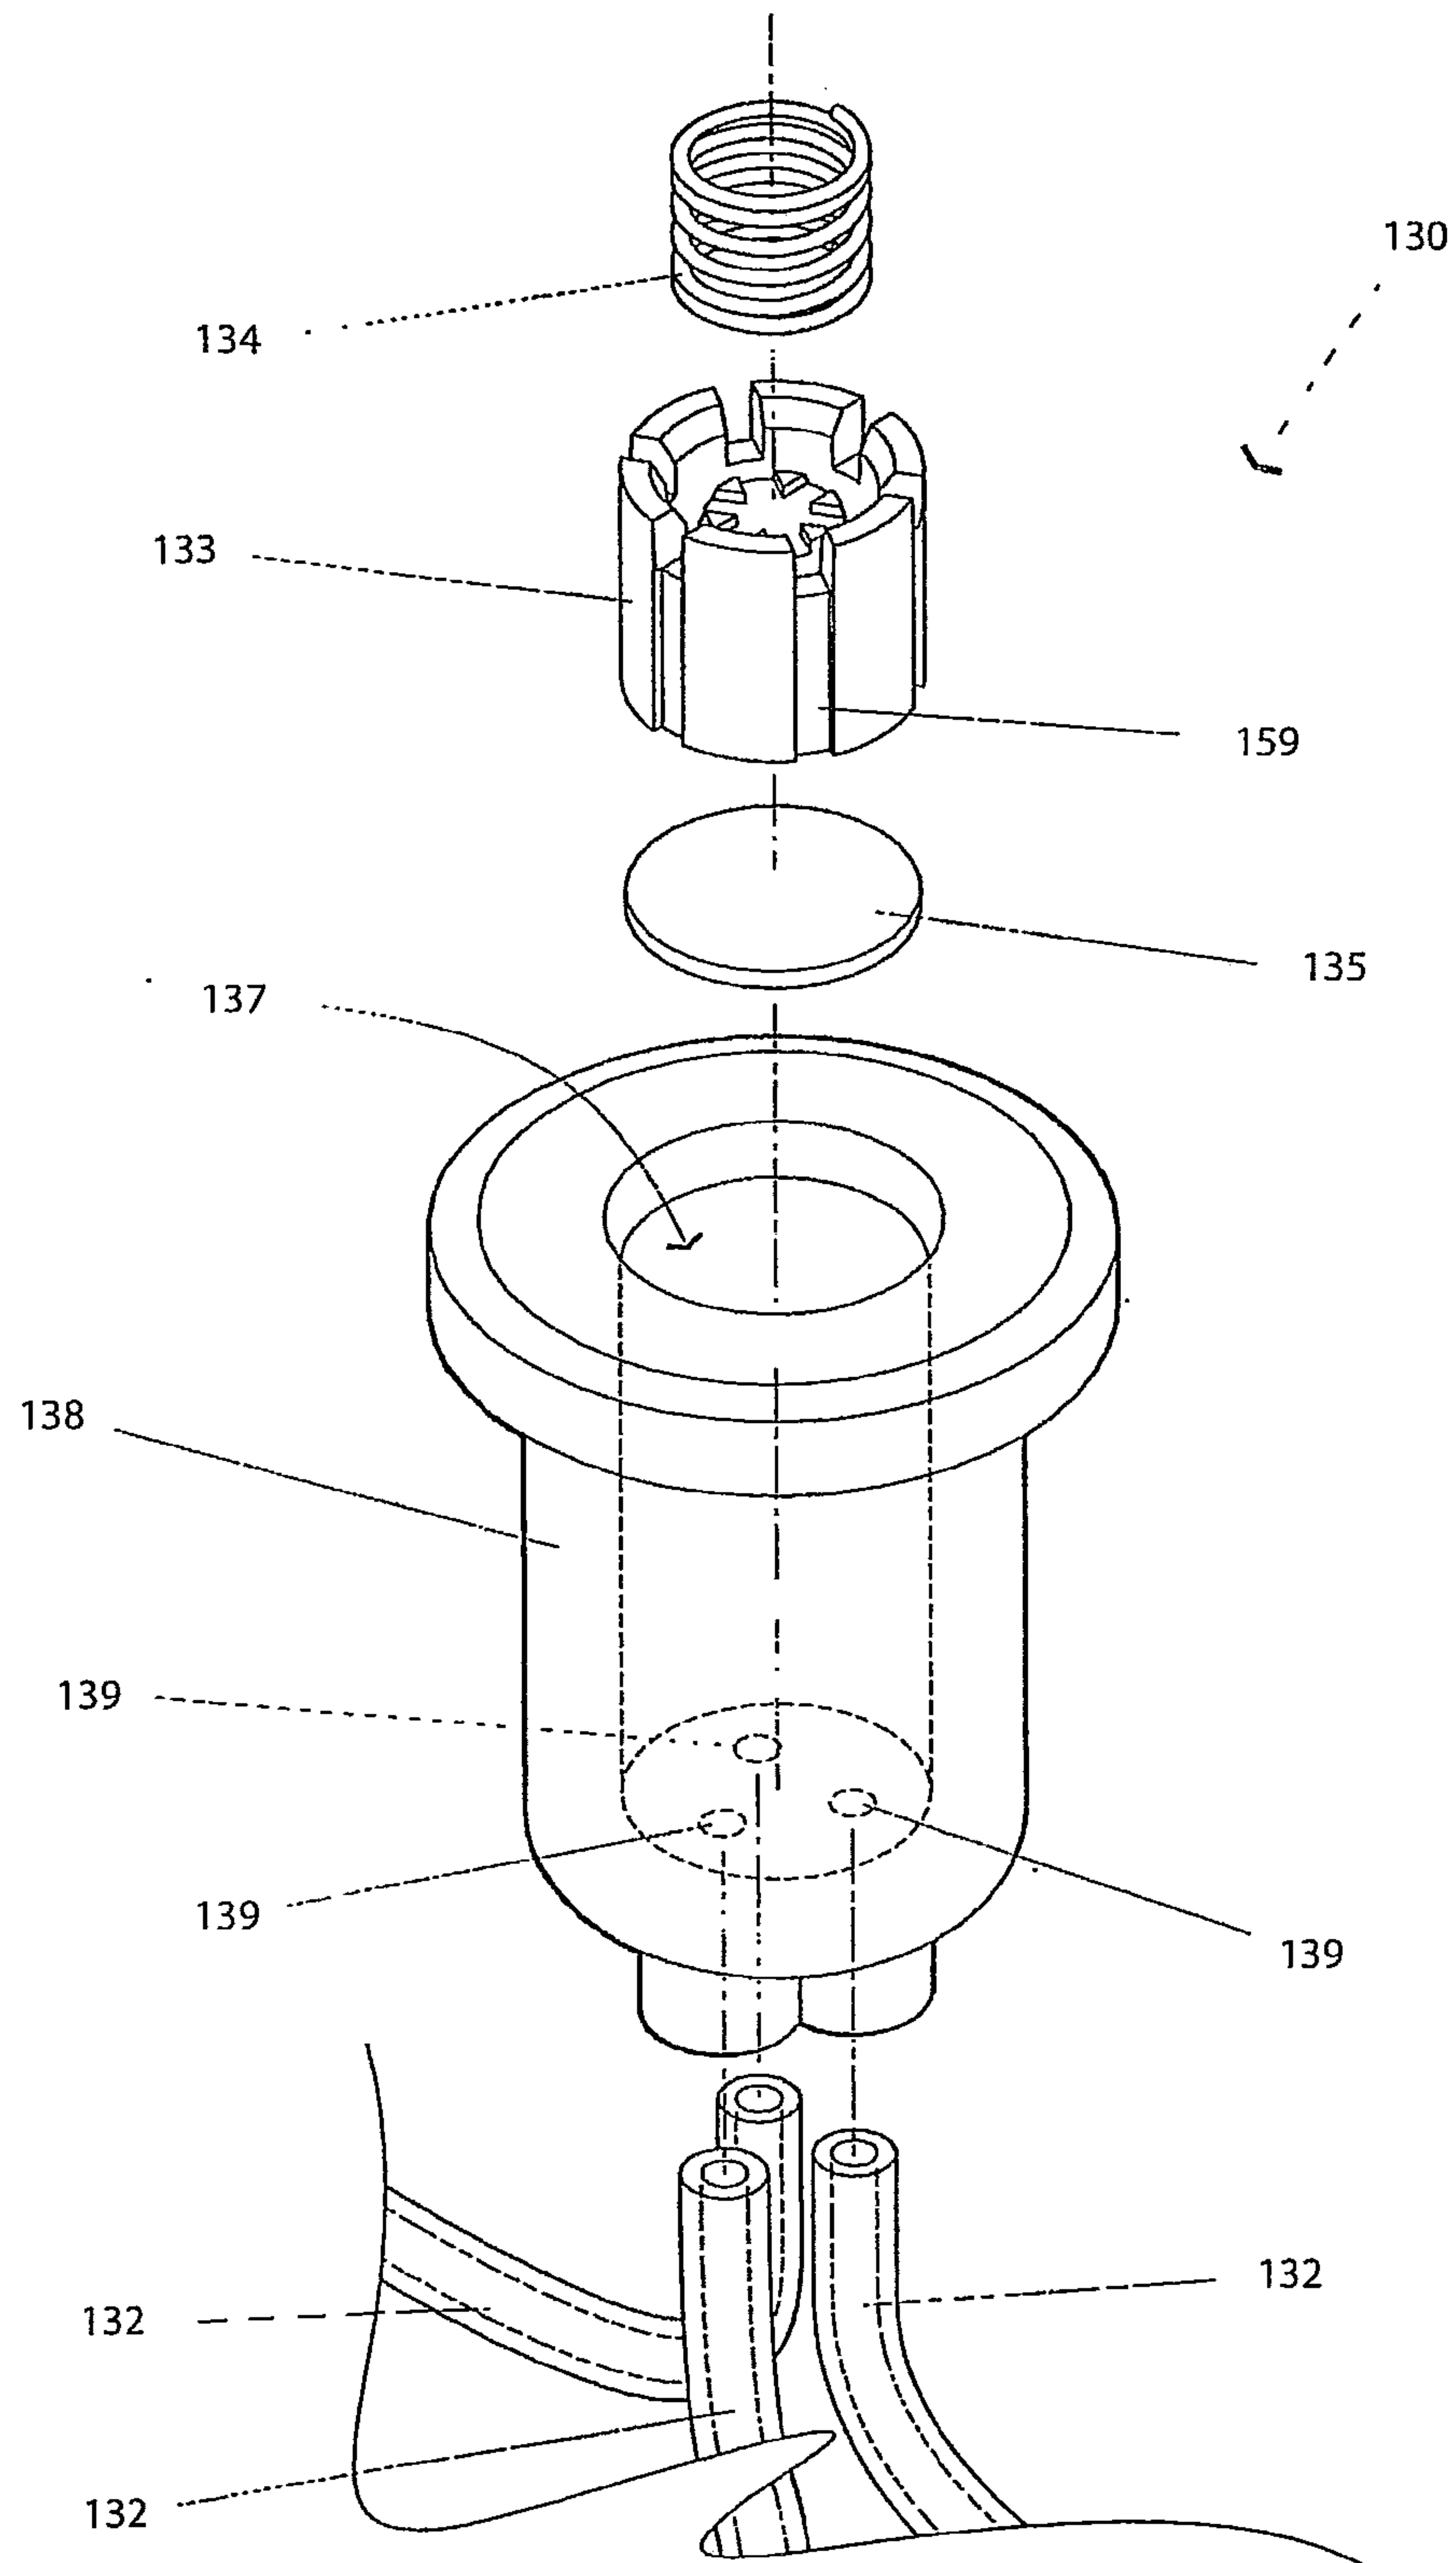


Fig. 5B

23/37

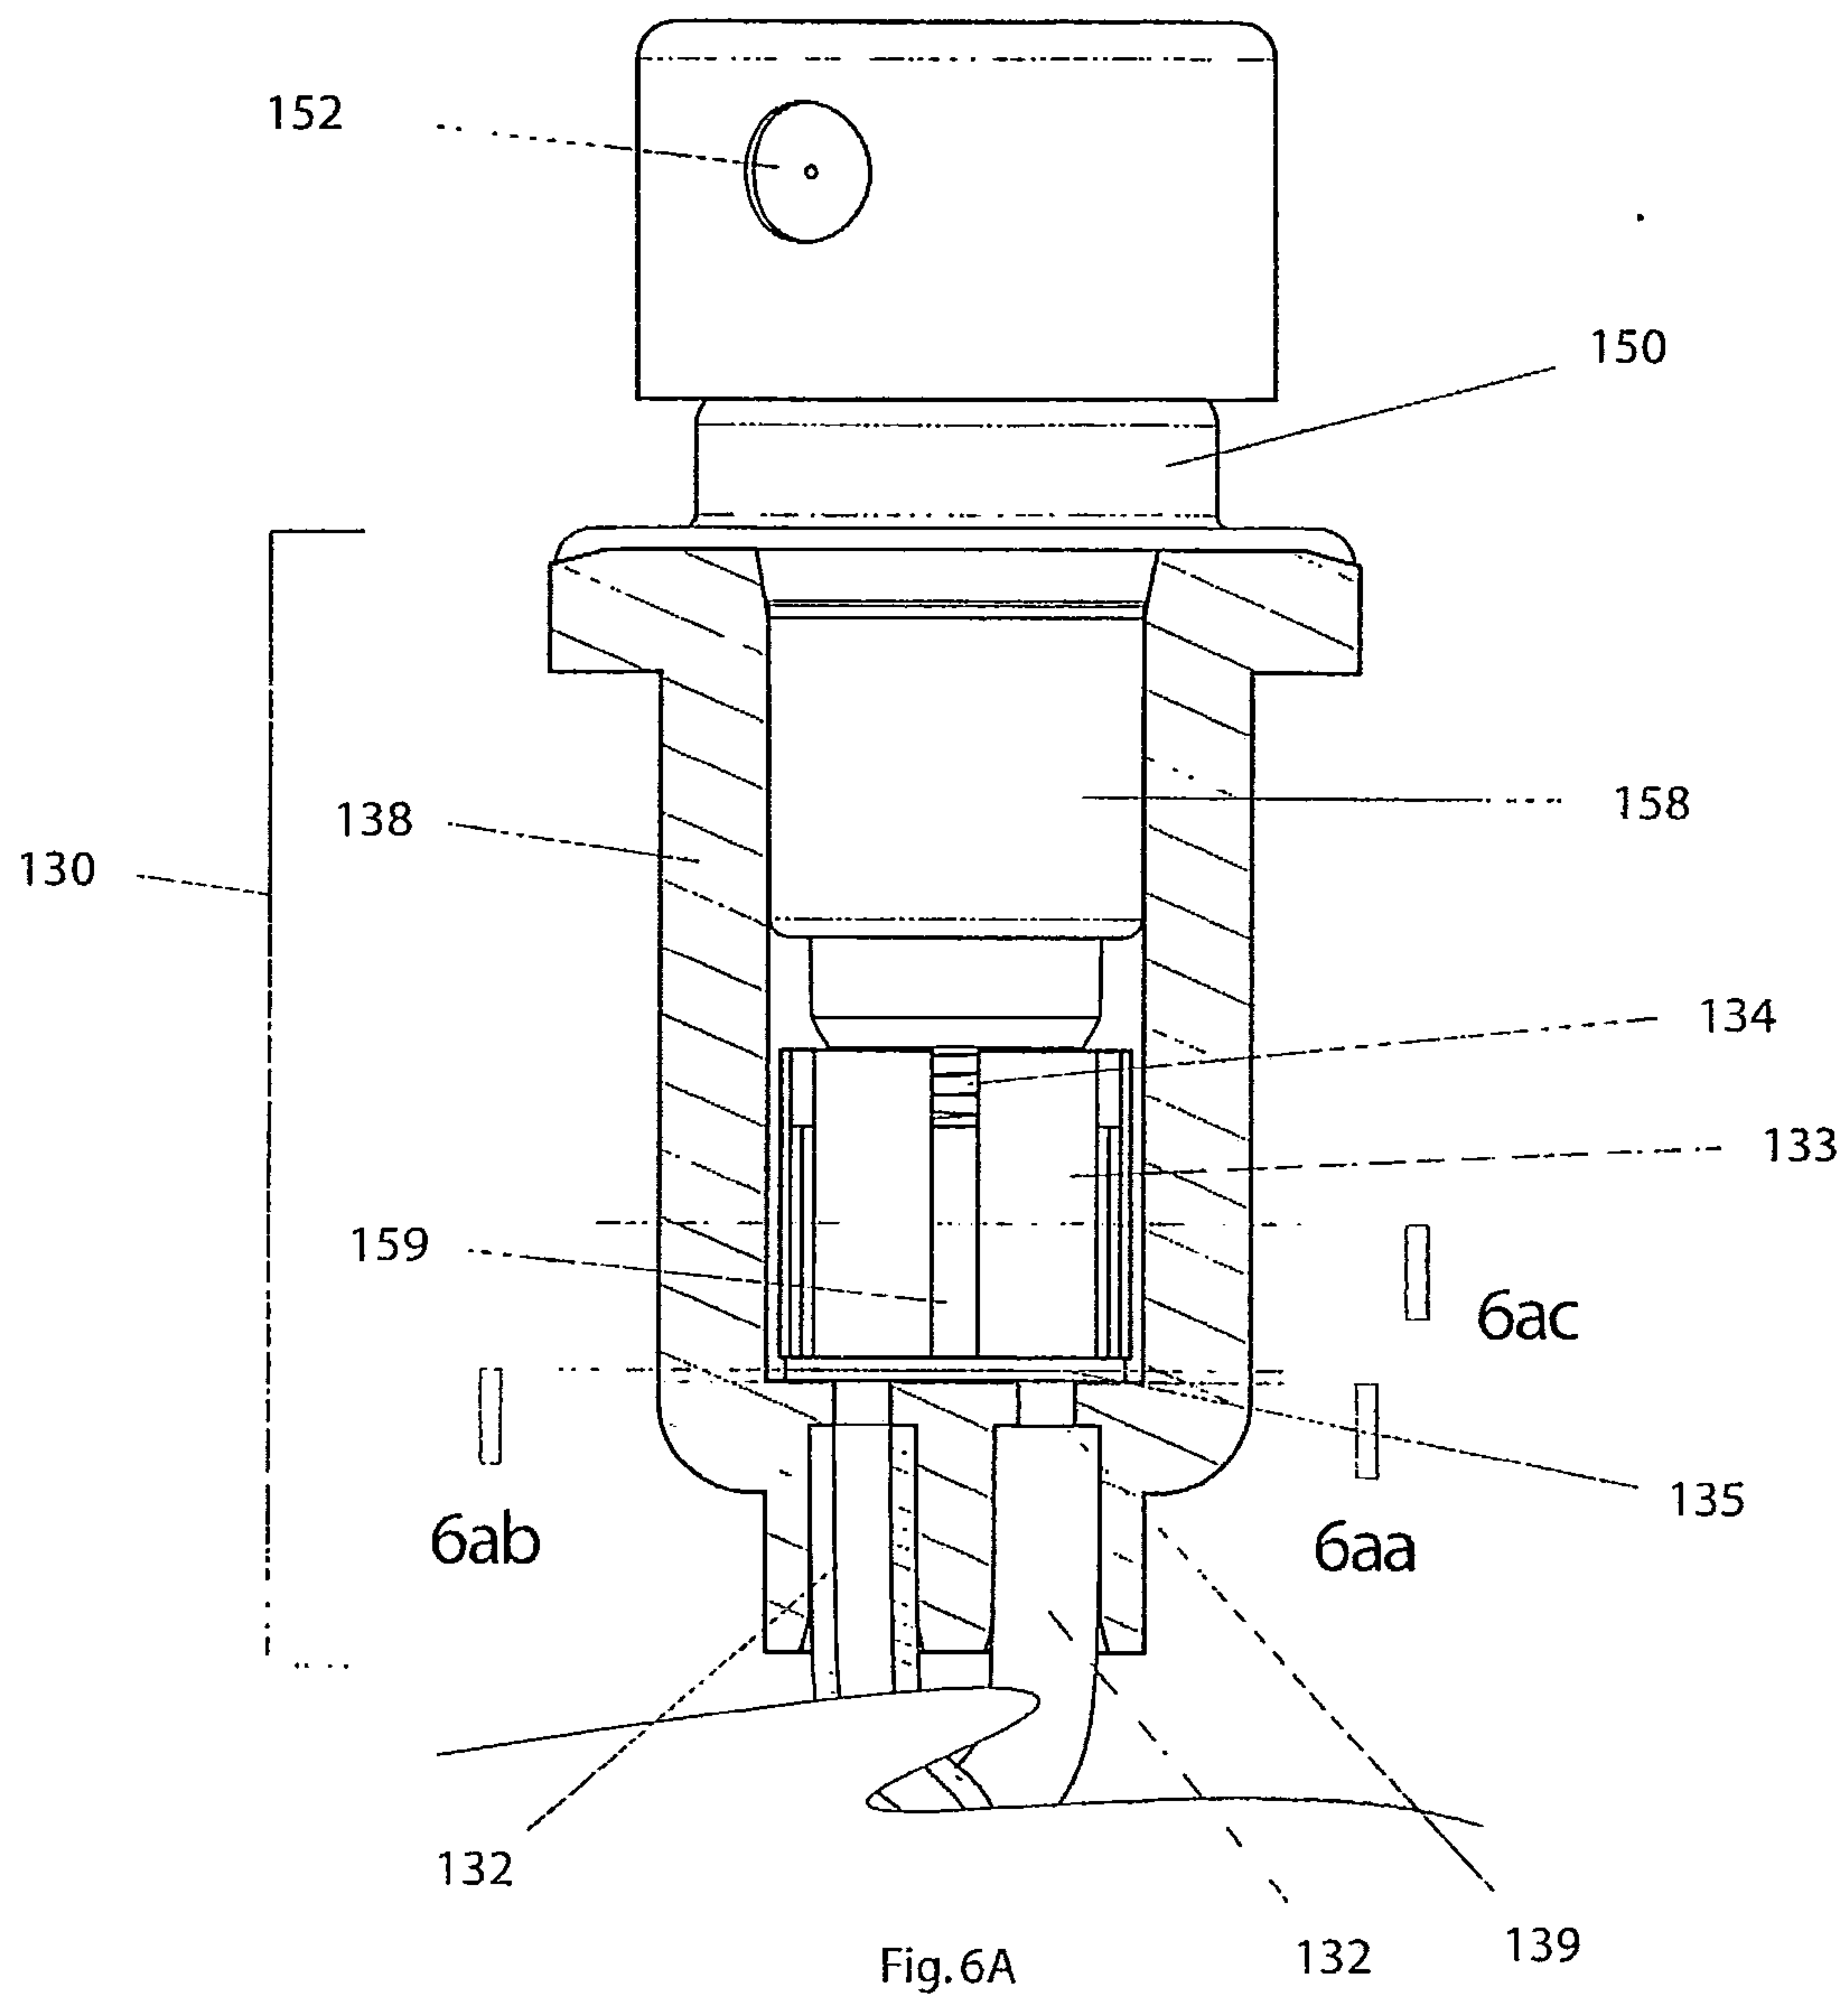

24/37


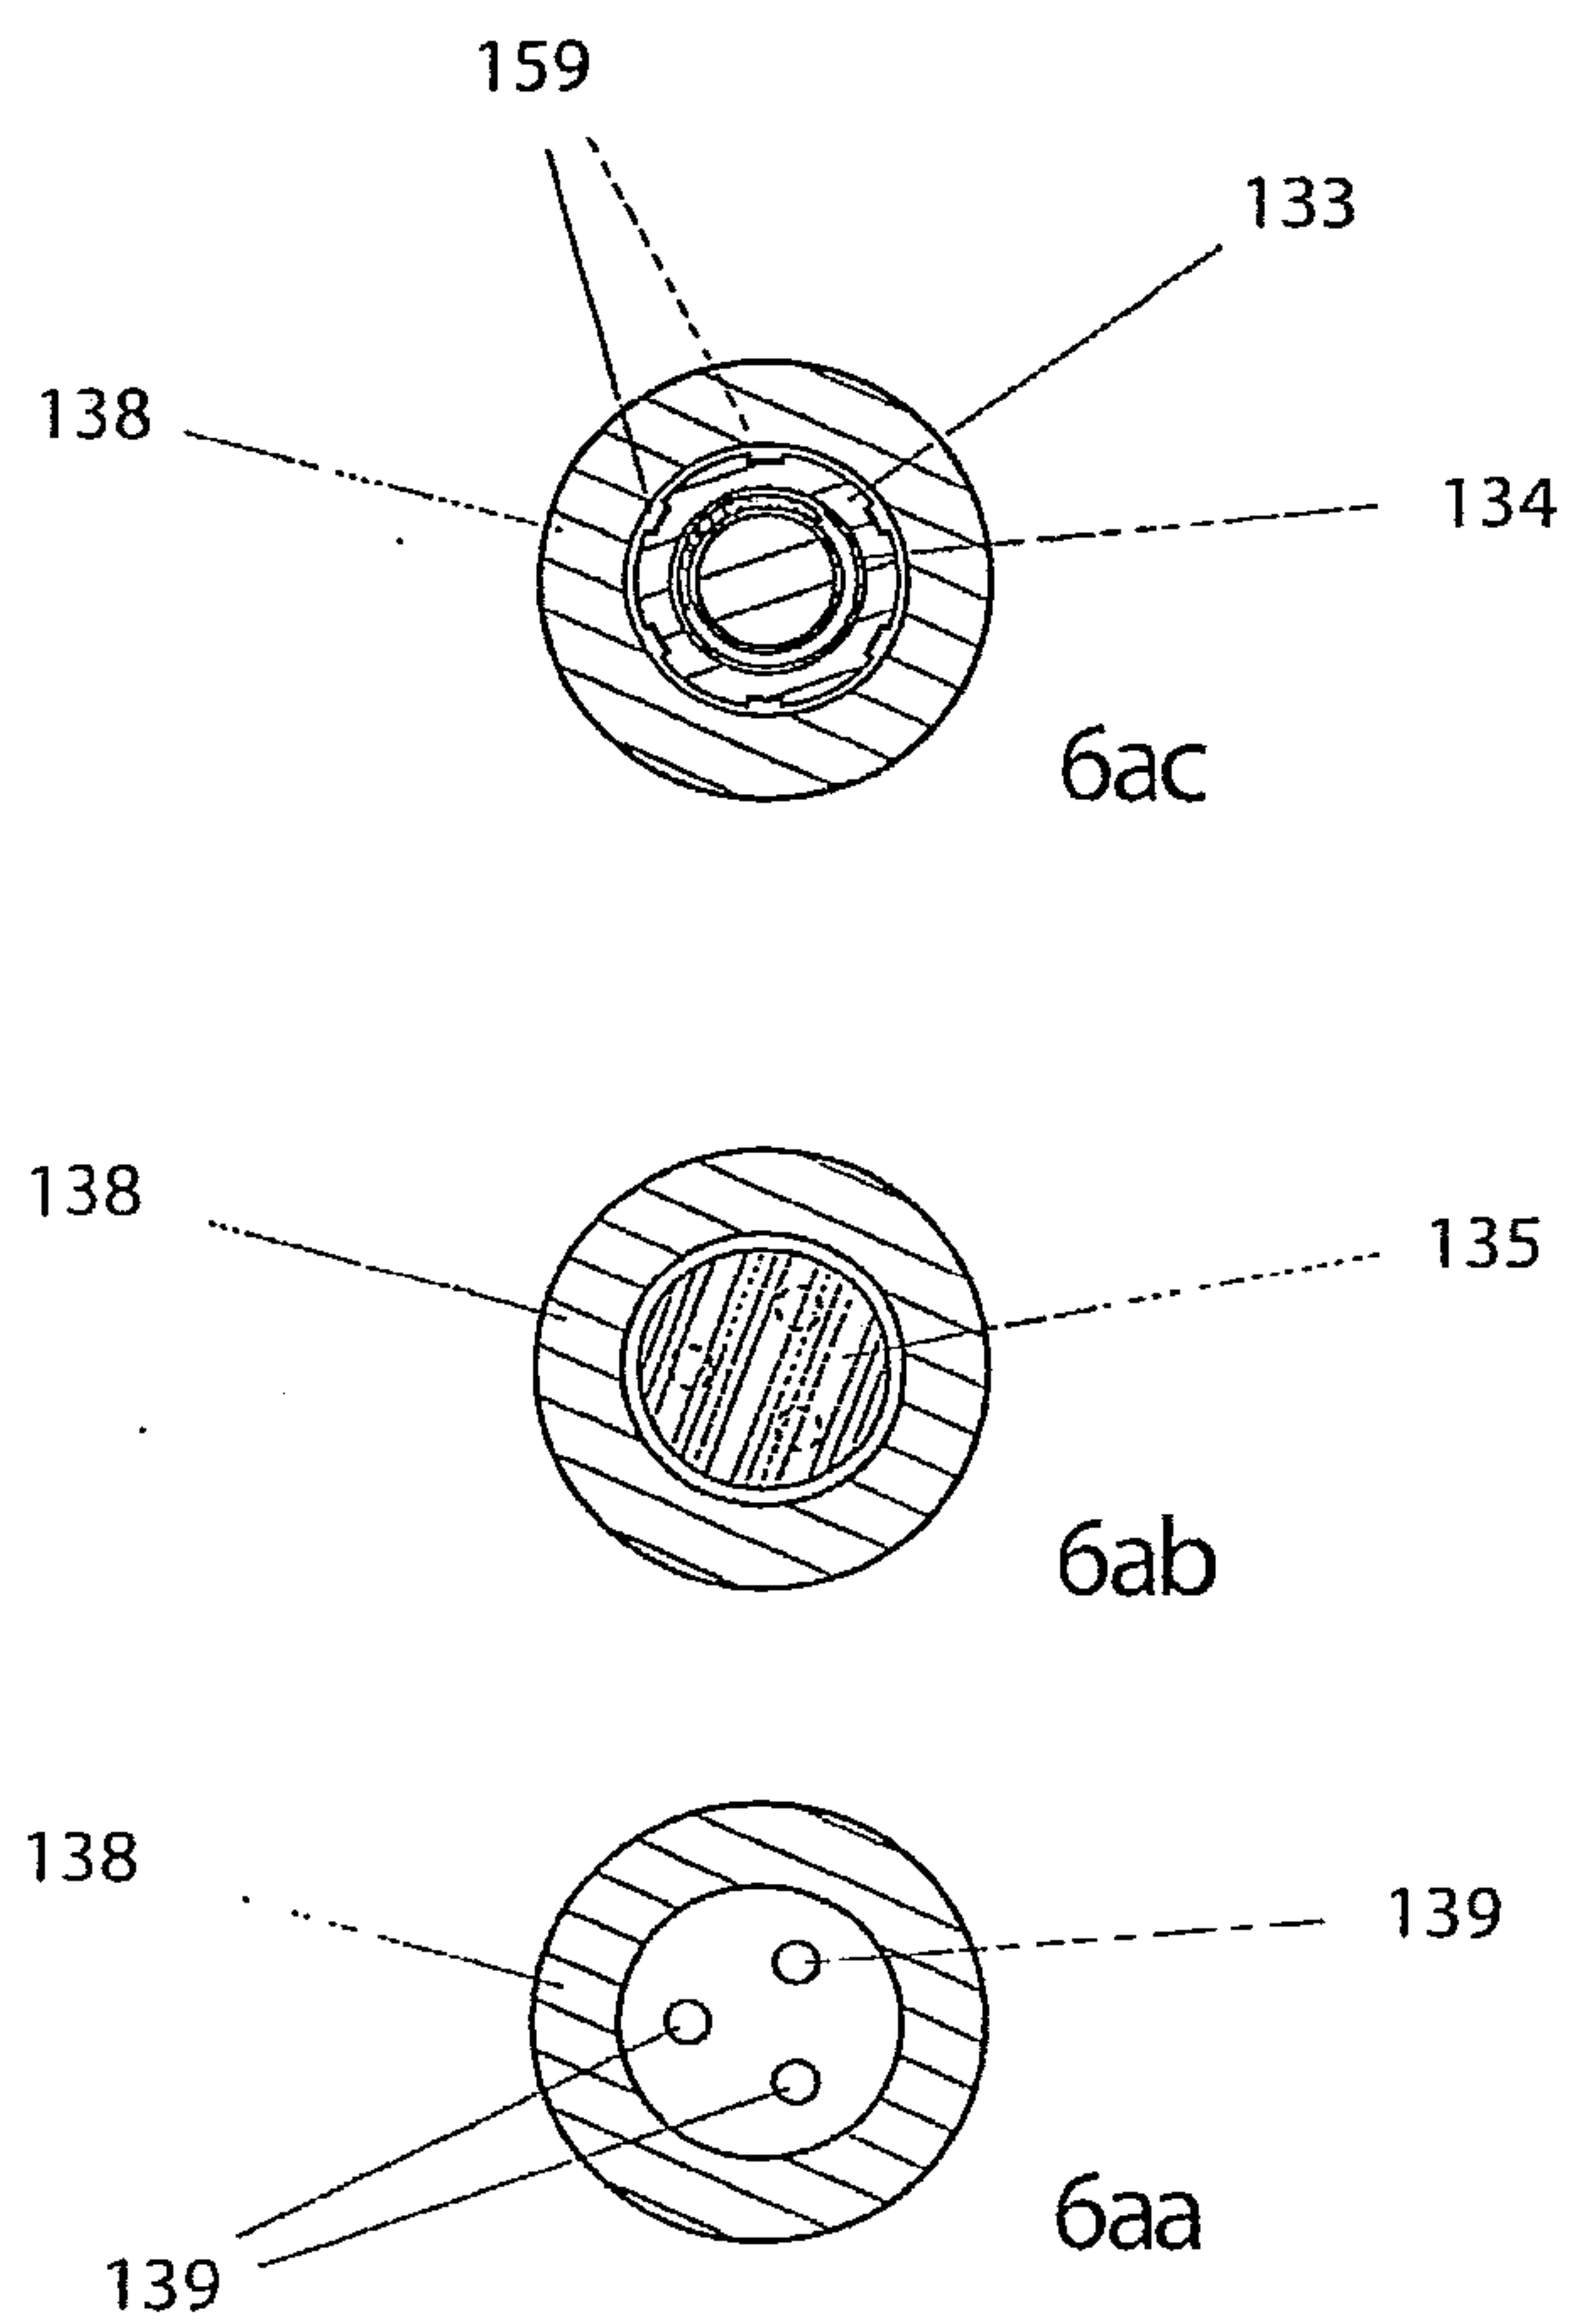


Fig. 6B

25/37

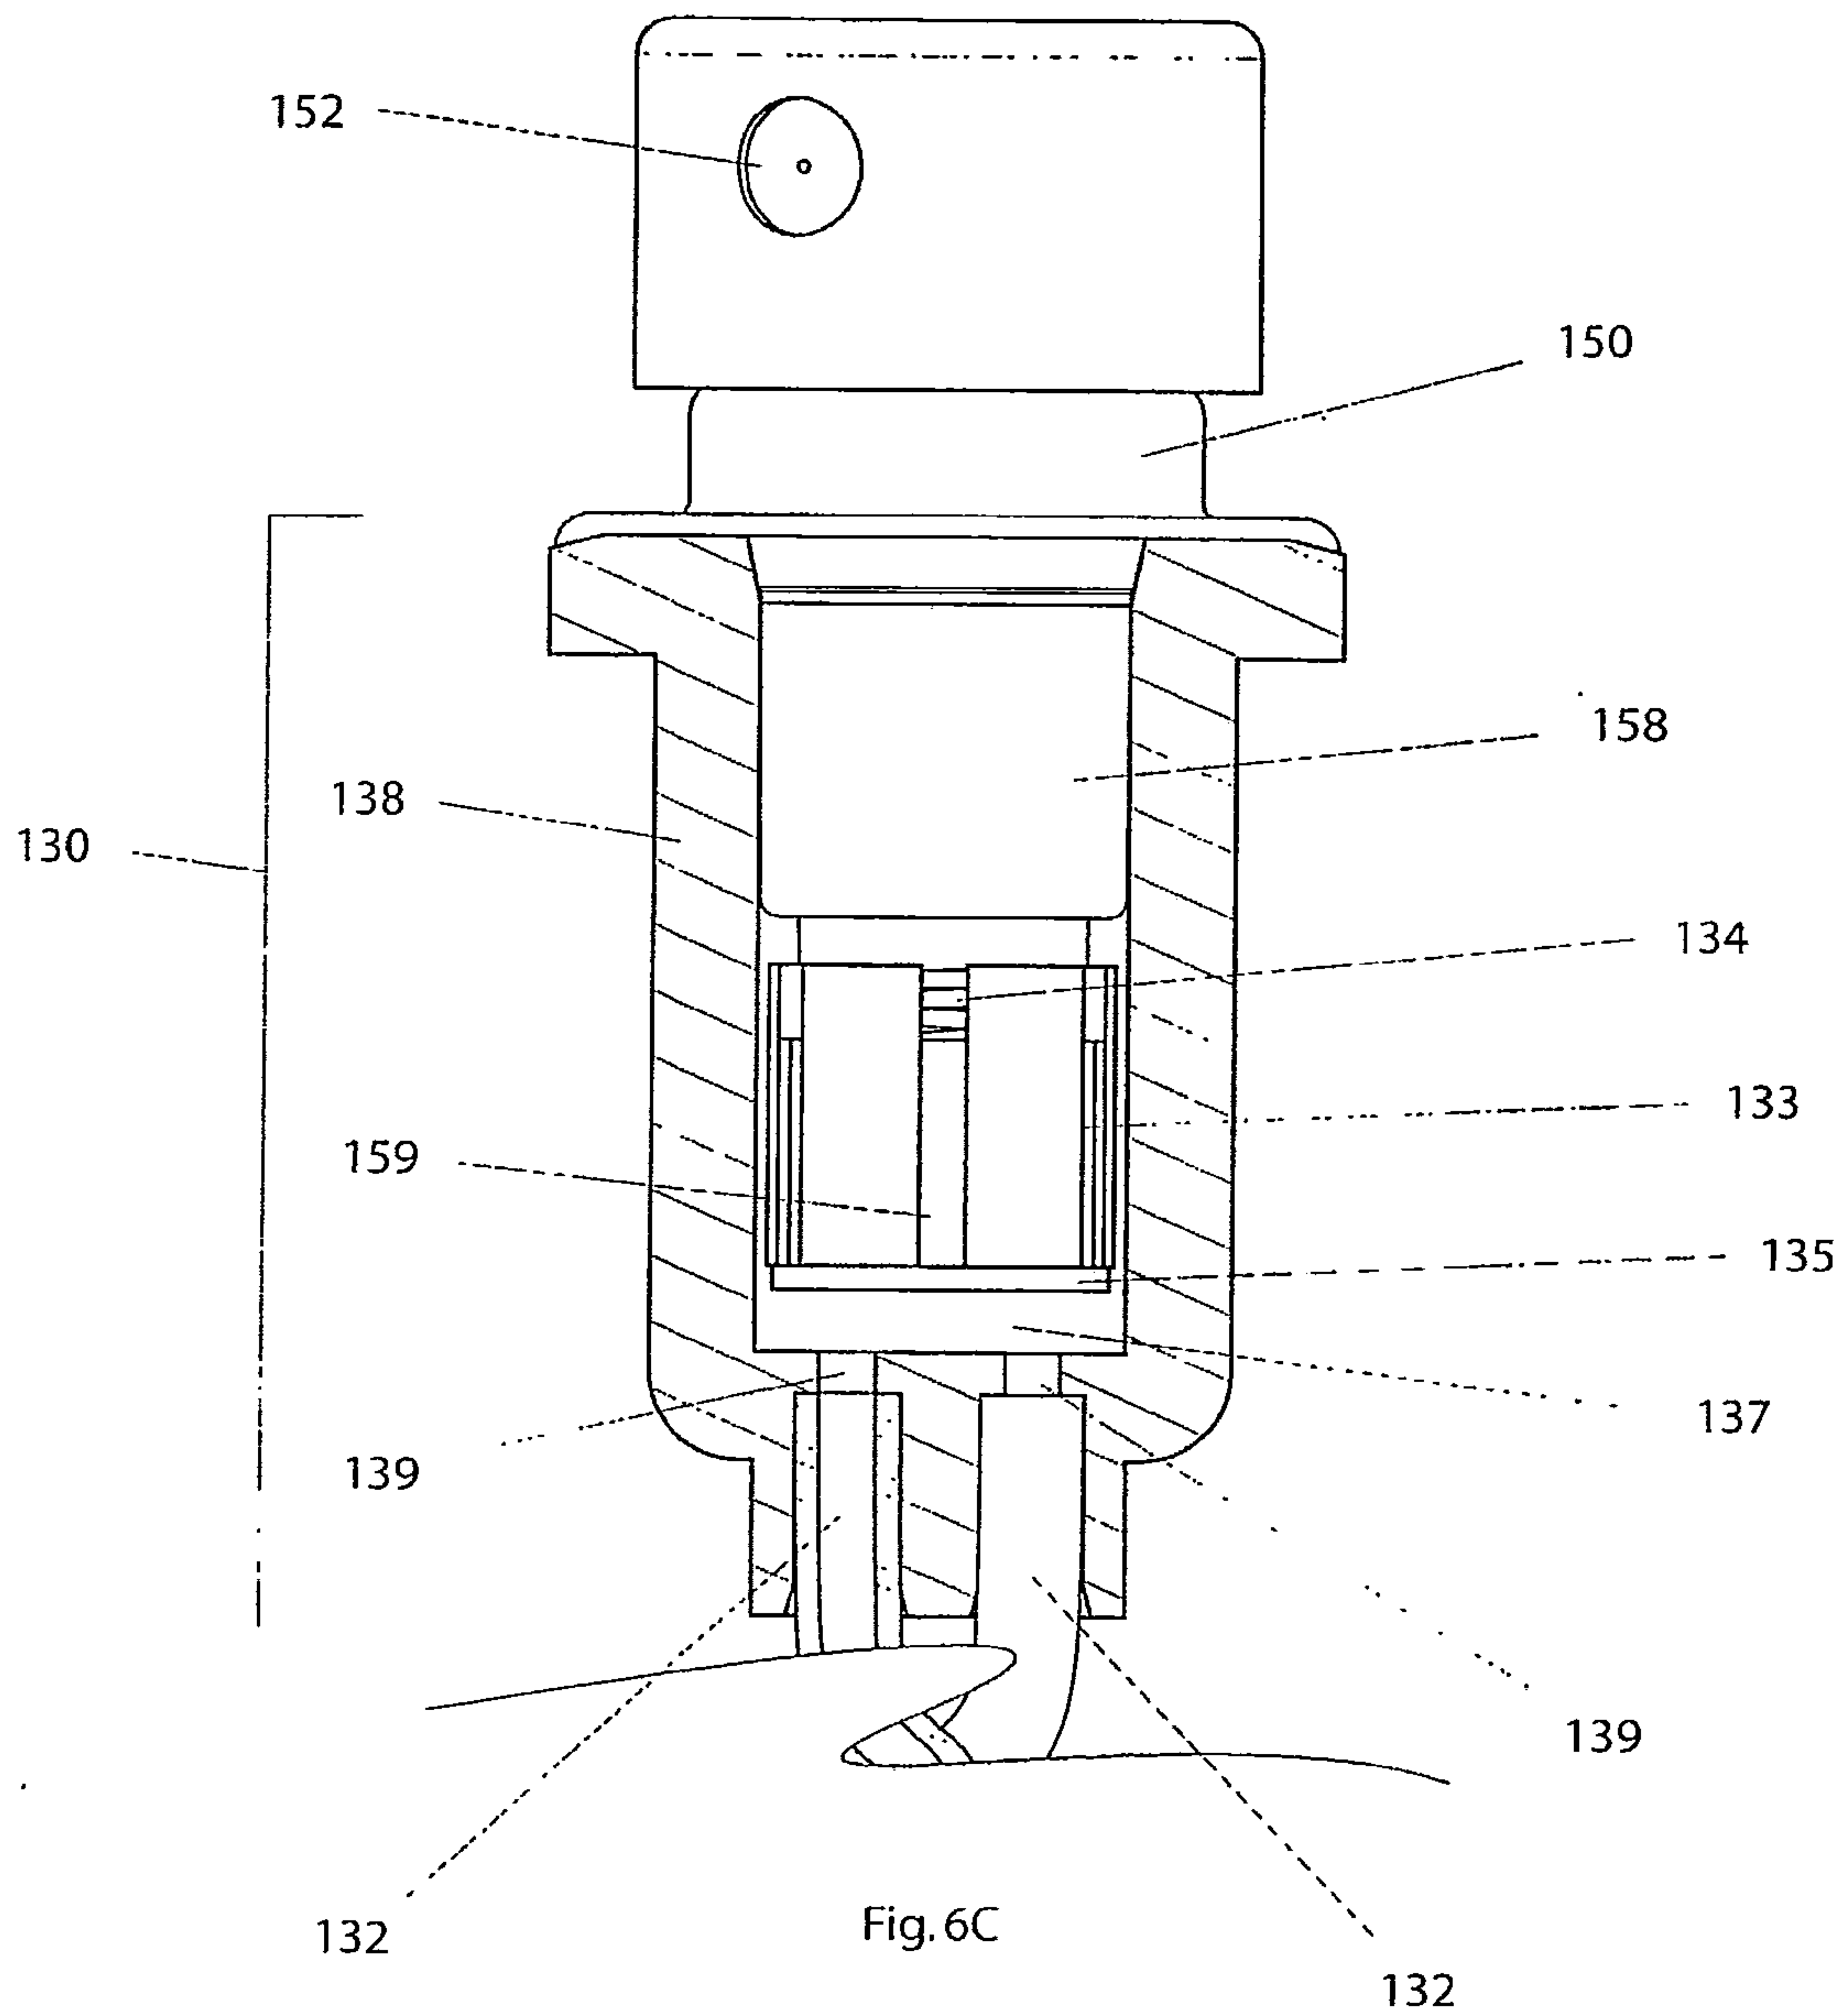

26/37

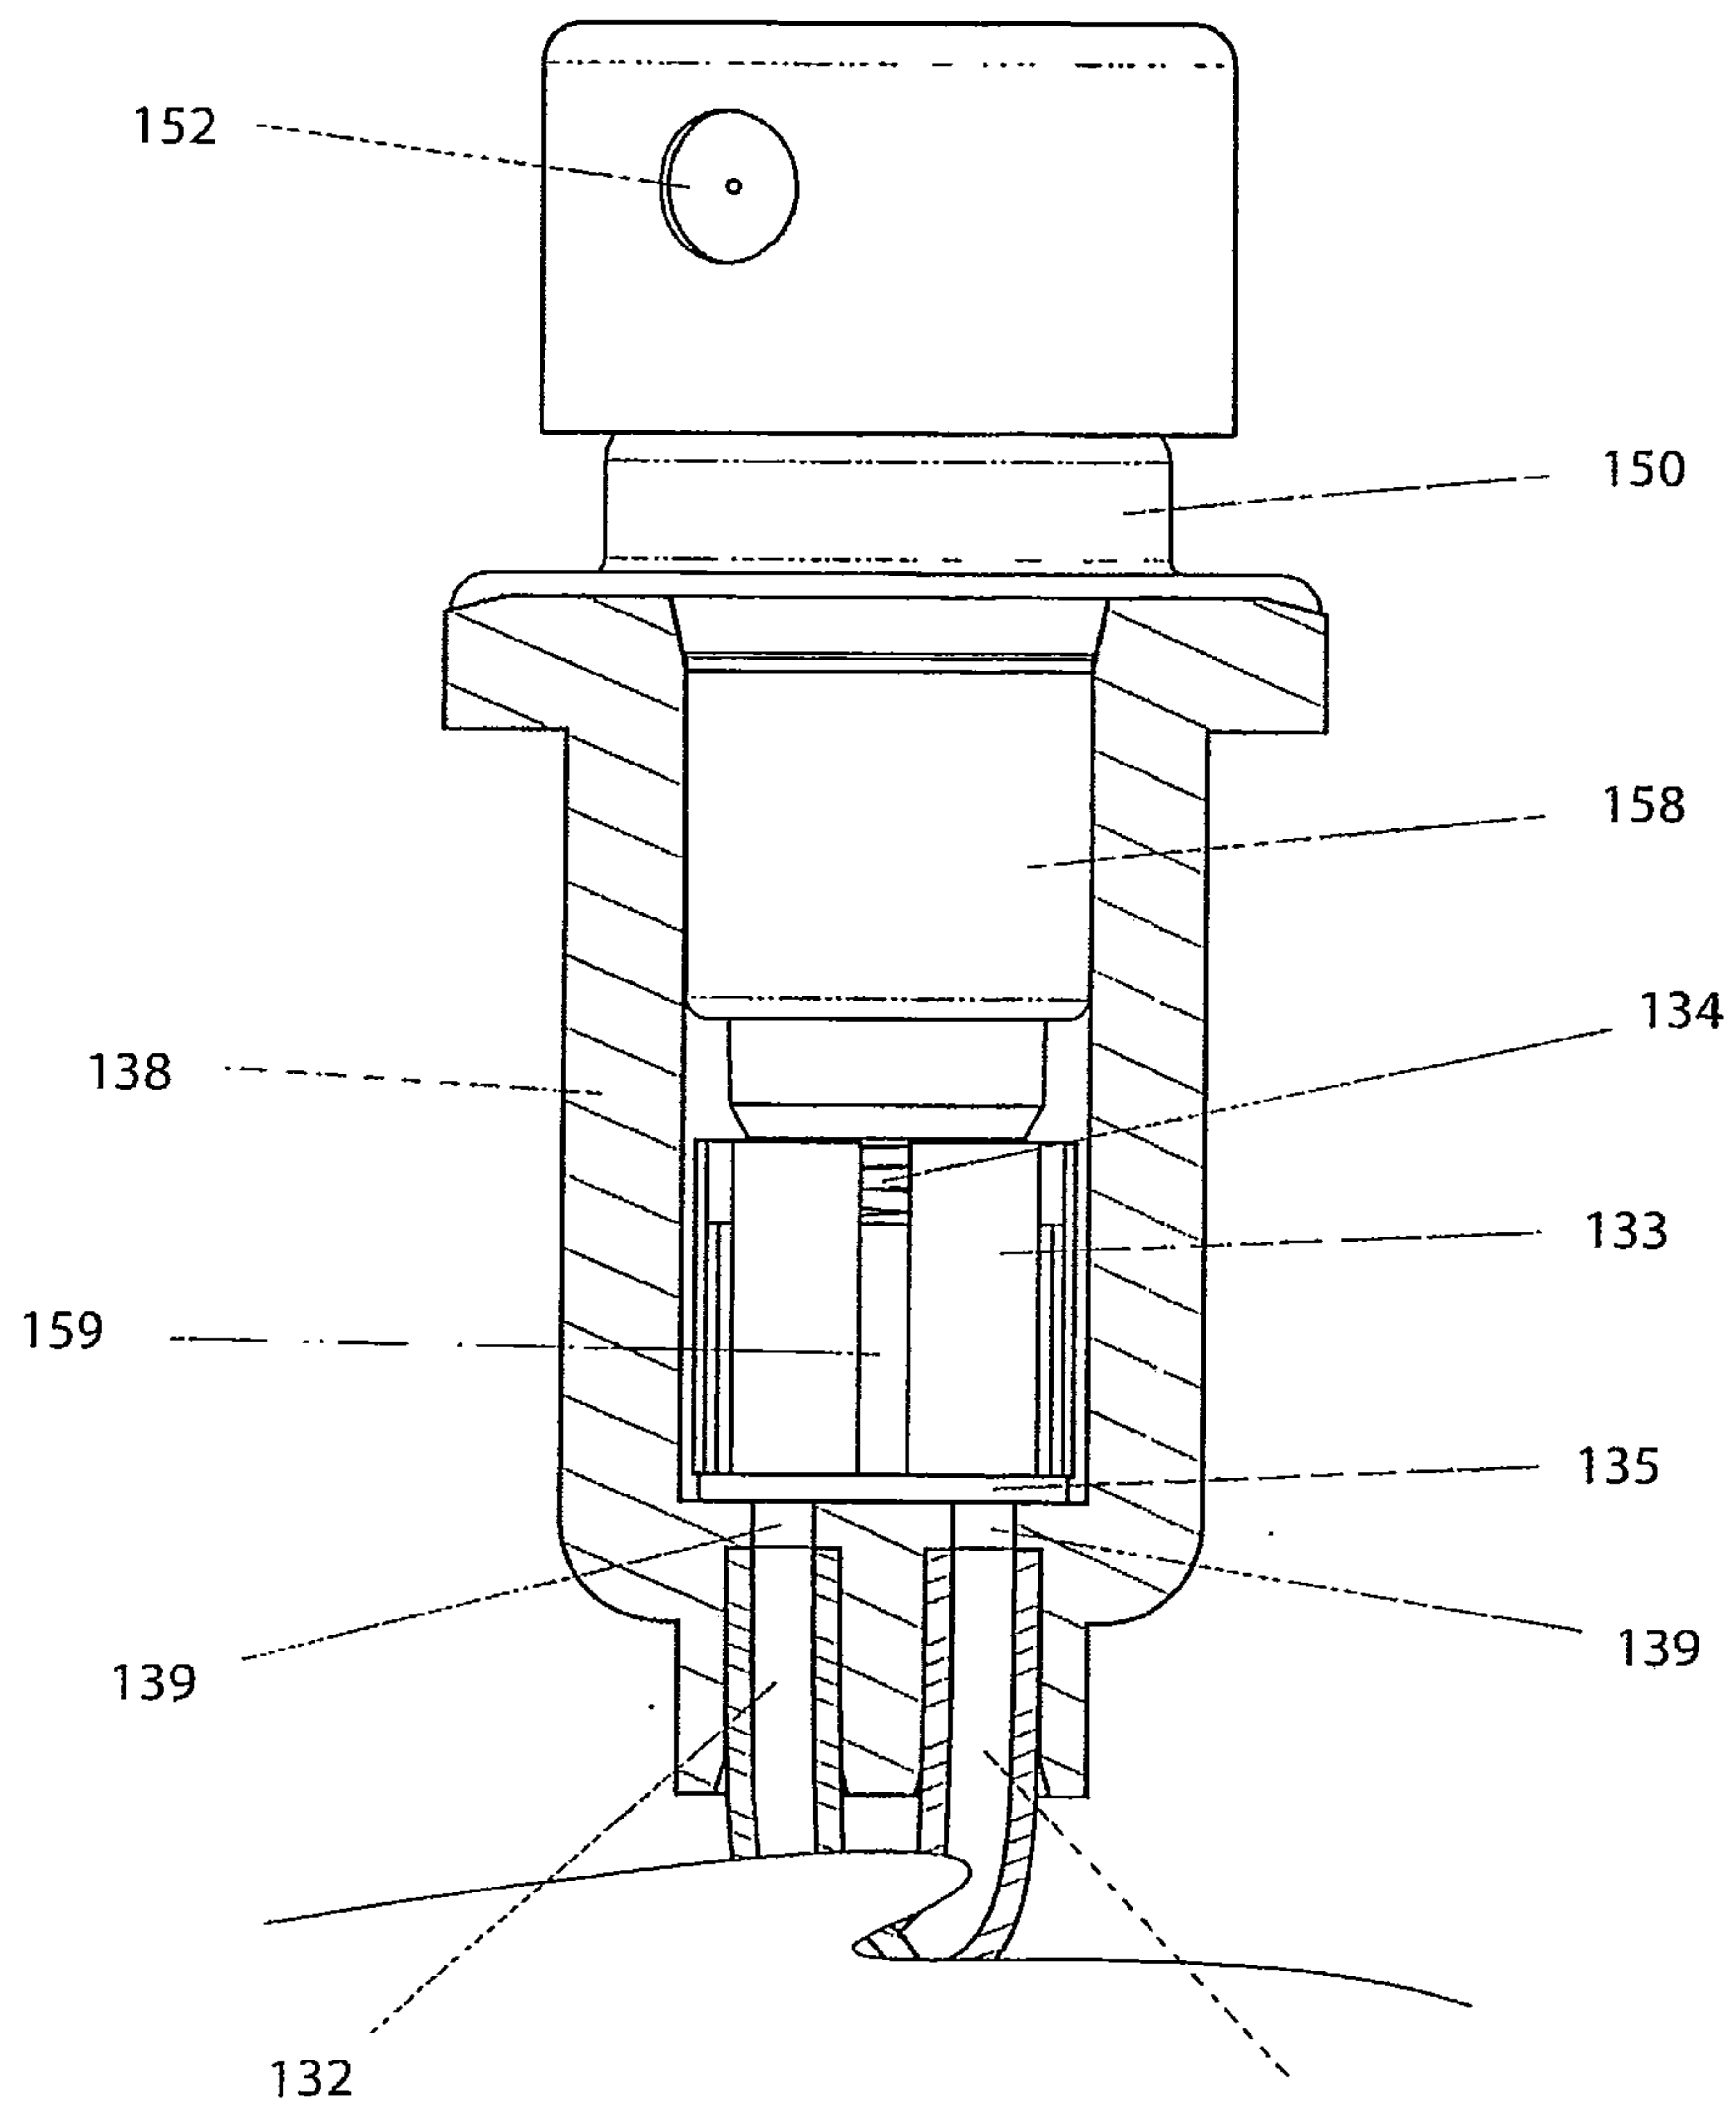


Fig. 7A

27/37

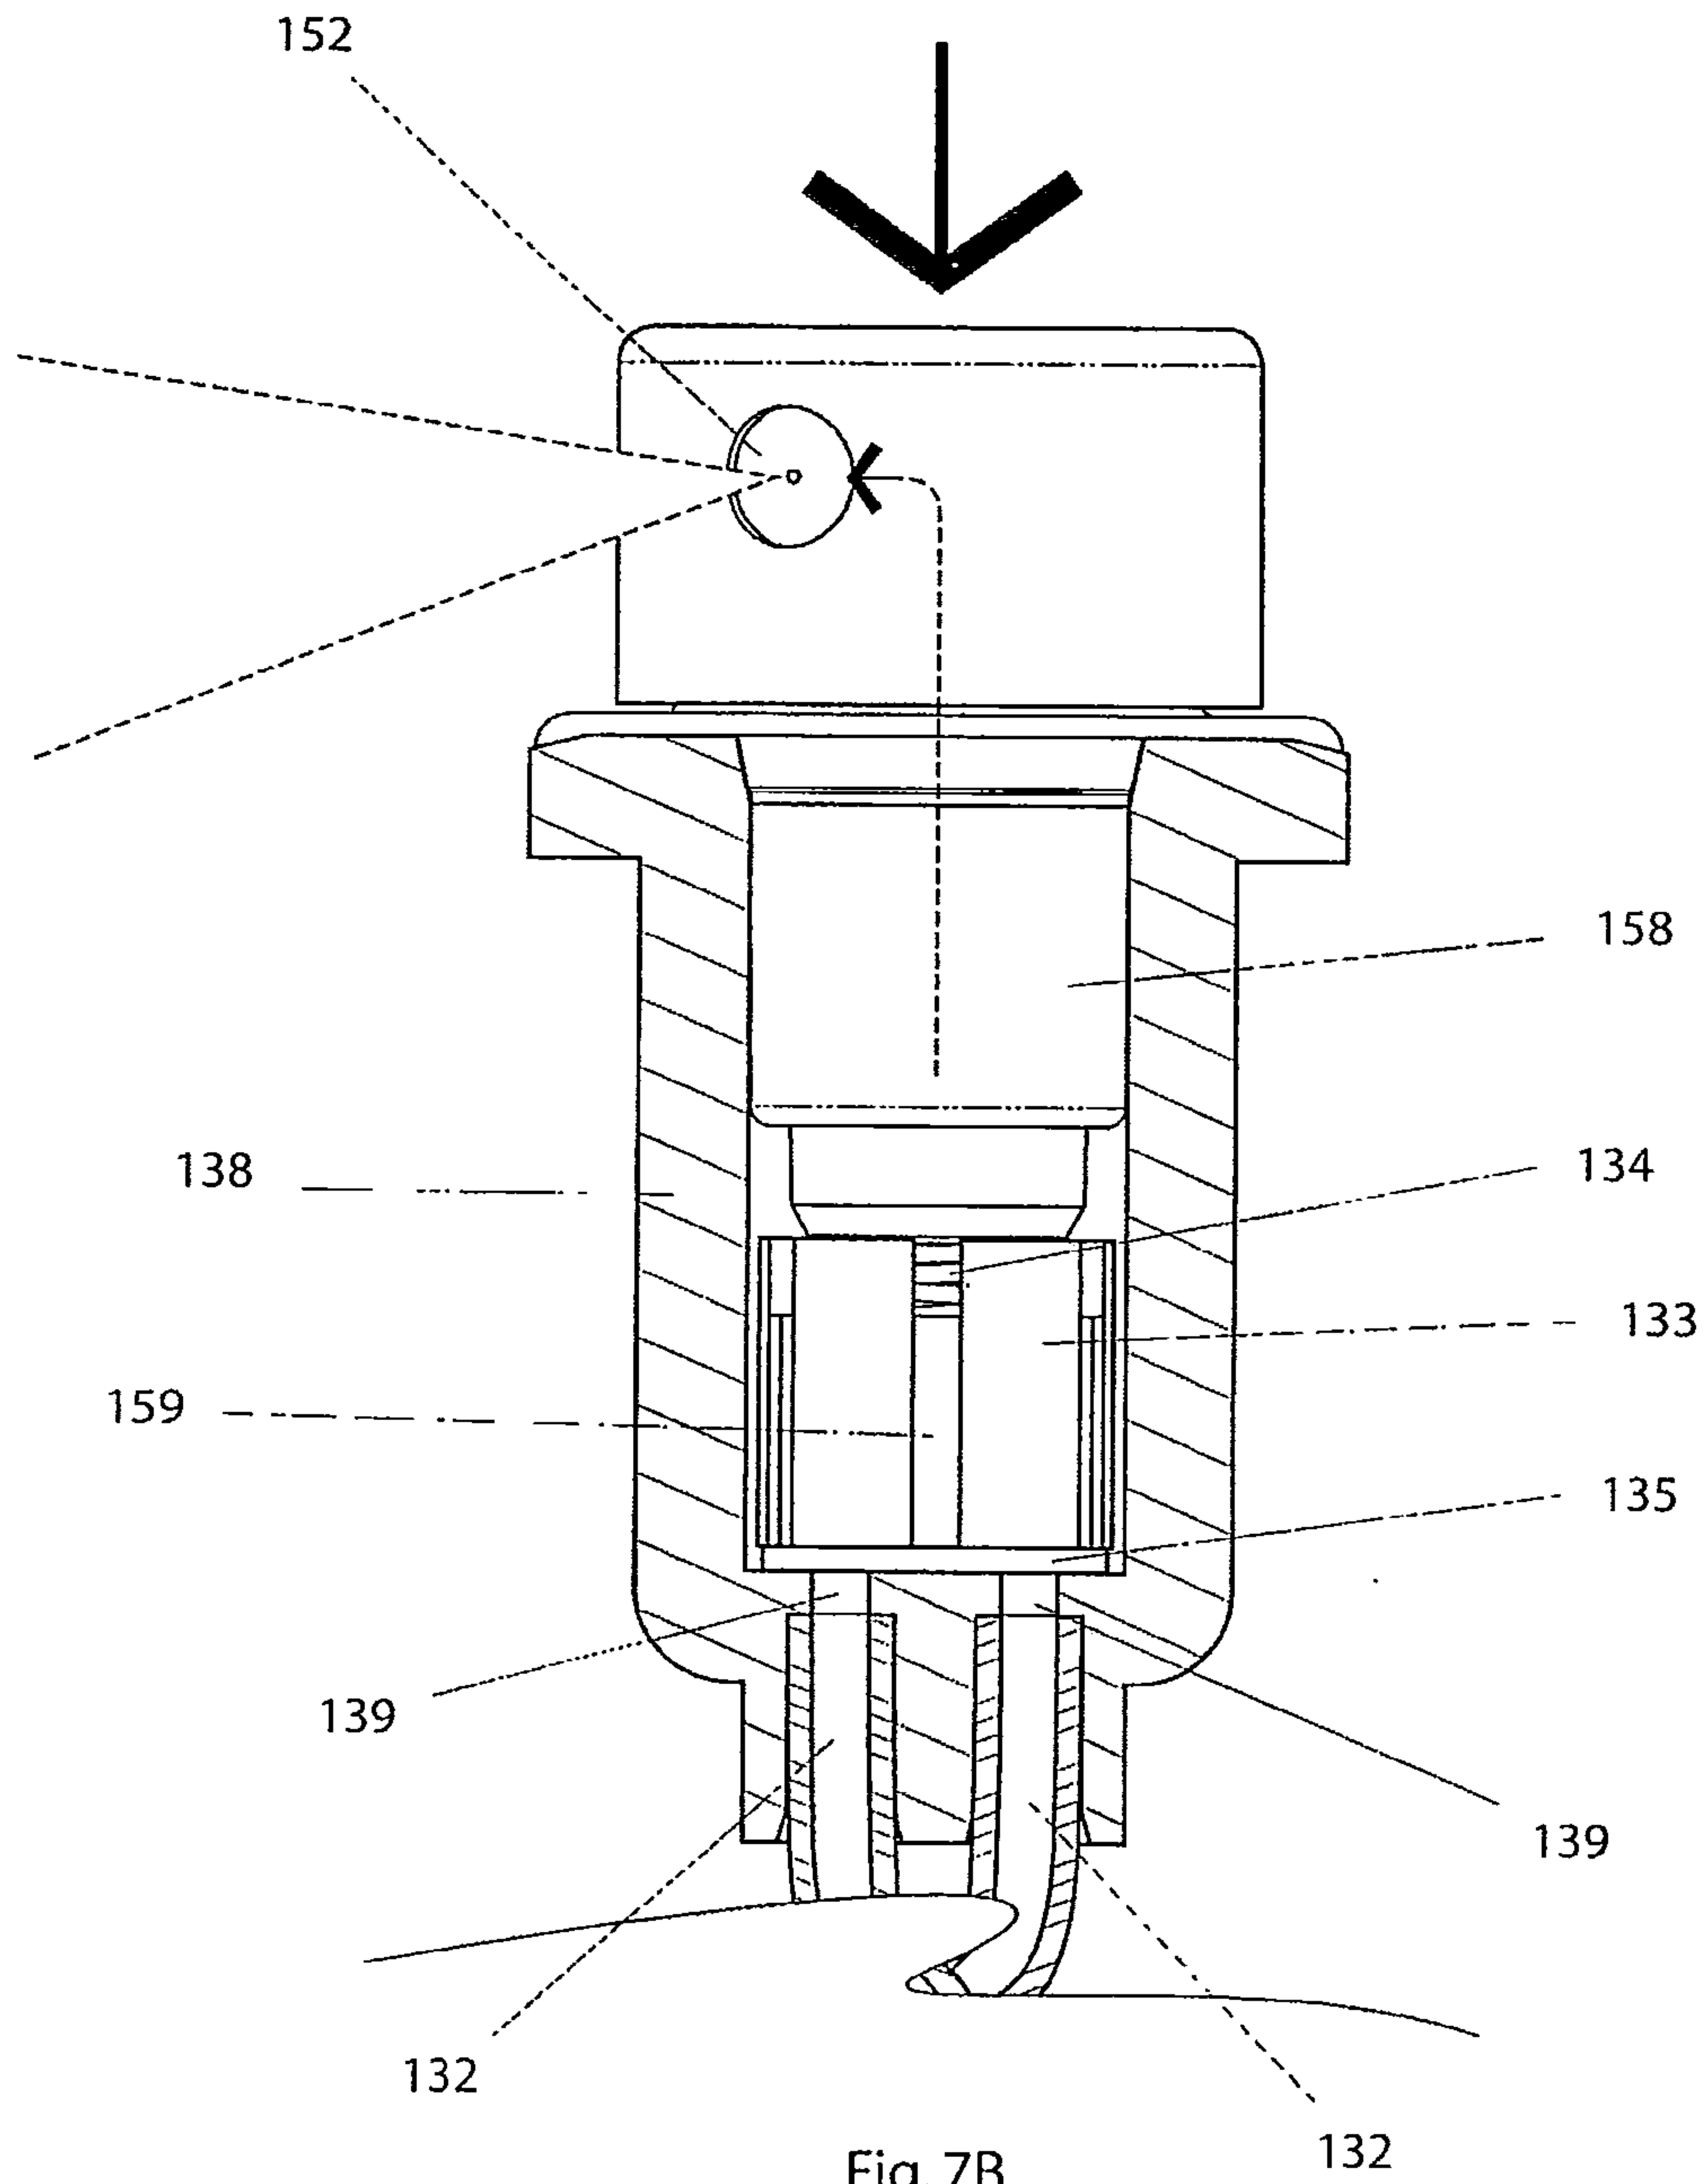


Fig. 7B

28/37



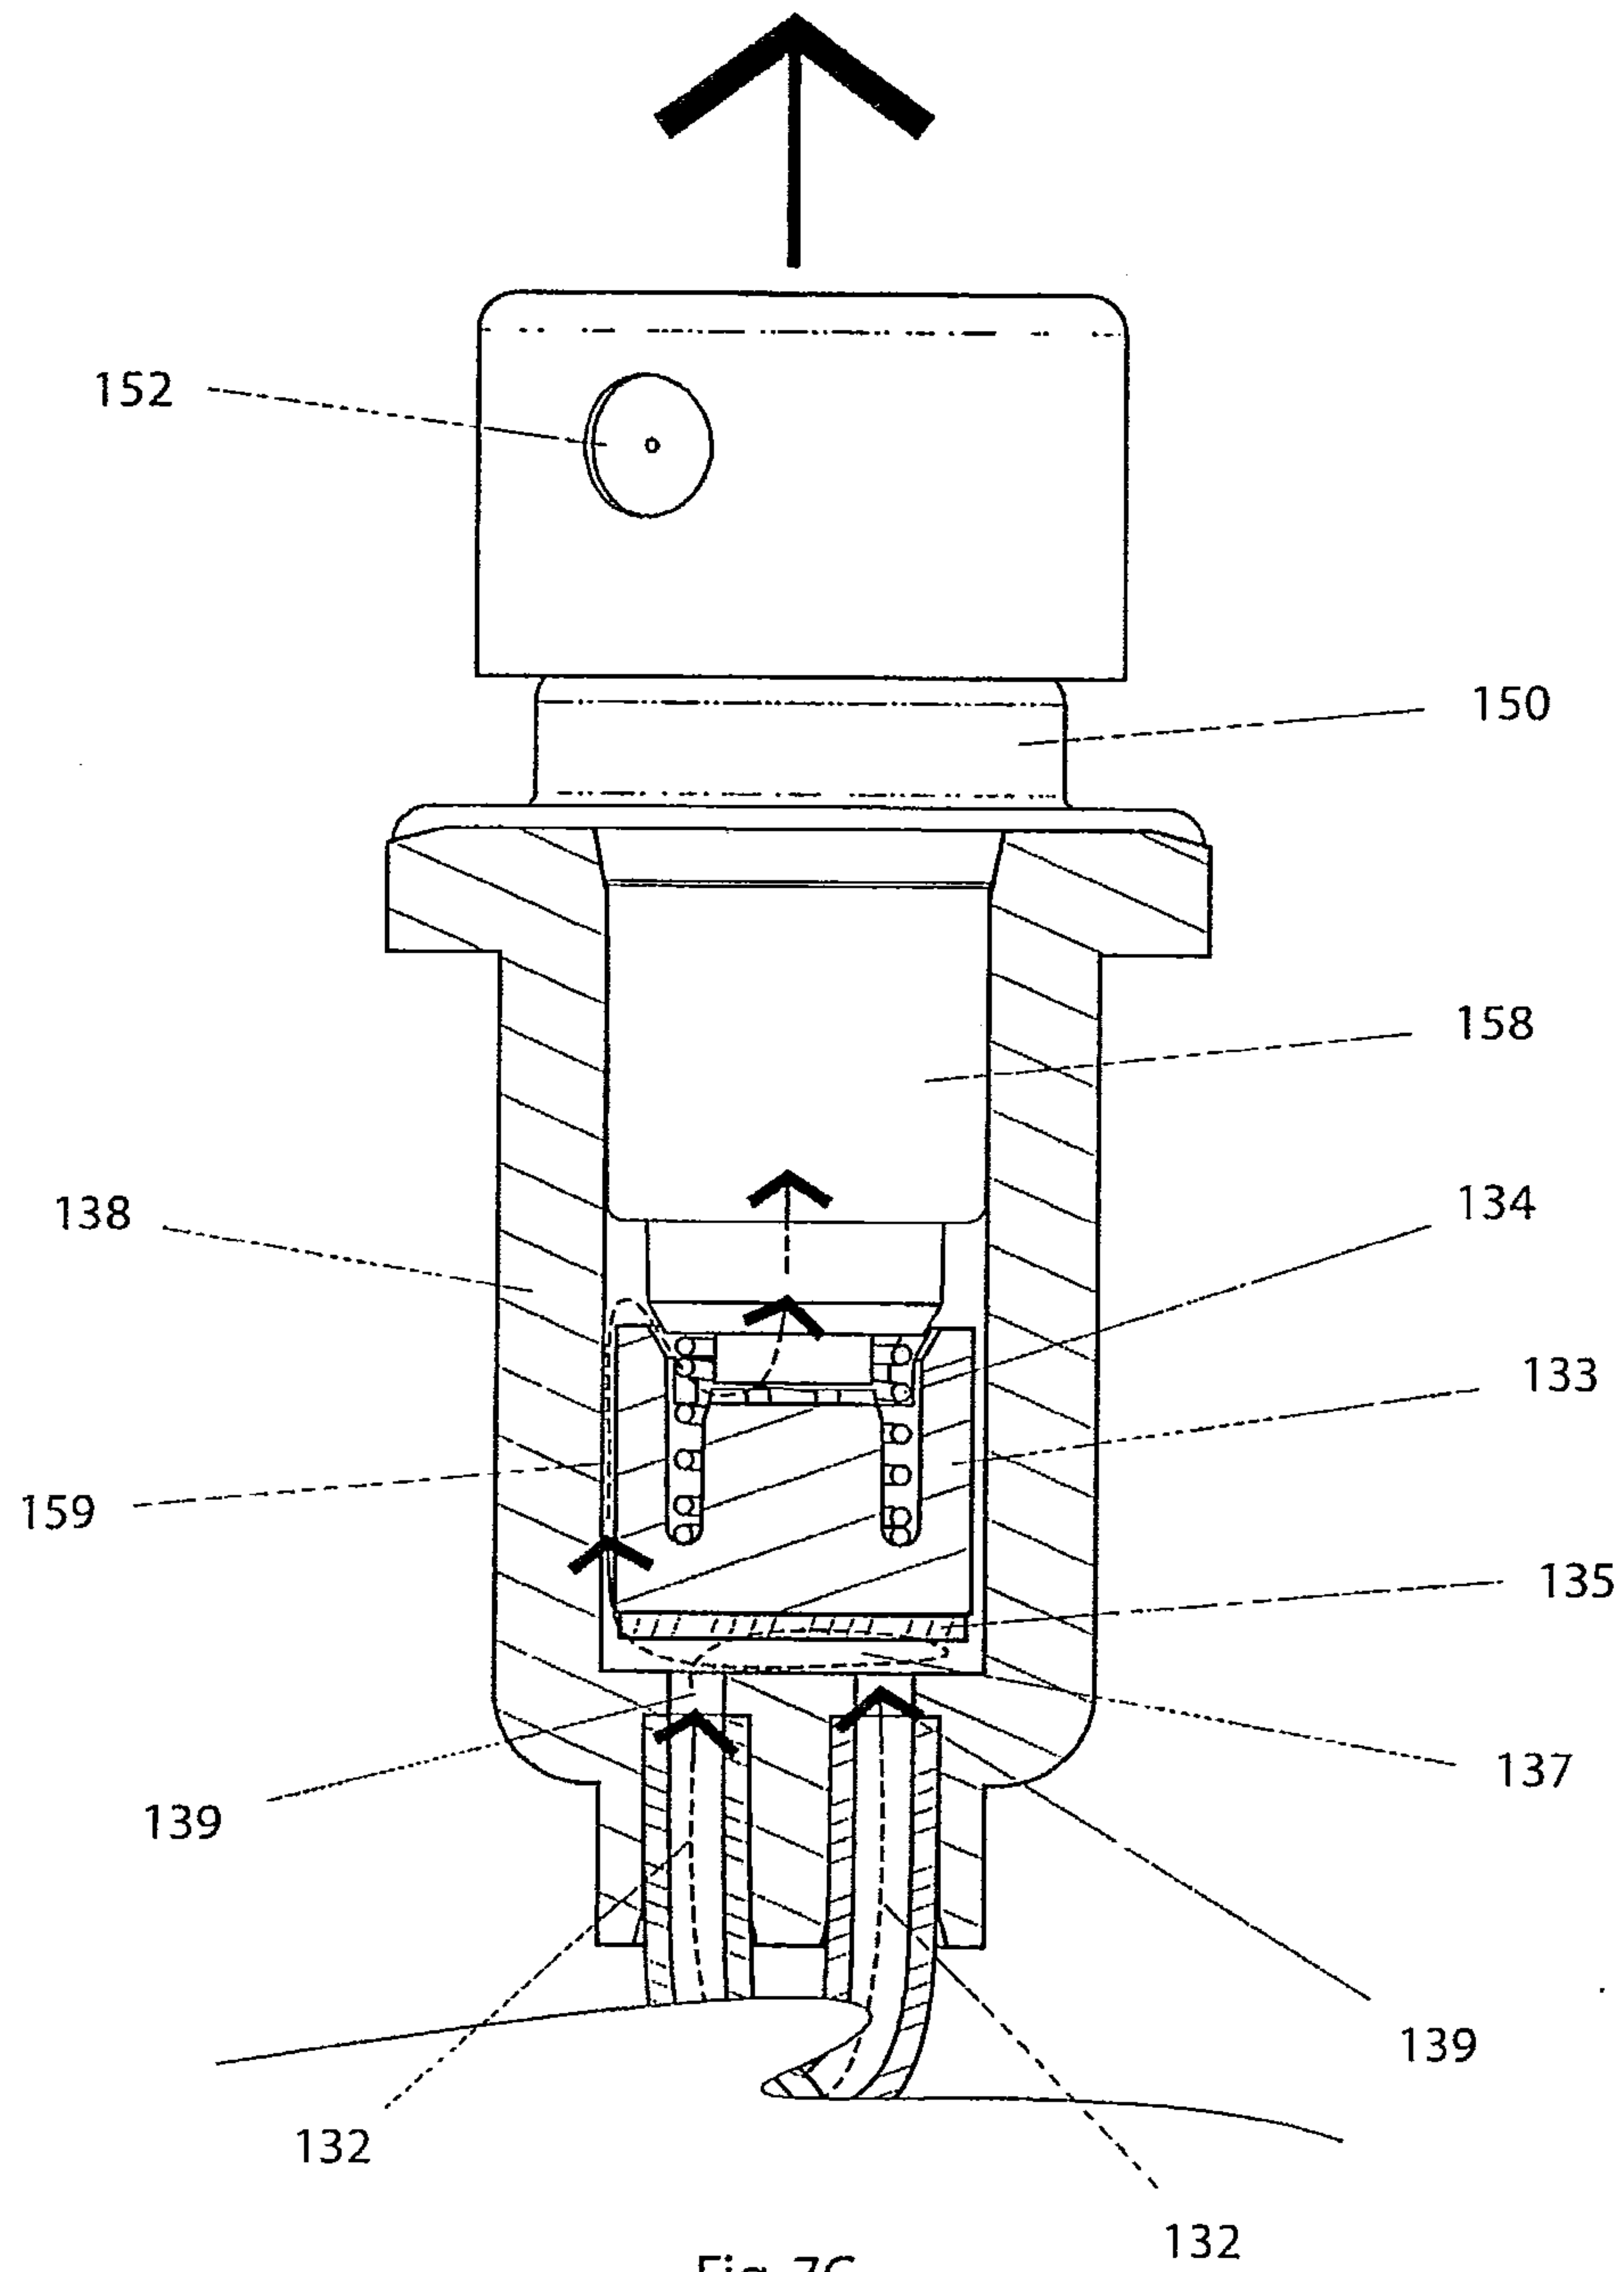


Fig. 7C

29/37

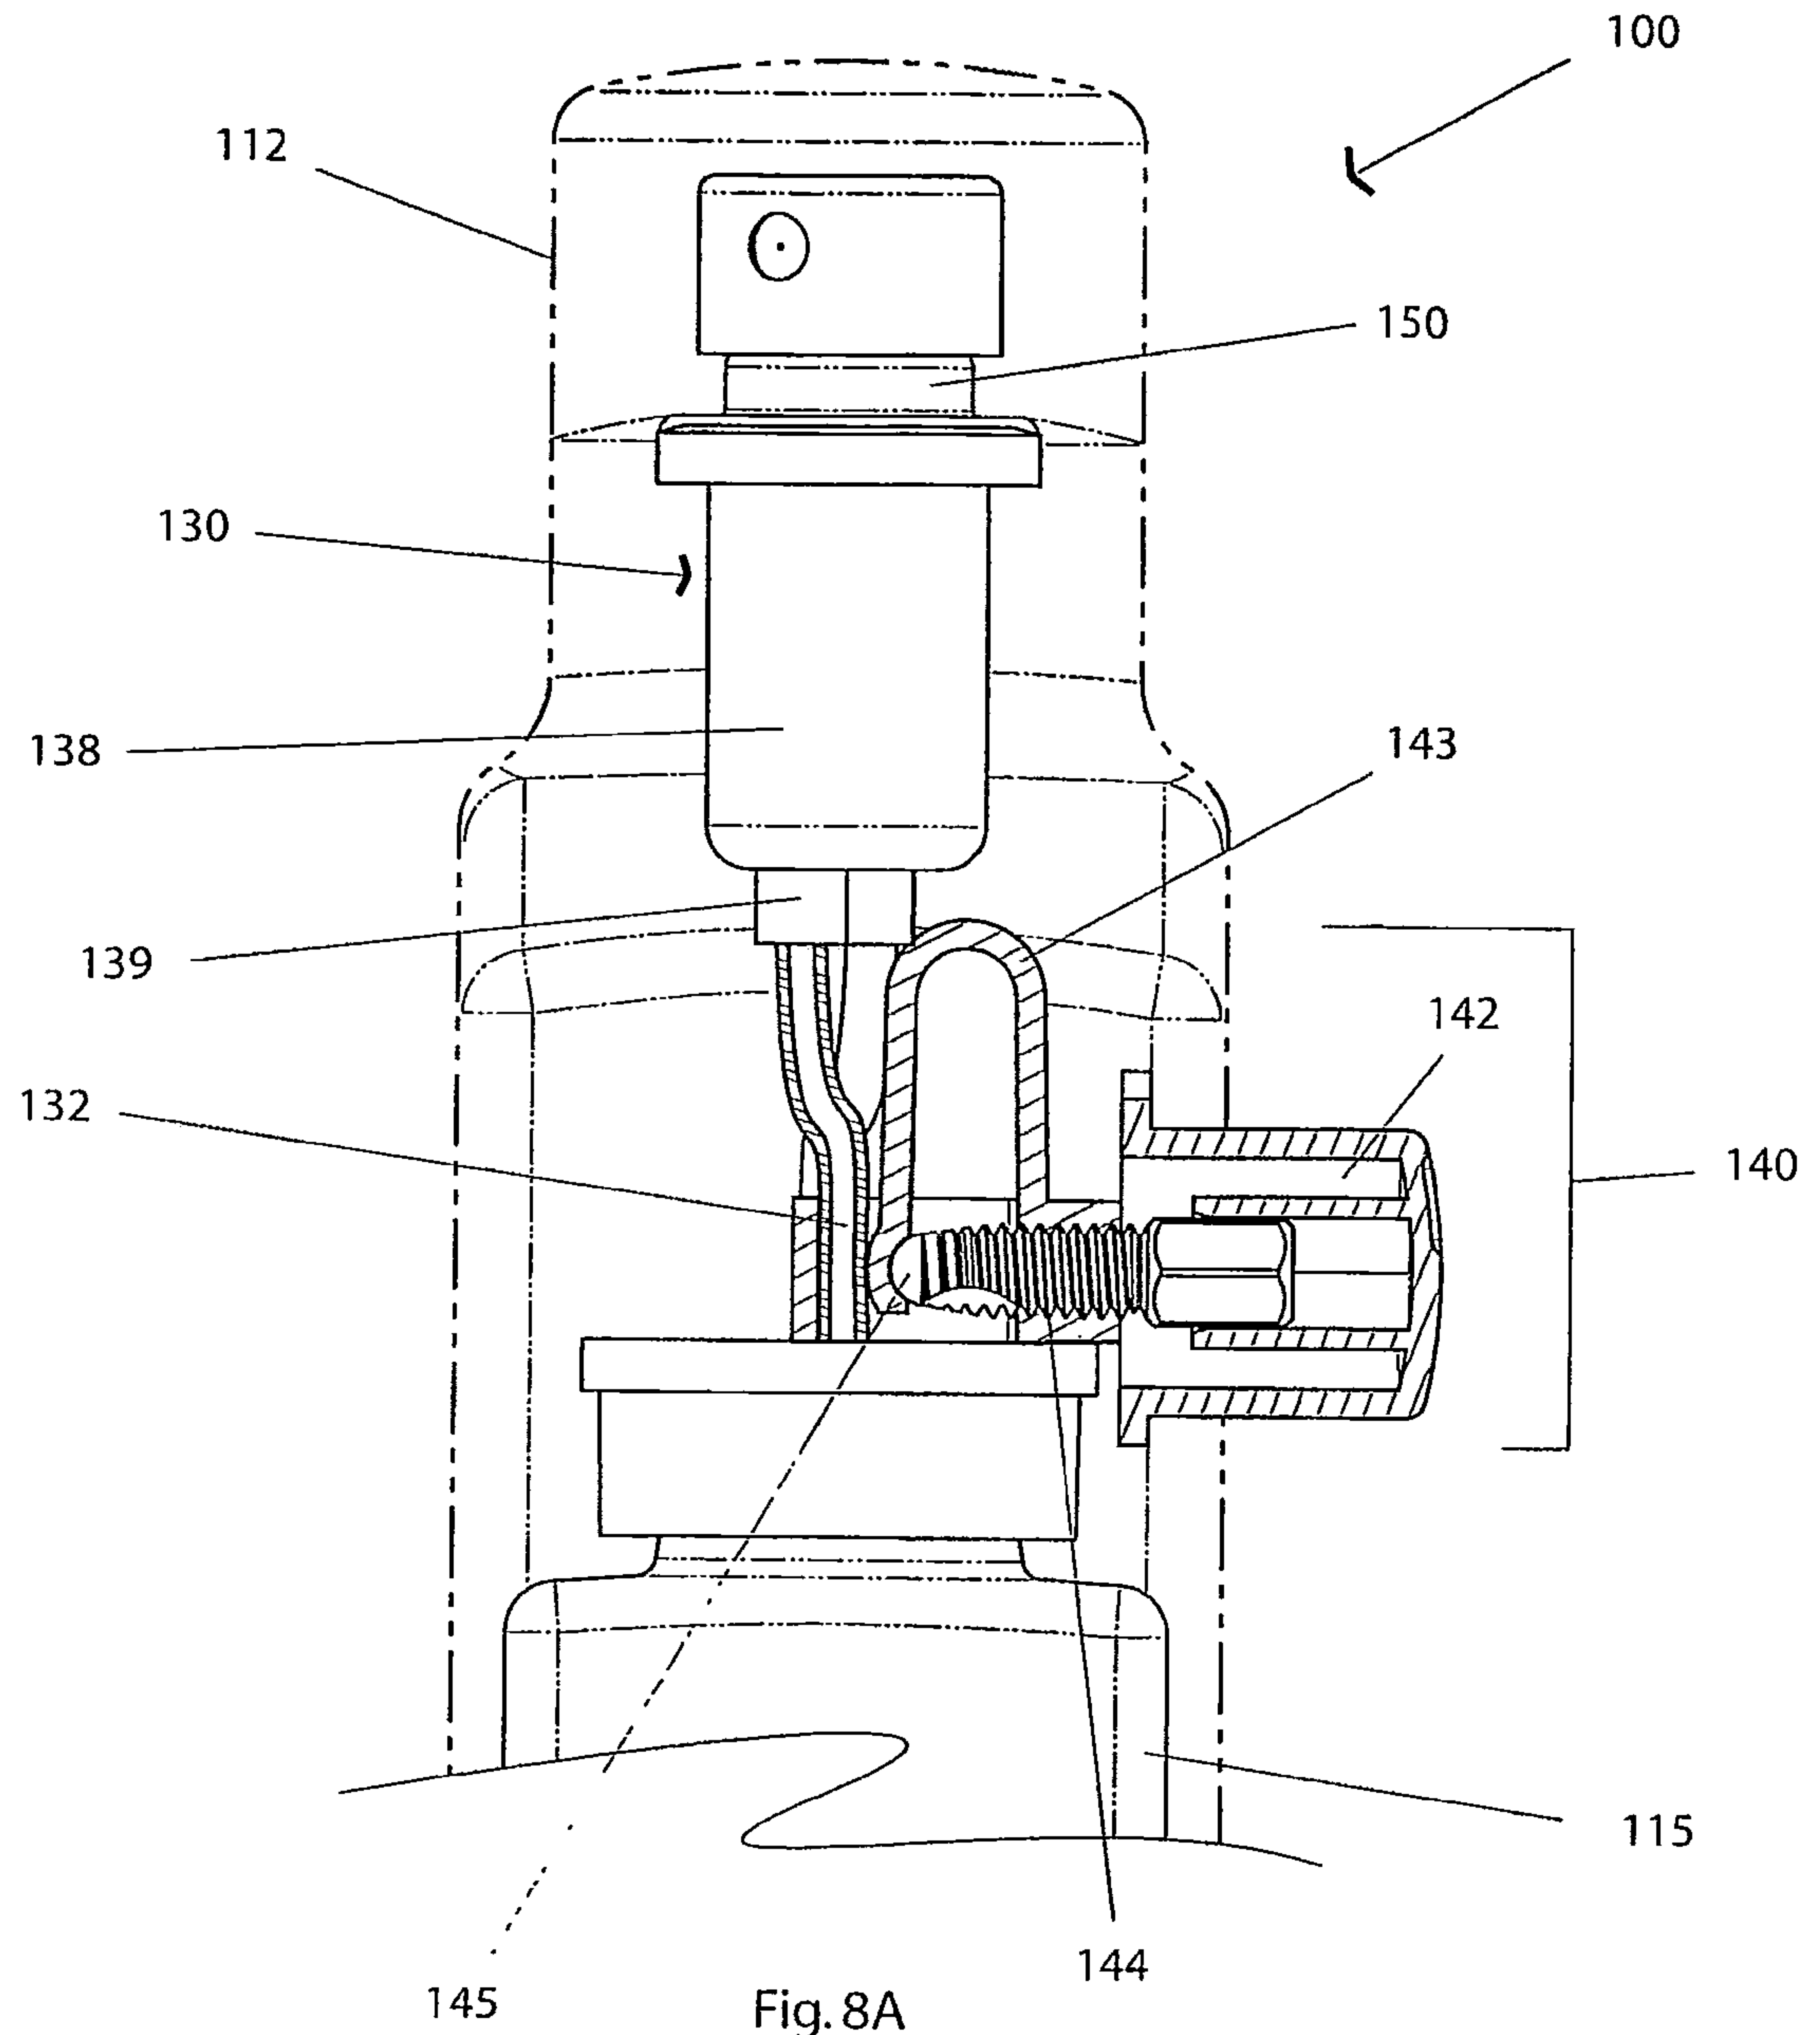

30/37

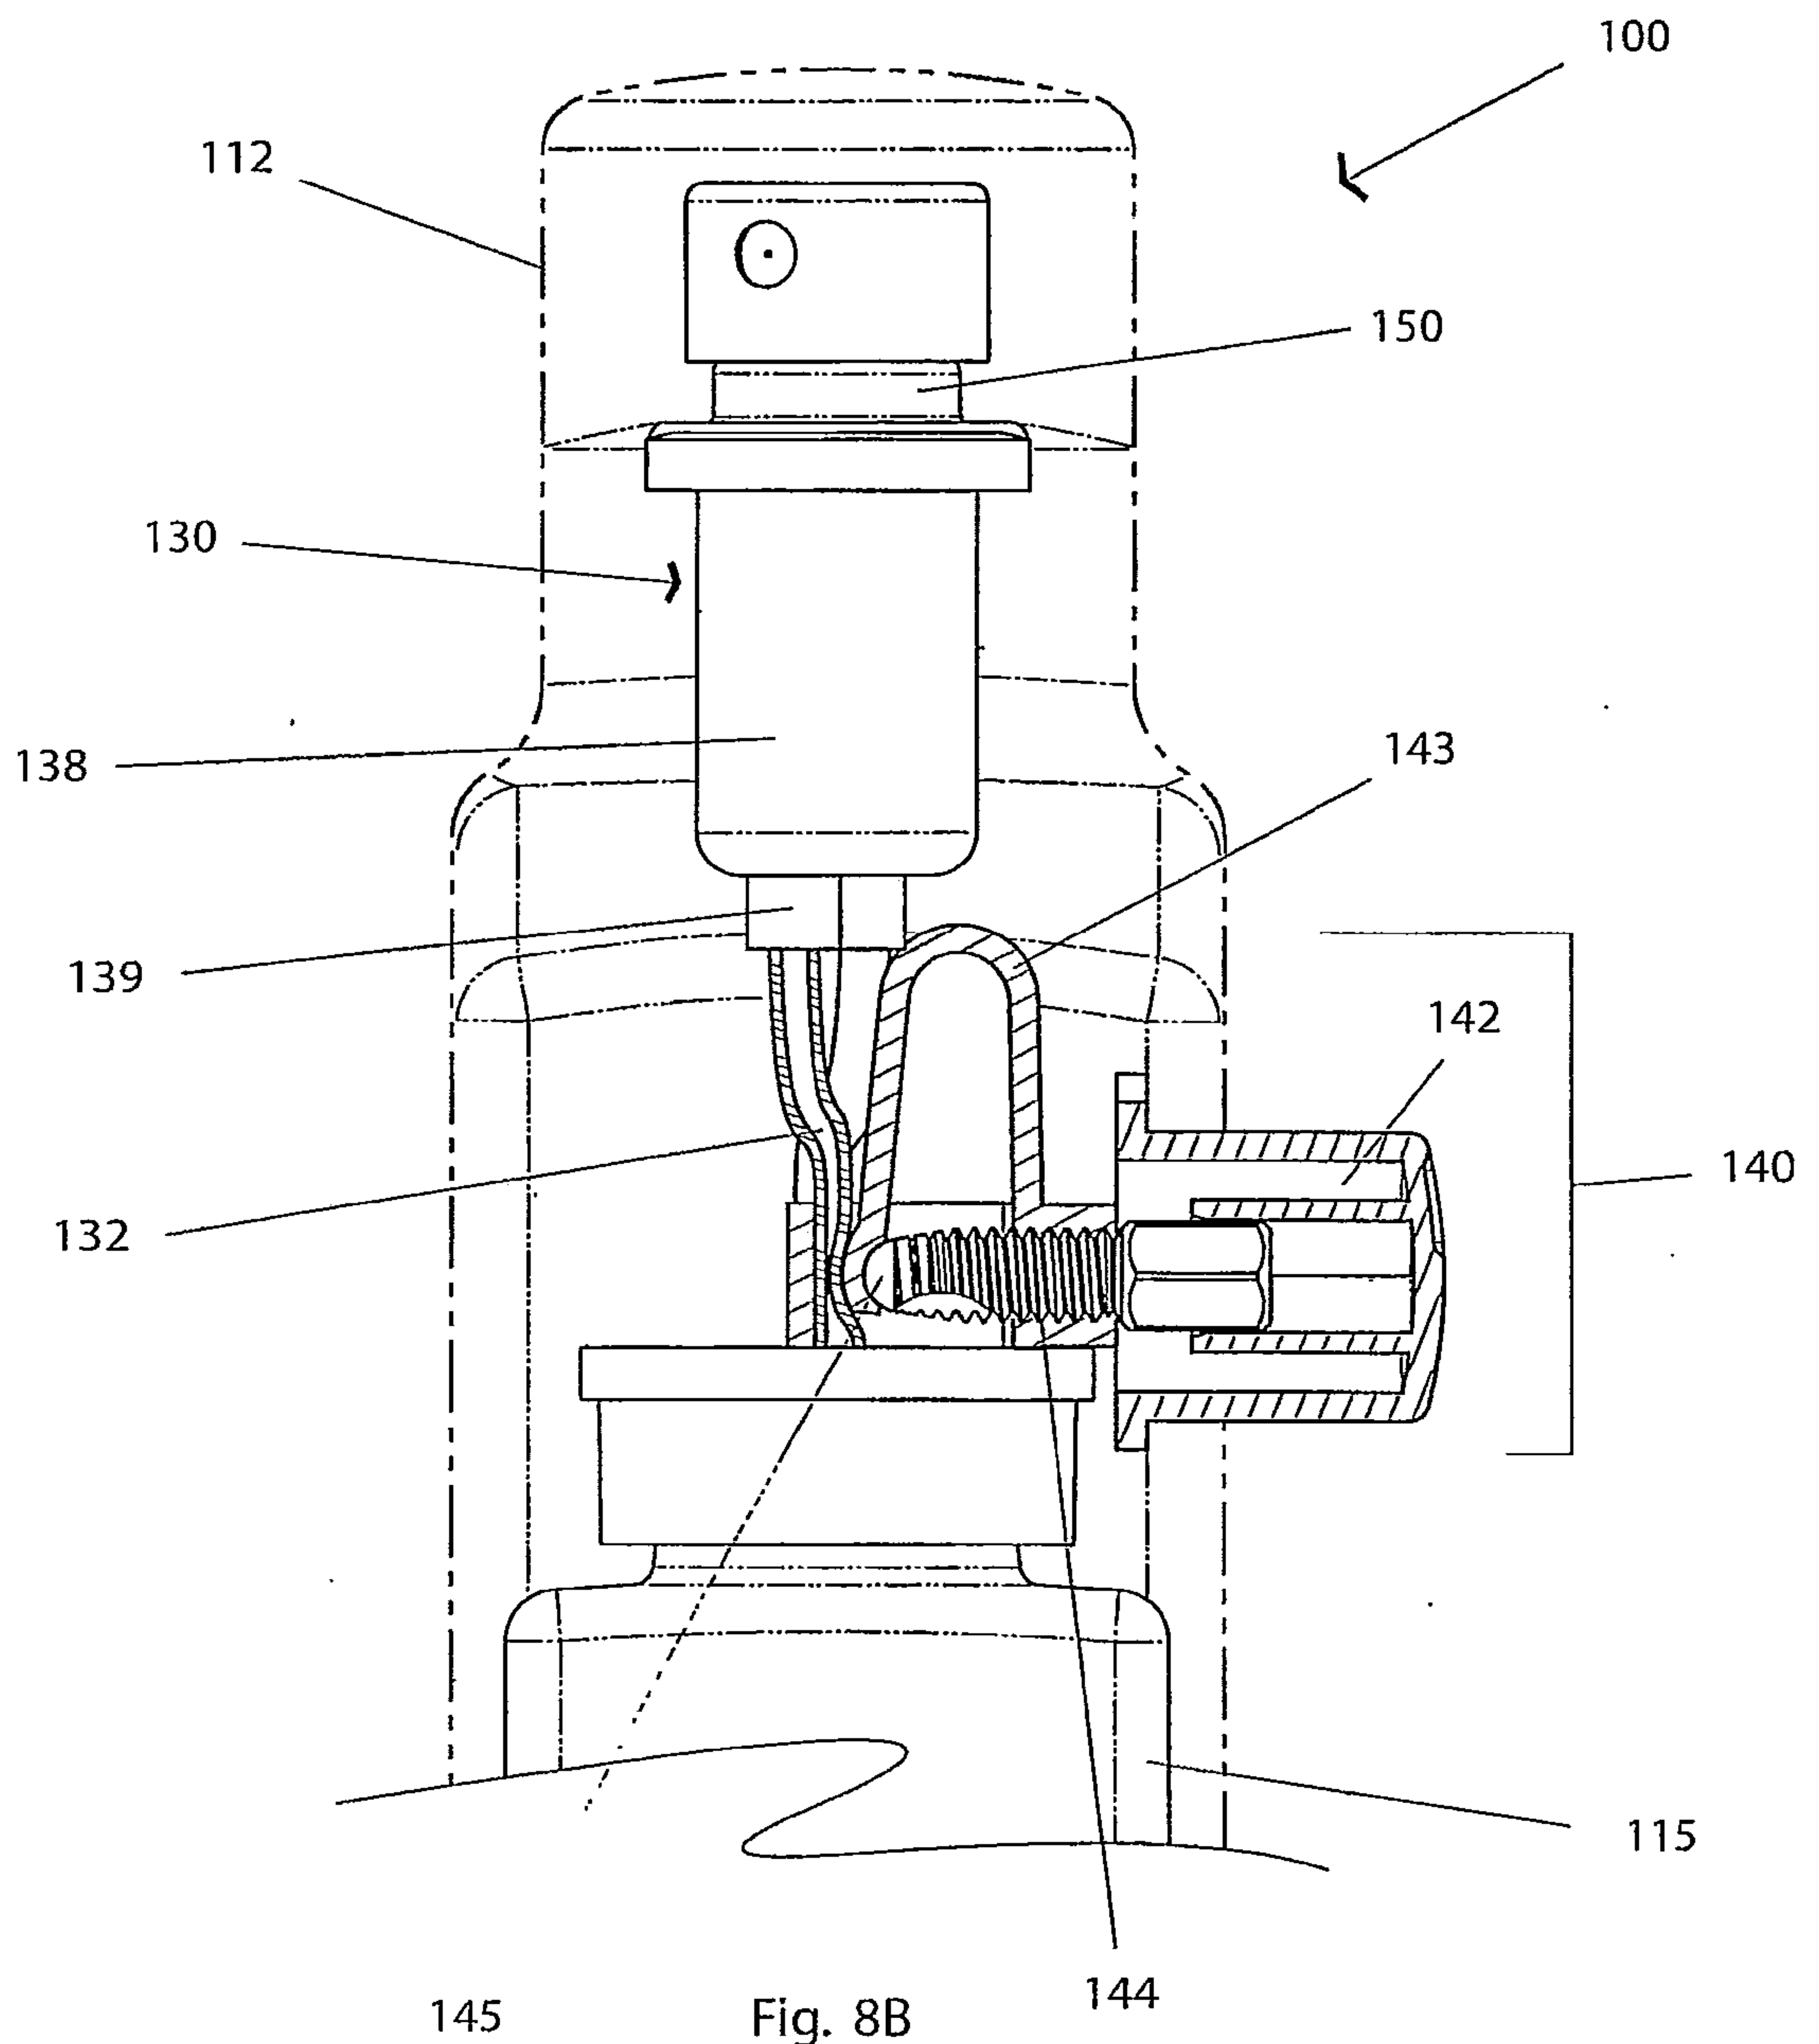

31/37

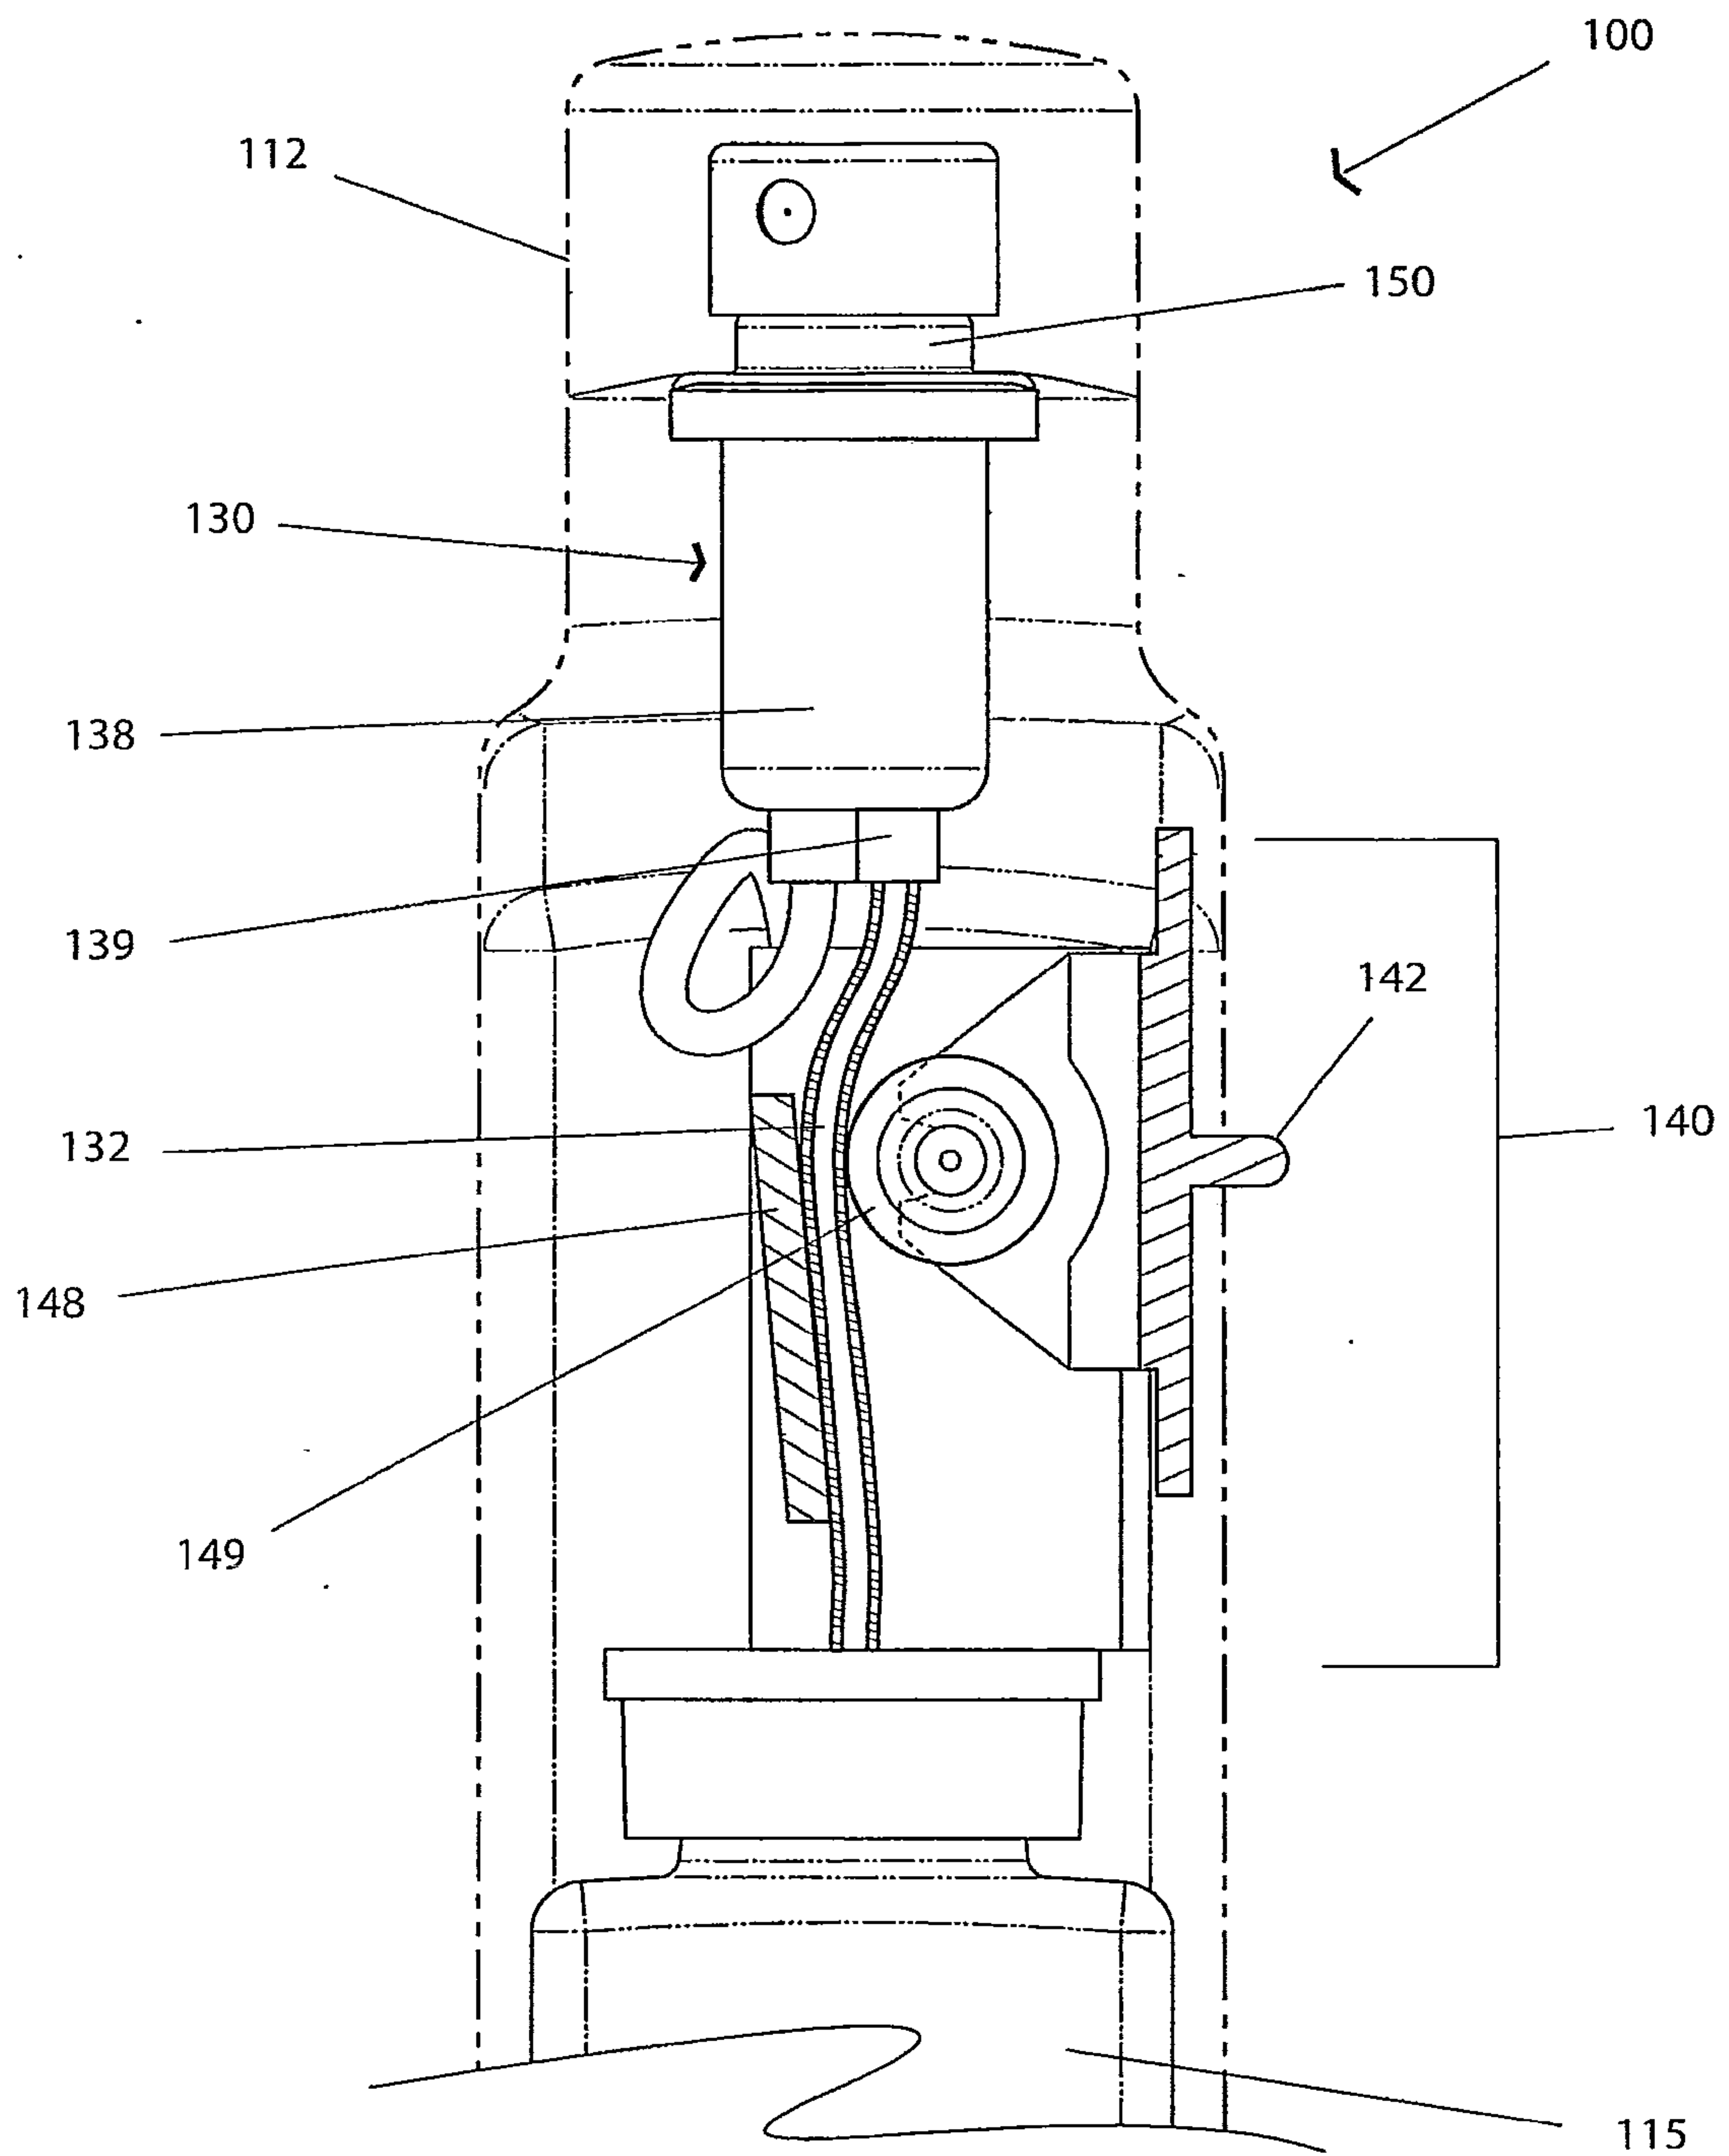


Fig. 9A

32/37

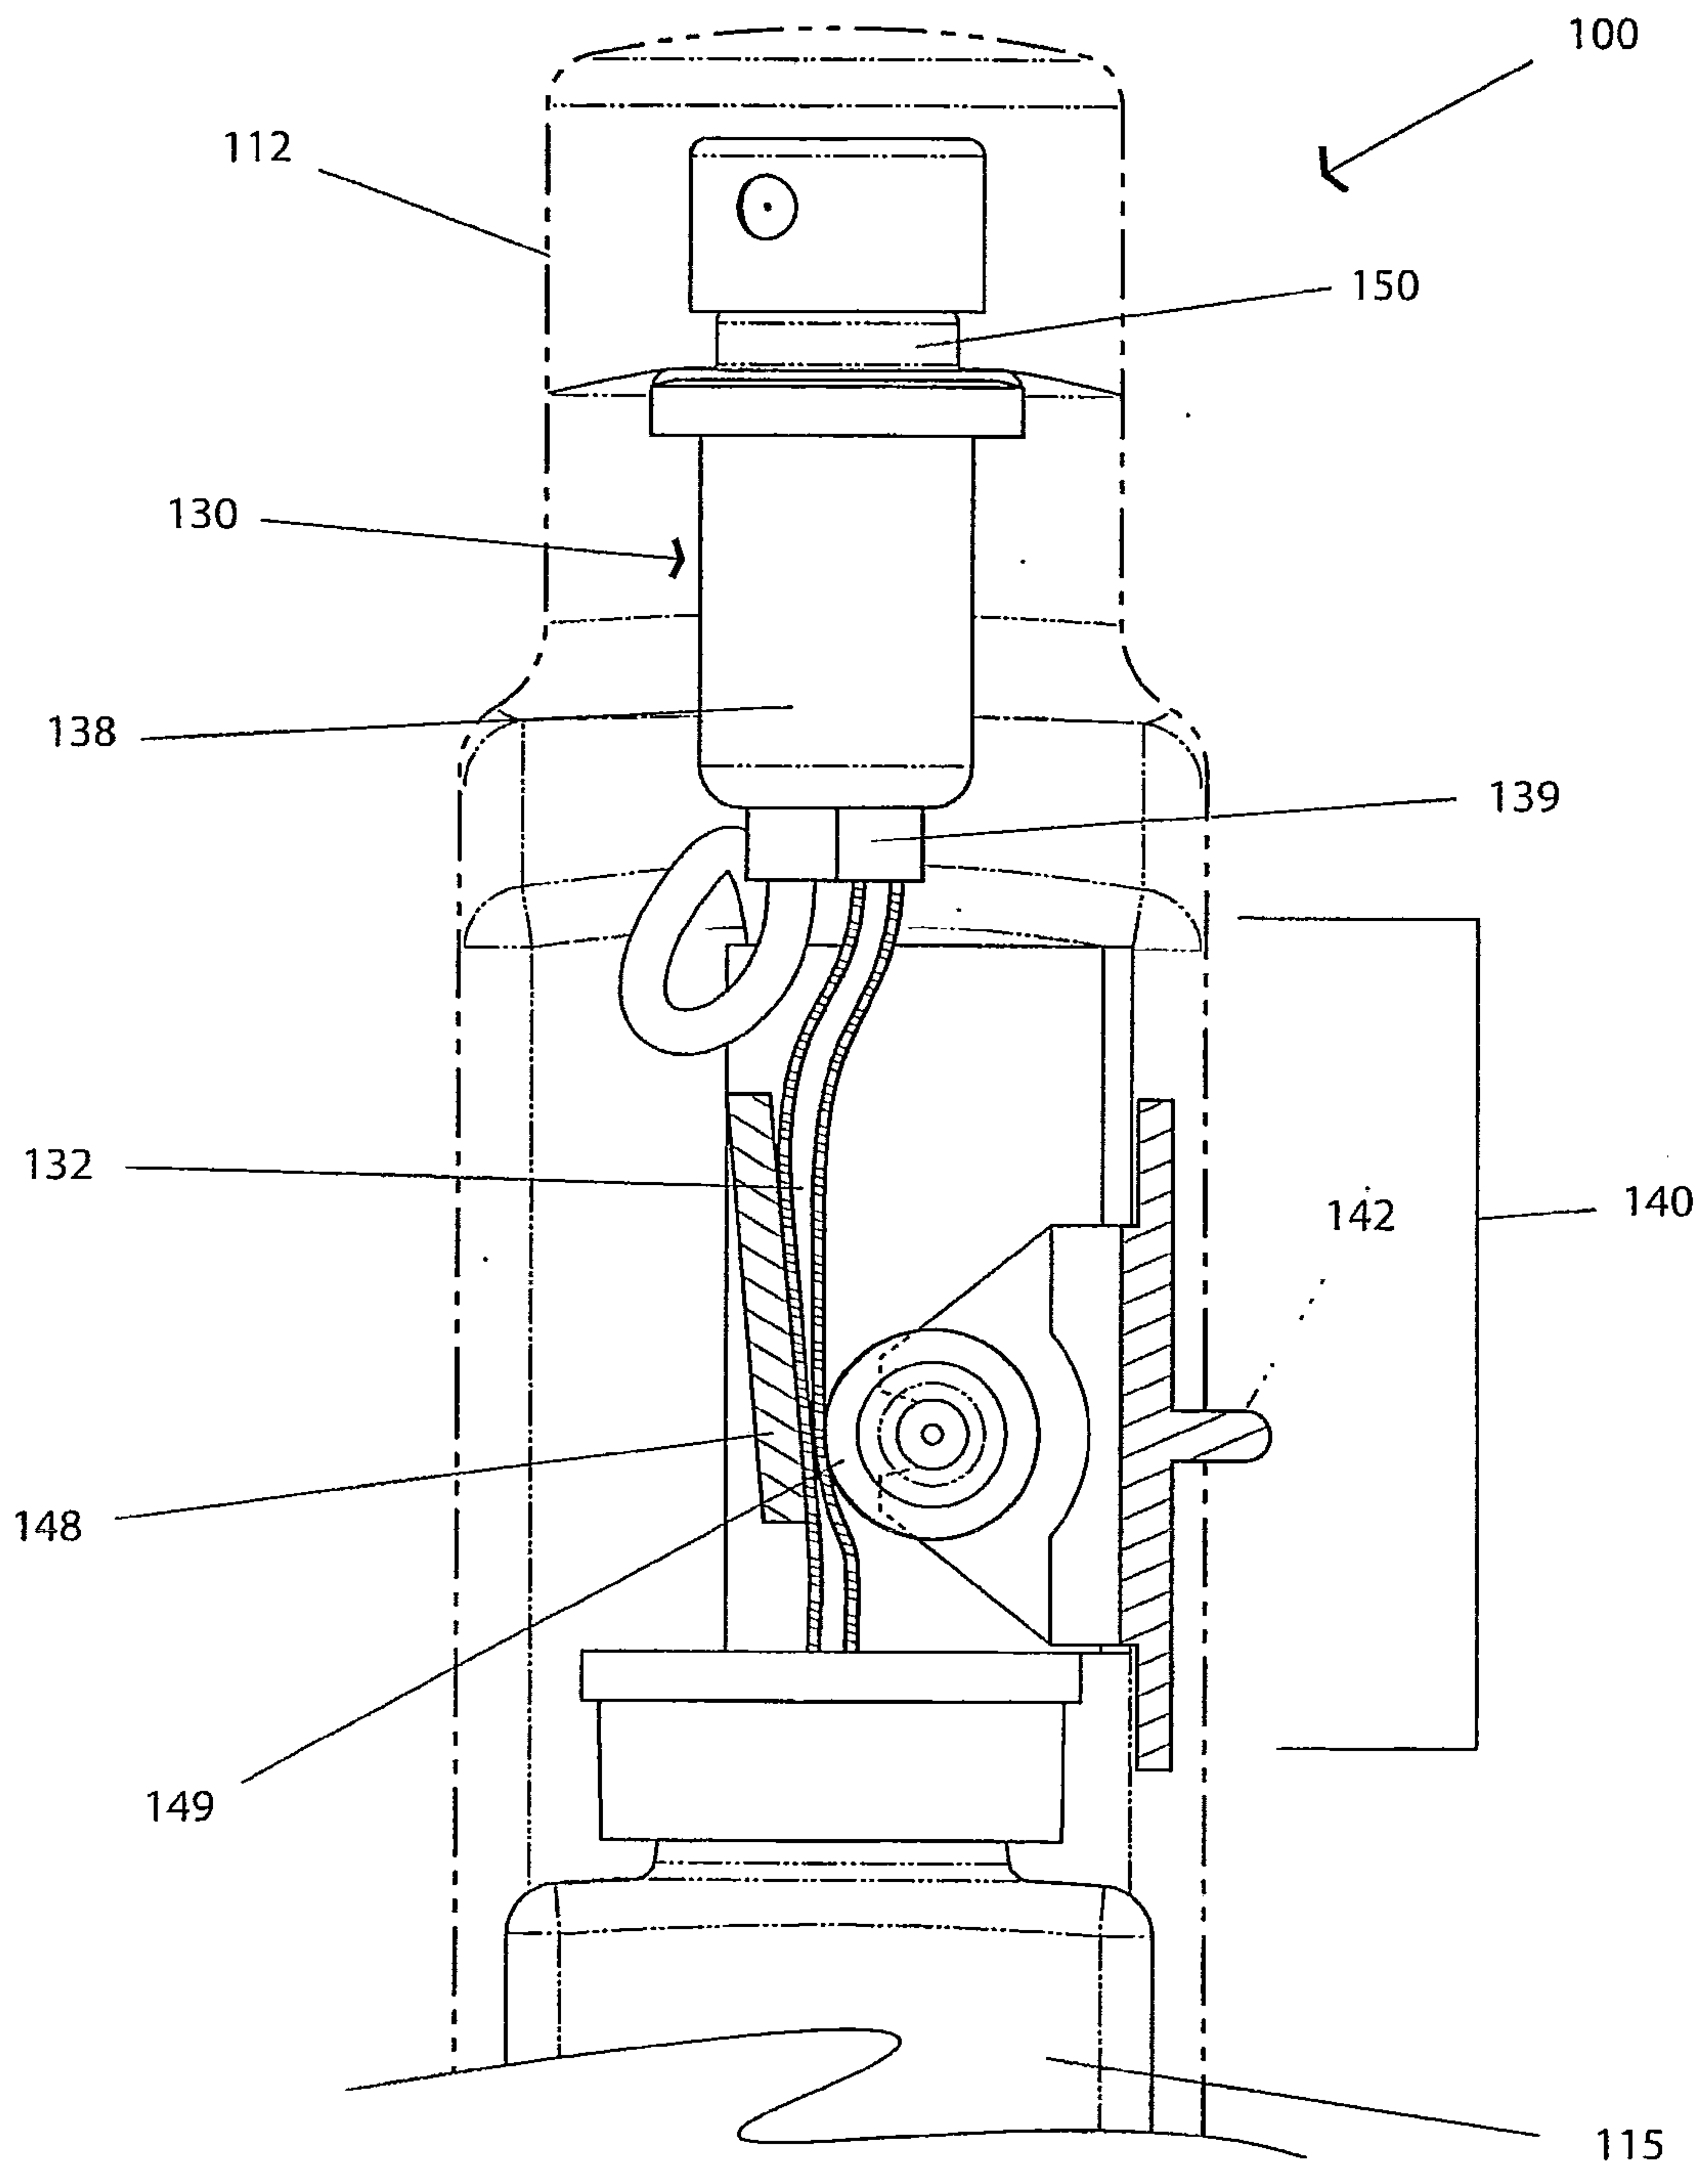


Fig. 9B

33/37


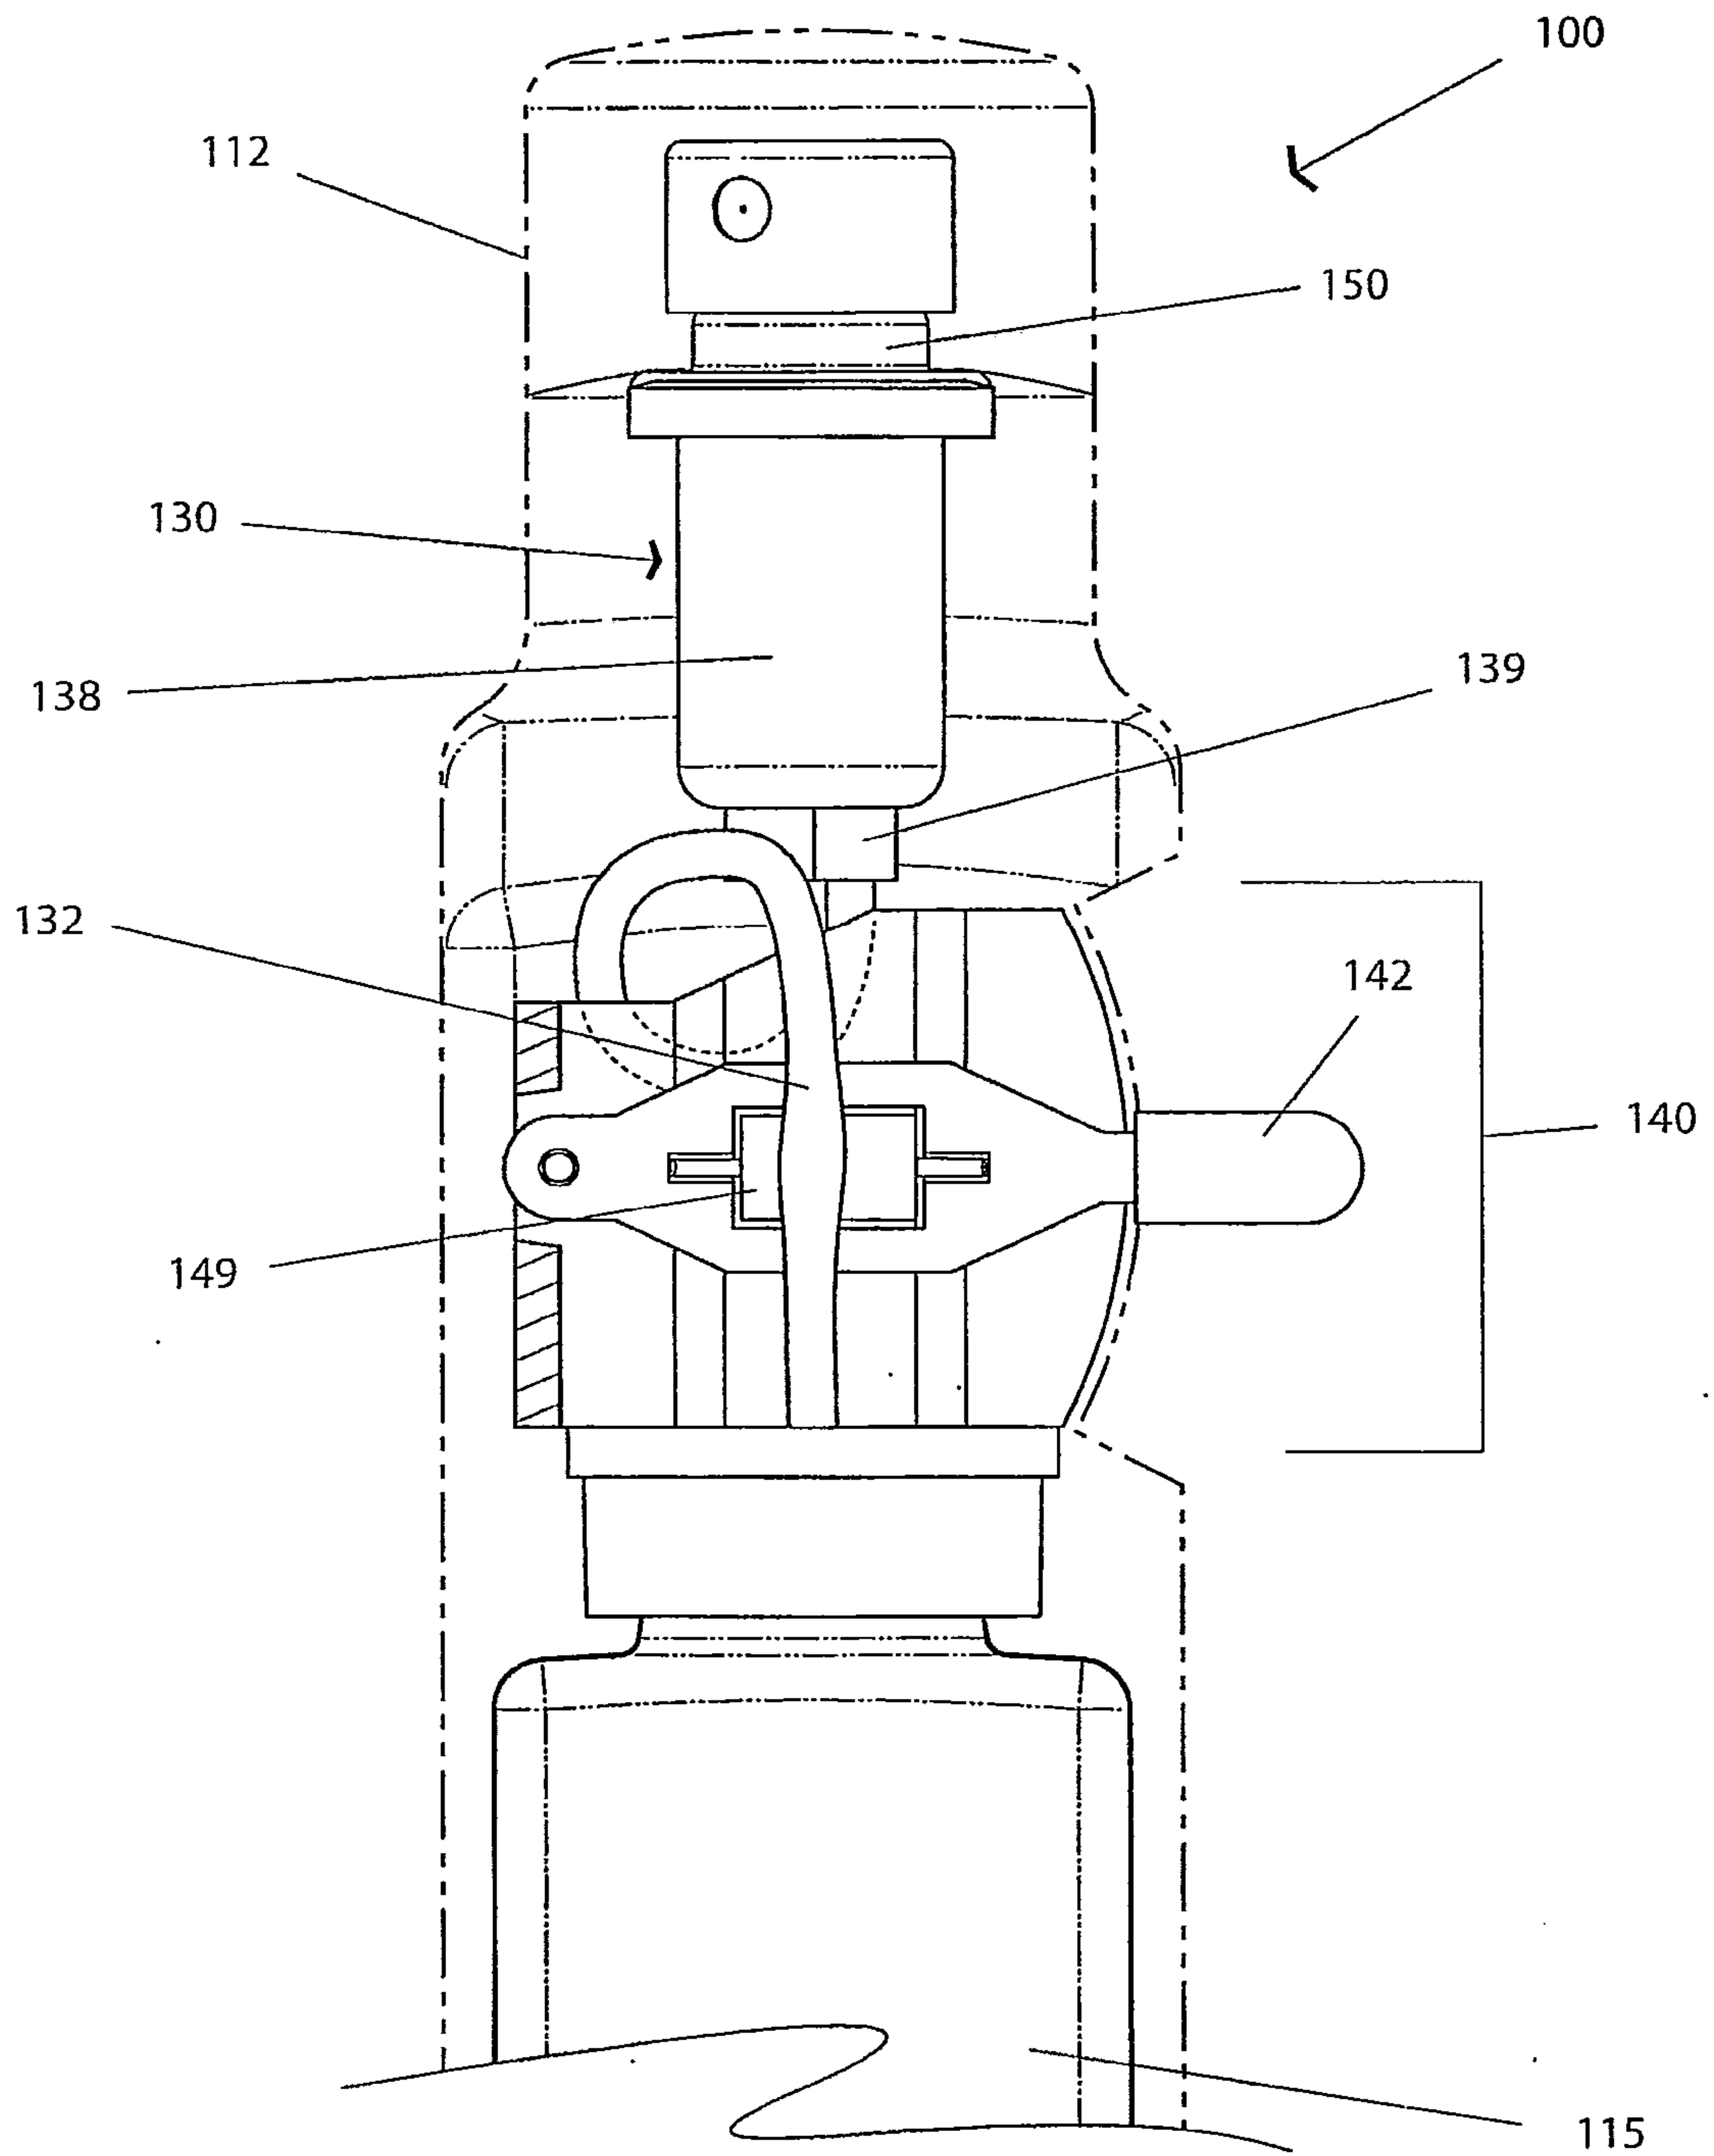


Fig. 10A

34/37

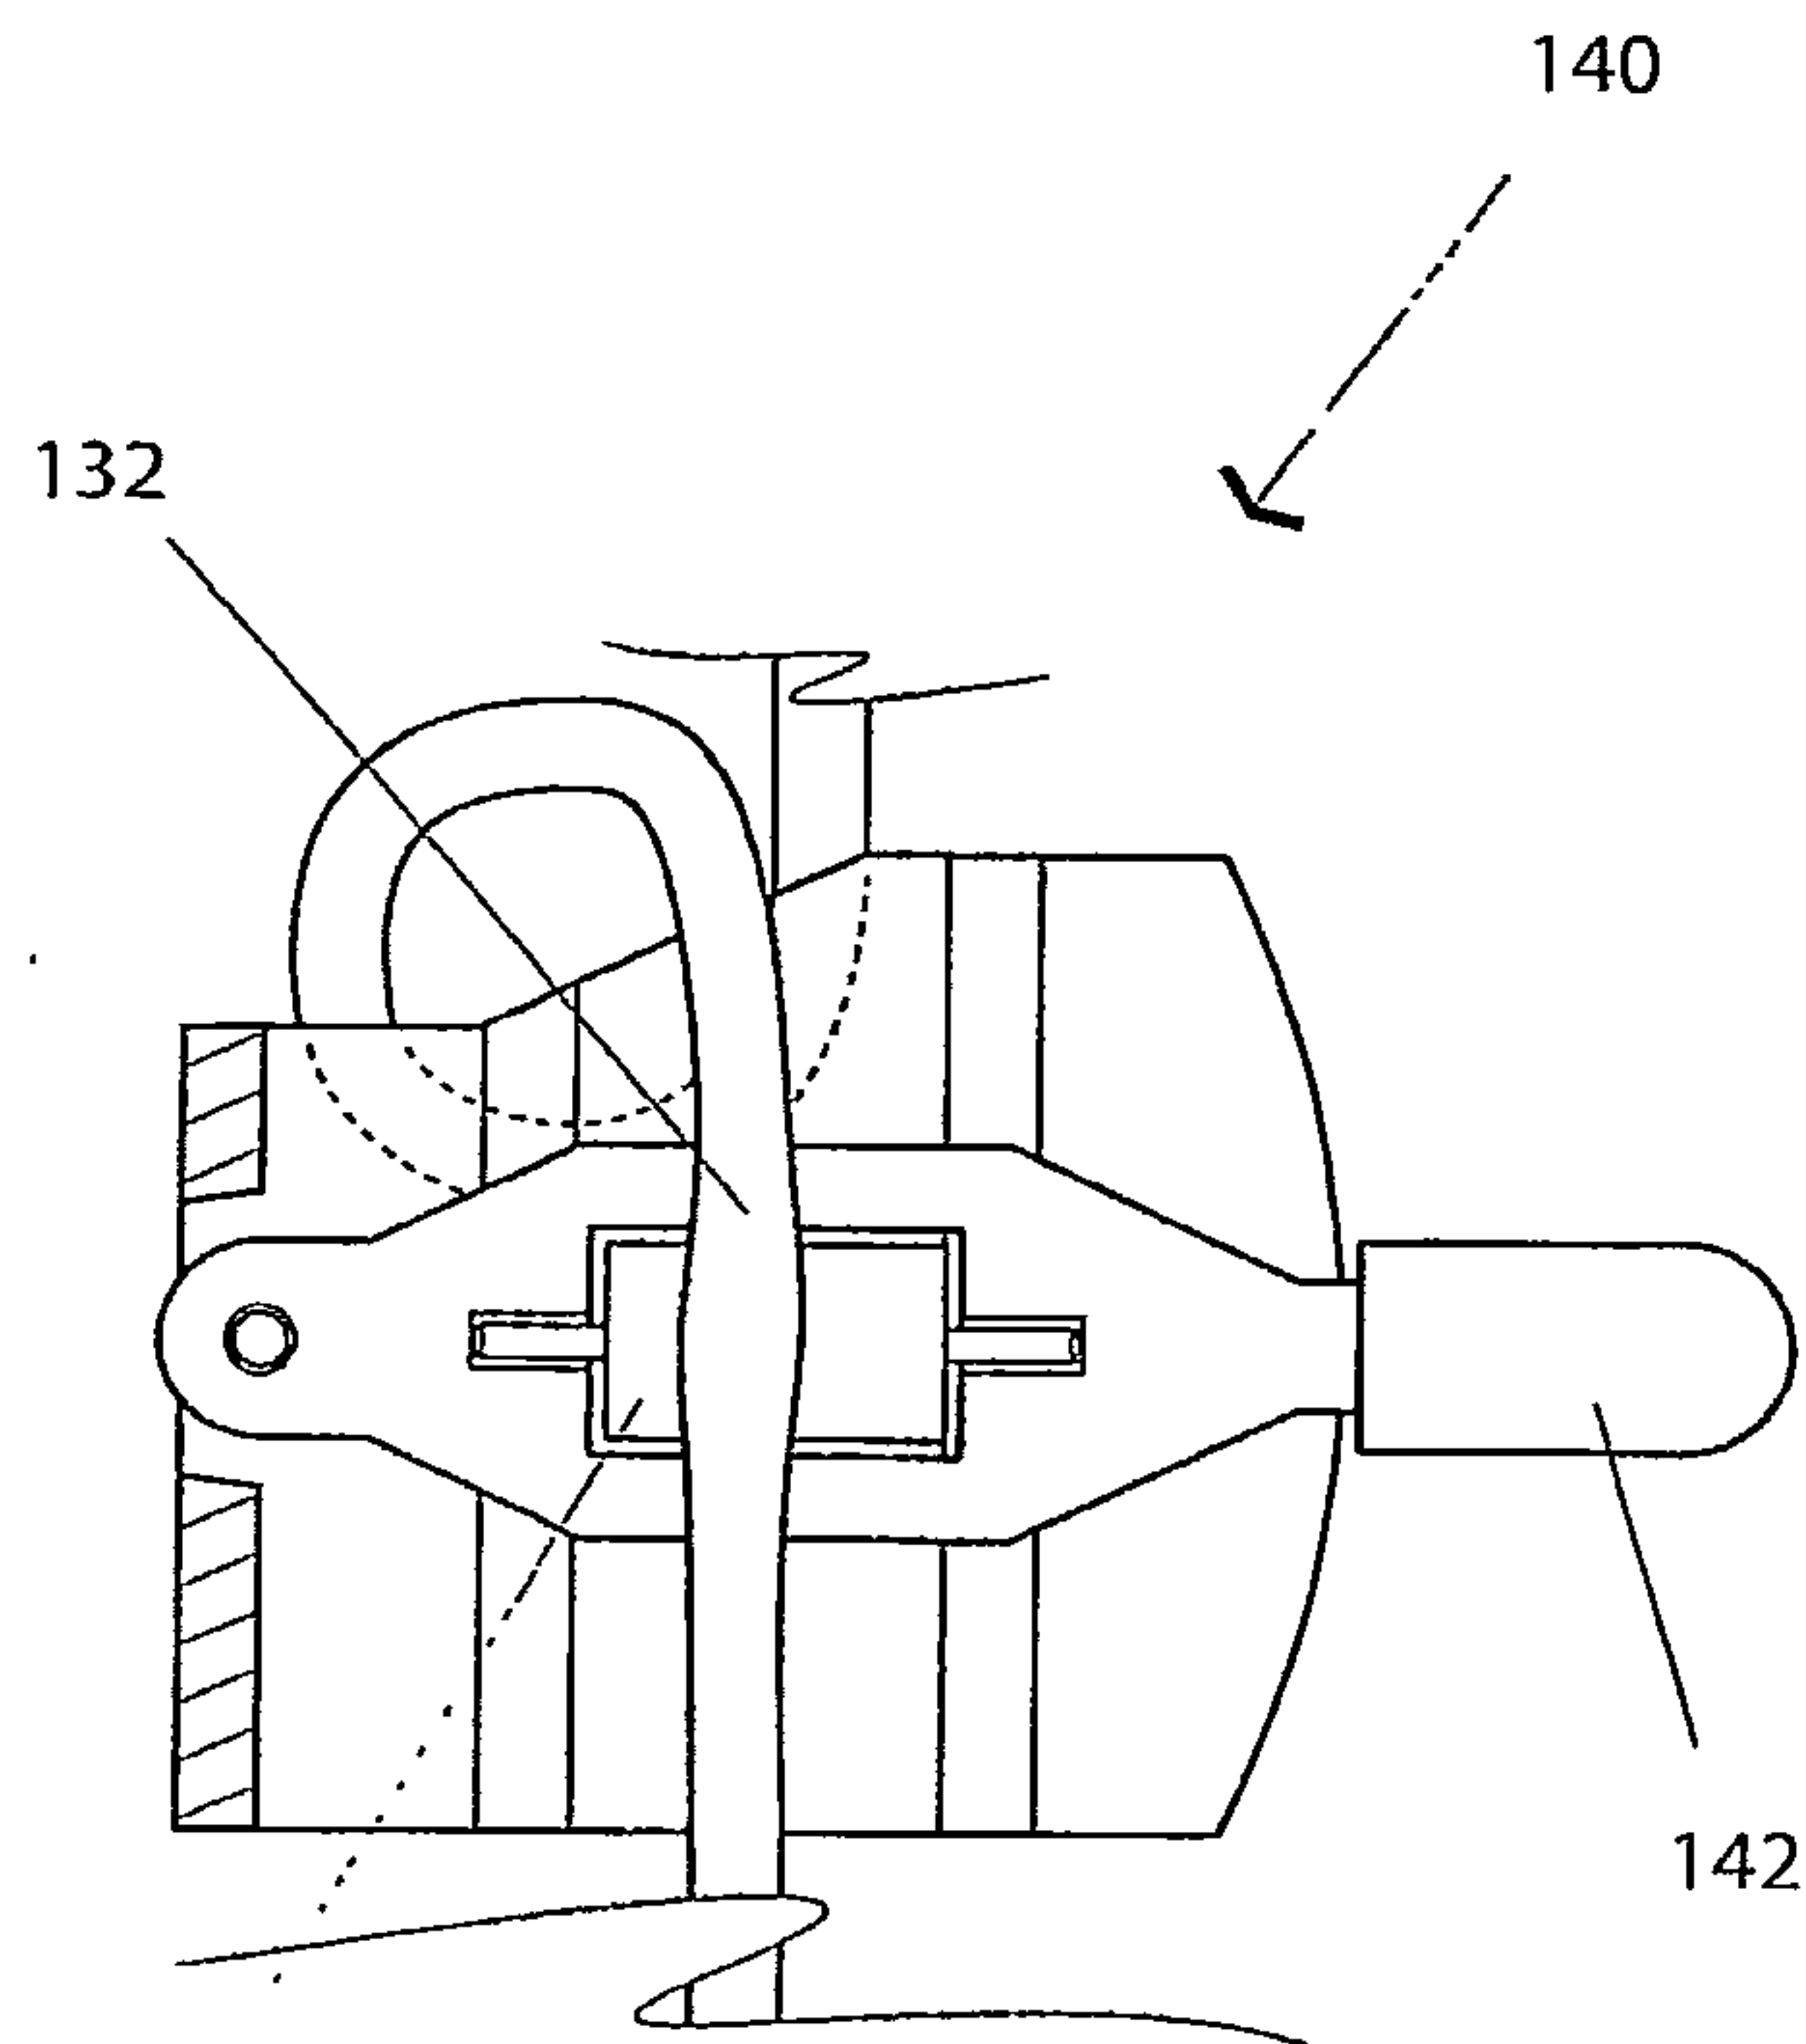

149

Fig. 10B

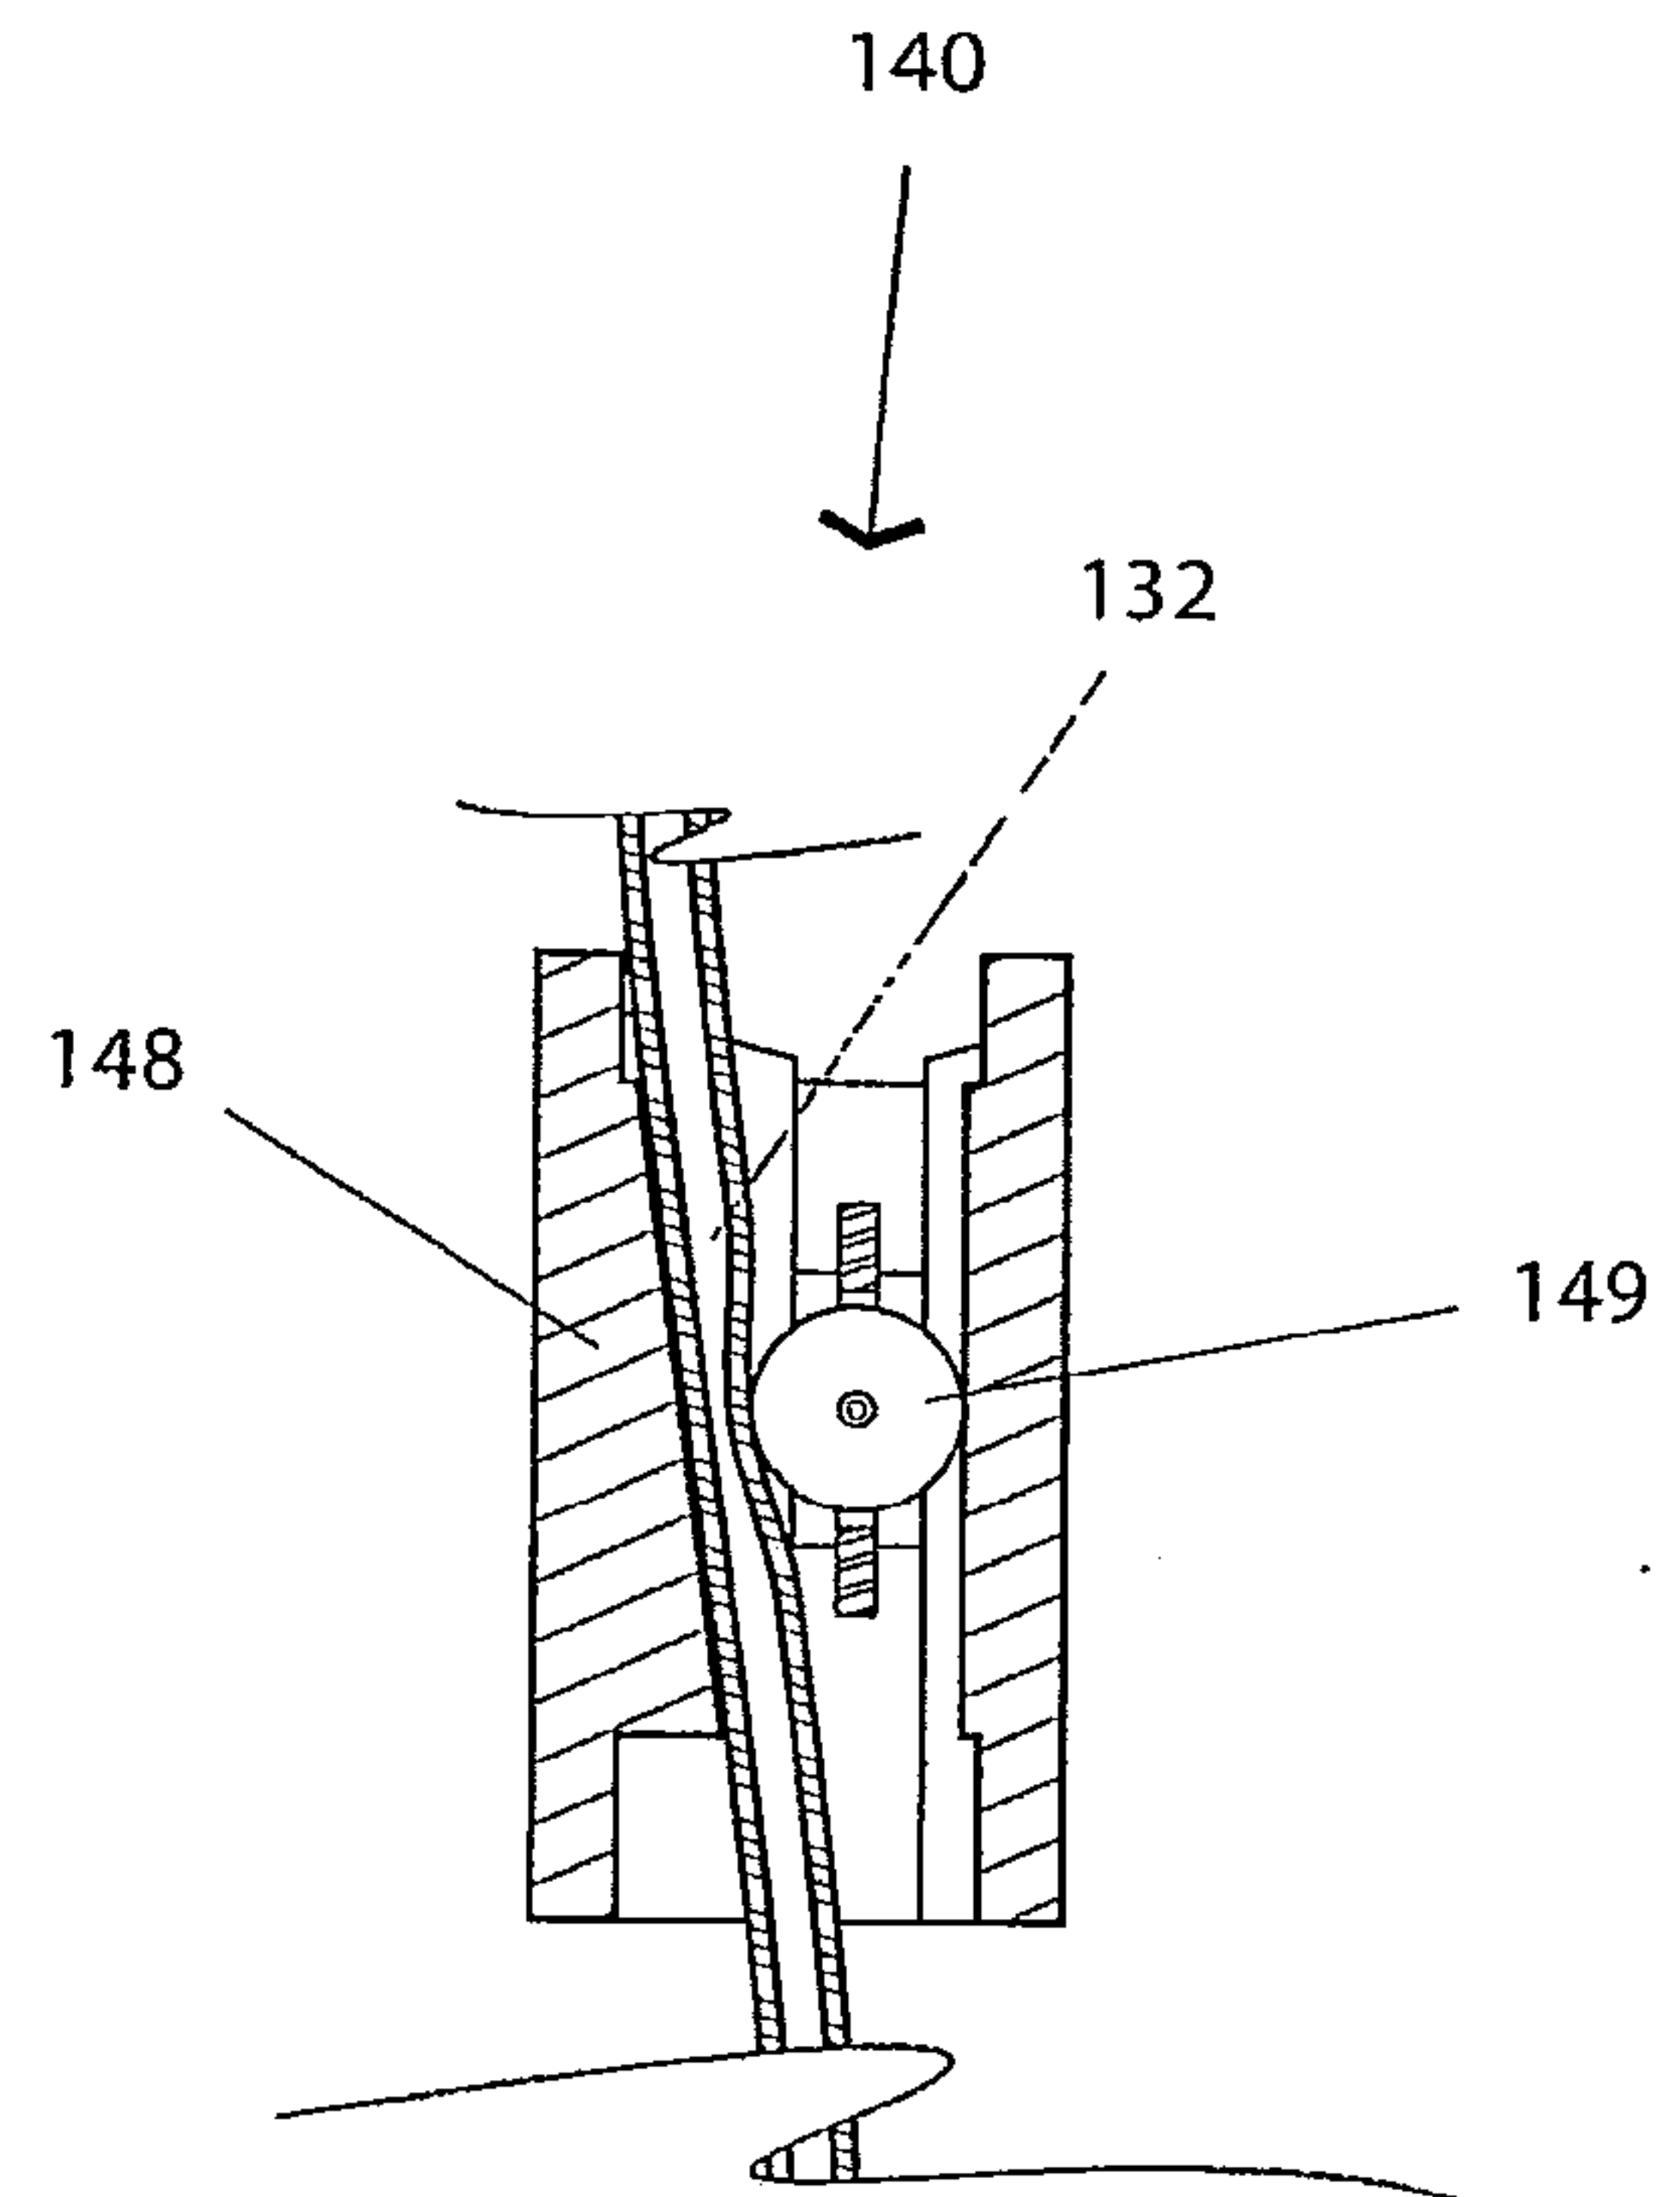


Fig. 10C

35/37

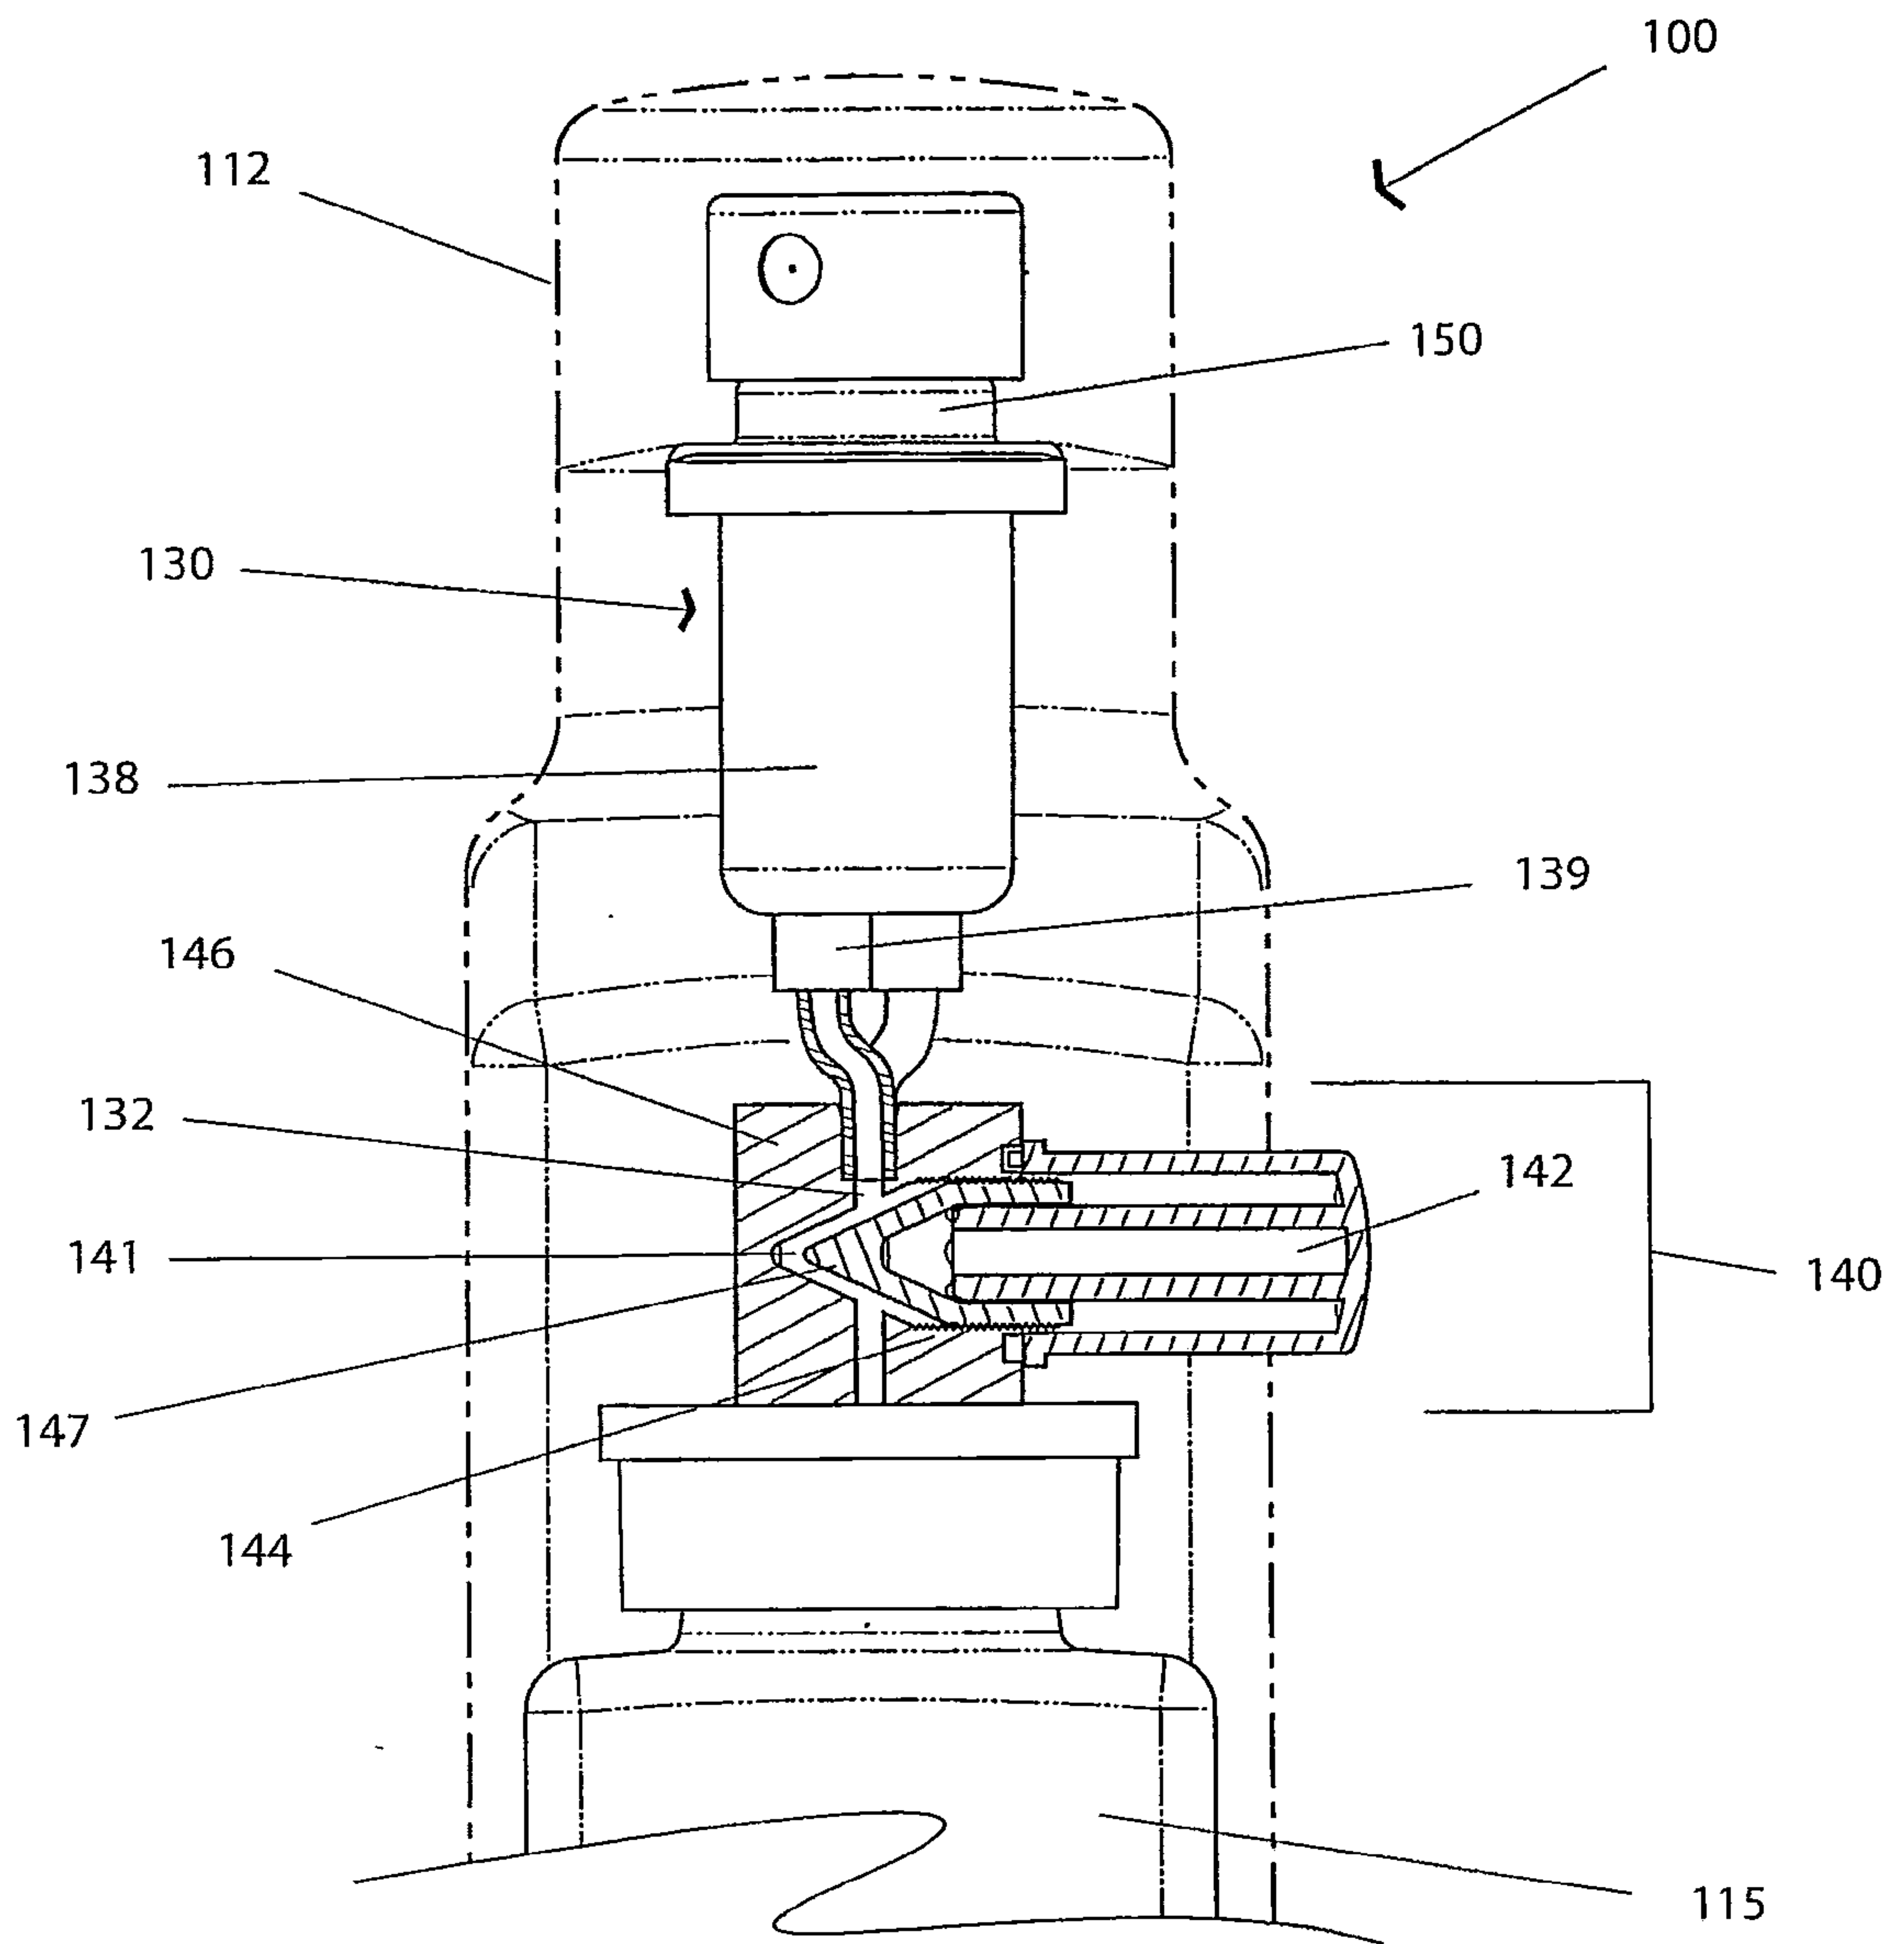


Fig. 11A

36/37

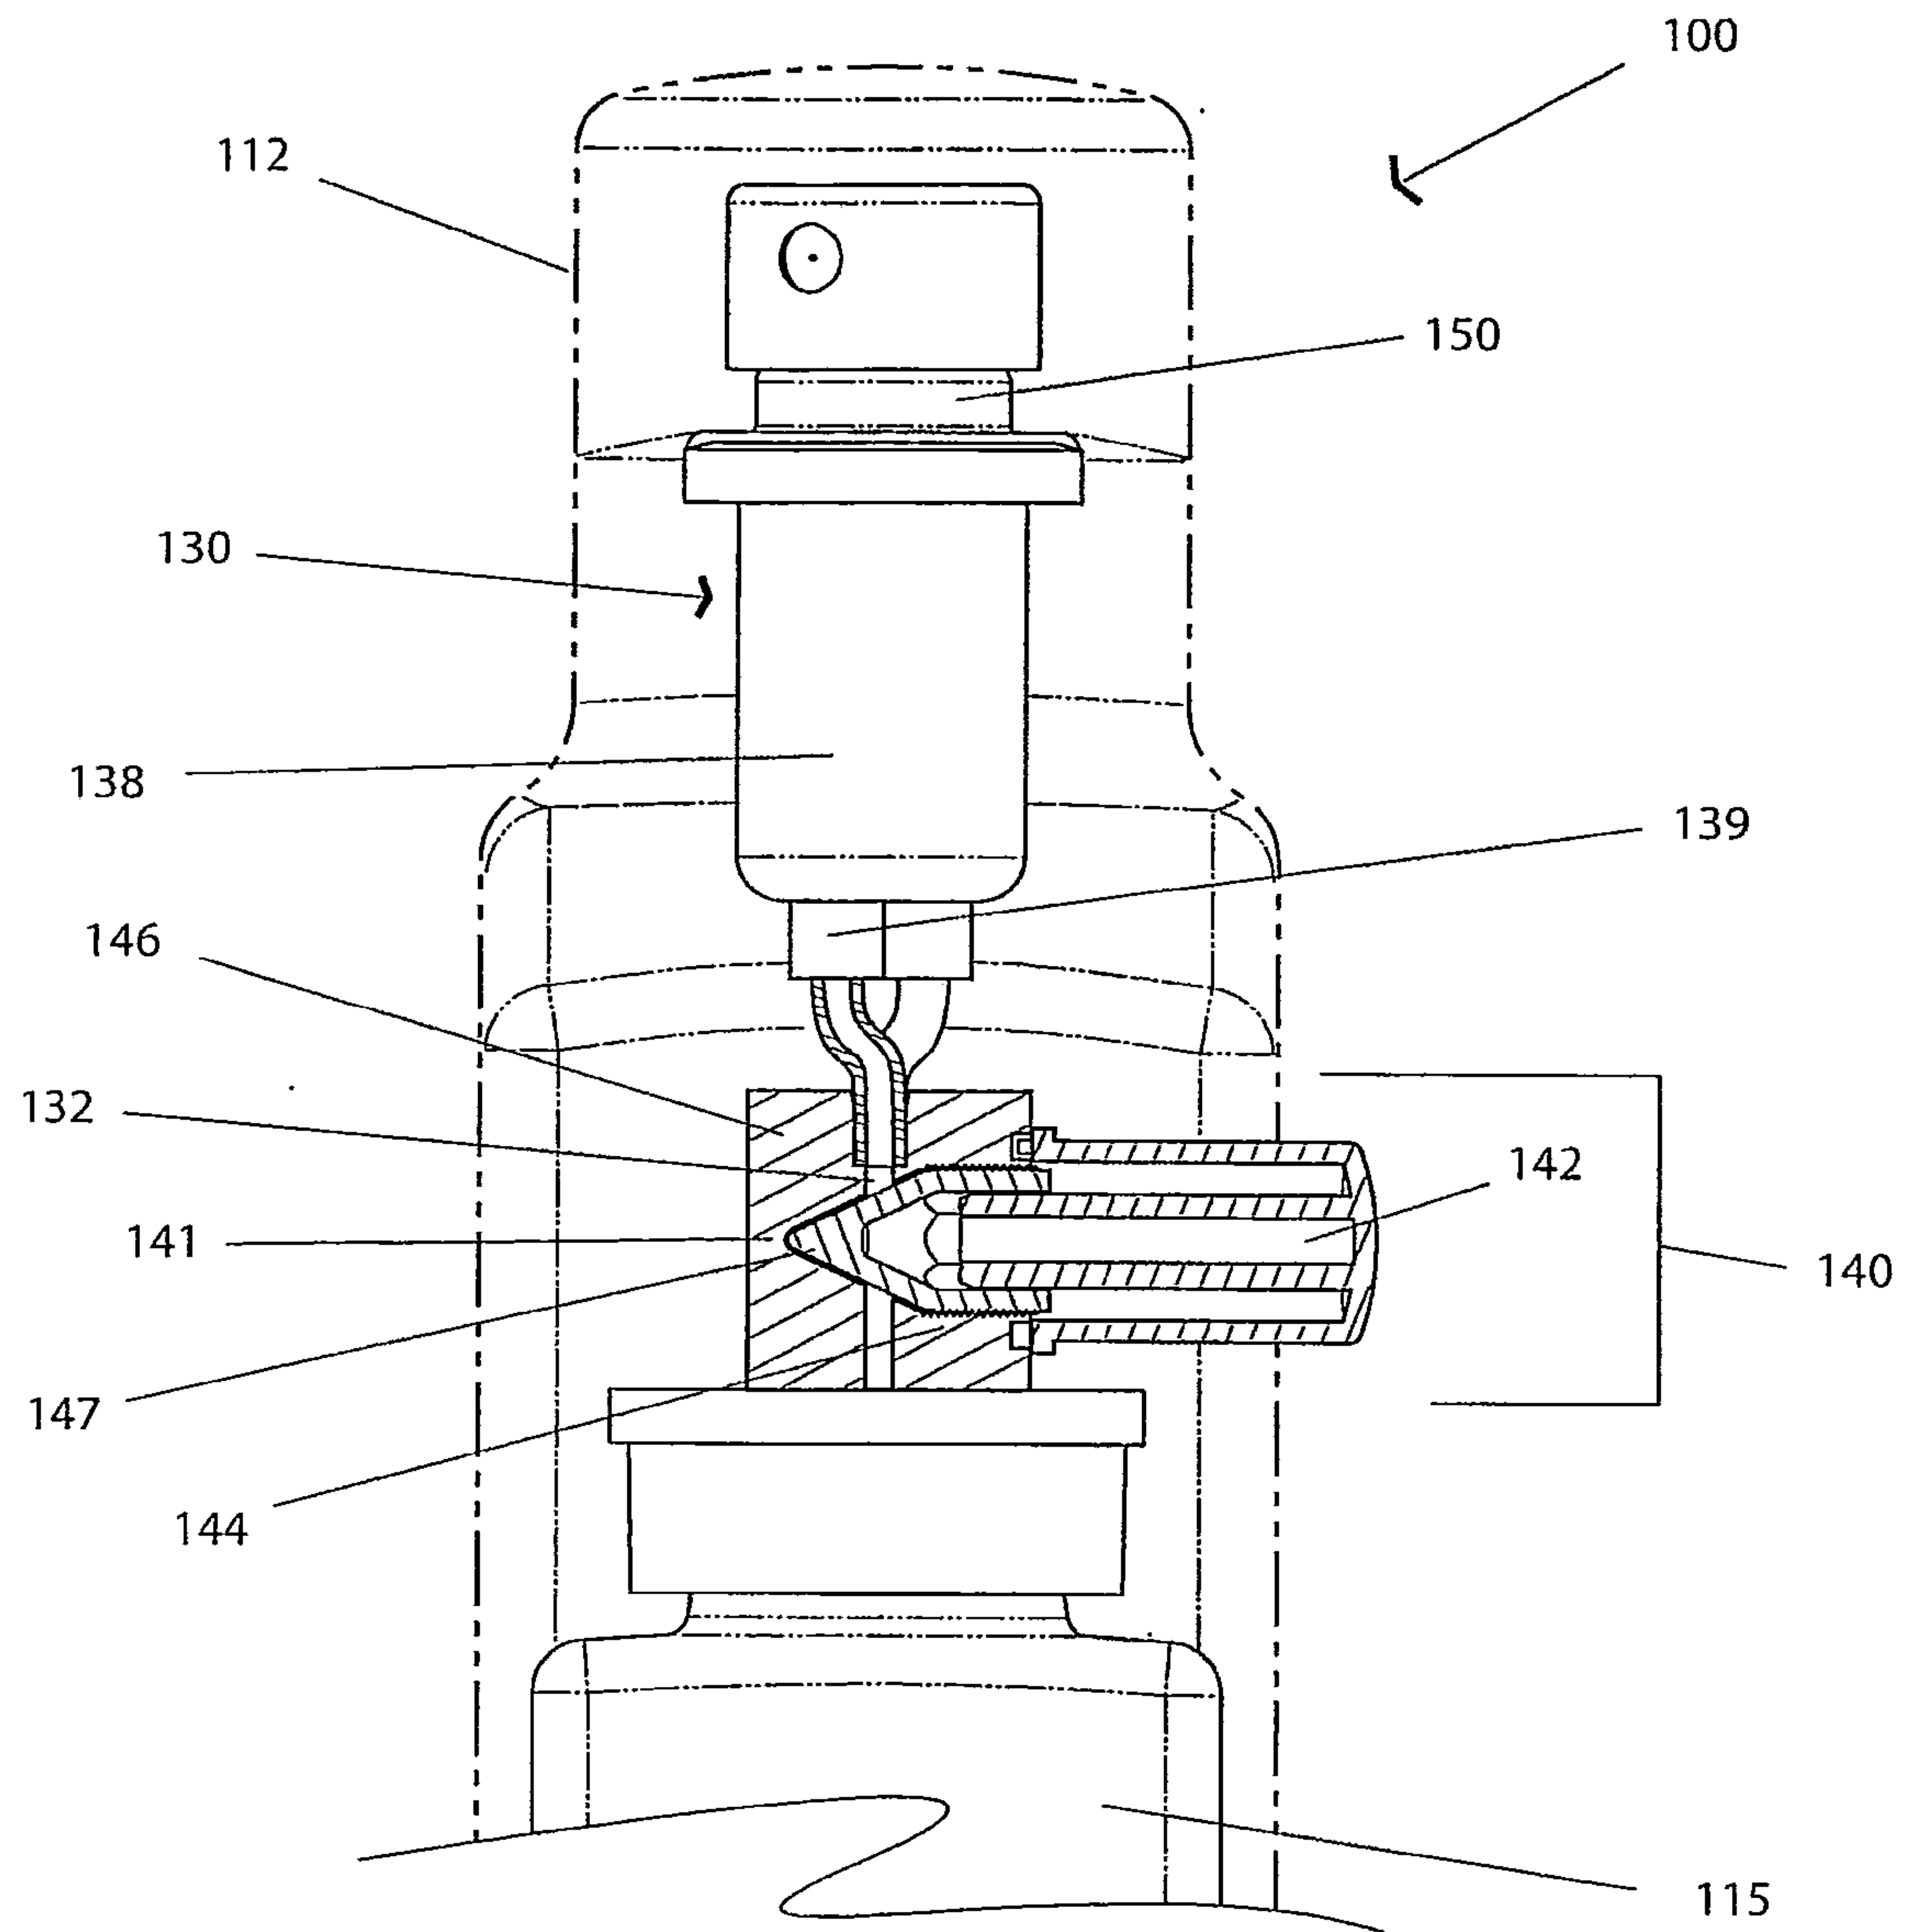


Fig. 11B

37/37

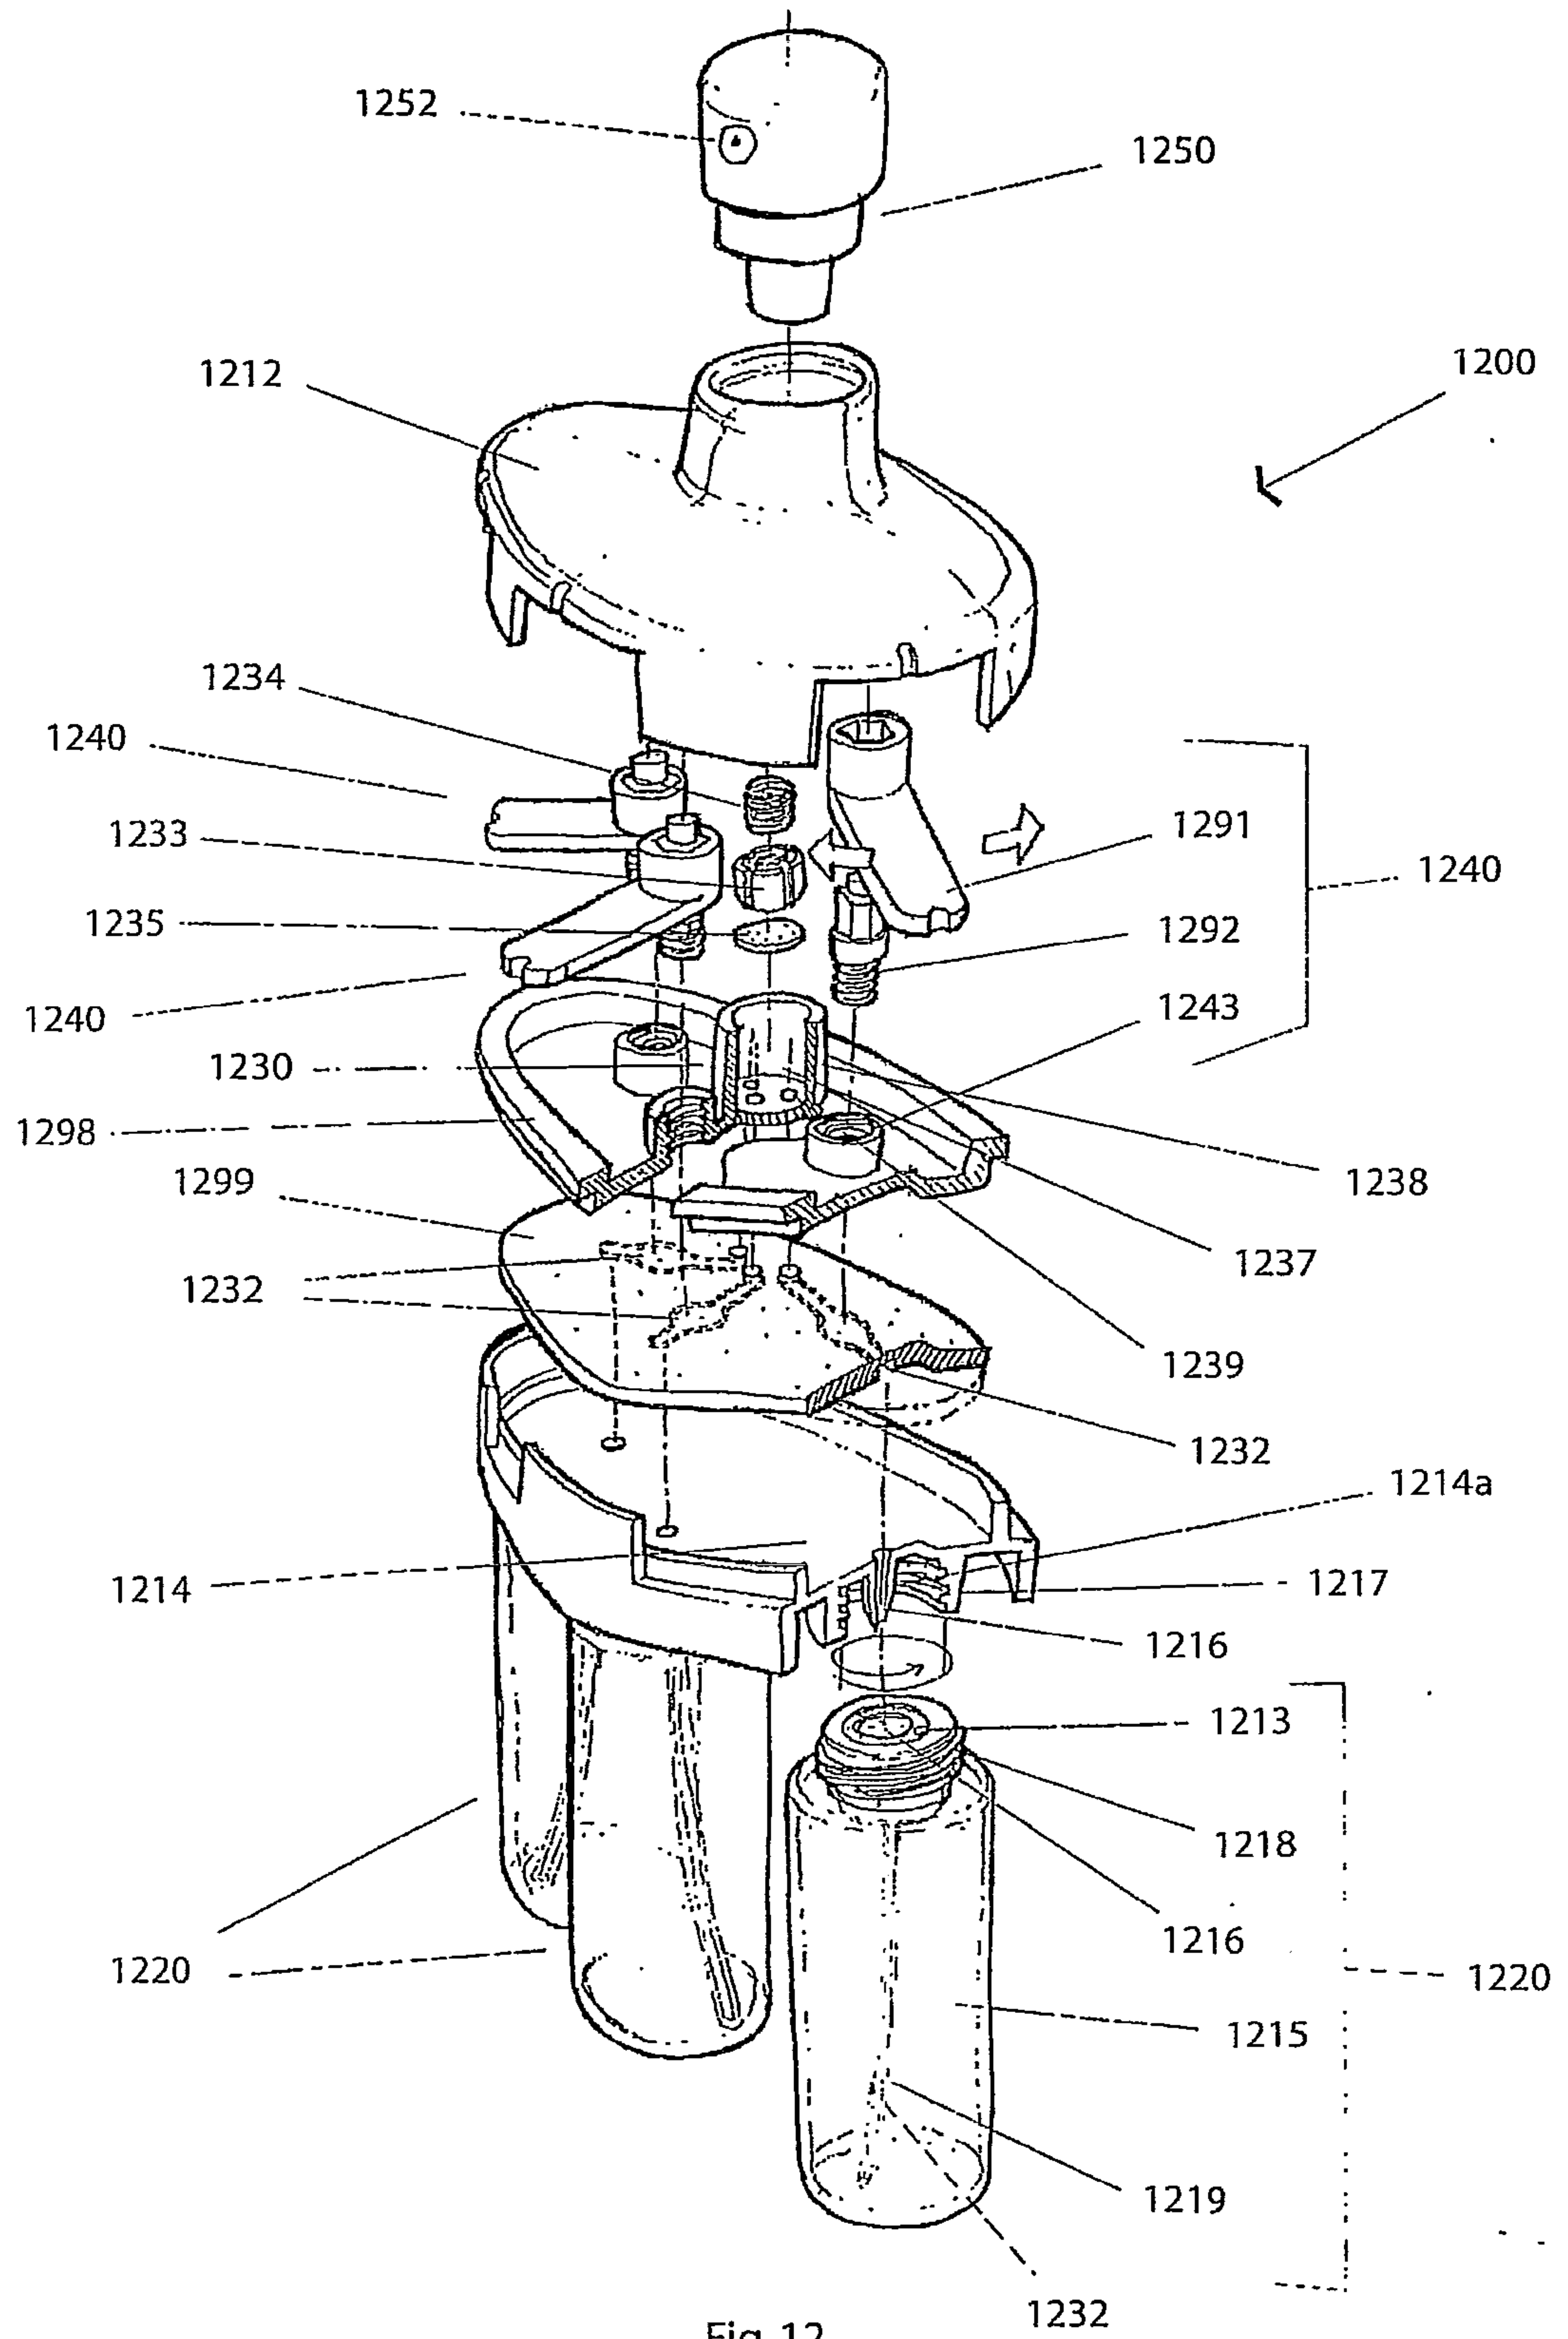


Fig. 12

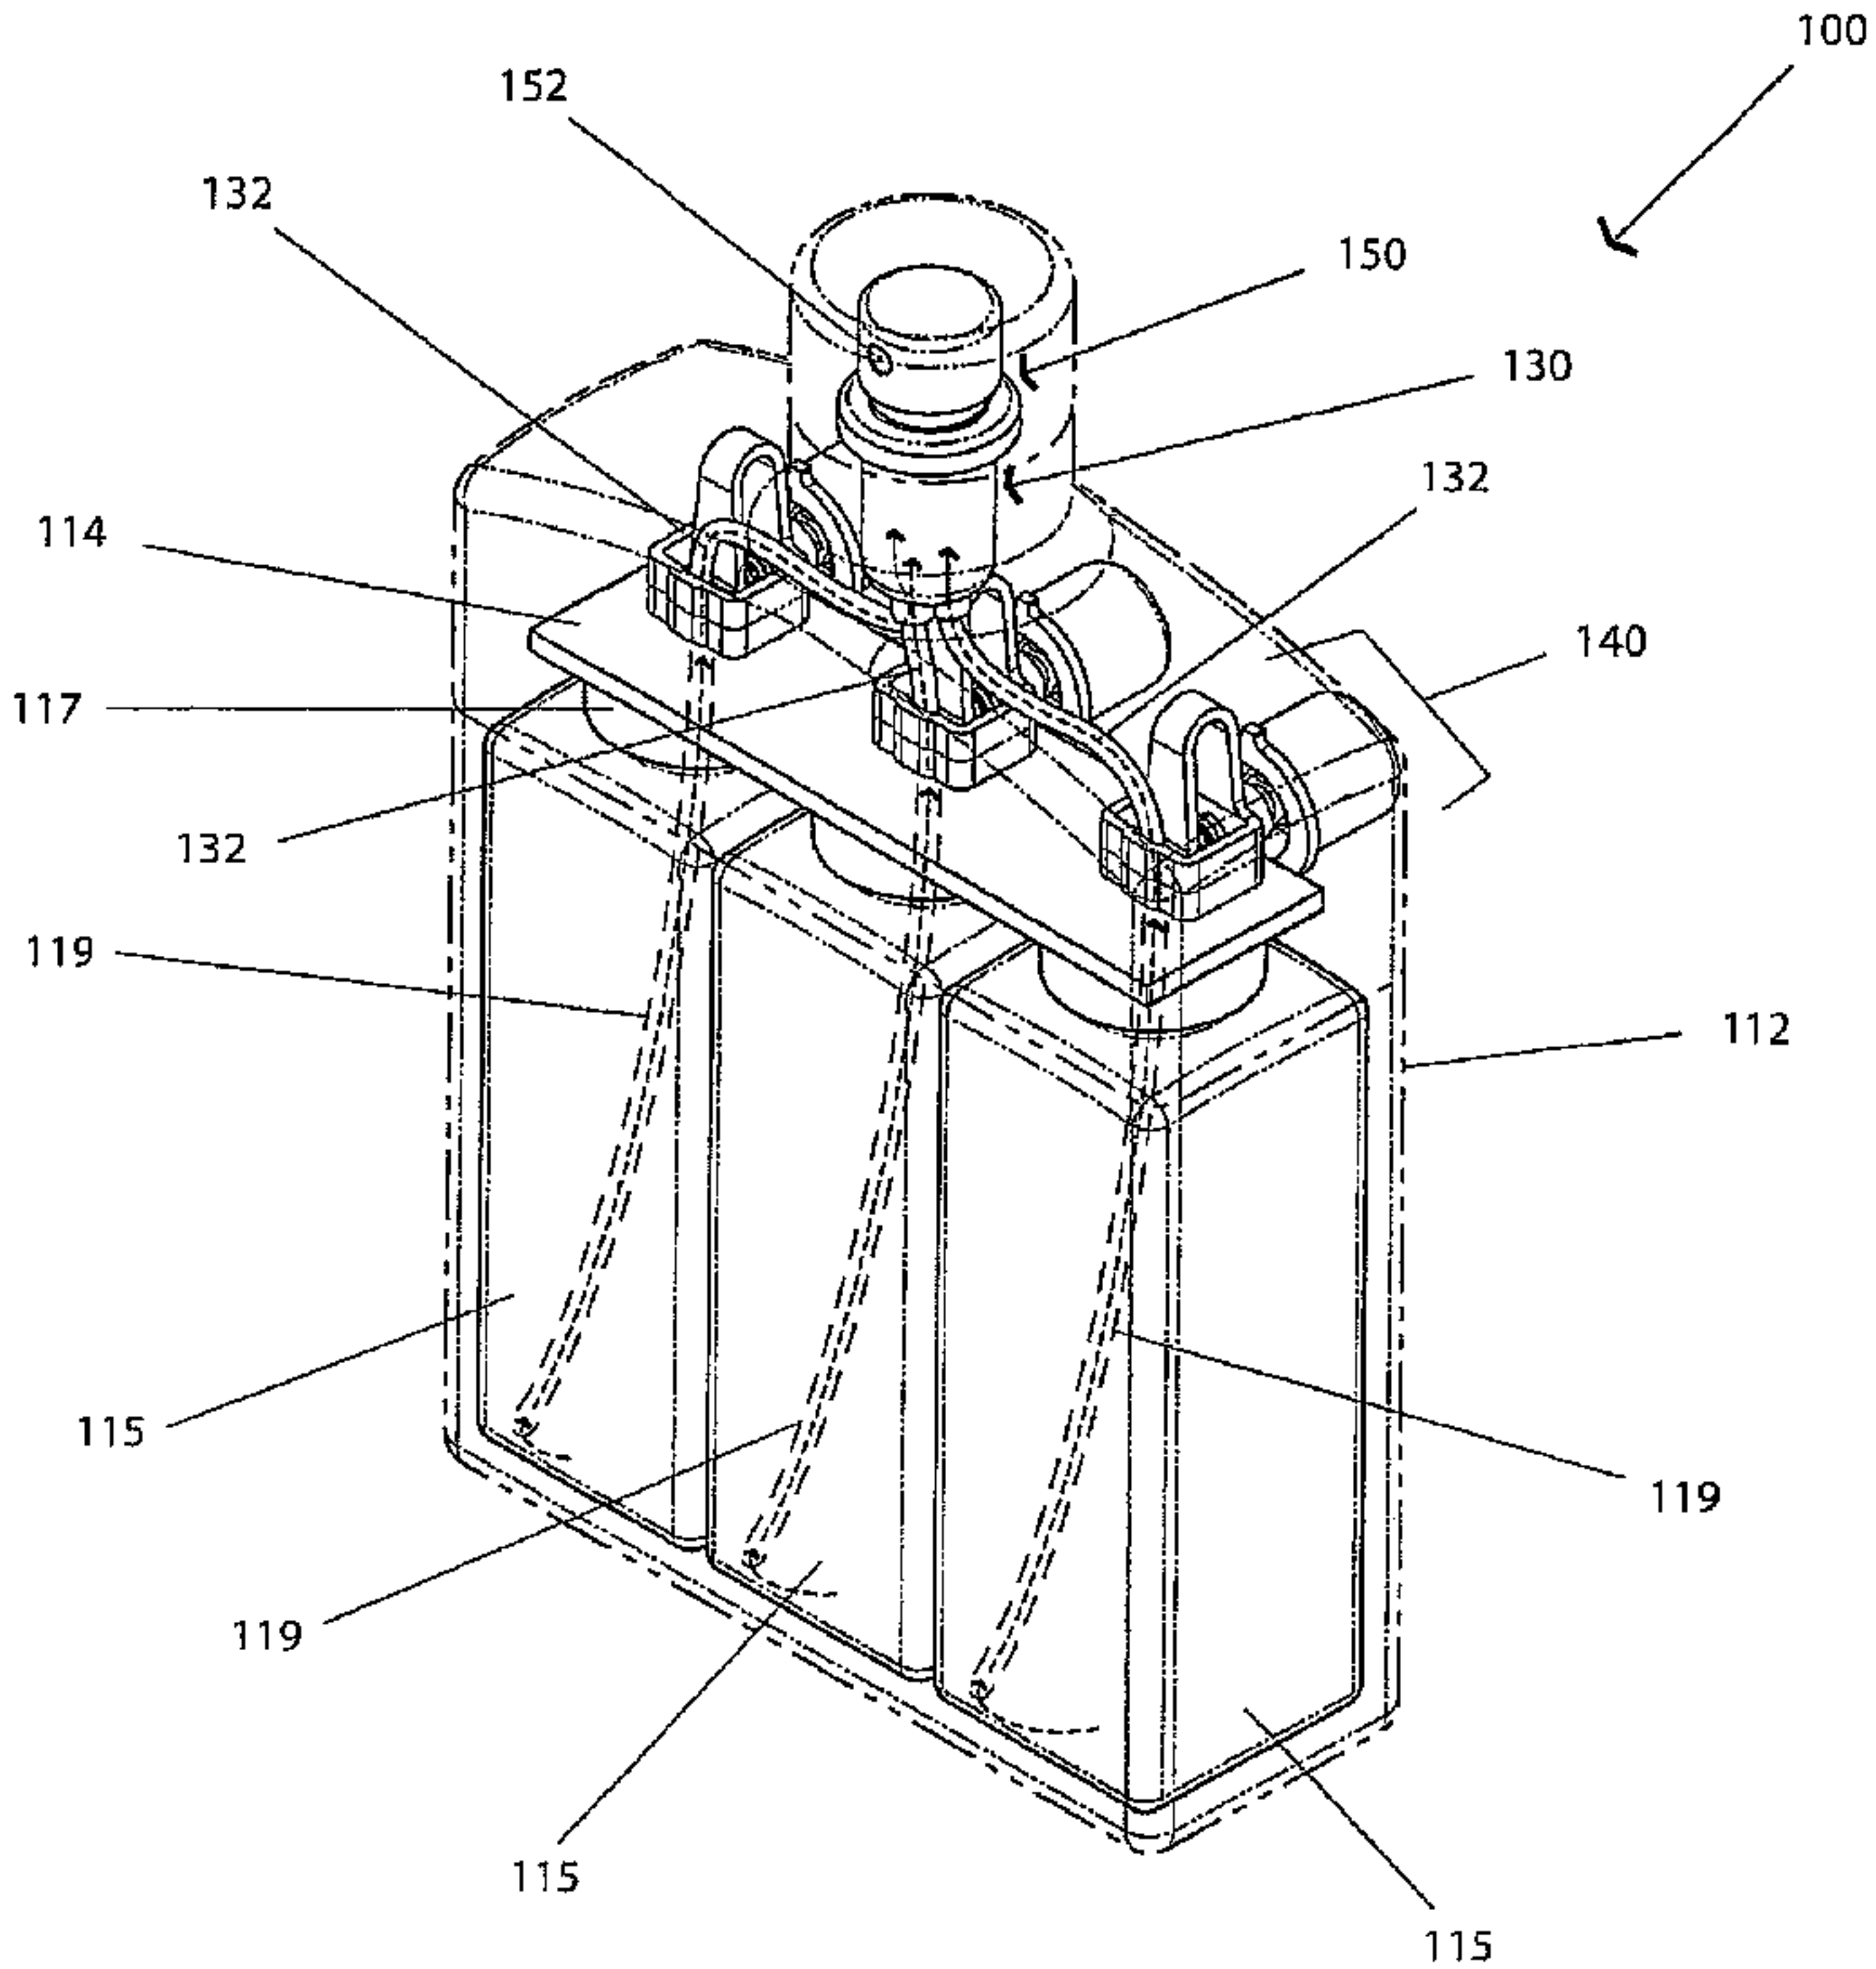


Fig. 1A