

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 April 2006 (06.04.2006)

PCT

(10) International Publication Number  
WO 2006/036978 A2


- (51) International Patent Classification:  
G08B 13/14 (2006.01)
- (21) International Application Number:  
PCT/US2005/034663
- (22) International Filing Date:  
27 September 2005 (27.09.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/613,217 28 September 2004 (28.09.2004) US
- (71) Applicant (for all designated States except US): EPCSO-  
LUTIONS, INC. [US/US]; 10510 Beach Mill Road, Suite  
100, Building B, Great Falls, VA 22066 (US).
- (72) Inventors: WILLIAMS, Charles, B.; 25911 Sarazen  
Drive, South Riding, VA 20152 (US). KAIL, Kevin, J.;  
10510 Beach Mill Road, Great Falls, VA 22066 (US).
- (74) Agent: HALE, John, S.; Gipple & Hale, 6665-A Old Do-  
minion Drive, McLean, VA 22101 (US).

- (81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY,  
MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO,  
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK,  
SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,  
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**  
— without international search report and to be republished  
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: INTEGRATION OF PRODUCT TAG WITH GENERAL INFORMATION ABOUT PRODUCT

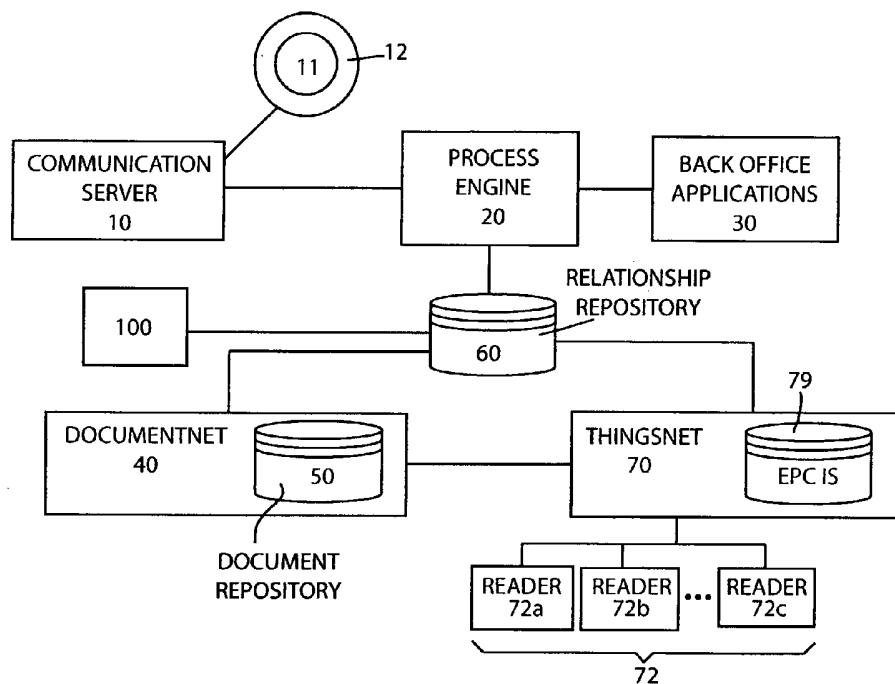

(57) Abstract: A computer program product, tangibly embodied in an information carrier, for use in a commercial data processing environment using at least one RFID/EPC readers and antennae for data collection. The computer program is able to read and collect tag data as it is read, create integrated product information and to alert designated parties upon the occurrence of a specific event determined by designated rules.

WO 2006/036978 A2

**INTEGRATION OF PRODUCT TAG WITH  
GENERAL INFORMATION ABOUT PRODUCT**

**RELATED APPLICATIONS**

There are no related applications.

**FIELD OF THE INVENTION**

The present invention generally relates to EPC-compliant tag data for a product and integrating search data using the tag data to produce general information about the product.

**BACKGROUND OF THE INVENTION**

In order to more quickly exchange business documents the Electronic Data Interchange (EDI) was created in the 1960's. EDI was originally an industry vertical effort and was handled with point-to-point direct connections. Early adopters of EDI soon realized that maintaining a large number of point-to-point connections with many trading partners using many computing platforms was very costly. The first value added network (VAN) was born when several industries in the early 1970s sponsored a shared EDI system and turned it over to a third party network. By the 1970's, more and more industries were involved, and work began to institute national and international standards. The goal was to create standards that (1) were hardware independent; (2) were unambiguous and could be used by all trading partners; (3) reduced the labor-intensive tasks of exchanging data (e.g., data re-entry); and (4) allowed the sender of the data to control the exchange, including knowing if and when the recipient received the transaction. Today there are numerous syntaxes for traditional EDI, although only two are widely recognized: X12 and EDIFACT.

In an attempt to make the transactional data of EDI in particular and business documents in general, several more human readable several XML standards were developed. One of these standards was a subset of XML known as Meta-XML. Meta-XML uses the ability of the XML tag structure to contain tributes or meta-data which further describes the data or puts the data in context.

As EDI and XML exchanges became more prevalent, the availability of low cost high speed Internet connections made VAN replacement a target for cost savings, just as EDI and XML have lowered costs. This replacement technology had to ensure security and delivery of the data. The result was the Electronic Data Interchange-Internet Integration group (EDIINT). This group like

the standards groups of EDI and XML, worked on developing a generally accepted standard for secure transmission of business data over the Internet. The result of this group work was the AS1 and later AS2 protocols.

AS2 uses an envelope structure with sender and receiver information, which can contain an encrypted payload. To ensure that the transmission was successful an acknowledgement is returned upon completion of the transmission. The AS2 payload can be any document structure; its only constraint is that it be contained in a valid AS2 envelope.

Radio frequency identification (RFID) is becoming an important identification technology in numerous applications such as inventory management, security access, personnel identification, factory automation, automotive toll debiting and vehicle identification. RFID systems utilize an RFID transmitter-receiver unit (usually referred to as a base station or interrogator) to query an RFID transponder or tag which may be located at a distance from the transmitter-receiver unit. The RFID tag which incorporates a chip detects the base station signal and transmits a response signal via an antenna incorporated in the tag containing encoded data back to the base station.

RFID systems provide identification functions not found in other identification technologies such as optical indicia (e.g., bar code) recognition systems. For example, RFID systems may employ RFID tags containing read/write memory of several kilobytes or more. The RFID tags may be readable at a distance and do not require direct line-of-sight view by the base station. Further, multiple RFID tags may be read by the RFID system at one time and specific item identification down to the individual unit can be undertaken using RFID tags. RFID tag reader equipment and associated equipment are commercially available and manufactured by a number of companies.

The breakthrough in RFID technology that allows the creation of electronic product code (EPC) is the conversion of the RFID tag from a database holding the information about the tagged item, to a URL that points to a database. That, together with the Internet, allows the creation and proper function of the EPC.

The RFID network and product data storage is separate from each other in current business networks. In the past, because of the enormous data storage problems, it was not possible to place all of the information about tagged products into a usable contextual format. By interconnecting these networks, the present invention provides visibility into the entire supply chain enabling the correlation of information of physical products with the specific RFID tags attached to the products.

### **SUMMARY OF THE INVENTION**

The present invention employs RFID technology to store and provide information about

assets such as items, devices, and products combined with software and apparatus for integrating RFID/EPC tag data to produce general information about the product.

RFID/EPC tag data is obtained from a RFID/EPC tag that is attached to an object.

The invention utilizes a tagging component such as RFID tag manufactured by Texas Instruments, Inc., Matrics, Inc. or Alien Inc. that includes information specifying standards which is applied to all articles to be identified. Each tag includes a globally unique identifier. An object interface component includes one or more devices for communicating with the tags and a device for receiving context information which uses a context-aware intelligence that includes logic for processing context information and logic specifying actions for the system to perform in response to the context information. A communication middleware component is used for communication between and among the components of the system and for communicating with devices external to the system.

The invention can be implemented as a fully deployed system running entirely within a user's computer networking infrastructure or as a hosted service where key components are run on a provider's computer networking infrastructure and only those component readers and the software connected to the readers needed at customer facilities are deployed at the customer's facility.

When the invention is run as an application within a user's computer networking infrastructure it is scalable to support any number of RFID devices, external trading partners and back office systems. The invention can be distributed across many physical computing resources. The network of physical computing resources functions as one large logical computing resource where all the components running within the logical computing resource are capable of discovering the other resources that are also running within the same logical computing resource.

In the event that a physical connection between any two resources in the logical computing resource are broken the isolated computing resource is capable of functioning as a standalone computing resource. In standalone mode, the computing resource continues to function and collect RFID tag data. At such a time when the standalone resource is reconnected to the original logical computing resources (such as when networking communications are restored) all data accumulated since the communication loss are automatically synchronized with the rest of the logical computing resources.

It is an object of the invention to allow users that have articles tagged with a RFID/EPC tag to connect the tag data with general information data specifically related to the product which is tagged and have these two streams of data (the general product information and the RFID/EPC tag data) integrated into a single stream of data for access and reporting.

It is another object of the invention to provide users of the invention with alerts and notifications based on the occurrence of specified events, such as product depletion, location or conditions harmful to product safety. The invention delivers these alerts and events via e-mail, instant messaging, SMS or popup box.

It is another object of the invention to provide an integration and correlation between a product's GTIN (Global Tracking Identification Number), the bar code on the product and the current UCC-123 tags that are still required to be on the call.

It is another object of the invention to provide improvements to inventory management.

It is yet another object of the invention to provide improvements to inventory visibility.

It is another object of the invention to provide improvements to operational improvements.

It is still another object of the invention to provide improvements to inventory shrinkage.

It is yet another object of the invention to provide improvements to asset tracking.

These and other objects, advantages, and novel features of the present invention will become apparent when considered with the teachings contained in the detailed disclosure, which along with the accompanying drawings, constitute a part of this specification and illustrate embodiments of the invention which together with the description serve to explain the principles of the invention.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

The invention will be better understood and objects other than those set forth above will become apparent when consideration is given to the following detailed description thereof. Such description makes reference to the annexed drawings wherein:

Figure 1 is a schematic flowchart showing a system in accordance with the invention;

Figure 2 is a schematic flowchart showing a technology stack used by the invention;

Figure 3 is a schematic flowchart showing a drill-down of a software program that implements a communications network for business documents from Figure 1;

Figure 4 is a schematic flowchart showing a drill-down of a software program that implements a communications network for RFID/EPC tag data from Figure 1;

Figure 5 is a schematic showing the integration points between the RFID/EPC network, the Universal Business Document Network and the Message Network;

Figure 6 is a schematic showing the integration and correlation between a GTIN (Global Tracking Identification Number), attributes of the product, the product's Barcode and the product's epc data.

Figure 7 is a schematic flowchart which shows the flow of a business document without

any RFID/EPC tag data;

Figure 8 is a schematic flowchart which shows the flow of RFID/EPC tag data without any documents; and

Figure 9 is a schematic flowchart which shows the flow integrating the RFID/EPC tag data with the business documents.

## **DETAILED DESCRIPTION OF THE INVENTION**

The preferred embodiment and best mode of the invention is shown in Figures 1 through 6. While the invention is described in connection with certain preferred embodiments, it is not intended that the present invention be so limited. On the contrary, it is intended to cover all alternatives, modifications, and equivalent arrangements as may be included within the spirit and scope of the invention as defined by the appended claims.

Figure 1 discloses the architecture for a system that implements the methods for this invention. The system is constructed with the communication server 10 which is the communications hub of the system for all external communications. External communications occur between the system and interested parties. Interested parties are defined as trading partners (i.e. external businesses) that do business with the entity running the system, SOAP interfaces that provide additional information for the system, or other external communication facilities (e-mail servers, instant message (IM) servers, etc.). When data about an object 11, having an RFID tag which is read by reader 12 or document data, is received via the communication server 10, that object data is passed on to the process engine 20.

The process engine 20 is the central nervous system. It provides core processing for all machine to machine and machine to human data events that occur within the system. Through a series of prescribed rules defined for handling each event, the process engine 20, upon receiving an event, determines the context of the event, what other actions have to take place given the current event and then causes those actions to be executed. The prescribed rules are specifically directed toward the conduct of specific business and the requirements for same. As an example, in a normal retail commerce application the process engine manages the flow of orders, invoices, ship notices, etc. and the alerts and notifications associated with the business documents.

The back office applications 30 are external computer systems that stores or provide data needed by the system. Examples of such back office applications 30 are SAP, JD Edwards, Oracle and EDI Translators. The back office applications 30 send and receive data to/from the process engine 20.

The business document data network (BDDN) 40 is the component responsible for

managing all of the business documents that flow through the system. The BDDN 40 is the equivalent of a PBX for voice or a Cisco router for data. It is programmable and configurable to the defined needs of the entity or user of the system. It can be programmed and configured to support various display devices (web browser, PDA, cell phone, etc.), various communications protocols (AS/2, HTTP, FTP, etc.) and to handle any process required by the business documents that it processes. The process engine 20 invokes the BDDN 40 whenever a business document is received via the communication server 10 or back office applications 30. The BDDN 40 is responsible for and manages document translation, document sequence and document choreography involved in an overall business transaction that is being managed by the system. These functions are shown in detail in the Figure 3. The BDDN 40 contains a document repository 50 that is used to store electronic representations of all documents processed by the system.

Figure 3 shows a schematic of the BDDN 40 which is responsible for all document processing within the system. The major subcomponents of the BDDN are the sequencing engine software 42 which is a software subsystem that manages the flow of business documents based on a predefined sequence, a choreography engine 44 which is a software subsystem that controls the additional business document sequences based on the business document flow (i.e. when an order is accepted by a supplier, a shipping order needs to be sent to the shipper who will transport the goods from the supplier to the buyer), an any to any translator 46 and a dynamic EDI to XML translator 48.

The sequencing engine 42 controls the sequence of documents required for a defined business transaction. For example, in the retail industry, two trading partners, a buyer and a supplier would agree that when the buyer sends the supplier a purchase order, the supplier will respond with a purchase order acknowledgment. Then, if the two parties agree that changes to an order are allowed, the buyer would send the supplier a purchase order change and the supplier would return a purchase order change acknowledgment. The supplier then sends the buyer an advance ship notice to let the buyer know that the goods for the order are being sent, the supplier sends the buyer an invoice and the buyer completes the conversation by sending back a remittance advice. The sequencing engine 42 is software responsible for managing this transaction and automatically creates the response documents as well as pre-creates templates for any future documents in the transaction. For example, once a purchase order is received, sometime in the future an advance ship notice will be required. The sequencing engine pre-creates a template for this document and stores the template in the document repository 50. At the time the sequenced document is ready to be sent, the template is retrieved from the document repository, completed and then sent to the buyer.

The choreography engine 44 is responsible for spawning additional transaction documents based on the rules defined for a specific trading partner. The rules for spawning additional transaction documents are stored in the relationship repository 60. When a document is sent or received, the choreography engine 44 checks the relationship repository 60 to determine if any additional transaction documents are needed and automatically generates the documents required. Using the purchase order example from above, the supplier knows as soon as it accepts and acknowledges a purchase order that the goods ordered will have to be shipped. In this case, when the purchase order acknowledgment document is sent from the supplier back to the buyer, the choreography engine 44 would determine based on the specific business trading rules defined in the software that (1) a shipment order needs to be placed with the supplier's transportation company, (2) the document is generated and (3) the document is passed to the process engine 42 to be sent to the transportation company.

When the business document requires RFID/EPC tag data to be inserted, the BDDN 40 calls the EPC tag data network 70 to retrieve the necessary RFID/ EPC tag data as it is read.

There are two subcomponents that provide translation capabilities for business documents. The any to any translator 46 can take any business document and convert it into any other format. For example if SAP is being used as a back office application 30, then when an EDI document that has information required to be stored in SAP arrives, the any to any translator 46 would convert that EDI document to SAP's IDoc format. The IDoc is then passed directly to SAP and the SAP database is updated.

The EPC tag data network 70 (also referred herein to as thingsnet 70) is the component responsible for managing all of the RFID/EPC tag data and information associated with those RFID/EPC tags. RFID/EPC tag data is collected from readers 72. Multiple readers 72a-c may be attached to the EPC tag data network. The EPC tag data network 70 (ThingsNet) contains an EPC information service (IS) repository 74 that is used to store all of the RFID/EPC tags data as well as all the data associated with those tags.

The relationship repository 60 and associated relationship manager 100 stores the information related to all the entities participating in the system. These entities include trading partners, RFID/EPC readers 72, 72a and 72b, back office applications 30 and any other interested party. The relationship repository 60 stores data and meta data (data structures about the data) for all components of the system. All components of the system thereby access the same set of information whenever it is needed during the processing of events and actions.

Figure 2 shows the network stack used to implement the invention. At the lowest level is the communications layer 80. This layer handles the lowest level communications protocols with

both external and internal entities. The communications protocols supported are any communication protocols required by the user and its trading partners, including but not limited to such protocols as HTTP(S), TCP/IP, X.25 and AS/2. All of the internal communication protocols are IP based, that is HTTP, TCP/IP, etc.

A message broker bus 82 is the internal communications infrastructure. It is used to route information between all components in the system. The message broker bus 82 supports both synchronous and asynchronous communications as needed between components.

The transformation engine 84 is responsible for translating data between the various different formats required for a conversation involving documents and RFID/EPC tag data. For example, if a document is received as an EDI document, but information in that document is used to update a back office application, the back office application requires the information to be in a format explicit to that application. The transformation engine 84 has the responsibility for performing that translation based on the rules defined in the repository 81 for the data format required by the back office application. The repository 81 holds all persistent and transient data, documents, rules, EPC tag data, etc. that the system generates, requires, or consumes during normal operations. The repository 81 combines the relationship repository 60, EPC IS 79 and document repository 50.

The process management and workflow component 86 is the overall controller of the system. The process management and workflow component 86 manages all machine to machine processes needed for interaction between all the parties involved in an implementation of the system. Workflow, which is subservient to process management, provides an implementation of the machine to human aspects of an implementation of the system. When the process manager detects an error or alert condition, it invokes the workflow manager to route that error or alert to a designated human for resolution. If the error or alert is not handled in a timely manner, the workflow engine consults the rules in the repository 81 to determine proper escalation procedures for the error or alert. The process manager may also invoke the workflow engine in the case where a human is required to make a decision as a normal part of the process.

The presentation component or layer 88 is responsible for converting all data for human display on an as-needed basis. The presentation layer provides personalization features for all human users of the system. The personalization can be done based on display preferences (color, logo, etc.) or on device preferences (web browser, PDA, cell phone, etc.).

The intelligence component or layer 90 provides both business and process intelligence to users of the system. Business intelligence allows the user to view pre-defined or ad-hoc reports about the user's business. For example, "What is my current inventory level?", "How many orders

need to be filled today?”, etc. Process intelligence allows the user to view pre-defined or ad-hoc reports about the processes being run and managed by the system. For example, “How many orders are currently being filled?”, “How many documents are being processed?”, etc.

The repository 81 stores all the information related to all the entities participating in the system. These entities include trading partners, RFID/EPC readers, back office applications and any other interested party, documents, RFID/ECP tag data, etc. The repository 81 stores data and meta data (data structures about the data) for all components of the system. All components of the system thereby access the same set of information whenever it is needed during the processing of events and actions.

Figure 4 shows a schematic flowchart of the EPC tag data network 70 component of the system. The EPC tag data network component is based on the RFID/EPC standards and specifications as defined by EPCglobal, Inc. The subcomponents of EPC tag data network are RFID/EPC readers 72, RFID middleware 74, EPC information service (EPC IS) 76, object naming service (ONS) 78, and the EPC IS repository 79.

The RFID middleware 74 is the core component and provides a set of middleware services for communicating between the readers 72 and other external applications. The RFID middleware 74 provides an application programming interface (API) which allows external applications to invoke its services to either initialize RFID/EPC tags or to retrieve the RFID/EPC tag data that has been collected by the readers.

The EPC information service 76 provides an application programming interface (API) to create, read, update, and delete data associated with RFID/EPC tags. The EPC IS 76 maintains the relationship between the RFID/EPC tag data and the meta data about the article that the RFID/EPC tag is attached to. For example, when an RFID/EPC tag is attached to a manufactured item (for example, a case of motor oil) the system associates the RFID/EPC tag with the information about the manufactured item and stores it in the EPC IS repository 79 via the EPC IS 76. Later in the process, when information about a tagged item is needed, that information is retrieved from the EPC IS repository 79 via the EPC IS 76.

The object naming service (ONS) is to RFID/EPC tag data what a domain name service (DNS) is to computers connected to the Internet. When a system needs to locate a computer on the Internet it sends a request to a DNS. The DNS performs a lookup in the DNS repository and send the result of that lookup back to the requesting system. Similarly, when the system described in this invention requires information about a RFID/EPC tag that is not resident in its local EPC IS repository, it sends a query to the ONS which performs a lookup in the ONS repository to locate the EPC IS that has the information about the tag. The system then uses that EPC IS location

information to invoke a query against the provided EPC IS to retrieve the desired data.

Figure 5 shows the Message Network 90 component's integration with ThingsNet 70 and the BDDN 40. The Message Network 90 uses the same relationship repository 92 as ThingsNet 70 and BDDN 40. The relationship repository 92 stores the rules for sending alerts and notifications to trading partners. When events defined by the rules occur, the Message Network 90 is invoked to execute the rules and send the appropriate alerts and notifications to the appropriate trading partners or individuals identified by the trading partners. Alerts and notifications may be sent in real time using Instant Messaging or in batch using email. MessageNet also provides mechanisms for escalation of alerts if no response is given within a specified time period.

Figure 6 shows the integration between epc-based RFID tags 93, barcodes 94 and a product information management system (PIM) 95. The PIM 95 holds all the required information about each product a supplier desires to be able to sell to its customers. Prior to understanding the integration between PIM and the tags, there needs to be an understanding of EPC/RFID tags. There are two different types of EPC tags. The first type of tag comes pre-encoded with their ID on the tag (Class 0). The second type of tag is one that can have its identification written to the tag prior to its use (Class 0+ or Class 1).

The PIM 95 stores information about each product and its attributes in a database 96. The database 96 contains the Global Tracking Identification Number (GTIN) and other attributes for each product. The GTIN is then used to generate a product's barcode. When initializing EPC/RFID tags for a product, the GTIN for that product is also used. In the case of a writable tag, the GTIN is embedded into the tag data. In the case of a non-writable tag, the tag is associated with the GTIN for the product being tagged. This association is stored in the EPC Repository 92. The association between the GTIN, a barcode and a RFID/EPC tag provides the ability to verify tag reads or barcode reads against the synchronized Product Catalog. This verification can occur on a barcode scan or a RFID/EPC tag read. The Document Network and/or Network 99 can execute searches against the PIM to ensure that events dealing with the movement of RFID/EPC tagged products are valid according to the associated business process.

The remaining Figures 7-9 provide details on the flow of information through the system for documents, RFID/EPC tag data and documents integrated with RFID/EPC tag data. Current best practices maintain a separation between business documents and RFID/EPC tag data. That is each (tag data, documents) data is treated as a separate stream of information. When correlation between the two is needed a computer system is used to check that the business document matches the RFID/EPC tag data. The purpose of this invention is to provide methods and computer systems that implement those methods for integrating business documents and RFID/EPC tag data.

Businesses that implement this methodology can gain substantial cost savings throughout their supply chain.

The flow chart in Figure 7 shows the separate flow for processing business documents. When any document is received, the first step in the process is to archive 102 that document for legal and historical purposes. Following that, the sequence engine 104 checks to make sure the document is in sequence for the business communication that the document relates to. If the document is not in sequence it is queued 106 until such a time when all other preceding documents in the business communication have been processed. If the document is in sequence, the next step is to translate 108 the document according to the business rules stored in the relationship repository for that document.

Following successful translation the choreography engine is called to process any additional related document 110. Next, the translated version of the document is archived 112 and then the document is routed to the appropriate location. The appropriate location is determined by the document type and the rules setup for that document type and trading partners. If the document is an inbound document it is routed to the appropriate back office system 114. If the document is an outbound document it is routed to the receiving trading partner 116. If the document is not successfully translated, a machine to human action is invoked (workflow) to notify the appropriate person of the failure so that the problems can be corrected and the document successfully translated.

For the EPC tag data network 70, which is shown in the flowchart of Figure 8, the flow of information starts when an RFID tag is applied to an object 11 and the tag is initialized 220 with the appropriate tag data 222. This tag data is then stored in the EPC information service database. Any time the tag passes through a tag reader (12) 224, the tag is validated 226 to ensure it is an authentic tag that as well as checking what the tag is attached to. If the tag is valid, it is then added to a collection 228 based on its location. For example, if the tag is applied to a case of goods and that case is placed on a tagged pallet, the EPC information service database 230 is updated with this information. Finally, this EPC tag data information is supplied to requesting applications 230 on request.

The inventive integration of the document flow with the EPC tag data flow as is shown in the flowchart shown in Figure 9. This process allows the business documents and the EPC tag data that relates to the business documents to be integrated into a single stream of data. This integrated stream of data provides a complete audit trail from the business document to the physical goods associated with those business documents. The integrated process follows the document-only process until the related documents are processed. Then, instead of archiving the translated

document, the relationship manager is queried to determine if EPC tag data needs to be embedded in the document. If it is determined that the EPC tag data should be embedded, the EPC tag data process is invoked to collect the required EPC tag data, the data is returned to the requesting application, in this case the business data document network (BDDN), and the EPC tag data is inserted into the proper location in the respective document.

The integrated process begins with a document being sent from one trading partner to the user of the system. As in the BDDN, the document is first archived and then checked to ensure that it has been received in the proper sequence as defined in the relationship manager database. Once the sequence check passes, the document is translated. If the translation fails, the document is queued and a notification is sent to correct the problem that is causing the translation failure. Once the document is translated into the proper format, the relationship manager is checked to determine if additional documents need to be generated. This is handled by the choreography engine. The translated document and any additional documents are checked against the database to determine if they can accept EPC/RFID tag data. If the document(s) can accept the EPC/RFID tag data, the EPC tag data network is called so the tag data relating to the specific document can be collected. As the EPC/RFID tags are read by the reader and processed by the EPC tag data network, the information is provided back to the BDDN and the received EPC/RFID tag data is inserted into the proper location in the document. Control is then passed back to the BDDN, which archives the new document structure (with embedded EPC/RFID tag data), the actions are logged and the document is delivered to the destination trading partner via the agreed protocol.

The principles, preferred embodiments and modes of operation of the present invention have been described in the foregoing specification. However, the invention should not be construed as limited to the particular embodiments which have been described above. Instead, the embodiments described here should be regarded as illustrative rather than restrictive. Variations and changes may be made by others without departing from the scope of the present inventions defined by the following claims.

**WHAT WE CLAIM IS:**

1. A RFID tag data integration system for use in a commercial data processing environment comprising at least one RFID/EPC reader and antenna for data collection from an RFID tag placed on a product, computer means with a software program being able to read and collect RFID tag data from a reader and to integrate the product tag with general information about the tagged product and to have these two streams of data integrated into a single stream of data for access and reporting.

2. A RFID tag data integration system of claim 1 wherein the computer program is further operable to retrieve the correct barcode data from the RFID/EPC tag data.

3. A RFID tag data integration system of claim 1 wherein said computer program product provides integration between a product GTIN and the bar code for the product.

4. A RFID tag data integration system of claim 1 wherein the tags are radio frequency identification (RFID) tags, each RFID tag carrying an electronic product code (EPC) as the unique tag identifier.

5. A RFID tag data integration system of claim 1 wherein the computer program product is further operable to display the product identification data in a human-readable format to a remote display device.

6. A RFID tag integration system as claimed in claim 1 including an external computer that stores or provides data needed by the system.

7. A RFID tag integration system as claimed in claim 1 wherein said computer means sends alerts to designated persons about the tagged product based on predetermined rules.

8. A notification system for objects identified by an RFID tag comprising computer means to receive product identification data from said RFID tag, compare product identification data over the internet with stored meta data pertaining to the product, and retrieve said meta data, a relationship repository containing a series of prescribed rules for handling specific events directed toward the conduct of a specific business and requirements for same, said relationship repository reviewing said rules to provide appropriate alerts and notifications for specific businesses so that when events defined by the rules occur, a message network sends out messages to at least one designated person.

9. A notification system as claimed in claim 8 where said messages consist of one or more messages relating to product depletion, location or product safety.

10. A notification system as claimed in claim 8 including a plurality of readers to read said objects RFID tag and transmit identification data to said computer means.

11. A notification system as claimed in claim 8 wherein said messages are sent in real time

using instant messaging.

12. A notification system as claimed in claim 8 wherein said messages are sent in batch using email.

13. A notification system as claimed in claim 8 wherein said messages are escalated by retransmission or noticing other parties if no response is given back within a specified time period.

14. A notification system as claimed in claim 8 including means to provide for at least one alert if the message to said at least one designated person is not responded to by that designated person.

15. A notification system as claimed in claim 8 including means to provide for a plurality of alerts if at least one of said messages to said at least one designated person is not responded to by that designated person.

16. A RFID tag data information system for use in a commercial data processing environment comprising at least one RFID/EPC reader and antenna for data collection from an RFID tag placed on a product, each RFID tag carrying an electronic product code (EPC) as the unique tag identifier, a communication server receiving data from said at least one RFID/EPC reader and antenna, a process engine for processing all machine to machine and machine to human data events that occur with the system, and applying a series of prescribed rules for handling such event, said process engine being able to read and collect RFID tag data and provide integration and correlation between a product GTIN and the bar code for the product, and to integrate the product tag with general information about the product and to display the product identification data in a human-readable format to any display device.

17. A RFID tag data information system as claimed in claim 16 wherein said product display consists of one or more alerts and events via e-mail, internet messaging, SMS and popup box.

18. A RFID tag data information system as claimed in claim 16 wherein said RFID/EPC reader and antenna are at a remote location from said process engine.

19. A RFID tag data information system as claimed in claim 16 including a communication middleware component for communication between and among the component of the system and for communicating with a device external to the system.

20. A RFID tag data information system as claimed in claim 16 wherein said process engine delivers alerts and events via at least one of e-mail, internet messaging, SMS and popup box.

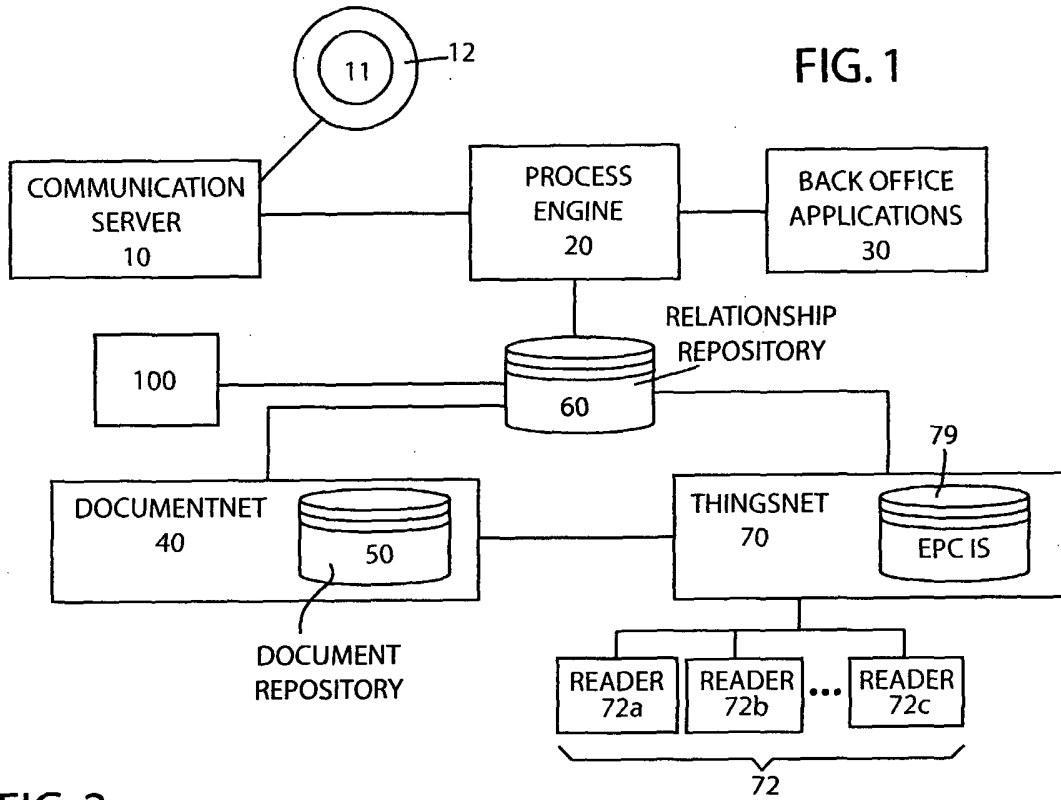
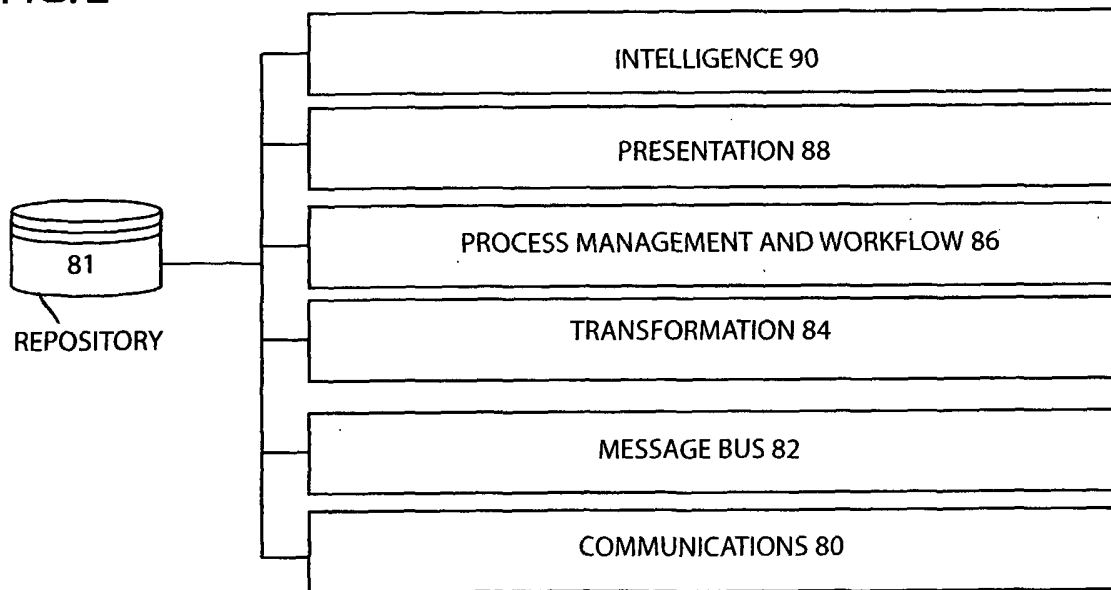


FIG. 2



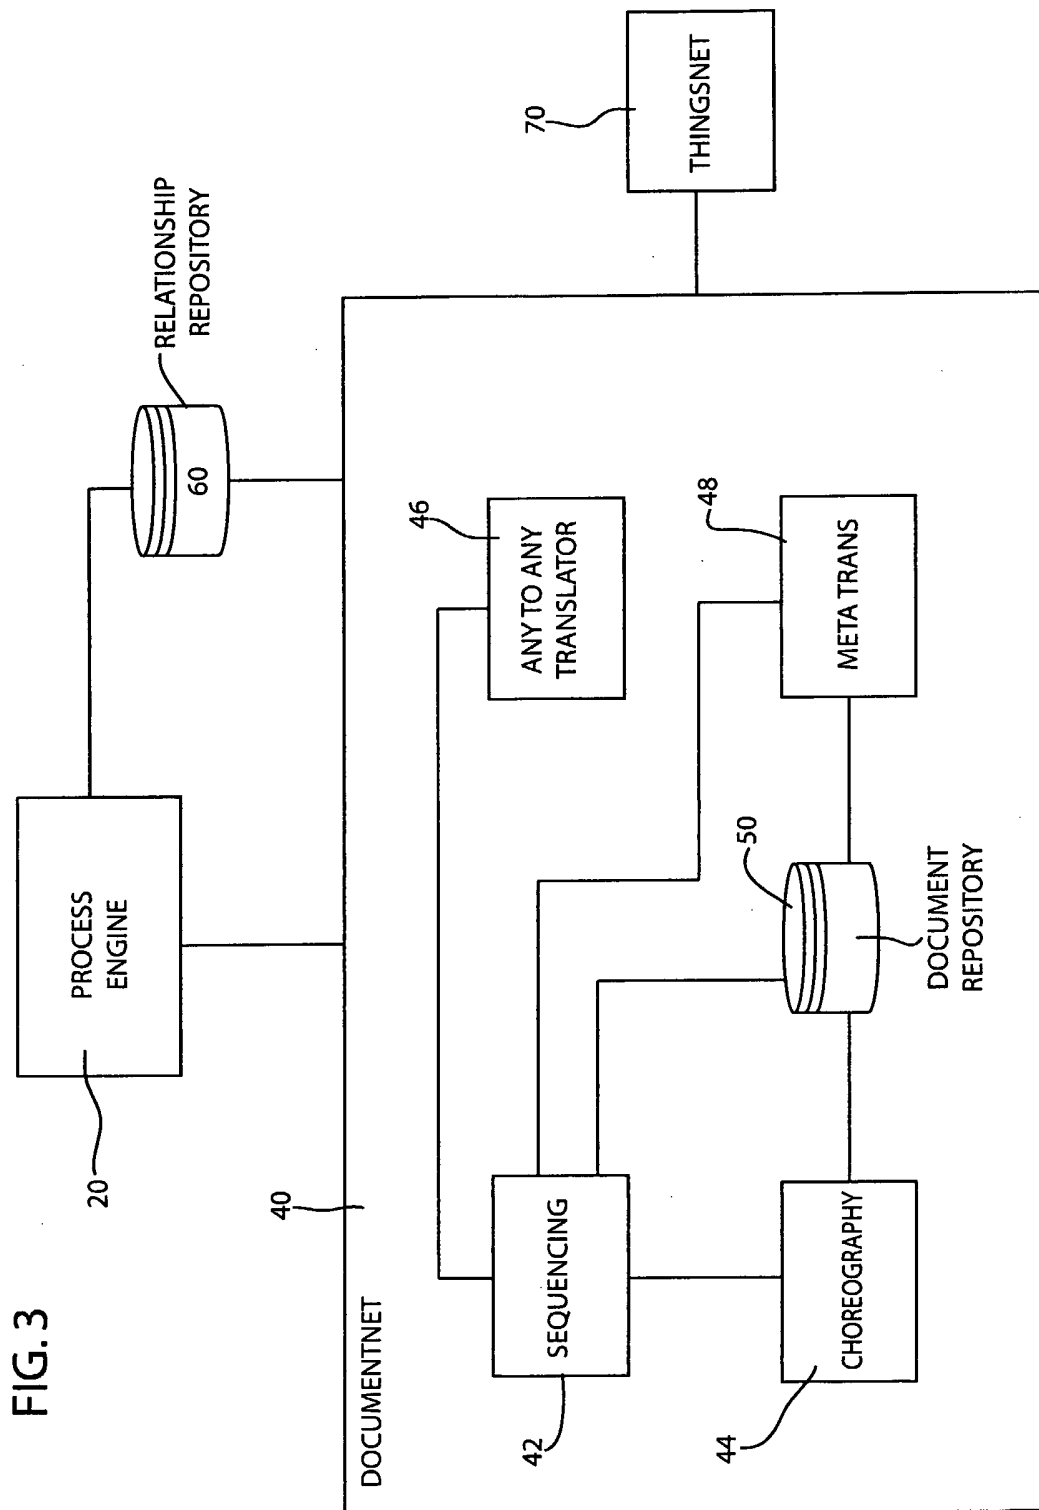


FIG. 3

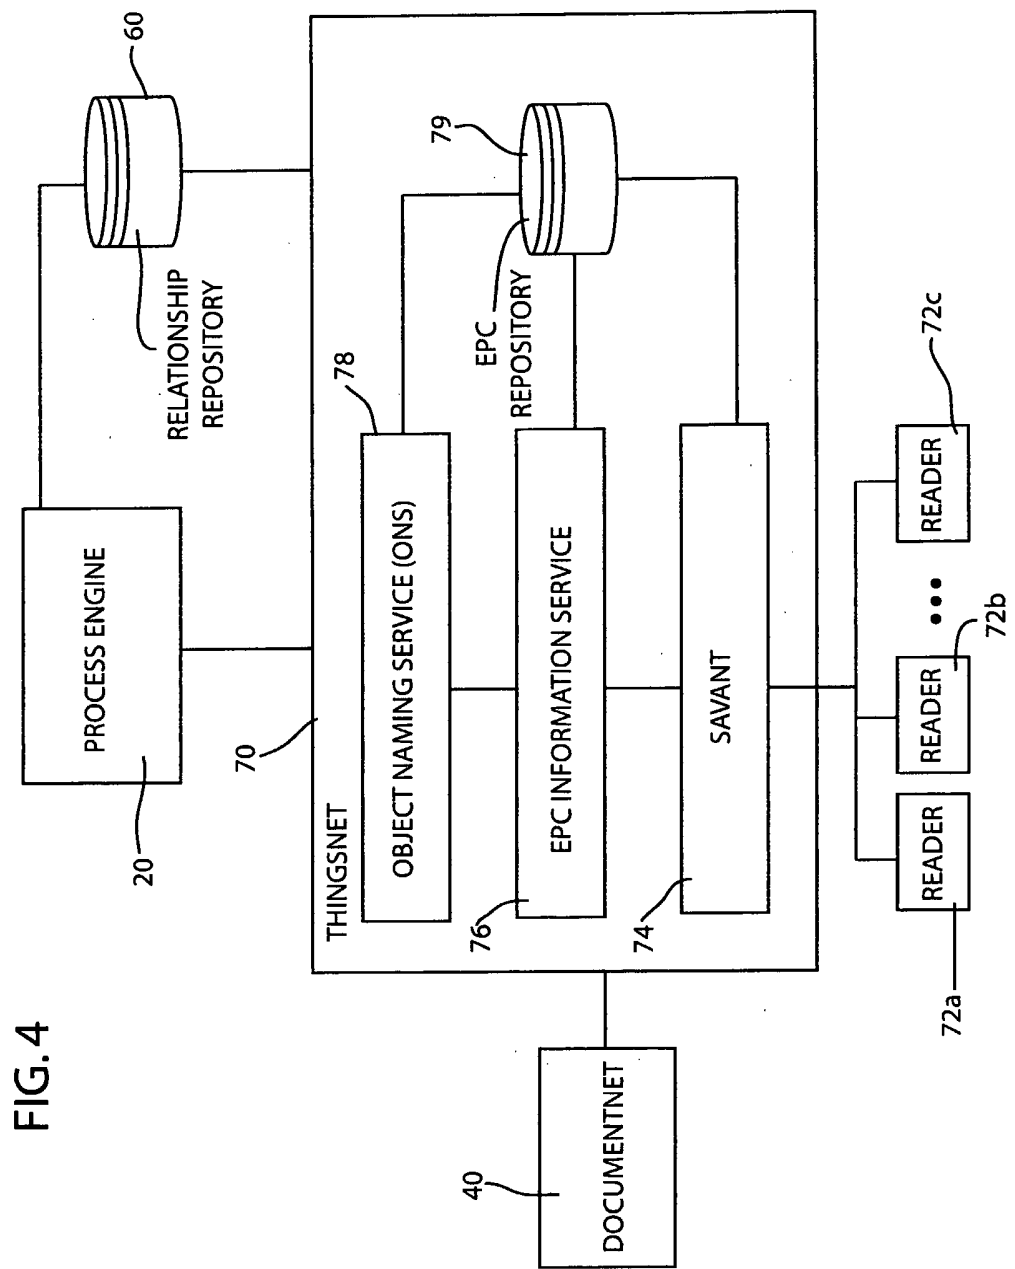


FIG. 4

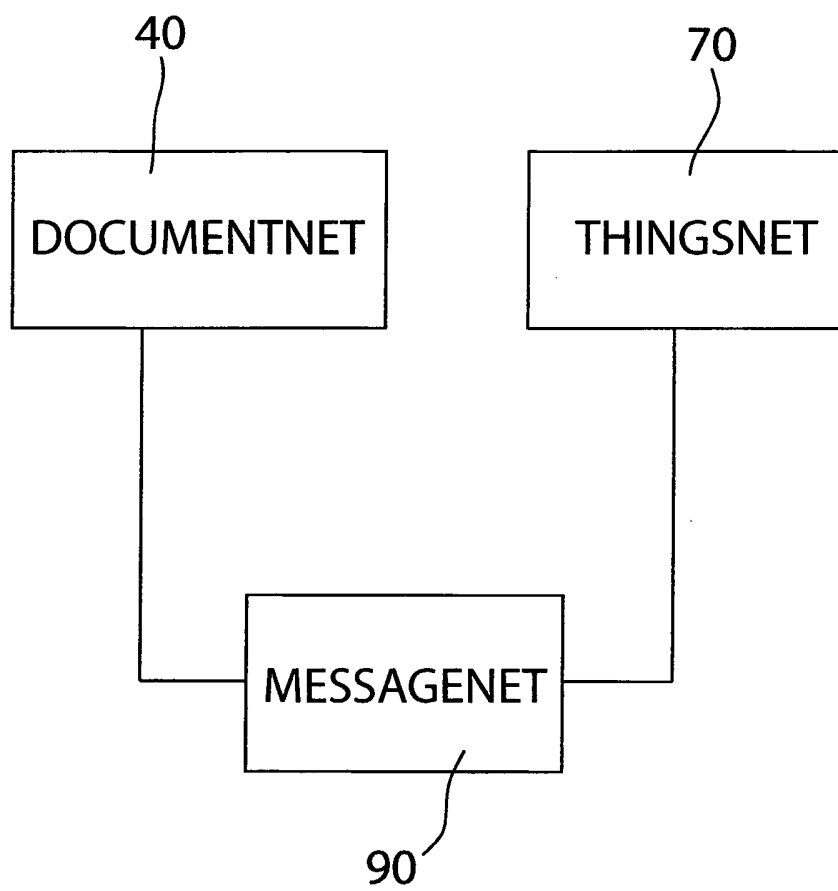


FIG. 5

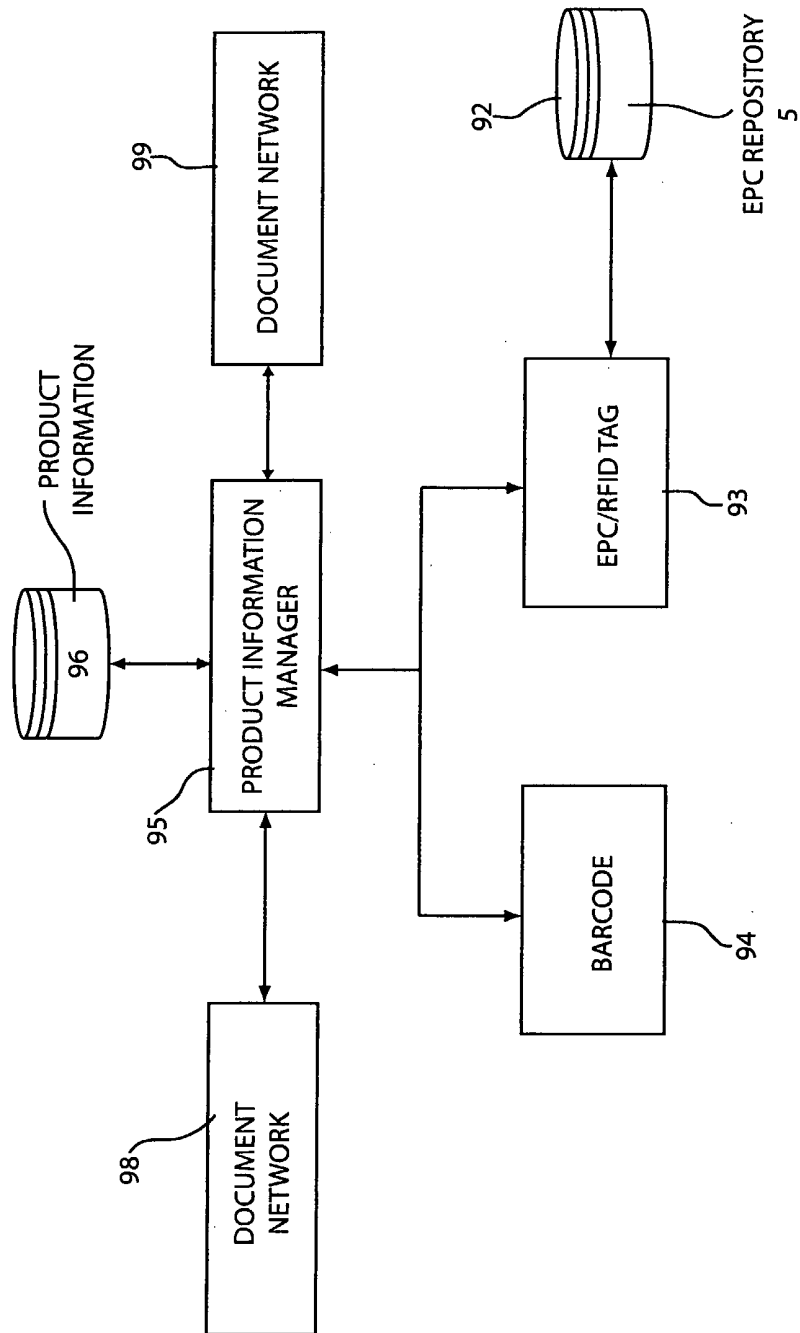


FIG. 6

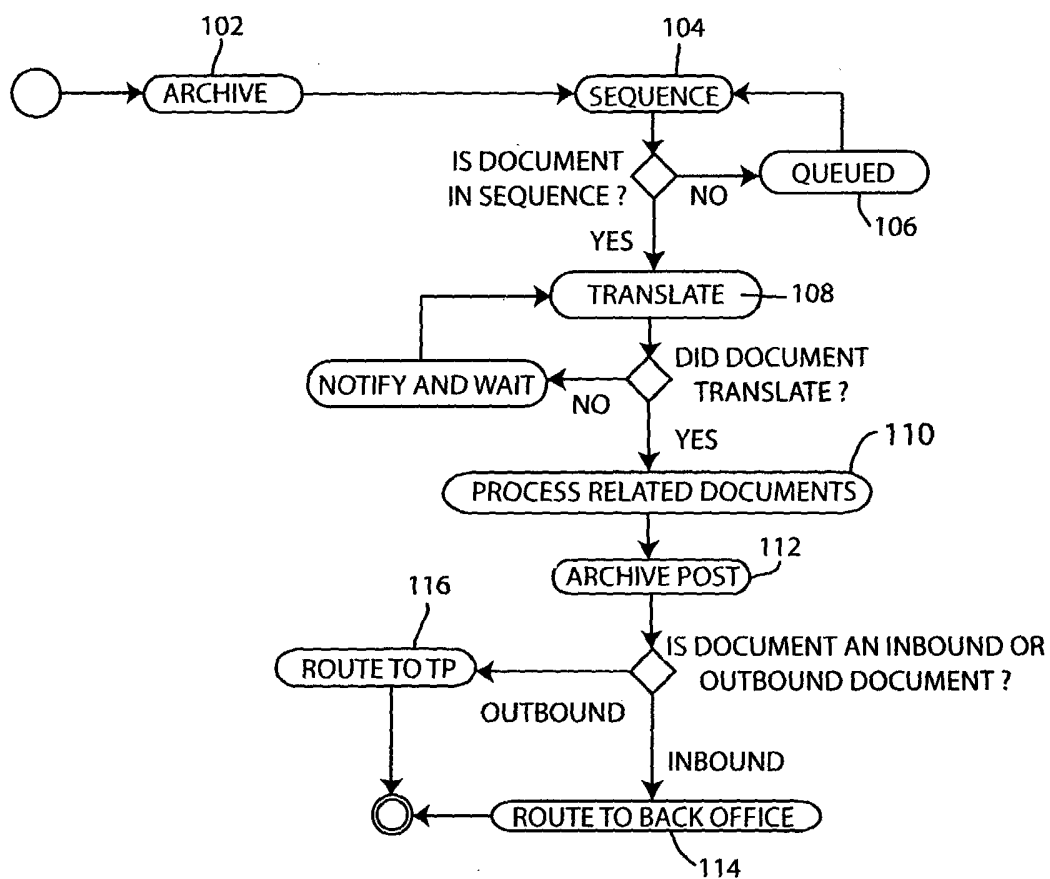


FIG. 7

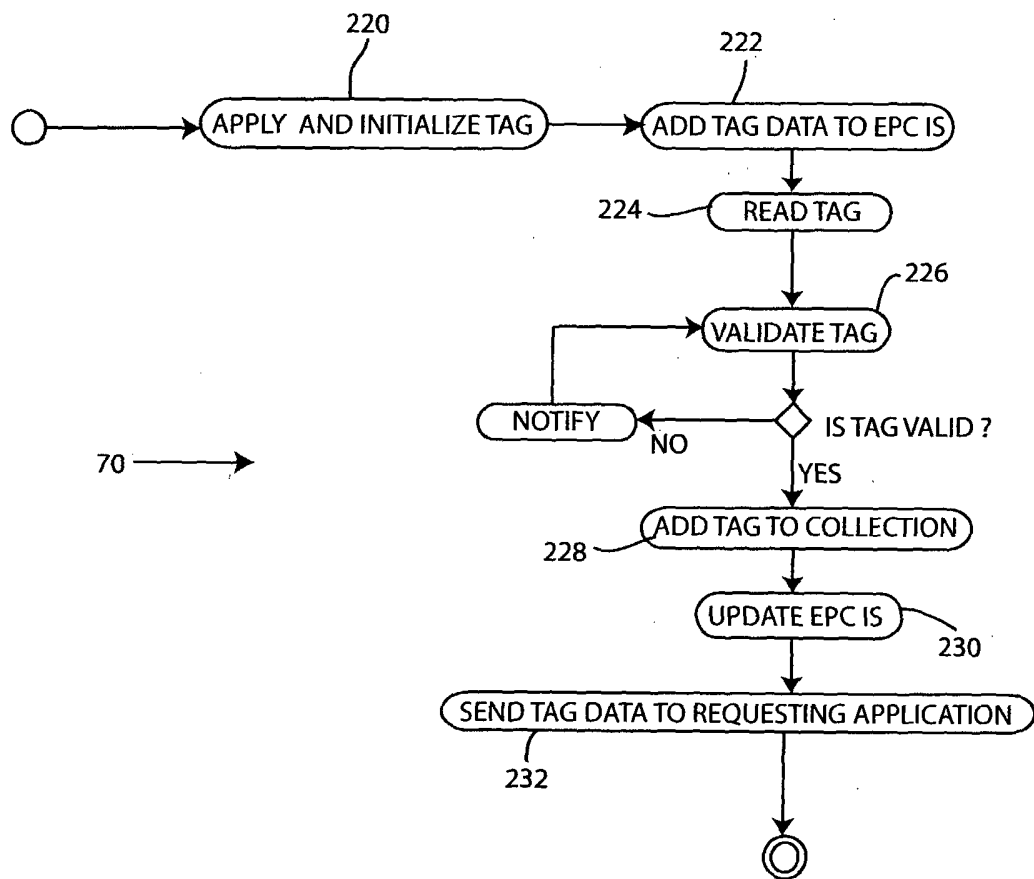


FIG. 8

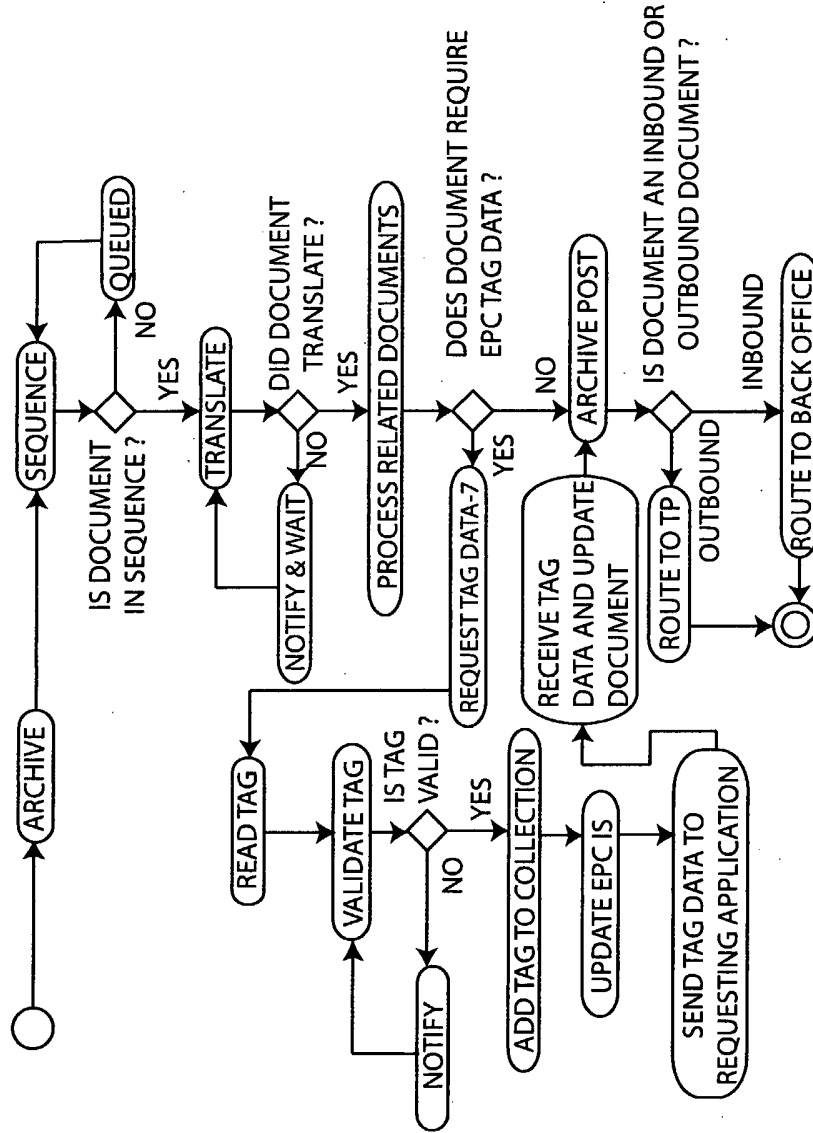


FIG. 9