




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H04M 11/06	A1	(11) International Publication Number: WO 94/27398 (43) International Publication Date: 24 November 1994 (24.11.94)
(21) International Application Number: PCT/US94/04500 (22) International Filing Date: 29 April 1994 (29.04.94) (30) Priority Data: 08/057,833 7 May 1993 (07.05.93) US (71)(72) Applicants and Inventors: DENNISON, Everett [US/US]; 200 Glenview, Canfield, OH 44406 (US). PHARIS, Albert, H. [US/US]; 7130 S. Racoon Road, Canfield, OH 44406 (US). (74) Agent: GERNSTEIN, Terry, M.; 1015 Salt Meadow Lane, McLean, VA 22101 (US).	(81) Designated States: AT, AU, BR, CA, CH, CN, DE, DK, ES, FI, GB, HU, JP, KR, LU, NL, NO, NZ, PL, PT, RO, RU, SE, UA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>	

(54) Title: CELLULAR TELEPHONE SYSTEM THAT USES POSITION OF A MOBILE UNIT TO MAKE CALL MANAGEMENT DECISIONS

(57) Abstract

A cellular telephone system (20) includes a plurality of cell sites (14) and a mobile telephone switching office (MTSO, 12). Call management, including selection of a cell site most appropriate for a call associated with a mobile unit (M, M') are made based on the geographic location of the mobile unit as opposed to the strength of the signal associated with the call. The geographic location of the mobile unit is precisely determined using triangulation, a NAVSTAR global positioning system, or its equivalent. Each mobile unit includes a GPS receiver (24) that receives information from a geostationary satellite (22) to determine the precise location of the mobile unit. This position information is relayed to the cell site initially managing the mobile unit, and the mobile unit is handed off to a cell site that is most appropriate for the call. Initial selection of an entrance cell site is made based on signal strength, but further call management decisions are made based on location of the mobile unit.

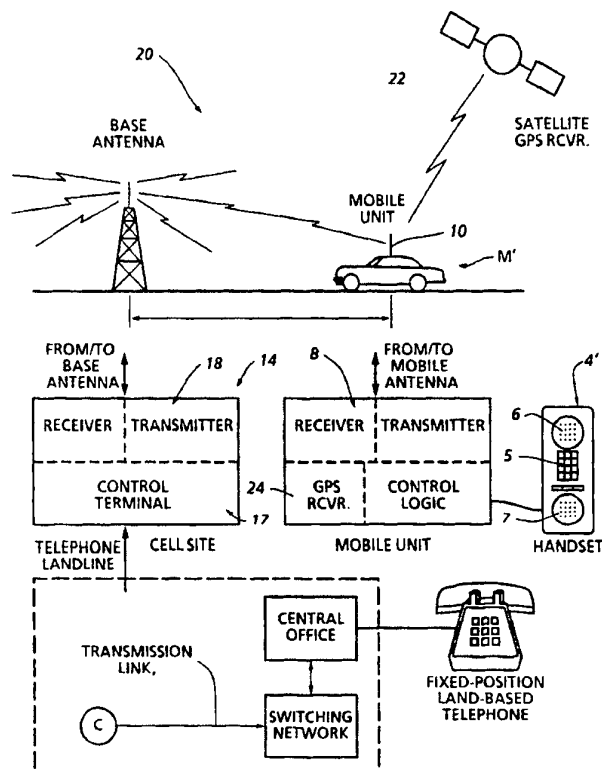

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

CELLULAR TELEPHONE SYSTEM THAT
USES POSITION OF A MOBILE UNIT
TO MAKE CALL MANAGEMENT DECISIONS

Technical Field

The present invention relates to the general art of cellular mobile radiotelephone (CMR) technology, and to the particular field of managing the calls in a cellular system.

The present application is a continuation-in-part of Serial Number 07/813,494 filed on 12/26/91, and incorporates the entire disclosure thereof by reference.

Background Art

CMR is a rapidly growing telecommunications system. The typical CMR system includes a multiplicity of cells, such as indicated in Figure 1. A particular geographic area is subdivided into a multiplicity of subareas, with each of the subareas being serviced by a stationary transmitter/receiver setup. The cells are set up to carry signals to and from mobile units M in the range of the cell. If one cell becomes too crowded, it can be divided into smaller cells, by a process known as cell splitting. As can be seen from Figure 1, any particular geographic area can become quite complicated with cells overlapping each other, and overlapping cells of other neighboring cellular systems. It is noted that the term "cellular" is intended to be a term of convenience, and is not intended to be limiting. The present disclosure is intended to encompass any communication system in which an overall area can be divided into one or more subareas such as shown in Figure 1.

A typical CMR set up is indicated in Figures 2 through 7, and will be described so an understanding of the problem to which this invention is directed can be obtained.

Figures 2, 3, 4 and 4A show a typical cellular telephone unit 2 having a unique mobile identification number stored in a suitable location such as an electrically erasable programmable read-only memory (not shown). Telephone units of this kind are known to those skilled in this art, and thus will not be described in detail.

The telephone unit 2 includes a handset 4 having a keypad 5 as well as a speaker 6 and a microphone 7. A transceiver 8, ordinarily built into the telephone unit 2, exchanges signals

via an antenna 10 with a mobile telecommunications switching office or MTSO 12 via a cell site 14. A duplexer 15 connects the antenna to the transceiver. The cell site 14 includes an antenna 16 connected to a control terminal 17 via a transceiver
5 18. The cell 14 is connected to the MTSO via a transmission link 20.

Referring to Figures 4 and 5, the operation of the CMR can be understood. The mobile units communicate with the MTSO via cell sites. Under systems known prior to the parent
10 application, the systems in the MTSO determine which cell site will handle the mobile unit based on the signal strength received by one or more cell sites in the system. The MTSO performs the decision making in providing service to the mobile units, controls the handoff process, contains subscriber
15 information and performs telephone office switching functions. The mobile unit M moves about the geographic areas covered by the various cells as indicated in Figure 1. As that mobile unit moves about, it decodes the overhead message control signals generated by various cell site control channels. The mobile
20 unit locks onto the cell site that is emitting the strongest signal. The mobile unit rescans channels periodically to update its status. If, for example, a fixed-position land-based telephone T is used to call the mobile unit, a signal is sent via landlines L, to the central office CO of a public/switched
25 telephone system (PTSN) 12A. This system then utilizes the switching network SN associated therewith to call the MTSO 12 via a transmission link L1. The MTSO then utilizes its own switching network and generates a page request signal to all cell sites via transmission links, such as the transmission
30 link 20. The cell site which has been notified of the presence of the mobile unit M sends a signal back to the MTSO via the landlines alerting the MTSO of the presence of the mobile unit. The MTSO then orders the mobile unit, via the notifying cell site, to tune to an assigned channel and receive the call.
35 Billing and other business information are recorded in the MTSO at this time.

On the other hand, during call origination, the mobile unit rescans the control channels to determine which is the best server based on signal strength. Upon selecting the best

server, the mobile unit transmits call site information on the control channel receive frequency and then receives a voice channel to tune to if the mobile unit is authorized to place a call.

5 As the mobile unit moves, the signal strength between that mobile unit and the originating cell site changes, and perhaps diminishes. Since signal strength is an inverse function of the square of the distance between the mobile unit and the cell site, signal strength can change rapidly and drastically as the
10 mobile unit moves with respect to the cell site and therefore must be monitored closely. Moreover, signal strength can be strongly affected by terrain, environmental conditions as well as interference from other sources. The MTSO has a signal strength table ST, and signal strength from the mobile unit is
15 constantly compared to acceptable signal strength levels in the table. Such a table can be located in each cell site if desired.

 Should signal strength diminish below a preset range, the MTSO generates a "locate request" signal to all cell sites that
20 neighbor the original cell site. Each of such neighboring cell sites receiving a signal from the mobile unit signals the MTSO, and the signal strength from such neighboring cell sites are checked against the signal strength table. The MTSO makes a decision as to which cell site should control the call, and
25 notifies the original cell site to order the mobile unit to retune to a voice channel of the new cell site.

 As soon as the mobile unit retunes, the mobile unit completes the call via the new cell site channel. This transfer of control is known as a handoff.

30 While this method of making switching decisions has worked well in the past, the growth and sophistication of the cellular industry has resulted in severe drawbacks to this method. First, due to uneven terrain, unpredictable environmental conditions, interference and the like, many cellular companies
35 have been required to construct numerous cell sites. These cells often overlap neighboring cell sites and provide redundant coverage. This is extremely expensive, not only from the standpoint of construction costs, but due to monitoring and staffing costs as well. Even at this, conditions can change so

rapidly that coverage may still be inconsistent.

Still further, due to idiosyncrasies in terrain and environment, a mobile unit may use a cell that is located far from the mobile unit rather than a cell located immediately adjacent to that mobile unit. Hilly terrain is a common example of this problem. While this may not be a technical problem, it is important because a cellular company cannot assess long distance charges and/or message units to the calls. This deprives the cellular company of income that it could otherwise receive and customers of optimum service. Communities are also deprived of tax income that might be assessed against such calls as well.

Still further, since only signal strength is used to make switching decisions, the location of a caller is not ascertainable. This could be important in keeping track of calls.

Other problems that have been experienced in such cellular systems include the inability to completely control the cell site transmit signal, crosstalk noise interference, dropped calls, overlap and an inability to adequately service areas with undulating terrain without infringing the borders of other cellular territories.

Therefore, there is a need for a cellular system that can provide consistently high quality service, yet can do so with a minimum number of cell sites in a particular geographic area. Still further, there is a need for a cellular system that can accurately assess charges for all CMR services including message units for calls covering a certain distance within the geographic area.

Exact location through the use of Geopositional Satellite information (as explained in the parent application) is one improvement.

Objects of the Invention

It is a main object of the present invention to provide a cellular system that can provide high quality service using only a minimum number of cell sites within a given geographic area.

It is another object of the present invention to improve the performance of the incorporated patent application.

It is another object of the present invention to provide a cellular system that uses the exact geographic location of a mobile unit in making call management decisions.

5 It is another object of the present invention to provide a cellular system that uses the exact geographic location of a mobile unit in making call management decisions, with that exact geographic location being determined using triangulation.

10 It is another object of the present invention to provide a cellular system that can accurately track a mobile unit within the geographic area covered by the cellular system.

It is another object of the present invention to provide a cellular system that can assess charges for calls based on the geographic location of the call.

Disclosure of Invention

15 These, and other, objects are achieved by a cellular system that makes switching and call management decisions based on the location of a mobile unit rather than on the strength of the signal associated with that mobile unit. The exact location of each mobile unit is determined using a Global Positioning
20 System (GPS), LORAN, triangulation, or other position determining system. The NAVSTAR global positioning system, or GPS, is a system employing ultimately eighteen satellites in twelve hour orbits of 55° inclination. The system is being implemented by the Department of Defense for military use.
25 However, it has a "clear access" (C/A) channel that is available for general civil use. The GPS is a passive navigation system on the part of the user, in that only reception of satellite-transmitted signals is required by the user to compute position. The GPS provides a capability for
30 continuous position determination, and a position can be computed on the order of every second of time, and thus provides a capability of determining the position of a highly mobile vehicle. A full discussion of the GPS is presented in textbooks, such as "Handbook of Modern Electronics and
35 Electrical Engineering," edited by Charles Belove and published in 1986 by Wiley-Interscience (see chapter 54 thereof, the disclosure of which is incorporated herein by reference), and includes a satellite positioned in a geostationary orbit and communicating with ground-based receivers. Based on the signals

received from the satellite, the exact position in longitude and latitude, of the ground-based receiver can be determined with an extremely high degree of accuracy and precision.

5 The exact longitude and latitude of the mobile unit is then communicated to the MTSO, and the cell site that services that particular position is signalled by the MTSO to carry the call associated with the mobile unit. The position of the mobile unit is constantly updated, and call management decisions, such as handoffs, can be made based on the location
10 of the mobile unit rather than the strength of the signal associated with that unit. The MTSO has a look-up table in its data storage facilities that compares positional data from the mobile units to data associated with cell site coverage areas. Based on a look up in this table, the MTSO can select the cell
15 site most appropriate to a call.

Since the position of the mobile unit is known to the MTSO, the assessment of message units, taxes, and other charges can be made. The billing will be more consistent than is possible with present systems. Of course, call routing will be
20 greatly improved in the system of the present invention as compared to prior systems.

Still further, since call management decisions are made based on position of the mobile unit, the number of cell sites can be reduced as communication is not subject to vagaries of
25 weather or the like to the degree that call management decisions based on signal strength are. Even with the reduced number of cell sites, the quality of calls using such a system is improved due to proper handoff. The system is quite flexible, and cell site placement and frequency reuse are
30 extremely efficient since call management is much more precise than in systems that use signal strength to make call management decisions.

The cellular system of the present invention in which call management decisions are made based on position of the mobile
35 unit can reduce or eliminate the provision of cellular service beyond the authorized area, in effect reducing the interference to and from neighboring cellular carriers (reduction of inter-system interference) and more precisely define the inter-system service boundaries and handoff parameters. This system also

permits precise definition of service boundaries for individual cell sites thereby allowing for greater system control and the reduction of intra-system interference. Still further, accurate and detailed cell site usage and traffic pattern data can be developed in the present system, thereby enabling accurate and precise control of system growth. The present cellular system can also be real-time tailored based on current cellular use.

Brief Description of Drawings

Figure 1 illustrates a geographic area divided into a multiplicity of cells.

Figure 2 illustrates a typical prior art mobile cellular telephone and its link with a fixed cell site and an MTSO.

Figure 3 illustrates the mobile unit of the cellular telephone system shown in Figure 2.

Figure 4 illustrates a typical prior art cellular system in which a mobile unit can be connected with a fixed-position unit.

Figure 4A is a block diagram showing systems included in the MTSO shown in Figure 4.

Figure 5 is a flow diagram of a call originated by the PTSN (public service telephone network) and a mobile unit using a prior art cellular system.

Figure 6 is a block diagram of a mobile unit of a cellular telephone system which incorporates a GPS location determining system embodying the present invention.

Figure 7 illustrates a cellular system incorporating a GPS position locating system for a mobile unit communicating with other units, such as the fixed-position unit shown.

Figure 7A is a block diagram showing systems included in the MTSO shown in Figure 7.

Figure 8 is a block diagram illustrating the cellular system embodying the present invention.

Figure 9 illustrates a look-up table that is incorporated into the MTSO of the present invention to make call management decisions based on the location of a mobile unit.

Figure 10 is a block diagram illustrating a landline-to-mobile unit call in which position data are exchanged between the mobile unit and the MTSO.

Figures 11A and 11B comprise a flow chart illustrating a

call sequence between a mobile unit and another unit in which switching decisions are made based on the position of the mobile unit rather than the strength of the signal associated with the mobile unit.

5 Figure 12 illustrates a method of locating a mobile unit using triangulation, with the location being used to make call management decisions.

Best Mode for Carrying out the Invention

10 Shown in Figures 6, 7 and 7A is a cellular system 20 embodying the present invention. The cellular system 20 uses positional data associated with the mobile unit M' to make call management decisions. To this end, the cellular system 20, while similar in all other respects to the cellular system illustrated in Figures 2 and 3, includes means for accurately and precisely determining the exact position of the mobile unit
15 M', and then further includes means for using this positional information to determine which cell site is best suited to handle a call associated with that mobile unit M'.

20 The means for accurately determining the precise position of the mobile unit includes a Global Positioning System. The GPS includes satellites, such as satellite 22 in orbit about the earth. Each mobile unit further includes a GPS receiver 24 located between the duplexer and the logic circuitry 25 of the mobile unit. The GPS receiver communicates
25 with the satellite 22 and the exact longitude and latitude of the mobile unit are determined. This information is sent to the MTSO via a cell site, and the MTSO uses a look-up table such as disclosed in Figure 9, containing the geographic location of each cell site in the cellular system, to determine which cell
30 site is most appropriate for use by the mobile unit. The mobile unit communicates with cell sites using unused bits of the aforescussed overhead messages to send its positional information to the MTSO when the mobile unit is first
35 activated. This positional information is relayed to the MTSO by the first cell site to communicate with the mobile unit. The MTSO then selects the cell site most appropriate for the mobile unit and hands that mobile unit off to that cell site. The cell sites transmit system service boundaries in their overhead messages that are interpreted by mobile units. The mobile units

use the location information supplied by the GPS receiver as opposed to signal strength to determine which system to originate on. Call termination can utilize the paging process as is currently utilized. A response from a mobile unit includes the location information, and the designated control channel instructs the mobile unit to tune to one of its channels. A call in progress utilizes the overhead message of the voice channel to communicate location information. Once a mobile unit that is call processing on a particular site crosses a cell boundary, it is instructed to perform a handoff to the cell that is to service the new location. It is understood that the GPS is used as an example of the preferred source of positional data; however, other sources similar to the GPS can be used without departing from the scope of the present invention. All that is required is that the source of positional data be able to generate precise and accurate locational data on a fixed or a rapidly moving object. It is also helpful, but not absolutely required, that the CMR be only passively involved in the determination of the positional data.

The handoff process is similar to the present handoff processes, except it will be controlled according to position of the mobile unit instead of signal strength. This position information is used to determine call rating and taxing for billing purposes and call routing to make sure that the proper services for that location are provided.

A "locate request" signal is not used, since the exact location of the mobile unit is known to the MTSO. However, as indicated in Figure 8, a signal strength method can also be used in making call management decisions if suitable. Such a process would be used if the mobile unit moves into a prior art cellular system.

A call using the cellular system of the present invention is illustrated in Figure 11. Initial communication between a mobile unit and the MTSO is established using the overhead communication network described above. The mobile unit scans marker channels and initially locks onto the cell site that has the strongest signal. This cell site may not be the most appropriate cell site for use by that mobile unit, but it serves as an entrè into the system. Once this initial

communication is established, the mobile unit uses the GPS receiver 24 and GPS satellite 22 and to determine its exact longitude and latitude. This information is then relayed to the MTSO using the originating cell site. The MTSO uses this
5 information in conjunction with a look-up table such as shown in Figure 9 to establish communication between the mobile unit and the cell site most appropriate to that mobile unit. The mobile unit is then handed off to that cell site. A call initiated by that mobile unit is routed through the appropriate
10 cell site.

As indicated in Figure 11, business information associated with the call, can be recorded at the MTSO. As indicated in Figure 10, the dotted lines represent data transmission that contains GPS information. It is also noted that since both a
15 position controlled system and a signal strength system are included in the cellular system of the present invention, the MTSO can include a software system in the memory 30 shown in Figure 8 to use the position controlled system, but to also test signal strength, and to use a signal strength controlled
20 system if a signal still falls below a predetermined value when making call management decisions based on the position of the mobile unit. In this manner, the best of both systems can be obtained.

The system of the present invention can also be used to
25 allow a mobile to place calls only on its home system at the decision of the mobile. The mobile locating features of the system could also be important in other contexts, such as emergencies or the like.

The use of triangulation is another means of providing
30 mobile location information to the MTSO for the purpose of making intelligent switch management decisions based on the exact geographic location of the mobile unit. This method is illustrated in Figure 12, and allows the MTSO to determine the exact location of a mobile cellular telephone MCT by using the
35 received mobile signal S1, S2 and S3 from three or more cell sites E, F, and G, respectively. Through the precise timing of the received signal at three or more sites, the MTSO can then determine the exact location of the mobile phone in relation to the intended coverage area of each given cell site in the

system. The MTSO can include circuits to compensate for the time delay difference between sites of the received mobile signal and use those signals to determine the distance from each site. The system also includes a computer that can locate the mobile location in relation to the geographic size of each cell site.

The MTSO will have a set of look-up tables, as does the previously proposed system in the parent application, that are used to determine the shape and location of the individual cell sites.

Like the GPS system disclosed in the parent application, if the MTSO fails to receive exact mobile location information by either the triangulation system or from the GPS data, the MTSO can then default to the original method of making cell site decisions based simply on signal strength alone.

It is understood that while certain forms of the present invention have been illustrated and described herein, it is not to be limited to the specific forms or arrangements of parts described and shown.

CLAIMS

1. A wireless radio communications system such as a cellular telephone, that includes one or more cell sites and one or more mobile telephone switching offices (MTSO), said system comprising:
- 5 A) locating means in a radio communications system for determining the exact geographic location of a mobile unit; and
- B) means in the MTSO for making call management decisions based on the geographic location of the mobile unit, said
- 10 management means including means for storing the geographic location, shape and size of each cell site in the communications system and for comparing the exact geographic location of the mobile unit to the geographic location of each cell site and for selecting a cell site for use by the mobile
- 15 unit based on such comparison.
2. A method of making call management decisions in a cellular telephone system having a plurality of cell sites at various geographic locations and an MTSO in which the geographic location of each cell site in the cellular telephone system has
- 20 been stored, the method comprising steps of:
- A) establishing an exact geographic location for a mobile unit using triangulation;
- B) matching the geographic location of the mobile unit to a cell site geographic location, and selecting a cell site based
- 25 on such matching; and
- C) using the selected cell site matched to the mobile unit to handle calls associated with the mobile unit.
3. The method defined in Claim 2 further including a step of handing off the mobile unit to a second cell site based on the
- 30 position of the mobile unit.
4. The system defined in Claim 1 further including means for placing location data on existing voice and data communication signals.
5. The method defined in Claim 2 further including a step of
- 35 continuously monitoring the position of the mobile unit as the mobile unit moves, and handing off the mobile unit to various cell sites based on instantaneous location of the mobile unit.
6. The method defined in Claim 2 further including a step of assessing message unit charges on calls made to or from a

mobile unit based upon the geographic location of the mobile unit.

7. A method of making call management decisions in a cellular telephone system having a plurality of cell sites at various geographic locations and means in which the geographic location of each cell site in the cellular telephone system has been stored, the method comprising steps of:

A) establishing an exact geographic location for a mobile unit;

B) matching the geographic location of the mobile unit to a cell site geographic area and selecting a cell site based on such matching; and

C) using the selected cell site matched to the mobile unit to handle calls associated with the mobile unit.

- 1 / 14

FIG. 1
(PRIOR ART)



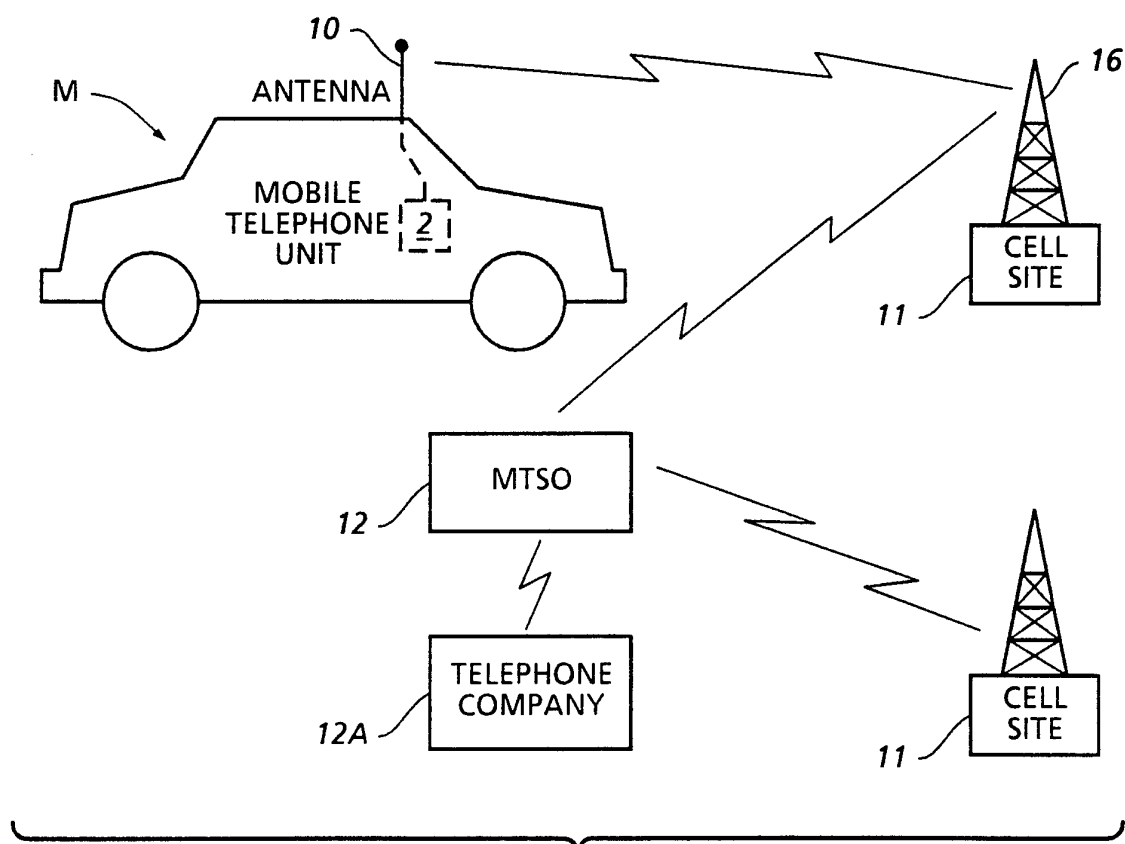


FIG. 2
(PRIOR ART)

FIG. 3
(PRIOR ART)

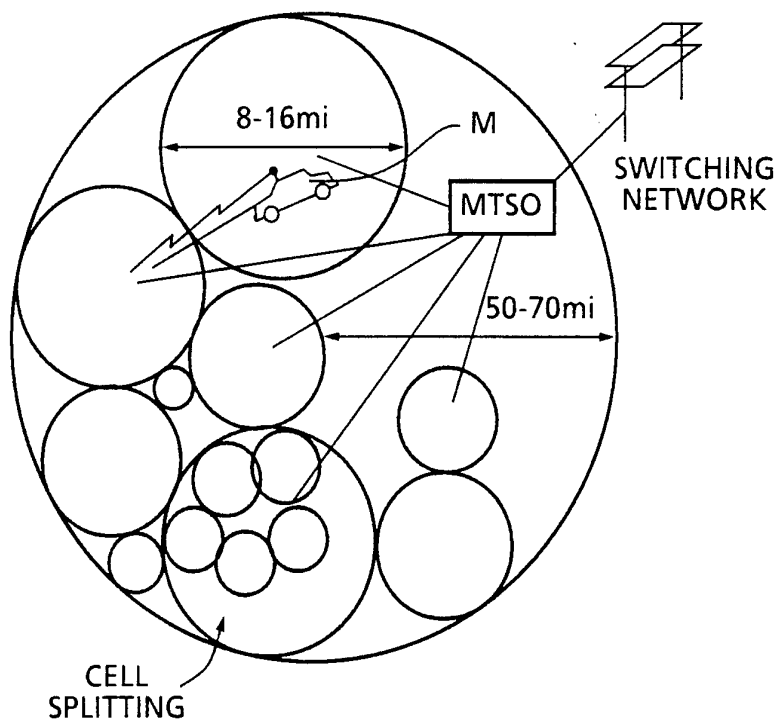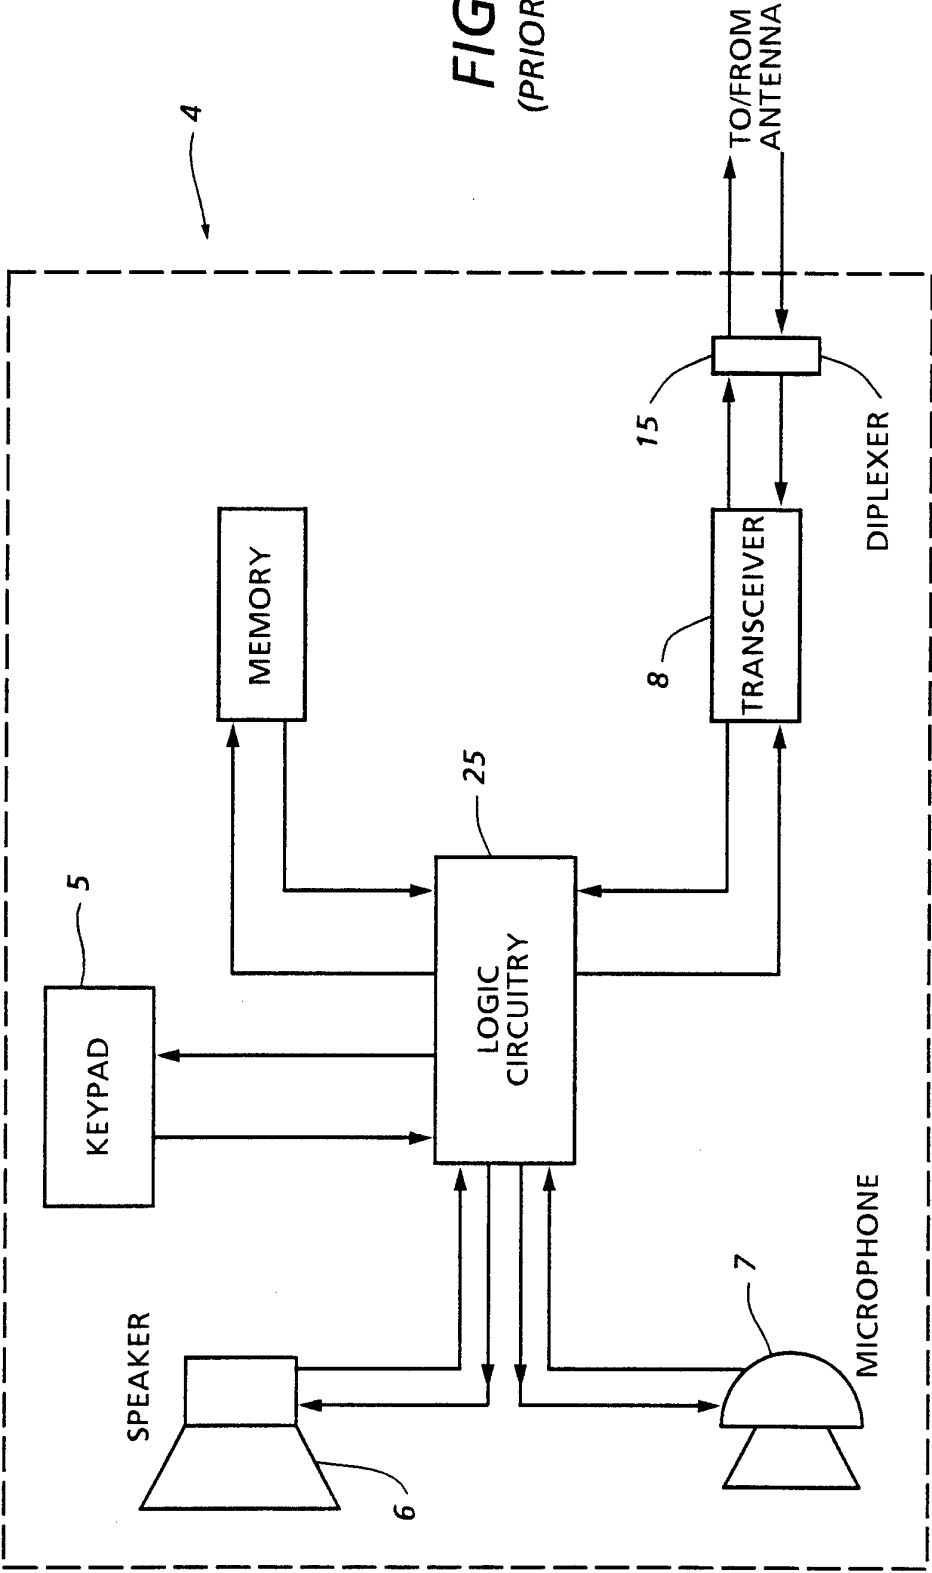

- 3 / 14

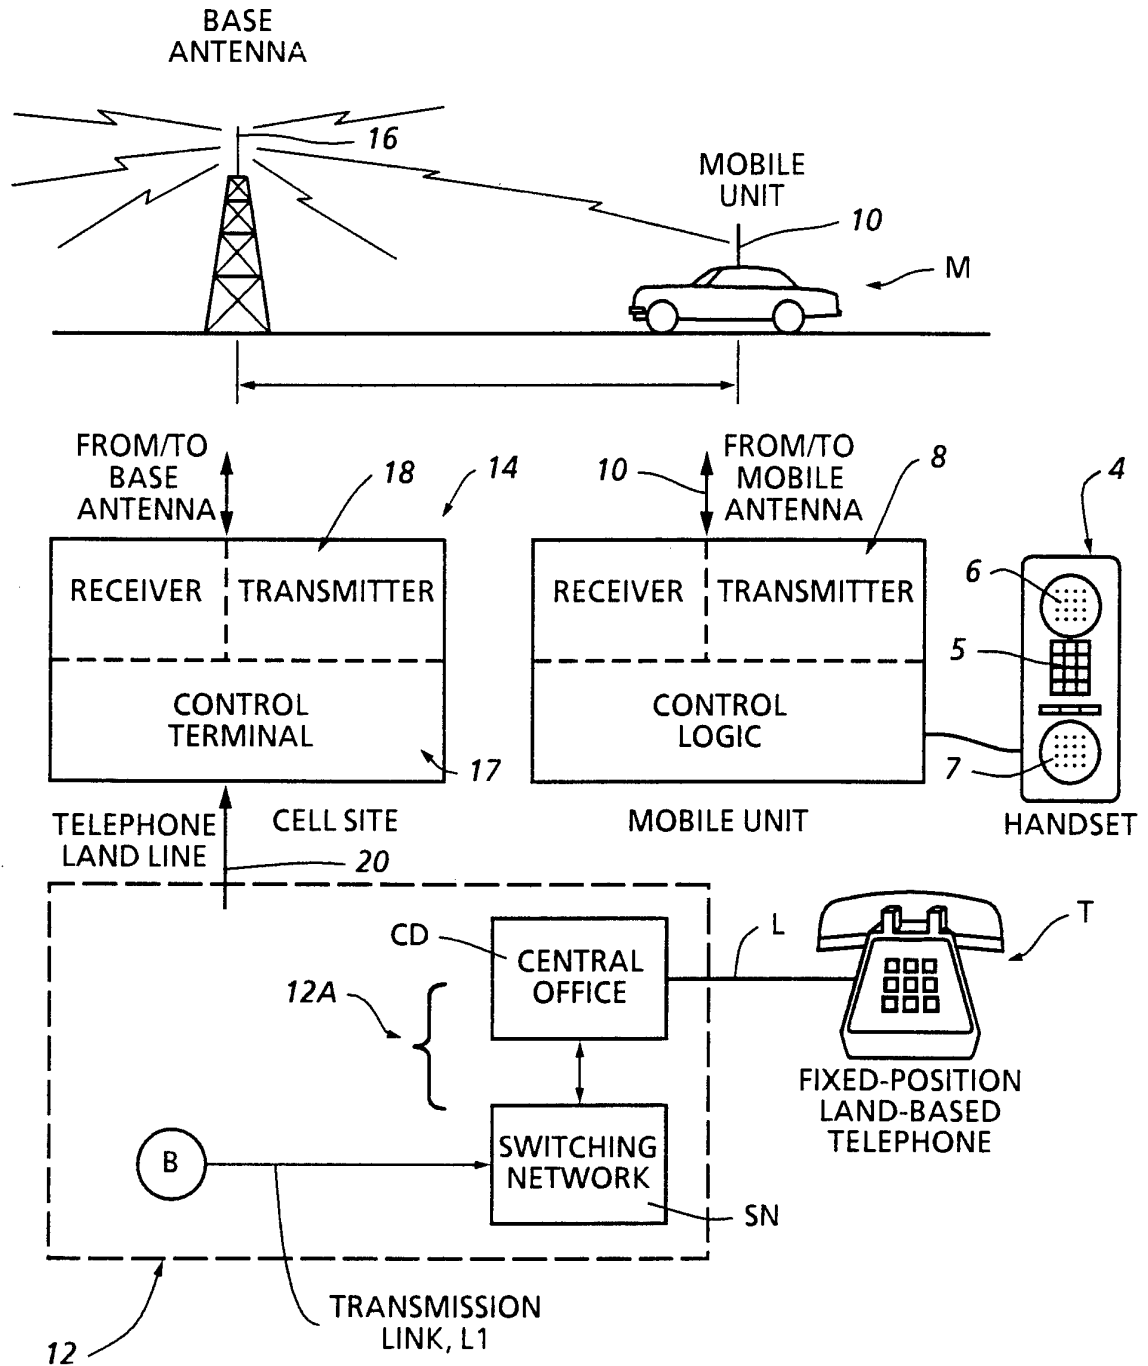
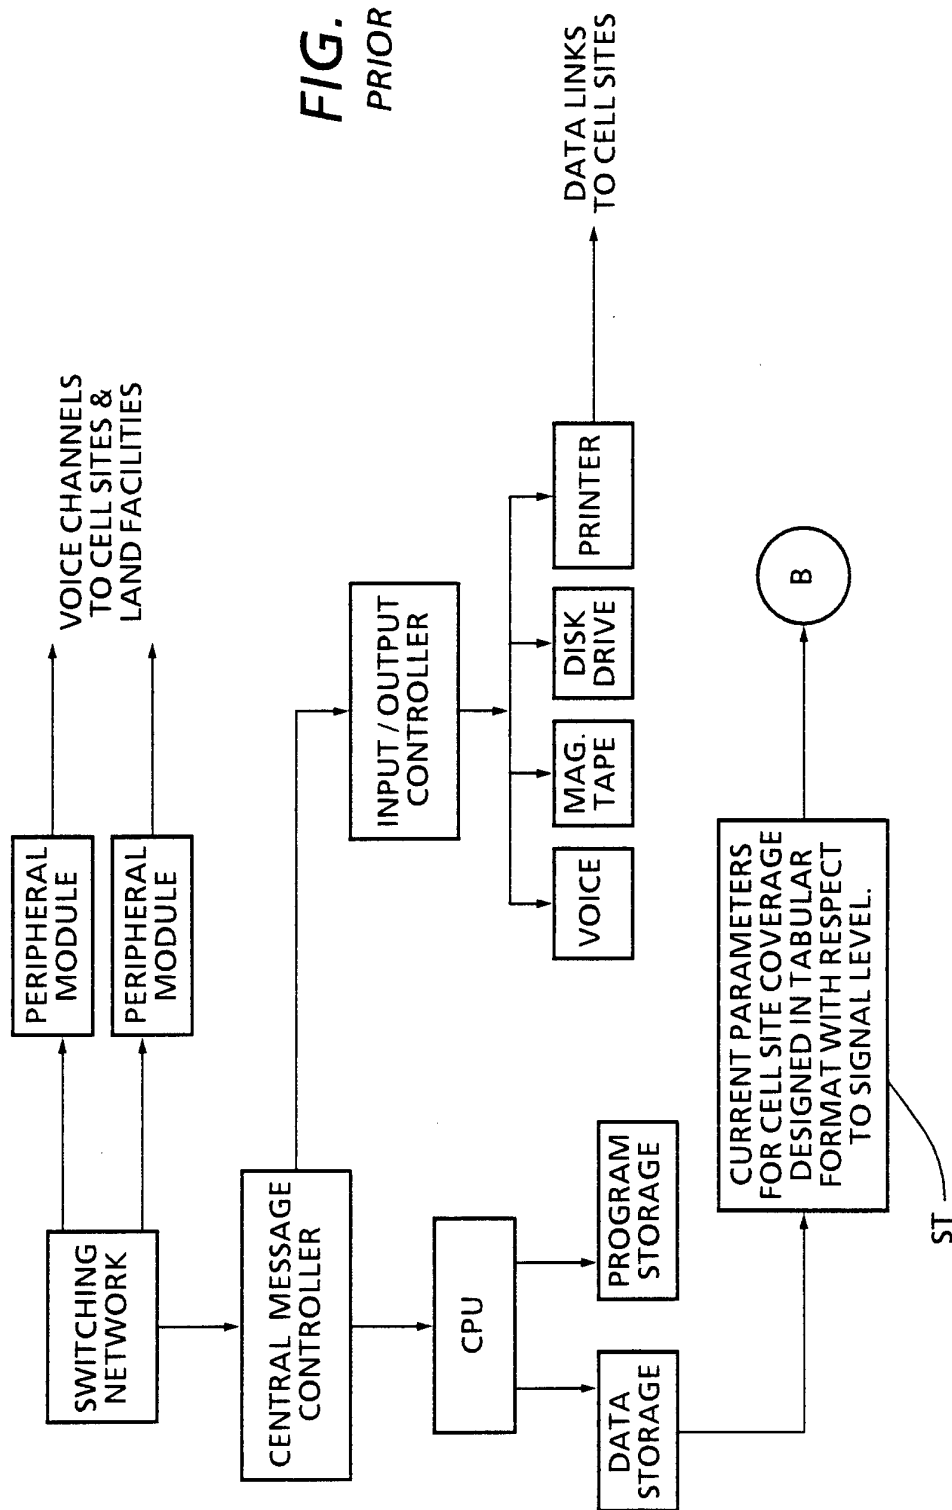


FIG. 4
(PRIOR ART)

- 4 / 14

FIG. 4A
PRIOR ART


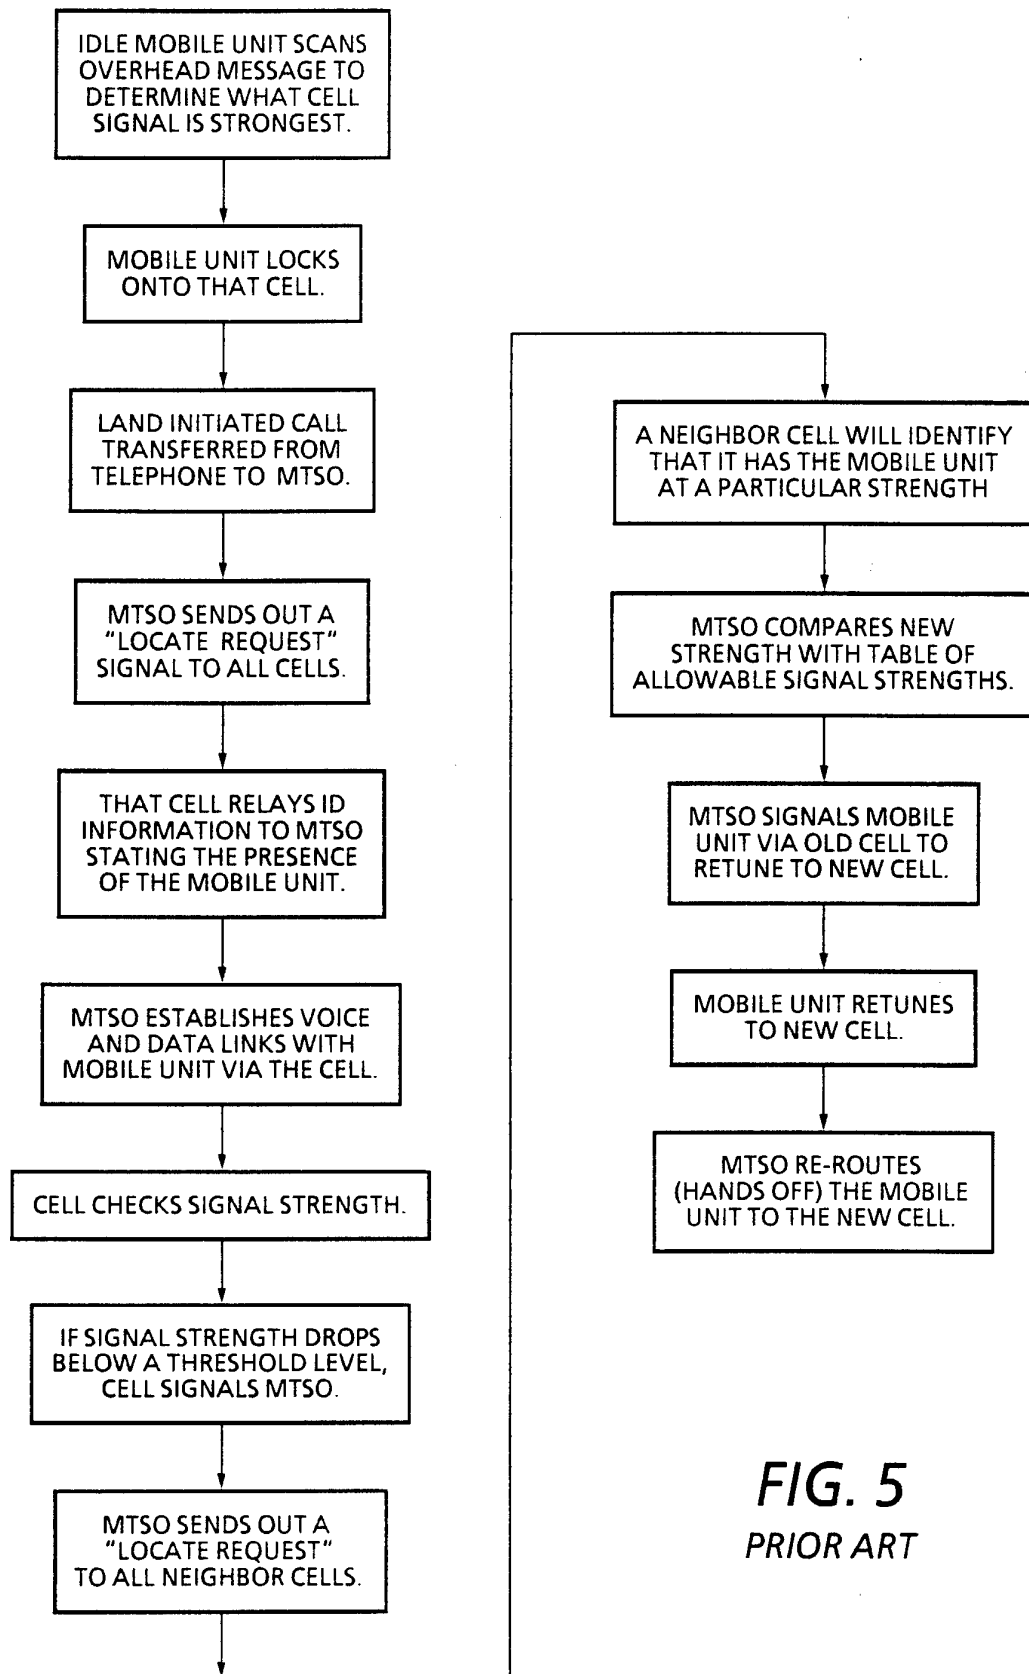


FIG. 5
PRIOR ART

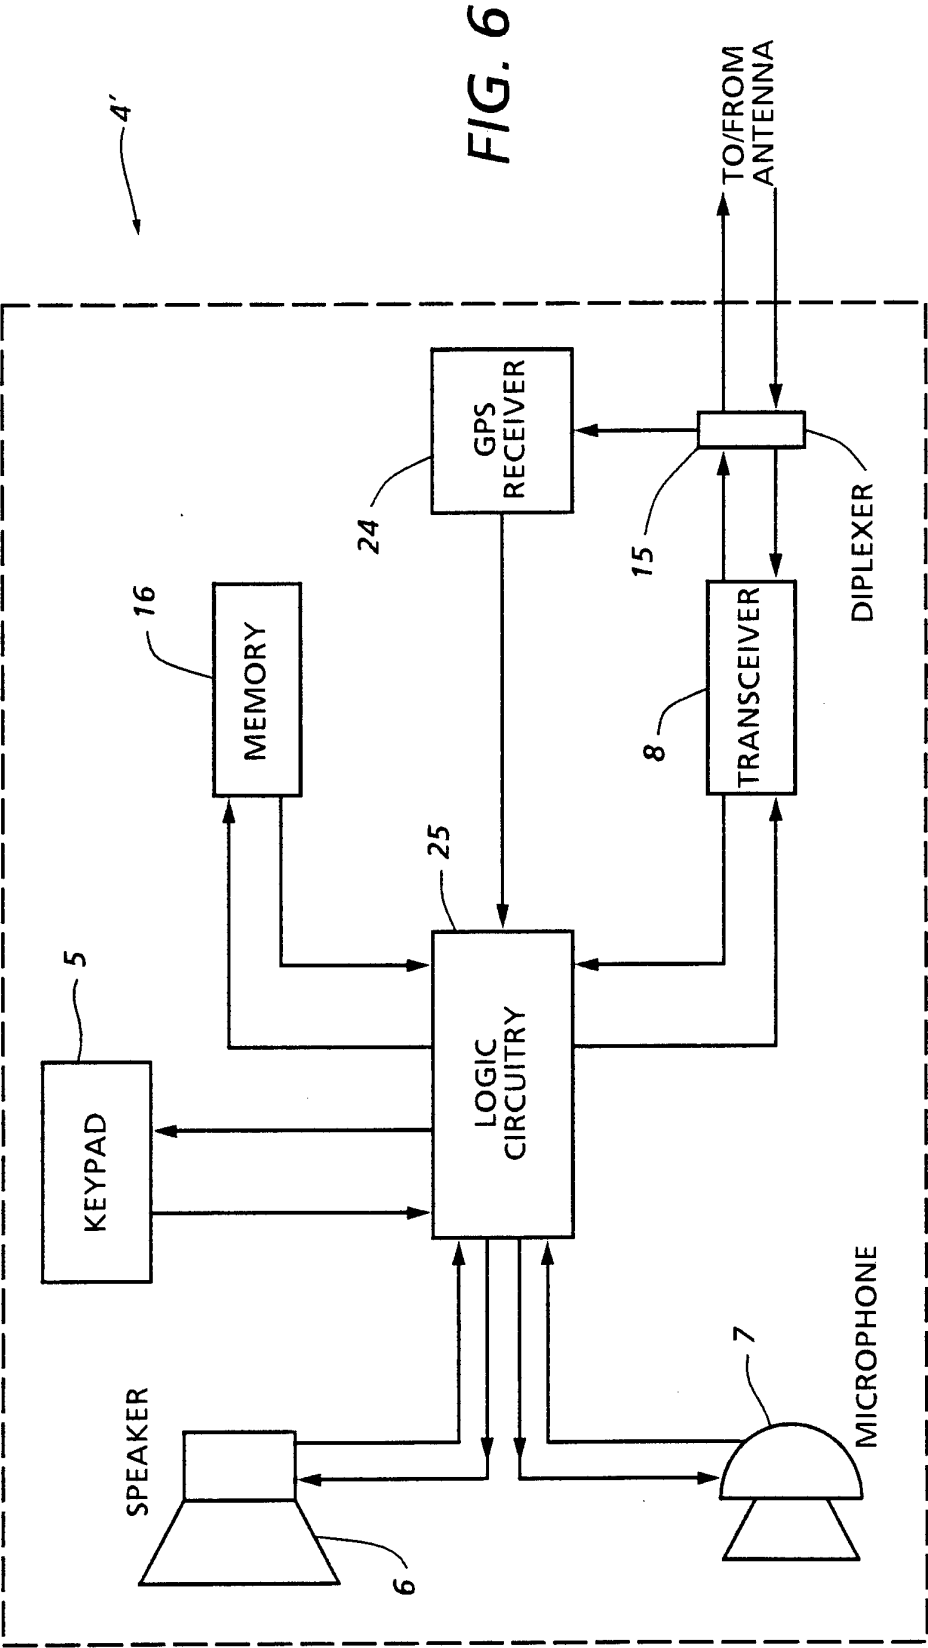

- 7 / 14

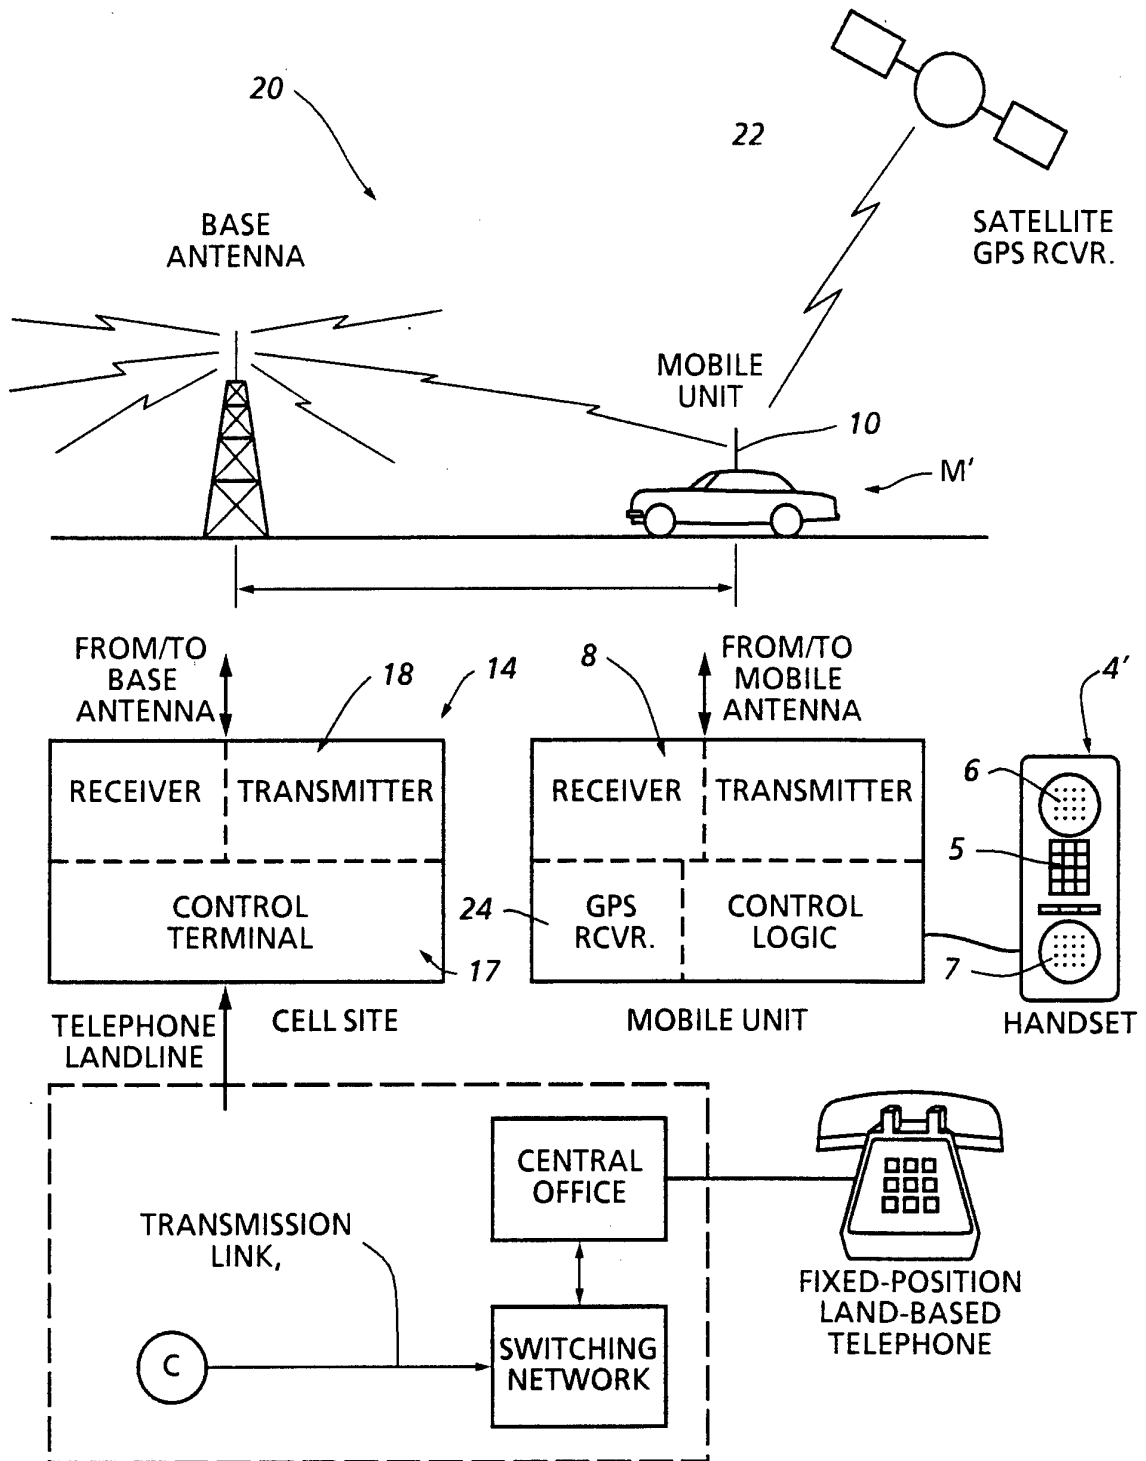


FIG. 7

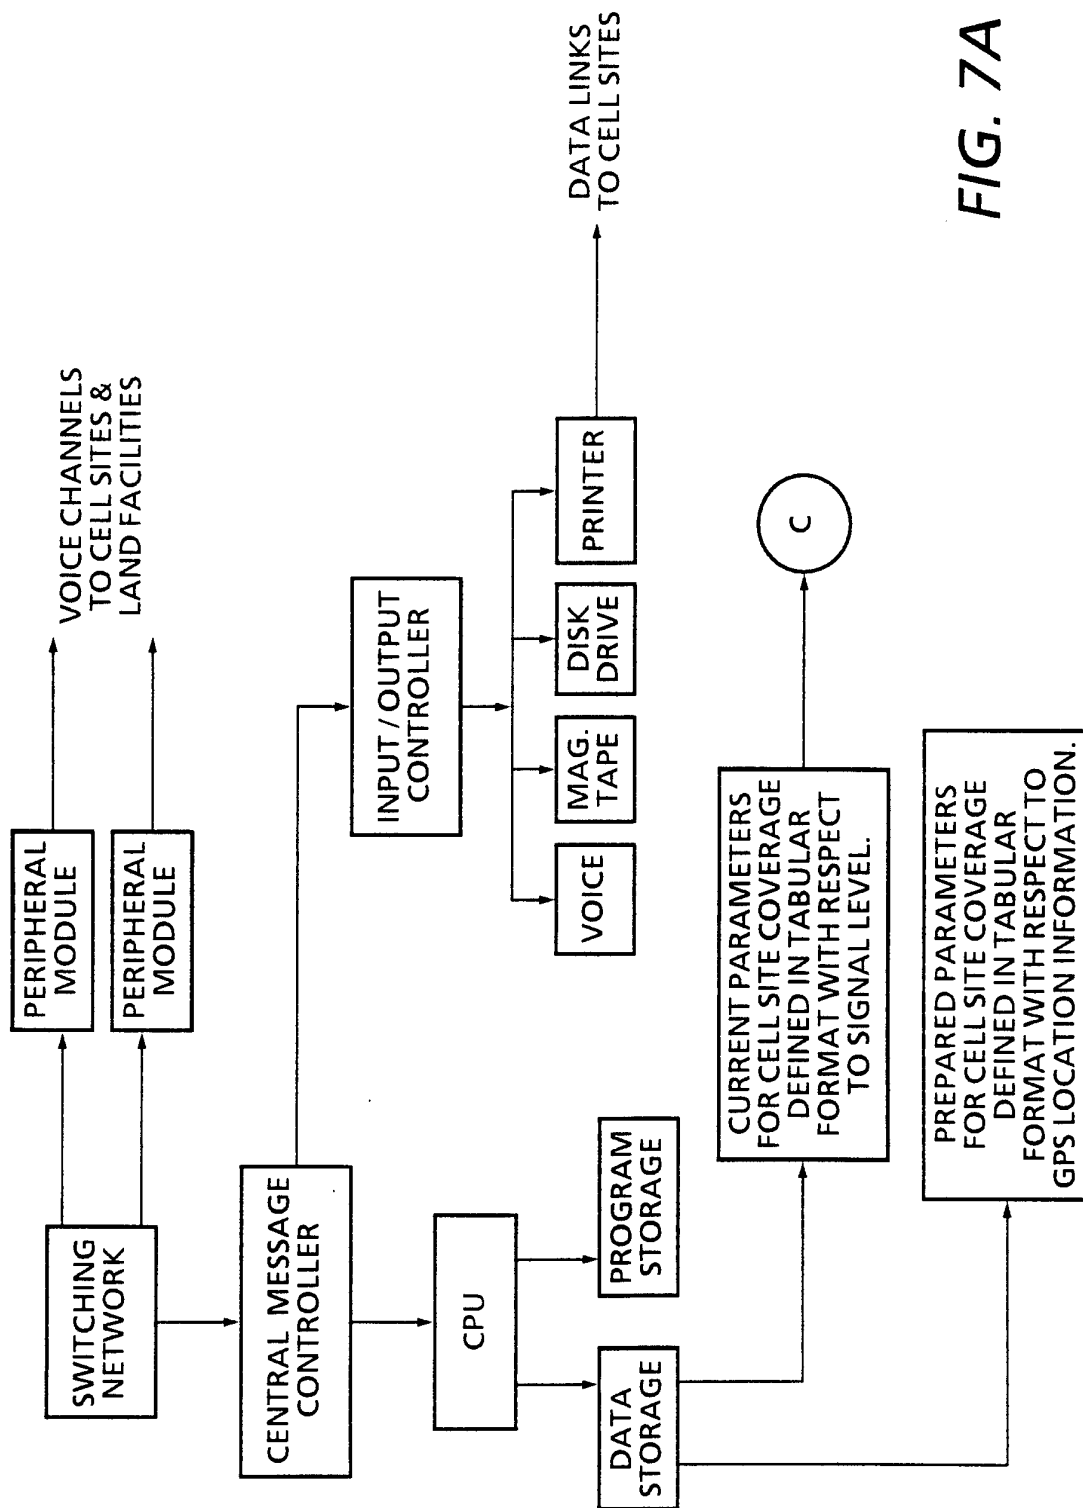


FIG. 7A

- 9 / 14

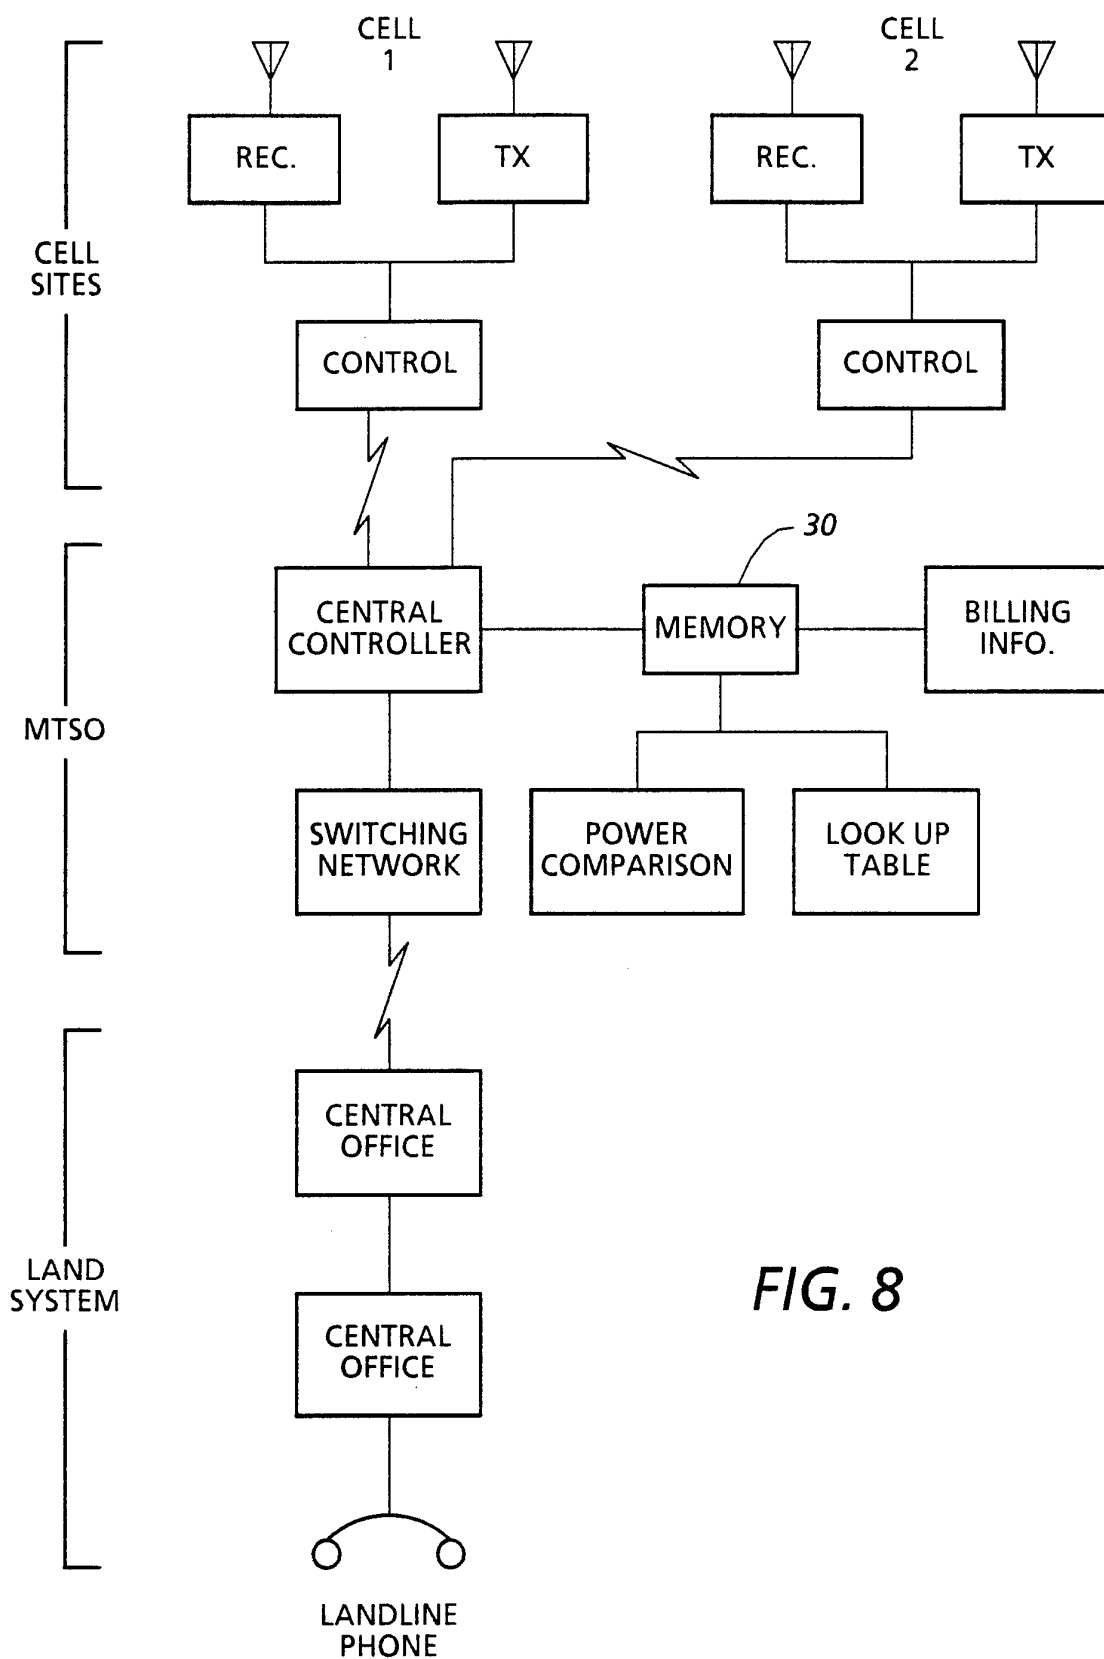


FIG. 8

10 / 14

LOOK-UP TABLE		
Boundary Points		
(minimum 4)		
Cell Site #1	1	(Latitude, Longitude)
	2	(Latitude, Longitude)
	3	(Latitude, Longitude)
	4	(Latitude, Longitude)
	5	(Latitude, Longitude)
Cell Site #2	1	(Latitude, Longitude)
	2	(Latitude, Longitude)
	3	(Latitude, Longitude)
	4	(Latitude, Longitude)
⋮		
Cell Site #N		

FIG. 9

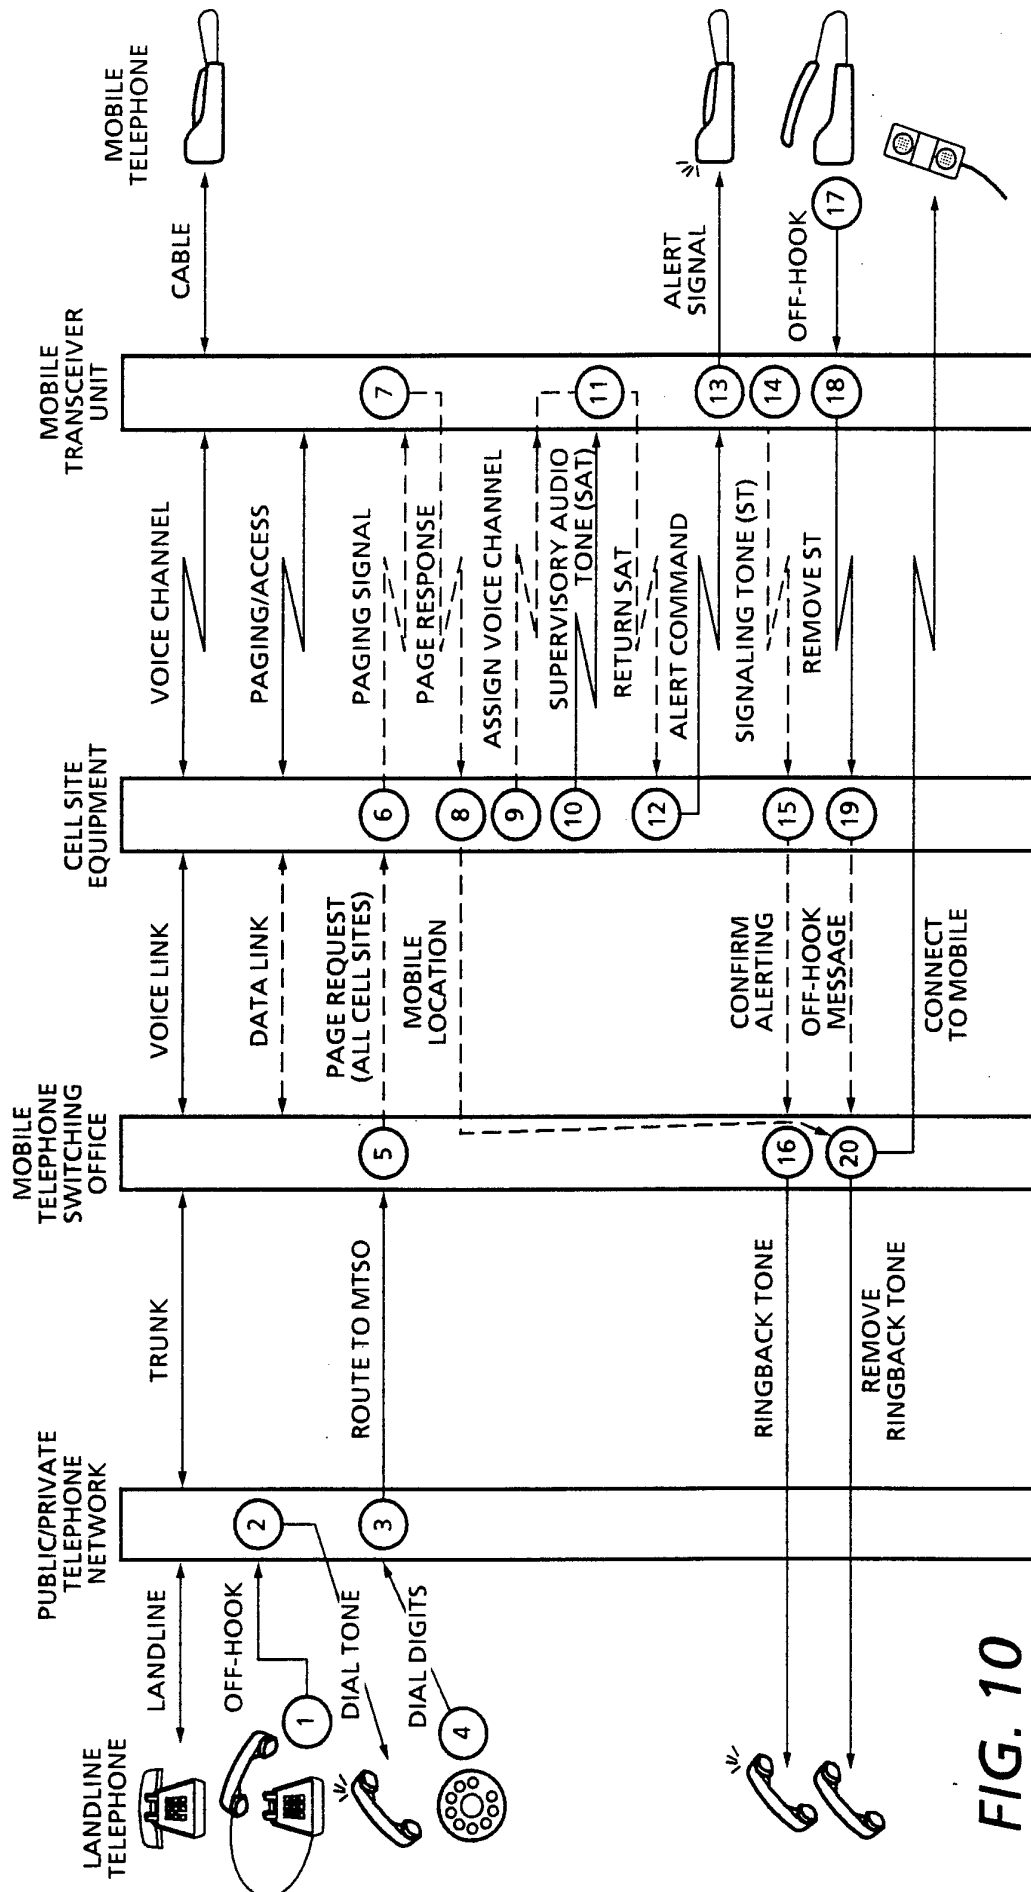


FIG. 10

12 / 14

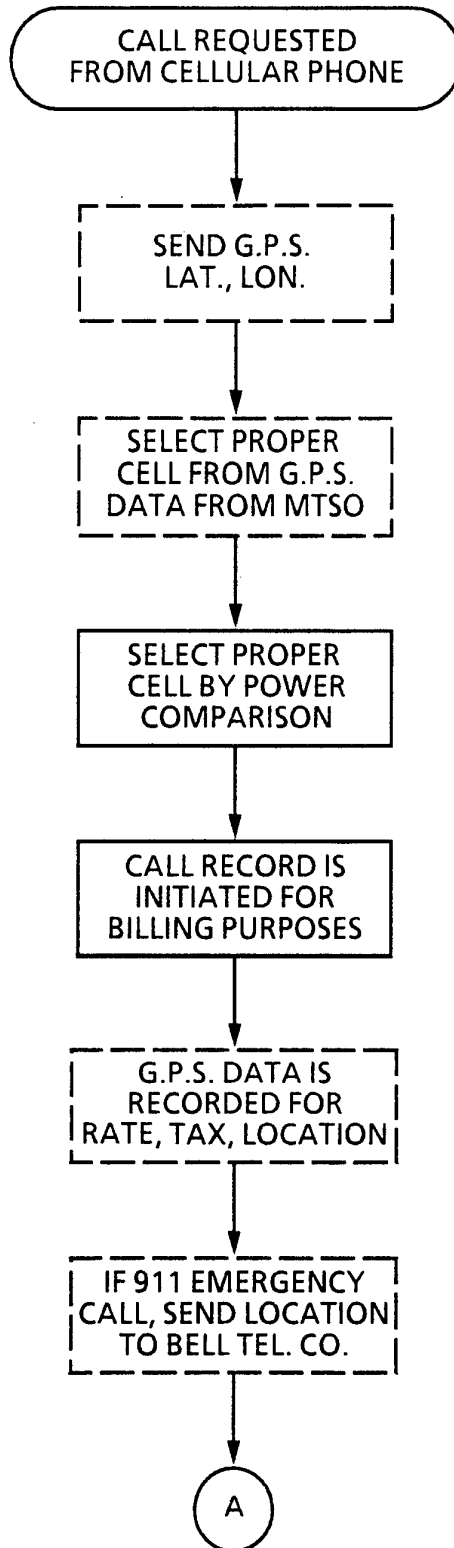


FIG. 11A

13 / 14

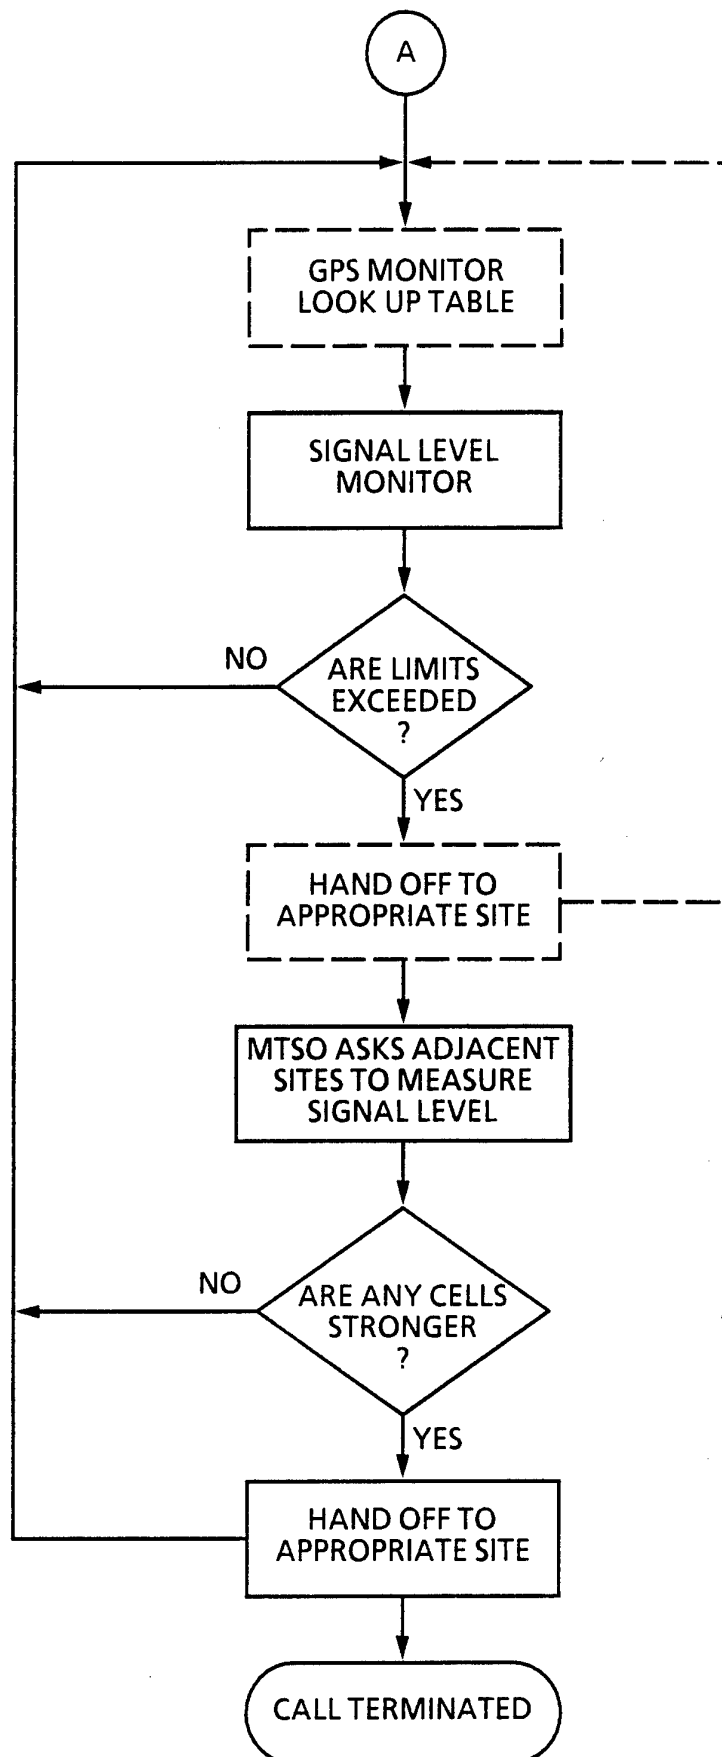


FIG. 11B

14 / 14

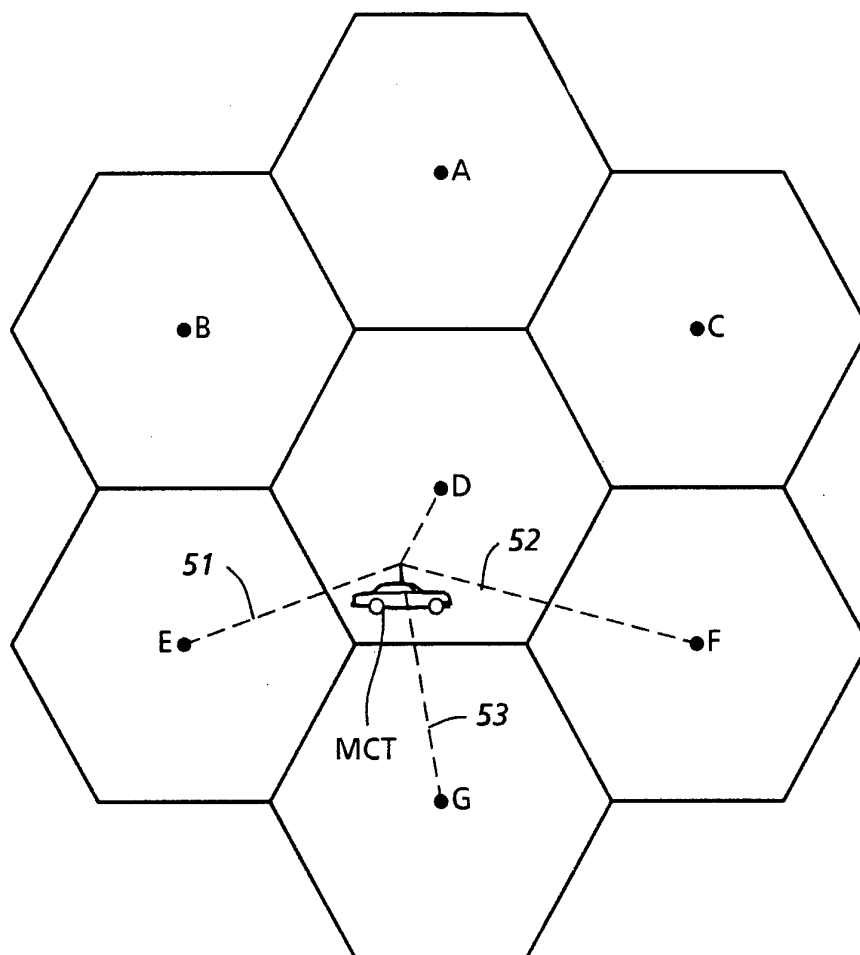


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/04500

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :H04M 11/06

US CL :379/60; 455/33.2

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 379/59, 60; 455/33.1, 33.2, 33.4; 342/450, 457

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
none

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

search terms: triangulat7, (cellular or mobile or radio), (telephone or phone), radiotelephone

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,144,411 (FRENKIEL) 13 March 1979; see column 5, lines 6-17.	1-3, 5-7
Y,P	US, A, 5,235,633 (DENNISON et al.) 10 August 1993; see entire document.	1-3, 5-7
Y,P	US, A, 5,214,789 (GEORGE) 25 May 1993; see Abstract, column 2, lines 1-16 and 36-38.	1, 2, 7
Y,E	US, A, 5,321,514 (MARTINEZ) 14 June 1994; see Abstract; column 8, lines 24-32, 38-44; column 28, lines 38-45, 59-64.	1, 2, 7



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

14 JUNE 1994

Date of mailing of the international search report

SEP 08 1994

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

Dwayne Bost

Telephone No. (703) 305-4778