



- (51) International Patent Classification:
H01B 1/08 (2006.01) *H01B 1/12* (2006.01)
- (21) International Application Number:
PCT/IB2018/051611
- (22) International Filing Date:
12 March 2018 (12.03.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2017/01896 17 March 2017 (17.03.2017) ZA
- (71) Applicant: UNIVERSITY OF KWAZULU-NATAL [ZA/ZA]; Office of Registrar, University Road, Chiltern Hills, 3629 Westville (ZA).
- (72) Inventors: MARTINCIGH, Bice, Susan; 15 Retford Hall, 151 Lena Ahrens Road, Glenwood, 4001 Durban (ZA). VAN ZYL, Werner, E; 24 O'Connor Road, 3629 Westville (ZA). NYAMORI, Vincent, O; 15 Montjoy, 7 Bexmore Place, 4001 Durban (ZA). OLLENGO, Moses, Abednego; 89 Kies Road, Reservoir Hill, 4091 Durban (ZA). MOOD-

LEY, Vashen; c/o University of Kwa-Zulu Natal, Westville Campus, School of Chemistry and Physics, 3629 Durban (ZA). MOMBESHORA, Edwin, Tonderai; c/o University of Kwa-Zulu Natal, Westville Campus, School of Chemistry and Physics, 3629 Durban (ZA).

- (74) Agent: VAN DER WALT, Louis, Stephanus; Adams & Adams, PO Box 1014, 0001 Pretoria (ZA).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: ELECTROCONDUCTIVE COMPOSITE

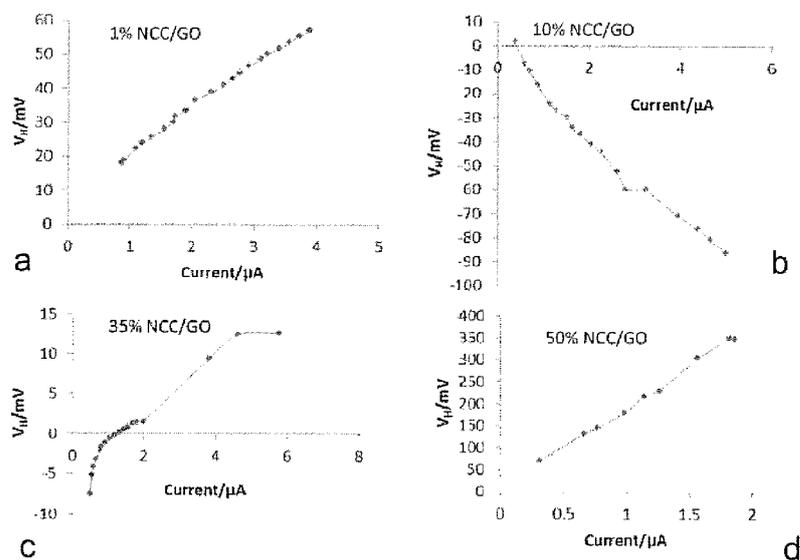


Fig. 4

(57) Abstract: An electroconductive composite comprises a matrix of nanocrystalline cellulose and graphene oxide. The matrix is, in at least a region thereof, unipolar by having, in that region, either p-type charge carrier conductivity or n-type charge carrier conductivity depending on the mass concentration of nanocrystalline cellulose in that portion of the matrix.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

ELECTROCONDUCTIVE COMPOSITE

5 This invention relates to an electroconductive composite, particularly an electroconductive thin film composite. It relates also to a process for producing such a composite, and to uses of the composite.

10 The electronic application of organic semiconducting materials depends on the availability of both p- and n-type charge carriers. The ease of fabricating well defined sequential layers, or spatial patterns, of these charge carriers determines the output and range of applications. Fabrication of graphene based organic semiconductors is of great interest because of the properties they exhibit, with potential application in various fields.

15 One such material for fabrication of graphene based organic semiconductors is graphene oxide. Graphene oxide is a material known to contain numerous oxide functionalities; mainly alcohols and epoxides on the basal plane. It has significant structural similarity to graphite, but exhibits a much longer interlayer spacing in the range of 6–12 Å. The layer separation distance is subject to humidity levels and degree of water intercalation. Due to
20 weaker π - π stacking forces and strong electrostatic repulsions between negatively charged sheets a solution of graphene oxide in water appears thermodynamically stable. The presence of several oxygen-bearing functional groups on the basal plane and the sheet edge allows graphene oxide to interact with a wide range of materials through hydrogen, covalent and/or ionic bonding to form hybrids and composites. The presence of both sp^2 - and sp^3 -hybridized
25 carbon atoms causes graphene oxide sheets to have poor or no translational symmetry. The carbon atoms attached to functional groups are, thus, slightly displaced although the overall size of the unit cell in graphene oxide is generally similar to that of a monolayer of graphene. The functional groups protruding from the graphene oxide planes are expected to decouple the interactions between the C=C, sp^2 domains in the carbon backbones of neighbouring layers.
30 However, the topological defects and oxygen functional groups may form stronger physical bonds, especially with polar guests, when such polar guests are used to form composites with graphene oxide.

Generally, graphene oxide composites are ambipolar. Hitherto, to break the symmetry of ambipolar characteristics of graphene oxide composites, such composites have been doped. Thus, traditionally, this has been done by doping an ambipolar device, for instance, a silicon chip, to p-type or n-type depending on the dopant. However, such doping techniques are time-consuming and labour intensive.

It is an object of this invention to provide a graphene oxide composite whereby this drawback is at least ameliorated.

Thus, according to a first aspect of the invention, there is provided an electroconductive composite, which comprises

a matrix of nanocrystalline cellulose (NCC) and graphene oxide (GO), with the matrix being, in at least a region thereof, unipolar by having, in that region, either p-type charge carrier conductivity or n-type charge carrier conductivity depending on the mass concentration of nanocrystalline cellulose in that portion of the matrix.

The composite may be in the form of a film, particularly a thin film. In this specification, reference to a thin film means a film with a thickness typically less than 24 μm .

The composite may be characterized thereby that it contains no dopant, or no elemental dopant, such as an element from Group V of the Periodic Table of Elements, e.g. phosphorus, for n-type doping, and/or an element from Group III of the Periodic Table of Elements, e.g. boron, for p-type doping.

In one embodiment of the invention, the mass proportion or mass concentration of NCC in the matrix/composite may be $\leq 7\%$ or $\geq 35\%$. The composite then has a p-type, or at least a predominantly p-type, charge carrier conductivity. The mass concentration of NCC may then be $\leq 5\%$, e.g. about 5 mass % or about 1 mass %, or may be $\geq 40\%$ e.g. about 50 mass %.

In another embodiment of the invention, the mass proportion or concentration of NCC in the matrix/composite may be $> 7\%$ and $< 35\%$. The mass concentration of NCC may then

be >8% and <35%, e.g. about 10 mass % or about 20 mass %, which is believed to be the optimal for n-type characteristic. The composite then has a n-type, or at least a predominantly n-type, charge carrier conductivity.

5 In this specification, a mass concentration is the concentration of an ingredient as a percentage of the mass of a unit of the composite. Thus, a NCC mass concentration of 20% (i.e. 20 mass %) means that the composite, on a mass basis, comprises 20% NCC.

10 The region of the matrix which is unipolar may be the entire matrix. In other words, the entire matrix, and hence the entire composite, may have either p-type charge carrier conductivity, or n-type charge carrier conductivity. However, instead, at least one region of the matrix may have p-type charge carrier conductivity, while at least one other region thereof may have n-type charge carrier conductivity. This is achieved when a junction is intentionally created by way of fabrication, thus forming a p/n junction or a n/p junction, as the case may be. A bipolar
15 junction in the form of n/p/n or p/n/p characteristic, is also possible.

 The matrix, and hence the composite, may be that obtainable by mechanophysical mixing of NCC and GO. The electroconductive composite may thus be in the form of an electroconductive film composite, preferably an electroconductive thin film composite, obtained
20 by dispersing graphene oxide (GO) and nanocrystalline cellulose (NCC) in a carrier liquid to form a suspension, producing a raw matrix body in the form of a film from solids present in the suspension, and drying the raw matrix body to form an electroconductive film composite.

 More particularly, the matrix may be that obtainable by dispersing graphene oxide
25 (GO) in a carrier liquid, such as water, adding nanocrystalline cellulose (NCC) to the dispersion to form a suspension, producing a raw matrix body, such as a film or a thin film, from solids present in the suspension, and drying the raw matrix body to form the electroconductive film composite or the electroconductive thin film composite.

30 Thus, according to a second aspect of the invention, there is provided, broadly, a process for producing an electroconductive composite, which process comprises
 dispersing graphene oxide (GO) in a carrier liquid to form a dispersion or solution;

adding nanocrystalline cellulose (NCC) to the dispersion or solution, to form a suspension, the mass concentration of nanocrystalline cellulose in the suspension being selected to obtain an electroconductive composite comprising a matrix of nanocrystalline cellulose and graphene oxide, with the matrix being, in at least a region thereof, unipolar by having, in that region, either

5 p-type charge carrier conductivity or n-type charge carrier conductivity;

producing a raw matrix body from solids present in the suspension; and

drying the raw matrix body to obtain an electroconductive composite comprising a matrix of nanocrystalline cellulose and graphene oxide, with the matrix being, in at least a region thereof, unipolar by having, in that region, either p-type charge carrier conductivity or n-type

10 charge carrier conductivity depending on the mass concentration of nanocrystalline cellulose in that portion of the matrix.

The electroconductive composite may be an electroconductive thin film composite.

15

Producing a raw matrix body from solids present in the suspension may thus include producing a thin film composite from solids present in the suspension. Typically, this is achieved by transferring the suspension (i.e. a colloidal composite solution) to a container open to the atmosphere, e.g. a petri-dish, and allowing a slow evaporation of the carrier liquid, e.g.

20 water, in a controlled dust-free environment. A thin film is left behind as the carrier liquid or solvent evaporates, which is then mechanically peeled off.

The carrier liquid may thus be water so that a dispersion of GO in water is obtained. The dispersion may be effected with mixing, e.g. ultrasonically. The mixing may thus

25 be effected by subjecting the dispersion to an ultrasound water bath treatment for a period of time, t_1 . Preferably $5\text{mins} \leq t_1 \leq 20\text{mins}$, more preferably t_1 may be about 10mins.

The NCC may be added to the dispersion as a colloidal solution, and the addition thereof may be effected while mixing, e.g. stirring, the dispersion. The process may include

30 mixing, e.g. stirring, the suspension, once formed, e.g. after addition of all the NCC colloidal solution, for a period of time, t_2 . Preferably, $5\text{mins} \leq t_2 \leq 20\text{mins}$, more preferably t_2 may be about 10mins. The suspension may thereafter be subjected to ultrasonic water bath treatment

for a period of time, t_3 . Preferably, $20\text{mins} \leq t_3 \leq 40\text{mins}$, more preferably t_3 may be about 30mins.

5 Production of the raw matrix body may include mechanophysical mixing of NCC and GO colloidal solutions.

The drying or dehydration of the raw matrix body may be effected at an elevated temperature, T , and for a period of time, t_4 . Preferably, $40^\circ\text{C} \leq T \leq 100^\circ\text{C}$; more preferably, $40^\circ\text{C} \leq T \leq 70^\circ\text{C}$; typically T is about 50°C . Preferably, $24\text{hrs} \leq t_4 \leq 72\text{hrs}$; more preferably $20\text{hrs} \leq t_4 \leq 60\text{hrs}$; typically, t_4 is about 48 hrs.

15 In the process, GO and NCC will thus initially be used in a predetermined mass proportion, to obtain a composite or matrix having a predetermined mass proportion or concentration of NCC so that said region of the composite or matrix has either p-type or an n-type charge carrier conductivity. The mass proportion or mass concentration of NCC in the matrix or composite may be as hereinbefore described in respect of the first aspect of the invention.

20 The invention extends also to a composite when produced by the process of the second aspect of the invention. In particular, the invention extends to an electroconductive composite when produced by the process of the second aspect of the invention, the electroconductive composite comprising a matrix of nanocrystalline cellulose and graphene oxide, with the matrix being, in at least a region thereof, unipolar by having, in that region, either p-type charge carrier conductivity or n-type charge carrier conductivity depending on the mass concentration of nanocrystalline cellulose in that portion of the matrix.

25 According to a third aspect of the invention, there is provided the use of an electroconductive composite according to the first aspect of invention, or the use of an electroconductive composite when produced by the process of the second aspect of the invention, in the manufacture of an artefact.

30

According to a fourth aspect of the invention, there is provided an artefact which includes an electroconductive composite according to the first aspect of the invention, or an electroconductive composite when produced by the process of the second aspect of the invention.

5

The artefact is thus a semiconducting artefact, and may find application in low power-consuming electronic devices, optoelectronic devices, spintronics, diodes, transistor technology, thermoelectric generators, and other industrial uses.

10

The invention will now be further described, by way of an Example and with reference to the accompanying drawings.

In the drawings:

15

Figure 1 shows a schematic illustration of (a) diagonal disorder denoted by **A** and off-diagonal disorder denoted by **B** in a NCC/GO composite arising from the epoxy oxygen on GO and the oxygen in the NCC and (b) a 3D image of the layers showing distortions in the GO layer;

Figure 2 shows, in respect of the Example, the UV-visible-NIR spectra of variable mass % NCC in NCC/GO composite thin films.

20

Figure 3 shows, in respect of the Example, 3D atomic force microscopy images (a) 1 mass % NCC/GO, (b) 5 mass % NCC/GO, (c) 10 mass % NCC/GO, (d) 20 mass % NCC/GO and (e) 50 mass % NCC/GO and (f) 2D image of 20 mass % NCC/GO showing honey comb structures; and

Figure 4 shows, in respect of the Example the relationship between Hall voltage and input current at variable compositions of NCC in GO.

25

EXAMPLE

BACKGROUND

30

During preliminary investigations, the inventors realized that the high number of OH groups on the surface of nanocrystalline cellulose are likely to favour hydrogen bonding, thereby, occasioning a bilayer assemblage of graphene oxide and cellulose chains in a highly ordered thin film (as shown in Figures 1a and 1b). In this regard, the hydrogen bonding becomes the binding force between a nanocrystalline cellulose film sandwiched between two graphene

oxide sheets, thereby forming a composite film. The nanocrystalline cellulose has been assumed to form a thin layer of rods in between the graphene oxide monolayers since it assumes nematic order in colloidal dispersions occasioned by whisker entanglements. The resulting shape-anisotropy creates an ordered arrangement that seems to originate from chirality of the cellulose chains. It was thus realized that the interaction between the chiral surfaces and the twisted morphology of nanocrystalline cellulose and the overlaying graphene oxide monolayer could provide an avenue for response to external applied electric or magnetic fields.

The inventors thus sought to demonstrate a topological conductivity of a graphene oxide/nanocrystalline cellulose composite (NCC/GO). They also sought to show the tuning of the charge carrier characteristic of the composite, and the fabrication of a unipolar semiconductive device.

MATERIALS AND METHODS

Preparation of nanocrystalline cellulose (NCC):

The NCC was prepared from dissolving pulp, obtained from the Sappi Southern Africa Saiccor mill, from a hard wood source, by means of hydrolysis with sulfuric acid (65% m/m). A mass of 5 g of dissolving pulp was mixed with 100 mL of sulfuric acid aqueous solution, and the mixture was stirred vigorously (700 RPM) at 64°C for 1 hour. The mixture was diluted 10-fold with deionized water to stop the hydrolysis reaction and the diluted mixture was then centrifuged at 9000 RPM on a Hettich Zentrifugen, Universal 320 R, centrifuge, for 15 min to concentrate the cellulose and remove excess aqueous acid. A precipitated solid material was rinsed with distilled water and centrifuged again; this process was repeated 3 times. The material was subsequently dialyzed in Sigma-Aldrich dialysis sacks (avg. flat width 25 mm, MWCO 12,000 Da), against deionized water for one week until a pH of 7 was reached. The dialyzed nanocellulose was sonicated in an ultrasonic bath (UP400S 400W, Hielscher Co., Germany), for 5 min under cooling in an ice bath at 75% output and 0.7 cycles to obtain a NCC colloidal solution.

Synthesis of graphene oxide (GO) and NCC/GO composite

Graphite powder (< 150 μm , 99.99%) was purchased from Sigma Aldrich, USA. KMnO_4 (99%) and NaNO_3 (99%) were both purchased from Associated Chemical Enterprise,

South Africa. H_2SO_4 (98.37%) was bought from Cc Imelmann Ltd, South Africa and H_2O_2 (30%) was obtained from Merck Ltd, South Africa. The products were washed with double deionized water (DI).

5 GO was synthesized using a modified Hummer's method (Hummers WS, Offeman RE. Preparation of graphitic oxide. *Journal of the American Chemical Society* 1958, **80**(6): 1199-1339). In a typical synthesis, graphite and H_2SO_4 were added into a reaction vessel. To the mixture was added NaNO_3 , while the mixture was kept in an ice water bath under stirring. Afterwards, KMnO_4 was added at a slow rate, ensuring that the temperature remains below 15°C .
10 The water bath was removed and the reaction temperature was then increased to 50°C . H_2O_2 was added, followed by several cycles of washing with double deionized water (DI) until the filtrate reached a neutral pH. The concentration of the synthesized GO was determined by accurately weighing duplicate aliquots. The aliquots were dried overnight in an oven set at 50°C . The aliquots were reweighed and the concentration was expressed as the average mass of the
15 duplicate aliquots after drying over average mass before drying. This was then followed by NCC/GO composite synthesis.

NCC/GO composites were synthesized by dispersing a predetermined mass of GO in water in an ultrasonic water bath treatment for 10 min. Thereafter, a predetermined volume
20 of NCC was added under stirring, followed by further stirring and ultrasonic water bath treatment for 10 and 30 min, respectively. Composite films were formed by transferring the resultant composite solution to a petri-dish and allowing a slow evaporation of water in a controlled dust-free environment, whereafter the films were dried at 50°C for 48 hrs in an oven. In particular, composites having 1%, 5%, 10%, 20% and 50% (by mass) concentrations of NCC (with the balance
25 being GO) were produced and tested.

Reflectance measurement

The UV-visible-NIR spectra of the films were recorded on PerkinElmer lambda 35 double beam UV-vis spectrometer fitted with a Labsphere RSA-PE-20 integrating sphere.

Atomic force microscopy

Atomic Force Microscopy (AFM) was performed with Solver P47H base with a SMENA head, manufactured by NT-MDT (Russia). The cantilever of choice was SuperSharpSilicon™ SPM-Sensors (SSS-NCLR, Nanosensors™) with a resonance frequency of 146-236 kHz; Force constant of 21-98 N/m; Tip radius 2 nm (typical), the scan rate ranged from 0.6-1.6 Hz. Thin films of variable % NCC/GO composition were anchored on a glass slide by the help of double adhesive tape before analysis. The AFM, 2D scale was used to estimate film thickness.

Hall Effect measurements

Anomalous Hall effect and conductivity measurements were carried out at room temperature with a conventional Hall probe and four-probe method without a magnetic field. The current and the Hall voltage were measured by use of an electrometer (Keithley 617) and a digital multimeter (Fluke 87), respectively.

RESULTS

From a comparison of graphene and GO, it is noticeable that GO exhibits an energy band gap with a marked change in charge hopping parameter. The hopping is linked to the electronic density of states (DOS) and the electronic wave functions of localized states. The introduction of a NCC insulating layer on the surface of GO was not expected to favour delocalization of carriers, but an increased level of localized states away from the Fermi energy level (E_F). Thus, localized disorders in NCC/GO composites were expected to enhance midgap energy states. Indeed, this was observed as a definite change in the UV-vis-NIR spectra of the composites at the variable NCC composition (Figure 2). From these spectra a noticeable induction of band gap characteristics is seen to occur at 10 mass % NCC composition with a relatively higher absorption in the visible/NIR region. It can be argued that the increase in mass % NCC incorporation has resulted in increased intra- and interfacial displacements.

At a molecular level these torsional effects strongly disturb the intermolecular electronic couplings, and the degree of influence depends on the bonding-antibonding characteristics of the frontier molecular orbitals; the highest occupied molecular orbital (HOMO) or the lowest unoccupied molecular orbital (LUMO). The changes in the magnitude of the interactions between adjacent molecules or chain segments, with regard to their relative

locations and alignments (known as off-diagonal disorder), see (Fig. 1), generates a distribution of electronic couplings within the composites layers inducing conducting pathways through the thin film as dead-ends for the charges. Considering the GO layer alone, the presence of oxygen and hydrogen atoms brings about diagonal disorder by forming pseudo-finite-size conjugated segments with different lengths and hence dissimilar HOMO and LUMO energies. These diagonal disorders are a creation of electrostatic/polarization effects from surrounding molecules that vary with variations in local packing. These effects may be enhanced by periodic molecular/chain units containing local dipole moments or no permanent dipole. The heteroatoms in the GO monolayer can be argued as mini dipoles and polarizing centres. The cellulose, similarly, has mini dipole centres in regular repeating units. A concentration dependent increase in the degree of both disorders is thus expected in such composites.

By examining Figure 2 it can be concluded that the optical absorption of the NCC/GO composite is dominated by $n-\pi^*$ rather than $\pi-\pi^*$ transitions that typically show absorption band between 225 and 275 nm. This points to a new mix of charge carriers, possibly as a consequence of competing electron-electron coupling and electron-phonon coupling. These coupling effects were observed to be dependent on the amount of NCC incorporated in the GO matrix. For instance, 1 mass % NCC and 5 mass % NCC composition do not have a shoulder, whereas 10 mass %, 20 mass % and 50 mass % NCC have shoulders at 655, 445 and 393 nm respectively. This indicates a significant contribution of conduction electrons with photon energy in the visible/near-UV range but this contribution decreases with increase in mass % NCC. The typical absorption spectrum of GO is characterized by $\pi-\pi^*$ maxima around 230 nm and a shoulder at about 300 nm usually assigned to $n-\pi^*$ transitions of C-O; this was not observed for these composites. At all considered compositions no clear absorption edge was observed, signifying the lack of a distinct bandgap. However, by taking into account the nanometre-scale sp^2 carbon clusters on the GO skeletons, which are electron-rich clusters, and since sp^3 carbon sites are barriers for carriers, electrons are confined in discrete packs. On the other hand, the cellulose structure contains purely sp^3 carbon trap edge sites. The only participative electrons are the lone pairs on the oxygen. Consequently, the band gap energy of the composite is directly correlated to the amount of NCC incorporated into the GO films.

Therefore, it can be inferred that the NCC/GO films contain both conducting π -states from sp^2 transport gaps and the σ -states of its sp^3 traps. The presence of defects, arising from incorporated oxygen atoms, Stone–Wales defects, and holes, may limit the electronic quality of the composite. As a result, the occurrence of topologically nontrivial states on GO sheets is impossible. Hence, charge mobility across the NCC/GO thin films is likely to be scattered or trapped by sp^3 carbon sites, defects, film junctions, and other structural imperfections and impurities. However, the inventors are aware of reports that indicate ferromagnetic (FM) order, spin-orbit coupling (SOC), and special assemblies are likely to bring about anomalous quantum Hall (AQH) effects. This makes these topologically insulating materials, like NCC/GO composite, suitable for the fabrication of low-energy consuming electronic appliances. The electrical conductivity in these n-electron systems require enhanced intermolecular exchanges by way of intermolecular overlap of π -orbitals, which reduces the HOMO-LUMO gap and increases the number of charge carriers. The dominant charge carrier determines the type of semiconductor: either electron (n-type) or hole (p-type).

The 1 μm by 1 μm atomic force microscopy images (Fig. 3) indicated different topological surface morphology for the different mass percent composition of NCC/GO composites. Notably the 1 mass % NCC/GO composite showed spiky 3D topography that gradually smoothens at 5 mass % attaining some degree of alignment at 20 mass % NCC/GO composite (Fig 3a - d). The alignment is disrupted by intense wrinkling at 50 mass % NCC/GO composite; spiky edges are also observed (Fig 3E). A 2D, 1 μm by 1 μm image of 20 mass % NCC/GO composite shows honeycomb structures that may resemble graphene sheet (Figure 3f). The formation of these structures indicates a definite electronic interaction between the OH groups on the NCC and the oxygen carrying groups on the GO fabric. The sp^2 rich graphene sheet is characterised by high electron density and regular pentagonal, heptagonal shaped honey comp structures. The observed structures at 20 mass % NCC/GO composition are slightly deformed implying no reformation of sp^2 hybridized carbons but superficial re-organization of the NCC to form interconnected channels. The established channels could play a role in the electron injection into the conductive band of the composite making it manifest n-type organic semiconductor characteristics.

GO thin films are typically p-type semiconductors with a large positive threshold voltage (V_{th}). However, in the absence of adsorbed and/or trapped water molecules, they show a negative shift in V_{th} . This implies that desorption of not only oxygen but also polar guests changes the intrinsic characteristics as observed in single-walled carbon nanotube-based devices.

5 In this work, a similar but % NCC concentration dependent, transformation occurs pointing to site capacity and threshold limits. As seen from the UV-vis-NIR spectra (Fig. 2), a 10 mass % NCC composition not only changes the charge carrier characteristics but also induces a higher charge parameter as indicated by higher absorption. The absorbance units are much higher and the estimated mobility is correspondingly high. The reversal of V_{th} observed on re-exposure to

10 moisture back to positive values is demonstrated by the higher % NCC composition indicating a critical composition exists beyond which the sites are saturated and normal multiple trap and release behaviour resumes. At a composition of 35 mass % NCC/GO a change from negative V_H is observed which transits to positive as current is increased (Figure 4). It can be argued that the adsorbed oxygen and polar groups give rise to a larger amount of accessible hopping sites, with

15 the consequence of increasing the hopping probability and thereby the carrier mobility. It can be proposed that adsorption or chemisorption of chemical species may have a consequence of populating one carrier type or compensate existing carriers. An improved carrier mobility facilitated by hopping or limited mobility triggered by scattering centres may be observed. In essence, n-type and p-type charge characteristics are attainable in GO composites provided the

20 symmetry of ambipolar characteristics is broken. Traditionally, it has been done by doping an ambipolar device for instance, a silicon chip, to p-type or n-type depending on the dopant. Such doping techniques are time-consuming and labour intensive. In this Example, it has been demonstrated that GO can be tuned to one type of charge carrier depending on the composition of NCC guests, thereby paving the way for large scale production of semiconducting devices

25 cheaply and from renewable materials. Stability of the fabricated devices is expected at ambient conditions as observed from good reproducibility of data obtained on these composite films.

The relativistic charge-carrier transport is not available in pure GO, and the optical and electronic properties of GO are subtly dependent on the degree of uniform spread of the

30 functional groups. Since the electronic coupling between adjacent molecules primarily depends on their packing, there exists no obvious relationship between molecular size and charge mobility. Therefore, electronic coupling between adjacent molecules may not be directly related

to the degree of spatial overlap between adjacent molecules but instead related to the degree of wave function overlap. As a consequence of the differences in oscillation periods for electron and hole transfer integrals, even small translations can lead to situations where the couplings for electrons are larger than for holes, and hence where electrons can possibly be more mobile than holes. In an ideal defect-free environment charge transport is determined by interplay between electronic and electron-vibration (phonon) interactions. However, in large organic semiconductors/composites, like the NCC/GO, electron-phonon coupling does not cause just perturbations but forms quasiparticles, the polarons. Here, the electronic charge is enveloped by the phonon clouds (Figure 1) and any small translation of atoms from their mean position changes the microscopic parameters. Indeed in a case of the observed emergence of honeycomb structures at 20 mass % NCC/GO (Figure 3f) is evidence of changes in intra- and interlayer interactions, affecting structural parameters. The dependence of the system parameters on vibration (phonon) coordinates is known as electron-phonon coupling. It is known that both local and nonlocal electron-phonon communications are critical and responsible for the time-dependent variation of the transport parameters and, therefore, introduce a dynamic disorder in local and nonlocal electron-phonon couplings, corresponding to diagonal and off-diagonal dynamic disorder mechanisms, respectively. The presence of states with nonlocal order parameters creates a topological ordered phase; with significant low field energy. Reports indicate topological phases have potential practical applications with suggestions that a topological quantum computer may use 2D quasi-particles with the ability to form braids. A braids logic gate formulated computer has the ability to encode data non-locally thereby minimizing local incoherence effects.

The NCC/GO composite can be regarded as a topological insulator, because of the demonstrated gapless edge states, that arise from non-interacting fermions, thus, making it a time reversal invariant topological insulator with a bulk energy gap and gapless excitations of an odd number of Dirac cones on the surface. Traditionally, the time reversal symmetry is normally broken by surface coating a topological insulator with a thin magnetic film to create an energy gap. When an electric field is applied on such a surface, a quantized Hall current is induced, which in turn causes magnetic polarization; similarly, if an external magnetic field is applied, an electric field is induced. Measuring Hall effects provides a means of determining the major charge carriers and inherent mobility in such materials. Generally, hopping carriers are affected by a

transverse Hall electric field and move in the direction opposite to the Lorentz force acting on the charge carriers. The sign of the measured electric field in volts, known as the Hall voltage, depends on the majority charge carrier. A negative Hall voltage indicates electrons are the majority charge carrier and a positive sign shows “holes” are the dominant charge carriers. In Figure 4 the Hall voltage current relationships are shown. The “hole” dominated transport has a positive slope and the “electron” dominated shows a negative gradient. From Figure 4, samples with 1, 5 and 50 mass % NCC/GO composites showed “hole” conduction (p-type), whereas 10 and 20 mass % NCC/GO composites showed “electron” conduction (n-type) as the dominant charge carriers. The 35 mass % NCC/GO composite showed a transition to p-type at high currents (Figure 4). This can be attributed to thermal destruction of the extended electronic band of states arising from current flow. The observed AQH effect on these composites indicates gapped surface states which are normally associated with backscattering-protected edge transport channels in the absence of an external magnetic field. This is a further evidence of topological phase modification. The surfaces of 10 mass % and 20 mass % NCC/GO appear smoother with the 20 mass % NCC/GO showing longitudinal alignment in 3D (Figure 3c and d). In this regard, it is speculated that there is possible occurrence of exotic non-Abelian excitations on the surface of these composites. The characteristic charge carriers in these π -conjugated scaffolds have their spin $-\frac{1}{2}$ polaron transport mediated by hopping. The regulatable hopping phenomenon arising from localized electronic states, observed in this work, positions these composites as a potential candidate for the fabrication of tuneable next-generation low-dissipation spintronic devices.

The search for reasonably conductive organic semiconductors has employed various strategies including meticulously planned doping, and forming composites with conductive fillers. These efforts have yielded mostly p-type materials; however, air-stable, n-type materials have been elusive. The introduction of n-type polymers has been a daunting task because of big phase separations. The inventors have demonstrated that it is possible to form well patterned p- and n-type regions on the same film by varying the concentration of NCC in an NCC/GO composite. This demonstrates that the fabrication of a unipolar n-type material is feasible and stable at ambient conditions essentially producing a composite whose majority carriers can be tuned by varying the relative composition of a guest species. Thus, this composite can be useful as a transport layer in diodes, transistor technology which is a cornerstone for

complementary logic and circuitry, and also be used as the p- and n-probes of a thermoelectric generator.

5 The variation in the composite composition creates novel charge carrier characteristics and consequently unique topological electrical conductivity properties. The composite films present long-range conductivity, a potent feature suitable for topological computing and radio frequency phase modulation applications. The optical saturation characteristics demonstrated by the films also give them an edge for potential use in dual-wavelength Q-switched fibre lasers.

10 Composition dependent charge switch carrier characteristics have thus been demonstrated, with potential for radio frequency phase change which is useful for phase modulation, for braids computing applications and as a saturable absorber in dual wave length Q-switched fibre lasers.

15 The inventors have thus demonstrated that NCC/GO composites are ambipolar, but can exhibit unipolar, i.e. p- and n-type charge carrier, conductivity. Furthermore, the inventors have shown that changing the concentration of NCC in the composite effectively switches from p-type to n-type composites and vice versa depending on the ratio of NCC:GO. 20 Additionally, the inventors have demonstrated that the fabrication of an air-stable n-type organic semiconductor device is feasible. This invention thus provides a new approach to realize anomalous quantum Hall effects on graphene-based composites and a means to electrically control topological states which is very necessary for cutting edge nanoelectronics, optoelectronics and spintronics applications. The device fabrication can be easily scaled-up for 25 industrial applications.

Claims:

- 5 1. An electroconductive composite, which comprises
a matrix of nanocrystalline cellulose (NCC) and graphene oxide (GO), with the matrix
being, in at least a region thereof, unipolar by having, in that region, either p-type charge carrier
conductivity or n-type charge carrier conductivity depending on the mass concentration of
nanocrystalline cellulose in that portion of the matrix.
- 10 2. The electroconductive composite of claim 1, which is characterized thereby that
the composite contains no elemental dopant for n-type doping, and/or no elemental dopant for
p-type doping.
- 15 3. The electroconductive composite of claim 1 or claim 2, in which the mass
concentration of NCC in the matrix is $\leq 7\%$ or $\geq 35\%$, with the composite then having a p-type, or
at least a predominantly p-type, charge carrier conductivity.
- 20 4. The electroconductive composite of claim 1 or claim 2, in which the mass
concentration of NCC in the matrix is $> 7\%$ and $< 35\%$, with the composite then having a n-type,
or at least a predominantly n-type, charge carrier conductivity.
- 25 5. The electroconductive composite of any of claims 1 to 4, which is in the form of
an electroconductive film composite, obtained by dispersing graphene oxide (GO) and
nanocrystalline cellulose (NCC) in a carrier liquid to form a suspension, producing a raw matrix
body in the form of a film from solids present in the suspension, and drying the raw matrix body
to form an electroconductive film composite.
- 30 6. A process for producing an electroconductive composite, which process comprises
dispersing graphene oxide (GO) in a carrier liquid to form a dispersion or solution;
adding nanocrystalline cellulose (NCC) to the dispersion or solution, to form a suspension,
the mass concentration of nanocrystalline cellulose in the suspension being selected to obtain

an electroconductive composite comprising a matrix of nanocrystalline cellulose and graphene oxide, with the matrix being, in at least a region thereof, unipolar by having, in that region, either p-type charge carrier conductivity or n-type charge carrier conductivity;

producing a raw matrix body from solids present in the suspension; and

5 drying the raw matrix body to obtain an electroconductive composite comprising a matrix of nanocrystalline cellulose and graphene oxide, with the matrix being, in at least a region thereof, unipolar by having, in that region, either p-type charge carrier conductivity or n-type charge carrier conductivity depending on the mass concentration of nanocrystalline cellulose in that portion of the matrix.

10

7. The process of claim 6, in which the carrier liquid is water and/or in which the electroconductive composite is an electroconductive thin film composite.

15

8. The process of claim 6 or claim 7, in which the dispersion is obtained by ultrasonically mixing the graphene oxide in the carrier liquid.

20

9. The process of any of claims 6 to 8, in which the mass concentration of NCC in the suspension is selected such that the electroconductive composite has a NCC mass concentration of $\leq 7\%$ or $\geq 35\%$, with the electroconductive composite then having a p-type, or at least a predominantly p-type, charge carrier conductivity.

25

10. The process of any of claims 6 to 8, in which the mass concentration of NCC in the suspension is selected such that the electroconductive composite has a NCC mass concentration of $> 7\%$ and $< 35\%$, with the electroconductive composite then having a n-type, or at least a predominantly n-type, charge carrier conductivity.

30

11. An electroconductive composite when produced by the process of any of claims 6 to 10, the electroconductive composite comprising a matrix of nanocrystalline cellulose and graphene oxide, with the matrix being, in at least a region thereof, unipolar by having, in that region, either p-type charge carrier conductivity or n-type charge carrier conductivity depending on the mass concentration of nanocrystalline cellulose in that portion of the matrix.

12. The use of an electroconductive composite according to any of claims 1 to 5, or the use of an electroconductive composite when produced by the process of any of claims 6 to 11, in the manufacture of an artefact.

5 13. An artefact which includes an electroconductive composite according to any of claims 1 to 5 or an electroconductive composite when produced by the process of any of claims 6 to 11.

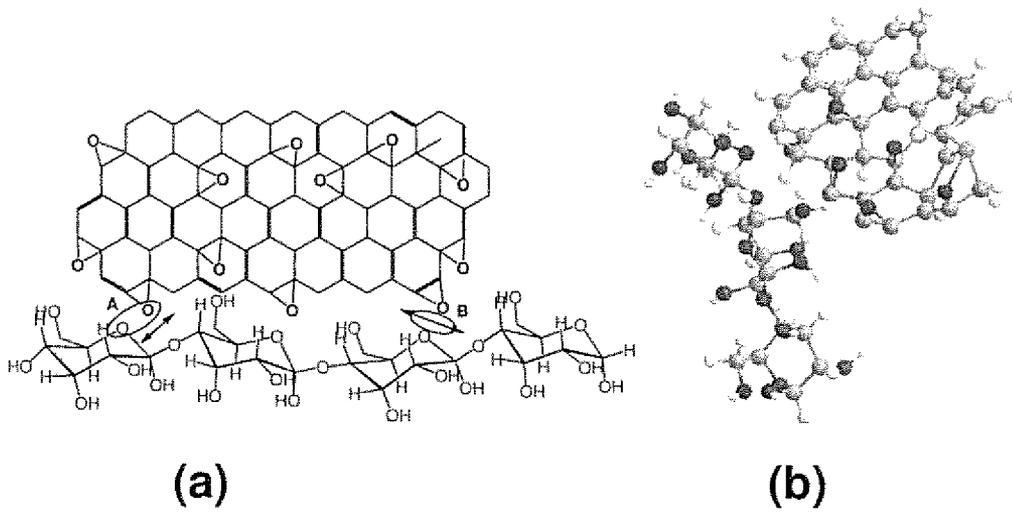


Fig. 1

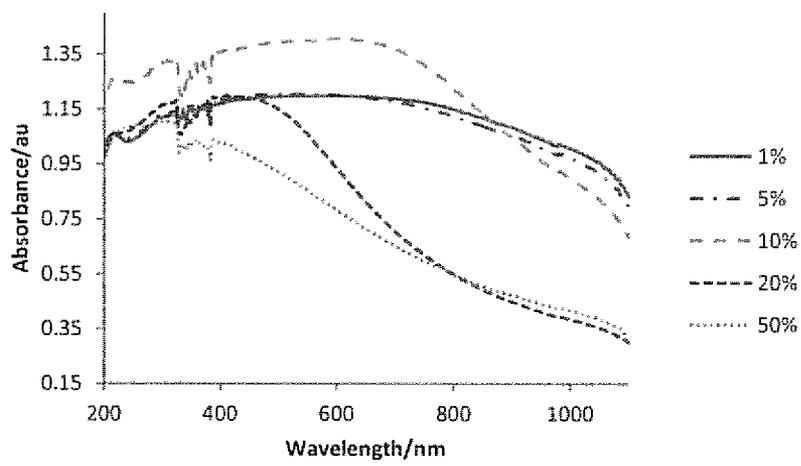


Fig. 2

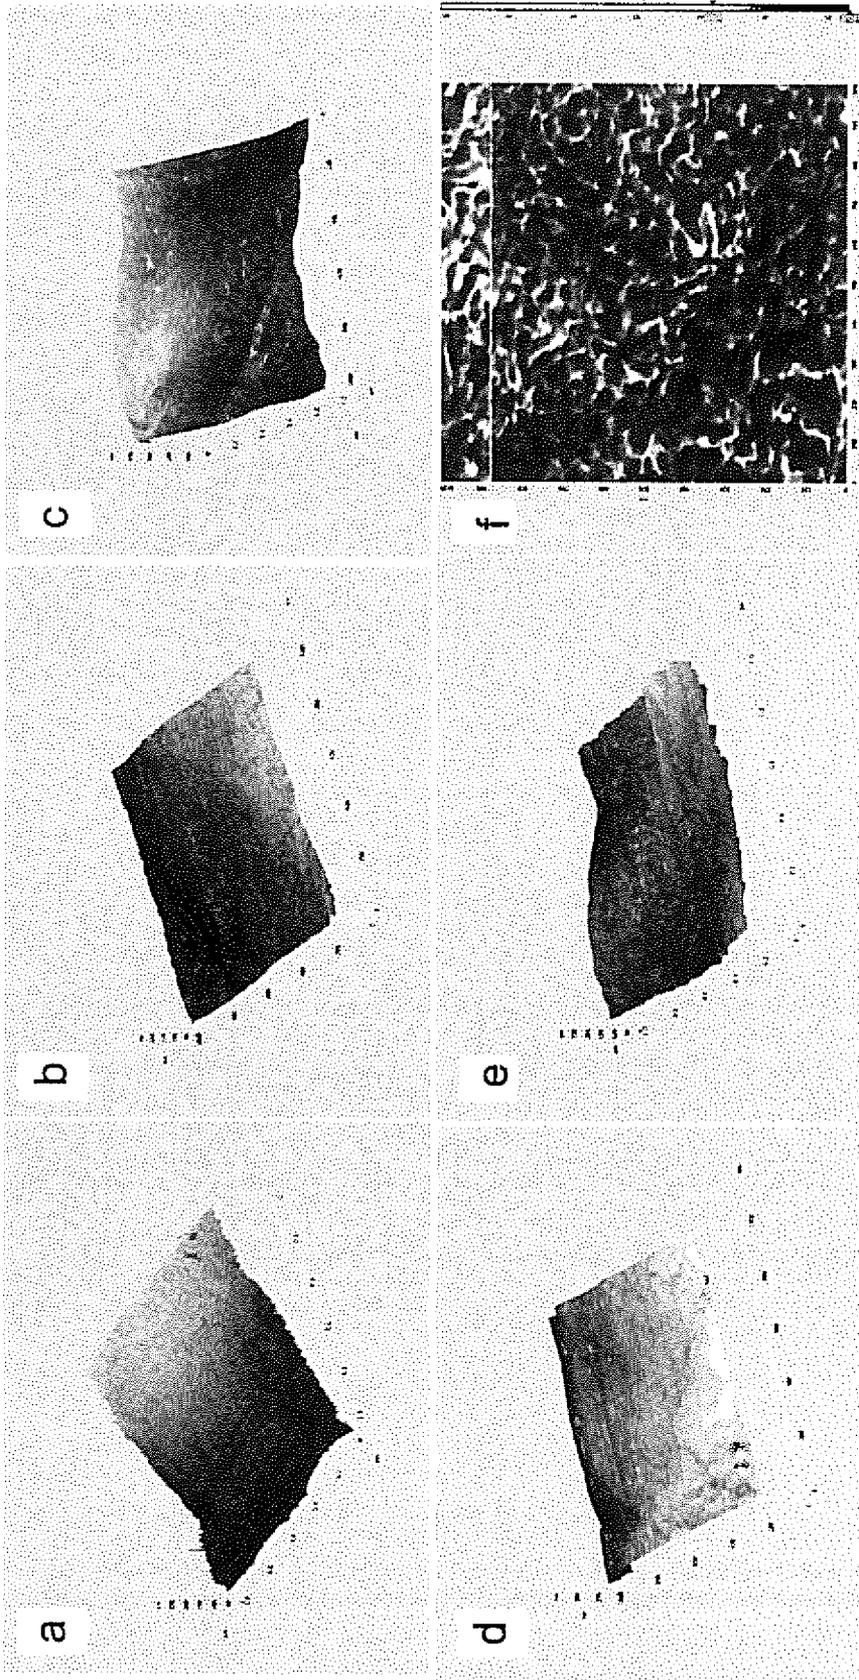


Fig. 3

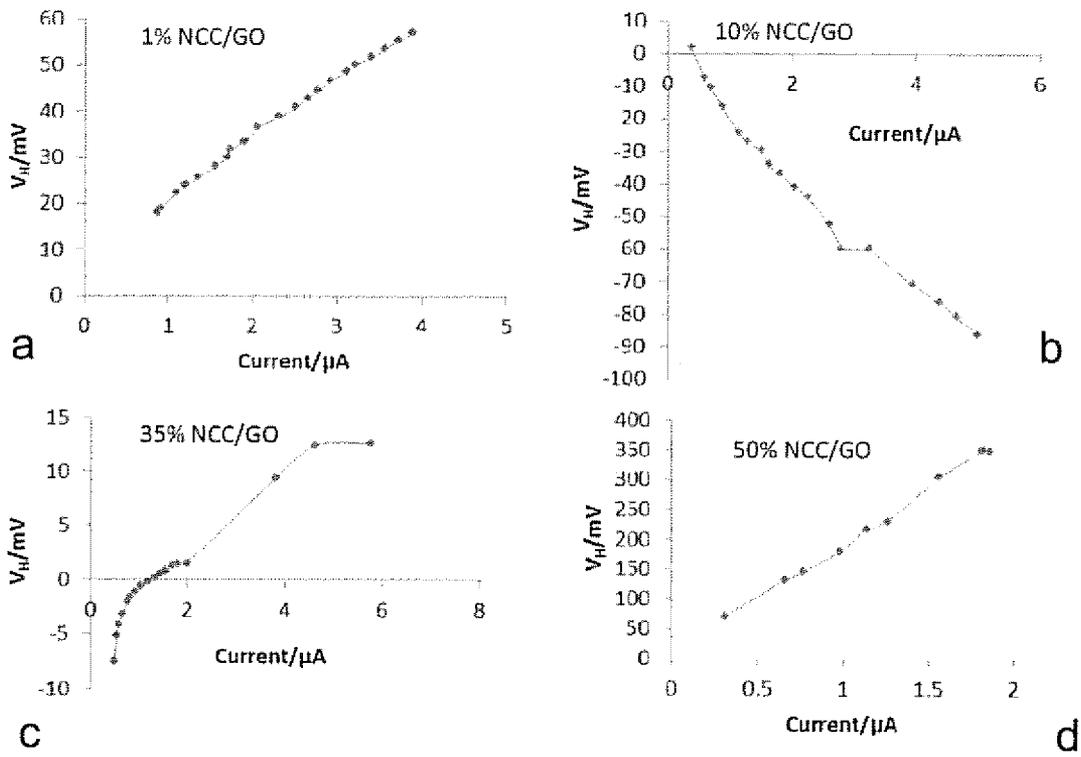


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No PCT/IB2018/051611
--

A. CLASSIFICATION OF SUBJECT MATTER INV. H01B1/08 H01B1/12 ADD.				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) H01B				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	VALENTINI L ET AL: "A novel method to prepare conductive nanocrystalline cellulose/graphene oxide composite films", MATERIALS LETTERS, ELSEVIER, AMSTERDAM, NL, vol. 105, 22 April 2013 (2013-04-22), pages 4-7, XP028562269, ISSN: 0167-577X, DOI: 10.1016/J.MATLET.2013.04.034 "Experimental part"; page 5 ----- -/--	1-13		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.				
* Special categories of cited documents : <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search	Date of mailing of the international search report			
25 May 2018	11/06/2018			
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Poole, Robert			

INTERNATIONAL SEARCH REPORT

International application No PCT/IB2018/051611

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>KAFY ABDULLAHIL ET AL: "Synthesis and characterization of cellulose nanocrystal/graphene oxide blended films", PROCEEDINGS OPTICAL DIAGNOSTICS OF LIVING CELLS II, SPIE, US, vol. 9802, 16 April 2016 (2016-04-16), pages 980204-980204, XP060070811, ISSN: 0277-786X, DOI: 10.1117/12.2219656 ISBN: 978-1-5106-1723-0 "2. Experiment"</p>	1-13
A	<p align="center">-----</p> <p>KAFY ABDULLAHIL ET AL: "Cellulose nanocrystal/graphene oxide composite film as humidity sensor", SENSORS AND ACTUATORS A: PHYSICAL, ELSEVIER BV, NL, vol. 247, 2 June 2016 (2016-06-02), pages 221-226, XP029713707, ISSN: 0924-4247, DOI: 10.1016/J.SNA.2016.05.045 page 222</p>	1-13
A	<p align="center">-----</p> <p>QI CHEN ET AL: "Tunable self-assembly structure of graphene oxide/cellulose nanocrystal hybrid films fabricated by vacuum filtration technique", RSC ADV., vol. 4, no. 74, 1 January 2014 (2014-01-01), pages 39301-39304, XP055478512, DOI: 10.1039/C4RA05921B page 39302</p>	1-13
A	<p align="center">-----</p> <p>WO 2012/129659 A1 (FPINNOVATIONS [CA]; HAMAD WADDOD YASSER [CA]; ATIFI SIHAM) 4 October 2012 (2012-10-04) page 2, line 30 - page 3, line 6</p> <p align="center">-----</p>	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/IB2018/051611

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 2012129659	A1	04-10-2012	CA 2831147 A1	04-10-2012
			EP 2691467 A1	05-02-2014
			JP 2014509667 A	21-04-2014
			US 2014203214 A1	24-07-2014
			WO 2012129659 A1	04-10-2012
