



(22) Date de dépôt/Filing Date: 2000/12/01

(41) Mise à la disp. pub./Open to Public Insp.: 2001/07/14

(30) Priorité/Priority: 2000/01/14 (09/487,633) US

(51) Cl.Int.⁷/Int.Cl.⁷ A47G 29/00


(71) Demandeurs/Applicants:
ROBBINS, RODNEY W., US;
MITCHELL, OSCAR SEAN, US

(72) Inventeurs/Inventors:
ROBBINS, RODNEY W., US;
MITCHELL, OSCAR SEAN, US

(74) Agent: MOFFAT & CO.

(54) Titre : SUPPORT AJUSTABLE POUR CONTENANT

(54) Title: ADJUSTABLE HOLDER FOR A CONTAINER

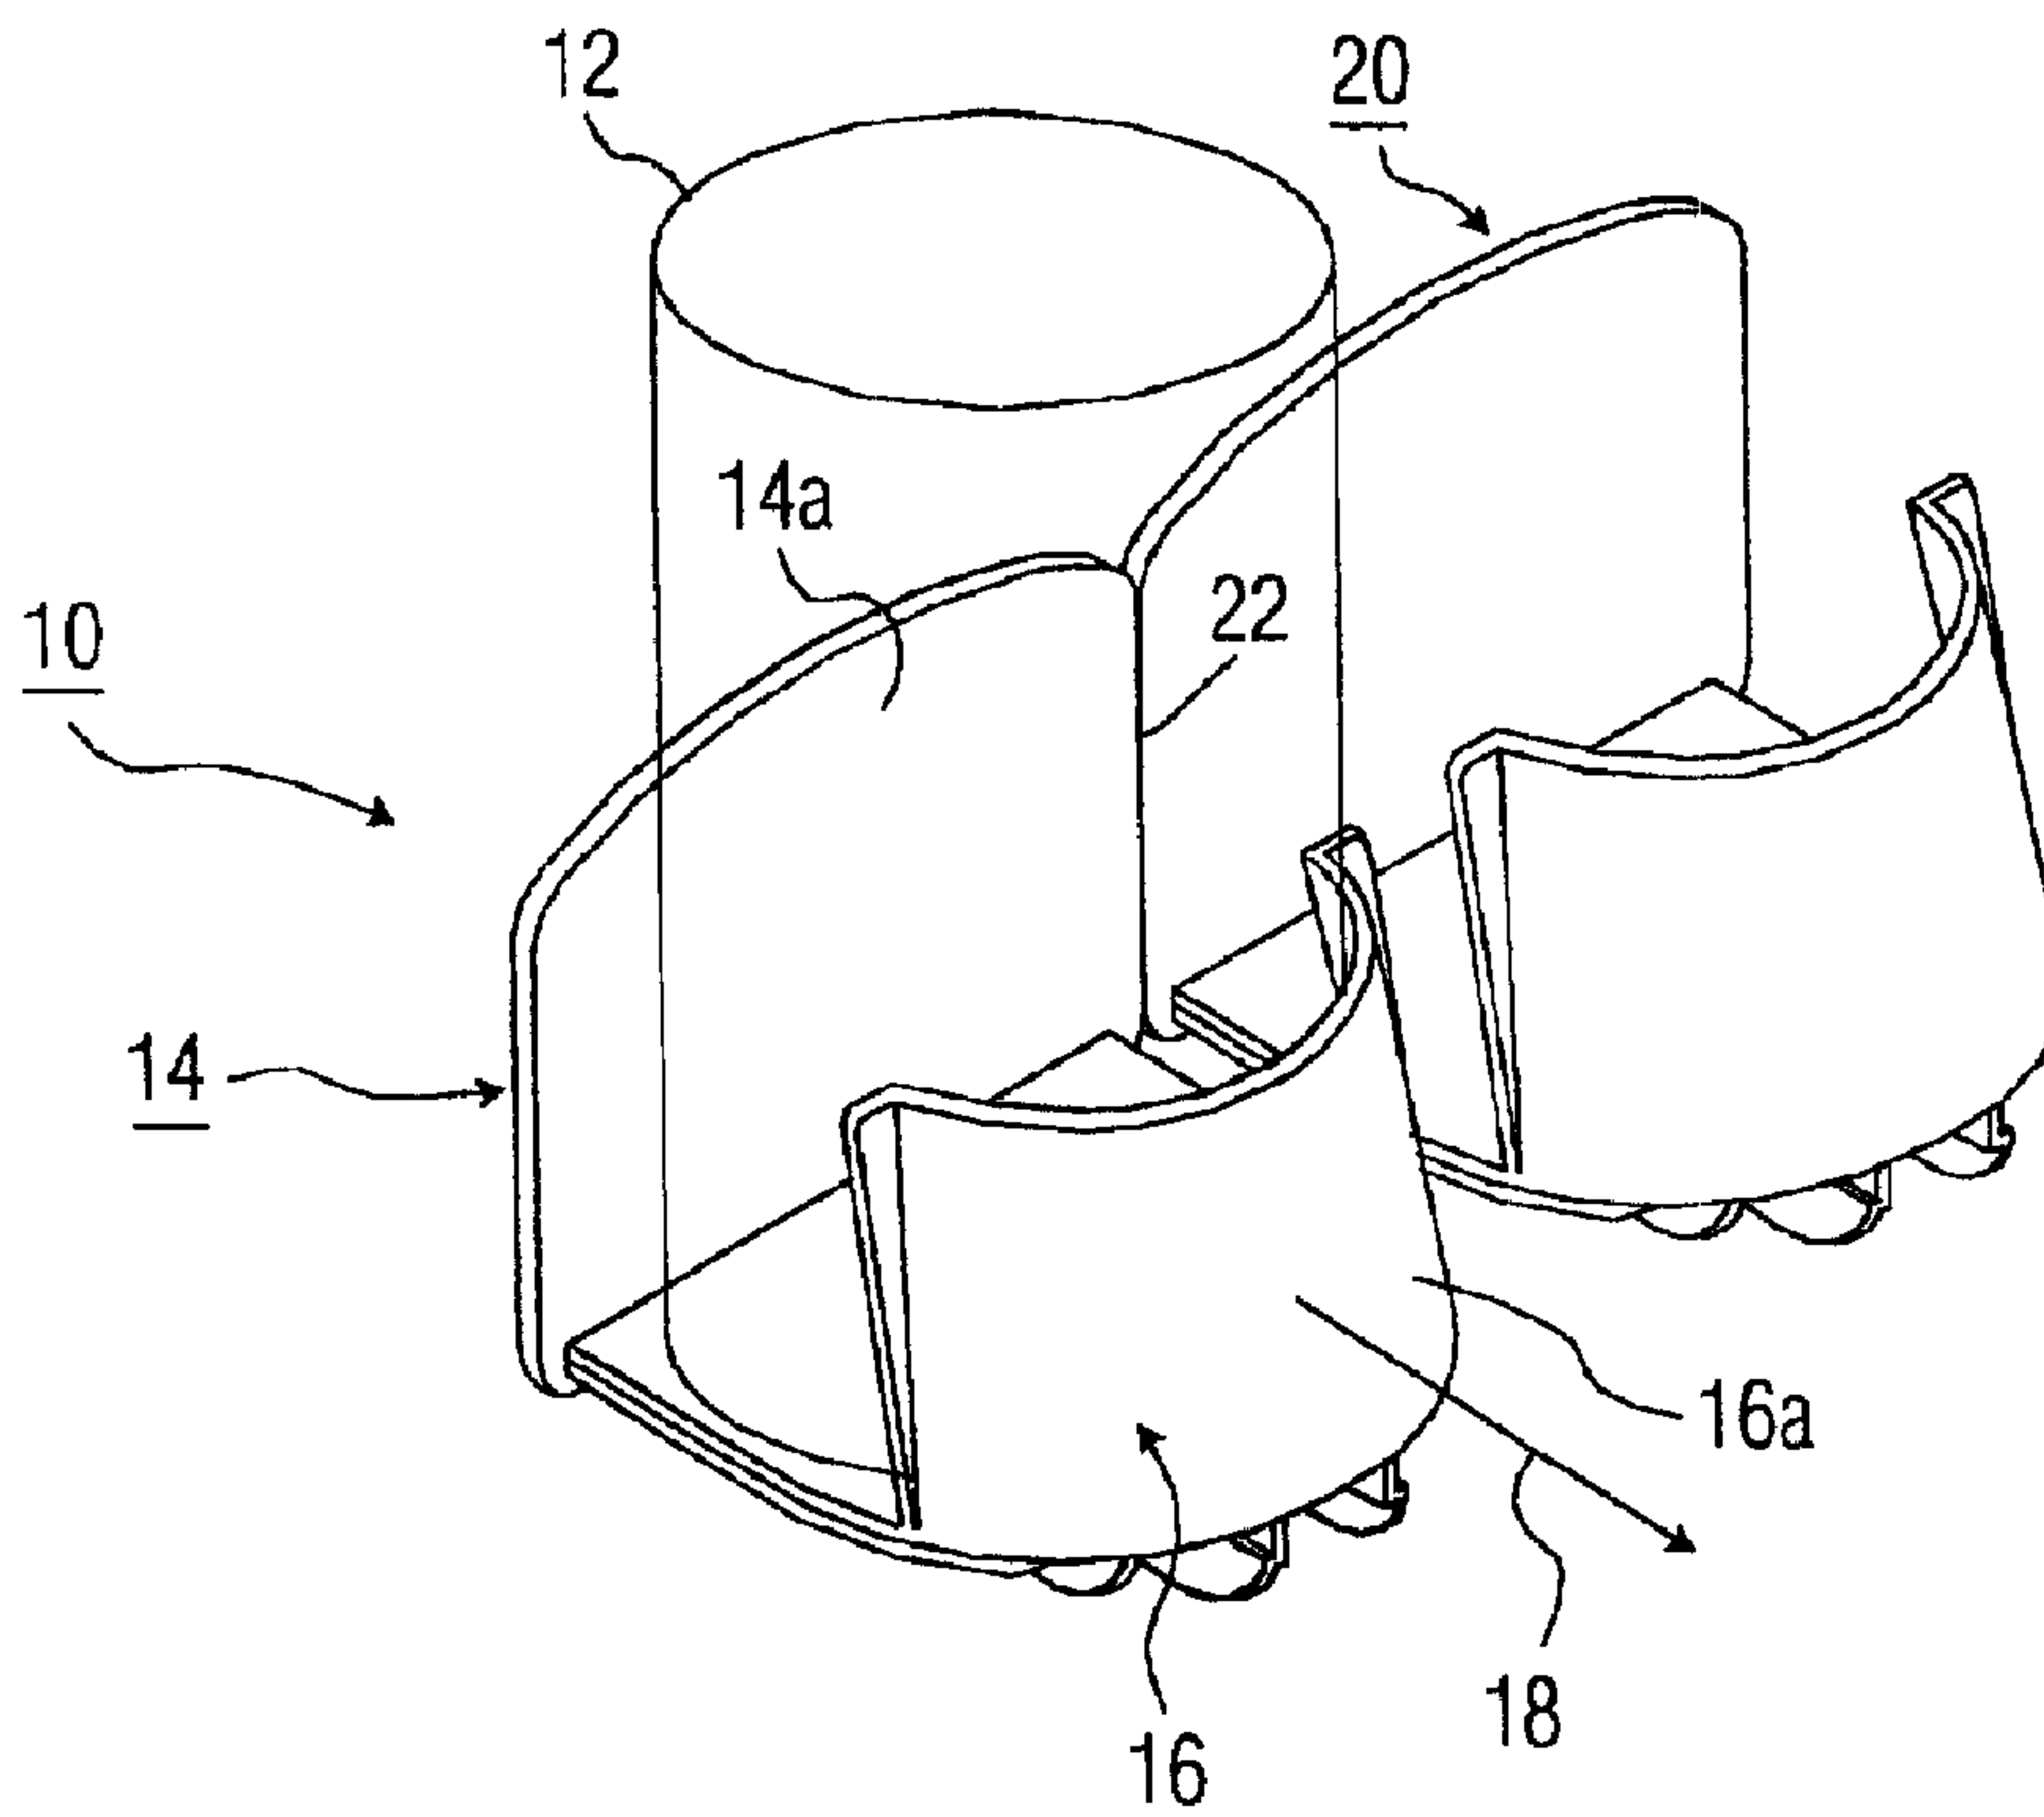

(57) **Abrégé/Abstract:**

An adjustable holder for a container comprises a stationery member having a first surface for pressing against a first side of the container. A moveable member has a second surface for pressing against a second side of the container. First and second structures allow the moveable member to telescope with respect to the stationary member along a direction of adjustment. Third and fourth structures set a plurality of distances between the first and second surfaces. The third structure comprises a plurality of slots arranged along the direction of adjustment and oriented generally orthogonal to such direction. The fourth structure comprises a resiliently biased projection with a user-operated handle for being inserted into a desired slot. The holder adjusts to the size of the container, and, in preferred embodiments, can be made especially economically.



Adjustable Holder for a Container

Abstract of the Disclosure

An adjustable holder for a container comprises a stationery member having a first
5 surface for pressing against a first side of the container. A moveable member has a second
surface for pressing against a second side of the container. First and second structures allow
the moveable member to telescope with respect to the stationary member along a direction of
adjustment. Third and fourth structures set a plurality of distances between the first and
second surfaces. The third structure comprises a plurality of slots arranged along the direction
10 of adjustment and oriented generally orthogonal to such direction. The fourth structure
comprises a resiliently biased projection with a user-operated handle for being inserted into a
desired slot. The holder adjusts to the size of the container, and, in preferred embodiments,
can be made especially economically.

Adjustable Holder for a Container

Field of the Invention

5 The present invention relates to an adjustable holder for a container and, more particularly, to a holder that is economical to make.

Background of the Invention

10 Holders for containers such as spice jars or the like are known in the art. They can be easily mounted on the inside of a door of an existing kitchen cabinet, for instance, and may occupy space that is normally wasted.

 It would be desirable to provide a holder for a container that adjusts to the size of the container, so that a spice jar can be interchanged with a soup can, and so forth. It would further be desirable to provide such a holder that can be made economically.

15

Summary of the Invention

 An exemplary embodiment of the inventive holder for a container comprises a stationery member having a first surface for pressing against a first side of the container. A moveable member has a second surface for pressing against a second side of the container.

20 First and second structures allow the moveable member to telescope with respect to the stationary member along a direction of adjustment. Third and fourth structures set a plurality of distances between the first and second surfaces. The third structure comprises a plurality of slots arranged along the direction of adjustment and oriented generally orthogonal to such direction. The fourth structure comprises a resiliently biased projection with a user-operated

25 handle for being inserted into a desired slot.

 The foregoing provides a holder for a container that adjusts to the size of the container, and that, in preferred embodiments, can be made especially economically.

Description of the Drawings

Fig. 1 is a perspective view of a pair of holders for containers in accordance with the invention.

Fig. 2 is an exploded, perspective view from beneath a single holder in which a moveable member is shown spaced apart from a stationary member for ease of illustration.

Fig. 3 is a bottom view of the stationary member of Figs. 1 and 2.

Fig. 4 is a front view of the moveable member of Figs. 1 and 2, taken from the right-hand side of those figures.

Fig. 5 is bottom view of the holder of Fig. 1.

Fig. 6A is an enlarged detail view of adjustment structures taken within dashed-line circle 26 of Fig. 5.

Fig. 6B is a cross-sectional view taken at arrows 6B-6B in Fig. 6A.

Fig. 7 is a block diagram of a pair of mold halves for making the stationary member of Figs. 1 and 2.

Fig. 8 is a top view of the stationary member of Figs. 1 and 2.

Fig. 9 is a block diagram of a pair of mold halves for making the moveable member of Figs. 1 and 2.

Fig. 10 is a rear view of the moveable member of Figs. 1 and 2, taken from the left-hand side of those figures.

Detailed Description of the Invention

Fig. 1 shows a preferred holder 10 for a container 12 in accordance of the invention. The container, shown in phantom for ease of illustration, may comprise a spice jar or soup can, by way of example. Container 10 includes a stationary member 14 and a movable member 16. The stationary member may be adhered to a vertical wall or door, for instance, by adhesive or other means (not shown). Movable member 16 can be adjusted along a direction 18 by making arcuate wall 16a of member 16 somewhat flexible and, additionally, by various structures described below. Arcuate wall 16a generally conforms to the surface of jar 12

pressing against it. Wall 16a is preferably thinner than wall 14a. Members 14 and 16 can be formed from PBS or other material as will be apparent to those of ordinary skill in the art.

A second holder 20, shown in phantom, can be attached the first holder 10 along a narrow seam or perforated region 22. A user can easily separate the two holders from each other by, for instance, flexing region 22 to weaken it and then severing the holders from one another with scissors.

Fig. 2 shows moveable member 16 spaced apart from the stationary member 14 for ease of illustration. Normally, movable member 16 is engaged with stationary member 14, as shown in Fig. 1, for instance. Generally horizontal portions 14b and 14c of the stationary member form a generally horizontal support of that member, which can support at least part of a container (not shown) or movable member 16. Movable member 16 similarly includes a generally horizontal support 16b, which can support at least part of a container (not shown).

Telescoping with First and Second Structures

A preferred structure for allowing the movable member to telescope with respect to the stationary member along the direction of adjustment 18 is now described. That structure, referred to herein as the "first" structure with reference numerals in the 100's series, includes a pair of spaced, substantially parallel, confronting edges 100. Edges 100 preferably comprise the confronting edges of support portions 14b and 14c. Edges 100 may be more easily viewed in Fig. 3, showing the underside of stationary member 14.

A "second" structure, with reference numerals in the 200's series, includes a pair of substantially parallel grooves 200 facing in opposing directions, for respectively receiving the pair of confronting edges 100. Grooves 200 can be more easily seen in the front plan view of movable member 16 in Fig. 4 taken from the right side of Fig. 1. As shown in Figs. 2 and 4, the upper wall of the grooves may comprise support 16b, as is preferred. As further shown in such figures, respective lower walls of the grooves may comprise support walls 404 on which resiliently biased projections 400 are mounted.

The telescoping action of the first and second structures will be further described below. Other types of telescoping structures can be employed in some embodiments of the

invention. The other types (not shown) may include an elongated projection depending from one member that fits within a rectangular enclosure or other enclosure on the other member, torsion adjustment structures, spring-loaded twist structures and others as will be apparent to those of ordinary skill in the art.

5

Adjustment with Third and Fourth Structures

A "third" structure, numbered in the 300's series, comprises a plurality of slots 300 arranged along the direction of adjustment 18, and oriented generally downwardly. Preferably, a second plurality of slots 302, similar to slots 300, is arranged in parallel with slots 300. The underside view of stationary member 14 in Fig. 3 shows spaced walls 304
10 depending downwardly from support portion 14b, which form respective slots 300 between adjacent walls. Wall 306 depends downwardly from support portion 14b, and integrally intersects walls 300. Walls 308 and 310 respectively correspond to walls 304 and 306, but depend instead from support portion 14c.

Figs. 2 and 4 show resiliently biased projections 400, comprising part of a "fourth"
15 structure for adjustment purposes. The lowermost extremities of projections 400 form user-operated handles for manipulating the projections. The projections 400 depend from resilient arms 402, in turn depending from walls 404 mounted to the underside the support 16b.

The interaction of the third and fourth structures will be further described below.

Operation

20 Fig. 5 shows the underside of holder 10 arranged to have the smallest opening for a container (not shown). In this position, projections 400 are arranged in respective ones of the uppermost-shown slots 300 and 302. The three lower-shown pairs of slots 300 and 302 indicate three further adjustment positions.

Fig. 6A is an enlarged detail of adjustment structures taken within dashed-line circle 26
25 of Fig. 5. Fig. 6A shows surfaces 310 and 312 respectively of wall 304 and of projection 400 held by resilient arm 402, which engage each other when a container is securely held by holder 10. Engaging surfaces 310 and 312 are preferably shaped to maintain the projection in such slots in the absence of the handle being operated when a container presses apart walls 14a and

16a (Fig. 1) in normal operation. To achieve this, a major portion of each of engaging surfaces 310 and 312 (and other engaging surfaces in the holder) is preferably oriented substantially orthogonal to direction of adjustment 18. By "substantially orthogonal" is meant within approximately 6 degrees of exactly orthogonal, or within a greater range preferably below about 7-degrees so long as projection 400 is maintained within slot 300 in a normal container-holding situation.

Fig. 6B is a cross-sectional view taken at arrows 6B-6B in Fig. 6A. It shows how movement of projection 400 to the left is stopped by portion 306a of wall 306 (Fig. 3). More particularly, the lower portion 410 of projection 400 presses to the left against wall portion 306a. Wall 306 of Fig. 3, which includes portion 306a and similar wall portions (not numbered), integrally intersects and supports walls 304.

Referring to Fig. 2, stationary member 14 and associated first and second structures in the 100's and 200's series of reference numerals preferably comprise a single, integral part manufactured from a two-piece injection mold (not shown). Similarly, movable member 16 and associated third and fourth structures in the 300's and 400's series of reference numerals preferably comprise a single, integral part manufactured from another two-piece injection mold (not shown).

It is especially preferred that each of stationary member 14 and movable member 16 be shaped so that each can be made from a two-piece mold of the straight-pull type. A straight-pull mold is one in which cams or other movable parts are not used for releasing the parts from the mold. Such a mold itself is economical to make and operate, so that parts it produces can be made especially economically.

Molding the Stationary Member

Fig. 2 shows a vertical direction 28 orthogonal to direction of adjustment 18. As shown in Fig. 7, in producing stationary member 14, a straight-pull mold may comprise two halves 30 and 32 that come together along direction 28 with a cavity between them (not shown) defining member 14. Direction 28 need not be vertical in connection with orientating the mold, but reference to upper and lower mold halves will be made for convenience.

Referring to Fig. 3, a bottom view of member 14, appropriate shaping of the mold requires substantially all surfaces that are exposed to "lower" half 32 of the mold (Fig. 7) to be visible in that view, or, in other words, not formed on an undercut portion that cannot be seen in that view. Referring to Fig. 8, a top view of member 14, appropriate shaping of the member
 5 requires substantially all surfaces that are exposed to "upper" half 30 of the mold (Fig. 7) to be visible in that view, or, in other words, not formed on an undercut portion that cannot be seen in that view.

The foregoing can be expressed in terms of mold geometry. All active surfaces (not shown) of "upper" half 30 of the mold (Fig. 7) should conform to the surfaces visible in Fig. 8,
 10 and all active surfaces (not shown) of "lower" half 32 of the mold (Fig. 7) should conform to the surfaces visible in Fig. 3. By "active" surface is meant a surface forming the mentioned cavity between mold halves.

Molding the Movable Member

Fig. 2 shows a direction 18. As shown in Fig. 9, in producing moveable member 16, a
 15 straight-pull mold may comprise two halves 34 and 36 that come together along direction 18 with a cavity between them defining member 16. Direction 18 need not be horizontal in connection with orientating the mold, but reference to right and left mold halves will be made for convenience. Referring to the front view of Fig. 4, taken from the right side of movable member 16 in Fig. 1, appropriate shaping of the member requires substantially all surfaces that
 20 are exposed to "right" half 36 of the mold (Fig. 9) to be visible in that view, or, in other words, not formed on an undercut portion that cannot be seen in that view. Referring to Fig. 10, a rear view of member 16 taken from the left side of stationary member 16 in Fig. 1, appropriate shaping of the member requires substantially all surfaces that are exposed to "left" half 34 of the mold (Fig. 9) to be visible in that view, or, in other words, not formed on an undercut
 25 portion that cannot be seen in that view.

In terms of mold geometry, all active surfaces (not shown) of "right" half 36 of the mold (Fig. 9) should conform to the surfaces visible in Fig. 4, and all active surfaces (not shown) of "left" half 34 of the mold (Fig. 9) should conform to the surfaces visible in Fig. 10.

While the invention has been described with respect to specific embodiments by way of illustration, many modifications and changes will occur to those skilled in the art. For instance, directions of “downwardly,” “horizontally,” “vertically” and so on refer to directions for a holder in normal use unless otherwise indicated. Additionally, it is desired but not
5 necessary to use in Fig. 5, for instance, two rows of slots 300 and 302 and a pair of projections 400 that can be easily squeezed together by a user; only one row of slots and one projection could be used. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true scope and spirit of the invention.

What is claimed is:

1. An adjustable holder for a container, comprising:
 - a) a stationery member having a first surface for pressing against a first side of the container;
 - 5 b) a moveable member having a second surface for pressing against a second side of the container;
 - c) first and second structures for allowing the moveable member to telescope with respect to the stationary member along a direction of adjustment; and
 - d) third and fourth structures for setting a plurality of distances between the first and
 - 10 second surfaces;
 - i) the third structure comprising a plurality of slots arranged along the direction of adjustment and oriented generally orthogonal to such direction;
 - ii) the fourth structure comprising a resiliently biased projection with a user-operated handle for being inserted into a desired slot.
- 15 2. The holder of claim 1, wherein the engaging surfaces of the projection and associated wall of the desired slot are shaped to maintain the projection in such slot in the absence of the handle being operated when the first and second walls are pressed apart in normal operation.
3. The holder of claim 2, wherein respective major portions of the engaging surfaces are
 - 20 oriented substantially orthogonal to the direction of adjustment.
4. The holder of claim 1, wherein the first and third structures are associated with the moveable member.
5. The holder of claim 1, wherein the first structure comprises a plurality of downwardly extending walls defining slots between adjacent pairs of the walls.
- 25 6. The holder of claim 5, wherein:
 - a) the third structure comprises a pair of spaced, substantially parallel, confronting edges; and
 - b) the fourth structure comprises a pair of substantially parallel grooves facing in

opposing directions, for respectively receiving the pair of confronting edges.

7. The holder of claim 6, wherein the edges comprise edges of a generally horizontal support of one of the stationary and moveable members.
8. The holder of claim 6, wherein an upper wall of the grooves comprises a generally horizontal support of one of the stationary and moveable members.
9. The holder of claim 8, wherein a lower wall of the grooves comprises a support on which the resiliently biased projection is mounted.
10. An adjustable holder for a container, comprising:
 - a) a stationery member having a first surface for pressing against a first side of the container;
 - b) a moveable member having a second surface for pressing against a second side of the container;
 - c) first and second structures for allowing the moveable member to telescope with respect to the stationary member along a direction of adjustment; and
 - d) third and fourth structures for setting a plurality of distances between the first and second surfaces;
 - i) the third structure comprising first and second pluralities of slots each of which is arranged along the direction of adjustment and oriented generally orthogonal to such direction;
 - ii) the fourth structure comprising a pair of resiliently biased projections, each with a user-operated handle, for being respectively inserted into a desired slot in the first plurality of slots and a desired slot in the second plurality of slots.
11. The holder of claim 10, wherein the engaging surfaces of the projection and associated wall of the desired slot are shaped to maintain the projection in such slot in the absence of the handle being operated when the first and second walls are pressed apart in normal operation.
12. The holder of claim 11, wherein respective major portions of the engaging surfaces are oriented substantially orthogonal to the direction of adjustment.

13. The holder of claim 10, wherein the first and third structures are associated with the moveable member.
14. The holder of claim 10, wherein the first structure comprises a plurality of downwardly extending walls defining slots between adjacent pairs of the walls.
- 5 15. The holder of claim 14, wherein:
- a) the third structure comprises a pair of spaced, substantially parallel, confronting edges; and
 - b) the fourth structure comprises a pair of substantially parallel grooves facing in opposing directions, for respectively receiving the pair of confronting edges.
- 10 16. The holder of claim 14, wherein the edges comprise edges of a generally horizontal support of one of the stationary and moveable members.
17. The holder of claim 14, wherein an upper wall of the grooves comprises a generally horizontal support of one of the stationary and moveable members.
18. The holder of claim 17, wherein a lower wall of the grooves comprises a support on which
- 15 the resiliently biased projection is mounted.
19. An adjustable holder for a container, comprising:
- a) a stationery member having a first surface for pressing against a first side of the container;
 - b) a moveable member having a second surface for pressing against a second side of
 - 20 the container;
 - c) first and second structures for allowing the moveable member to telescope with respect to the stationary member along a direction of adjustment;
 - i) the first structure comprising a pair of spaced, substantially parallel, confronting edges; and
 - 25 ii) the second structure comprising a pair of substantially parallel grooves facing in opposing directions, for respectively receiving the pair of confronting edges;
 - d) third and fourth structures for setting a plurality of distances between the first and second surfaces;

i) the third structure comprising a plurality of slots arranged along the direction of adjustment and oriented generally downwardly;

ii) the fourth structure comprising a resiliently biased projection with a user-operated handle for being inserted into a desired slot;

5 e) the first and third structures comprising an integral part of, and depending from a generally horizontal support of, one of the stationary member and the moveable member, and, when viewed from a vertical direction from both the bottom and top, substantially all surfaces of the one member exposed to a respective half of a manufacturing mold can be seen, whereby the respective halves of the mold can be of the straight-pull type.

10 20. The holder of claim 19, wherein:

a) the slots are respectively formed between adjacent ones of a plurality of confronting walls that depend from a generally horizontal support of one of the stationary member and the moveable member, and that are oriented generally downwardly; and

15 b) a further wall depends from the generally horizontal support, integrally intersects at least two of the plurality of confronting walls, and forms a stop against movement of the projection in the direction in which it is biased.

21. The holder of claim 19, wherein the engaging surfaces of the projection and associated wall of the desired slot are shaped to maintain the projection in such slot in the absence of the handle being operated when the first and second walls are pressed apart in normal
20 operation.

22. The holder of claim 21, wherein respective major portions of the engaging surfaces are oriented substantially orthogonal to the direction of adjustment.



23. The holder of claim 19, wherein:

25 a) the third structure comprises first and second pluralities of slots each of which is arranged along the direction of adjustment and oriented generally orthogonal to such direction; and

b) the fourth structure comprises a pair of resiliently biased projections, each with a user-operated handle, for being respectively inserted into a desired slot in the first plurality

of slots and a desired slot in the second plurality of slots.

24. The holder of claim 19, wherein the second and fourth structures comprise an integral part of, and depend from a generally horizontal support of, the other of the stationary member and the moveable member, and, when viewed along the direction of adjustment from each
5 direction, substantially all surfaces of the other member exposed to a respective half of a manufacturing mold can be seen, whereby the respective halves of the mold can be of the straight-pull type.
25. The holder of claim 19, wherein the one member comprises the moveable member.
26. The holder of claim 24, wherein the edges of the first structure each comprise edges of a
10 generally horizontal support of one of the stationary member and the moveable member.
27. The holder of claim 26, wherein an upper wall of the grooves of the second structure comprises a generally horizontal support of the other of the stationary member and the moveable member.

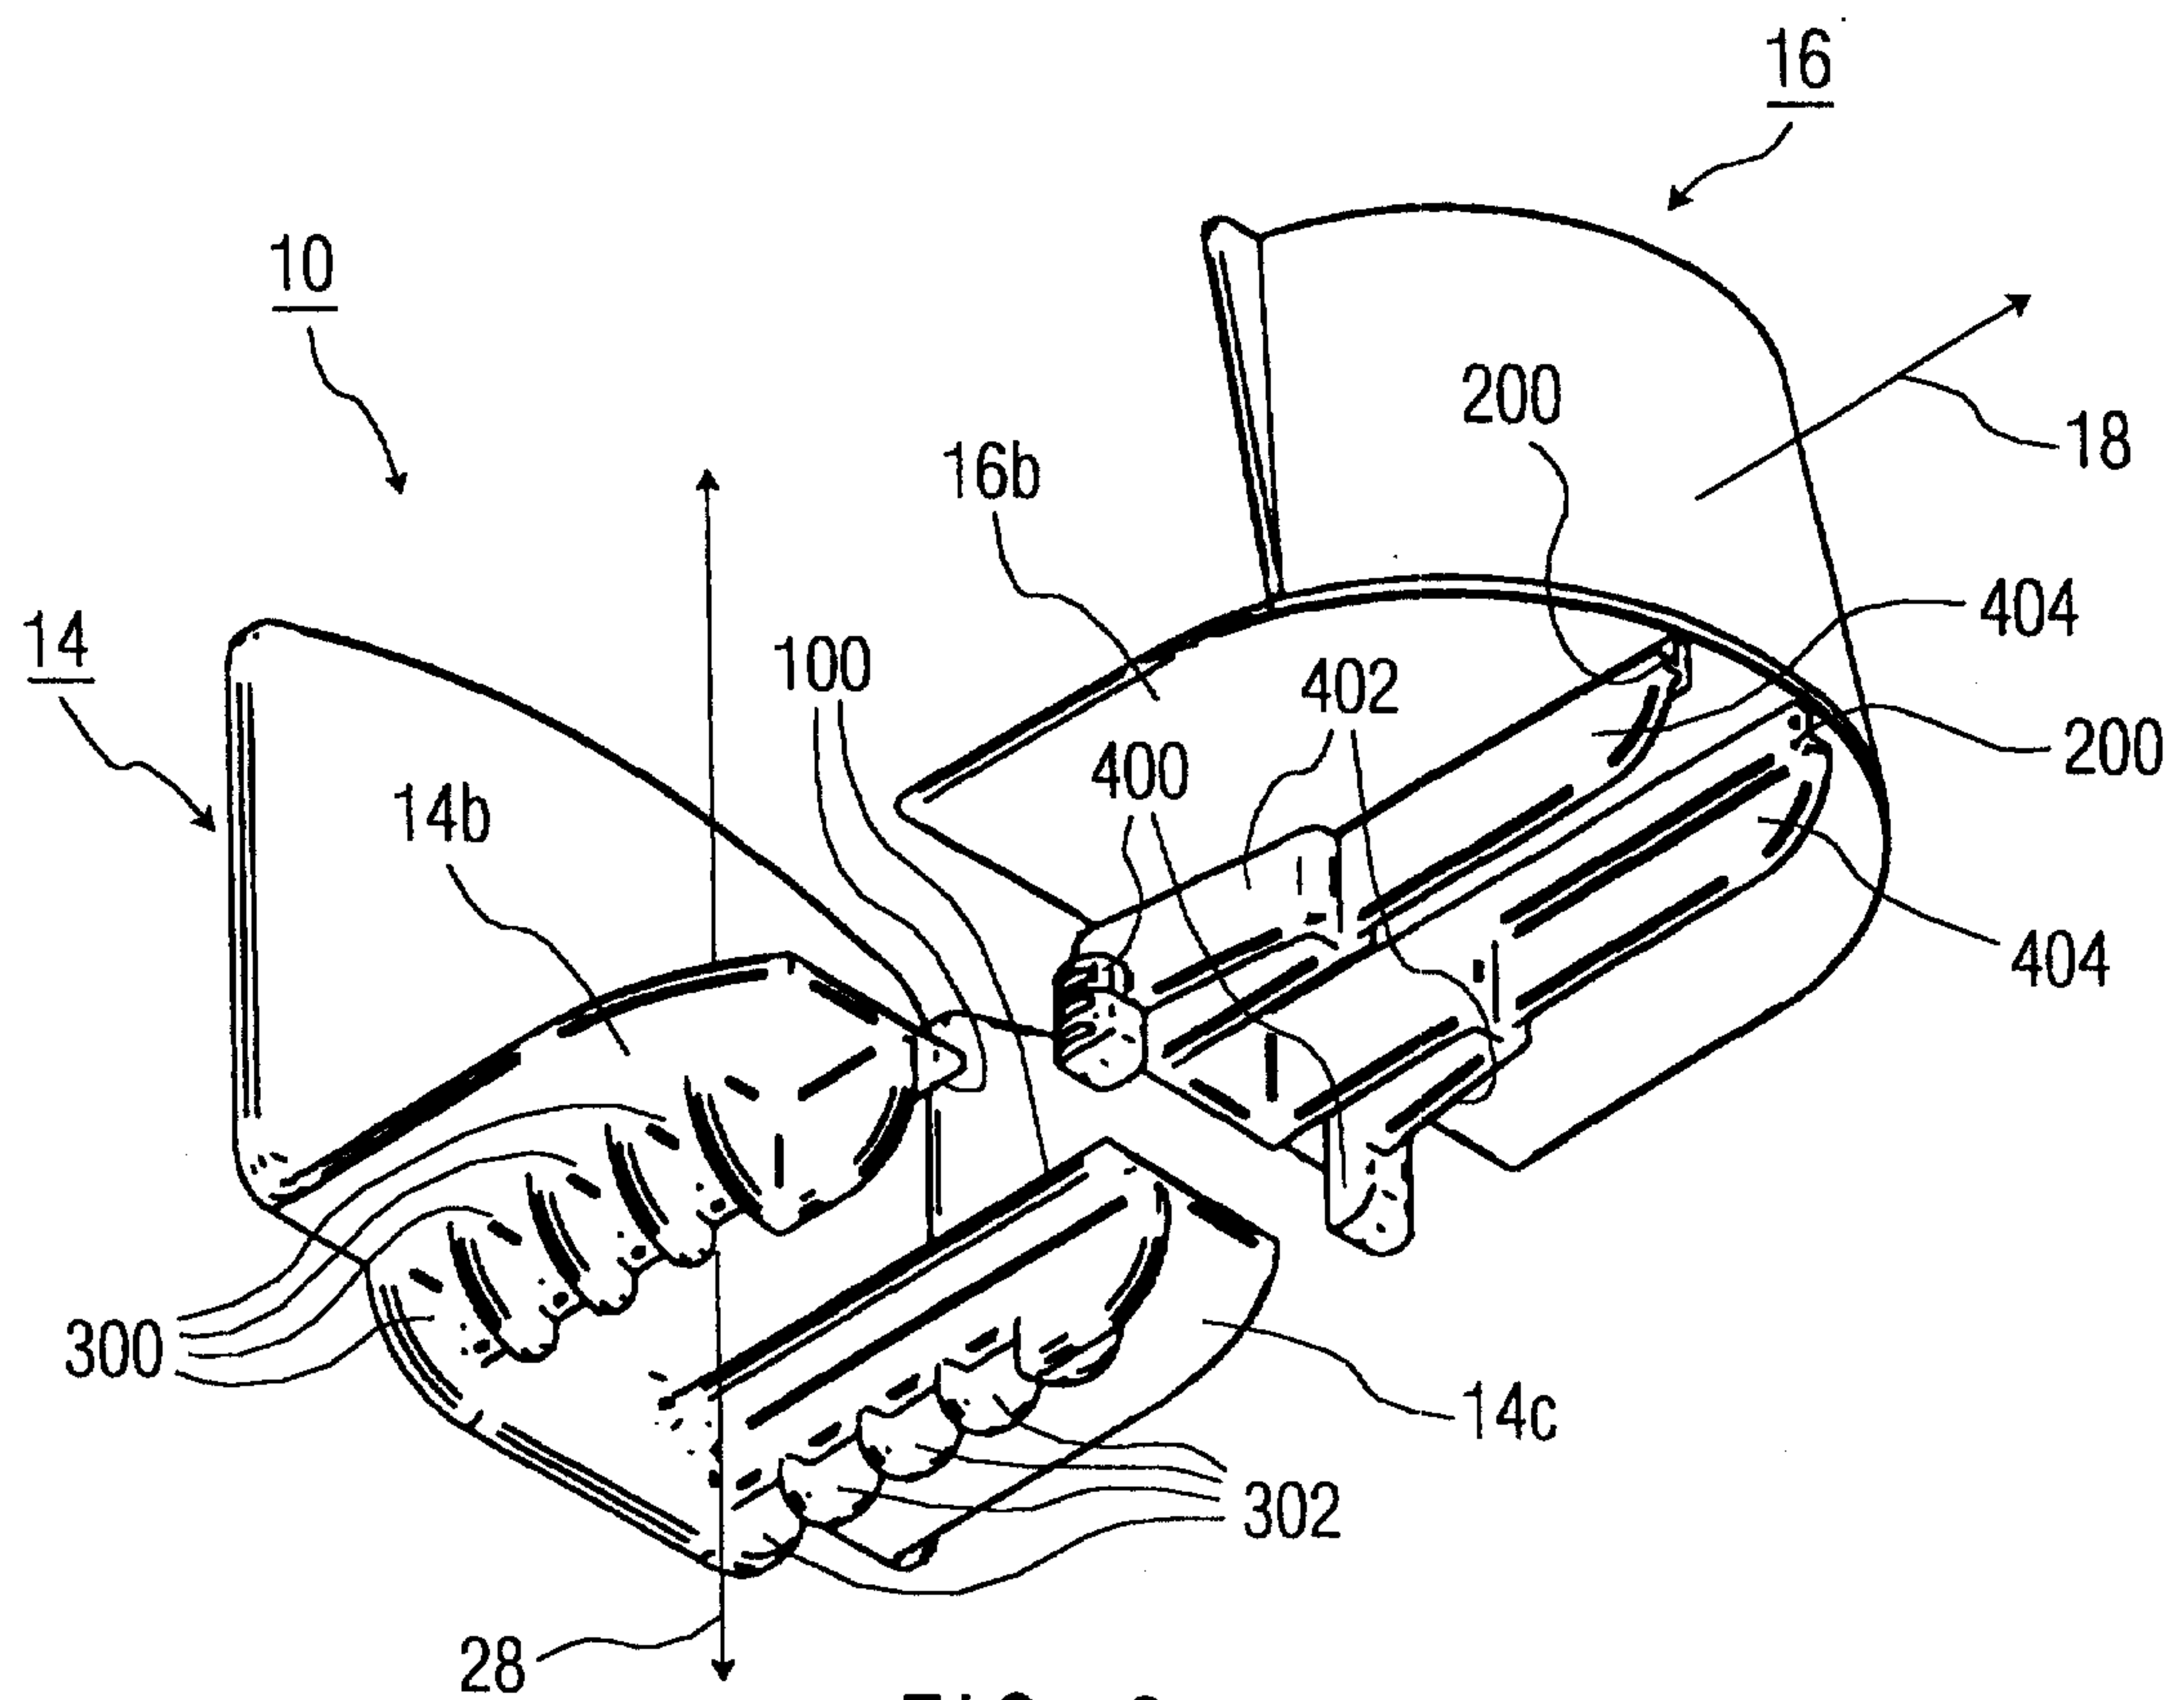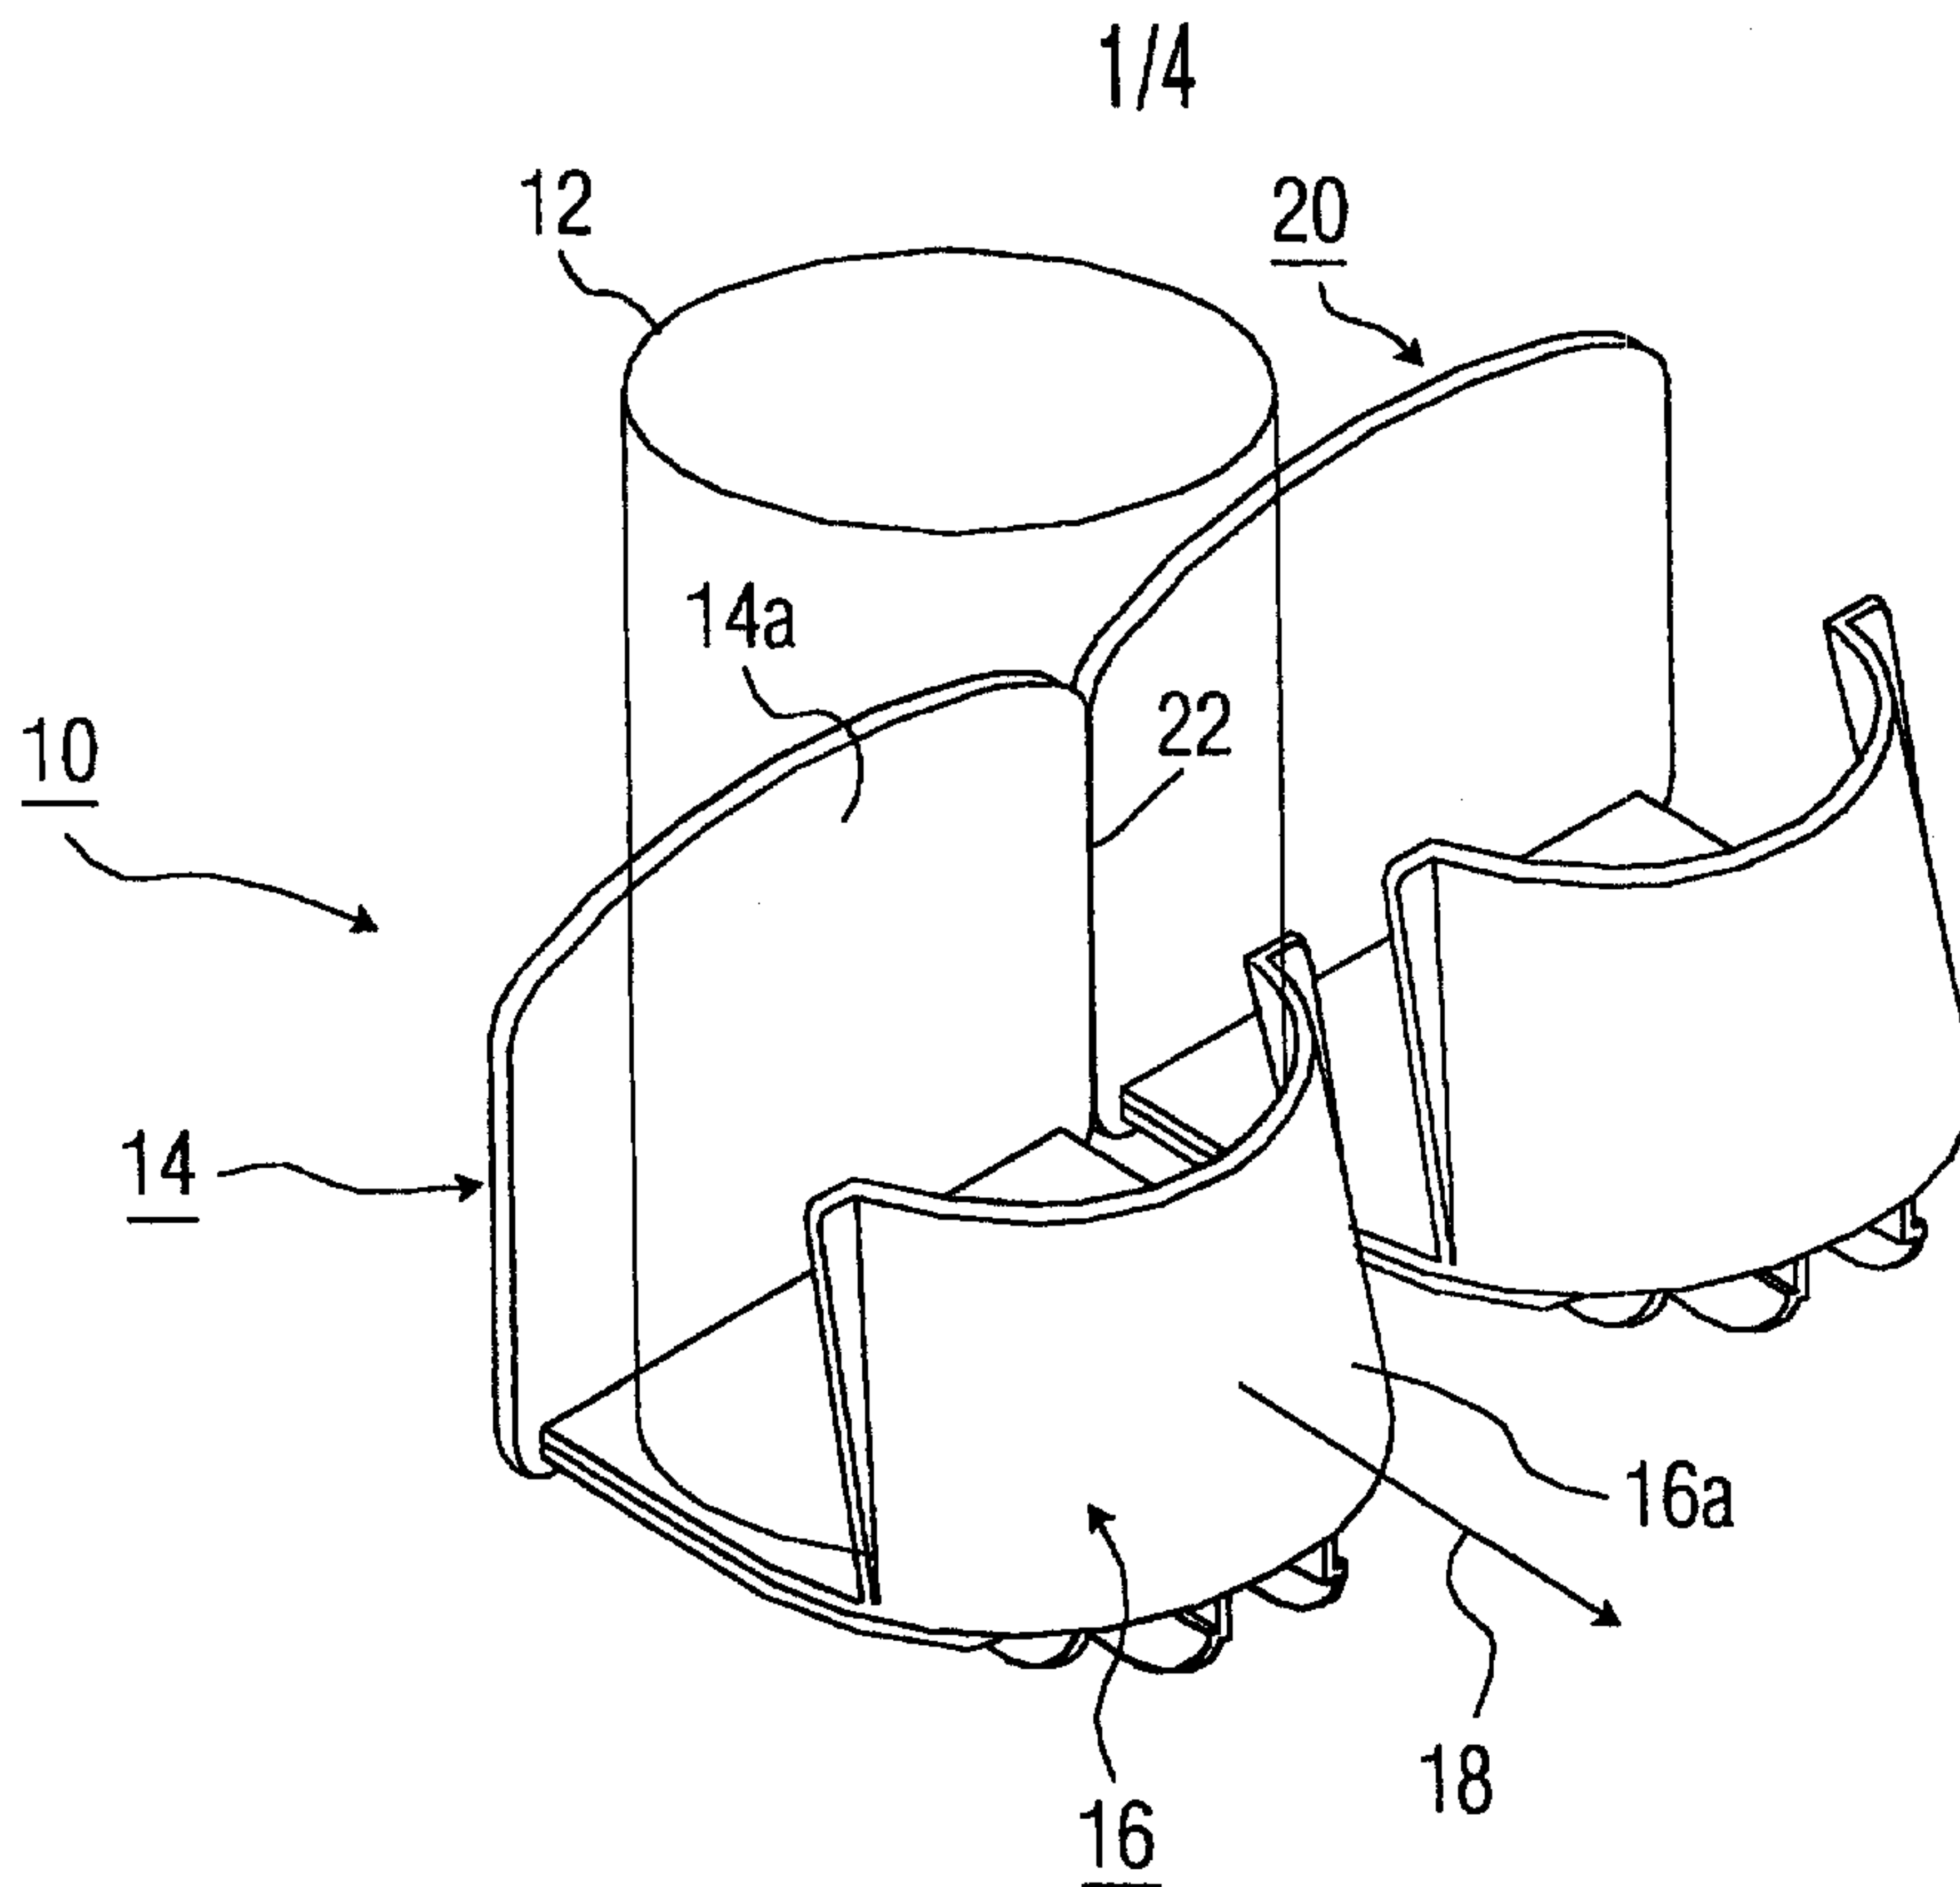

2/4

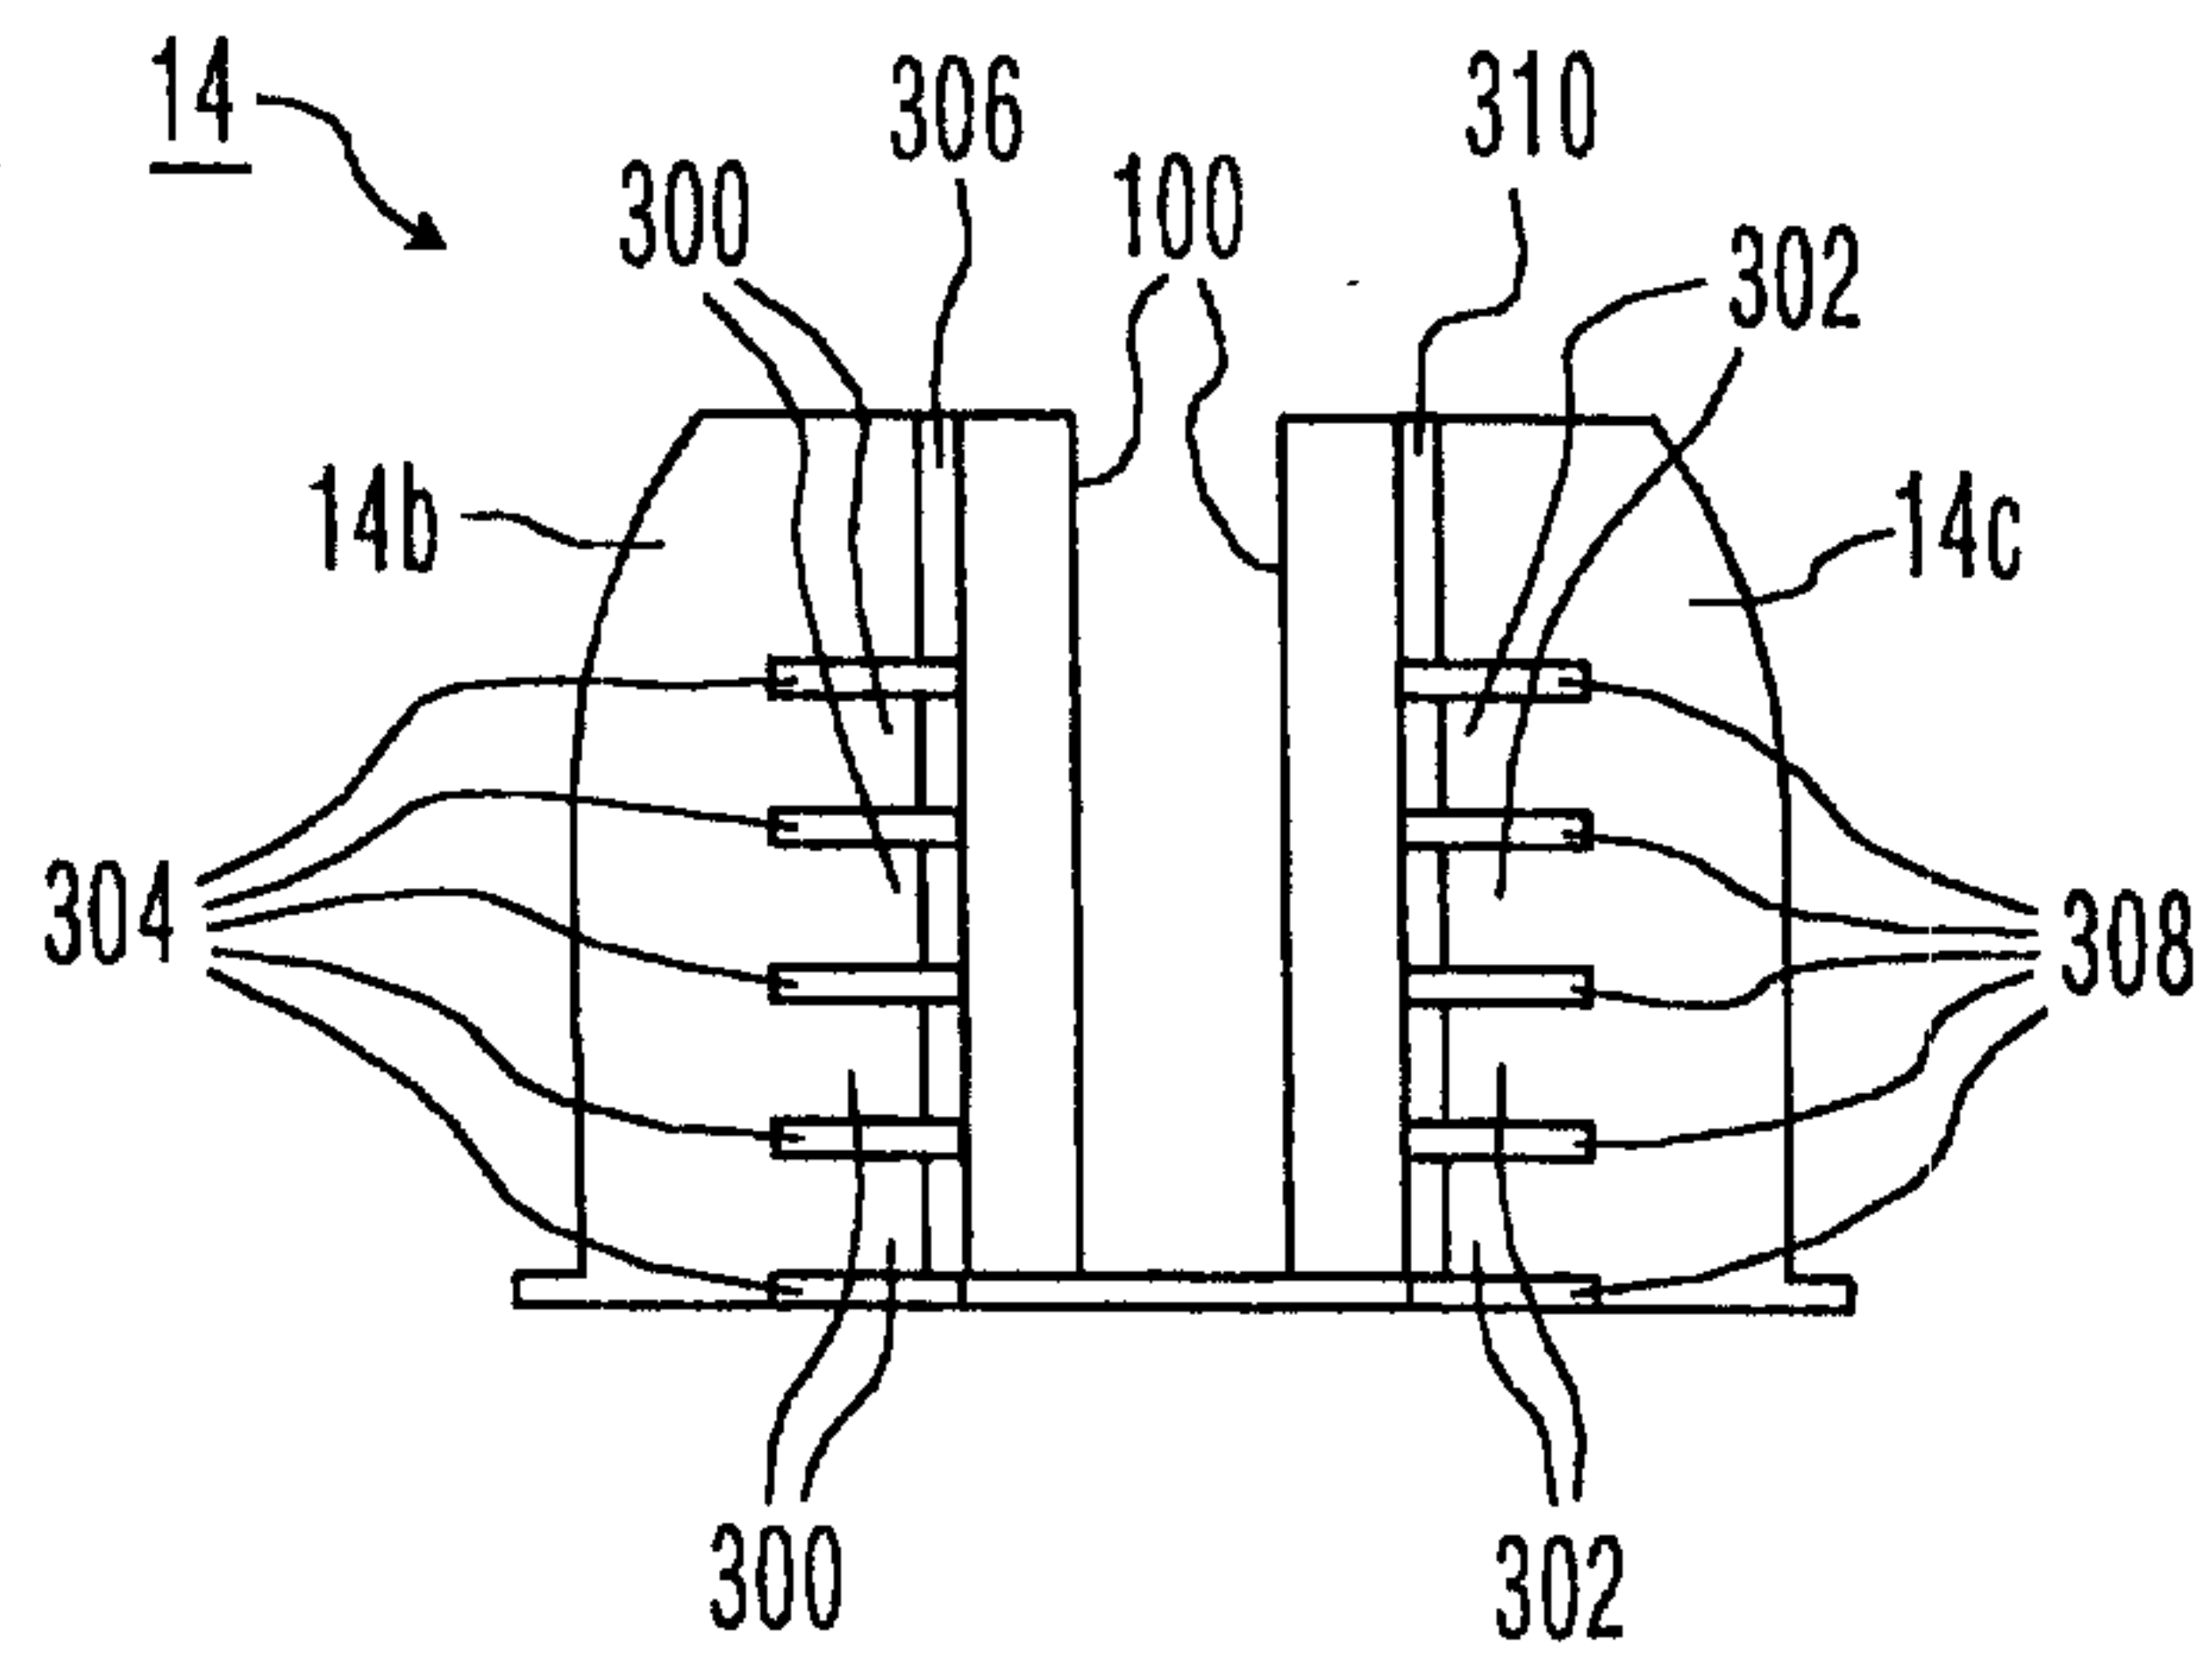


FIG. 3

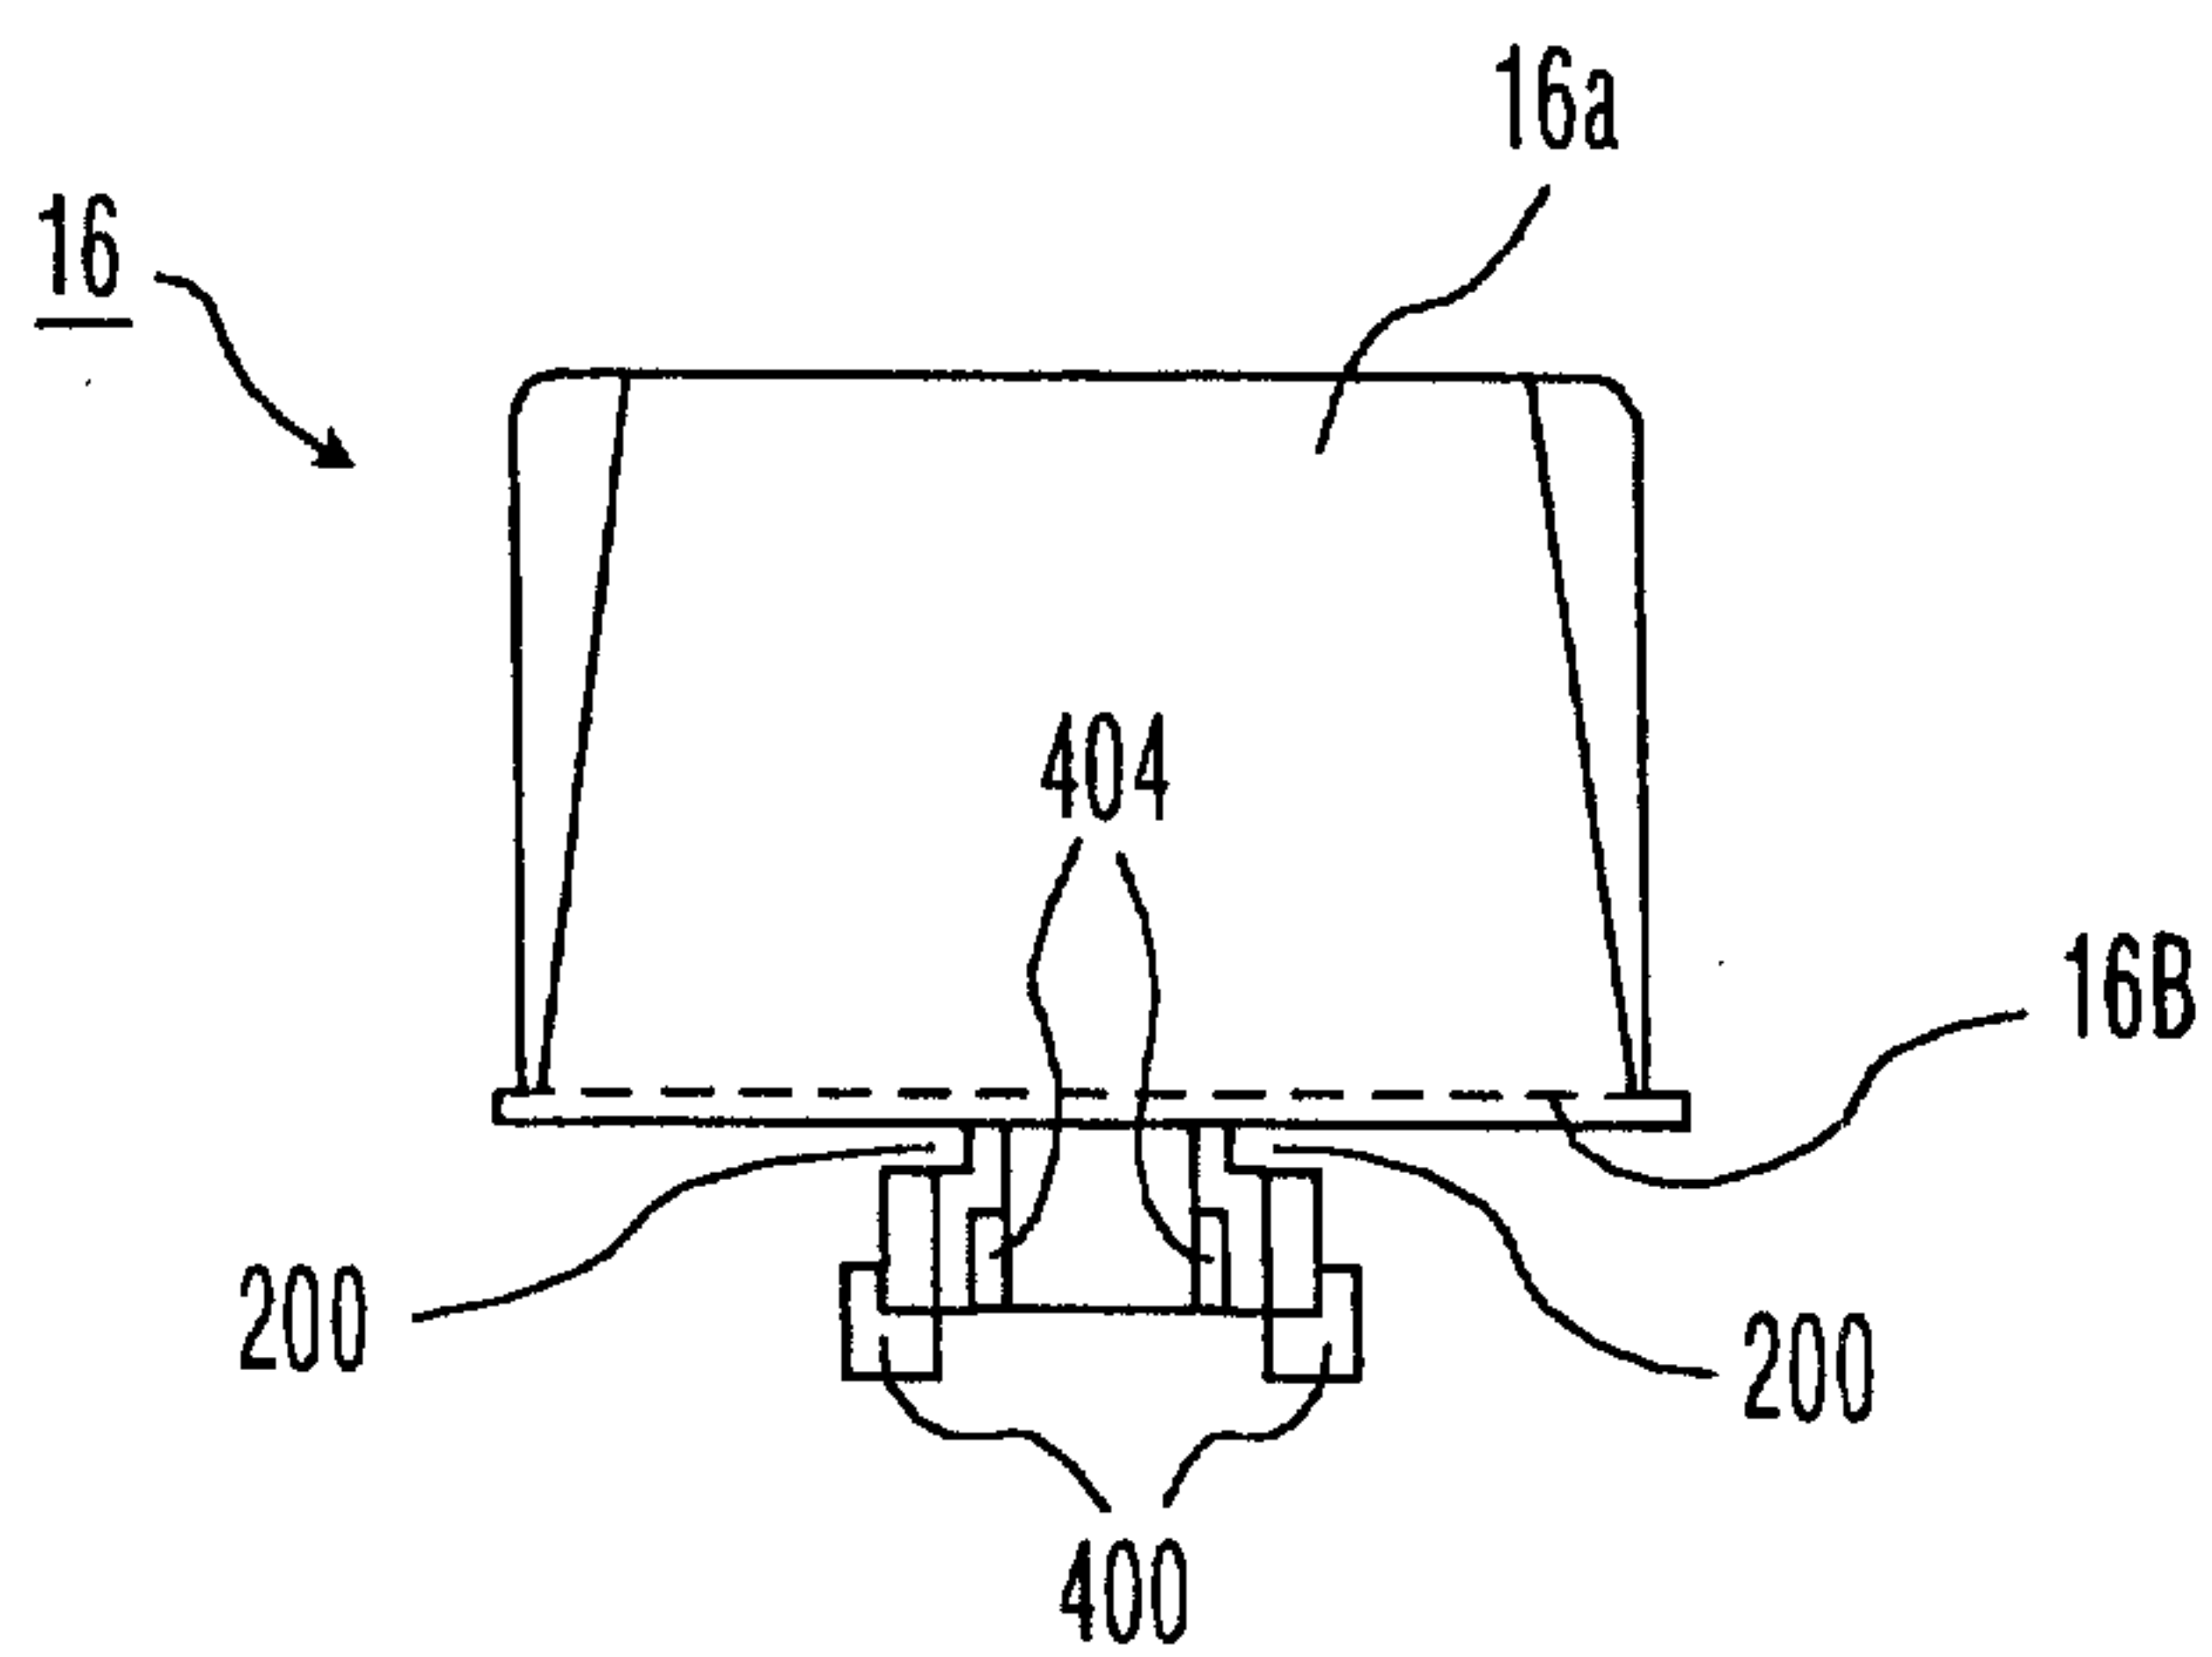


FIG. 4

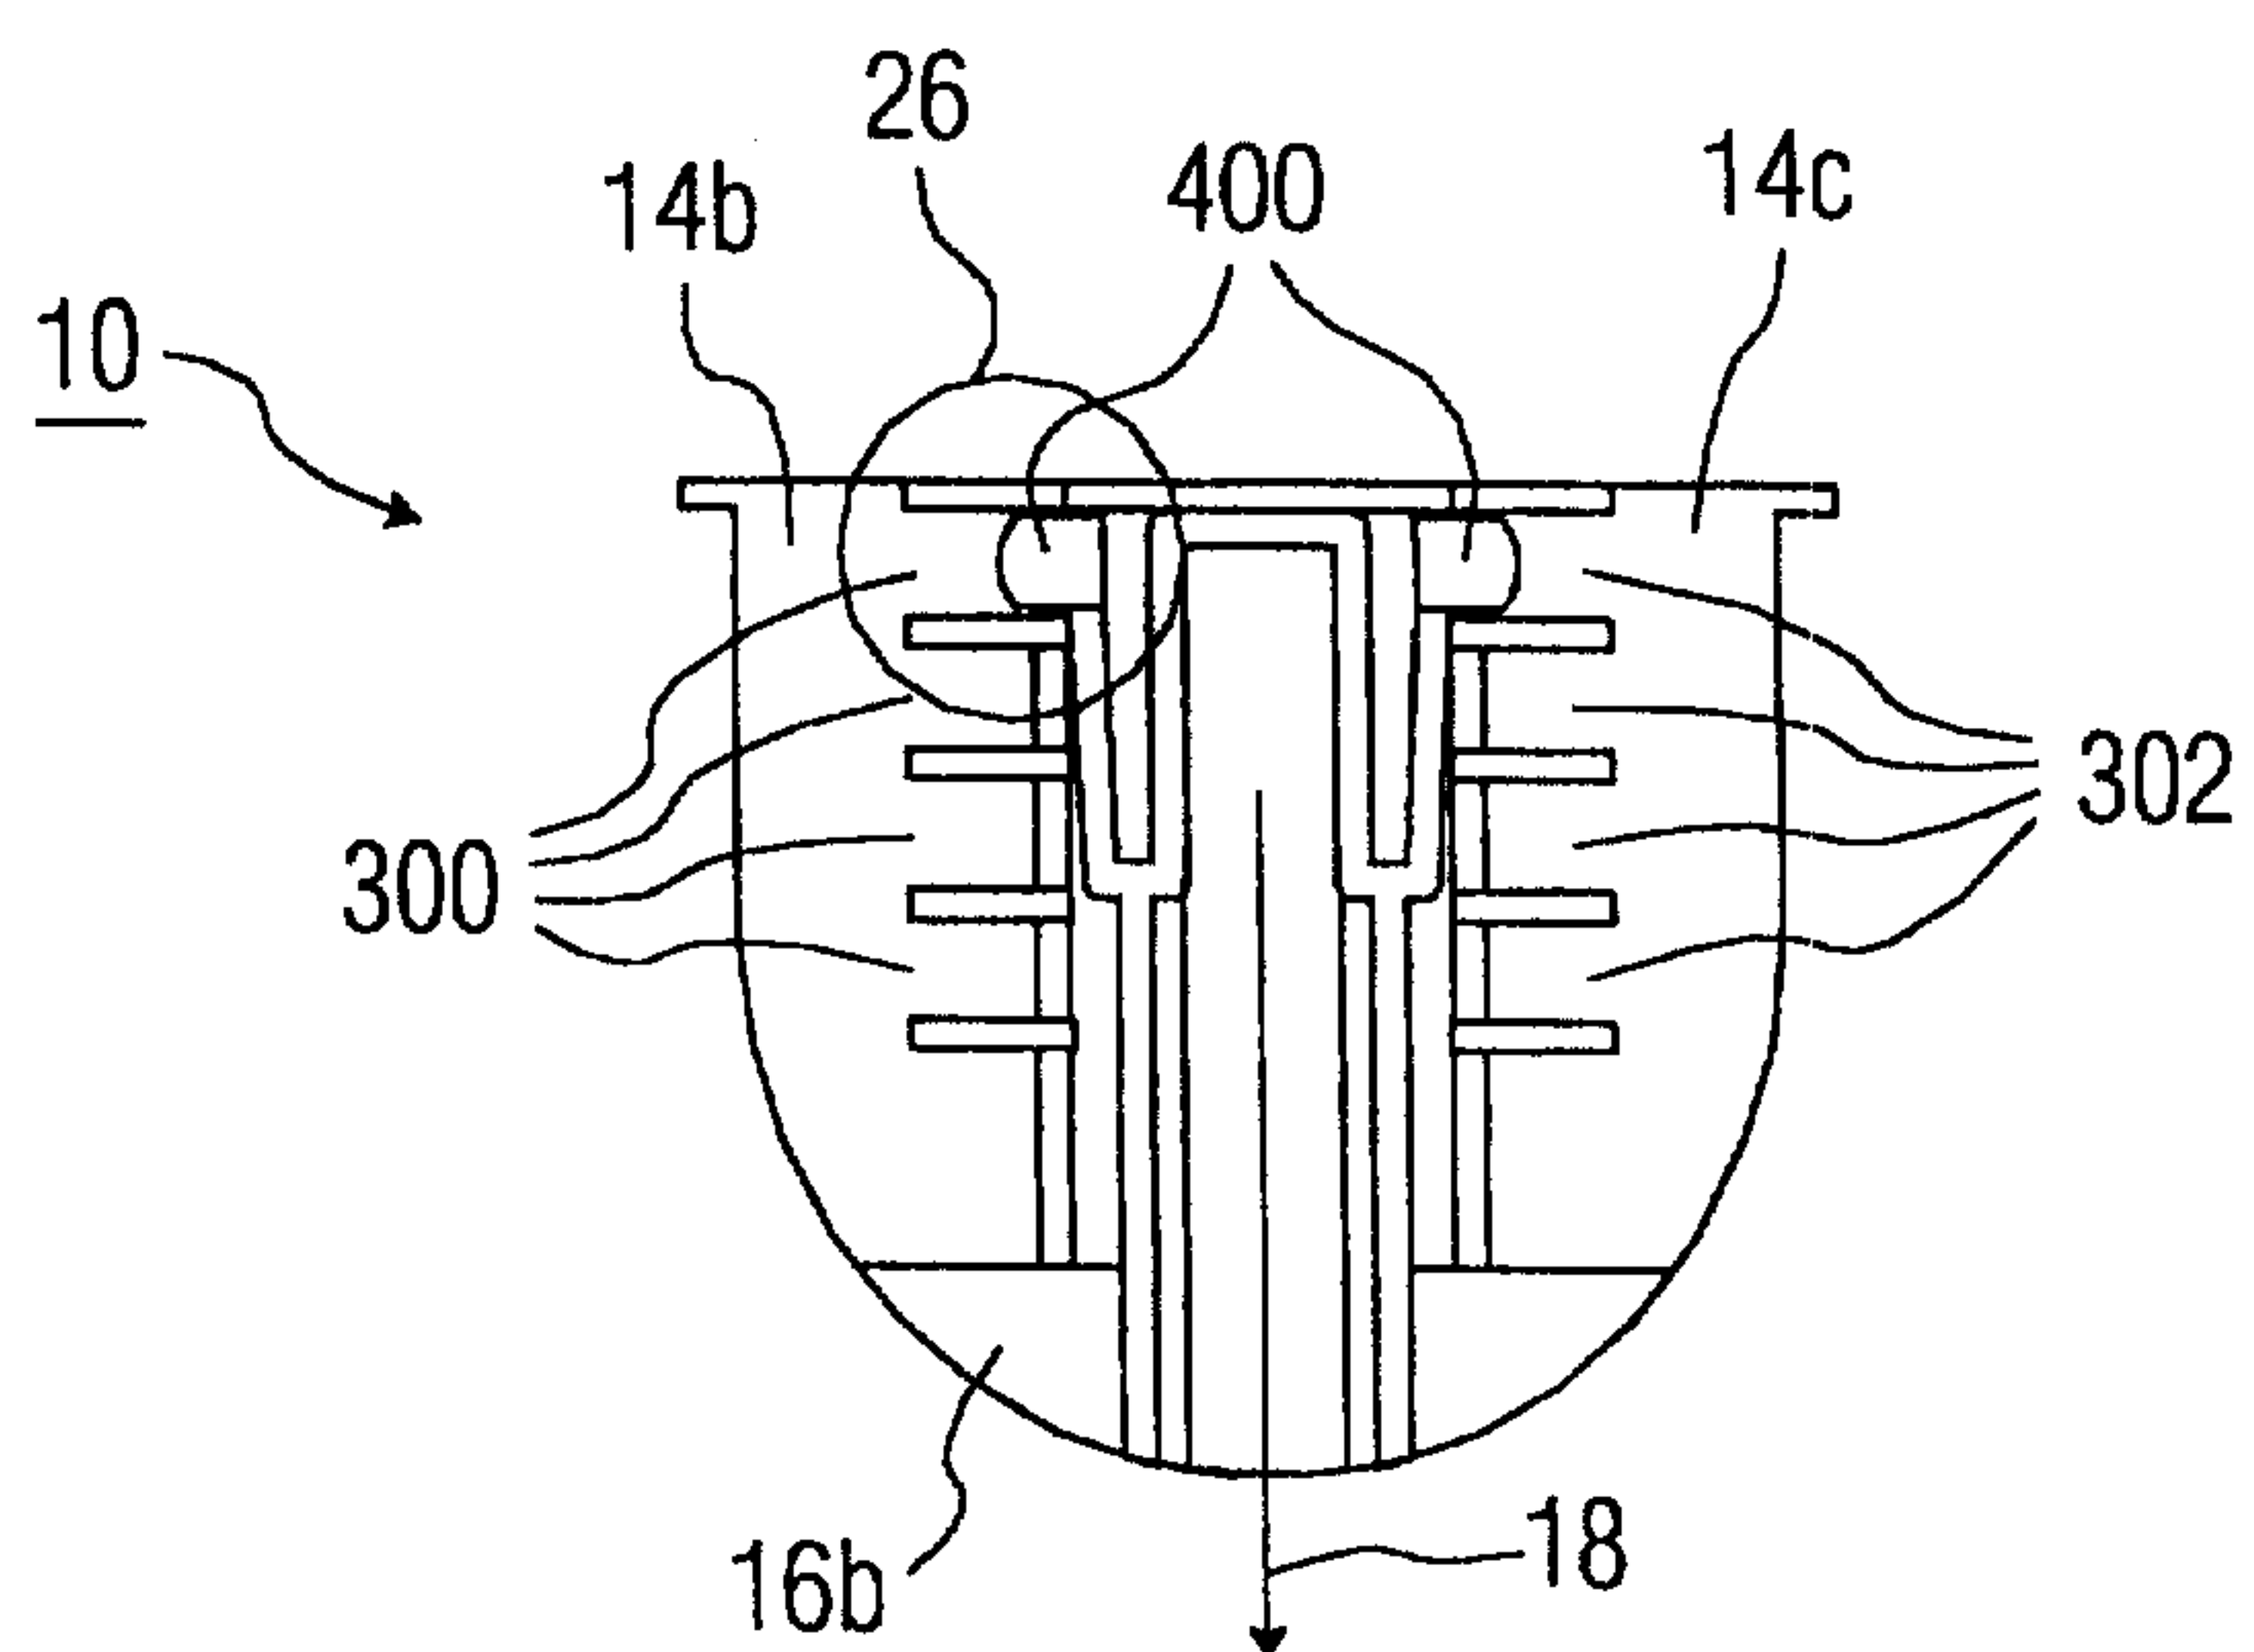


FIG. 5

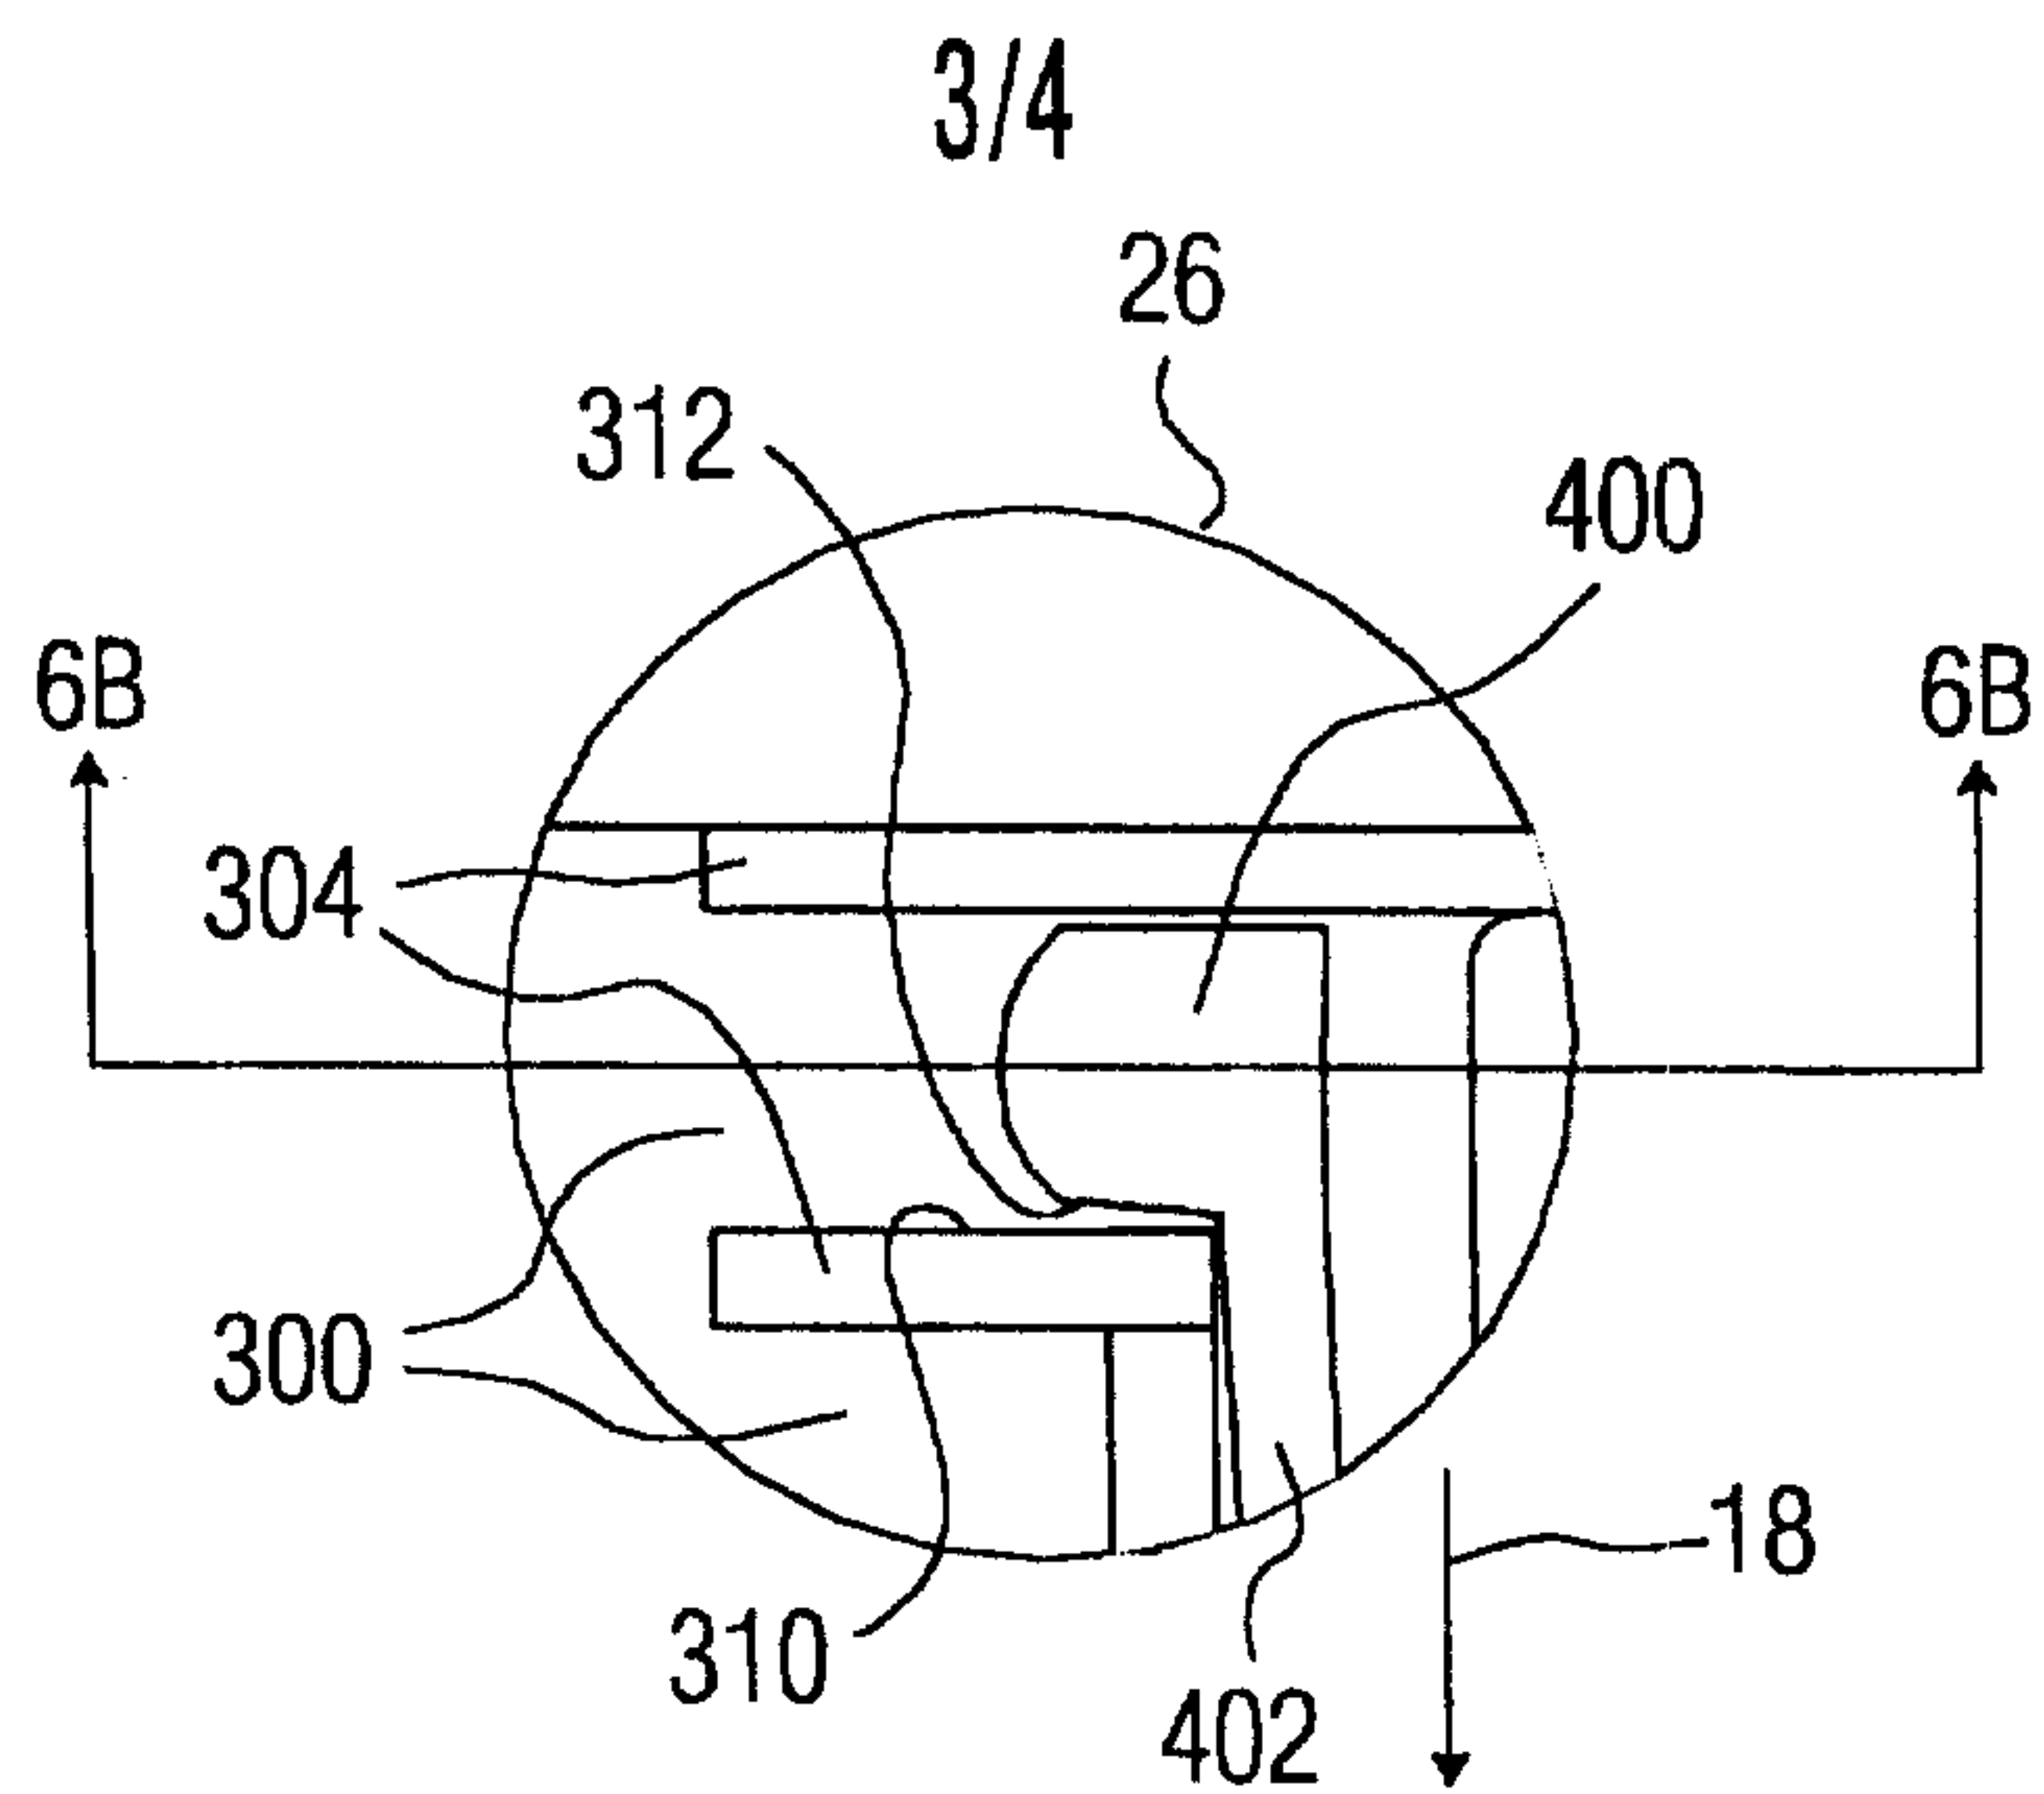


FIG. 6A

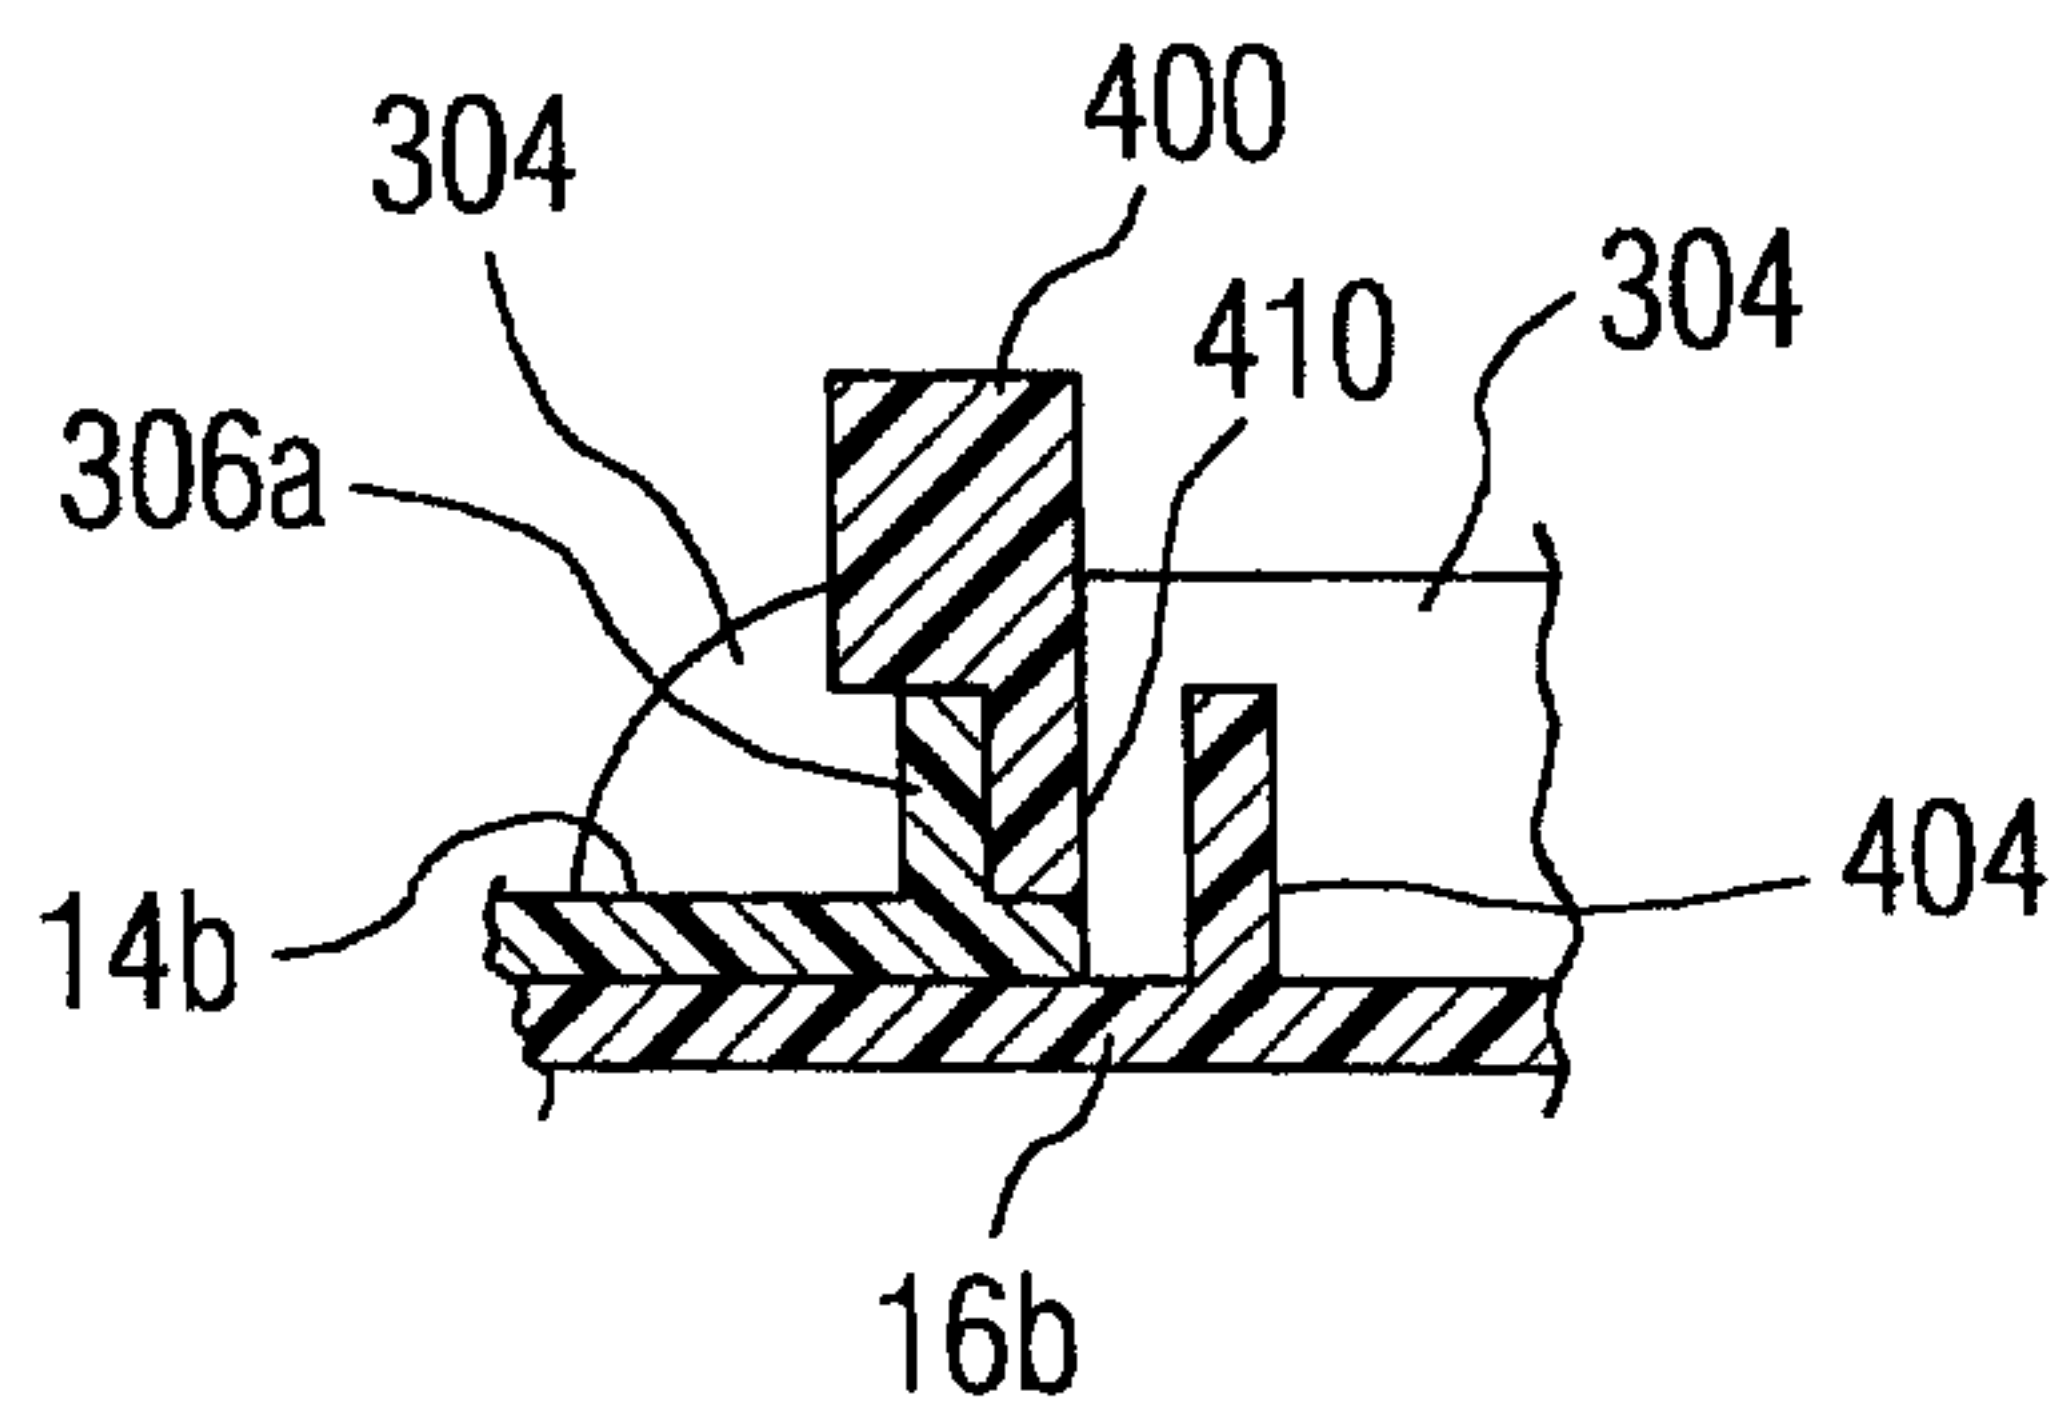


FIG. 6B

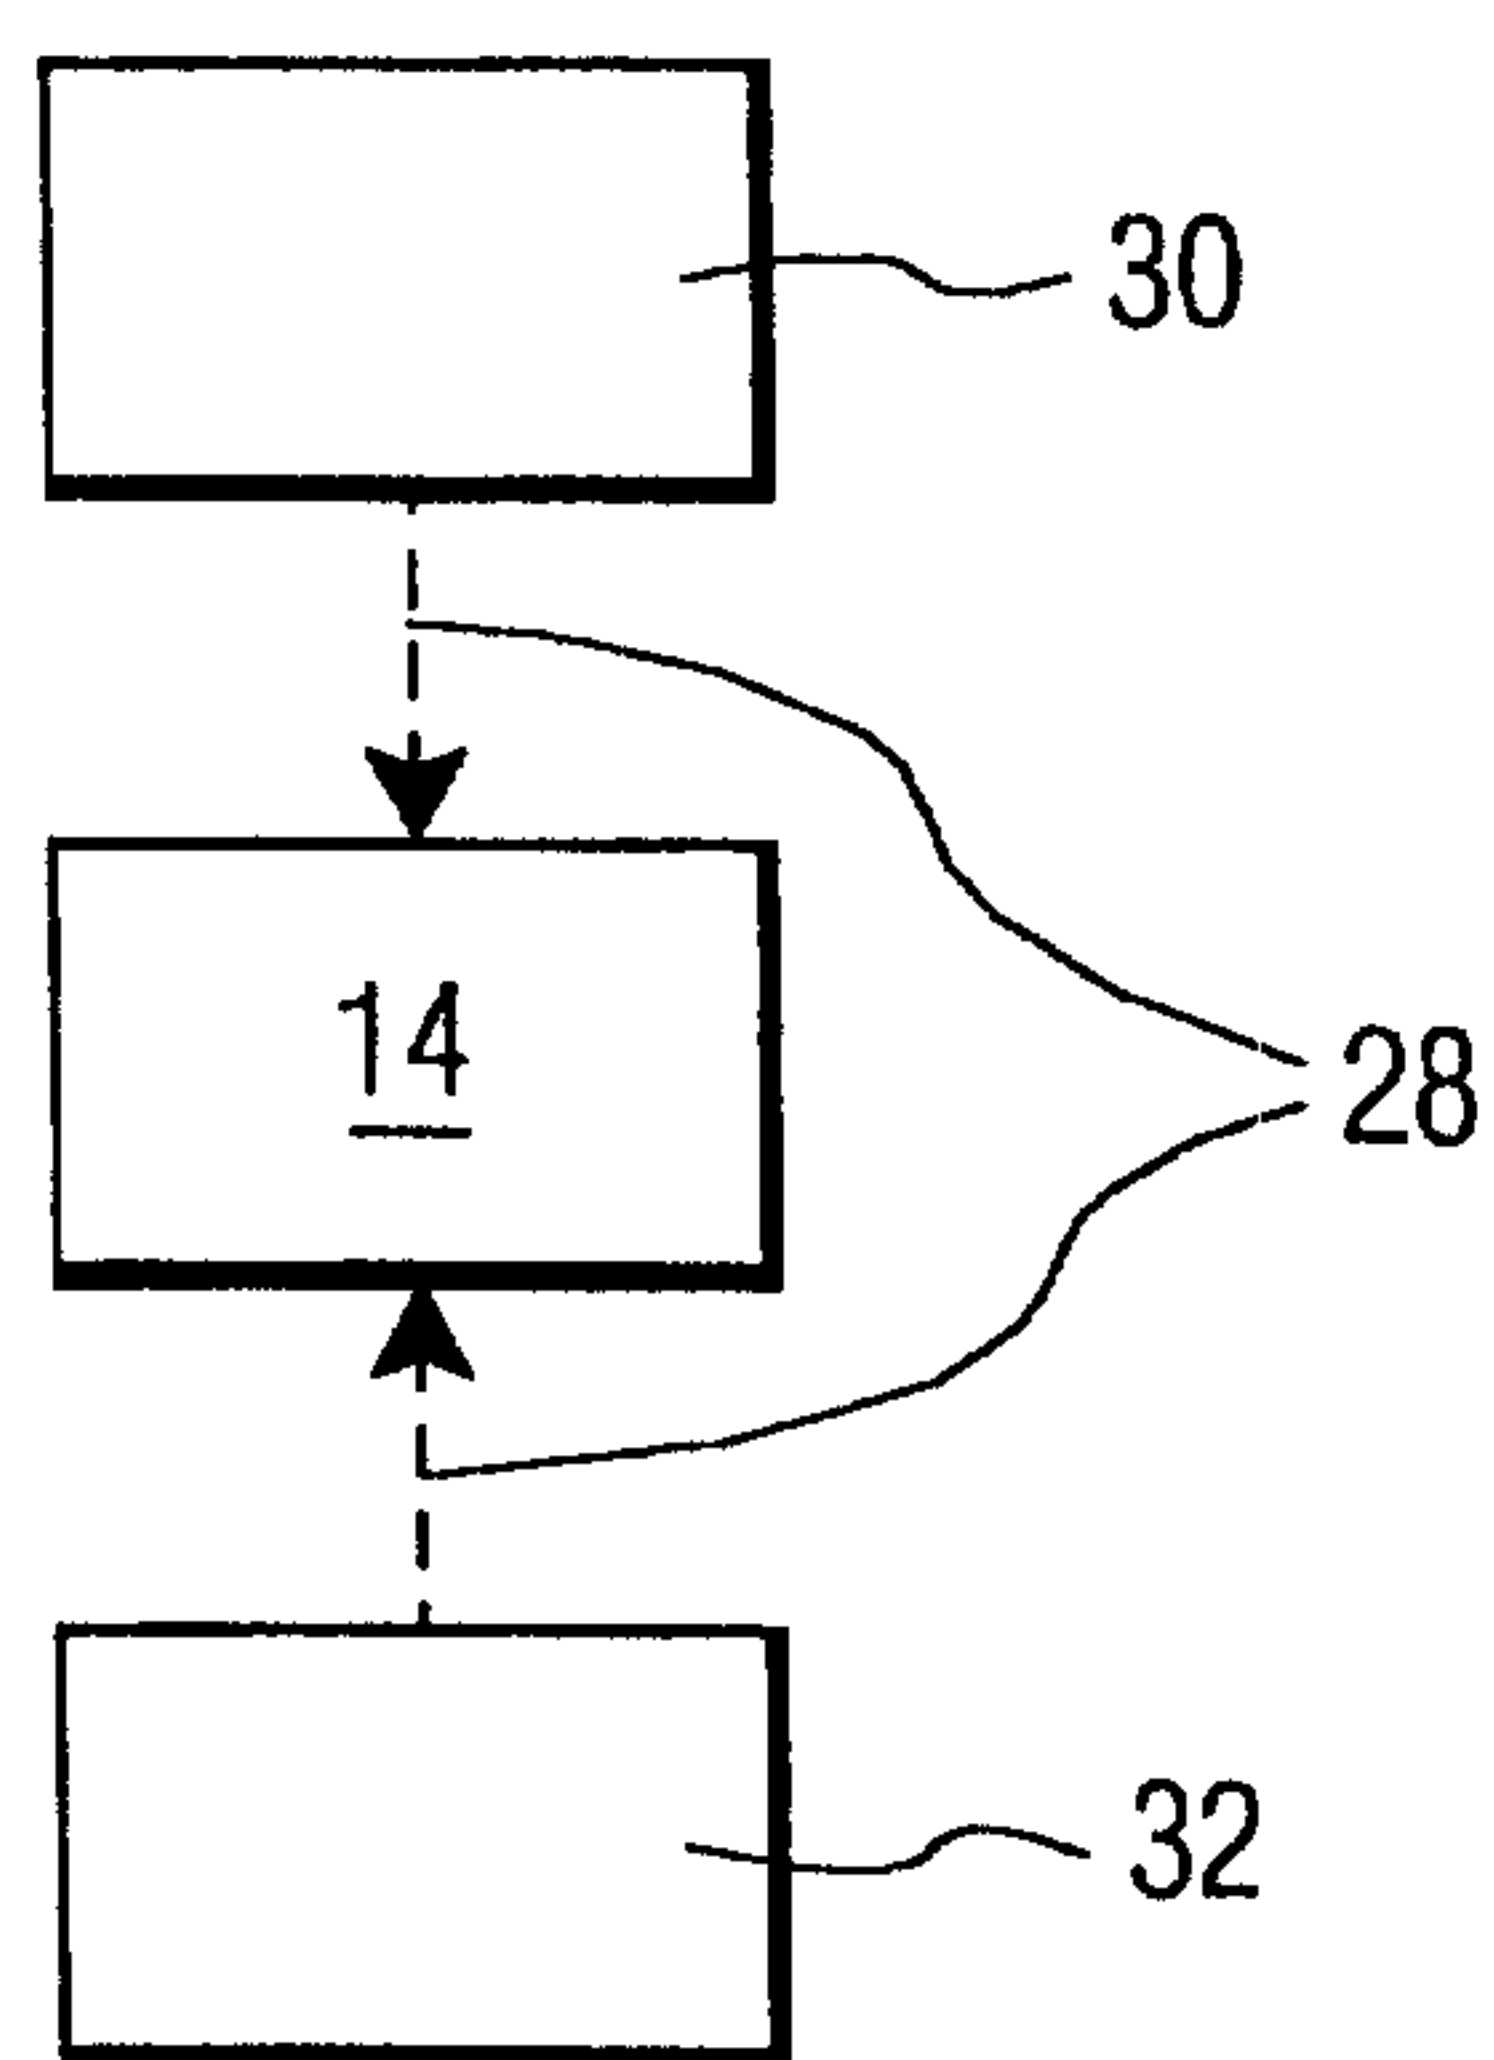


FIG. 7

4/4

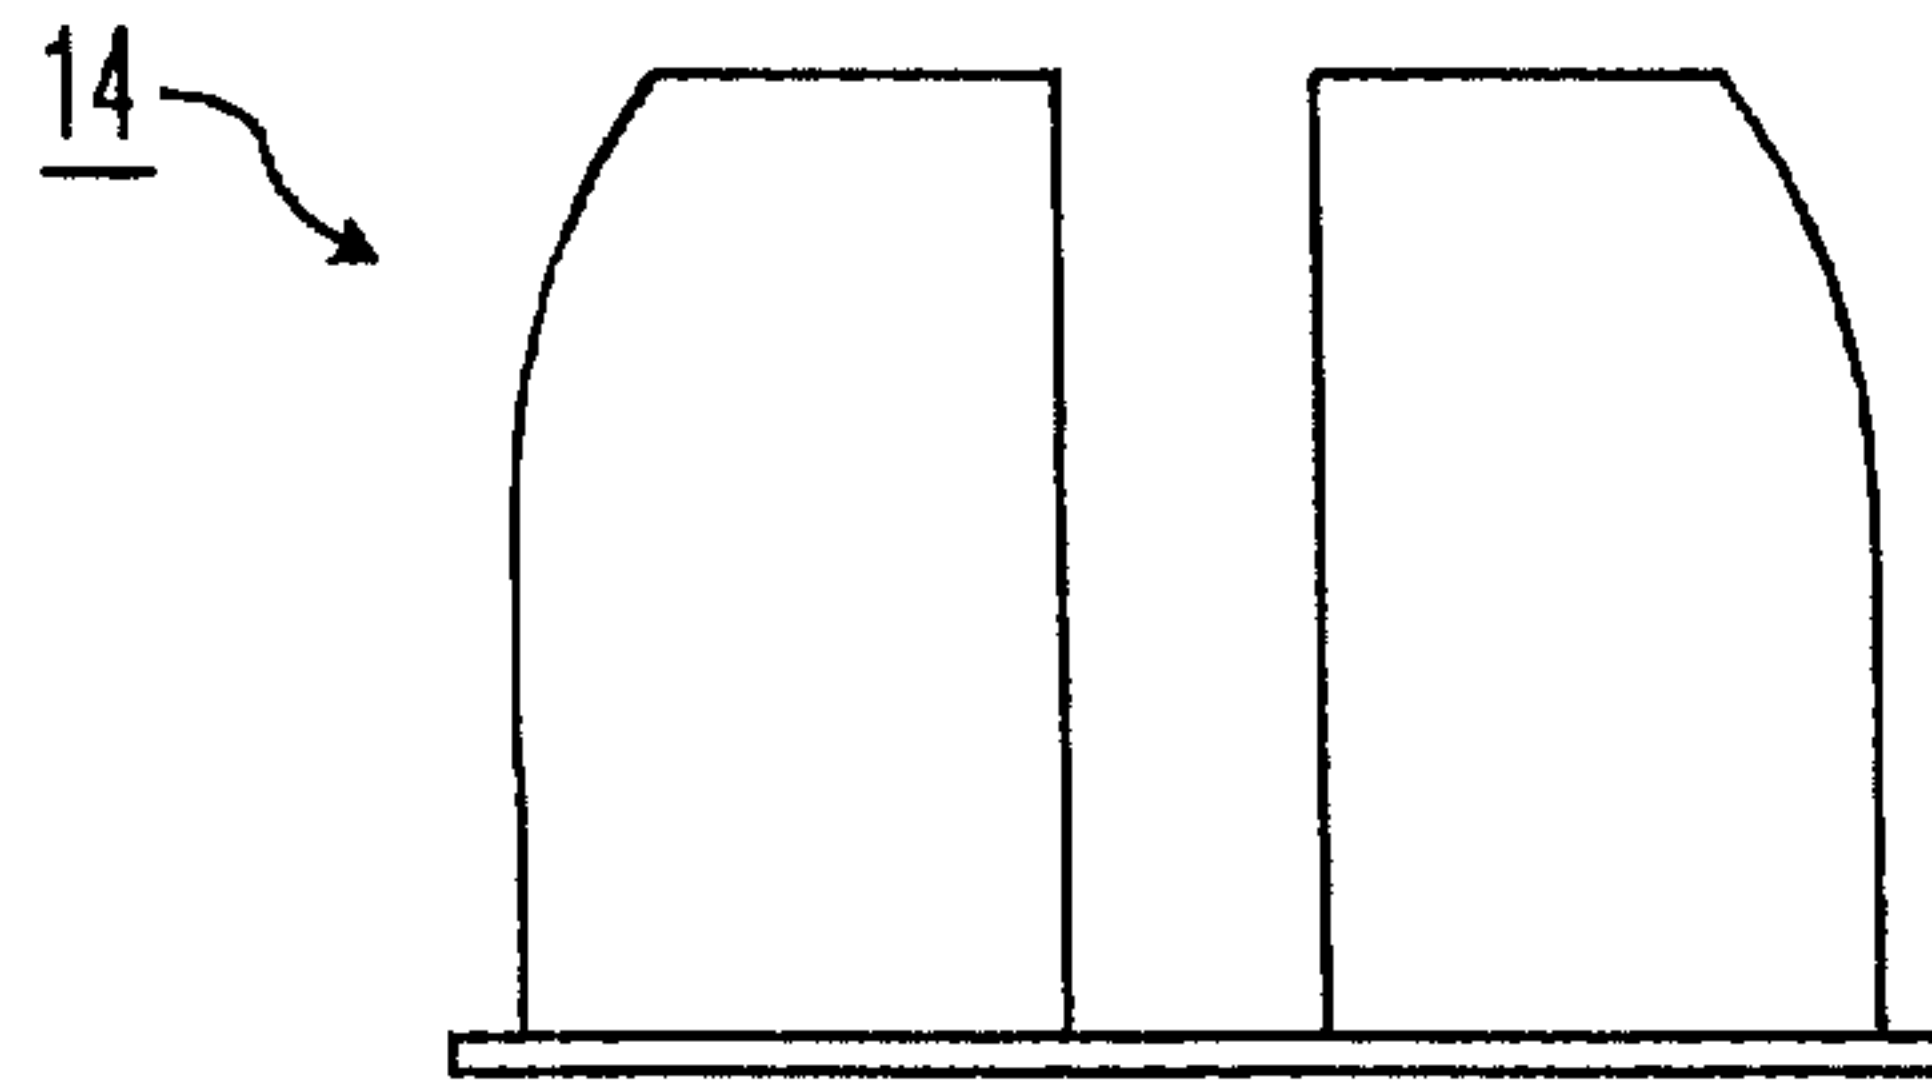


FIG. 8

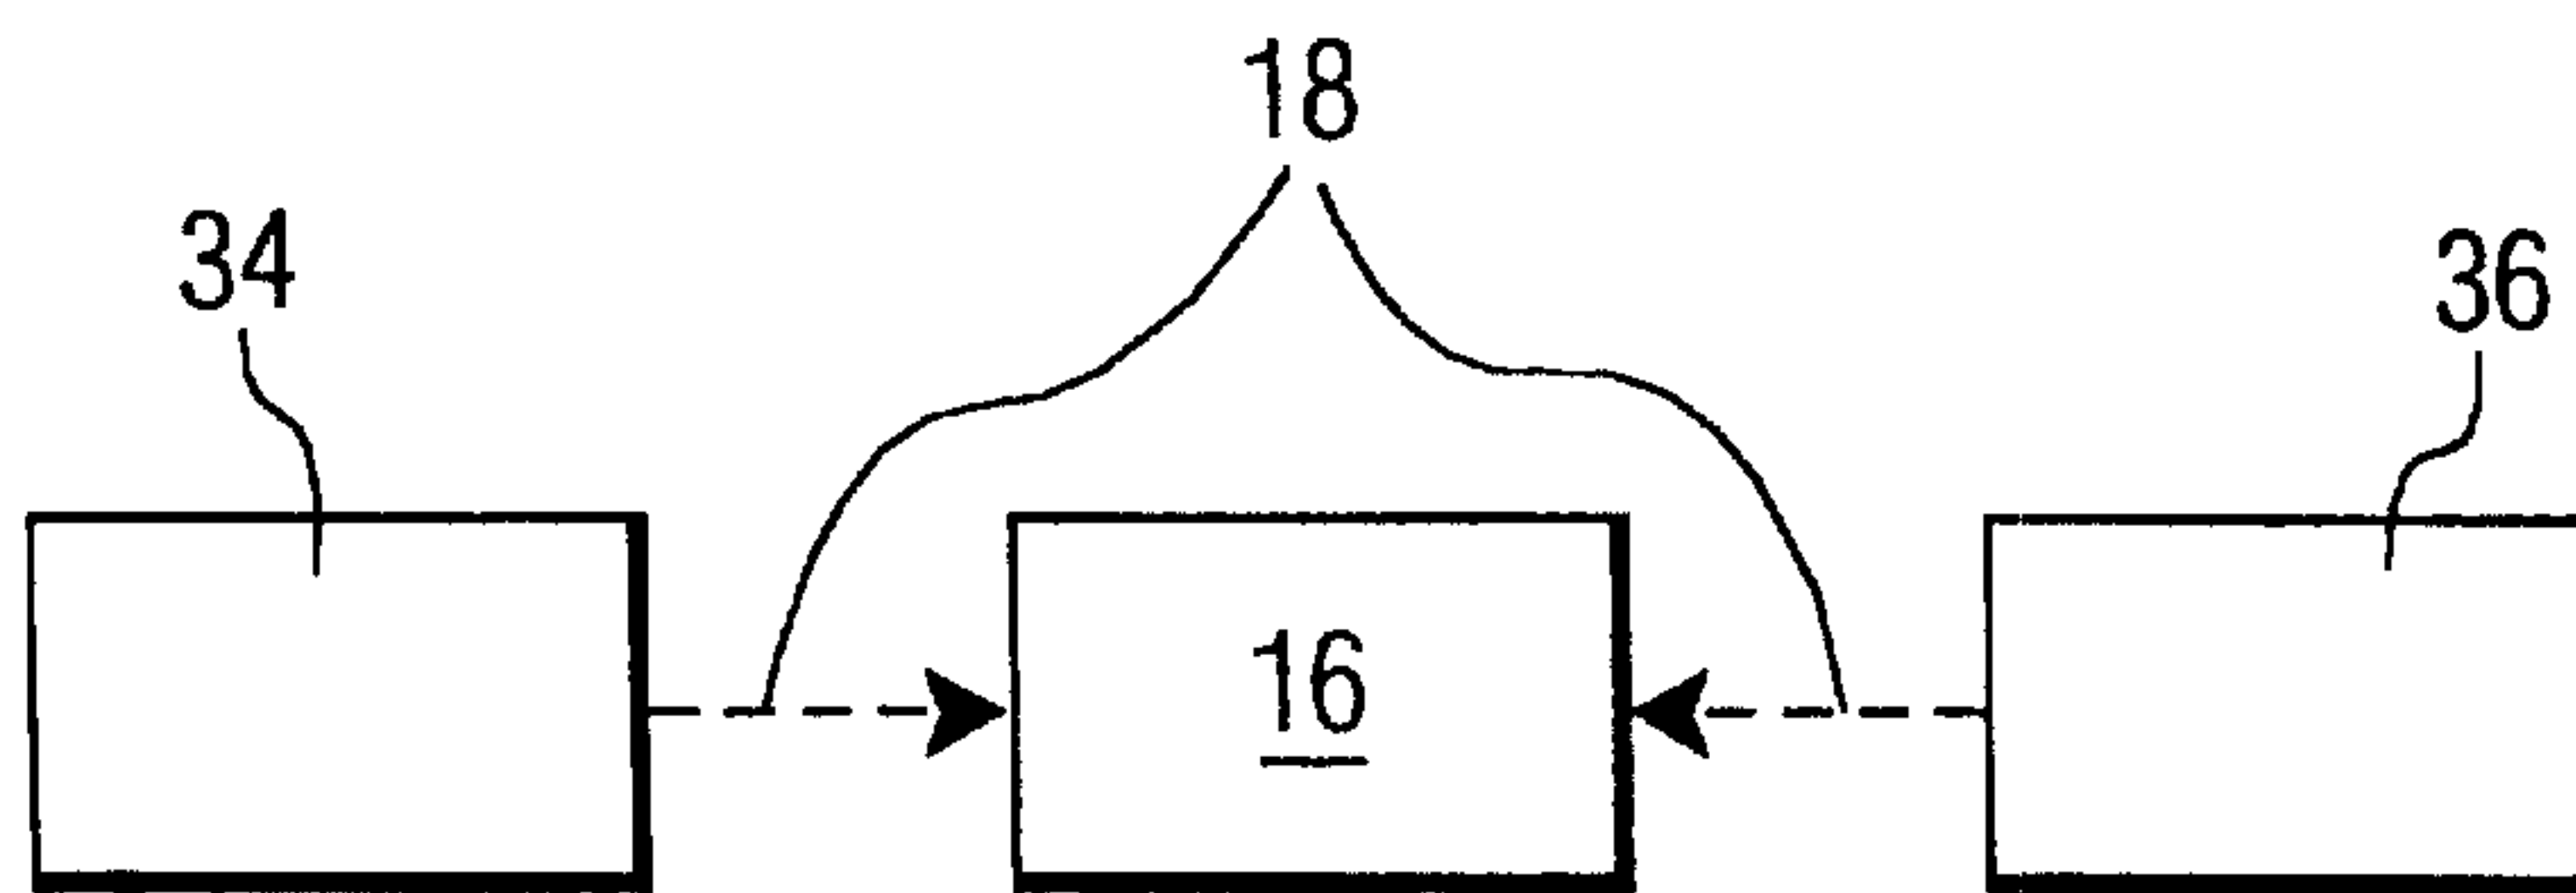


FIG. 9

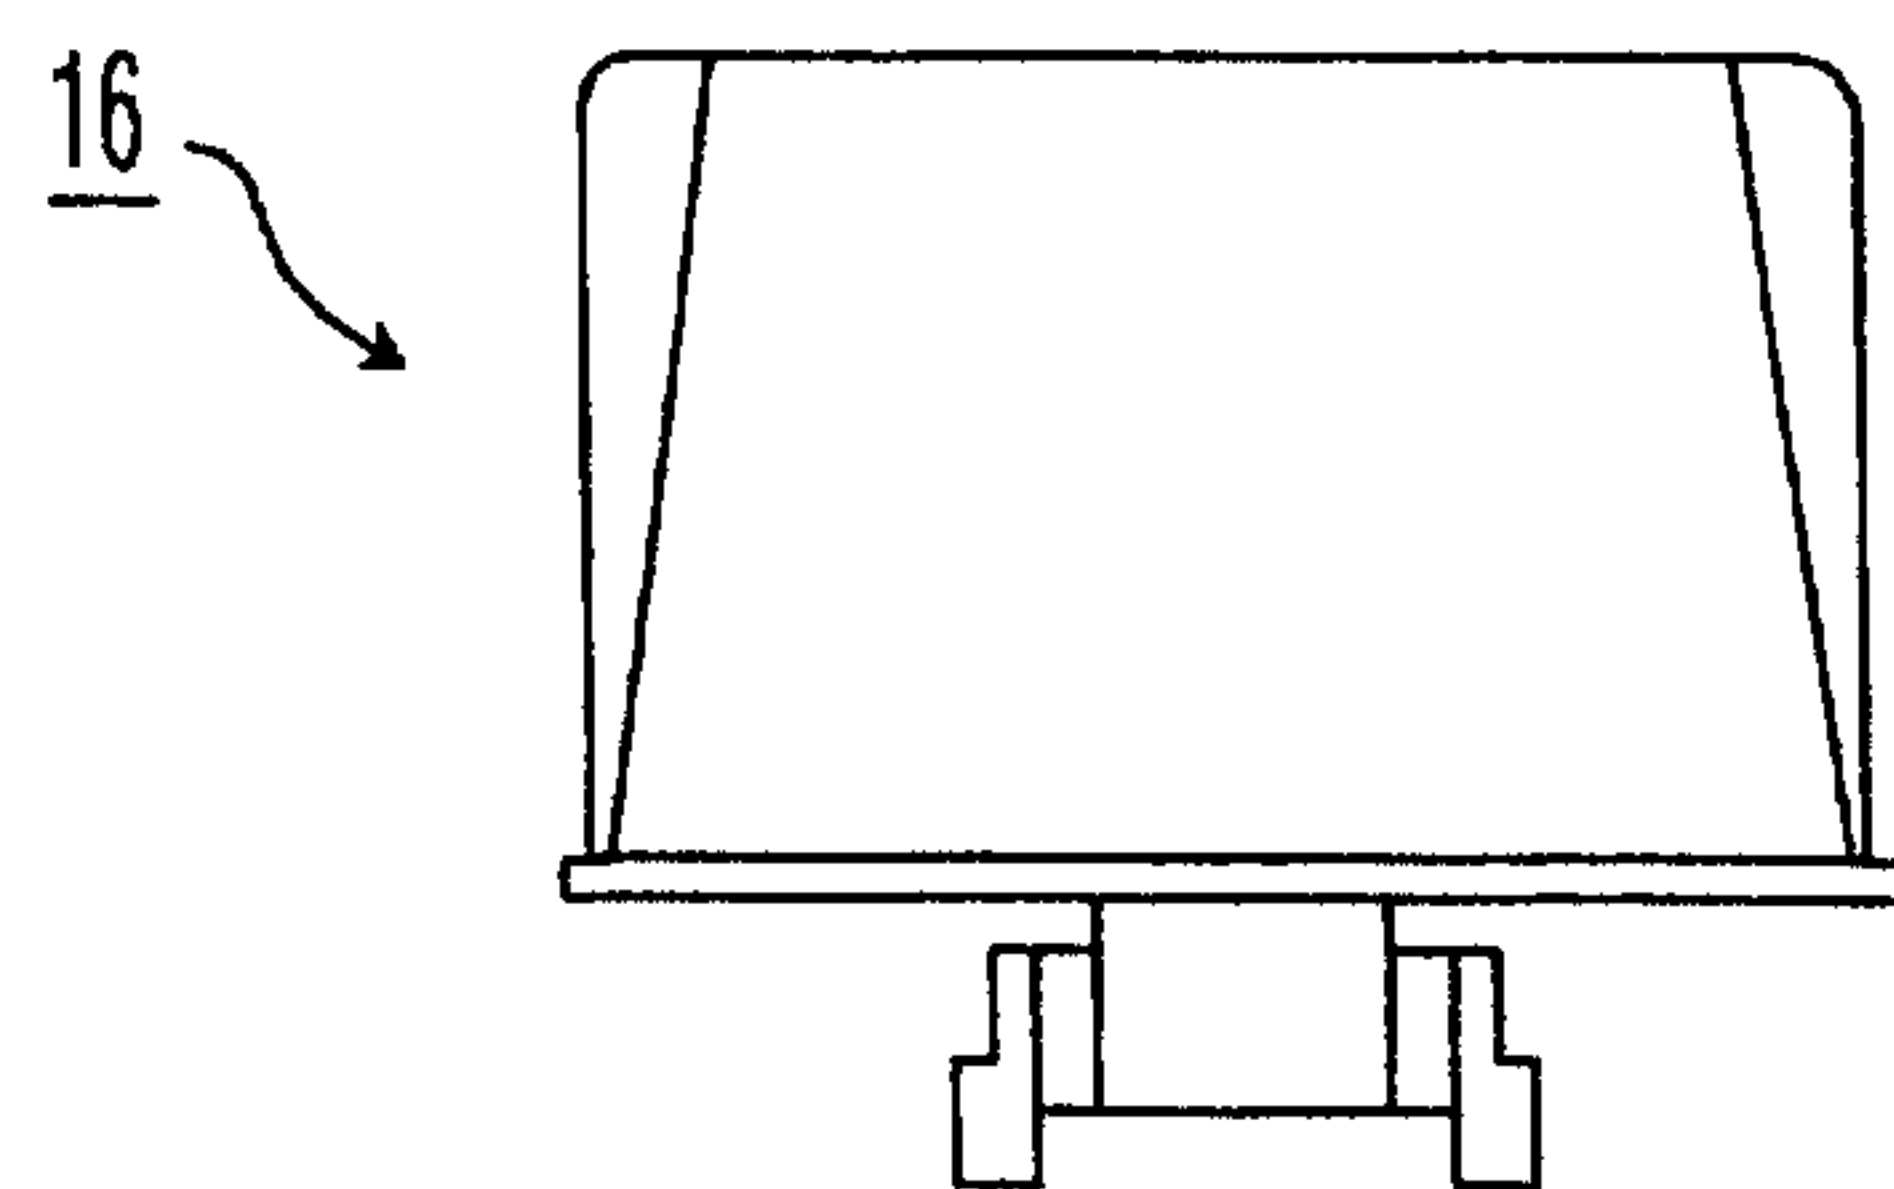


FIG. 10

