

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/099846 A1

(51) International Patent Classification⁷: **G02B 26/02**, 3/14

(21) International Application Number:

PCT/IB2004/050585

(22) International Filing Date: 5 May 2004 (05.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

03076378.3

6 May 2003 (06.05.2003) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KUIPER, Stein** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **RENDERS, Christina, A.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **HENDRIKS, Bernardus, H., W.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **HAYES, Robert, A.** [AU/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: **VISSER, Derk**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,

[Continued on next page]

(54) Title: REDUCTION OF DRIVING VOLTAGE IN A SWITCHABLE ELEMENT

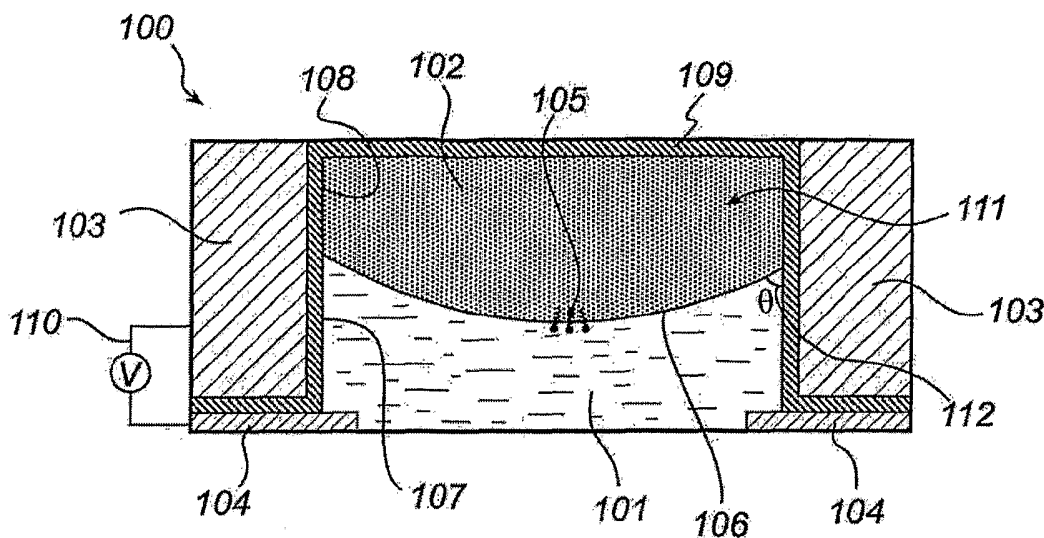

(57) Abstract: A switchable element is described, which comprises a fluid chamber (111) containing a polar (101) and a non-polar (102) liquid, which are immiscible. The element is further provided with two electrodes (103,104), which are arranged to control the spatial distribution of the liquids, by means of an applied voltage across two the two electrodes. By the addition of surfactant to one or both of the liquids, the actuation voltage of the element is lowered. The element can work for example as an optical device or a motor.



TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

Reduction of driving voltage in a switchable element

FIELD OF THE INVENTION

The present invention relates to switchable elements, and to devices including switchable elements.

5 TECHNICAL BACKGROUND

Electro-wetting is essentially the phenomenon whereby an electric field modifies the wetting behavior of a polar liquid in contact with a hydrophobic surface. By applying an electric field, a surface energy gradient is created in the polar liquid, which can be used to manipulate the liquid. In common applications, water is used as the polar liquid.

10 Recently, switchable elements have been proposed and demonstrated to operate based on the principle of electro-wetting. Such switchable elements typically consist of a closed cell that is filled with one part of water and one part of oil, although other liquids might also be used. The important characteristics are that the liquids are immiscible and that one of them is polar and or electrically conducting (e.g. water), while the other one is non-
15 polar (e.g. oil). Other liquid parameters of importance, when the device is used as an optical element, are for example refractive index, melting point, transmission and density.

Since the liquids are immiscible, a well-defined interface will always be present between them. The inner surface of the cell generally comprises two separate surfaces, one that is hydrophobic and one that is non-hydrophobic. The hydrophobic surface
20 will by nature reject the water, and by configuring the surfaces properly the spatial relationship between the liquids can be predetermined, i.e. the water is forced to a predetermined location opposite the hydrophobic surface. Consequently, also the interface between the two liquids can be predetermined.

Furthermore two electrodes are arranged in the cell, one address electrode
25 arranged behind the hydrophobic and electrically insulating coating and one counter electrode in direct contact with or capacitively coupled to the conducting liquid. By applying a potential between the electrodes, an electric field is created across the insulating coating. The electric field gives rise to an electrostatic force that overrides the force of attraction exercised by the molecules in the conducting liquid and thus modifies the spatial relation

between the liquids and consequently also the shape and position of the liquid interface. In effect, the liquid interface can be controlled by means of controlling the applied potential.

There are several known principles exploiting this mechanism and with which a cell can be controlled. According to a first principle the liquids are chosen to have different transmission properties. By changing the spatial distribution of the liquids, the transmission
5 of the component is varied. According to a second principle, the liquids are chosen to have different indices of refraction. This turns the meniscus between the liquids into a lens having refractive properties that can be controlled by means of the electrode potential. Typically, this lens can be changed between a convex, light focusing state and a concave, light defocusing
10 state. In this document an OFF-state refers to a condition, wherein an applied voltage between the electrodes is substantially zero. Further, and an ON-state refers to a condition, wherein an applied voltage causes a substantial change in spatial distribution of the liquids, compared to the OFF-state.

Electro wetting cells are further described in WO2002/099527,
15 WO2003/069380 and WO2004/027489.

These electro-wetting elements can be arranged to work as different optical and other components, for example as motor, variable focus lenses, variable diaphragms, variable filters, gratings, beam deflectors, mechanical actuators and electro-wetting based displays. When these electro-wetting elements are used in portable devices, the power
20 consumption and the actuation voltages of the device are of particular importance. If the actuation voltage is too high it might be necessary to include additional electronics to drive the device. Such additional electronics has a number of drawbacks, one being increased development and manufacturing costs of the device. Another drawback related to a high power consumption might be that batteries of the portable device need to be recharged so
25 frequently, that use of the portable device is substantially restricted.

SUMMARY OF THE INVENTION

It is an object of the present invention to eliminate, or at least alleviate, the above described problems related to power consumption and actuation voltage in electro-
30 wetting devices.

This object is achieved by a method and a device in accordance with the appended claims 1 and 10, respectively. Preferred embodiments are defined in the dependent claims.

The invention is based on a realization of the inventors, that by affecting the surface tension of the liquids in an optical element, one can lower the voltage needed to control the optical cell without substantially altering its optical performance.

Equation (1) shows how the voltage can be influenced by changing the surface tensions between a first non-polar liquid NPL and a second polar liquid PL, which are comprised in an electro wetting cell.

$$\gamma_{NPL/PL} \cos(\theta) = \gamma_{NPL/wall} - \gamma_{PL/wall} + \frac{\epsilon_0 \epsilon_r}{2d} V^2$$

γ are the various interfacial tensions, θ is the contact angle between the meniscus and the wall of the fluid chamber, measured through the conducting liquid. Apart from the correct interfacial tension the liquids must fulfill also a series of other requirements, like having appropriate refractive indices, melting points, transmissions, densities, viscosities etc. Therefore, depending on the choice of the liquids, only a limited choice of discrete values for the three interfacial tensions is possible.

Thus, according to a first aspect thereof, the present invention provides a switchable element. The element comprises a fluid chamber, which comprises a first and a second body of fluid. The first fluid is a non-conducting liquid, and the second fluid is a polar and/or electrically conducting liquid. Said element further comprises a first and a second electrode, which are arranged to control the spatial distribution of said liquids. Finally, at least one of said first and second fluids comprises a surfactant.

According to a second aspect thereof, the invention provides a device, which comprises said switchable element.

One of the advantages of changing the surface tension by dissolving surfactants in the liquids, is that one can affect the surface tension, and by this the actuation voltage, without substantially changing other characteristic parameters of the liquids. This is due to the fact that the surfactants predominantly influence interfaces. Therefore they are only needed in small amounts, and thereby they hardly influence the bulk properties of the liquids. The man skilled in the art could by way of experiments, and by the aid of the further explanations below, determine the amount of surfactants that is needed in a specific case.

A switchable device, wherein the surface tension between said first and second liquids has been affected in the way that is defined in claim 2, advantageously influences the only surface tension that affects the sensitivity of the contact angle with respect to the applied voltage. A desired change in contact angle between the meniscus and

the wall of the fluid chamber, can be achieved by adjusting the voltage applied to the electrodes. As can be seen in equation 1, the only surface tension affecting the amount of voltage needed to achieve a certain change in contact angle, is the surface tension between the two liquids. In other words, a lower $\gamma_{NPL/PL}$ lowers the voltage needed to effect a certain change in contact angle.

A switchable device, wherein the surface tension between the cell wall and said first or second liquids, as defined in claim 3 or 4, has the advantage of enabling an adjustment of the contact angle in the OFF-state, which does not influence the sensitivity of the contact angle with respect to the applied voltage.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 schematically shows a side view of an embodiment of the present invention, wherein the surfactant affects the interfacial tension between a polar and a non-polar liquid.

Fig. 2 schematically shows a side view of an embodiment of the present invention, wherein the surfactant affects the interfacial tensions between a non-polar liquid and a wall of the cell.

Fig. 3 schematically shows a side view of an embodiment of the present invention, wherein the surfactant affects the interfacial tensions between a polar liquid and a wall of the cell.

Figs 4a and 4b shows, in a cross-sectional view, an activated electrowetting motor at two different moments in time.

DETAILED DESCRIPTION OF THE INVENTION

In this description, identical or corresponding parts have identical or corresponding reference numerals. The invention will now be described in further detail, with reference to Fig. 1. Although figure 1 illustrates a switchable element, which is used as an variable focus lens, it is understood that the invention applies equally well to other kinds of electro-wetting elements, such as motors, variable diaphragms, filters, gratings, beam deflectors, motors and electro-wetting based displays.

Figure 1 schematically shows a side view of a switchable optical element 100. The switchable optical element 100 comprises a closed cell or fluid chamber 111, which

contains a first 101 and a second 102 body of fluid. Said fluids 101, 102 are substantially immiscible. Said first fluid 101 preferably is water, which is a polar and electrically conducting fluid, or liquid, and said second fluid 102 preferably is oil, which is a non-polar liquid. When a polar and a non-polar liquid are in contact with each other, a meniscus is
5 formed between them, i.e. between said first 101 and second 102 liquids. One way of measuring the shape of the meniscus is to measure an angle θ 112 between a wall of the cell 111 and the common surface between said first and second liquids 101, 102.

Further, said switchable optical element comprises a first electrode 103 and a second electrode 104, wherein said second electrode 104 is in contact with said first liquid
10 101. Between the first electrode 103 and the liquids 101, 102, there is an hydrophobic insulator 109, such that said first 103 electrode is not in contact with said liquids 101 and 102. Moreover, said switchable optical element is arranged such that the electrical voltage 110 between said two electrodes 103, 104 can be varied. As can be seen from Equation 1, the angle θ 112 is dependent, among other parameters, on the interfacial surface tension $\gamma_{\text{NPL/wall}}$
15 108 between the oil 102 and a wall of the cell 111, as well as on the interfacial surface tension $\gamma_{\text{PL/wall}}$ 107 between the water 101 and a wall of the cell 111. By increasing the difference in interfacial surface tension between these two parameters 107, 108, the angle 112 is increased, without affecting the sensitivity of the contact angle with respect to the applied voltage, and by decreasing it the angle 112 is decreased, still without affecting said
20 sensitivity.

Another, more dynamic, way of changing the angle 112, is to change the applied voltage 110. The amount with which the angle is changed, in response to a certain change in applied voltage, can be derived from Equation 1. The equation gives that by lowering the interfacial surface tension 106 between the water and the oil, the voltage level
25 required to change the angle 112 by a certain amount is decreased.

A preferred way of lowering the interfacial surface tensions 106, 107, 108 is to add surfactant 105 to said first liquid 101 or said second liquid 102. An example of a surfactant 105 that is able to influence the interfacial surface tension between oil and water, is an alcohol, for example decanol. If the wall consists of fluorocarbon (e.g. Teflon™ AF1600
30 produced by DuPont™) in combination with a hydrocarbon oil, the surface tension between the oil and the wall 108 can be influenced, for example, by molecules with a hydrocarbon part and a fluorocarbon part. With the same wall the surface tension between the water and the wall can be influenced by molecules with a polar head and a fluorocarbon tail, for example a fluorinated alcohol. Surfactants can decrease surface tensions significantly already

in very low concentrations, and thus driving voltages can decrease significantly by the use of surfactants, while not affecting bulk properties of the liquids. Examples of surfactants for the wall/water interface are 2,2,3,4,4,4-hexafluoro-1-butanol and 2,2,3,3,4,4,4-heptafluoro-1-butanol. Surfactants that can be used for the wall/oil interface are pentafluorophenyl-
5 trimethylsilane, trifluoromethyltrimethylsilane and
trifluoromethyltriethylsilane.

Figures 2 and 3 illustrate the fact that there are surfactants that influence also the interfacial surface tension between said liquids and the wall surrounding the liquids, as stated above. It is understood that many surfactants influence not only one of these interfacial
10 surface tensions, but two if not all three of them, to various extent.

As to the amount of surfactant that should be added to the liquid the concentration is dependent of a number of factors. One factor is the ratio between the area of the interfacial surface and the liquid volume, where a higher concentration is required for a larger ratio than for a smaller ratio. Thus, generally, a larger liquid body requires a smaller
15 concentration of the surfactant for obtaining the same effect as in a smaller liquid body. Further, it is desired to keep the concentration as low as possible while achieving a desired influence on the interfacial surface tension. On the other hand, increasing the concentration means increasing the influence, but only to a certain extent. When the interfacial surface is saturated with surfactant(s) the full effect is obtained. If there are still surfactant molecules
20 left within the liquid 101, 102 these will, or at least may, cause undesired negative effects on the properties of the switchable element. A state that is often desired to obtain is where the interfacial surface, and in particular the meniscus, is covered with at least one monolayer of surfactant. The strongest effects of adding a surfactant can be obtained at the interfacial surface between water and oil and between water and the wall of the cell 111.

25 The invention may also be used in an electrowetting motor wherein use is made of the fact that the shape of the interface can be changed by means of an electric force, on the basis of the wetting technique, for manipulating a volume of a fluid along a predetermined path. Figs. 4A and 4B show a cross-sectional view of an embodiment of such a motor 30, in particular a rotary motor, at different time moments. The motor comprises a
30 substantially cylindrical first body 33 and a substantially cylindrical second body 35, which is concentrically positioned within the first body 33. The first and second body 33, 35 enclose between their respective inner and outer surface a substantially cylindrical chamber 34, which is filled with a non-polar and/or non-conductive first fluid 36, such as an oil, and

volumes 37a-d of a polar and/or conductive second fluid 37, in this example an aqueous solution, for instance (salted) water. The fluids 36, 37 are immiscible.

The first body 33 is provided with means for varying the wettability of its inner surface, namely twelve electrodes 40 extending in axial direction of the first body 33, spaced at substantially regular radial intervals along the circumference. The inner surface of the first body 33 is covered with a layer 42 of electrically insulating, hydrophobic material or more generally, a material having a wettability by the second fluid 37 which is lower than the wettability by the first fluid 36. Examples of such material are for instance Teflon-like materials like the amorphous fluoropolymer AF1600 provided by Dupont or parylene or a combination thereof, in case where the first fluid 36 is an oil or air and the second fluid is (salted) water. The electrodes 40 are connected to a voltage supply (not shown).

The second body 35 is of solid design but could be hollow, if so desired, and is mounted movably, in particular rotatably, in the first body 33 by one or more suitable bearings. The or each bearing could for instance be an oil bearing, configured by providing the first and/or second body 33, 35 with an annular groove, in which upon rotation of the second body 35, pressure will build up, centering the second body 35 in the first body 33.

The second body 35 is provided at its outer surface with coupling means in the form of four hydrophilic areas 44, said number corresponding to the number of volumes 37a-d. These areas 44 could for instance be made of or covered by a material having a wettability by the second fluid 37 that is higher than the wettability by the first fluid 36, which material could for instance be glass. The areas 44 are separated from each other in radial direction by areas 45, made of or covered by hydrophobic material, which could be a selection from any of the materials mentioned before. Additionally or alternatively, the hydrophilic areas 44 may be recessed to enhance the coupling force with the volumes. Furthermore, two or more of the volumes 37a-d could be interconnected via at least one suitable conduit 39 in second body 35, as illustrated in broken lines in Figs. 4A and 4B. The areas of high and low wettability 44, 45 may be omitted, but can also be maintained, to increase the maximum force of the motor may exert.

A motor as described above operates as follows. In Fig. 4A the electrodes 40 marked with Roman numerals I (that is the upper, lower, left and right electrodes) are supplied with a voltage. Consequently, the hydrophobic layer 42 covering said electrodes I will become locally hydrophilic. The four volumes 37a-d will therefore contact the first body 33 at the four electrodes I. They furthermore contact the second body 35 at the coupling means, that is the hydrophilic areas 44 and the conduits 39. If subsequently the voltage

supply is shifted to second electrodes II, situated next to the former electrodes I, the layer above said second electrodes II will become hydrophilic, whereas the layer above the first electrodes I will switch back to hydrophobic. This gives rise to electrowetting forces which draw the volumes 37a-d towards the hydrophilic areas II as shown in fig. 4B. During this movement the volumes 37a-d will move along the hydrophilic area 44 of the second body 35 up to the edge of the hydrophobic area 45. Further movement along the second body 35 will be blocked by the combined action of the hydrophobic area 45 and the first fluid 36, enabling the volumes 37a-d to exert a wetting force on the second body 35, which will cause the body 35 to rotate. Hence by sequentially activating successive electrodes 40 I, II with a suitable voltage, the second body 35 can be rotated continuously. Preferably, the electrodes 40 are positioned relatively close to each other or even overlap through a "tooth" structure. Also, the radial dimensions of the electrodes 40 are preferably equal to or smaller than the radial dimensions of the volumes 37a-d. Such positioning and/or dimensioning of the electrodes 40 will ensure that the volumes 37a-d can "sense" a newly supplied voltage to a succeeding electrode 40 II.

In the given example the rotation is clockwise. It will be appreciated that this direction can be readily reversed by reversing the order in which the electrodes I, II are activated. Obviously, the frequency of rotation will depend on the activation frequency of successive electrodes 40 I, II. It is noted that although in the illustrated example four volumes 37a-d of conductive fluid are used, any number of volumes can be used. The volumes 37a-d may be line-shaped in axial direction or consist of a series of axially spaced droplets. It is further noted that with the embodiment of Figs. 4A and 4B, it is also possible to have the first body 33 rotate instead of the second body 35, provided that the first body 33 is rotatable mounted and the second body 35 is fixed. In that case, upon switching the voltage from the first I to the second electrodes II, the volumes 37a-d would move towards the second electrodes II (featuring the higher wettability) up till the edge of the hydrophilic area 44. Subsequently, the second electrodes II due to wetting forces would be drawn to the volumes 37a-d, causing the first body 33 to rotate anti-clockwise. From this discussion it is also immediately clear that for the operation of the motor 30 it is irrelevant whether the electrodes 40 are positioned on the static body or the movable body. Therefore, although in practice the electrodes 40 will usually be placed on the static body to avoid wiring problems, the presented embodiment should in no way be seen as limiting.

Consequently, as described above, the present invention presents a way to lower the driving voltage in a switchable devices. It is to be noted, that for the purposes of

this application, and in particular with regard to the appended claims, the word “comprising” does not exclude other elements or steps, that the word “a” or “an”, does not exclude a plurality, and that at least some of the means can be implemented in either hardware or software, which per se will be apparent to a person skilled in the art.

CLAIMS:

1. A switchable element comprising:
a chamber (111), comprising a first body of fluid (101) and a second body of fluid (102), said first body of fluid being at least one of a polar liquid and a conducting liquid and said second body of fluid being a non-conducting liquid;
5 a first electrode (103) and a second electrode (104), which are arranged to control spatial distribution of said first and second liquids; and
wherein at least one of said first and second bodies of fluid comprises a surfactant (105).
2. A switchable element according to claim 1, wherein said surfactant (105)
10 affects the interfacial tension (106) between said first and said second bodies of fluid (101, 102).
3. A switchable element according to any one of the preceding claims, wherein said surfactant (205) affects the interfacial tension (107) between said first body of fluid
15 (106) and at least one wall (109) of said closed cell (111).
4. A switchable element according to any one of the preceding claims, wherein said surfactant (305) affects the surface tension (108) between said second body of fluid (102) and at least one of the walls (109) of said closed cell (111).
20
5. A switchable element according to any one of the preceding claims, wherein said surfactant (105; 205; 305) is an alcohol.
6. A switchable element according to any one of the preceding claims, wherein
25 said surfactant (105; 205; 305) is a molecule having a hydrocarbon or fluorocarbon part.
7. A switchable element according to any one of the preceding claims, wherein said surfactant (105) is at least one surfactant chosen from a group of surfactants comprising 2,2,3,4,4,4-hexafluoro-1-butanol and 2,2,3,3,4,4,4-heptafluoro-1-butanol.

8. A switchable element according to any one of the preceding claims, wherein said surfactant (105) is at least one surfactant chosen from a group of surfactants comprising pentafluorophenyltrimethylsilane, trifluoromethyltrimethylsilane and
- 5 trifluoromethyltriethylsilane.
9. A switchable element according to any one of the preceding claims, wherein said element is a switchable optical element.
- 10 10. A switchable element according to any one of the preceding claims, wherein said element is a motor.
11. A device comprising a switchable element (100) according to any one of the preceding claims.

1/2

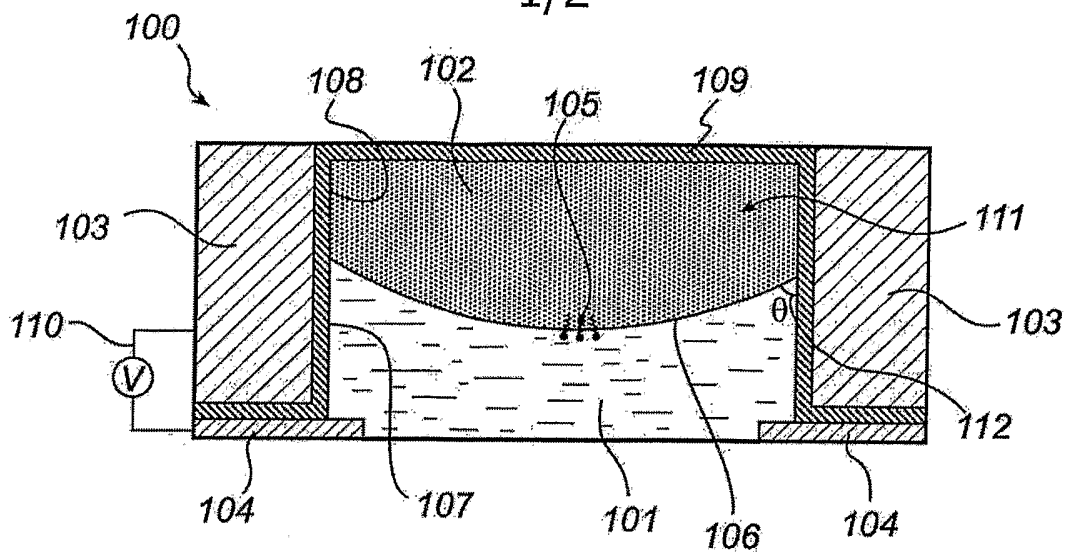


Fig. 1

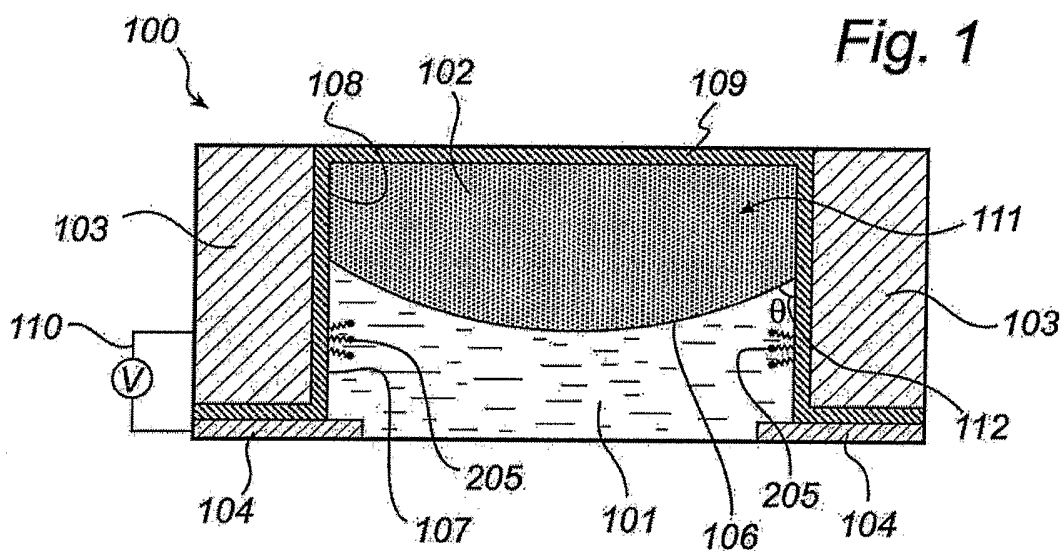


Fig. 2

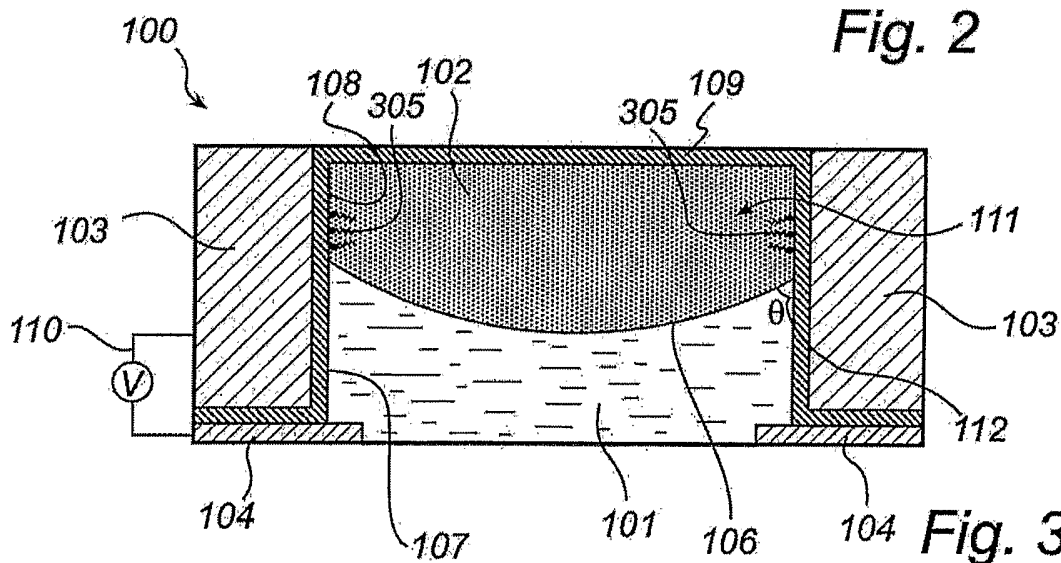


Fig. 3

2/2

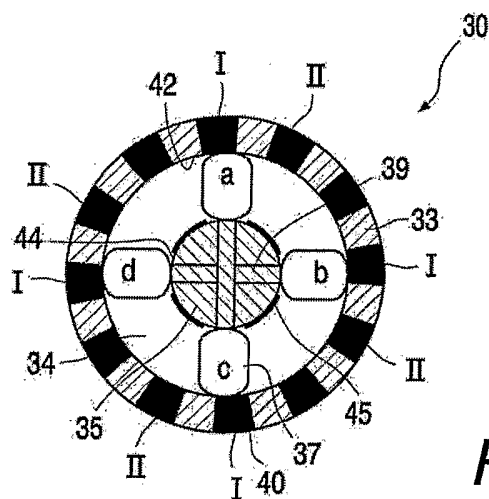


Fig. 4a

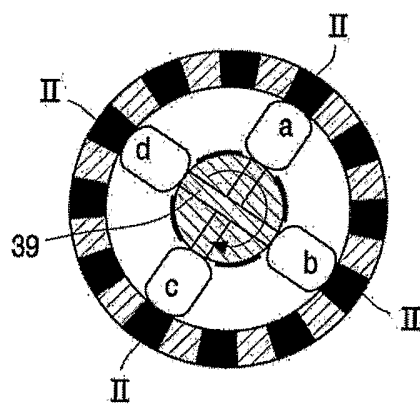


Fig. 4b

INTERNATIONAL SEARCH REPORT

International Application No

IB2004/050585

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 G02B26/02 G02B3/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 069 450 A (CANON KK) 17 January 2001 (2001-01-17) paragraph '0012! - paragraph '0026!; figure 1 paragraph '0212! - paragraph '0214!; figures 19A, 19B	1-11
X	US 2003/012483 A1 (TICKNOR ANTHONY J ET AL) 16 January 2003 (2003-01-16) paragraph '0080! - paragraph '0083!; table 1 paragraph '0094!; figure 2 paragraph '0101!; figure 3 paragraph '0106! - paragraph '0114!; figure 4 paragraph '0175!; figure 27 ----- -/--	1-11

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

17 September 2004

Date of mailing of the international search report

27/09/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

THEOPISTOU, P

INTERNATIONAL SEARCH REPORT

International Application No

IB2004/050585

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BERGE B ET AL: "Variable focal lens controlled by an external voltage: an application of electrowetting" EUROPEAN PHYSICAL JOURNAL E. SOFT MATTER, EDP SCIENCES, IT, vol. 3, no. 2, October 2000 (2000-10), pages 159-163, XP002285977 ISSN: 1292-8941 page 159, right-hand column, paragraph 2 - page 160, right-hand column, paragraph 2; figure 1 -----	1,5
A	US 5 942 157 A (BUNNING TIMOTHY J ET AL) 24 August 1999 (1999-08-24) abstract column 9, line 5 - line 15; figure 4 -----	1-11
A	US 6 369 954 B1 (BERGE BRUNO ET AL) 9 April 2002 (2002-04-09) column 3, line 3 - line 52; figure 1 column 5, line 28 - line 64; figure 6 column 6, line 6 - line 55 -----	1-11
A	US 4 030 813 A (KOHASHI TADAO ET AL) 21 June 1977 (1977-06-21) abstract; examples -----	1,6,8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

IB2004/050585

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1069450	A	17-01-2001	JP 2000356751 A	26-12-2000
			JP 2000356792 A	26-12-2000
			EP 1069450 A2	17-01-2001
			US 6449081 B1	10-09-2002
US 2003012483	A1	16-01-2003	WO 02069016 A2	06-09-2002
			WO 02068821 A2	06-09-2002
			US 2003006140 A1	09-01-2003
US 5942157	A	24-08-1999	AU 4041597 A	20-02-1998
			EP 0958329 A1	24-11-1999
			JP 2000515996 T	28-11-2000
			US 6699407 B1	02-03-2004
			US 6677086 B1	13-01-2004
			US 6706451 B1	16-03-2004
			WO 9804650 A1	05-02-1998
			US 2003197157 A1	23-10-2003
			US 6667134 B1	23-12-2003
			US 2004091787 A1	13-05-2004
			US 2004089842 A1	13-05-2004
			US 2004137204 A1	15-07-2004
US 6369954	B1	09-04-2002	FR 2769375 A1	09-04-1999
			AT 214164 T	15-03-2002
			CA 2306249 A1	15-04-1999
			DE 69804119 D1	11-04-2002
			DE 69804119 T2	28-11-2002
			EP 1019758 A1	19-07-2000
			ES 2171041 T3	16-08-2002
			WO 9918456 A1	15-04-1999
			JP 2001519539 T	23-10-2001
US 4030813	A	21-06-1977	JP 1177894 C	30-11-1983
			JP 52029751 A	05-03-1977
			JP 58008489 B	16-02-1983
			JP 1079420 C	25-01-1982
			JP 51099045 A	01-09-1976
			JP 56019614 B	08-05-1981
			CA 1044816 A1	19-12-1978