Sept. 5, 1961 T. J. RYAN ET AL 2,998,782

FLUID DRIVE ROTOR VANE TIE RING

Filed Nov. 26, 1958

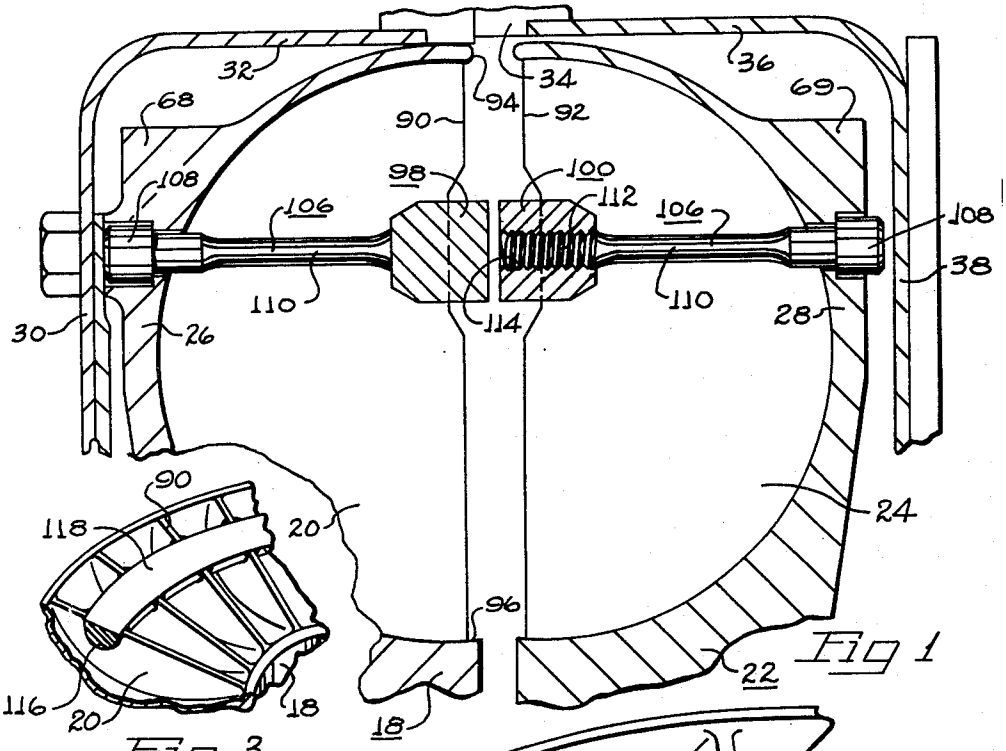


Fig 1

Fig 3

Fig 2

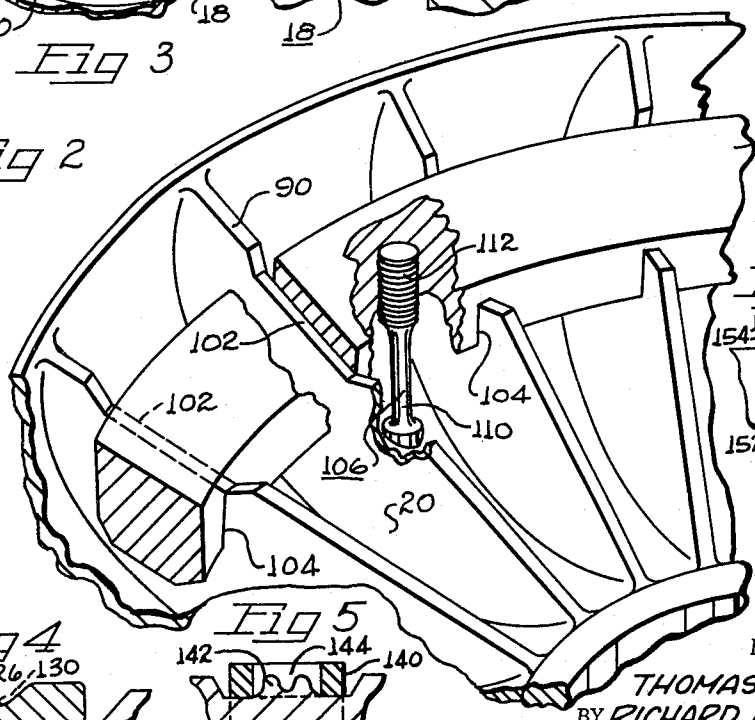


Fig 6




Fig 4





Fig 5



INVENTORS
THOMAS J. RYAN
BY RICHARD H. NELDEN
SMITH, WILSON, LEWIS & HERAE

United States Patent Office 2,998,782 Patented Sept. 5, 1961

2,998,782

FLUID DRIVE ROTOR VANE TIE RING

Thomas J. Ryan, Detroit, and Richard M. Nelden, Birmingham, Mich., assignors to American Radiator & Standard Sanitary Corporation, New York, N.Y., a corporation of Delaware

Filed Nov. 26, 1958, Ser. No. 776,517
6 Claims. (Cl. 103—115)

This invention relates to fluid couplings, and more particularly to power transmitting couplings adapted to be interposed between driving and driven elements to provide a cushioned drive, and wherein rotor vane dampening tie rings are provided to strengthen and reinforce the vanes of the rotatable impeller and turbine or runner members.

In the operation of fluid couplings energy is imparted to fluid as it moves radially outwardly in the impeller. The impeller is contoured to deflect the fluid axially as it approaches the outer periphery of the impeller thereby guiding the fluid axially to flow into the turbine or runner. The turbine is contoured to guide the fluid to flow radially inwardly from the outer periphery toward the inner periphery of the turbine, and energy is given up by the fluid and is imparted to the driven shaft. Torque is thus transferred from the impeller to the turbine as the fluid circulates in the fluid circuit, energy being imparted to the fluid by the impeller and absorbed from the fluid by the turbine.

The amount of fluid circulation in the fluid circuit is dependent on the quantity of fluid in the circuit and the load imposed on the driven shaft. Assuming that the quantity of fluid in the circuit remains constant, the circulation of fluid in the fluid circuit or the slip between the impeller and turbine members increases as the load on the driven shaft increases. The load exerted on the vanes of the impeller and runner members is dependent on and is a function of the load imposed on the driven shaft. As the individual vanes of the turbine or runner move relative to the individual vanes of the impeller there is a progressive loading and unloading of the vanes. The stresses to which the vanes are subjected increase as the slip between the impeller and turbine increases.

As the frequency of the loading and unloading cycles of the vanes increases, a vibrational frequency is developed which approaches the natural vibrational frequencies of the vane members. As the vibrational frequency thus imposed on the vanes approaches the natural vibrational frequency of the vanes, the stress imposed on the vanes approaches the vane rupturing point.

An object of our invention is to provide a rotor vane dampening tie ring adapted to be secured to the vanes to function as a de-tuner to alter the natural vibrational frequency of the vanes to such a degree that they will operate in a range different from the vibrational frequency imposed by the movement of the vanes of the impeller and turbine members relative to each other caused by slippage between the impeller and turbine members.

A further object of our invention resides in the provision of a tie ring secured to the free edges of the impeller or runner vanes to distribute the peak loads imposed on individual blades as they pass blades of the adjacent member.

Another object of our invention is to provide a reinforcing ring operably connected to the free edges of the vanes of a rotatable fluid energizing or energy-absorbing vane wheel to assist in distributing and equalizing the loads among the vanes.

Another object of our invention is to provide a fluid coupling having a rotor vane dampening tie ring to provide a rotor having greater strength.

Still a further object of our invention resides in the

provision of a rotor vane dampening tie ring to provide a rotor wheel having improved hydraulic stability by strengthening the leading edges of the vanes, thereby substantially reducing vane flutter or vibration exerted on the vanes.

Another object of our invention is to provide a fluid coupling having an annular reinforcing member secured to the vanes between the inner and outer peripheries to strengthen the vanes and to improve the performance of the coupling and to stabilize the pattern of the oil flow thereby reducing fluid turbulence.

Other objects of this invention will appear in the following description and appended claims, reference being had to the accompanying drawings forming a part of this specification wherein like reference characters designate corresponding parts in the several views.

In the drawings:

FIGURE 1 is a fragmentary sectional view illustrating the application of our invention to a fluid coupling;

FIG. 2 is a fragmentary perspective view illustrating the position of our improved dampening tie ring in a vane member;

FIG. 3 is a sectional view illustrating an alternate mechanism for attaching a tie ring of the invention to the vane members;

FIG. 4 is a sectional view illustrating another mechanism for attaching a tie ring of the invention to the vane members;

FIG. 5 is a sectional view illustrating an additional mechanism for attaching a tie ring of the invention to the vane members; and

FIG. 6 is another sectional view showing a still further mechanism for attaching the inventive tie ring to the vane members.

Before explaining the present invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and arrangement of parts illustrated in the accompanying drawings, since the invention is capable of other embodiments and of being practiced or carried out in various ways. Also, it is to be understood that the phaseology or terminology employed herein is for the purpose of description and not of limitation.

Our invention is applicable to torque transmitting hydraulic devices such, for example, as fluid couplings and torque converters. The applicable hydraulic devices may be one-way drives or reversible drives. The invention is illustrated as applied to a fluid coupling wherein aligned driving and driven shafts are provided with fluid energizing and energy absorbing impeller and turbine members **18** and **22** respectively. The impeller **18** is provided with radially extended vanes **20** adapted on rotation of the impeller to impart torque to hydraulic fluid in the fluid circuit defined by the impeller and turbine members. The turbine **22** is provided with radially extended vanes **24** adapted to receive the energized liquid from the impeller and impart it to the driven shaft.

The impeller and turbine members have radially extended confronting axially curved shell members **26** and **28** respectively from which the vanes **20** and **24** extend. A shell **30** is carried by the impeller **18** and has an axially extending cylindrical section **32** secured by a connector **34** to a reversely disposed member having an axially extending cylindrical section **36** terminating in an inwardly directed flange **38** housing the turbine **22**.

It will be noted that the impeller vanes **20** have leading edges **90**, and that the turbine vanes **24** have free edges **92**. The free edges **90** and **92** extend from outer peripheries **94** to inner peripheries **96** of each of the vaned members. Rotor vane dampening tie rings **98** and **100** may be secured to the impeller and turbine or runner members **18** and **22** respectively. The tie rings extend

completely around the impeller and turbine members and serve to distribute to adjacent vanes the peak loads imposed on a single vane.

In the design of fluid couplings many couplings are designed with a different number of vanes in the impeller and rotor members. This avoids the simultaneous passing of the free edges **90** and **92** of all of the vanes of the impeller and turbine vanes and minimizes the possibility of the development of resonant frequencies which would impose undesirable loads on the members.

As shown more clearly in FIG. 2 the free edges **90** of the impeller vanes are relieved as illustrated at **102** to provide an axially extended depressed section. The tie ring **98** is preferably formed with radially extended slots **104** to receive the forward edges of the vanes **20** of the impeller. The slots **104** in the tie ring **98** are preferably accurately machined or otherwise formed to provide a few thousandths (for example, .002 inch) tolerance with respect to the side walls of the vane members **20** to restrict circumferential movement of the vanes in the fluid circuits as the loading thereon transmitted to the vanes by the fluid builds up to a peak as the vanes of the impeller and turbine move circumferentially relative to each other. The same is of course true with respect to the tie ring **100** of the turbine **22**. It will be noted that the tie ring **98** is designed in such a manner that it is loaded by deflection of the vanes **20** to place the tie ring segments in compression, as load is imparted thereto by the vanes.

In fluid couplings having unequal numbers of vanes in the impeller and turbine members, the tie rings **98** and **100** function to restrict the circumferential displacement of the vanes and distribute the load in compression to the succeeding vanes. It will be noted that the tie rings **98** and **100** are positioned more closely adjacent the outer peripheries **94** than they are toward the inner peripheries **96**. The tie rings are thus positioned at approximately the area of greatest loading and therefore of the maximum deflection of the vanes. In this manner the tie rings function to provide desired guidance to the circulating fluid, thereby minimizing turbulence in the circuit and allowing greater transmission of energy between the driving and driven member.

As the load imposed on the driven shaft increases the degree of slippage between the driven and driving members increases and the internal circulation of fluid increases. This increased circulation flow in the coupling induces the flow to move radially inwardly toward the inner peripheries **96**. The tie rings **98** and **100** provide a desirable degree of guidance for the fluid to minimize fluid turbulence and increase the efficiency of the unit.

It will of course be understood that if desired tie rings **98** and **100** may simultaneously be employed in association with both the impeller and turbine members **18** and **22**. If desired, however, it is unnecessary that tie rings be used on both, since it can advantageously be employed on either the impeller or the turbine members alone without sacrificing any of their advantages or resulting efficiency. Also, it will be seen that two or more tie rings may be employed on the impeller or turbine members if desired.

It will be noted that the tie rings **98** and **100** function to tie together the vanes at their free edges thereby providing a stronger construction whereby each of the vanes is permitted a degree of freedom to move in response to stresses imposed on it, but movement beyond a predetermined degree due to vibrational impulses is restricted.

We prefer to form the tie rings **98** and **100** of high tensile strength material. These rings may be formed in any desired manner as by fabricating, machining, precision casting, or any other suitable method may be employed whereby a ring having the desired properties and proportions is provided to tie together the free edges of the vanes.

As shown in FIG. 1 it will be noted that the vane dampening tie rings **98** or **100** are positioned axially and are held in clamped engagement with the vanes by means of the high tensile stress bolts **106**. The heads **108** of the bolts **106** are recessed in the flanges **68** and **69** respectively of the impeller **18** and turbine **22**. The bolts **106** have reduced sections **110** intermediate their head sections **108** and their threaded ends **112** to provide a desired degree of elasticity whereby the tie rings **98** and **100** are resiliently maintained in contact with the free edges **90** and **92** of the vanes **20** and **24** in the area of the relieved sections **102**. The stress concentrations in the bolts **106** are thus reduced whereupon the member is permitted to seek a stabilized position. It will be noted that the threaded end **112** of the bolts **106** are threaded into the tapped holes **114** formed in the rings **98** or **100**.

Referring now to FIG. 3, it will be noted that a modified form of our invention which may be applied to both the impeller and turbine members or to either is illustrated. The free edges **90** of the vanes **20** of the impeller **18** shown for illustrative purposes are contoured to provide an annular groove or recess **116** completely around the entire circumference of the impeller.

A ring **118** accurately dimensioned to correspond with the contour and dimensions of the recess **116** is positioned in the recesses and is secured to each of the vanes. The ring **118** may be fixedly secured to the vanes by a brazing operation, preferably in a furnace having controlled atmosphere. It will be understood that an additional advantage of placing the ring **118** in place resides in the fact that the rotors are stress relieved due to the annealing action imparted by heating them during the brazing operation.

It will be understood that the ring **118** ties through the vanes in such a manner as to reinforce them, equalize loads imparted on the vanes, and dampen vibrational stresses which might be imposed.

Referring now to FIG. 4, there is provided a ring **120** having a series of slots therein for fitting over the edge portions of vanes **20** in the manner of the aforementioned slots **104** (FIG. 2). Vanes **20** of the FIG. 4 embodiment are provided with notches **122** which receive portions of a locking rod **124** extending around ring **120**. Section **126** of the ring is turned into engagement with rod **124** as shown in full lines to hold said rod partially within notches **122** and partially overlying surface **128** of ring **120**, the arrangement being such that ring **120** is securely locked on the vanes **20**. Prior to installation of ring **120** on the vanes, section **126** assumes the dotted line position **130** so as to accommodate positionment of ring **120** and rod **124** onto the vanes. Locking of the ring and rod onto the vanes is accomplished by displacing ring section **126** from its dotted line position to its full line position with suitable swedging devices (not shown).

Referring now to FIG. 5, there is provided a ring **140** having slots similar to the aforementioned slots **104** for fitting the ring onto vanes **20**. The vanes in this embodiment are provided with integral tabs **142** which project through the ring into an endless channel or groove **144**, the arrangement being such that the tabs may be bent down from their illustrated positions to clamp ring **140** onto the vanes.

Referring now to FIG. 6, there is provided a ring **150** having a section **152** thereof projecting into a lip-defining notch **154** formed in the edge of each vane **20**. An annular wedge element **156** is inserted between ring **150** and edge surface **158** of the vane to retain the ring in its illustrated position. Screws **162** are provided for locking element **156** onto the ring for maintaining the ring in position. Circumferential displacement of the vanes is prevented by wall portions **160** formed integrally with ring **150** and closely engaging opposite faces of each vane. Wall portions **160** cooperate with one another to form slots similar to slots **104** shown in FIG. 2.

From the above description it will be noted that the vane-rigidifying element may be secured onto the vanes by various different mechanisms while still obtaining the desired rigidifying and vibration-dampenng features. Although the rigidifying element has been described as a continuous tie ring it should be noted that the tie construction could be formed as a series of discontinuous tie elements, each interconnecting two or more vanes. Thus, for example, with a shell having forty blades, there might be provided four segmented tie elements, each interconnecting ten of the blades.

Having thus described our invention, we claim:

1. In a fluid coupling the combination comprising a fluid torque transmitting shell; vanes carried within said shell; and a tie ring having a series of slots receiving the vane free edges, with a slight clearance between the slot-forming surfaces and the vane faces so that a highly loaded vane is enabled to be deflected prior to transfer of load onto the tie ring.

2. The combination of claim 1 wherein the aforementioned clearance is approximately .002 inch.

3. In a fluid coupling the combination comprising a fluid torque transmitting shell; vanes carried within said shell; tie means interconnecting at least some of said vanes at points remote from the points of connection of the vanes with the shell; said tie means having a yieldable connection with at least some of the vanes whereby circumferential loads placed on a particular vane are allowed to be partially absorbed by the vane and partially transmitted to the tie means and thence to the adjacent vanes; and a plurality of connector elements interconnecting the tie means with portions of said shell; said connector elements having an elasticity such that stress thereon is relieved during operation of the coupling.

4. The combination of claim 3 wherein the connector elements comprise elongated connector devices having enlarged end portions anchored in the shell and tie means respectively, and having intermediate portions of reduced dimension to provide an elastic connection between the tie means and shell.

5. In a fluid coupling the combination comprising a fluid torque transmitting shell; vanes carried within said shell; and tie means interconnecting at least some of said vanes at points remote from the points of connection of the vanes with the shell; said tie means having a yieldable connection with at least some of the vanes whereby circumferential loads placed on a particular vanes are allowed to be partially absorbed by the vane and partially transmitted to the tie means and thence to the adjacent vanes; said tie means being contoured to smoothly guide the fluid vortex as it moves through the shell, with the radial cross section of the tie means being approximately the same as the axial cross section thereof; the flow path between the tie means and the outer periphery of the shell being slightly greater than the tie means radial cross section.

6. In a fluid coupling the combination comprisng a fluid torque transmitting shell; vanes carried wtihin said shell; an annular tie element interconnecting the vanes at points remote from the points of connection of the vanes with the shell; said tie element having yieldable connections with the vanes whereby circumferentail loads placed on a particular vane are allowed to be partially absorbed by the vane and partially transmitted to the tie ring and thence to the adjacent vane; certain of said vanes having recesses formed therein defining lips and opposed abutment surfaces; said tie element having portions thereof seated in the recesses beneath the lips; a locking element wedged between the tie element and each of said abutment surfaces to retain said tie element in position underneath the lips; and means anchoring the locking element on the tie element.

References Cited in the file of this patent

UNITED STATES PATENTS

838,765	Bissell	Dec. 18, 1906
1,258,462	Rice	Mar. 5, 1918
1,309,816	Search	July 15, 1919
1,698,327	Doran	Jan. 8, 1929
2,301,645	Sinclair	Nov. 10, 1942
2,371,588	Salerni	Mar. 13, 1945
2,436,412	Zeidler	Feb. 24, 1948
2,692,561	Zeidler	Oct. 26, 1954

FOREIGN PATENTS

38,691	Sweden	Mar. 16, 1914
526,054	Great Britain	Sept. 10, 1940

UNITED STATES PATENT OFFICE

CERTIFICATE OF CORRECTION

Patent No. 2,998,782 September 5, 1961

Thomas J. Ryan et al.

It is hereby certified that error appears in the above numbered patent requiring correction and that the said Letters Patent should read as corrected below.

Column 2, lines 66 and 67, for "leading" read -- free --; column 5, line 4, for "vibration-dampenng" read -- vibration-dampening --; line 10, for "segmented" read -- segmental --; column 6, line 18, for "circumferentail" read -- circumferential --.

Signed and sealed this 13th day of February 1962.

(SEAL)
Attest:

ERNEST W. SWIDER
Attesting Officer

DAVID L. LADD
Commissioner of Patents