



(43) International Publication Date
11 October 2012 (11.10.2012)

(51) International Patent Classification:
F41H 11/05 (2006.01)

(21) International Application Number:
PCT/IB2012/000702

(22) International Filing Date:
5 April 2012 (05.04.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2011/02556 7 April 2011 (07.04.2011) ZA

(71) Applicant (for all designated States except US): **BIRMINGHAM BARBED TAPE LTD.** [GB/GB]; Unit 11, Hartlebury Trading Estate, Hartlebury NR, Kidderminster, Worcestershire DY10 4JB (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SMITH, Ronald** [GB/GB]; 11 Osterley Grove, Muxton, Telford, Shropshire TF2 8RD (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: FLOATING BARRIER

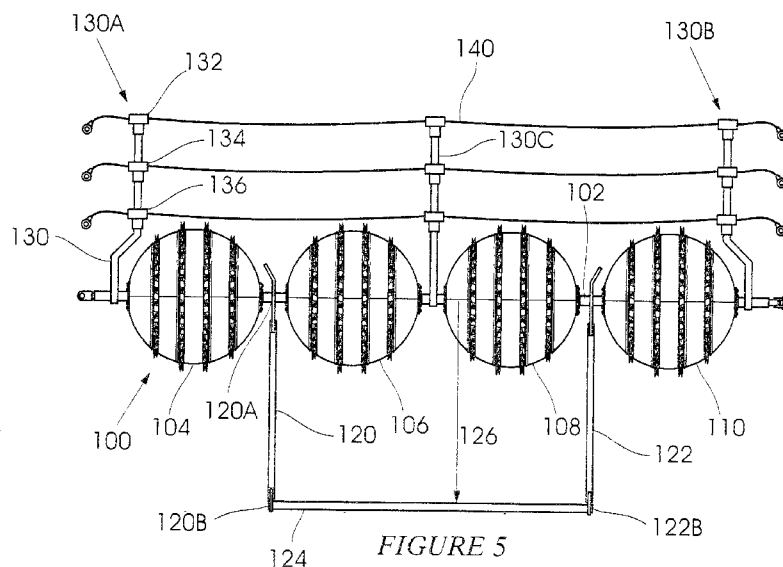


FIGURE 5

(57) Abstract: A floating barrier which includes a number of buoyant bodies (12) which are fixed to an axle (36) from which extend a downwardly directed counterweight (124) and upwardly directed supports (130) to which transverse chains or cables are fixed.

FLOATING BARRIER

BACKGROUND OF THE INVENTION

[0001] This invention relates to the provision of a barrier on a body of water e.g. at sea, in a dam or river, in an estuary or the like.

[0002] There is a need for certain strategic installations, whether permanent or temporary, land-based or floating, to be protected against intrusions, attacks and, more generally, against unauthorised access. For example an installation on land, close to a beach or floating in water can be attacked by assailants in a relatively small boat. Although it is difficult to protect this type of installation against all water-based attacks a requirement exists for a security barrier which can provide, at least, a substantial degree of protection, particularly against attacks which are launched using relatively small water vessels.

[0003] It has been found that a floating barrier can often be overcome by a vessel which is aimed at the barrier at a high speed. An object of the present invention is to address, in a more effective manner, this type of situation.

SUMMARY OF THE INVENTION

[0004] The invention provides a barrier which includes an elongate axle, at least first and second buoyant bodies mounted at spaced locations to the axle, at least one counterweight which is attached to the axle, at least two upwardly extending supports mounted at spaced locations to the axle, and at least one elongate flexible retaining member attached to and extending between the supports.

[0005] The counterweight may include a mass, and at least one elongate member with a first end which is attached to the axle and an opposed second end to which the mass is attached.

[0006] The barrier may include at least two of the elongate members with respective first ends which are attached to the axle at spaced locations. The mass may be attached to, and positioned between, respective second ends of the two elongate members.

[0007] The mass may be separately formed and attached in any suitable way to the axle.

[0008] Depending on the extent of deterrence required, safety constraints and other factors each buoyant body may be substantially smooth on an outer surface, or include a plurality of deterrent formations on an outer surface.

[0009] The first and second buoyant bodies may be mounted at spaced locations to the axle between the elongate members, and the barrier may include third and fourth buoyant bodies mounted to the axle near respective opposed ends of the axle. This is a preferred construction, but other arrangements are possible.

[0010] Each buoyant body may be of any suitable shape e.g. cylindrical or spherical. The buoyant body may be formed from two separately constructed halves, e.g. hemispheres, which are interconnected to form the body e.g. a sphere. The axle may extend between interconnected halves of the body.

[0011] Mounting components attached to the axle may allow for rotation of the axle about a longitudinal axis. Each mounting component may be of any suitable kind and may include a shackle or joint, in the nature of a universal coupling, which allows the axle to rotate and to move transversely, to a limited extent, relative to the axis.

[0012] Each buoyant body may be rotatable about, and relative to, the axle. Alternatively each body is fixed to the axle so that it is rotatable together with the axle.

[0013] The elongate flexible retaining member may be a cable or chain.

[0014] The invention further extends to a barrier assembly which includes a plurality of barriers, each barrier being of the aforementioned kind, wherein the barriers are connected to one another in an elongate array.

[0015] It is possible to increase the degree of security which is offered by a floating barrier by interconnecting a plurality of barriers, each barrier being of the aforementioned kind, in a two-dimensional array (viewed in plan).

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The invention is further described by way of example with reference to the accompanying drawings in which:

Figure 1 illustrates half sections of a buoyant body;

Figures 2, 3 and 4 are front, side and perspective views respectively, of an assembled buoyant body; and

Figures 5, 6 and 7 are side, plan and end views respectively of a barrier according to the invention.

DESCRIPTION OF PREFERRED EMBODIMENT

[0017] Figure 1 of the accompanying drawings illustrates first and second half sections 10 and 12 respectively, of a buoyant body. The half sections are, for all practical purposes, substantially identical. Thus the construction of the half section 10, only, is described.

[0018] The half section 10 includes a moulded hemispherical shell 14 which is formed from a suitable plastics material. The shell has a number of channels 16 which extend over its outer surface. An interior of the shell is filled with a closed cell marine foam 18.

[0019] An elongate channel 24 extends diametrically, in the foam, across a flat surface 26 of the half section. A number of flanges 28, integral with the shell 14, are located in respective channels at a perimeter of the flat surface 26.

[0020] Figures 2 to 4 are front, side and perspective views, respectively, of a buoyant spherical body 32 which is formed by interconnecting the half sections 10 and 12 to each other. Bolts 34 are passed through registering holes in the flanges 28 and the half sections are thereby firmly secured to each other. A portion of an axle 36 (see Figure 1) is previously positioned in the registering channels 24 in the two half sections. The axle includes an outer tube 38 through which extends a shaft 40. At opposed ends of the half sections the tube has respective flanges 42 and 44 which are bolted to the assembled half sections.

[0021] In another form of the invention each buoyant body is not spherical, as shown, but instead is circular cylindrical. Each body could have any other suitable shape.

[0022] The channels 16 in the two half sections 10 and 12 form circular recesses 50. Circumferentially extending bands 52 are then positioned in the recesses 50 in an outer surface of the spherical body 32. These bands carry outwardly projecting spike or deterrent formations 54. The bands are formed in semi-circular half sections which are bolted together. In this way, a substantial force is exerted on the two half sections which helps to keep the sections firmly engaged with each other.

[0023] Figures 5, 6 and 7 are side, plan and end views respectively of a barrier 100 according to the invention. The barrier includes an elongate solid axle 102 on which four buoyant bodies 104, 106, 108 and 110 are mounted at evenly spaced locations. At opposed ends the axle has mounting structure in the form of universal-type shackle joints 112 and 114. Alternatively, short flexible chains or cables, between adjacent bodies, are connected to axles on which the respective bodies are mounted.

[0024] The buoyant bodies are substantially identical and are made in the manner which has been described hereinbefore. Each buoyant body is free to rotate about the axle. This is not necessarily the case for, in an alternative form of the invention, each buoyant body is fixed to the axle so that it is only rotatable together with the axle.

[0025] Elongate members 120 and 122 are positioned, respectively, between the bodies 104 and 106, and 108 and 122. The elongate member 120 has a first end 120A which is mounted to the axle between the bodies 104 and 106. Similarly the elongate member 122 is mounted to the axle between the bodies 108 and 110. An elongate counterweight 124 extends between, and is attached to, opposed respective second ends 120B and 122B of the elongate members. The counterweight is in the form of a chosen mass of desired magnitude which is positioned a fairly substantial distance 126 from the axle 102. The counterweight can be made in any suitable way. In one preferred form of construction the counterweight is a tube which is filled with a high density, settable material which is thereby encapsulated in the tube.

[0026] Elongate supports 130 are fixed to the axle and extend from the axle in a direction which is diametrically opposed to the position of the counterweight. Each elongate support is rigid. Each support carries three clamps 132, 134 and 136 respectively at spaced locations. First and second elongate supports 130A and 130B respectively, are positioned close to the respective ends of the axle while a third support 130C is positioned between the buoyant bodies 106 and 108. Strong, flexible, weather-resistant cables or chains 140 are fixed to the clamps and extend between the supports generally parallel to the axle. The cables are held by the supports on a side of the axle which is diametrically opposed to the counterweight, and form a transversely extending array which is positioned above the buoyant bodies.

[0027] The floating barrier offers substantial protection to an installation against attack by relatively small vessels. The counterweight acts to urge the buoyant bodies to an orientation in which the elongate supports extend upwardly and the cables or chains carried by the supports are thereby elevated. If an attempt is made to propel a boat over the floating barrier the elevated cables help to trap the boat and impede its movement.

[0028] Secondly, if a barrier is rotated by an impacting boat, the action of the counterweight is such as to restore the barrier, fairly quickly, to a desired orientation at which the cables which it carries are again elevated.

[0029] The deterrent formations on the outer surface of each respective buoyant body can penetrate a hull of a boat and can become locked to the hull. This also helps to impede passage of the boat.

[0030] The two-part construction of the buoyant body simplifies manufacturing procedures, for it can readily be ascertained that the interior of each shell 14 has been correctly filled with the marine foam 18. Maintenance is also simplified for, if required, a buoyant body can be replaced.

[0031] The counterweight 124 is supported by four of the buoyant bodies. Its mass can therefore be greater than the mass of a counterweight which is supported by only one buoyant body. Also, a force which is required to rotate the counterweight rapidly so that an impacting boat can travel over the barrier is considerably increased. The cables 140 interconnect four of the buoys on one axle and the impacting force on the cables must thus be sufficient to overcome the effect of one counterweight. The counterweight is displaced a substantial distance from the axis of the axle and consequently the moment required to rotate the counterweight about the axis is increased.

[0032] The floating barrier can be configured in different forms. The individual buoyant bodies could have smooth external surfaces. A physical barrier to movement of a vessel or a person is still presented but the likelihood that the buoyant bodies will cause damage to the vessel or injure a person is much reduced. If a formidable physical deterrent is required then the deterrent formations could be in the form of large and sharp spikes. The invention is not limited in this respect. Buoyant bodies with smooth surfaces can be used in a first array positioned on one side of a second array of buoyant bodies which carry spikes so that the deterrent effect of the resulting barrier is increased from one side to the other.

[0033] A plurality of the barriers 100 can be interconnected, to follow an elongate path. Each barrier is, in effect, a substantially rigid sub-assembly. However, adjacent barriers can move relative to one another because of flexible and articulated links which are established by interconnecting adjacent universal shackles 46, 48 to each other.

CLAIMS

- 1 A barrier which includes an elongate axle, at least first and second buoyant bodies mounted at spaced locations to the axle, at least one counterweight which is attached to the axle, at least two upwardly extending supports mounted at spaced locations to the axle, and at least one elongate flexible retaining member attached to and extending between the supports.
- 2 A barrier according to claim 1 wherein the counterweight includes a mass, and at least one elongate member with a first end which is attached to the axle and an opposed second end to which the mass is attached.
- 3 A barrier according to claim 2 which includes at least two of the elongate members with respective first ends which are attached to the axle at spaced locations and wherein the mass is attached to, and positioned between, respective second ends of the two elongate members.
- 4 A barrier according to any one of claims 1 to 3 wherein each buoyant body includes a plurality of deterrent formations on an outer surface.
- 5 A barrier according to any one of claims 1 to 4 wherein the first and second buoyant bodies are mounted at spaced locations to the axle between the elongate members, and wherein the barrier includes third and fourth buoyant bodies mounted to the axle near respective opposed ends of the axle.
- 6 A barrier according to any one of claims 1 to 5 wherein each buoyant body is formed from two separately constructed halves which are interconnected for form the body and wherein the axle extends between the interconnected halves of the body.
- 7 A barrier according to any one of claims 1 to 6 which includes at each end of the axle a respective universal coupling, which allows the axle to rotate and to move transversely, to a limited extent, relative to a longitudinal axis.

- 8 A barrier according to any one of claims 1 to 7 wherein each buoyant body is rotatable about, and relative to, the axle.
- 9 A barriers according to any one of claims 1 to 7 wherein each buoyant body is fixed to the axle so that it is rotatable together with the axle.
- 10 A barrier assembly which includes a plurality of barriers, each barrier being according to any one of claims 1 to 9 wherein the barriers are connected to one another in an elongate array.

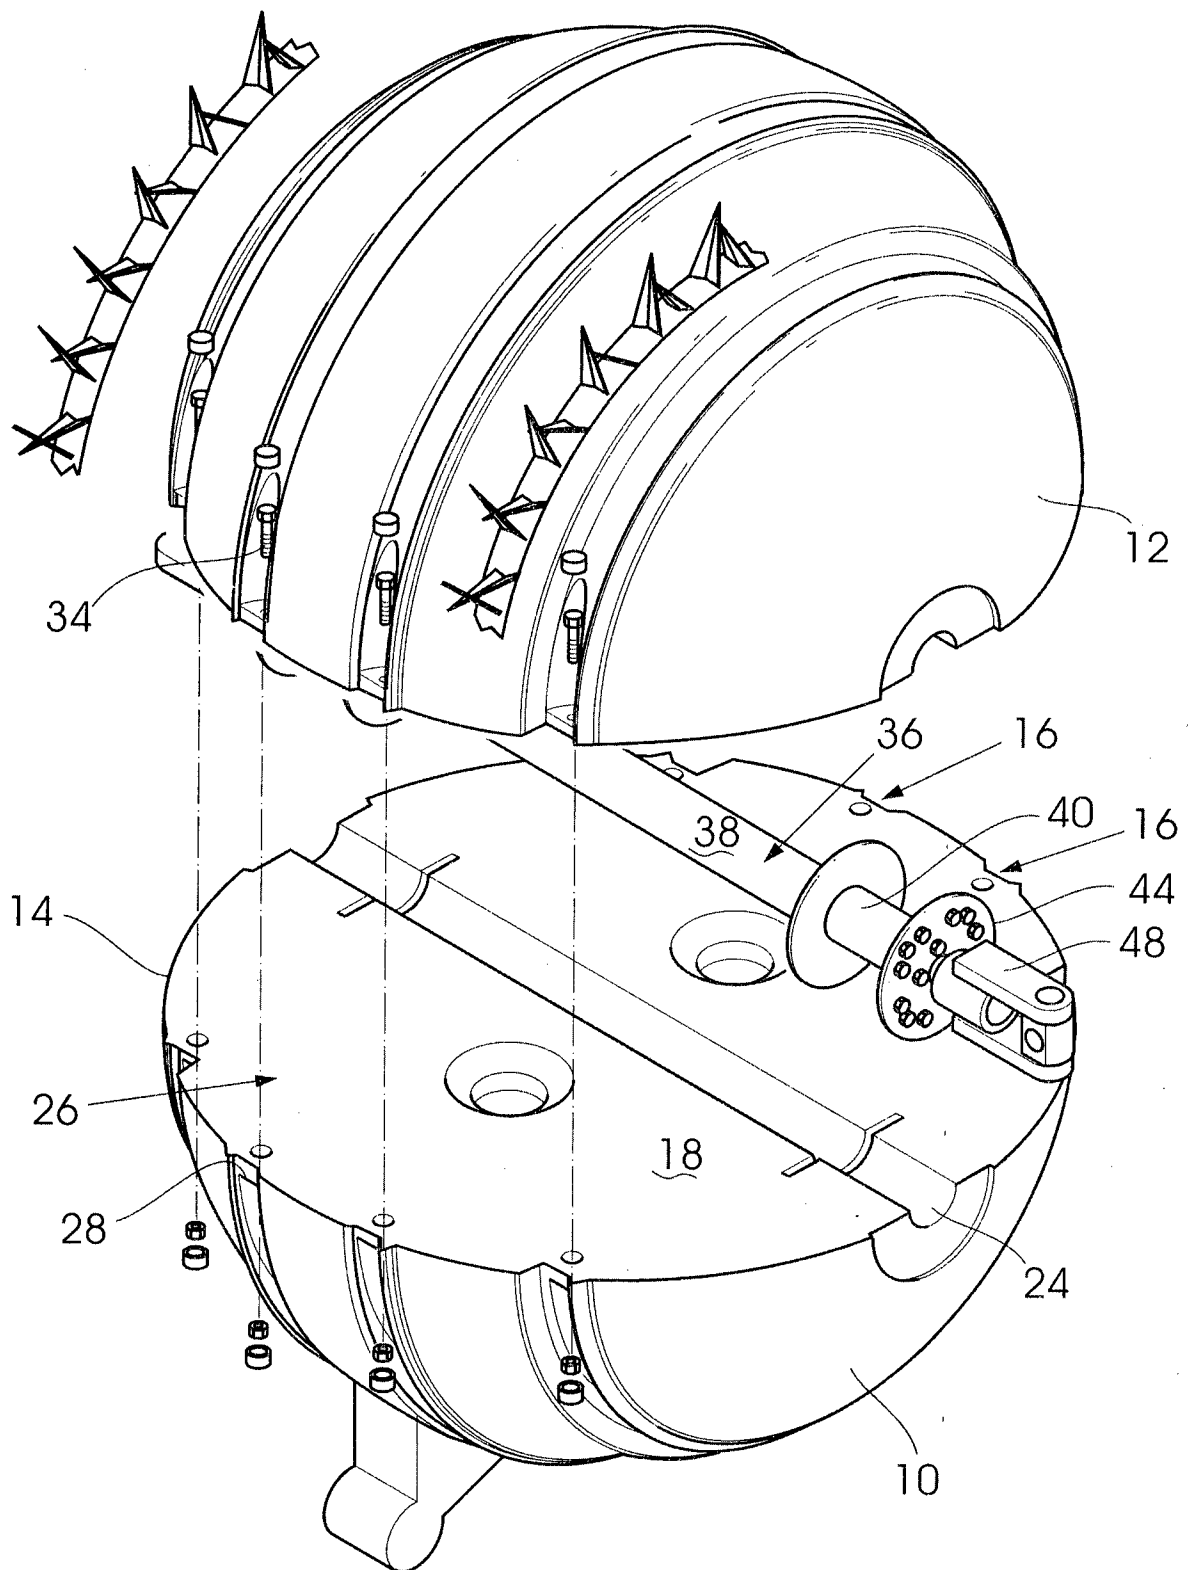
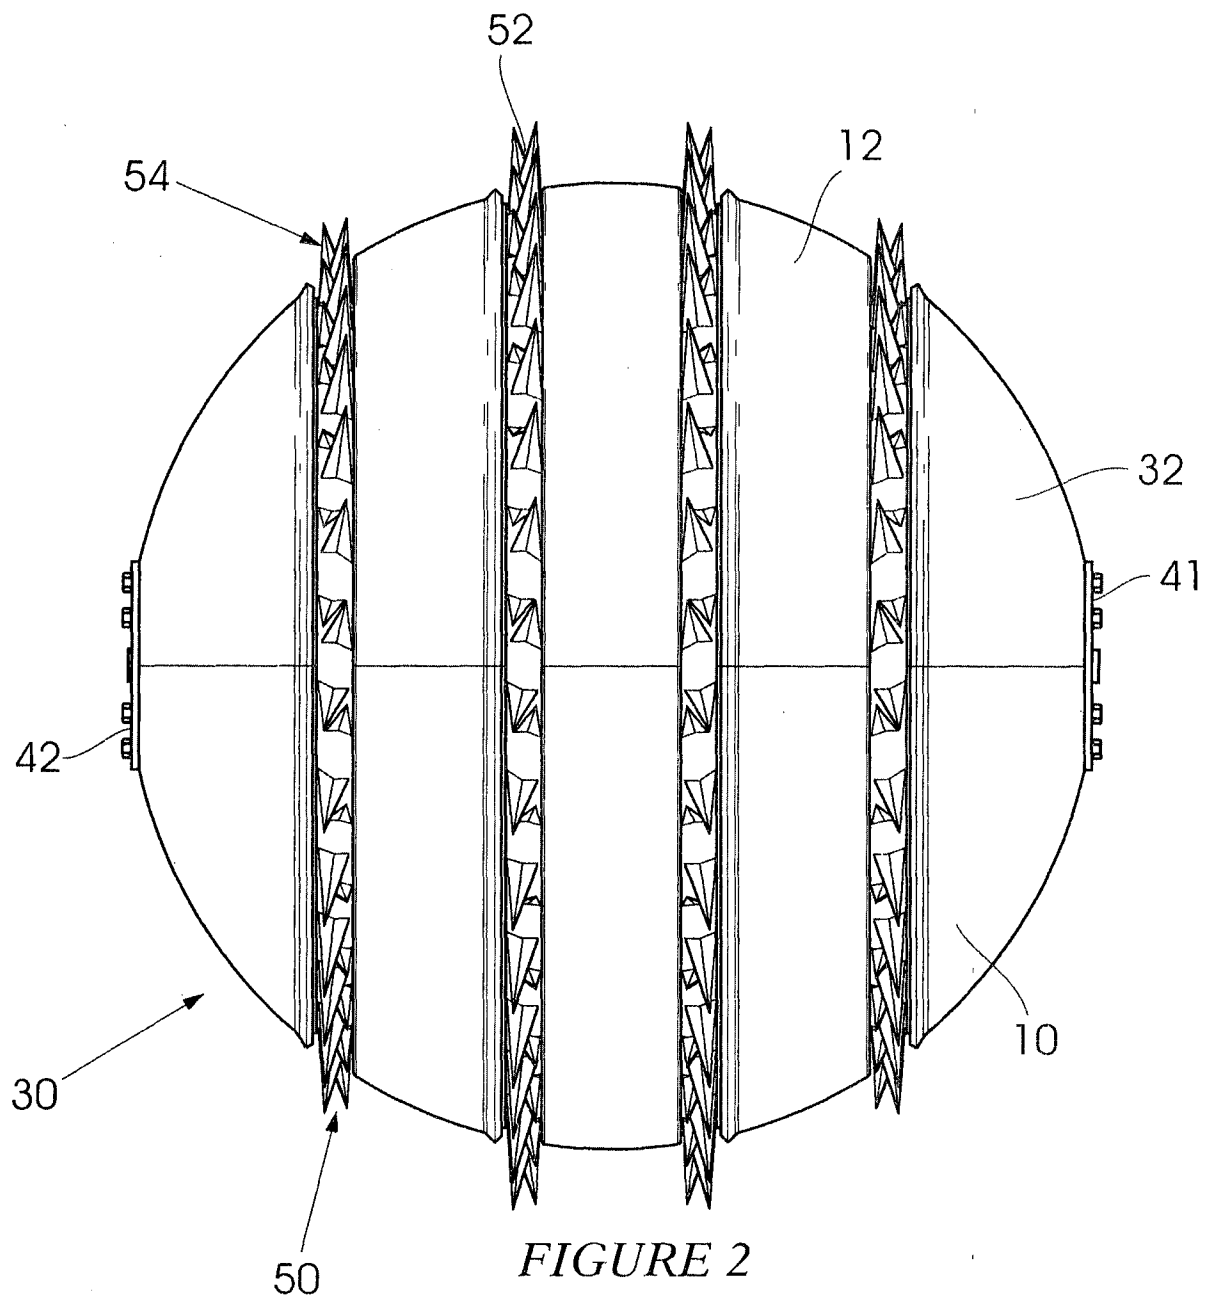


FIGURE 1



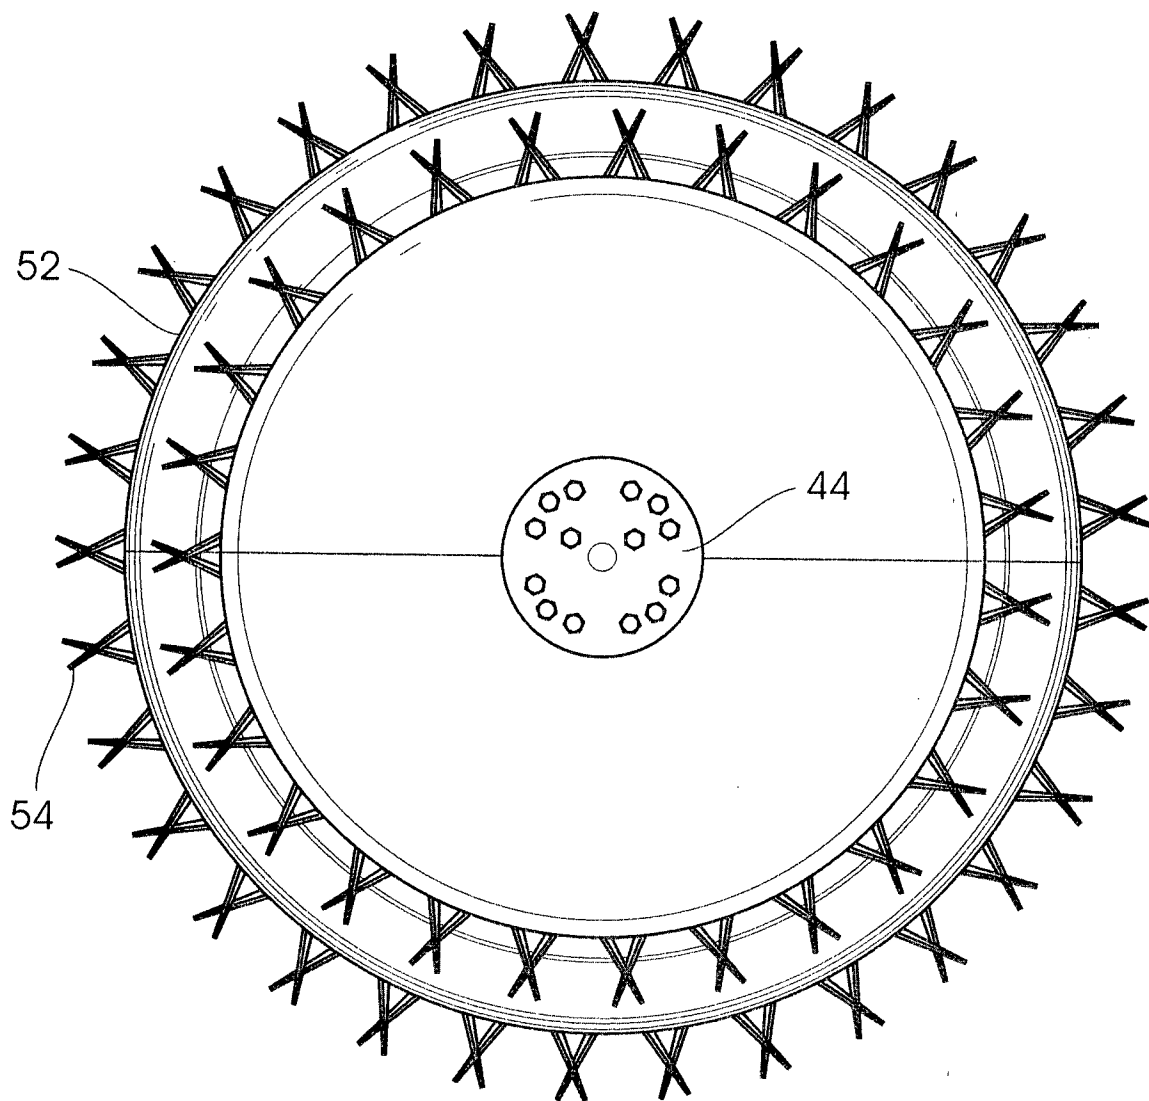
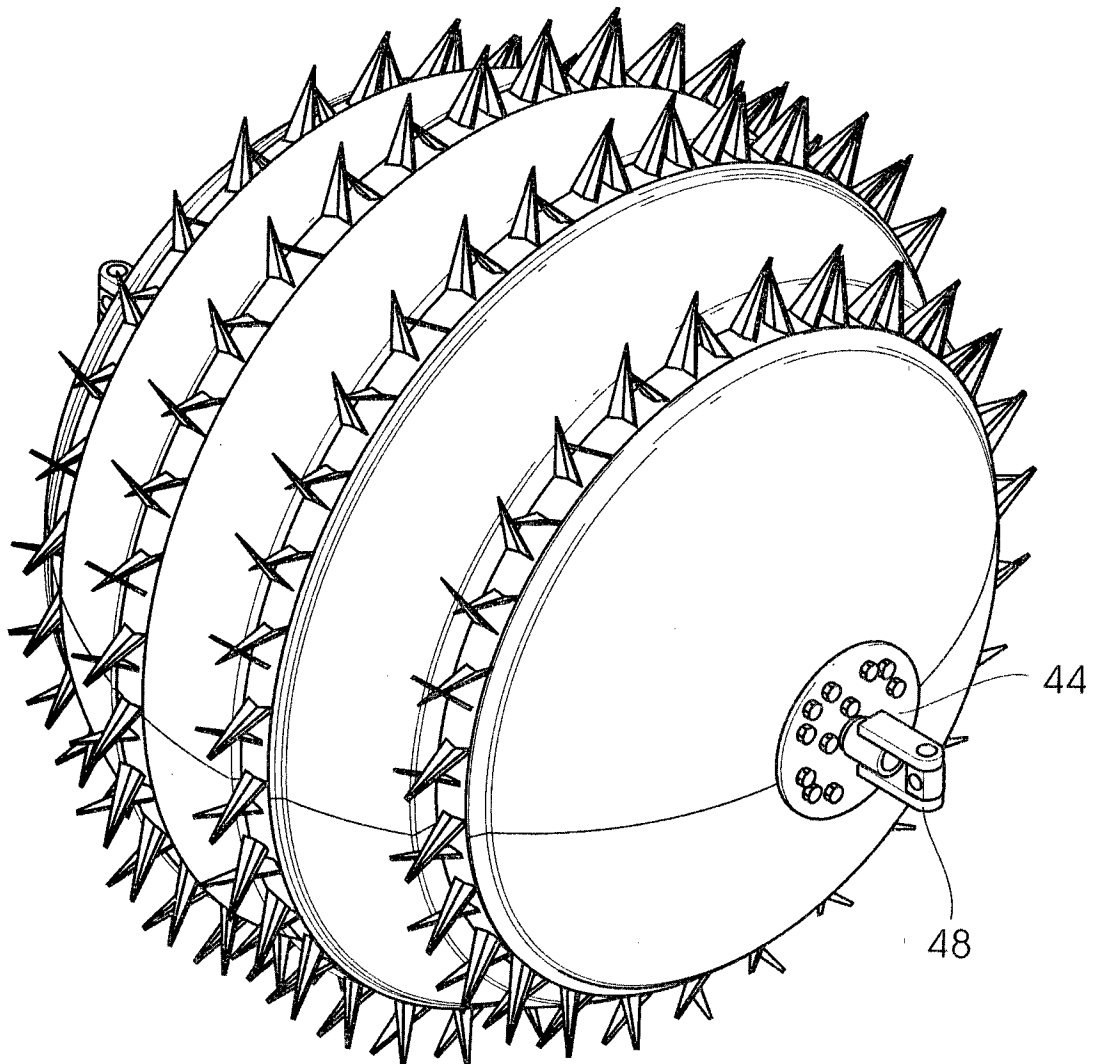
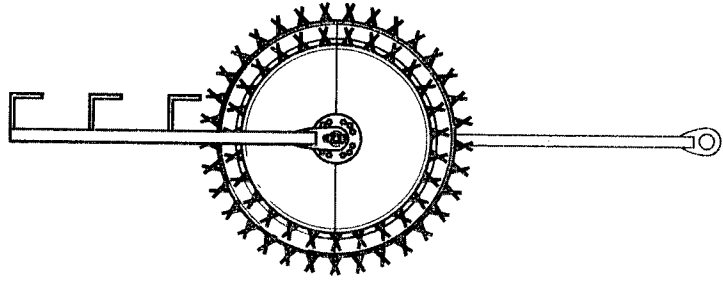
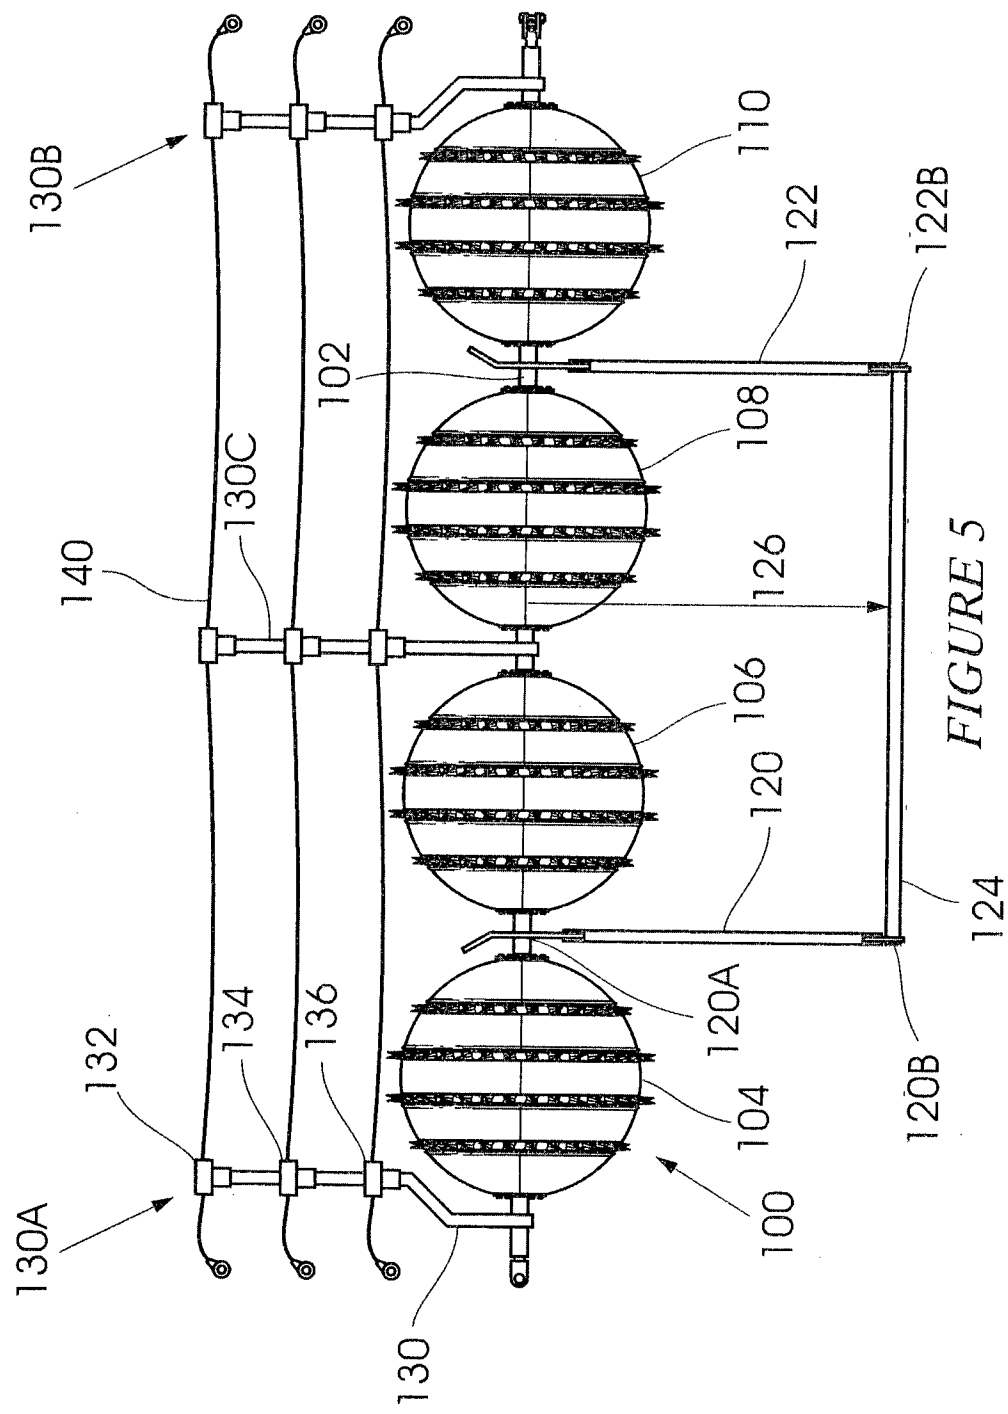


FIGURE 3

*FIGURE 4*



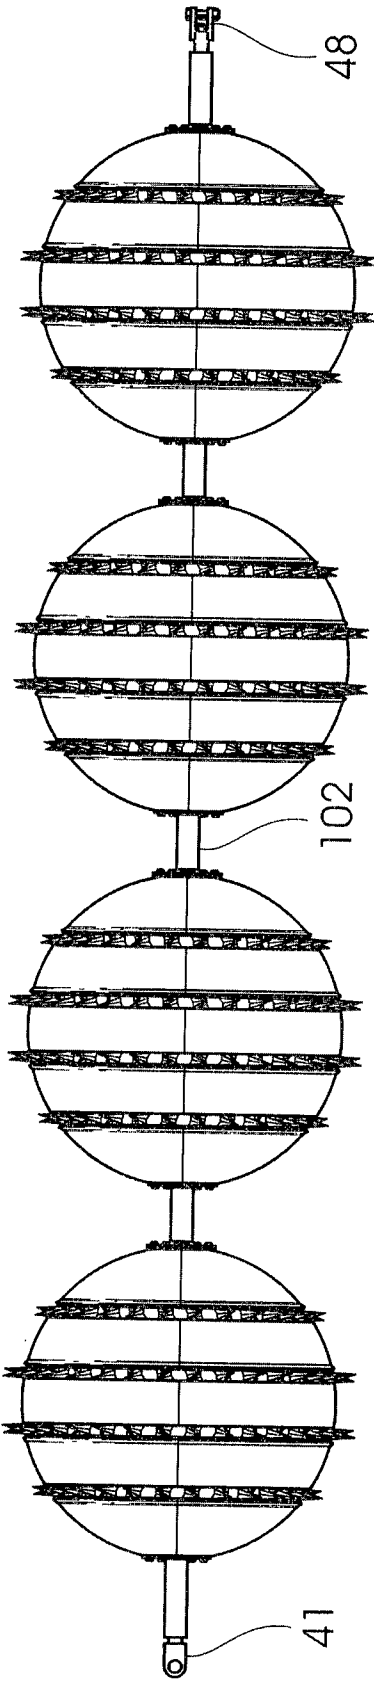


FIGURE 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2012/000702

A. CLASSIFICATION OF SUBJECT MATTER
INV. F41H11/05
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F41H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/191129 A1 (YODOCK LEO J III [US] ET AL YODOCK III LEO J [US] ET AL) 1 September 2005 (2005-09-01)	1,2
Y	abstract paragraph [0100] - paragraph [0104] figures	4,5,7-10
Y	----- WO 2009/152533 A1 (COCHRANE RICHARD BRUCE [ZA]) 17 December 2009 (2009-12-17) abstract paragraph [0019] - paragraph [0024] figures	4,5,7-10
X	----- US 2003/051652 A1 (METHERELL MARK B [US] ET AL) 20 March 2003 (2003-03-20) abstract paragraph [0025] - paragraph [0026] figures ----- -/-	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 August 2012

Date of mailing of the international search report

06/09/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Vermander, Wim

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2012/000702

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7 140 599 B1 (SPINK RICHARD [US]) 28 November 2006 (2006-11-28) column 3, line 42 - column 4, line 21 figures -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2012/000702

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005191129 A1	01-09-2005	AU 2005245343 A1 CA 2563424 A1 EP 1737725 A2 US 2005191129 A1 WO 2005113331 A2	01-12-2005 01-12-2005 03-01-2007 01-09-2005 01-12-2005
WO 2009152533 A1	17-12-2009	GB 2473404 A WO 2009152533 A1	09-03-2011 17-12-2009
US 2003051652 A1	20-03-2003	US 2003051652 A1 US 2004194688 A1	20-03-2003 07-10-2004
US 7140599 B1	28-11-2006	NONE	