(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
23 September 2021 (23.09.2021)

WIPO | PCT

(10) International Publication Number
WO 2021/185699 A1

(51) International Patent Classification:
H01F 27/12 (2006.01) *H01F 27/32* (2006.01)
H01F 27/30 (2006.01)

(21) International Application Number:
PCT/EP2021/056379

(22) International Filing Date:
12 March 2021 (12.03.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20163757.6 17 March 2020 (17.03.2020) EP

(71) Applicant: **ABB POWER GRIDS SWITZERLAND AG** [CH/CH]; Bruggerstrasse 72, 5400 Baden (CH).

(72) Inventors: **HJORTSTAM, Olof**; Tortuna Kolsta 10, 725 96 Västerås (SE). **CZERNUSCHKA, Mark**; Kirnautal-strasse 11, 74749 Rosenberg (DE). **GIRLANDA, Orlando**; Öster Mälarstrands Allé 136, 723 56 Västerås (SE).

(74) Agent: **VALEA AB**; Box 7086, 103 87 Stockholm (SE).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:
— *of inventorship (Rule 4.17(iv))*

Published:
— *with international search report (Art. 21(3))*

(54) Title: INSULATOR HAVING INTERNAL COOLING CHANNELS

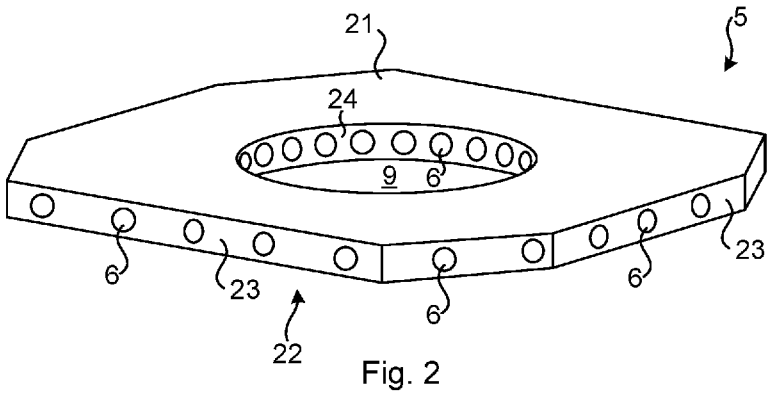


Fig. 2

(57) Abstract: The present disclosure relates to an electrical insulator (5), for an inductive device filled with an electrically insulating cooling fluid. The insulator defines a plurality of internal channels (6) for allowing the fluid to flow there through to improve circulation of the fluid within the inductive device.

WO 2021/185699 A1

INSULATOR HAVING INTERNAL COOLING CHANNELS

TECHNICAL FIELD

[0001] The present disclosure relates to an electrical insulator for a fluid-filled inductive device.

BACKGROUND

[0002] A fluid-filled inductive device, e.g. a transformer, comprises solid insulation and cooling fluid. A sufficient circulation of the cooling fluid is needed for efficient cooling of the inductive device. Thus, the solid insulation should allow the cooling fluid to pass and circulate in the device. For example, the top and bottom winding insulators, so called winding tables or pressplates, may be comprised in arrangements of several separate but combined parts, i.e. pressplates and common spacer rings, to allow the cooling fluid to pass the solid insulation.

[0003] CN 202678030 discloses a pressplate for a transformer. The pressplate is provided with groves or bars on one face to form oil channels.

[0004] Similarly, WO 2011/124835 discloses an insert for isolating two windings of a coil. The insert comprises a polyaramid plate having spacers placed on one of the faces of the plate to define channels for dielectric fluid.

[0005] EP2602800A1 discloses an oil-transformer comprising a transformer vessel, a transformer core mounted therein, at least one upright hollow cylindrical transformer coil with at least one axial cooling channel arranged around a limb of the transformer core and an oil chamber arranged at an axial front side of the transformer coil.

[0006] US1317003 discloses a reactor comprising a plurality of substantially flat coils, radial supports of a plastic extending across and embedding the turns thereof.

[0007] EP3312856A1 discloses a transformer with winding support which guides a cooling fluid to the winding body.

SUMMARY

[0008] It is an objective of the present invention to provide an improved electrical insulator for an inductive device 1 filled with an electrically insulating cooling fluid, for allowing the fluid to pass the insulator.

[0009] According to an aspect of the present invention, there is provided an electrical insulator. The insulator is configured to be used in an inductive device filled with an electrically insulating cooling fluid. The insulator defines a plurality of internal channels for allowing the electrically insulating cooling fluid to flow there through to improve circulation of the fluid within the inductive device.

[0010] According to an aspect of the present invention there is provided an electrical insulator, for an inductive device filled with an electrically insulating cooling fluid, the insulator defining a plurality of internal channels for allowing the fluid to flow there through to improve circulation of the fluid within the inductive device,

wherein the insulator is flat and the channels comprise radial channels extending in a plane within the insulator which is parallel to opposing first and second main surfaces of the insulator,

wherein the channels comprise axial channels, each of the axial channels extending through at least one of the first and second main surfaces and into at least one of the radial channels for allowing the cooling fluid to pass between the axial and radial channels

and wherein the insulator is made of at least one electrically insulating material comprising a composite material of fibres, e.g. synthetic fibres such as glass fibres, in a resin matrix, e.g. comprising a curable resin such as an epoxy or polyester resin, preferably epoxy.

[0011] According to another aspect of the present invention, there is provided an inductive device comprising a housing, an electrically insulating cooling fluid contained within the housing, a winding arrangement submerged in the cooling fluid, and at least one insulator of the present disclosure.

[0012] By the insulator having internal channels for the cooling fluid, the circulation of the cooling fluid can be improved without the need for spacers or the like which would increase the spatial footprint of the insulator. The insulator, and thus the whole inductive device, may be made more compact.

[0013] It is to be noted that any feature of any of the aspects may be applied to any other aspect, wherever appropriate. Likewise, any advantage of any of the aspects may apply to any of the other aspects. Other objectives, features and advantages of the enclosed embodiments will be apparent from the following detailed disclosure, from the attached dependent claims as well as from the drawings.

[0014] Generally, all terms used in the claims are to be interpreted according to their ordinary meaning in the technical field, unless explicitly defined otherwise herein. All references to "a/an/the element, apparatus, component, means, step, etc." are to be interpreted openly as referring to at least one instance of the element, apparatus, component, means, step, etc., unless explicitly stated otherwise. The steps of any method disclosed herein do not have to be performed in the exact order disclosed, unless explicitly stated. The use of “first”, “second” etc. for different features/components of the present disclosure are only intended to distinguish the features/components from other similar features/components and not to impart any order or hierarchy to the features/components.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] Embodiments will be described, by way of example, with reference to the accompanying drawings, in which:

Fig 1 is a schematic sectional side view of an inductive device, in accordance with some embodiments of the present invention.

Fig 2 is a schematic perspective view of an embodiment of an insulator in accordance with the present invention.

Fig 3 is a detail of a schematic cross-sectional perspective view of an embodiment of an insulator in the form of a pressplate, in accordance with some embodiments of the present invention.

DETAILED DESCRIPTION

[0016] Embodiments will now be described more fully hereinafter with reference to the accompanying drawings, in which certain embodiments are shown. However, other embodiments in many different forms are possible within the scope of the present disclosure. Rather, the following embodiments are provided by way of example so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those skilled in the art. Like numbers refer to like elements throughout the description.

[0017] Figure 1 illustrates an inductive device 1, e.g. an electrical power transformer or reactor, typically a transformer. The device 1 comprises a conventional winding arrangement 4 of wound electrical conductor(s) in a housing 3, e.g. a transformer tank. The housing 2 is filled with an electrically insulating cooling fluid 3, e.g. a liquid or a gas, preferably a liquid such as a mineral oil or ester liquid, e.g. a transformer oil. The inductive device 1 comprises solid insulators 5, e.g. pressplates as illustrated in the figure. The winding 4 may be pressed between the pressplates 5 to stabilize the winding and separate it from e.g. a core or other elements in the inductive device. The insulators 5 of the present disclosure may additionally or alternatively to pressplates be used as any other solid insulation in an inductive device 1, e.g. spacers in the winding 4 or a cylinder around the winding 4.

[0018] The insulator 5 may be cellulose based, e.g. pressboard or wood/wood laminate, synthetic, e.g. aramid or epoxy based, and/or a laminate or composite. The insulator may e.g. comprise a fibre-resin composite of fibres, e.g. synthetic fibres such as glass fibres, in a resin matrix, e.g. comprising a curable or otherwise hardenable resin such as an epoxy or polyester resin, preferably epoxy.

[0019] Figure 2 illustrates an embodiment of a substantially flat insulator 5 in the having a central axial through hole 9. The flat insulator 5 has a first main surface 21, here an upper surface, and a second main surface 22, here a bottom surface, as well as an outer edge surface 23 and an inner edge surface 24 defining the through hole 9. Internal channels 6 are formed in the insulator. Each of the internal channels are configured for allowing cooling fluid 3 to enter the channel from outside of the insulator, pass though the insulator within the channel, and exit the channel to the outside of the insulator. The channels 6 may be separate

from each other, or may intersect to form a network of channels. This implies that each end of each channel has an opening in one of the outer surfaces 21-24 of the insulator, or has an opening into another of the channels.

[0020] In the embodiment of figure 2, the internal channels 6 comprises a plurality of radial channels extending in a plane within the insulator 5, which plane is parallel to opposing first and second main surfaces 21 and 22 of the insulator. Specifically, each of the radial channels 6 extends from the outer edge surface 23, having an opening in said outer edge surface, to the inner edge surface 24, having an opening in said inner edge surface. Typically, the radial channels are separate from each other, without intersecting with each other. Typically, the radial channels are straight.

[0021] In the embodiment of figure 2, the internal channels 6 are bores in the insulator 5, typically formed by drilling through the insulator 5. Alternatively, in some embodiments, the channels 6 may be formed in an inner layer of a multilayer structure, e.g. a laminate. Such an inner layer may be corrugated, thus forming channels 6 there through. In some other embodiments, the inner layer may comprise spacers, e.g. in the form of discrete ribs, thus forming channels 6 there through.

[0022] Figure 3 illustrates an insulator 5 in the form of a laminate comprising an inner layer 32 formed between a first outer layer 31, having the first main surface 21 of the insulator, and a second outer layer 33, having the second main surface 22 of the insulator. The insulator 5 is in the embodiment of figure 3 arranged as a pressplate at one end of a winding 4, e.g. comprising a plurality of windings, in the example of the figure a low voltage (LV) winding 30a, a high-voltage (HV) winding 30b and regulation winding 30c. Internal radial channels 6 are formed in the inner layer 32, e.g. by the means of radial spacers arranged between the first and second outer layers 31 and 33, typically fastened (e.g. glued) to the first and second outer layers. The radial channels allow cooling fluid to flow radially within the insulator 5, outward from the axial through hole 9 (as indicated by the arrows) or *vice versa*.

[0023] In the embodiment of figure 3, the channels 6 also comprise axial channels 34, each corresponding to a hole through the second outer layer 33 which open up into a radial channel. More generally, each of the axial channels 34

extends through at least one of the first and second main surfaces 21 and 22 and into at least one of the radial channels for allowing the cooling fluid to pass between the axial and radial channels. Looking at the example embodiment of figure 3, cooling fluid may flow through the axial channels until they intersect with radial channels and may then continue to flow through said radial channels (as indicated by the arrows in the figure) or *vice versa*. Thus, if the insulator 5 is an upper pressplate, the cooling fluid may flow upwards along or within the winding 4 until the fluid reaches the insulator 5, whereby the cooling fluid enters the insulator via the axial channels 34 and/or the axial through hole 9 into the radial channels which conducts the fluid flow outwards. Thus, efficient circulation of the cooling fluid may be obtained.

[0024] Internal channels 6 may reduce the mechanical strength of the insulator 5, why it may in some embodiments be advantageous to use a fibre-resin composite material in the insulator to improve mechanical strength without increasing the thickness of the insulator. Thus, the first outer layer 31 and/or the second outer layer 33 may be made of a composite material of fibres in a resin matrix. The inner layer 32 may e.g. comprise spacers fastened (e.g. glued) to the first and second outer layers to form internal (radial) channels 6, which spacers may be of the same composite material or of another suitable material e.g. cellulose-based such as pressboard or wood. The fibres are typically electrically insulating, e.g. synthetic fibres such as glass fibres. The resin is typically a hardenable resin such as a curable or thermosetting resin, e.g. an epoxy or polyester resin, preferably an epoxy resin.

[0025] According to an embodiment of the present invention, an electrical insulator 5, for an inductive device 1 is filled with an electrically insulating cooling fluid 3, the insulator defining a plurality of internal channels 6 for allowing the fluid 3 to flow there through to improve circulation of the fluid within the inductive device.

[0026] In some embodiments of the present invention, the insulator 5 is flat and the channels 6 comprise or consist of radial channels extending in a plane within the insulator, which plane is parallel to opposing first and second main surfaces 21 and 22 of the insulator. In some embodiments, the insulator 5 has an inner edge surface 24 defining a central through hole 9 through the insulator, said

through hole being perpendicular to the plane of the insulator, in which plane the radial channels 6 extend. In this case, each of the radial channels 6 may extend from an outer (outward facing) edge surface 23 of the insulator to the inner edge surface 24 of the insulator. Additionally or alternatively, in some embodiments, the channels 6 comprise axial channels 34, where each of the axial channels extends through at least one of the first and second main surfaces 21 and 22 and into at least one of the radial channels for allowing the cooling fluid to pass between the axial and radial channels (i.e. each of the axial channels has an inlet or outlet into/out from the a radial channel).

[0027] In some embodiments of the present invention, the insulator 5 is made of at least one electrically insulating material comprising a cellulose-based material, e.g. pressboard or wood laminate, preferably pressboard.

[0028] In some embodiments of the present invention, the insulator 5 is made of at least one electrically insulating material comprising a composite material of fibres, e.g. synthetic fibres such as glass fibres, in a resin matrix. The resin matrix may comprise a curable resin such as an epoxy or polyester resin, preferably epoxy.

[0029] In some embodiments of the present invention, the insulator 5 is a laminate wherein the channels 6 are formed by means of spacers 32 arranged between first and second outer layers 31 or 33 of the insulator. In some embodiments, the first outer layer 31 and/or the second outer layer 33 is made of a composite material of fibres, e.g. synthetic fibres such as glass fibres, in a resin matrix. The resin matrix may comprise a curable resin such as an epoxy or polyester resin, preferably epoxy. In some embodiments, the spacers 32 are formed by a continuous corrugated layer arranged between the first and second outer layers 31 or 33. In some other embodiments, the spacers 32 are formed by discrete ribs arranged between the first and second outer layers 31 or 33.

[0030] In some other embodiments of the present invention, the channels 6 are bores in the insulator 5, typically formed by drilling.

[0031] In some embodiments of the present invention, the insulator 5 is arranged as a pressplate at the top and/or bottom of the winding arrangement 4.

[0032] In some embodiments of the present invention, the inductive device 1 is a transformer or a reactor, preferably a transformer.

[0033] In some embodiments of the present invention, the cooling fluid is a liquid, e.g. a mineral oil or ester liquid, preferably a mineral oil.

[0034] Embodiments of the present invention may be described in any one of the following points.

[0035] 1. An electrical insulator 5, for an inductive device 1 filled with an electrically insulating cooling fluid 3, the insulator defining a plurality of internal channels 6 for allowing the fluid 3 to flow there through to improve circulation of the fluid within the inductive device.

[0036] 2. The insulator of point 1, wherein the insulator 5 is flat and the channels 6 comprise radial channels extending in a plane within the insulator which is parallel to opposing first and second main surfaces 21, 22 of the insulator.

[0037] 3. The insulator of point 2, wherein the insulator 5 has an inner edge surface 24 defining a central through hole 9 through the insulator, perpendicular to the plane of the insulator, and wherein each of the radial channels 6 extends from an outer edge surface 23 of the insulator to the inner edge surface 24 of the insulator.

[0038] 4. The insulator of point 2 or 3, wherein the channels 6 comprise axial channels 34, each of the axial channels extending through at least one of the first and second main surfaces 21, 22 and into at least one of the radial channels for allowing the cooling fluid to pass between the axial and radial channels.

[0039] 5. The insulator of any preceding point, wherein the insulator 5 is made of at least one electrically insulating material comprising a cellulose-based material, e.g. pressboard or wood laminate, preferably pressboard.

[0040] 6. The insulator of any preceding point, wherein the insulator 5 is made of at least one electrically insulating material comprising a composite material of fibres, e.g. synthetic fibres such as glass fibres, in a resin matrix, e.g. comprising a curable resin such as an epoxy or polyester resin, preferably epoxy.

[0041] 7. The insulator of any preceding point, wherein the insulator 5 is a laminate wherein the channels 6 are formed by means of spacers 32 arranged between first and second outer layers 31, 33 of the insulator.

[0042] 8. The insulator of point 7, wherein the first outer layer 31 and/or the second outer layer (33) is made of a composite material of fibres, e.g. synthetic fibres such as glass fibres, in a resin matrix, e.g. comprising a curable resin such as an epoxy or polyester resin, preferably epoxy.

[0043] 9. The insulator of point 7 or 8, wherein the spacers 32 are formed by a continuous corrugated layer.

[0044] 10. The insulator of point 7 or 8, wherein the spacers 32 are formed by discrete ribs.

[0045] 11. The insulator of any point 1-6, wherein the channels 6 are bores in the insulator 5.

[0046] 12. An inductive device 1 comprising:

a housing 2;

an electrically insulating cooling fluid 3 contained within the housing 2;

a winding arrangement 4 submerged in the cooling fluid 3; and

at least one insulator 5 of any preceding point.

[0047] 13. The inductive device of point 12, wherein the at least one insulator 5 is arranged as a pressplate at the top and/or bottom of the winding arrangement 4.

[0048] 14. The inductive device of point 12 or 13, wherein the inductive device 1 is a transformer or a reactor, preferably a transformer.

[0049] 15. The inductive device of any point 12-14, wherein the cooling fluid is a liquid, e.g. a mineral oil or ester liquid.

[0050] The present disclosure has mainly been described above with reference to a few embodiments. However, as is readily appreciated by a person skilled in the art, other embodiments than the ones disclosed above are equally possible within the scope of the present disclosure, as defined by the appended claims.

CLAIMS

1. An electrical insulator (5), for an inductive device (1) filled with an electrically insulating cooling fluid (3), the insulator defining a plurality of internal channels (6) for allowing the fluid (3) to flow there through to improve circulation of the fluid within the inductive device,

wherein the insulator (5) is flat and the channels (6) comprise radial channels extending in a plane within the insulator which is parallel to opposing first and second main surfaces (21, 22) of the insulator,

wherein the channels (6) comprise axial channels (34), each of the axial channels extending through at least one of the first and second main surfaces (21, 22) and into at least one of the radial channels for allowing the cooling fluid to pass between the axial and radial channels

and wherein the insulator (5) is made of at least one electrically insulating material comprising a composite material of fibres, e.g. synthetic fibres such as glass fibres, in a resin matrix, e.g. comprising a curable resin such as an epoxy or polyester resin, preferably epoxy.

2. The insulator of claim 1, wherein the insulator (5) has an inner edge surface (24) defining a central through hole (9) through the insulator, perpendicular to the plane of the insulator, and wherein each of the radial channels (6) extends from an outer edge surface (23) of the insulator to the inner edge surface (24) of the insulator.

3. The insulator of any preceding claim, wherein the insulator (5) is made of at least one electrically insulating material comprising a cellulose-based material, e.g. pressboard or wood laminate, preferably pressboard.

4. The insulator of any preceding claim, wherein the insulator (5) is a laminate wherein the channels (6) are formed by means of spacers (32) arranged between first and second outer layers (31, 33) of the insulator.

5. The insulator of claim 4, wherein the first outer layer (31) and/or the second outer layer (33) is made of a composite material of fibres, e.g. synthetic fibres such as glass fibres, in a resin matrix, e.g. comprising a curable resin such as an epoxy or polyester resin, preferably epoxy.

6. The insulator of claim 4 or 5, wherein the spacers (32) are formed by a continuous corrugated layer.

7. The insulator of claim 4 or 5, wherein the spacers (32) are formed by discrete ribs.

8. The insulator of any claim 1-3, wherein the channels (6) are bores in the insulator (5).

9. An inductive device (1) comprising:

a housing (2);

an electrically insulating cooling fluid (3) contained within the housing (2);

a winding arrangement (4) submerged in the cooling fluid (3); and

at least one insulator (5) of any preceding claim.

10. The inductive device of claim 9, wherein the at least one insulator (5) is arranged as a pressplate at the top and/or bottom of the winding arrangement (4).

11. The inductive device of claim 9 or 10, wherein the inductive device (1) is a transformer or a reactor, preferably a transformer.

12. The inductive device of any claim 9-11, wherein the cooling fluid is a liquid, e.g. a mineral oil or ester liquid.

1/1

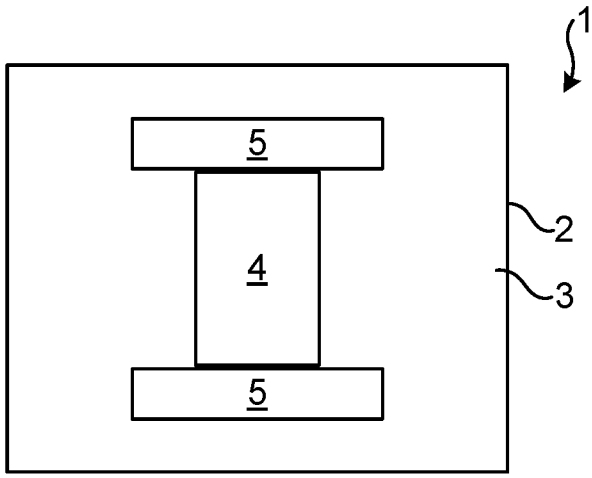


Fig. 1

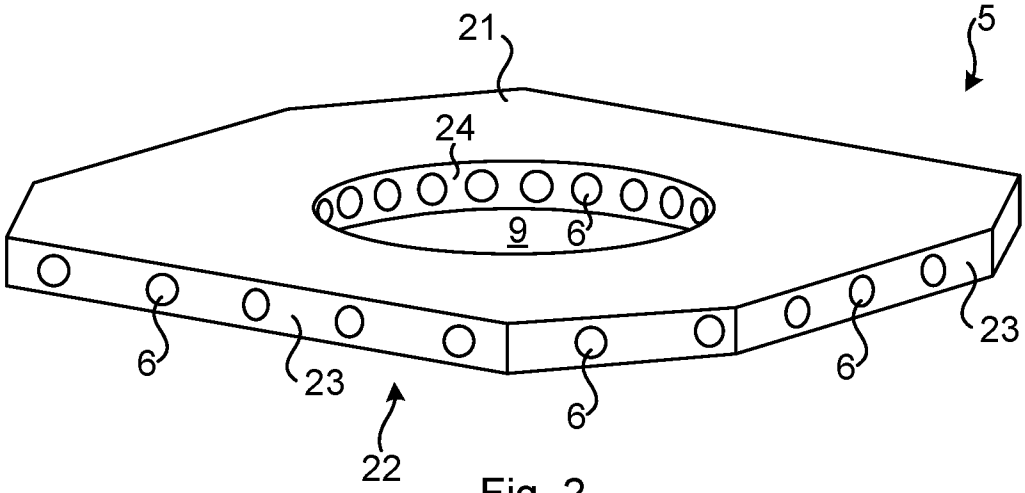


Fig. 2

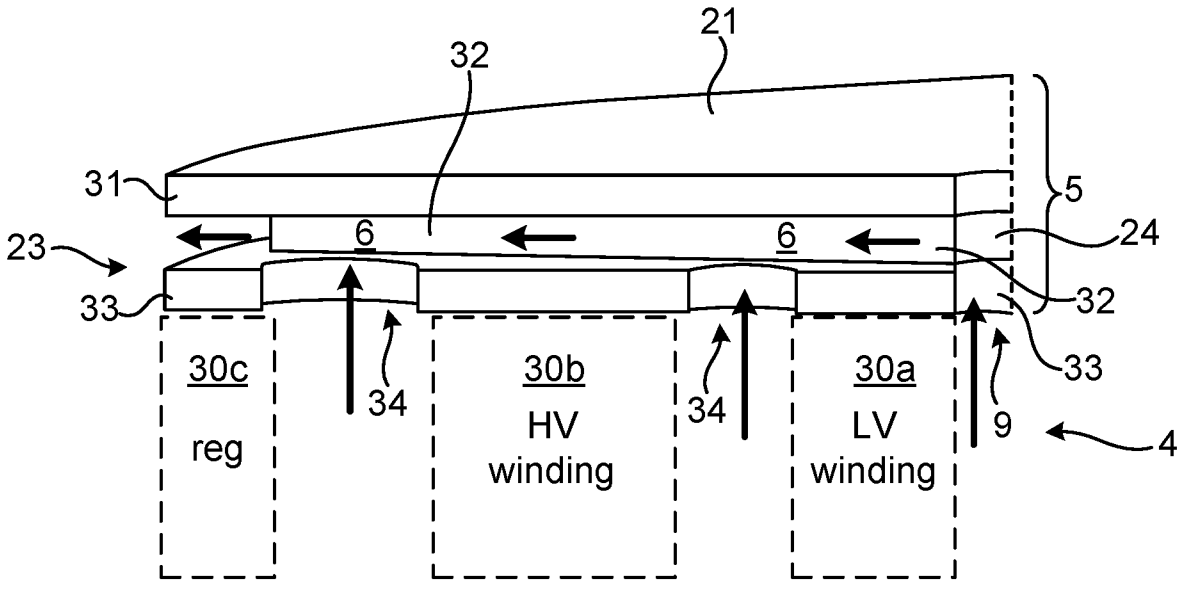


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2021/056379

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01F27/12 H01F27/30 H01F27/32
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 2 602 800 A1 (ABB TECHNOLOGY AG [CH]) 12 June 2013 (2013-06-12) cited in the application abstract paragraph [0001] - paragraph [0005]; figure 1 paragraph [0024] - paragraph [0026]; figure 2 paragraph [0027]; figure 3 paragraph [0020] - paragraph [0029] -----	1-12
Y	EP 2 747 097 A1 (ABB TECHNOLOGY LTD [CH]) 25 June 2014 (2014-06-25) abstract paragraph [0002] - paragraph [0006] paragraph [0010] - paragraph [0015] claims 1,2,4 -----	1-12

-/--

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
26 April 2021	10/05/2021

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Warneck, Nicolas

1

Form PCT/ISA/210 (second sheet) (April 2005)

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2015/213940 A1 (MIYAMOTO NAOYA [JP] ET AL) 30 July 2015 (2015-07-30) abstract paragraph [0038] - paragraph [0040]; figure 7	9
A	US 1 317 003 A (CREIGHTON) 23 September 1919 (1919-09-23) cited in the application page 1, line 67 - page 2, line 88; figures 1,2	1
A	EP 3 312 856 A1 (STARKSTROM GERAETEBAU GMBH [DE]) 25 April 2018 (2018-04-25) cited in the application abstract paragraph [0052] - paragraph [0056]; figure 9	1

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2021/056379

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2602800 A1	12-06-2013	CN 103975399 A	06-08-2014
		EP 2602800 A1	12-06-2013
		ES 2453979 T3	09-04-2014
		US 2014327506 A1	06-11-2014
		WO 2013083242 A1	13-06-2013
EP 2747097 A1	25-06-2014	AU 2013361806 A1	09-07-2015
		BR 112015014037 A2	11-07-2017
		CN 105229758 A	06-01-2016
		EP 2747097 A1	25-06-2014
		HU E043610 T2	28-08-2019
		PL 2747097 T3	30-08-2019
		US 2015332835 A1	19-11-2015
		WO 2014095399 A1	26-06-2014
US 2015213940 A1	30-07-2015	JP 2015141914 A	03-08-2015
		TW 201535437 A	16-09-2015
		US 2015213940 A1	30-07-2015
US 1317003 A	23-09-1919	NONE	
EP 3312856 A1	25-04-2018	EP 3312856 A1	25-04-2018
		WO 2018072964 A1	26-04-2018