

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 December 2007 (27.12.2007)


PCT

(10) International Publication Number
WO 2007/148075 A1

- (51) International Patent Classification:
B32B 5/26 (2006.01) *E04H 15/54* (2006.01)
- (21) International Application Number:
PCT/GB2007/002284
- (22) International Filing Date: 20 June 2007 (20.06.2007)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0612266.7 21 June 2006 (21.06.2006) GB
- (71) Applicant (for all designated States except US): **SAFE-HOUSE HABITATS (SCOTLAND) LIMITED** [GB/GB]; Units 4&5, Bowbridge Works, Dundee, DD3 7RF (GB).
- (72) Inventor: **WATTERS, Philip, Graham**; Ben-Forth, Park Avenue, Brightons, Falkirk, FK2 0JE (GB).
- (74) Agents: **NAISMITH, Robert** et al.; Marks & Clerk, 19 Royal Exchange Square, Glasgow G1 3AE (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: IMPROVED PANEL

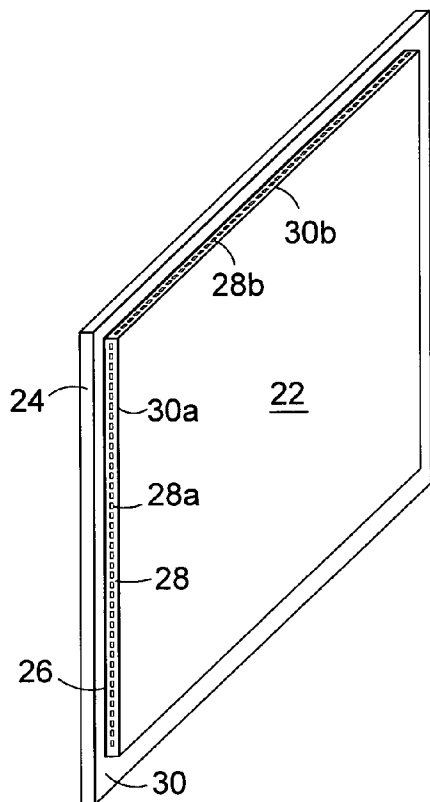

(57) Abstract: The present invention relates to a panel (20) for use in the assembly of a modular hot work habitat (10) so as to form an enclosure to facilitate hot working. The panels (20) comprise a first layer of flexible structural material (22), and a second layer of flexible fireproof material (24) fixed to the structural layer. A habitat (10) comprising a plurality of interconnected panels (20) is described.

WO 2007/148075 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Improved Panel

FIELD OF THE INVENTION

The present invention relates to an improved panel,
5 particularly to an improved panel for use in the
construction of habitats for surrounding an area in which
hot work is to take place. The invention also relates to a
habitat constructed from the improved panels. The
invention also relates to an improved habitat structure and
10 to a refuge for use in hazardous working environments.

BACKGROUND OF THE INVENTION

Conducting "hot work" such as welding, cutting or
grinding generates heat and sparks. In certain
15 environments hot working can be extremely hazardous,
particularly where there may be combustible gases,
particularly hydrocarbons, present, for example on oil/gas
search and production rigs and facilities, oil refineries,
chemical plants and the like.

20 Hot work habitats (or enclosures) permit hot work to
be conducted in such environments. A hot work habitat is
an enclosure which can be built around the area in which
hot work is to be performed. Examples of habitats or
enclosures are disclosed variously in US 5018321, US
25 5101604, US 3452764. Once built, some habitats can be over
pressurised, that is the air pressure within the habitat
can be raised above the air pressure external to the
habitat to prevent the ingress of potentially flammable
gases into the habitat.

30 Conventionally, habitats are made from galvanised
sheeting and wooden panelling which can be lined around the
floor area with fire resistant matting. However these

habitats are inflexible and cumbersome, and flexible, generally one piece, dome structures such as US 5018321 and US 5101604 were developed. Since then modular systems comprising flexible flame retardant fabric panels have been developed. Modular habitats have drawbacks however; firstly, in the event of a fire breaking out within the habitat, a modular habitat is not designed to contain the fire; the flame retardant fabric panels only being capable of withstanding temperatures of up to approximately 70°C. Secondly, if the fabric is breached or torn, an equalisation of pressure can result with the possible consequence of an ingress of potentially combustible gases. Such a breach can occur, for example, by performing hot work close to the flame retardant fabric such that a continual shower of sparks from grinding operations or a naked flame burns a hole in the material. The dome structures referred to above are also cumbersome to install and to fireproof adequately. A single breach in the dome renders the whole habitat unusable. Furthermore fire blankets are generally difficult to secure and install in a vertical orientation.

Whilst it would be desirable to use fireproof material instead of flame retardant fabric for the panels fireproof material is generally not suitable for stitching i.e. they cannot readily be stitched together to form panel structures or have zips or other fasteners attached thereto to allow panels to be connected together. Whilst it is possible to stitch fireproof materials specialist threads are required to maintain the fireproof integrity of the fireproof panel. It will be appreciated that any connecting means must have at least the same fireproof characteristics as the panels or the integrity thereof

-3-

would be diminished in the event of a fire. One type of thread that can be used to stitch fireproof panels is a quartz based thread but such threads are generally extremely brittle and thus do not lend themselves to use in the stitching of fireproof panels for use in habitats as the constant handling of the panels would result in the thread breaking.

It is an object of at least one embodiment of the present invention to provide an improved panel for a hot working habitat.

SUMMARY OF THE INVENTION

According to a first aspect of the present invention there is provided a panel for use in the assembly of a modular hot work habitat, the panel comprising:

a layer of flexible structural material, and
a layer of flexible fireproof material fixed to the layer of structural material.

Utilising two layers of flexible material to form a composite panel provides structural integrity, reducing the possibility of the panel, in use, being torn. Additionally, providing a fireproof layer prevents breach of the habitat by sparks or other hot material, and increases the chances of a fire within the habitat being contained.

Preferably, the layers are arranged to lie in parallel planes, in a laminated structure. Preferably, the laminated panel is flexible.

Preferably, the layer of structural material is a flame retardant material.

Preferably, the flame retardant material is a flame retardant fabric.

-4-

Most preferably, the flame retardant fabric is PVC coated woven polyester fabric coated with plasticized polyvinylchloride in the range of 10-40%; polyethyleneterephtalate in the range of 20-80%; and di-
5 isononylphtalate in the range of 0-30%, thereby providing temperature resistance in the range of -30°C to +70°C.

Preferably, the fireproof material layer is a fireproof fabric.

Most preferably, the fireproof fabric is silica
10 chemically treated to create an amorphous silica coating on each side with a high temperature resisting silicone rubber.

Preferably the fireproof comprises a base fabric having a weight in the region of 400g m² - 700g m². The
15 weight of the coated fabric is in the range of from 800g m² - 1200g m², typically 1075g m² and has a thickness in the range of from 0.5mm to 1mm, typically 0.65mm.

Preferably, the layers are fixed by being adhered to each other by a silicone adhesive. Silicone adhesives are
20 particularly useful as silicone adhesives have a temperature rating that is generally not less than the temperature rating of the fireproof fabric and tend not to burn, therefore assisting in maintaining the integrity of the panel in the event of fire. Other types of flame
25 retardant adhesives may be used such as SPRAYTACK™ adhesive by 3M or flame retardant tapes.

Alternatively, or indeed preferably, there may be provided mechanical fixing means to fix two panels to each other in addition to adhering by an adhesive. Typical
30 mechanical fixings may include rivets, nuts, bolts and the like and mechanical fixings are particularly suitable if the panel is used in a vertical orientation.

Preferably, the fireproof material contains silicone.

Preferably, the panel is arranged such that, in use, the fireproof layer forms part of an internal surface of a habitat. In the event of a fire within the habitat, damage
5 to the habitat is minimised if the fireproof layer forms part of an internal surface of the habitat, if the habitat remains structurally intact the possibility of containing the fire within the habitat is increased.

Preferably, the panel includes attaching means to
10 permit the panel, in use, to be attached to an adjacent panel or panels.

Preferably, the attaching means are fitted to the structural material layer.

Preferably, the structural material layer includes an
15 edge and the attaching means are fitted to the edge of the structural material layer.

Preferably, the attaching means extend around the entire perimeter of the structural material layer.

Preferably, the attaching means is at least one zip
20 portion adapted to engage with a complementary zip portion fitted to a second panel. Other attaching means which could be used include hooks and eyelets, press studs, turn buttons, lift-a-dot, and nuts and bolts.

Preferably, the fireproof material layer has a greater
25 surface area than the structural material layer.

Most preferably, a portion of the fireproof material layer extends beyond the edge of the structural material layer.

Preferably, the portion extends beyond the edge of the
30 structural material layer around the entire perimeter of the structural material layer.

Preferably, the fireproof material layer portion extends sufficiently to protect, in use the attaching means. Providing a portion of fireproof material to cover the attaching means protects the attaching means from a
5 fire, assisting in maintaining the integrity of an assembled habitat.

Preferably, in use when the panel is attached to an adjacent panel, adjacent fireproof material layer portions overlap.

10 Preferably, the flame retardant layer of the panel further includes an extended portion formed and arranged to cover the attaching means.

Preferably, the at least extended portion in the form of a protection strip which is releasably attachable to the
15 structural material layer.

Preferably, the extended portion is releasably attachable to the structural material layer by means of a hook and loop fastener or other mechanical fixings as described above.

20 Preferably, the/each extended portion is flame retardant.

Preferably, the/each extended portion is adapted to cover the attaching means.

25 Preferably, the/each extended portion is adapted, in use, to attach to adjacent connected panels. In use, the attaching means, for example a zip, is enclosed on one side by the overlapping first and second fireproof material layer portions and on the other side by the extended portion. Such an arrangement assists in sealing an
30 assembled habitat facilitating over-pressurising of the habitat.

-7-

Preferably, the fireproof material layer is adapted to withstand temperatures to in excess of 1200°C, typically 1000°C though materials that are fireproof to higher temperatures e.g. 1600°C, may be employed.

5 According to a second aspect of the present invention there is provided a modular hot work habitat comprising:
a plurality of connected panels, each panel comprising:

10 a layer of flexible structural material, and
a layer of flexible fireproof material fixed to the layer of structural material.

Preferably, the panels are arranged such that the fireproof material layers face inwards towards the interior of the habitat.

15 According to a third aspect of the present invention there is provided a kit for assembling into a modular hot work habitat, the kit comprising:

20 a plurality of panels, each panel comprising:
a layer of flexible structural material, and
a layer of flexible fireproof material fixed to the layer of structural material.

25 In yet another respect the present invention provides a refuge suitable for use in environments where there is the possibility of fire comprising an inner tent like structural assembly, said structural assembly comprising flexible panels formed and arranged for supporting, on its outside, fireproof material fixed thereto.

30 It will be understood some of the features depending from the first aspect of the invention may be equally applicable to the second and subsequent aspects, and are not repeated here for brevity and clarity.

Preferably the habitat according to any aspect of the present invention includes an airlock, preferably a fireproof airlock, formed and arranged so as to be securable to said panels. Additionally there may be provided a support structure such as scaffolding for supporting a said habitat according to the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

An embodiment of the present invention will now be described with reference to the accompanying drawings in which:

Figure 1 is a schematic perspective view of a hot work habitat comprising a plurality of connected panels according to an embodiment of the present invention;

Figure 2 is a schematic perspective one of the panels shown on Figure 1;

Figure 3 is a side view of the panel of Figure 2;

Figure 4 is an enlarged view of part of Figure 3; and

Figure 5 is a section view of part of a wall of the habitat of Figure 1, taken along line A-A shown on Figure 1.

DETAILED DESCRIPTION OF THE DRAWINGS

Referring firstly to Figure 1, there is shown a habitat, generally indicated by reference numeral 10, comprising a plurality of connected panels according to an embodiment of the present invention. The habitat 10 is designed to be assembled around an area in which hot work is to take place.

The connected panels 20 are supported by a structural frame 12 and the habitat 10 also includes an access door 14 for accessing the habitat interior.

One of the panels 20 can be seen more clearly in Figures 2, 3 and 4; perspective, side and enlarged side views of a panel 20. The panel 20 comprises a flame retardant structural layer (22) made from Sio-Line FR725 material available from Sioen Coating Distribution n.v. of Belgium, and a fireproof layer made from Fortasil SKSS 600R distributed in the UK by TBA Textiles Ltd. The fireproof layer 24 is secured to the structural layer 22 by a silicone adhesive 26 such as AS1606 by ACC Silicones Ltd. The panel 20 is approximately 2m by 2m.

In use with the habitat 10, the fireproof layer 24 faces inwardly towards the habitat interior to assist in containing any fire which may break out within the habitat 10 during hot working. The flame retardant structural layer 22 faces outwards from the habitat 10 to protect the habitat 10 from heat generated externally of the habitat 10. The composite arrangement of the panel 20 makes the panel 20 better able to withstand activities which might otherwise breach the panel 20, such as being exposed to a sharp edge or a concentrated shower of sparks.

The flame retardant structural layer 22 includes attaching means 28 along its edges 30. The attaching means 28 in the case of the panel 20 is a series of zip fasteners 28; one half of a first zip fastener 28a is fitted along a first edge 30a, one half of a second zip fastener 28b is fitted along a second edge 30b, etc. Each half zip fastener 28a, 28b is adapted to engage with a complementary half zip fastener (not shown) on an adjacent panel.

As can be seen most clearly from Figure 2, the fireproof layer 24 includes a portion 32 which extends beyond the flame retardant structural layer edge 30. The purpose of this extending portion 32 is to protect the zip

-10-

fasteners 28, as will now be explained with reference to Figure 5.

Figure 5 is a section view of part of a wall of the habitat of Figure 1, taken along line A-A shown on Figure 1. Figure 5 shows parts of two panels 20x, 20y which are connected by a zip fastener 28 comprising zip halves 28x,28y, each half zip 28x,28y fitted to a respective structural layer 22x,22y of the panels 20x,20y. The extending portions 32x,32y of the fireproof layers 24x,24y overlap and cover the zip fastener 28. As explained above, the fireproof layers 24x,24y face inwardly towards the habitat interior. The overlapping extending portions 32x,32y cover the zip fastener 28 protecting the zip fastener 28 in the event of a fire breaking out within the habitat 10.

Also visible in Figure 5 (and Figure 1), is a protective strip 34. The protective strip 34 is made of flame retardant material and protects the external surface of the zip fastener 28 from heat arising externally of the habitat 10. The protective strip 34 is attached to the panels 20x,20y by hook and loop fastenings 36x,36y.

The presence of the overlapping portions 32 and the protective strip 34 also assist in providing a seal around the edges of each panel 20. The panels themselves are impermeable to hydrocarbon gases. Once assembled the habitat 10 can be over-pressurised, that is the air pressure within the habitat 10 can be raised above the air pressure externally of the habitat 10. Such an arrangement prevents combustible gases which may be circulating externally of the habitat 10 from entering the habitat and potentially being ignited.

-11-

Various modifications may be made to the embodiments of the improved panel described above without departing from the scope of the invention. For example, although the panel 20 is described as having a single structural layer and a single fireproof layer, there could be multiple layers of each material. Furthermore, although the described embodiment is arranged with the fireproof layer 24 facing inwards towards the interior of the habitat 10, in certain circumstances it may be desirable for the fireproof layer 24 to face outwards.

It will be appreciated that the principal advantage of the above described embodiments is that a habitat can be assembled which is highly resistant to fire and is structurally stronger than inflatable habitats.

15

-12-
Claims

1. A panel (20) for use in the assembly of a modular hot work habitat (10), characterised in that the panel
5 comprises:

a layer of flexible structural material (22), and
a layer of flexible fireproof material (24) fixed to
the layer of structural material.

2. A panel (20) as claimed in claim 1 wherein the
10 layers (22, 24) are arranged to lie in parallel planes, in
a laminated structure.

3. A panel (20) as claimed in claim 1 or claim 2
wherein the layer of structural material (22) is a flame
retardant material.

4. A panel (20) as claimed in claim 3 wherein the
15 flame retardant material (24) is a flame retardant fabric.

5. A panel (20) as claimed in any one of claims 1 to 4
wherein the fireproof material layer is a fireproof fabric.

6. A panel (20) as claimed in any one of claims 1 to 5
20 which is flexible.

7. A panel (20) as claimed in any one of claims 1 to 6
wherein the layers are fixed by being adhered to each other
by a silicone adhesive (26).

8. A panel (20) as claimed in any one of claims 5 to 8
25 arranged such that, in use, the fireproof layer forms part
of an internal surface of a habitat (10).

9. A panel (20) according to any one of claims 1 to 8
which is formed and arranged, in use, to be attached to an
adjacent panel or panels by attaching means (28).

10. A panel (20) according to any one of claims 1 to 9
30 wherein the attaching means (28) are fitted to the
structural material layer (22).

11. A panel (20) according to claim 9 or 10 wherein the attaching means is at least one zip portion (28a) adapted to engage with a complementary zip portion (28b) fitted to a second panel.
- 5 12. A panel (20) according to any one of claims 1 to 11 wherein the fireproof material layer has a greater surface area than the structural material layer such that a portion of the fireproof material layer (24) extends beyond the edge (30) of the structural material layer (22).
- 10 13. A panel (20) as claimed in any one of claims 9 to 12 wherein the flame retardant layer of the panel (20) includes an extended portion (32) formed and arranged to cover the attaching means.
- 15 14. A modular hot work habitat (10) comprising:
a plurality of interconnected panels (20) according to any one of claims 1 to 13 together with an air lock (14), said plurality of panels forming an enclosure.
- 20 15. A modular hot work habitat (10) according to claim 14 wherein the panels (20) are arranged such that the fireproof material layers face inwards towards the interior of the habitat.
- 25 16. A kit for assembling into a modular hot work habitat, the kit comprising:
a plurality of panels (20) according to any one of claims 1 to 14 together with an air lock (14).
- 30 17. A refuge suitable for use in environments where there is the possibility of fire comprising an inner tent like structural assembly, said structural assembly comprising flexible panels (20) formed and arranged for

-14-

supporting, on its outside, fireproof material fixed thereto.

1/2

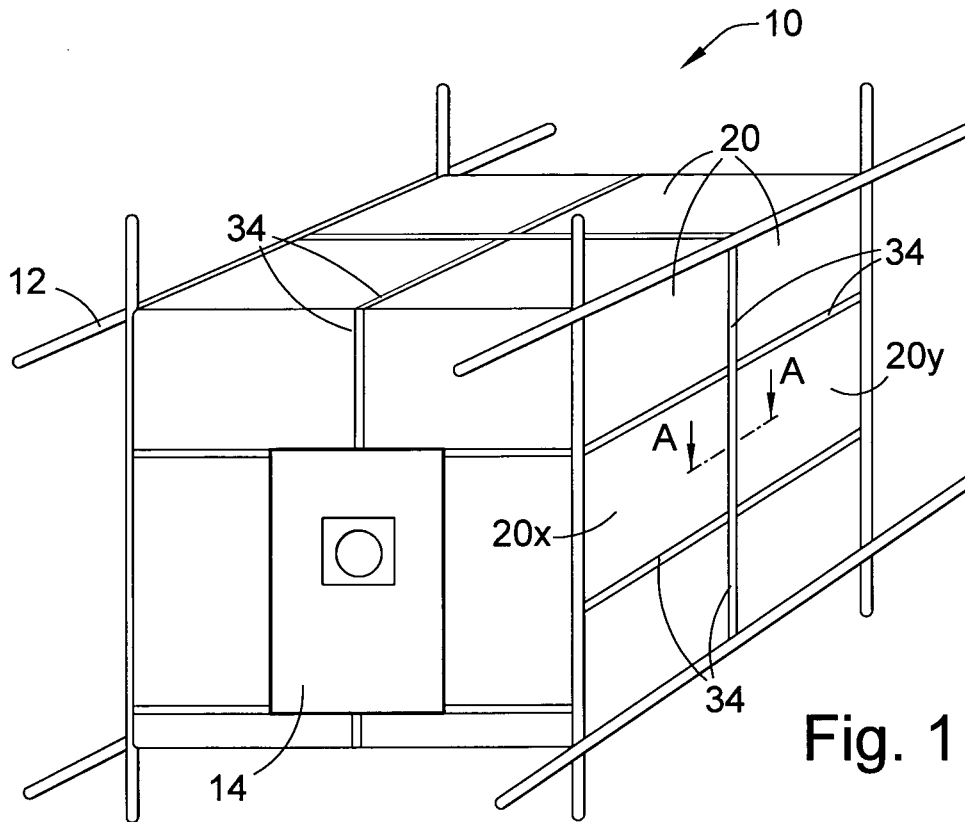


Fig. 1

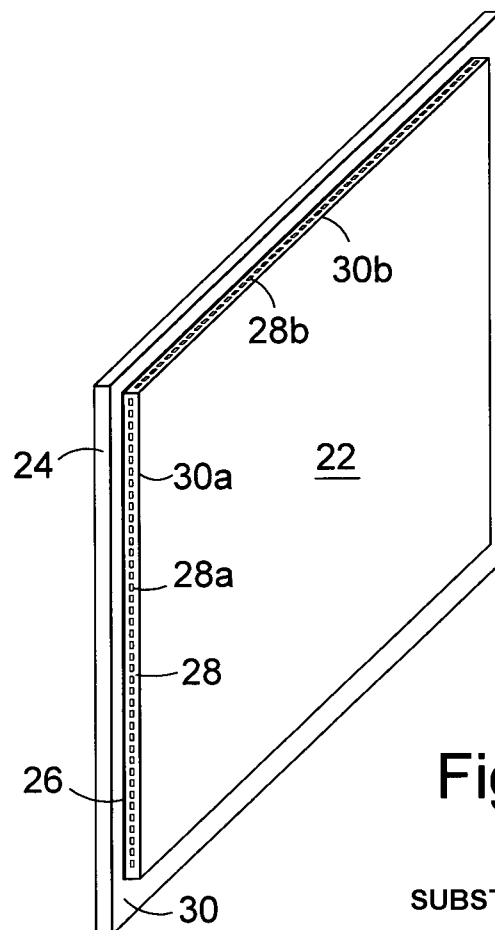


Fig. 2

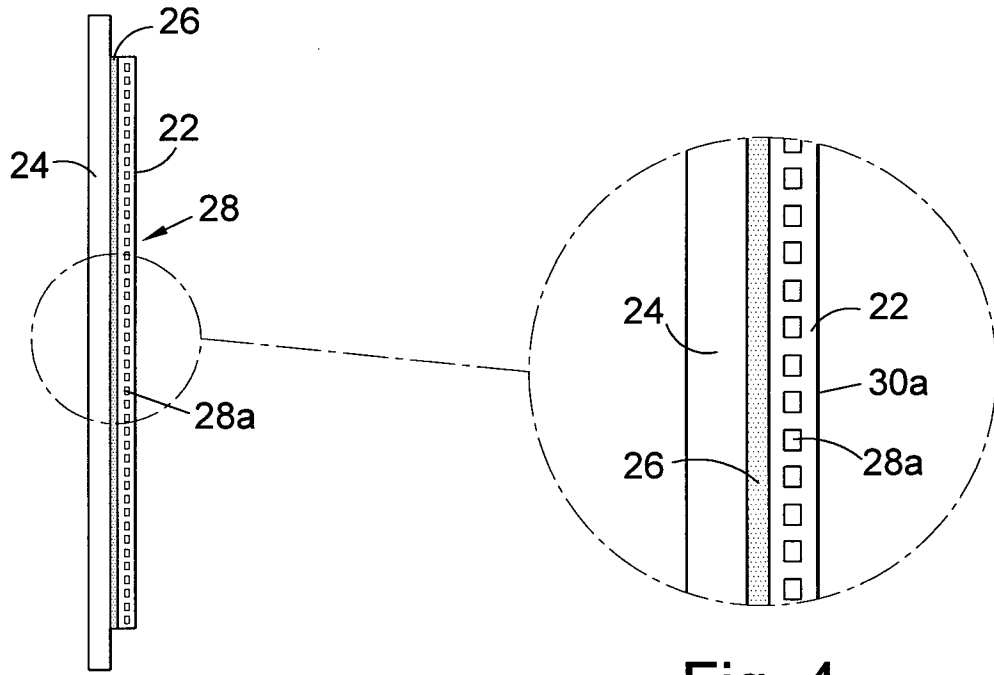


Fig. 3

Fig. 4

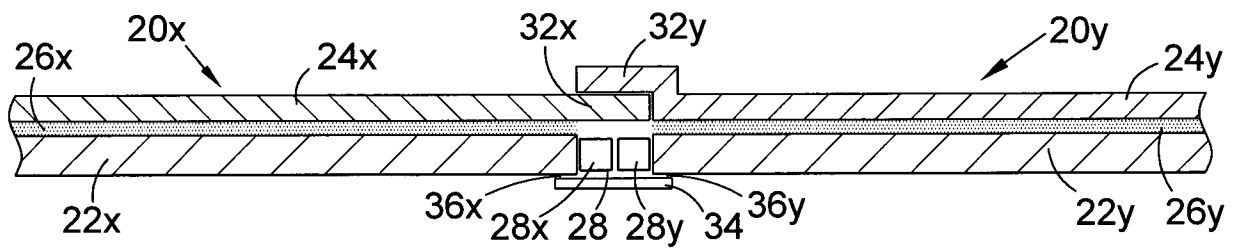


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2007/002284

A. CLASSIFICATION OF SUBJECT MATTER
INV. B32B5/26 E04H15/54

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B32B E04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/136760 A1 (ANDERSON LESLIE L [US] ET AL ANDERSON LESLIE LEAH [US] ET AL) 23 June 2005 (2005-06-23)	1-6, 8, 9, 17
Y	paragraphs [0002], [0034] - [0038], [0041] - [0046], [0049]; figures 1, 2	10, 11, 14-16
X	US 4 467 005 A (PUSCH GUNTER [DE] ET AL) 21 August 1984 (1984-08-21) column 2, lines 36-62; figures 1, 2	1-7
Y	US 3 715 843 A (BALLINGER V) 13 February 1973 (1973-02-13) column 15, line 61 - column 16, line 13	10, 11
Y	EP 1 541 338 A1 (ICOPAL PLASTIC MEMBRANES AS [DK]) 15 June 2005 (2005-06-15) paragraph [0099]; figure 15a	10, 11
	-/--	

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"C" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

25 September 2007

Date of mailing of the international search report

04/10/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5618 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vratsanou, Violandi

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2007/002284

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 018 321 A (WARDLAW III LOUIS J [US]) 28 May 1991 (1991-05-28) cited in the application column 3, lines 20-32; figure 1 -----	14-16
A	US 6 013 586 A (MCGHEE JAMES M [US] ET AL) 11 January 2000 (2000-01-11) -----	
A	WO 02/18692 A (JOHN BOYLE & COMPANY INC [US]; WHITE WILLIAM W [US]; BELL JOHN BOYLE []) 7 March 2002 (2002-03-07) -----	
A	EP 0 609 600 A1 (GRANITEVILLE CO [US] AVONDALE MILLS INC [US]) 10 August 1994 (1994-08-10) -----	
A	DE 43 04 079 C1 (MEHLER TECH TEXTILIEN GMBH [DE]) 26 May 1994 (1994-05-26) -----	
A	US 4 500 592 A (LEE CALVIN K [US] ET AL) 19 February 1985 (1985-02-19) -----	
A	US 5 660 916 A (SOFIE MICHAEL P [US] ET AL) 26 August 1997 (1997-08-26) -----	
A	DE 295 15 205 U1 (WINKELMANN FRANK [DE]) 23 November 1995 (1995-11-23) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2007/002284

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2005136760	A1	23-06-2005	NONE	
US 4467005	A	21-08-1984	CA 1217370 A1 DE 3135271 A1 EP 0074028 A2	03-02-1987 24-03-1983 16-03-1983
US 3715843	A	13-02-1973	NONE	
EP 1541338	A1	15-06-2005	NONE	
US 5018321	A	28-05-1991	EP 0455328 A1 ID 962 B	06-11-1991 27-09-1996
US 6013586	A	11-01-2000	NONE	
WO 0218692	A	07-03-2002	AU 8684701 A	13-03-2002
EP 0609600	A1	10-08-1994	AT 184666 T AU 655568 B2 AU 4164893 A CA 2107972 A1 CN 1090613 A DE 69326433 D1 DE 69326433 T2 DK 609600 T3 ES 2138994 T3 FI 933145 A GR 3032143 T3 IL 106178 A JP 2693359 B2 JP 6235172 A MX 9304287 A1 NZ 248247 A	15-10-1999 22-12-1994 04-08-1994 02-08-1994 10-08-1994 21-10-1999 31-05-2000 17-04-2000 01-02-2000 02-08-1994 27-04-2000 10-03-1998 24-12-1997 23-08-1994 31-08-1994 21-12-1995
DE 4304079	C1	26-05-1994	EP 0610873 A2	17-08-1994
US 4500592	A	19-02-1985	NONE	
US 5660916	A	26-08-1997	AU 1447195 A WO 9518189 A1 US 5472771 A	17-07-1995 06-07-1995 05-12-1995
DE 29515205	U1	23-11-1995	NONE	