Innovation, Sciences et Développement économique Canada
Office de la Propriété Intellectuelle du Canada

Innovation, Science and Economic Development Canada
Canadian Intellectual Property Office

CA 3055488 C 2022/04/19

(11)(21) 3 055 488

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(86) Date de dépôt PCT/PCT Filing Date: 2018/03/27
(87) Date publication PCT/PCT Publication Date: 2018/11/15
(45) Date de délivrance/Issue Date: 2022/04/19
(85) Entrée phase nationale/National Entry: 2019/09/05
(86) N° demande PCT/PCT Application No.: EP 2018/057764
(87) N° publication PCT/PCT Publication No.: 2018/206194
(30) Priorité/Priority: 2017/05/12 (DE10 2017 110 426.7)

(51) Cl.Int./Int.Cl. *F42B 14/02* (2006.01)


(72) Inventeurs/Inventors:
PAESCH, ALEXANDER, DE;
DAU, OLE, DE;
SACKARNDT, ALFONS, DE

(73) Propriétaire/Owner:
RHEINMETALL WAFFE MUNITION GMBH, DE

(74) Agent: SMART & BIGGAR IP AGENCY CO.

(54) Titre : OBTURATEUR, QUI EST UNE PARTIE INTEGRANTE DE LA CEINTURE DE PROJECTILE D'UN PROJECTILE D'ARTILLERIE

(54) Title: OBTURATOR, WHICH IS AN INTEGRAL PART OF THE DRIVING BAND ON AN ARTILLERY PROJECTILE

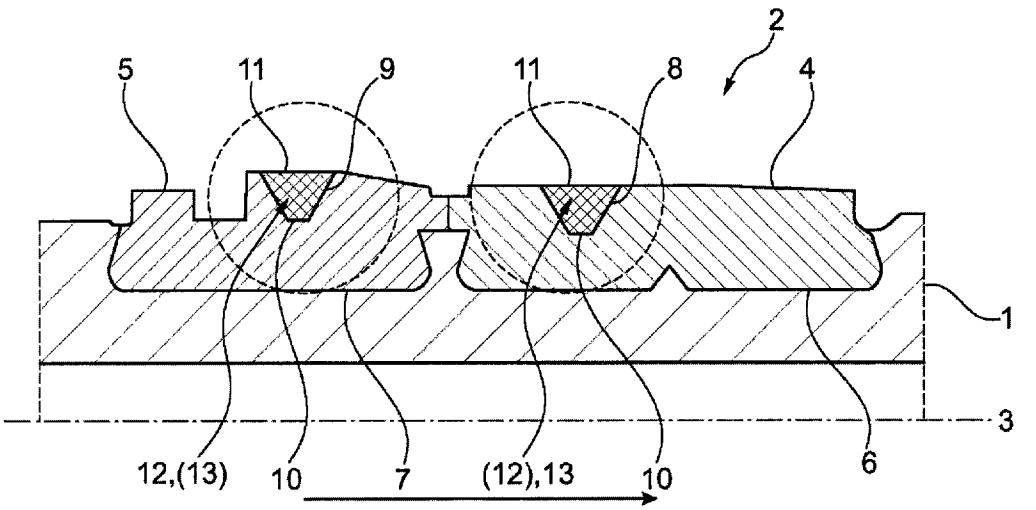

(57) Abrégé/Abstract:
The invention relates to a spin-stabilized artillery projectile (1) having at least one driving band (2) and at least one obturator (12, 13), wherein the driving band (2) contains at least one compensating groove (8, 9), and wherein the at least one obturator (12, 13) is arranged in the compensating groove (8, 9) of the driving band (2). The cross-section of the compensating groove (8, 9) is preferably trapezoidal, but can also be rectangular or square. As a result, a complete detachment of the obturator (12, 13) is achieved and residues are avoided.

Abstract

The invention relates to a spin-stabilized artillery projectile (1) having at least one driving band (2) and at least one obturator (12, 13), wherein the driving band (2) contains at least one compensating groove (8, 9), and wherein the at least one obturator (12, 13) is arranged in the compensating groove (8, 9) of the driving band (2). The cross-section of the compensating groove (8, 9) is preferably trapezoidal, but can also be rectangular or square. As a result, a complete detachment of the obturator (12, 13) is achieved and residues are avoided.

DESCRIPTION

Obturator, which is an Integral Part of the Driving Band on an Artillery Projectile

The invention relates to a spin stabilized projectile, in particular an artillery projectile with a driving band and with a sealing band, i.e. an obturator.

An obturator has the function of a sealing ring, with which its full sealing performance is only achieved under appropriate pressure loading. The technical requirements for such a component are predetermined and binding.

When passing through the barrel, due to the design conditions, a temporary form-fitting connection is made of rearward displaced driving band material with an obturator (ring). However, this form-fitting connection is usually removed mechanically, primarily by the centrifugal force that becomes effective when passing through the muzzle, but this is not sufficiently reliable, especially with a small charge and at the operating corner temperature. This can sometimes lead to significant losses in accuracy.

The susceptibility of the known solutions in the automatic flow of ammunition (in the loading process) is significant. Obturator (ring) damage occurs up to the destruction of the obturator. The disadvantage is that the resulting loose fragments of the obturator can block the gun mechanism. Also in the manual flow of ammunition, before the loading process, pre-damage of the obturator also occurs equally frequently. This is often due to the fact that when a driving band protection ring is removed, the obturator can also be negatively affected.

DE 669 858 shows an artillery projectile with a driving band pressed into an annular groove of the projectile shell.

Artillery ammunition is known from EP 2 529 180 B1 that has a rear driving band that is embodied in multiple parts. The partial driving bands are inserted into separate dovetail grooves, such that the partial driving bands adjoin each other directly. This better distributes the centrifugal forces that occur. The partial driving bands are designed to allow the material to flow during the passage through the barrel.

A sealing ring of DE 20 2014 005 442 U1 is disposed at the rear of the driving band and is held in an outer groove of the projectile shell.

From DE 198 55 536 A1 a spin-stabilized artillery projectile is known that has a metallic driving band and a sealing ring disposed to the rear of the driving band to transfer the spin to the projectile. In order to safely prevent damage to or destruction of or tearing off of the sealing ring when inserting the projectile into the loading chamber of the corresponding weapon, the sealing ring is designed as a metal ring, which is arranged in an annular groove of the projectile in such a way that it can rotate freely relative to the projectile. This solution has proven itself in practice. However, alternatives are always desirable.

From DE 40 00 167 C2, a spin-stabilized carrier projectile is known with a metallic driving band and a sealing ring made of plastic disposed behind it for complete sealing. A plastic attachment ring is disposed in front of the metallic driving band in the firing direction. The attachment ring contains an end

support surface, which rests in contact with a parallel end face of the driving band in the axial rearward-pointing direction. The separation of the attachment ring is carried out by at least one longitudinal slot disposed in the casing area immediately when exiting the weapon barrel.

DE 198 55 535 A1 describes a spin-stabilized artillery projectile with a metallic driving band and a sealing ring made of plastic. The driving band, when viewed in the direction of the longitudinal axis of the projectile, has at least one annular groove in which the sealing ring is disposed and is connected to the projectile wall by form locking and force locking. Mechanical damage or destruction or stripping off of the sealing ring is intended to be prevented safely as a result and the sealing function thereof is not negatively affected.

The present invention is based on the idea of converting the disadvantage of the known solutions into an advantage. A complete detachment of the sealing ring or obturator is expressly desired according to the invention.

For this purpose, a design configuration of an interface between a rear edge of a driving band and a front edge of an obturator or sealing ring is carried out, which favors complete detachment of the obturator after the passage through the muzzle. The obturator is an integral part of a driving band according to the invention. The function of the obturator is firmly integrated into the driving band structure. There is no force-locking or shape-locking connection to the projectile wall. The obturator is preferably made of plastic, for example polyamide.

The projectile comprises a driving band or driving band structure consisting of one or individual pressed or welded-on ring(s). The positioning of the obturator takes place in at least one groove or equalizing groove in the driving band or the driving band structure. The equalizing groove in the driving band or the equalizing grooves in the drive band structure are preferably central, but at least such that during the passage through the barrel the rearward oriented driving band material pushes the obturator/the sealing ring backwards or upwards out of the equalizing groove.

The equalizing groove is preferentially trapezoidal in cross-section, preferably equilateral. The equalizing groove has a narrower surface pointing towards the projectile than towards the weapon barrel, which results in the trapezoidal shape. This trapezoidal shape facilitates the detachment of the obturator or sealing ring during the passage through the barrel. During the passage through the barrel, the sealing ring is pushed backwards or upwards like an O-ring out of the equalizing groove by the rearward-oriented driving band material. This action results in a sealing effect during the passage through the barrel. The obturator/sealing ring itself no longer exists as an individual part. Only one gas-flow-reducing element remains in the driving band in order to keep the pressure and the resulting velocity dispersions as low as possible. A centrifugal force-induced release after the passage through the muzzle is greatly simplified by the trapezoidal shape.

The equalizing groove can also be rectangular or square in section.

Excess material does not result in an aerodynamically negatively relevant protrusion, i.e., the material

that protrudes from an obturator groove and negatively affects the aerodynamics, since the metallic driving band region behind the positioning of the plastic acts like a cutting die and scrapes off the sealing ring over the surface or even strips it off. Brass and/or iron are preferably used as the metallic material. But copper has also proven its worth.

By a corresponding design of the puncture depth of the equalizing groove in the driving band or in the driving band structure and thus of the sealing insert, it is achieved that no fragments of the plastic ring remain after the passage through the barrel due to the tensile field profile, since said fragments are intentionally completely depleted in the shear and deformation plane of the tensile field profile.

The plastic ring or sealing ring as an integral function-relevant component of the projectile is much more robust and less prone to failure. Even untrained users clearly recognize that the plastic ring does not serve as protection for the driving band, since the plastic ring is not on the driving band but is inserted into it. The driving material displaced rearwards during the passage through the barrel collides intentionally with the sealing ring material in the drive band equalizing groove, because this collision raises the dichtmetrial and additionally presses the sealing material against the barrel wall with an extreme sealing effect.

A spin-stabilized artillery projectile with a driving band and at least one obturator is proposed. The driving band contains at least one equalizing groove when viewed in the direction of a longitudinal axis (3) of the projectile. The at least one obturator is

disposed in the at least one equalizing groove of the driving band. The cross-section of the equalizing groove is preferably trapezoidal but can also be rectangular or square. This achieves complete detachment of the obturator, wherein residues are avoided.

This invention is also advantageous in that it is simple and uncomplicated. The solution is robust against external influences. Remaining plastic residues on the projectile are avoided when the task as an obturator is carried out.

According to an embodiment, there is provided a spin-stabilized artillery projectile comprising: a driving band; and at least one obturator, wherein the driving band, when viewed in a direction of a longitudinal axis of the projectile, contains at least one equalizing groove, wherein the at least one obturator is disposed in the equalizing groove of the driving band; wherein an outer surface of the at least one obturator is aligned with an outer surface of the driving band, such that the outer surface of the at least one obturator does not protrude beyond the outer surface of the driving band; wherein a cross-section of the at least one equalizing groove is shaped as an equilateral trapezoid, and wherein the equilateral trapezoid has a narrow side and a wide side that opposes the narrow side and wherein the narrow side of the equilateral trapezoid is positioned closer to the longitudinal axis of the projectile than the wide side, such that, as the projectile passes through a gun barrel, the at least one obturator is able to be pushed upward out of the at least one equalizing groove to be sheared off by a portion of the driving band positioned behind the at least one equalizing groove.

Date Reçue/Date Received 2021-08-09

The invention is to be explained in more detail on the basis of an exemplary embodiment with a drawing.

The figure shows the cross-section of a spin-stabilized artillery projectile 1 in the region of a driving band 2, for example consisting of brass.

In the present embodiment, the driving band 2 is made up of at least two driving band parts 4, 5 - when viewed in the direction of a longitudinal axis 3 of the projectile 1.

If the driving band is a two-piece band, it usually consists of two materials, for example brass and/ or iron.

Said driving band parts 4, 5 are inserted into respective grooves 6, 7 in the projectile 1. Said grooves 6, 7 preferably have a dovetail shape.

The driving band 2 can also be implemented in one piece. Welding of the driving band 2 (4, 5) is also possible.

Date Reçue/Date Received 2021-08-09

An equalizing groove 8, 9 is introduced into each respective driving band part 4, 5. Said equalizing groove 8, 9 preferably has a trapezoidal shape in cross-section. The narrow side 10 (smaller area) is pointing towards the longitudinal axis 3. The wider side 11 (larger area) terminates with the driving band parts 4, 5, preferably without protruding and thus flush with the surface.

A preferably plastic sealing ring or obturator 12, 13 is disposed in each equalizing groove 8, 9. The shape of the obturator 12, 13 is adapted to the corresponding equalizing groove 8, 9.

During the passage through the barrel, the rearward-oriented driving band material of the driving band parts of the obturator 12, 13 is pressed rearwards or upwards out of the equalizing groove 8, 9 like an O-ring. This forms a seal during the passage through the barrel. The metallic driving band region behind the positioning of the obturator 12, 13 shears it off, so that the obturator 12, 13 is no longer part of the driving band 2 (4, 5) when the artillery projectile 1 exits from the weapon barrel.

CLAIMS:

1. A spin-stabilized artillery projectile comprising:

a driving band; and at least one obturator,

wherein the driving band, when viewed in a direction of a longitudinal axis of the projectile, contains at least one equalizing groove,

wherein the at least one obturator is disposed in the equalizing groove of the driving band;

wherein an outer surface of the at least one obturator is aligned with an outer surface of the driving band, such that the outer surface of the at least one obturator does not protrude beyond the outer surface of the driving band;

wherein a cross-section of the at least one equalizing groove is shaped as an equilateral trapezoid, and wherein the equilateral trapezoid has a narrow side and a wide side that opposes the narrow side and wherein the narrow side of the equilateral trapezoid is positioned closer to the longitudinal axis of the projectile than the wide side, such that, as the projectile passes through a gun barrel, the at least one obturator is able to be pushed upward out of the at least one equalizing groove to be sheared off by a portion of the driving band positioned behind the at least one equalizing groove.

2. The spin-stabilized artillery projectile according to claim 1, wherein the at least one equalizing groove includes two equalizing grooves disposed on the driving band.

Date Reçue/Date Received 2021-08-09

3. The spin-stabilized artillery projectile according to claim 2, wherein the driving band is formed of at least two driving band parts.

4. The spin-stabilized artillery projectile according to claim 3, wherein each of the at least two driving band parts include one of the two equalizing grooves.

5. The spin-stabilized artillery projectile according to claim 3, wherein the driving band or the at least two driving band parts are inserted into grooves of the projectile, which have a dovetail shape.

6. The spin-stabilized artillery projectile according to claim 3, wherein the driving band or the at least two driving band parts are welded or soldered.

7. The spin-stabilized artillery projectile according to claim 1, wherein the driving band is formed of brass and/or iron.

8. The spin-stabilized artillery projectile according to claim 1, wherein the at least one obturator is formed of plastic or polyamide.

9. The spin-stabilized artillery projectile according to claim 1, wherein the at least one obturator is made of plastic and the driving band is made of metal.

Date Reçue/Date Received 2021-08-09

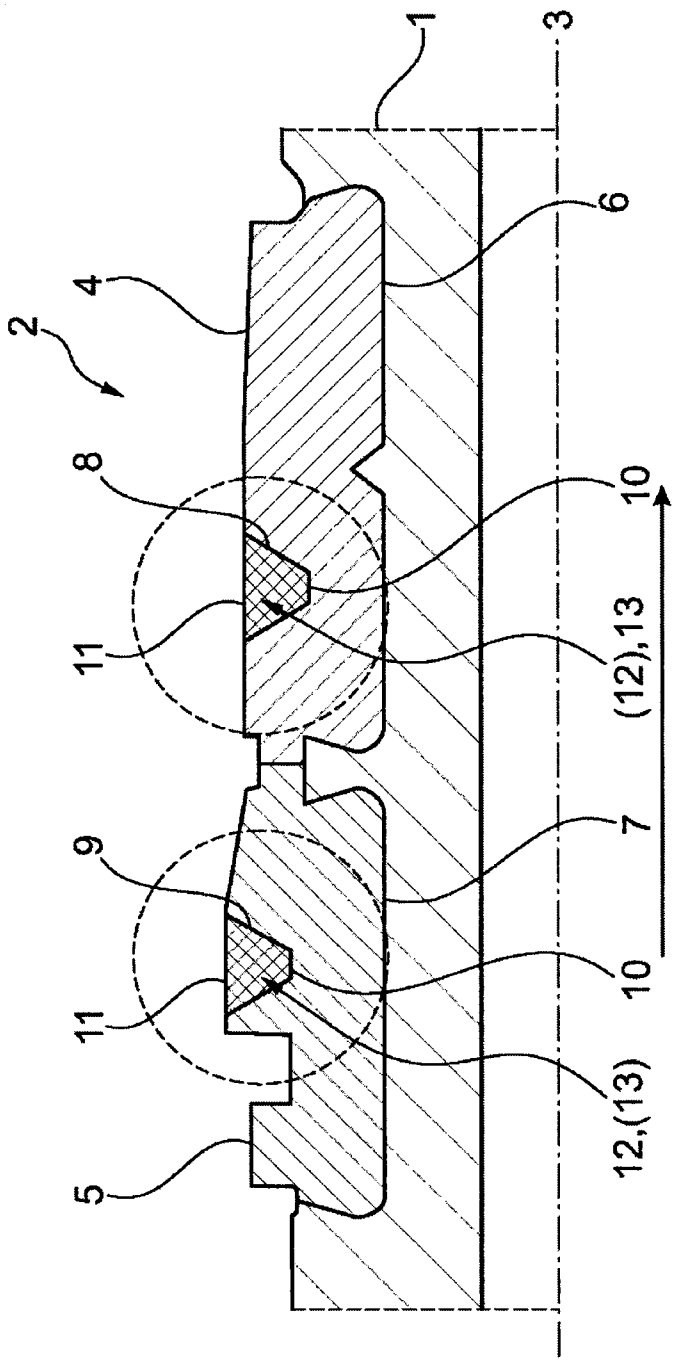
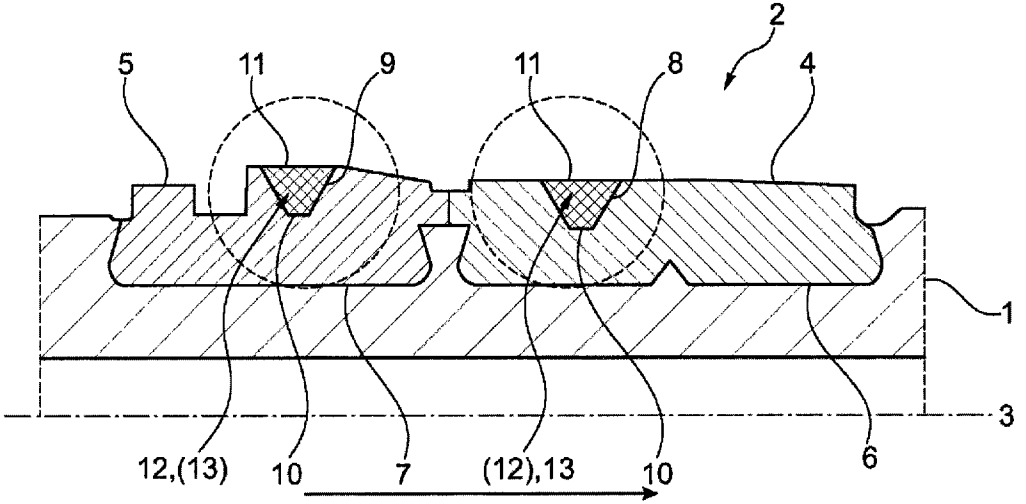


Fig. 1


2
5
11
9
11
8
4
1
3
12,(13)
10
7
(12),13
10
6