



(86) Date de dépôt PCT/PCT Filing Date: 2001/07/26
(87) Date publication PCT/PCT Publication Date: 2002/02/14
(45) Date de délivrance/Issue Date: 2009/01/27
(85) Entrée phase nationale/National Entry: 2003/01/31
(86) N° demande PCT/PCT Application No.: NO 2001/000321
(87) N° publication PCT/PCT Publication No.: 2002/012636
(30) Priorité/Priority: 2000/08/04 (NO20003952)


(51) Cl.Int./Int.Cl. *E02B 15/04* (2006.01),
B63B 35/32 (2006.01)

(72) Inventeur/Inventor:
NILSEN, DAG, NO

(73) Propriétaire/Owner:
NOFI TROMSO A/S, NO

(74) Agent: MCCARTHY TETRAULT LLP

(54) Titre : APPAREIL ET SYSTEME DE CONFINEMENT DE DEVERSEMENTS D'HYDROCARBURES
(54) Title: APPARATUS AND SYSTEM FOR THE CONTAINMENT OF OIL SPILLS

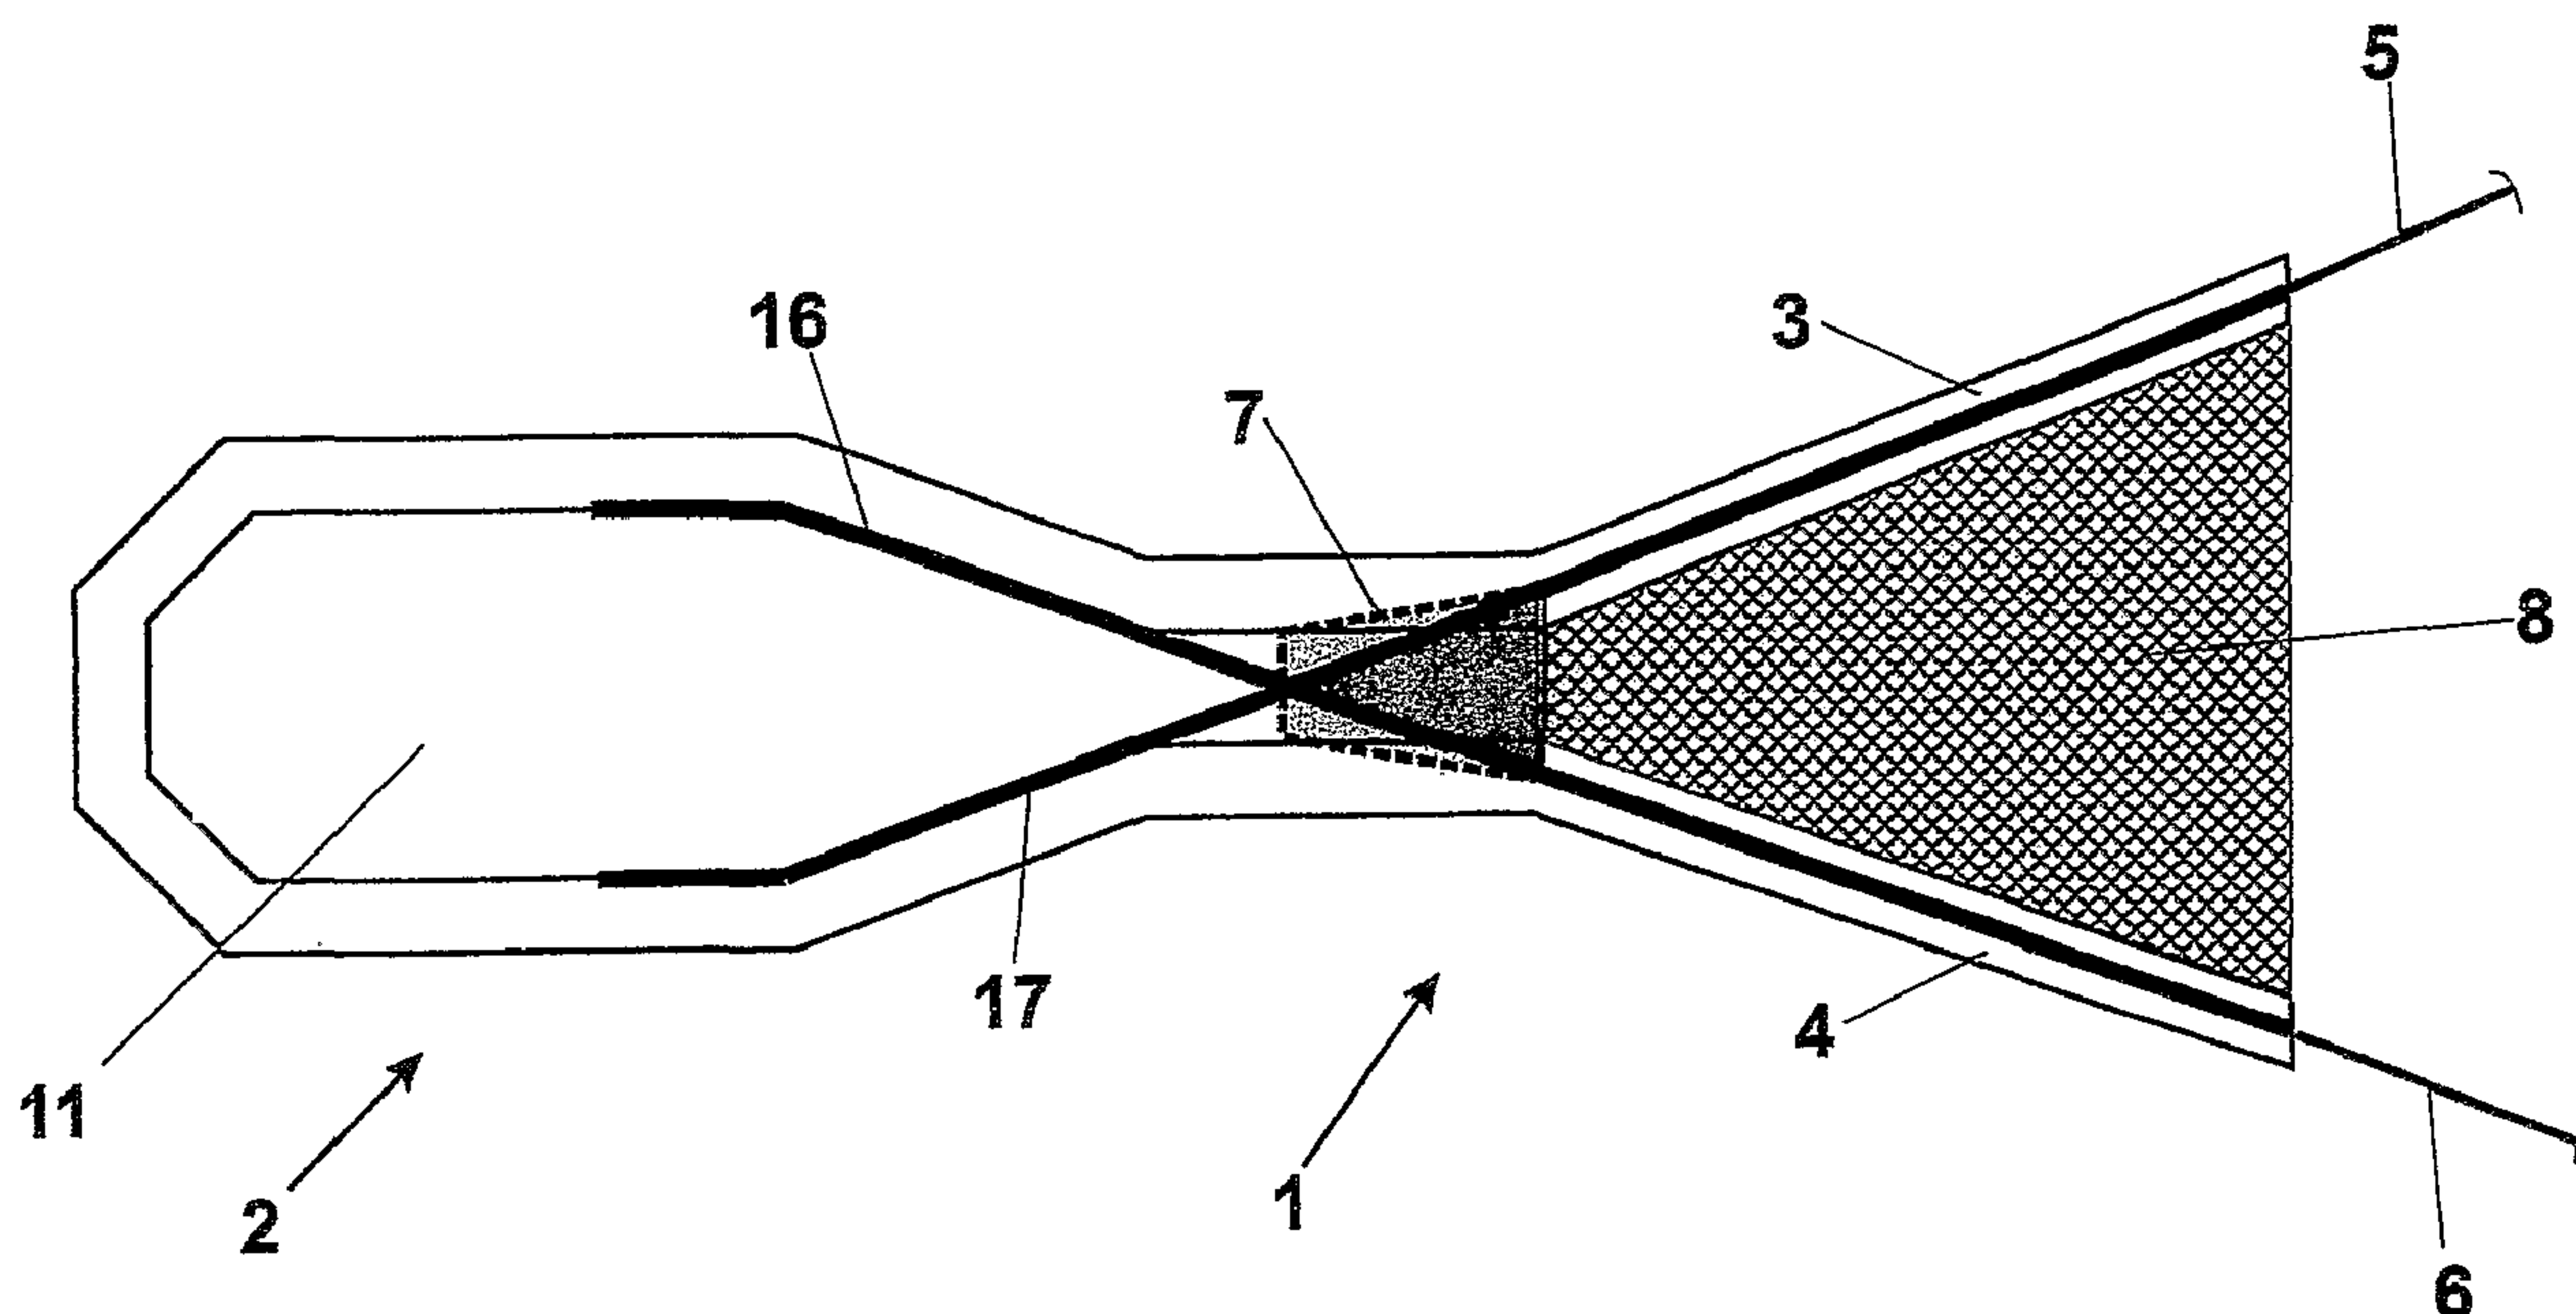

(57) Abrégé/Abstract:

An apparatus or system for containing oil and the like floating on the surface of a body of water, comprising a relatively elongate channel defined by two side-defining faces (3, 4) that diverge from one another from a narrow inner end to a wider opening, the channel being movable such as by towing with the aid of one or more vessels, which apparatus is made of non-rigid materials. The apparatus comprises a tapered channel portion (1) between the two side-defining faces (3, 4), a wedge-shaped structure (7) and a collecting means or separator (2), wherein the tapered channel portion (1), the wedge-shaped structure (7) and the separator (2) are arranged one after the other as interconnected or integrated units, thereby forming a continuous "hull" having freeboard (12), and longitudinal towing devices (5, 6) are provided that are fastened to the units (1, 7, 2), the said towing devices (5, 6) and thus the towing forces intersecting in an area at the rear end of the wedge-shaped structure (7) seen in the towing direction.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 February 2002 (14.02.2002)

PCT

(10) International Publication Number
WO 02/12636 A1

(51) International Patent Classification⁷: **E02B 15/04**,
B63B 35/32

(21) International Application Number: PCT/NO01/00321

(22) International Filing Date: 26 July 2001 (26.07.2001)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20003952 4 August 2000 (04.08.2000) NO

(71) Applicant (for all designated States except US): **NOFI TROMSØ AS** [NO/NO]; Stakkevollveien 31, N-9010 Tromsø (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NILSEN, Dag** [NO/NO]; Trudvangveien 12B, N-9019 Tromsø (NO).

(74) Agent: **SVEINUNGSEN, Jon**; Bryns Zacco AS, P.O. Box 765, Sentrum, N-0106 Oslo (NO).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND SYSTEM FOR THE CONTAINMENT OF OIL SPILLS

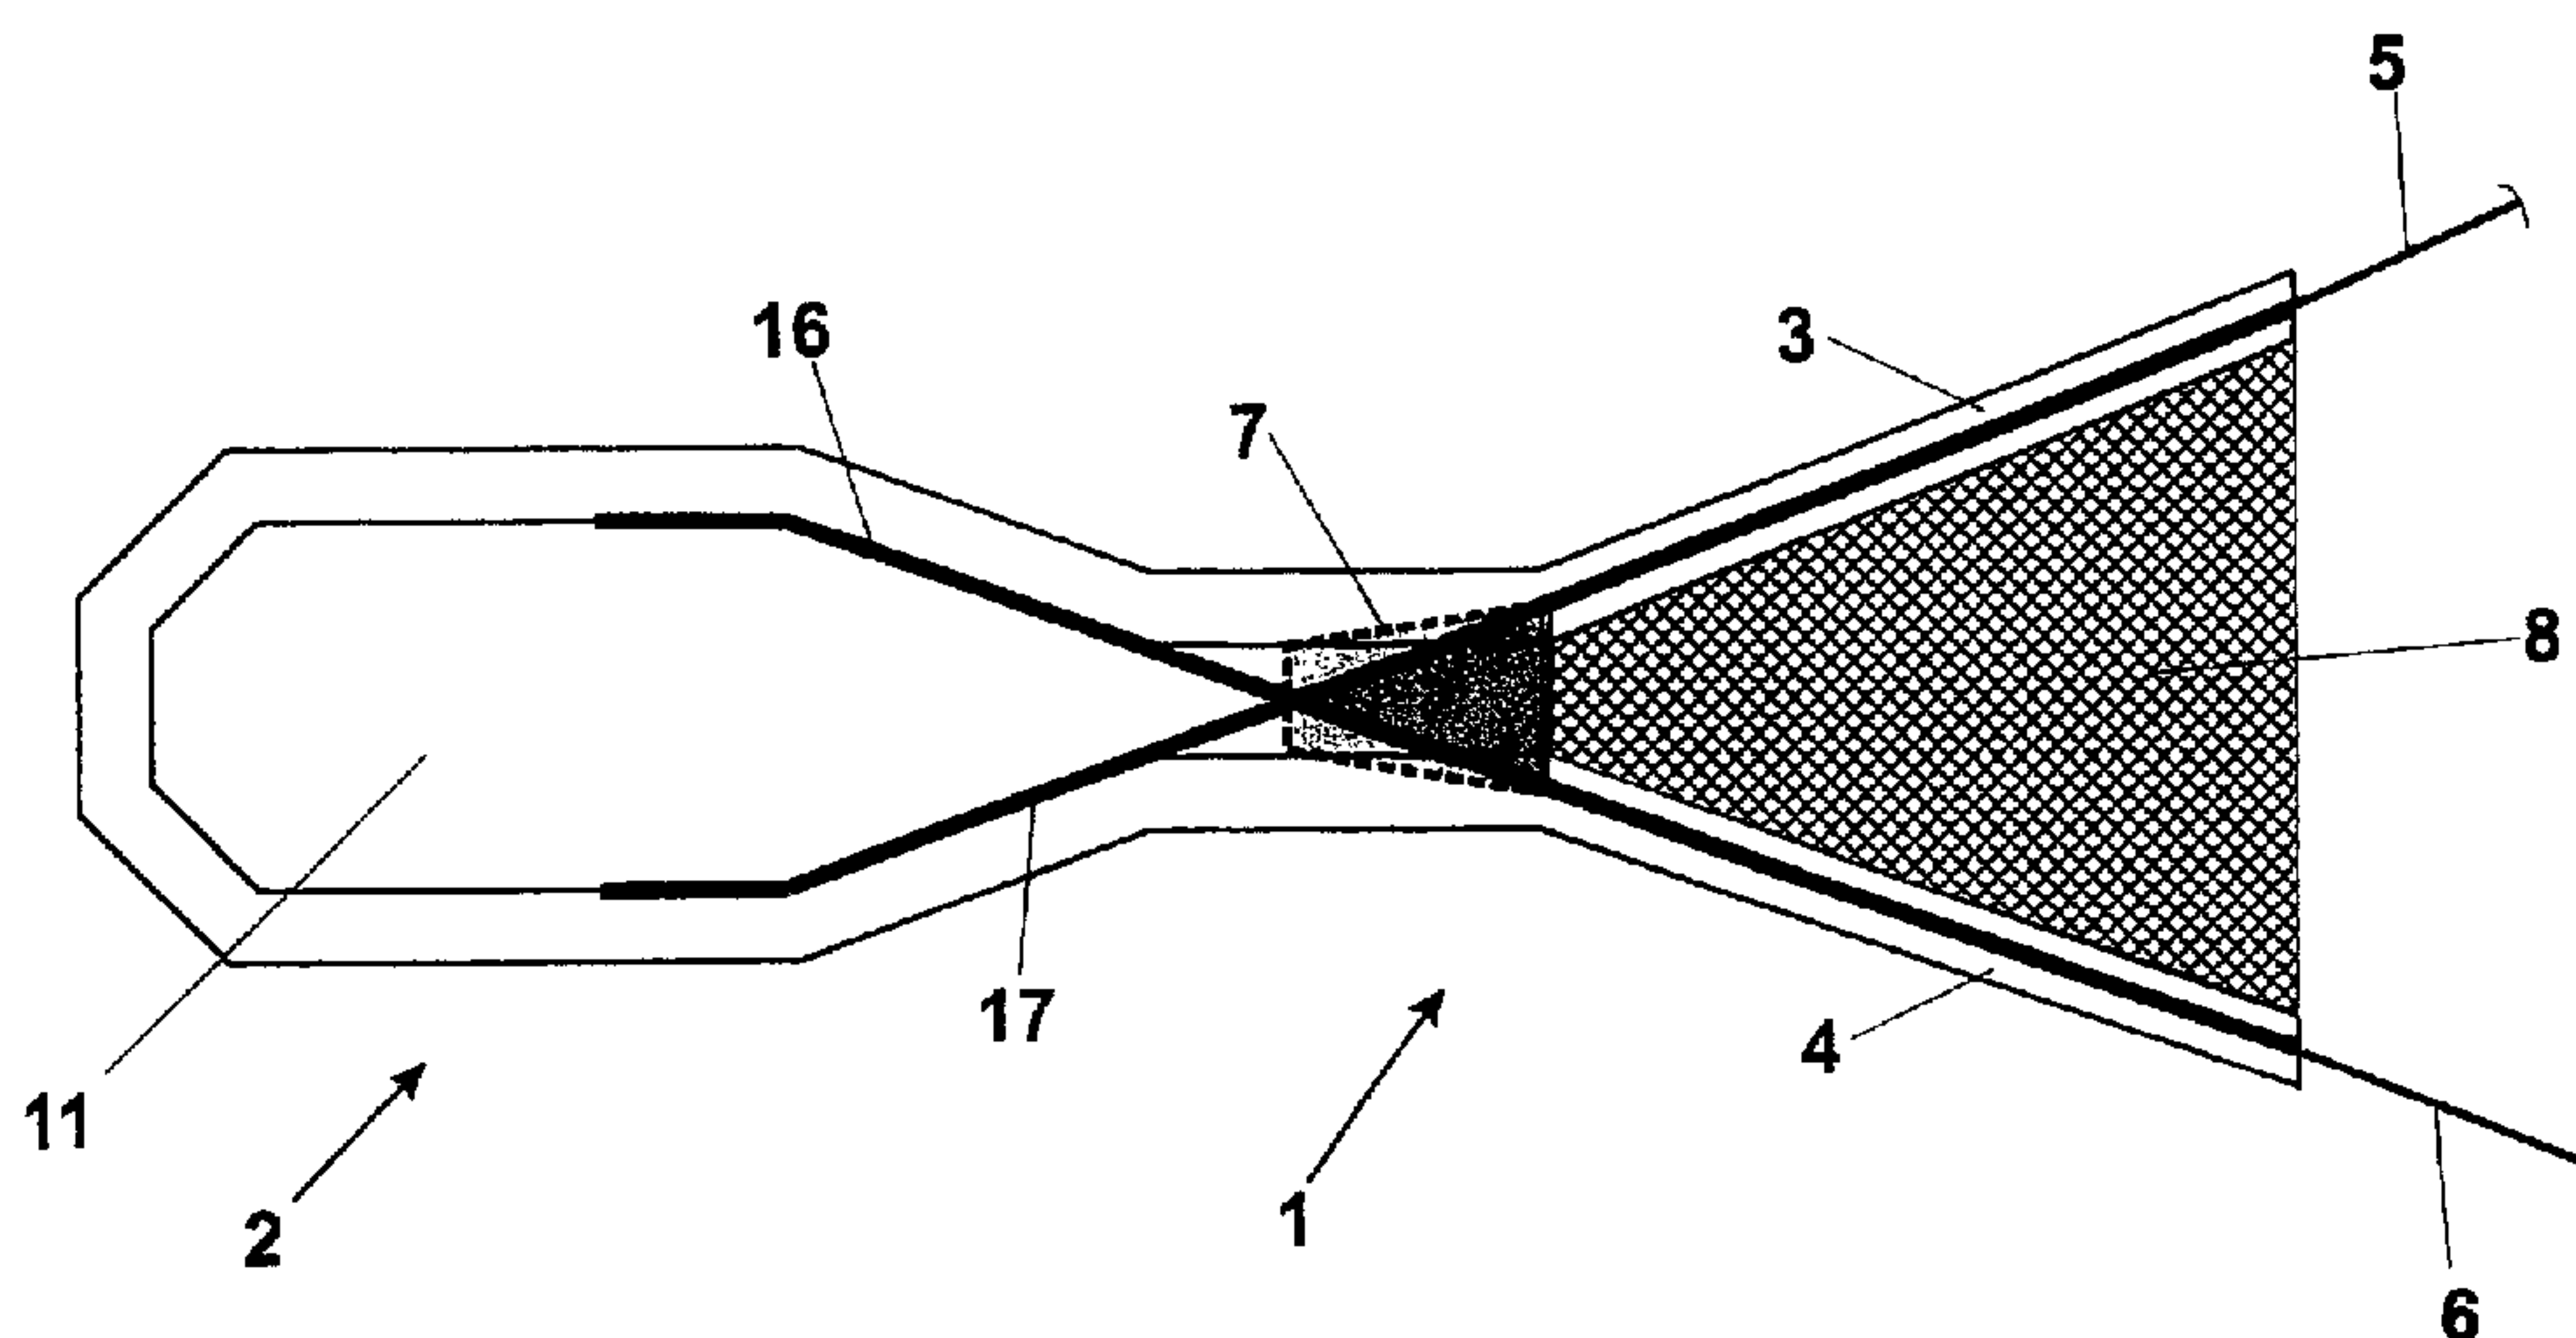

(57) Abstract: An apparatus or system for containing oil and the like floating on the surface of a body of water, comprising a relatively elongate channel defined by two side-defining faces (3, 4) that diverge from one another from a narrow inner end to a wider opening, the channel being movable such as by towing with the aid of one or more vessels, which apparatus is made of non-rigid materials. The apparatus comprises a tapered channel portion (1) between the two side-defining faces (3, 4), a wedge-shaped structure (7) and a collecting means or separator (2), wherein the tapered channel portion (1), the wedge-shaped structure (7) and the separator (2) are arranged one after the other as interconnected or integrated units, thereby forming a continuous "hull" having freeboard (12), and longitudinal towing devices (5, 6) are provided that are fastened to the units (1, 7, 2), the said towing devices (5, 6) and thus the towing forces intersecting in an area at the rear end of the wedge-shaped structure (7) seen in the towing direction.

WO 02/12636 A1

Apparatus and system for the containment of oil spills

Field of Invention

The invention relates to an apparatus or system for the containment of oil spills or the like as disclosed in the preamble of patent claim 1.

Background of Invention

A number of different ways of containing oil floating on the surface of a body of water are already known. The most common of these is to deploy a floating boom in a U or J formation. A separate skimmer is then used to remove the oil that is collected at the back of the boom. This system is uncomplicated and relatively inexpensive. The disadvantage is that the floating boom cannot be towed forwards at a speed of more than 0.5 to 1 knot since the oil will be pulled down into the body of water under the boom.

In areas where harsher weather conditions prevail such as on the open sea, a so-called V-sweep is used. This consists of an ordinary boom set up in a V formation with the aid of a net in the bottom that stabilises the system and gives it a shape. The oil that is collected at the back of the system is pumped up using a separate skimmer.

Containment can take place at a speed as high as 1 to 1.6 knots before the oil is pulled down under the boom. Nonetheless, this speed is also too low as the ocean currents in many cases have a greater speed. In addition, the oil often gathers in so-called scattered slicks where 90% of the oil is in 10% of the area, and on moving between scattered slicks of this kind the oil is often lost because of movement above the critical speed.

Norwegian Patent 176066 discloses an oil containment system that harnesses wave energy and is in the form of a relatively elongate channel having a side edge face and a defined edge over which waves containing oil are to wash as they pass into a catch basin. It is disclosed that the elongate channel may also have a bottom and that the system can be made of non-rigid materials. However, in practical tests using this system, it was found that when the system is towed forwards in the water major stability problems arise because of the relatively elongate shape, as the system either seeks to go down into the body of water or to come up. Substantial adjustment means are required to be able to cause the system to function in a satisfactory manner at varying high speeds.

Summary of Invention

An aspect object of the present invention is to eliminate the problems of the known apparatuses and systems.

This is achieved with an apparatus or a system of the type mentioned in herein.

5

In one aspect, an apparatus for collecting contaminants from a water surface is provided. The apparatus comprises: a channel having two side defining faces which diverge from one another from a narrow inner end of the channel to a wider inlet opening thereof; a wedge-shaped structure at the narrow inner end of the channel, the structure having a
10 roof portion with a V-shaped recess with legs forming planing edges; a collector / separator unit downstream of the structure; and towing devices for towing the apparatus in its longitudinal direction, the towing devices being fastened to the channel, the wedge-shaped structure and the unit. The channel, wedge-shaped structure and unit form a continuous hull-like structure with a freeboard at an upper part thereof, each of the
15 planing edges being securable at an edge area thereof to a respective one of the towing devices to cause the towing devices to impart towing forces to intersect in an area at a downstream end of the wedge shaped structure, the planing edges being tensioned or made rigid by the towing forces and when towed collected liquid moves over the planing edges to be collected in the collector / separator unit.

20

The apparatus may be made of non-rigid materials.

In the apparatus, the towing devices may be attached to the channel, the structure and the unit by means of attachment means selected from at least one of: welding, stitching-in,
25 stitching-on, adhesive bonding and coupling devices.

In the apparatus, the wedge-shaped structure may form a tunnel having an inlet region defined by a bottom part and side walls having a height corresponding to a height dimension of a skirt which depends from the freeboard, wherein the tunnel has at the
30 downstream end thereof an outlet located below the planing edges approximately at their point of intersection, and wherein the cross-sectional area of the outlet of the tunnel is smaller than the cross-sectional area of the tunnel inlet.

Fig. 1 is a schematic illustration of an oil collector that implements the principles of the invention;

Fig. 2 is a schematic illustration of details of a wedge-shaped structure according to the
5 invention;

Fig. 3 is a schematic illustration of additional details of the wedge-shaped structure in Fig. 2;

10 Fig. 4 is a schematic view of the oil collector seen from in front; and

Fig. 5 is a schematic side view of the oil collector.

The apparatus or system according to the invention is essentially made of a suitable
15 non-rigid and flexible material so that it can be stored on a reel. One example of a suitable material may be a sheet of a suitable plastic that is robust, weatherproof and resistant to oil (and chemicals). The apparatus comprises a forward tapered channel portion 1, a rear collecting means or separator portion 2, and between these portions a wedge-shaped structure 7.

20 The tapered channel portion 1 is made in the form of two side-defining faces 3, 4 that extend from the wedge-shaped structure 7. The faces 3, 4 comprise freeboard 12 and skirt 13 and preferably an inlet bottom 8, as can be seen, for example, in Fig. 4. In addition to forming a "divide", this bottom 8, which may be in the form of a net, serves
25 to maintain the shape of the tapered channel portion 1 and the inlet to the tunnel 14 of the wedge-shaped structure 7. The freeboard 12 is normally ballasted by means of the water pressure when the apparatus or system moves forward, but, if so desired, can also be ballasted by using suitable devices (not shown).

30 The oil collector is equipped with towing devices 5, 6 in the form of ropes, cords or similar means that are attached in an appropriate manner to the side-defining faces 3, 4, the wedge-shaped structure 7 and the collecting means or the separator 2. The towing devices 5, 6 run from the faces 3, 4 in an optional length and are both are preferably equipped with a suitably dimensioned conventional floating boom or coupled to such a
35 boom (not shown). At their free ends, the devices 5, 6 or optionally the floating booms can be fastened to suitable tow means, for example, tow vessels.

- 3A -

In the apparatus, the planing depth may be adjustable as a function of the speed by which the apparatus is being towed. The planing depth may be adjustable by using
5 ballasting means connectable to the wedge-shaped structure.

In the apparatus, the unit may be shaped as a receptacle comprising the freeboard and further comprising a bottom bag having a bottom hatch, wherein the hatch has an opening adjustable from a closed state to an open position, and wherein the apparatus
10 when towed causes liquid which is skimmed off from water to be received into the unit at a level which is above water surface level exterior to the unit, thereby causing overpressure inside the bag to hold the bag in an extended state.

In the apparatus, the bottom hatch may be configured as a flap arranged over an opening
15 having a netting portion in a bottom of the bag itself. The bottom hatch at its front edge may be fastened to the bottom of the bag, and wherein elastic devices are provided to adapt the closing and opening of the hatch and thereby the bottom of the bag according to a speed at which the apparatus is being towed. The elastic devices may be elastic cords. The bottom of the bag may be configured to have ballast means to provide
20 suitable ballasting of the bag. The ballast means may provide suitable ballasting of the bag when the apparatus is at a standstill. The ballast means may comprise at least one lead cable.

In the apparatus, the freeboard may be configured to be provided with ballast means.
25

In a second aspect, an apparatus for containing contaminants floating on the surface of a body of water is provided, comprising: a tapered channel portion defined by two side-defining faces that diverge from one another from a narrow inner end to a wider opening end, the tapered channel portion being movable by a towing force, the two side-defining
30 faces include a freeboard and a skirt; a wedge-shaped structure at the narrow inner end of the tapered channel portion with a wide end toward the tapered channel portion; a collecting portion at a narrow end of the wedge-shaped structure; and at least two longitudinal towing devices fastened respectively to each of the two side-defining faces, the wedge-shaped structure and the collecting portion, wherein the longitudinal towing
35 devices intersect in an area at the narrow end of the wedge-shaped structure when the towing force is applied. In the apparatus, the tapered channel portion, the wedge-shaped

- 3B -

structure and the collecting portion form an integrated unit arranged in sequence and form a continuous hull; the integrated unit is composed of non-rigid materials; and the integrated unit becomes rigid when the towing force is applied to the longitudinal towing devices.

5

In the apparatus, the fastening between the longitudinal towing devices and the integrated unit may be made by means of at least one of welding, stitching-in, stitching-on, adhesive bonding, and other suitable coupling devices.

10 In the apparatus, the wedge-shaped structure may further comprise a roof portion having a V-shaped recess. In the apparatus, the V-shaped recess of the roof portion includes legs that define planing edges; the planing edges including portions of the longitudinal towing devices secured in an edge area of the V-shaped recess; and the planing edges being made rigid by the forces transferred to the planing edges when the towing force is
15 applied to the longitudinal towing devices.

In the apparatus, the collecting portion may be a receptacle having a freeboard and a bottom bag equipped with a bottom hatch; and the bottom hatch may include an open position and a closed position; and the bottom hatch may be adapted to vary between the
20 open and closed position when the towing force is applied, which causes planed off liquid to be collected in the collector portion at a level above the level of the surface of water outside the collector portion due to an overpressure formed inside the bottom bag which holds the bag in an extended state.

25 In the apparatus, the wedge-shaped structure may further comprise: a roof portion having a V-shaped recess, wherein the V-shaped recess of the roof portion includes legs that define planing edges; the planing edges including portions of the longitudinal towing devices secured in an edge area of the V-shaped recess; and the planing edges made rigid by the forces transferred to the planing edges when the towing force is applied to the
30 longitudinal towing devices.

In the apparatus, the wedge-shaped structure may form a tunnel having an inlet defined by a bottom of the wedge-shaped structure and side walls having a height equivalent to the skirt; the tunnel further having an outlet located beneath the planing edges and
35 approximately at their point of intersection; and where a cross-sectional area of the outlet is smaller than a cross-sectional area of the inlet.

- 3C -

In the apparatus, a planing depth for the apparatus may be adjusted by varying the towing force speed or by adjustment means. The adjustment means may comprise an auxiliary system that is connected to the wedge-shaped structure allowing ballast to be
5 provided to the system.

In the apparatus, the collecting portion may be a receptacle having freeboard and a bottom equipped with a bottom hatch; the bottom hatch may include an open position and a closed position; and the bottom hatch may be adapted to vary between the open
10 and closed position when the towing force is applied, which causes planed off liquid to be collected in the collector portion at a level above the level of the surface of water outside the collector portion due to an overpressure formed inside the bottom bag which holds the bag in an extended state.

15 In the apparatus, the bottom hatch may be designed as a flap arranged over an opening which includes a reinforced netting portion in the bottom bag. The bottom hatch may include a front edge and the bottom hatch is fastened at the front edge to the bottom with at least one elastic device to allow the opening and closing of the bottom hatch according to the applied towing force. The bottom hatch may include a front edge and the bottom
20 hatch is fastened at the front edge to the bottom bag with at least one elastic device to allow the opening and closing of the bottom hatch according to the applied towing force. The bottom of the bottom bag may include a ballast to allow ballasting of the bottom bag.

25 The planing depth may be adjusted by including an auxiliary system connected to the wedge-shaped structure to ballast the system.

The fastening between the longitudinal towing devices and the integrated unit may be made such that when towing forces are transferred to the integrated unit a geometrical
30 shape is created for the integrated unit.

If the difference in speed between a layer of oil and a layer of water is greater than about 1 knot, in general the oil will be carried along with the water. Oil or oil spills could thus inadvertently be lost under, e.g., a floating boom. The construction of a V-
35 shaped tunnel, as in the present invention, will allow the underlying body of water to move at speed through the tunnel in the opening whilst the surface is pressed up. This

- 3D -

results in the oil being exposed to an acceptable difference in speed and not being pulled under the tunnel.

Inside the separator the oil/water mixture will be almost motionless as the amount of
5 liquid brought in is tiny in relation to the total volume of the separator.

With the apparatus or system according to the invention, oil can be effectively removed from the surface at a speed of 4 knots, which is 400% more than any previously known conventional floating boom (1 knot), and 260% more than previously known high-speed
10 booms that can be used at a speed of about 1.5 knots.

The advantages obtained with the invention include the following:

- it can operate in waters where there are strong currents;
- 15 • it allows the boom to be used with greater efficiency;
- it has great advantages in rivers where there are current;
- it provides for better manoeuvrability of the tow vessels which can operated at a higher speed;
- the oil is concentrated in the separator so that the efficiency of pumps and skimmers
20 is enhanced;
- the whole structure is non-rigid which means that it can be coiled onto a storage reel of small volume.

Brief Description of Figures

25 The invention will now be described with reference to the drawings, wherein:

Fig. 1 is a schematic illustration of an oil collector that implements the principles of the invention;

Fig. 2 is a schematic illustration of details of a wedge-shaped structure according to the
30 invention;

Fig. 3 is a schematic illustration of additional details of the wedge-shaped structure in Fig. 2;

35 Fig. 4 is a schematic view of the oil collector seen from in front; and

- 3E -

Fig. 5 is a schematic side view of the oil collector.

Detailed Description of Embodiments

The apparatus or system according to the invention is essentially made of a suitable non-rigid and flexible material so that it can be stored on a reel. One example of a suitable material may be a sheet of a suitable plastic that is robust, weatherproof and resistant to oil (and chemicals). The apparatus comprises a forward tapered channel portion 1, a rear collecting means or separator portion 2, and between these portions a wedge-shaped structure 7.

The tapered channel portion 1 is made in the form of two side-defining faces 3, 4 that extend from the wedge-shaped structure 7. The faces 3, 4 comprise freeboard 12 and skirt 13 and preferably an inlet bottom 8, as can be seen, for example, in Fig. 4. In addition to forming a “divide”, this bottom 8, which may be in the form of a net, serves to maintain the shape of the tapered channel portion 1 and the inlet to the tunnel 14 of the wedge-shaped structure 7. The freeboard 12 is normally ballasted by means of the water pressure when the apparatus or system moves forward, but, if so desired, can also be ballasted by using suitable devices (not shown).

The oil collector is equipped with towing devices 5, 6 in the form of ropes, cords or similar means that are attached in an appropriate manner to the side-defining faces 3, 4, the wedge-shaped structure 7 and the collecting means or the separator 2. The towing devices 5, 6 run from the faces 3, 4 in an optional length and are both are preferably equipped with a suitably dimensioned conventional floating boom or coupled to such a boom (not shown). At their free ends, the devices 5, 6 or optionally the floating booms can be fastened to suitable tow means, for example, tow vessels.

The attachment between the devices 5, 6 and the "oil collector hull" can, for example, be made by welding, stitching-in, stitching-on, adhesive bonding, by means of suitable coupling devices or a combination of two or more of the listed methods of attachment. What is important is that when the collector is under tow the towing forces are

5 transferred in such a way that a desirable geometrical form of the apparatus is obtained. This applies in particular to the tapered channel portion 1 and the wedge-shaped structure 7. An essential feature of the invention is that the wedge-shaped structure 7 is made having planing edges 9, 10. These consist of respective portions of the towing devices 5, 6 secured in the edge area, and which can be made rigid by the towing forces

10 that are transferred to the planing edge when the collecting means 2 is under tow. An optimal planing depth would depend, *inter alia*, on anticipated oil thickness as the planing action should ensure that all oil that is not substantially mixed with the water is "planed off". This liquid is then transferred into the collecting means or the separator 2. The planing depth can be adjusted by adjusting the towing speed, but special means can

15 also be provided for making this adjustment. Such means may consist of non-illustrated auxiliary system that is connected to the tapered channel so that it is possible to ballast the system.

Figures 2 and 3 are schematic illustrations of details of the wedge-shaped structure 7.

20 The structure 7 is made having a tunnel 14 with an inlet in the channel portion 1, an outlet 15 and a roof portion 20. The roof portion 20 is made having a V-shaped recess where the legs of the recess form the planing edges 9, 10 consisting of portions of the devices 5, 6 secured in the edge portion. Arrows A and B illustrate respectively the inflow of an oil/water mixture and the outflow of mainly water. It is an essential point

25 that the cross-sectional area of the tunnel 14 outlet 15 is smaller than the cross-sectional area at its 14 inlet. This means that some water is pressed up in such a way that the surface where most of the oil is found is lifted up and carried across the roof portion 20 and into the separator 2.

30 In the area of the wedge-shaped roof 20, at or preferably immediately downstream of the tip of the V-recess or the point of intersection between the devices 5, 6 or 9, 10, there may be arranged the edge of a wedge (not shown) which raises the oil flow during its transfer to the separator portion 2 and which can also act as an auxiliary barrier against backflow of oil during breaks in the towing of the oil collector.

35

The collecting means or separator portion 2 is made in the form of a receptacle having freeboard 12 and a bottom bag 11. If so desired, the free board 12, like the tapered

channel portion, can be ballasted by using suitable means. In connection with the freeboard edges, attachment sections 16, 17 may be provided for the towing devices 5, 6 as indicated in Fig. 1. Furthermore, the bottom bag 11 is equipped with a bottom hatch 18. The bottom hatch 18 may be a suitable flap arranged over an opening which may be
5 equipped or reinforced with a netting portion in the bottom of the bag itself. At its front edge the hatch 18 is attached in a suitable manner to the bottom of the bag 11. One or more elastic devices, for example, elastic cords, are preferably provided for adapting the closing/opening of the hatch 18 and thus the bottom 11 according to the conditions of use such as towing at different speeds or standstill.

10

In the bottom of the bag, one or more ballast means may be provided, as for instance, lead cable or the like (not shown), which ensure suitable submersion or ballasting of the bag, in particular when the system is stationary, to prevent the bottom from floating up.

15 The collecting means 2 functions as an intermediate storage tank from where the oil can be removed with the aid of, for example, one or more pump or skimmer vessels fitted with equipment suitable for this operation.

As stated in the introduction, the apparatus or system according to the invention is
20 essentially made of a suitable non-rigid material. The indicated freeboard 12 is made of sections of fabric. These are shaped as basically cylindrical bodies that are interconnected or integrated with one another in such a way that a "hull shape" as shown schematically in Fig.1 is obtained. The cylinders are inflatable and are filled with a suitable medium, for example, air or other suitable gas, a foam or other suitable
25 more or less solid and easily manageable material.

When the apparatus is to be used to contain an oil spill and similar pollutants floating on the surface of a body of water, it is towed, preferably integrated with or connected to conventional floating booms by means of towing devices 5, 6 secured to, for example,
30 two tow vessels (not shown).

The tow vessels are made to move such that the booms and the side-defining faces 3, 4 form a sweep opening, and the propulsion of the apparatus forces the oil spill towards the convergent opening of the tapered channel portion 1. The net in the inlet opening 8
35 allows water that is slightly polluted to pass through, whilst the oil spill passes on to the wedge-shaped structure 7 with the wedge-shaped tunnel 14 and the planing edges 9, 10. As mentioned, these edges ensure the "planing off" of oil and/or oil spills which are

passed into the collecting tank 2, as indicated by the arrow C in Fig. 5 for intermediate storage and removal. Less polluted water/liquid runs out through the tunnel opening 15.

Due to the propulsion speed or towing speed, the water will be pressed into/up into the tunnel 14. This, in combination with the propulsion pressure, causes the liquid level in the separator 2 to be higher than the surface of the water otherwise, as indicated by the reference numeral 19 in Fig. 5. Since oil is lighter than water, the drops of oil that are mixed in the body of water will rise quite quickly to the liquid surface in the separator 2. The superelevation 19 in combination with the fact that the depth of the separator 2 is great in relation to the oil layer thus causes only non-polluted or slightly polluted liquid to be forced out through the hatch 18 in the bottom 11 of the separator 2 as indicated by arrow D.

When the system moves forward at a speed of, for instance, 4 knots, the front edge of the non-rigid bottom 11 of the separator 2 will be pressed backwards and upwards so that the bottom will be pressed in if the opening in the bottom hatch 18 is too large and the water inside the separator 2 is easily pressed out. However, when the opening in the hatch 18 is given a suitable throttling, the bottom 11, because of the superelevation 19 and thus the increased internal liquid pressure, will be stretched forcefully outwards and behave like a rigid structure, for example like steel. To give a specific example: at a superelevation 19 of 30 cm, where the bottom 11 is viewed as a sausage-shaped structure having a radius of 1.9 m, this will produce a tension in the fabric of about 550 kg/m. This rigid structure will behave like the hull of a boat that ploughs through the water, and creates calm conditions for the oil inside the separator 2.

The size of the superelevation 19 is determined by the amount of oil/water that enters the separator 2 and the amount of water that exits through the opening of the bottom hatch 18. As the speed at which the system is towed increases, the amount of liquid in will increase, as will the pressure against the outer side of the bottom 11. Provided that the outlet opening of the bottom hatch 18 is adjusted correctly, the superelevation 19 will increase. Thus, the internal pressure in the separator 2 will rise, thereby ensuring that the increase in pressure on the outer side of the bottom 11 is more than offset and the separator 2 is maintained in an extended state. This adjustment is done empirically by adjusting the outlet opening, i.e., the area of the outlet hatch 18 itself and the hatch opening. The optimal hatch opening is provided in that a suitable number of elastic devices (not shown) such as elastic cords are provided in connection with the hatch 18 and the bottom 11, so that the hatch 18 closes almost completely when the system is

stationary, and when the system is under tow it opens as desired/required under the influence of the increase in pressure resulting from the superelevation 19, the counterforce resulting from the pressure of the current against the hatch 18, and also the force from the elastic device(s). Fig. 5 shows the opening of the bottom hatch 18 in
5 two positions.

The transfer of the towing forces and the design of the collecting means or separator 2 to ensure that a superelevation is obtained therein will normally be sufficient to ensure that the apparatus maintains its desired shape when in operation (tow or standstill).
10 However, suitable bracing or rib means can be provided if so desired. Such means should/could be simple to put in place and remove after use.

1. An apparatus for collecting contaminants from a water surface, the apparatus comprising:

a channel having two side defining faces which diverge from one another from a narrow inner end of the channel to a wider inlet opening thereof;

a wedge-shaped structure at the narrow inner end of the channel, said structure having a roof portion with a V-shaped recess with legs forming planing edges;

a collector / separator unit downstream of said structure; and

towing devices for towing the apparatus in its longitudinal direction, said towing devices being fastened to said channel, said wedge-shaped structure and said unit,

wherein said channel, said wedge-shaped structure and said unit form a continuous hull-like structure with a freeboard at an upper part

thereof, each of said planing edges being securable at an edge area thereof to a respective one of said towing devices to cause the towing devices to impart towing forces to intersect in an area at a downstream end of the wedge shaped structure, said planing edges being tensioned or made rigid by said towing forces and when towed collected liquid moves over the planing edges to be collected in the collector / separator unit.

2. The apparatus according to claim 1, wherein said apparatus is made of non-rigid materials.

3. The apparatus according to claim 1, wherein said towing devices are attached to said channel, said structure and said unit by means of attachment means selected from at least one of: welding, stitching-in, stitching-on, adhesive bonding and coupling devices.

4. The apparatus according to claim 1, wherein said wedge-shaped structure forms a tunnel having an inlet region defined by a bottom part and side walls having a height corresponding to a height dimension of a skirt which depends from said freeboard, wherein the tunnel has at the downstream end thereof an outlet located below the planing edges approximately at their point of intersection, and wherein the cross-sectional area of the outlet of the tunnel is smaller than the cross-sectional area of the tunnel inlet.

-9-

5. The apparatus according to claim 1 or 4, wherein planing depth is adjustable as a function of the speed by which the apparatus is being towed.

5 6. The apparatus according to claim 1 or 4, wherein planing depth is adjustable by using ballasting means connectable to said wedge-shaped structure.

7. The apparatus according to claim 1, wherein said unit is shaped
10 as a receptacle comprising said freeboard and further comprising a bottom bag having a bottom hatch, wherein said hatch has an opening adjustable from a closed state to an open position, and wherein the apparatus when towed causes liquid which is skimmed off from water to be received into said unit at a level which is above water surface
15 level exterior to the unit, thereby causing overpressure inside the bag to hold the bag in an extended state.

8. The apparatus according to claim 7, wherein the bottom hatch is configured as a flap arranged over an opening having a netting portion
20 in a bottom of the bag itself.

9. The apparatus according to claim 8, wherein the bottom hatch at its front edge is fastened to the bottom of the bag, and wherein elastic devices are provided to adapt the closing and opening of the
25 hatch and thereby the bottom of the bag according to a speed at which the apparatus is being towed.

10. The apparatus according to claim 9, wherein the elastic devices are elastic cords.
30

11. The apparatus according to claims 9 or 10, wherein the bottom of the bag is configured to have ballast means to provide suitable ballasting of the bag.

35 12. The apparatus according to claim 11, wherein said ballast means provide suitable ballasting of the bag when the apparatus is at a standstill.

13. The apparatus according to claims 10, 11 or 12, wherein said
40 ballast means comprises at least one lead cable.

14. The apparatus of claim 1, wherein the freeboard is configured to be provided with ballast means.

5 15. An apparatus for containing contaminants floating on the surface of a body of water comprising:

10 a tapered channel portion defined by two side-defining faces that diverge from one another from a narrow inner end to a wider opening end, said tapered channel portion being movable by a towing force, said two side-defining faces include a freeboard and a skirt;

a wedge-shaped structure at said narrow inner end of said tapered channel portion with a wide end toward said tapered channel portion;

15 a collecting portion at a narrow end of said wedge-shaped structure; and

20 at least two longitudinal towing devices fastened respectively to each of said two side-defining faces, said wedge-shaped structure and said collecting portion, wherein said longitudinal towing devices intersect in an area at the narrow end of said wedge-shaped structure when the towing force is applied,

wherein

25 said tapered channel portion, said wedge-shaped structure and said collecting portion form an integrated unit arranged in sequence and form a continuous hull;

said integrated unit is composed of non-rigid materials; and

said integrated unit becomes rigid when the towing force is applied to said longitudinal towing devices.

30 16. The apparatus as claimed in claim 15, wherein the fastening between said longitudinal towing devices and said integrated unit is made by means of at least one of welding, stitching-in, stitching-on, adhesive bonding, and other suitable coupling devices.

17. The apparatus as claimed in claim 16, wherein said wedge-shaped structure further comprises:

a roof portion having a V-shaped recess,

wherein

5 said V-shaped recess of the roof portion includes legs that define planing edges;

 said planing edges including portions of said longitudinal towing devices secured in an edge area of said V-shaped recess; and

 said planing edges being made rigid by the forces transferred to

10 said planing edges when the towing force is applied to said longitudinal towing devices.

18. The apparatus as claimed in claim 17, wherein:

15 said collecting portion is a receptacle having a freeboard and a bottom bag equipped with a bottom hatch; and

 said bottom hatch including an open position and a closed position; and said bottom hatch adapted to vary between the open and closed position when the towing force is applied, which causes planed off liquid to be collected in said collector

20 portion at a level above the level of the surface of water outside said collector portion due to an overpressure formed inside said bottom bag which holds said bag in an extended state.

19. The apparatus as claimed in claim 15, wherein said wedge-shaped structure further comprises:

25 a roof portion having a V-shaped recess, wherein said V-shaped recess of the roof portion includes legs that define planing edges;

 said planing edges including portions of said longitudinal towing devices secured in an edge area of said V-shaped recess; and

30 said planing edges made rigid by the forces transferred to said planing edges when the towing force is applied to said longitudinal towing devices.

20. The apparatus as claimed in claim 19, wherein:

said wedge-shaped structure forms a tunnel having an inlet defined by a bottom of said wedge-shaped structure and side walls having a height equivalent to the skirt;

5 said tunnel further having an outlet located beneath said planing edges and approximately at their point of intersection; and where a cross-sectional area of said outlet is smaller than a cross-sectional area of said inlet.

10 21. The apparatus as claimed in claim 20, wherein a planing depth for said apparatus can be adjusted by varying the towing force speed.

22. The apparatus as claimed in claim 20, wherein a planing depth for said apparatus can be adjusted by adjustment means.

15

23. The apparatus as claimed in claim 22, wherein said adjustment means comprises an auxiliary system that is connected to said wedge-shaped structure allowing ballast to be provided to the system.

20 24. The apparatus as claimed in claim 15, 16, 19, 20, 21, 22 or 23 wherein:

said collecting portion is a receptacle having freeboard and a bottom equipped with a bottom hatch;

25 said bottom hatch including an open position and a closed position; and

said bottom hatch adapted to vary between the open and closed position when the towing force is applied, which causes planed off liquid to be collected in said collector portion at a level above the level of the surface of water outside said collector portion due to an overpressure formed inside said bottom bag which holds said bag in an extended state.

30

25. The apparatus as claimed in claim 24, wherein said bottom hatch is designed as a flap arranged over an opening which includes a reinforced netting portion in said bottom bag.

35

26. The apparatus as claimed in claim 25, wherein said bottom hatch includes a front edge and said bottom hatch is fastened at said front edge to said bottom with at least one elastic device to allow the

opening and closing of said bottom hatch according to the applied
towing force.

27. The apparatus as claimed in claim 24, wherein said bottom hatch
5 includes a front edge and said bottom hatch is fastened at said front
edge to said bottom bag with at least one elastic device to allow the
opening and closing of said bottom hatch according to the applied
towing force.

10 28. The apparatus as claimed in claim 27, wherein said bottom of said
bottom bag includes a ballast to allow ballasting of said bottom bag.

29. The apparatus as claimed in claim 21, 22 or 23, wherein the
planing depth is adjusted by including an auxiliary system connected to
15 said wedge-shaped structure to ballast the system.

30. The apparatus as claimed in claim 15, wherein the fastening
between said longitudinal towing devices and said integrated unit is
made such that when towing forces are transferred to said integrated
20 unit a geometrical shape is created for said integrated unit.

1/4

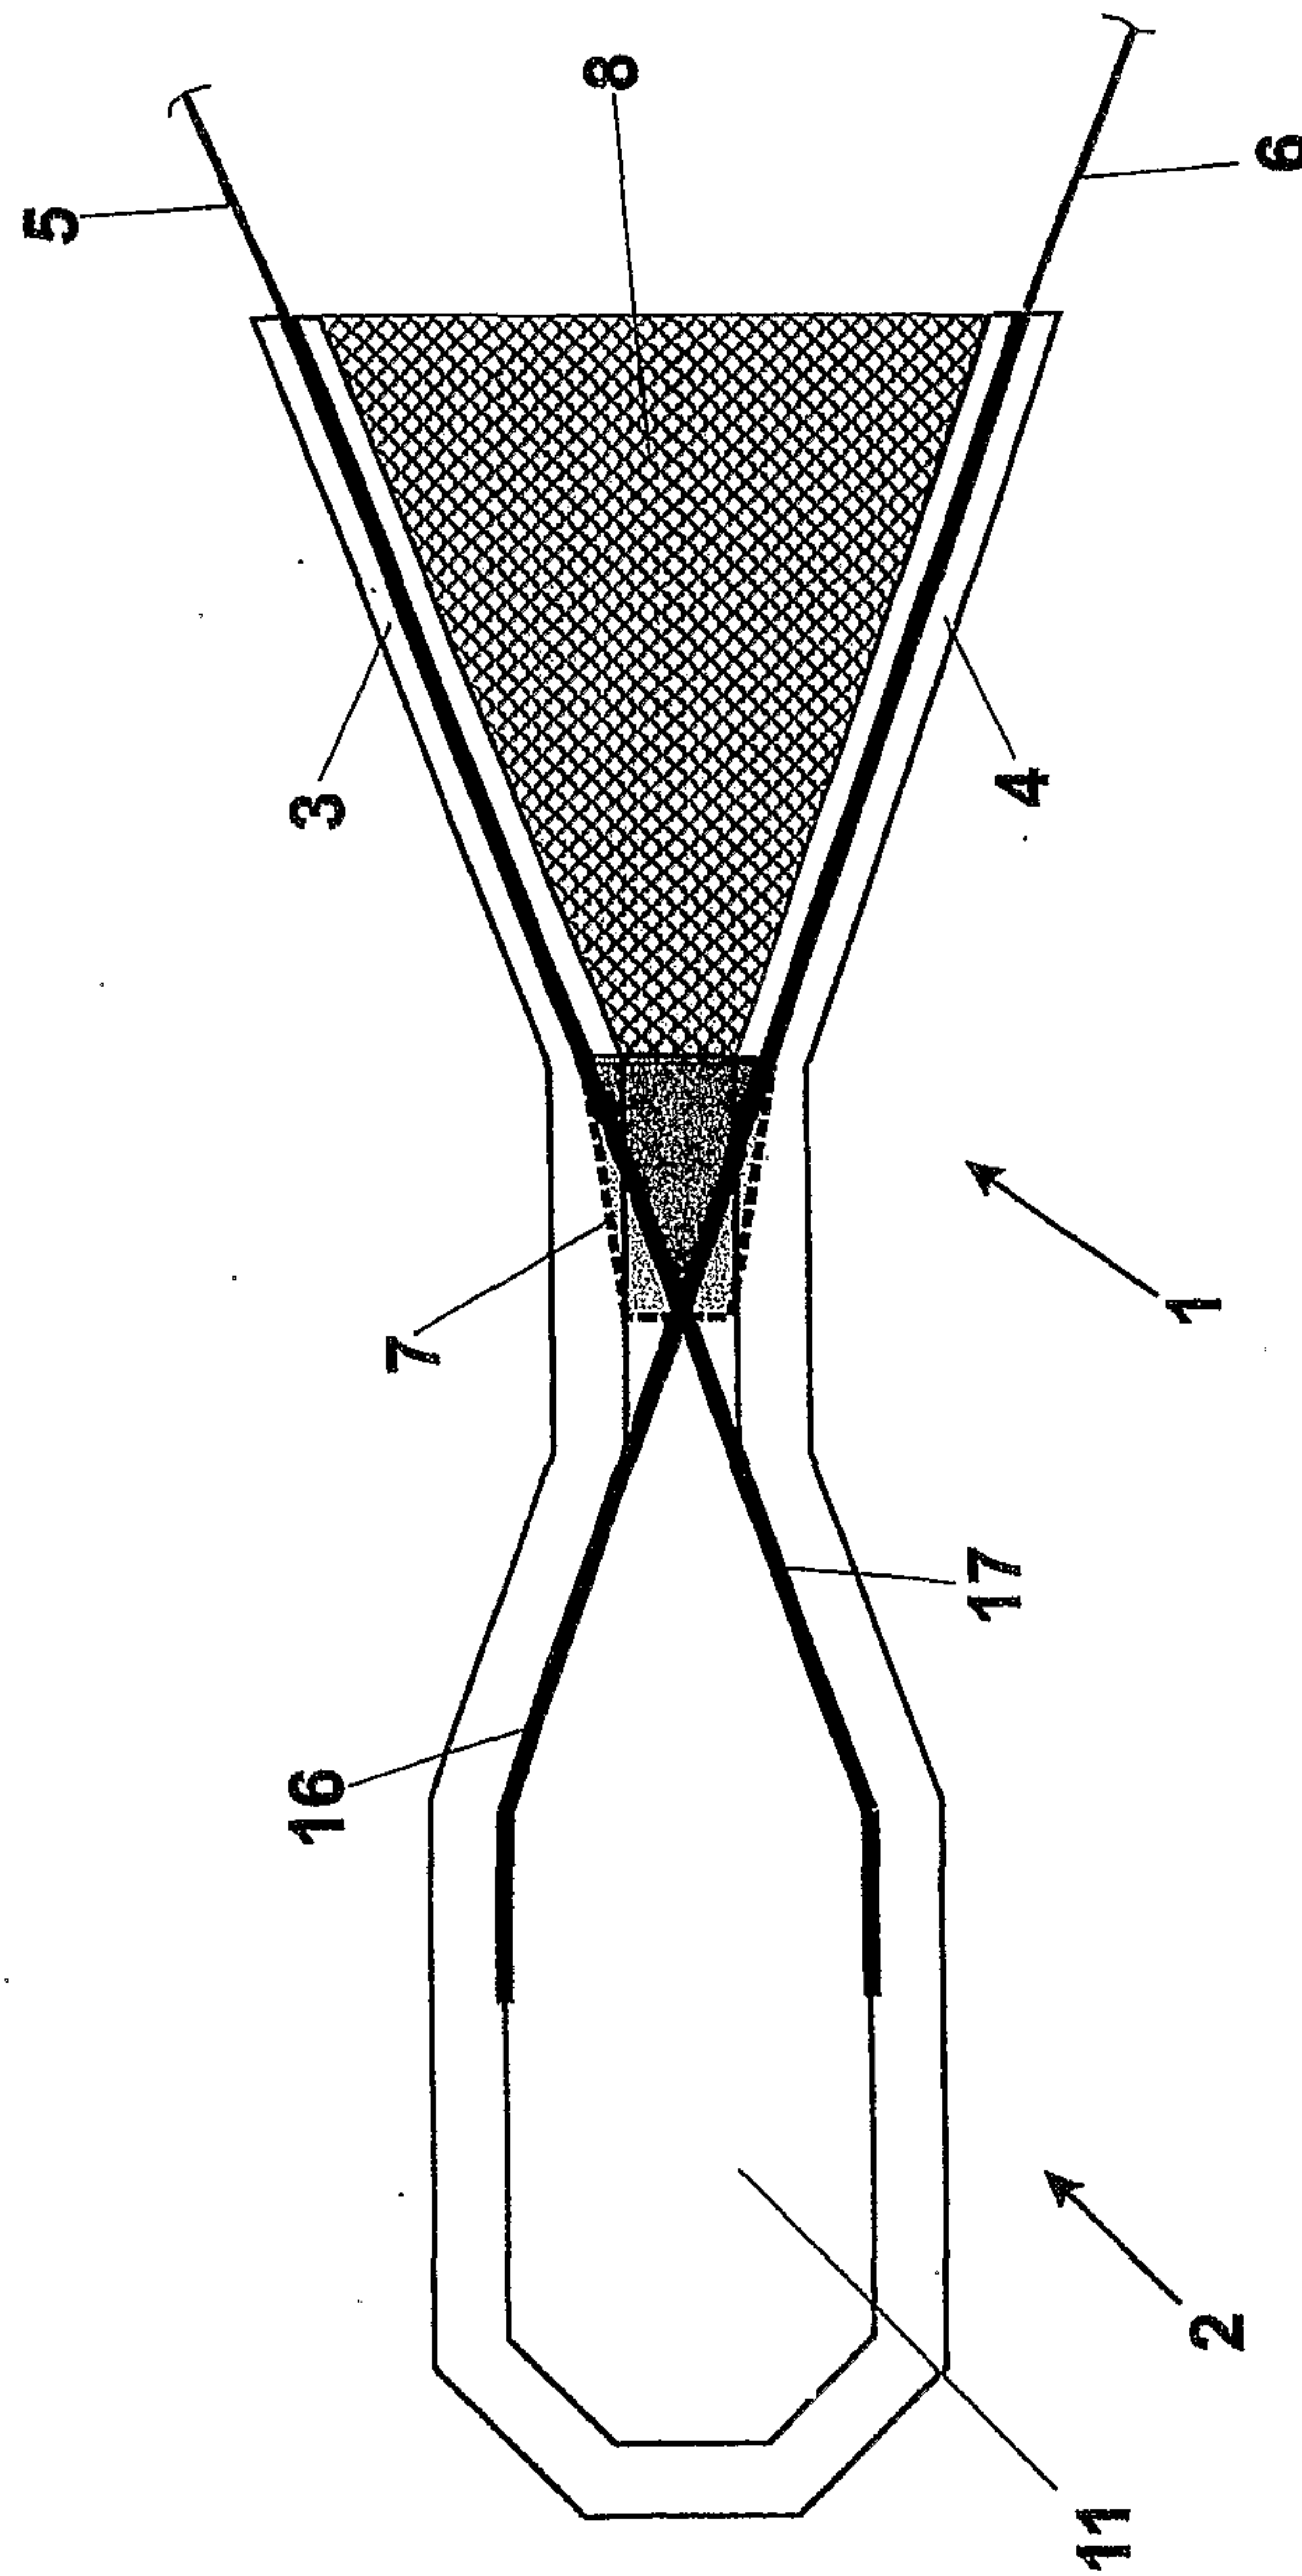


Fig. 1

2/4

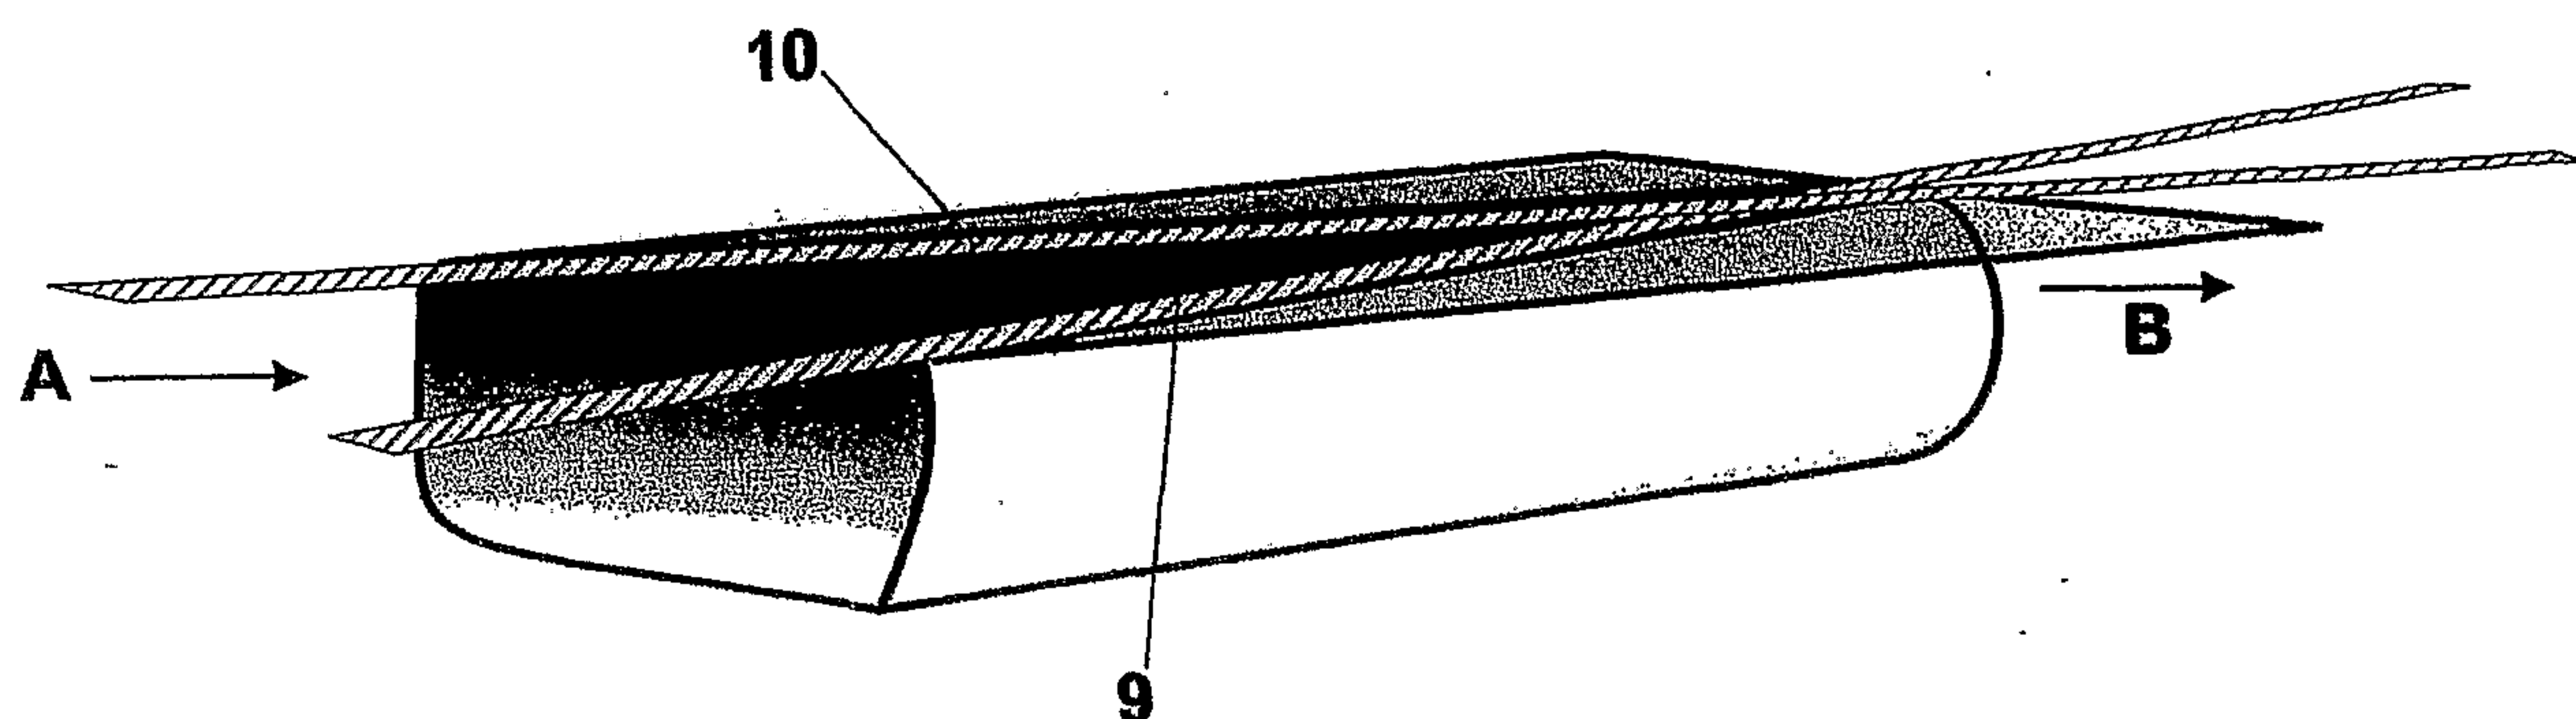


Fig. 2

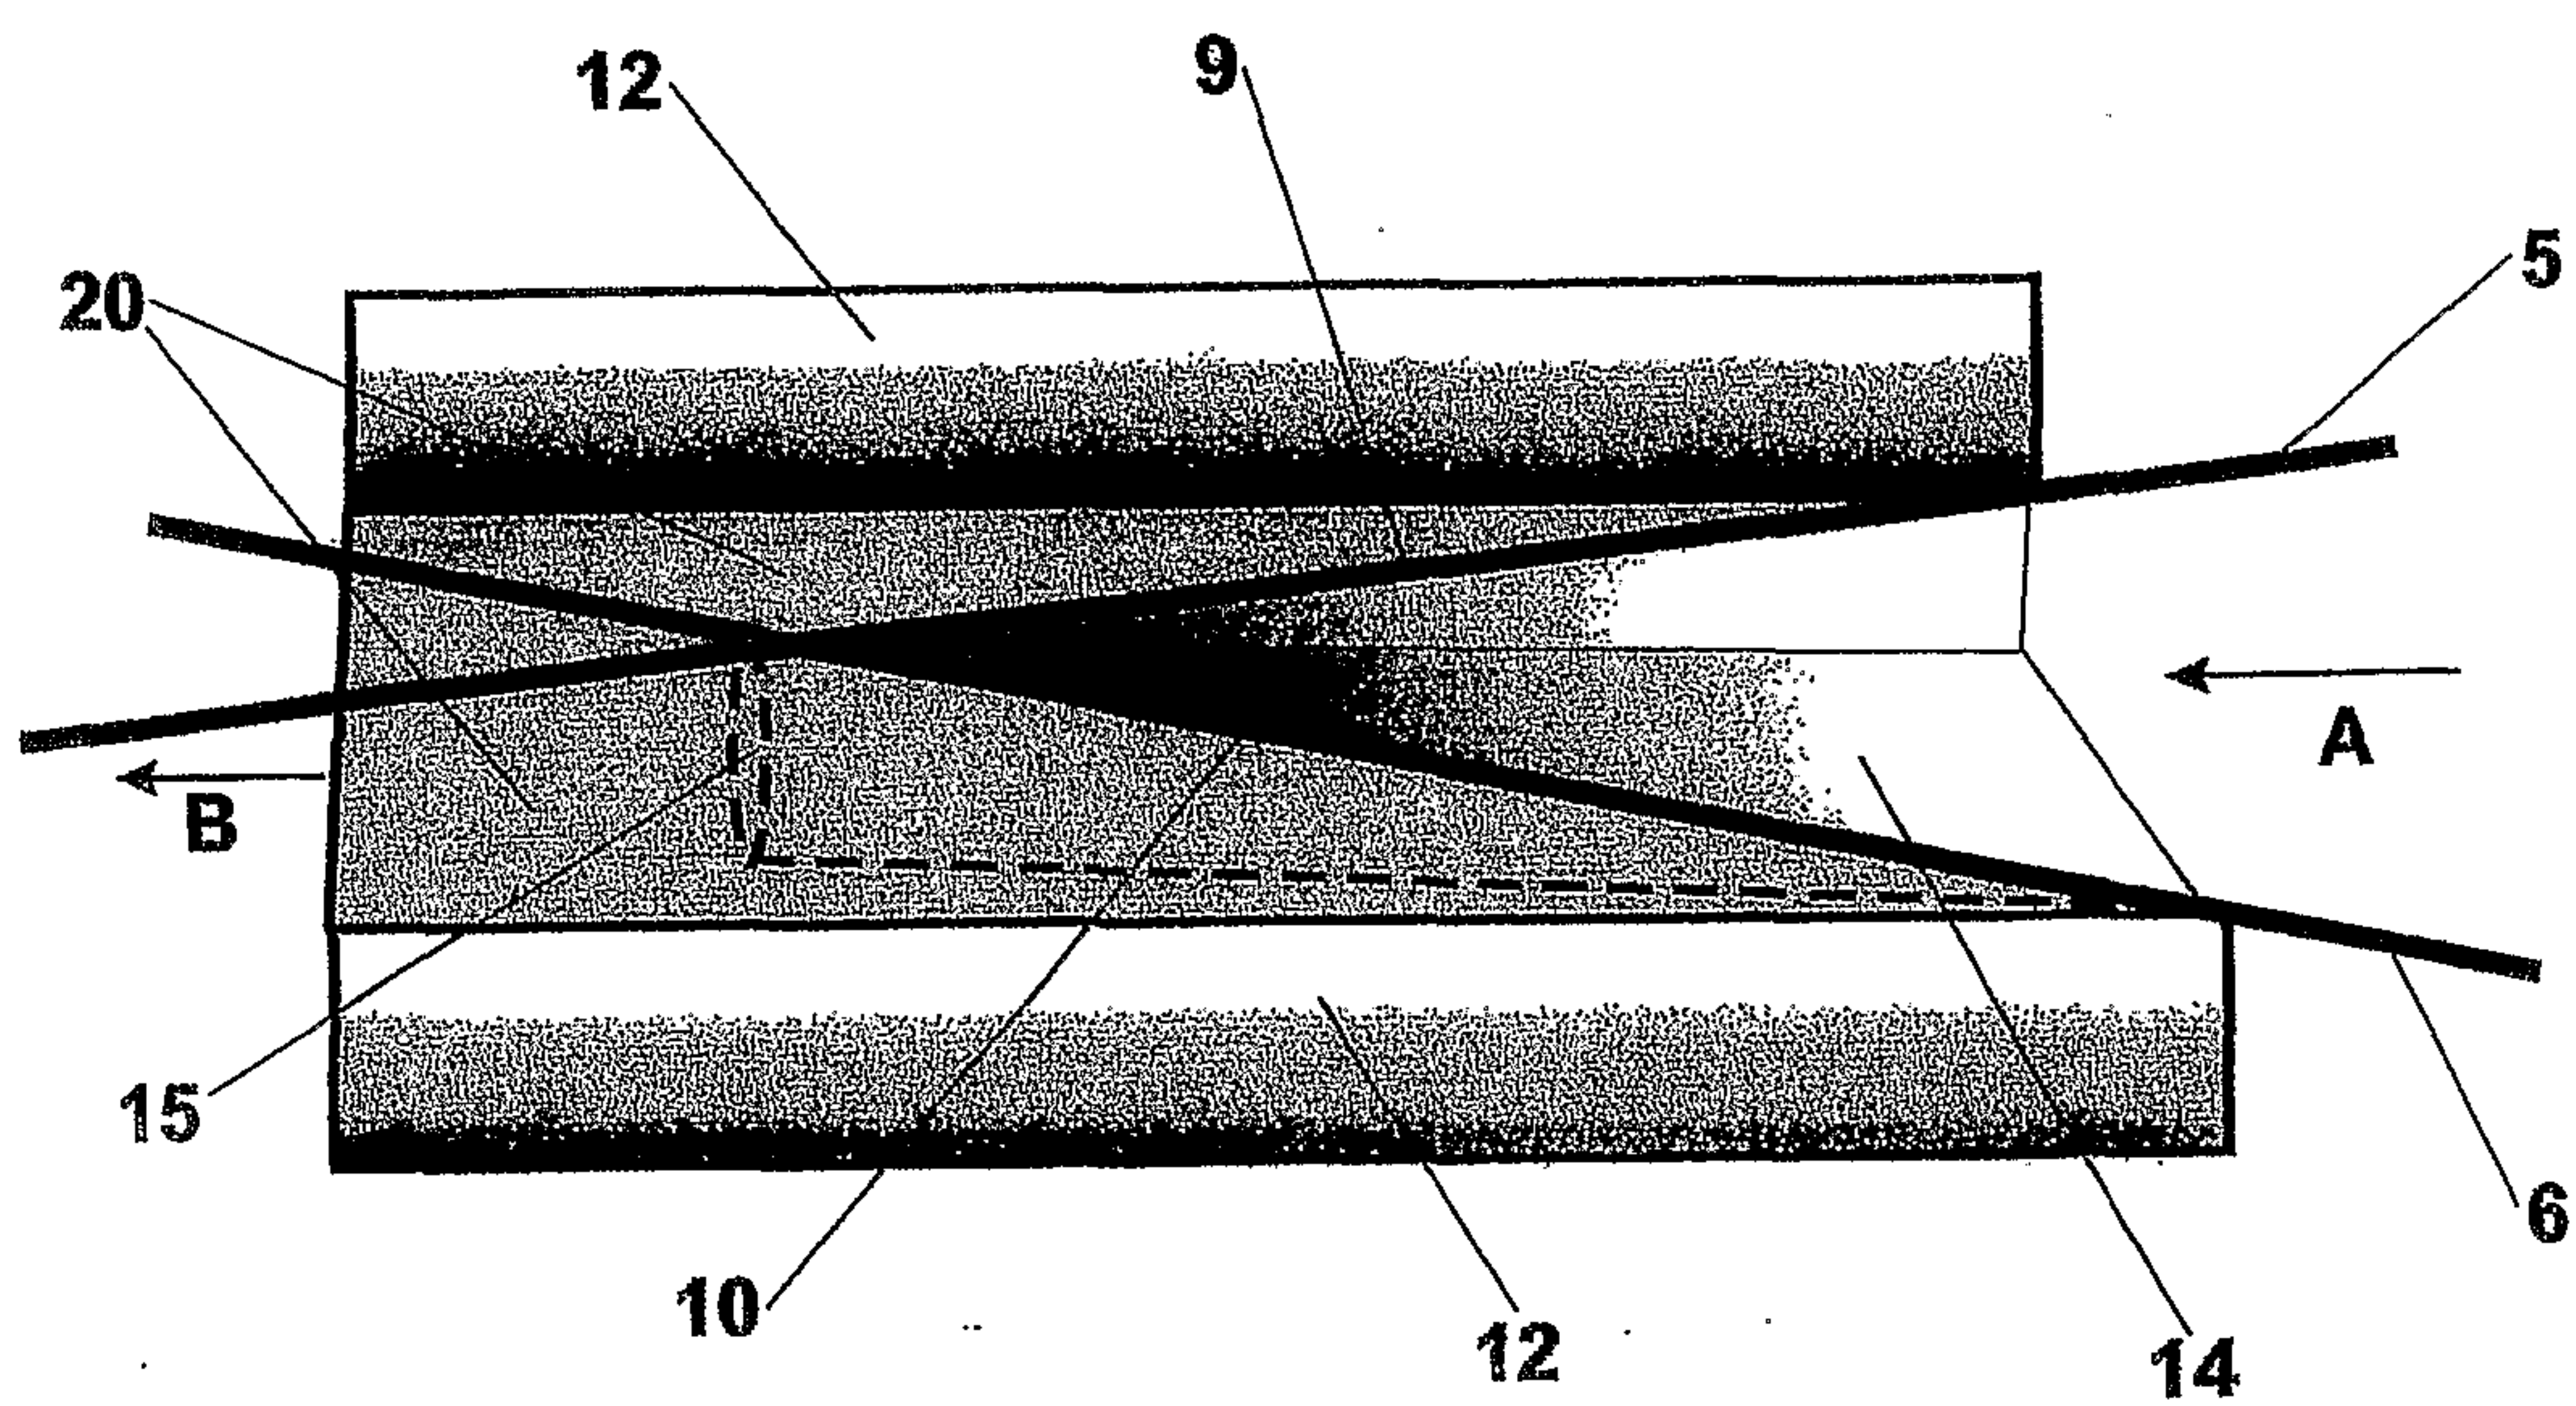


Fig. 3

3/4

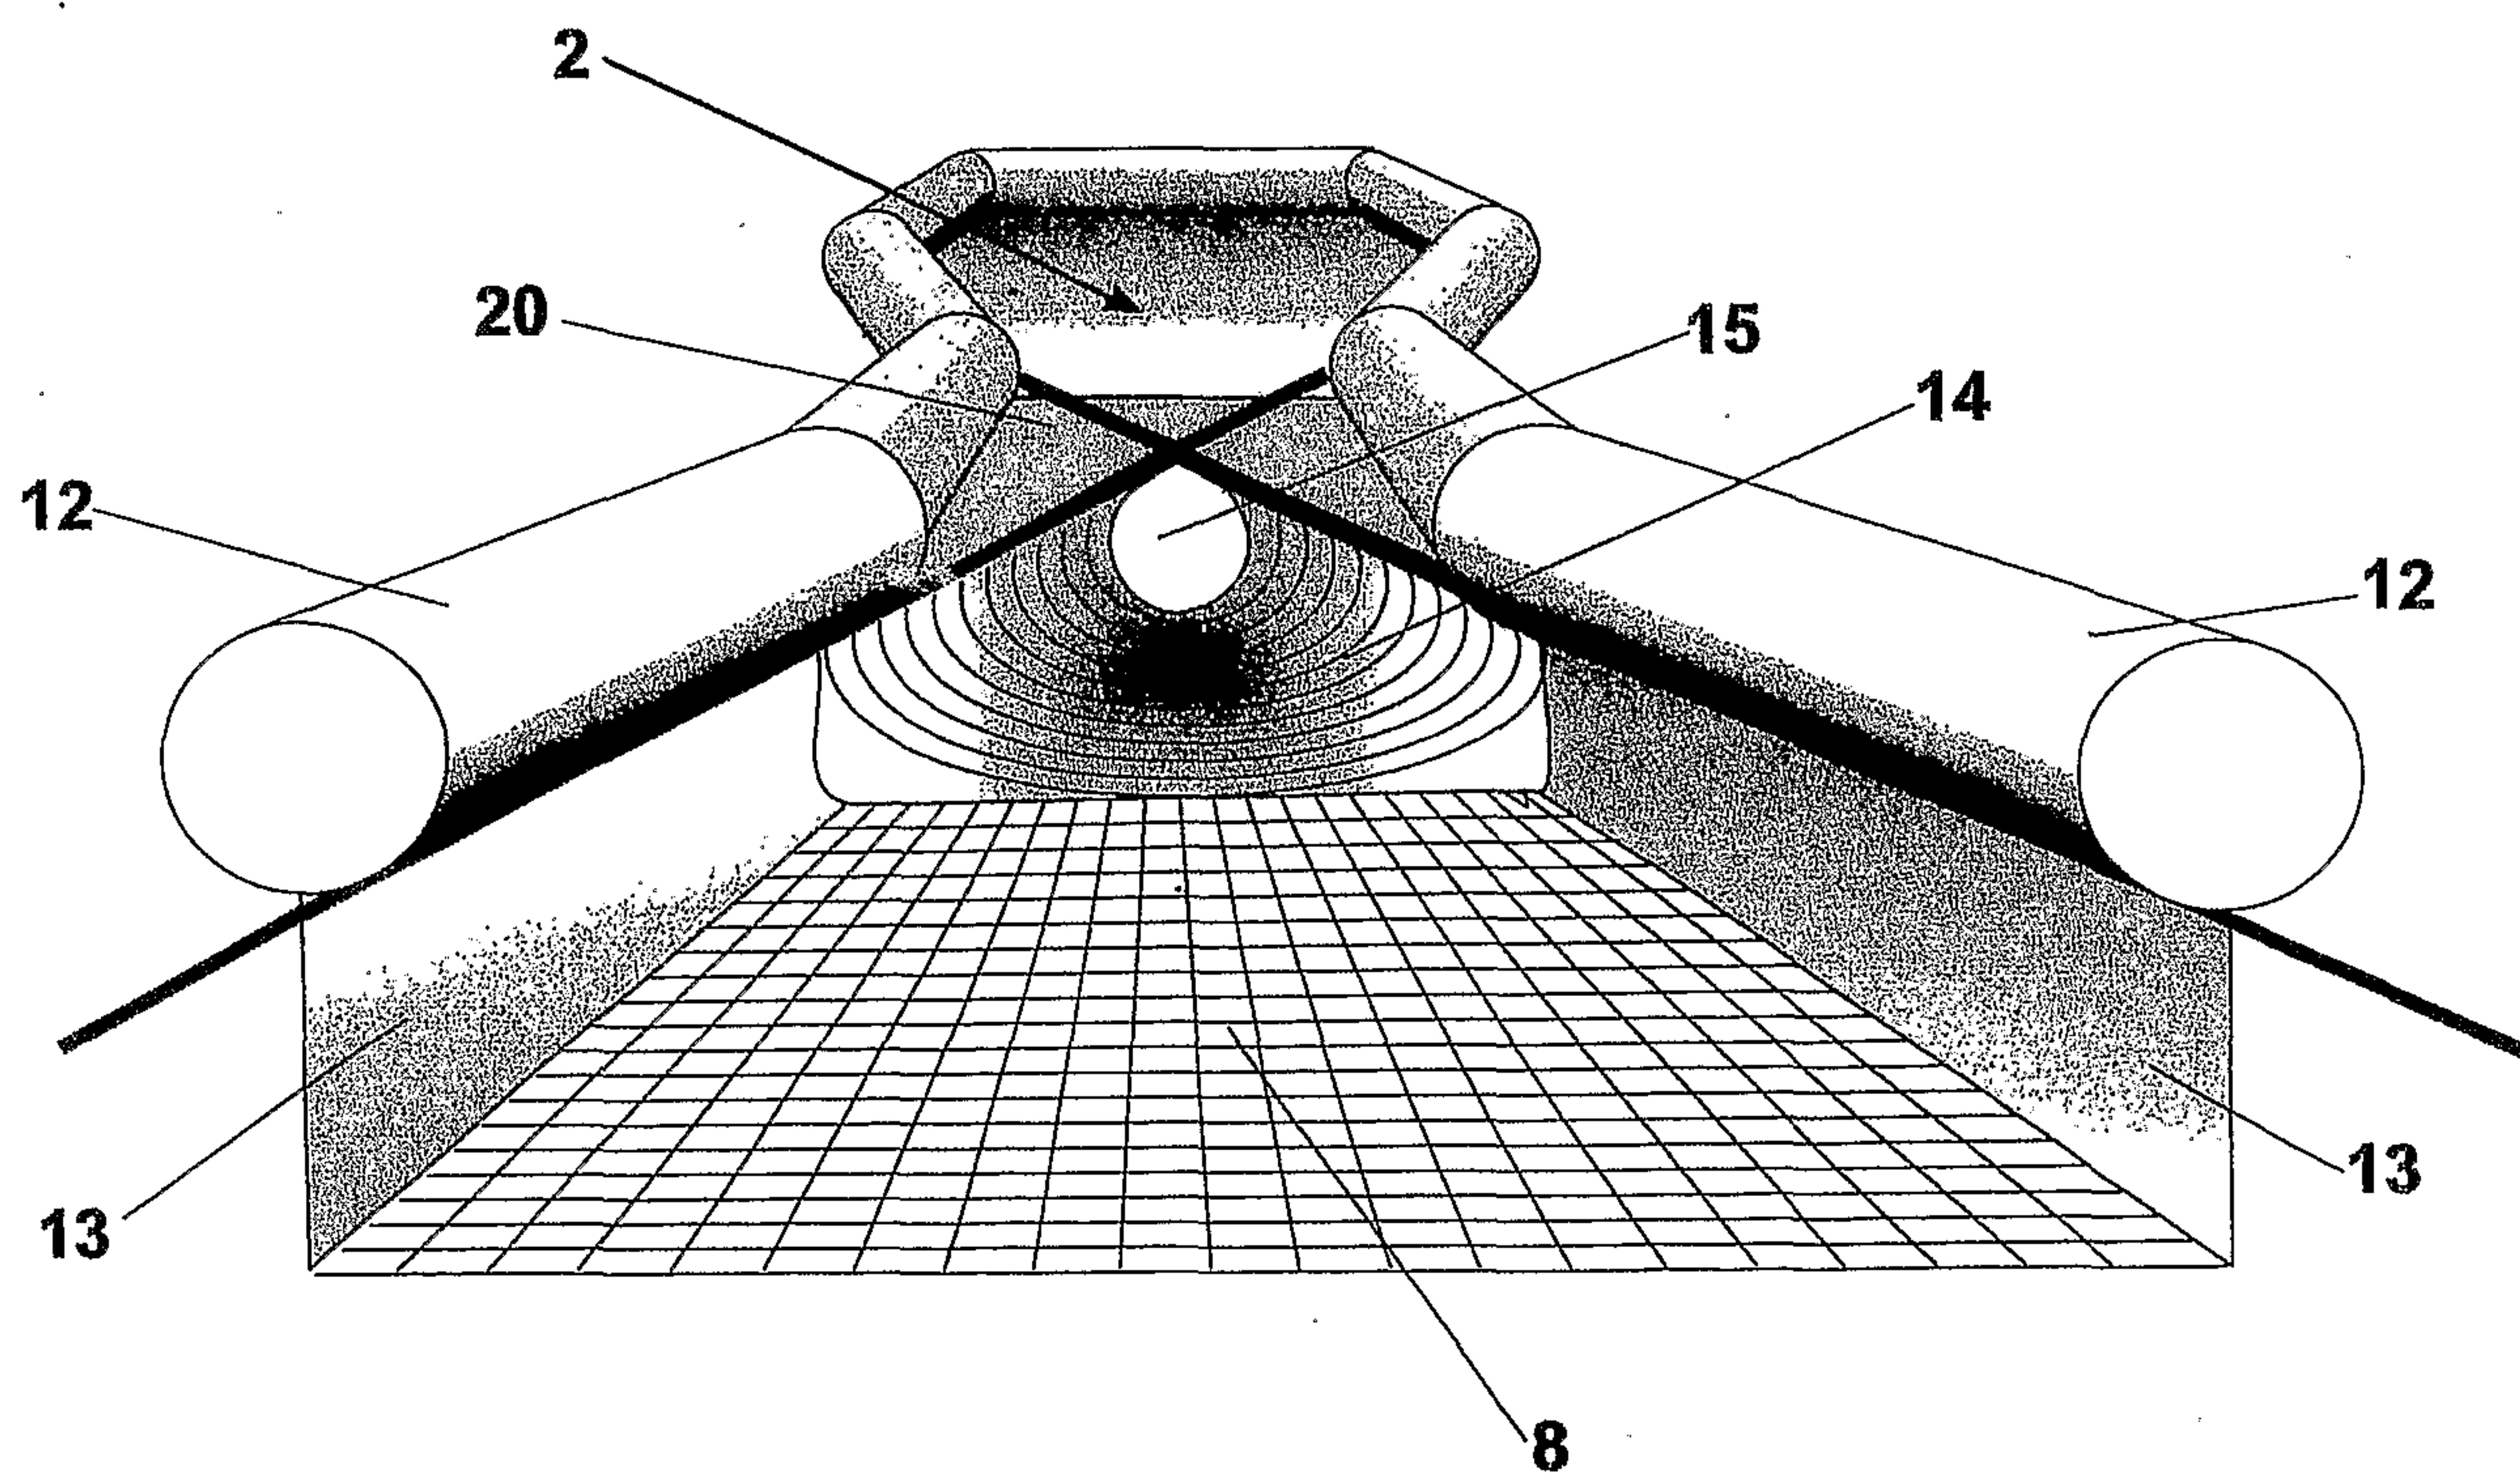


Fig. 4

