



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2458475 C 2012/02/14

(11)(21) **2 458 475**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2002/08/13
(87) Date publication PCT/PCT Publication Date: 2003/04/17
(45) Date de délivrance/Issue Date: 2012/02/14
(85) Entrée phase nationale/National Entry: 2004/03/11
(86) N° demande PCT/PCT Application No.: US 2002/025606
(87) N° publication PCT/PCT Publication No.: 2003/031549
(30) Priorité/Priority: 2001/10/10 (US09/974,388)

(51) Cl.Int./Int.Cl. *C11D 1/835* (2006.01),
C11D 1/66 (2006.01), *C11D 1/62* (2006.01),
C11D 1/72 (2006.01), *C11D 3/20* (2006.01)
(72) Inventeur/Inventor:
LIU, AUGUSTINE, US
(73) Propriétaire/Owner:
3M INNOVATIVE PROPERTIES COMPANY, US
(74) Agent: SMART & BIGGAR

(54) Titre : COMPOSITION DE NETTOYAGE
(54) Title: CLEANING COMPOSITION

(57) **Abrégé/Abstract:**

Improved cleaning compositions are described that are efficient in removing both food and industrial grease, heel marks, and the like from hard surfaces, wherein improved cleaning compositions contain certain nonionic surfactants and quaternary amine salts, when combined with a slightly water-soluble polar organic compound that have a surprising synergistic effect resulting in a marked improvement in the removal of hydrocarbon-containing soils as shown by decreased soaking times required for soil removal.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number
WO 03/031549 A1

(51) International Patent Classification⁷: **C11D 1/835**

(21) International Application Number: PCT/US02/25606

(22) International Filing Date: 13 August 2002 (13.08.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/974,388 10 October 2001 (10.10.2001) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventor: **LIU, Augustine**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: **PETERS, Carolyn, V.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CLEANING COMPOSITION

(57) Abstract: Improved cleaning compositions are described that are efficient in removing both food and industrial grease, heel marks, and the like from hard surfaces, wherein improved cleaning compositions contain certain nonionic surfactants and quaternary amine salts, when combined with a slightly water-soluble polar organic compound that have a surprising synergistic effect resulting in a marked improvement in the removal of hydrocarbon-containing soils as shown by decreased soaking times required for soil removal.



WO 03/031549 A1

60557-7096

CLEANING COMPOSITION

Field of the Invention

The present invention relates to a cleaning composition formulated to remove
5 hydrocarbon-containing soils from hard surfaces.

Background of the Invention

Chemical cleaners are a significant portion of the industrial cleaning market. A
chemical cleaner is typically aqueous and comprises an organic solvent to solubilize
10 various soils, a surfactant, which serves as a wetting agent, and a builder, which serves to
chelate ions present in water, such as magnesium and calcium. The types and ratios of
these ingredients can vary considerably depending on the types of soils to be cleaned and
the performance desired. It is common that all components are water-soluble.

In some instances, however, particularly with the solvent ingredient, the water
15 solubility can be negligible. In these cases, components commonly called "couplers" or
"hydrotropes" are used to increase the apparent water solubility of the organic solvent in
the cleaning composition. The amount of coupler required depends on the type of coupler,
organic solvent, and the other components of the mixture. It is typically preferred to use
the minimum amount of coupler necessary to completely solubilize the solvent, as this
20 tends to reduce the cost of the cleaning composition.

It is well known that removing hydrocarbon-containing soils from surfaces can be
extremely difficult. These hydrocarbon-containing soils may include industrial type
greases such as motor oil and lithium grease, and food greases such as lard and vegetable
oils, as well as a wide range of other oily, greasy materials. The goal of formulating a
25 cleaning composition that will effectively remove greasy residues from a hard surface has
lead to a bewildering array of cleaning compositions on the industrial market. In general,
the user wishes to achieve fast cleaning using the least amount of cleaning composition
possible to avoid leaving behind residual chemical on the surface being cleaned.

There have been attempts to make improved cleaning compositions. They have
30 included compositions providing improved cleaning that were substantially non-streaking
on hard surfaces and contain a surfactant of amine oxide and a quaternary amine salt and a

slightly polar organic compound. These cleaning solutions are effective for food soils, grease and the like.

Another class of cleaning compositions are those capable of removing hydrophobic soils, such as food grease and the like are those containing a non-ionic surfactant, and a
5 very slightly water soluble organic solvent.

Although many commercially available cleaning compositions are quite effective at cleaning food grease, and others, particularly solvent-based cleaning compositions, are quite effective at removing industrial grease, the development of a cleaning composition that is effective in removing both food and industrial grease has been particularly
10 challenging. Users are always desirous of improved grease removal properties in cleaning compositions, especially those that are capable of penetrating and emulsifying the soil quickly.


Summary of the Invention

15 In accordance with the present invention, improved cleaning compositions are described that are efficient in removing both food and industrial grease, heel marks, and the like from hard surfaces. Further, the compositions may have other uses such as removing food soils, grease, and the like from fibrous substrates such as carpet, furniture, and similar substrates. It has been discovered that certain nonionic surfactants and
20 quaternary amine salts, when combined with a slightly water-soluble polar organic compound, have a surprising synergistic effect resulting in a marked improvement in the removal of hydrocarbon-containing soils as shown by decreased soaking times required for soil removal.

Briefly, in one aspect of the present invention, a composition useful as an aqueous
25 cleaner for removing hydrocarbon-containing soils is provided comprising:

- a) a nonionic surfactant selected from the group consisting of a nonionic surfactant selected from the group consisting of a branched or linear primary alcohol ethoxylate, a secondary alcohol ethoxylate, a branched decyl/tridecyl alcohol ethoxylate, a branched or linear alkylphenol ethoxylate, a branched or
30 linear alkyl amine ethoxylate, an alkyl ether amine ethoxylate, a branched or linear alcohol alkoxyate, alkyl glycosides, and a mixture thereof;

- b) a quaternary amine salt having the general formula (I)

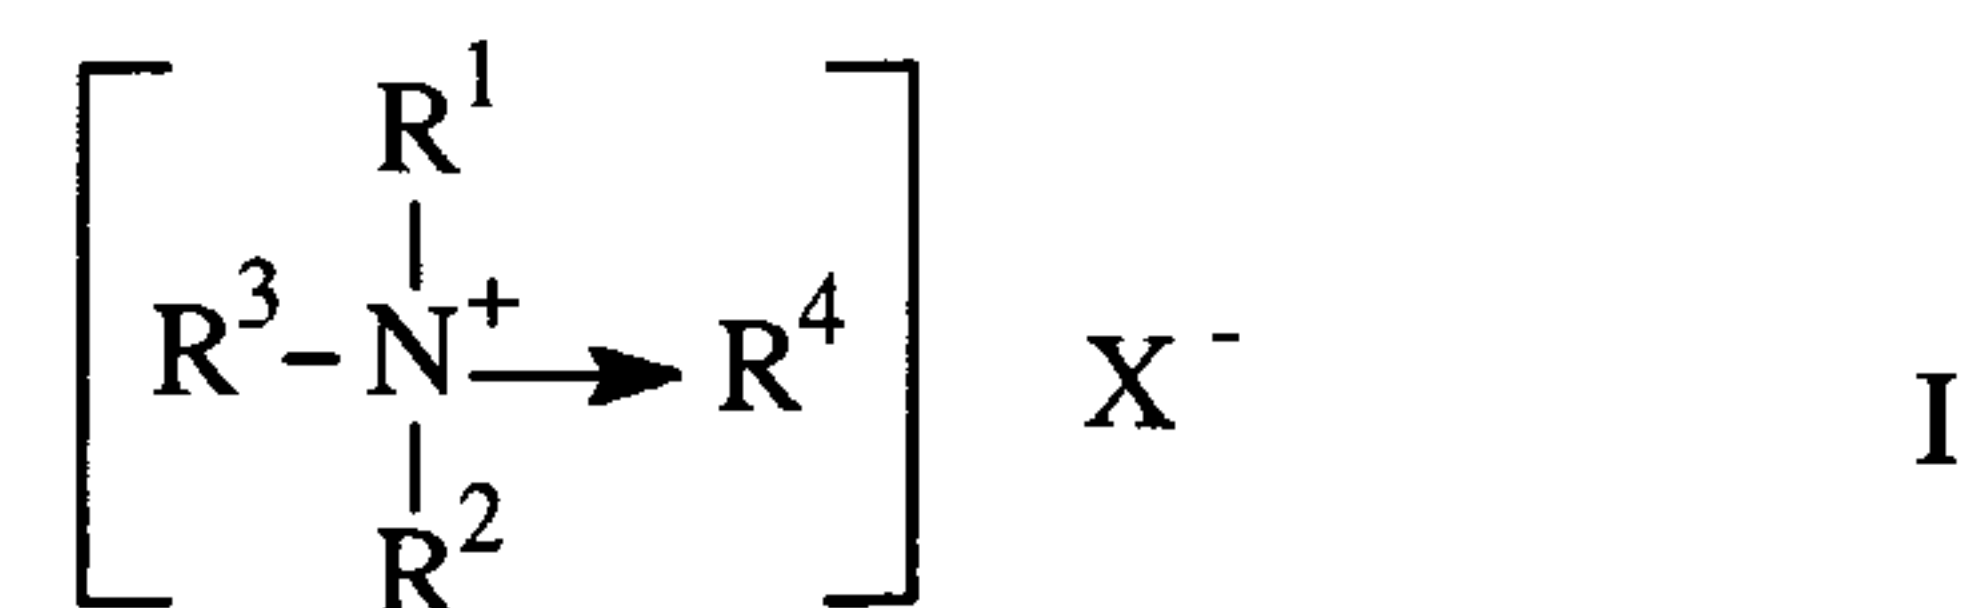

wherein R^1 and R^2 are the same or different and are selected from the group consisting of alkyl and substituted alkyl groups, R^3 is selected from the group consisting of straight chain alkyls, branched chain alkyls, straight chain heteroalkyls, and branched chain heteroalkyls having from about 10 to 20 carbon atoms, R^4 is selected from the group consisting of alkyl groups having from 1 to about 5 carbon atoms (preferably methyl), and X is a halogen atom, preferably atomic chlorine;

- c) a slightly water-soluble polar organic compound; and

- d) water.

Another embodiment of the invention is a method of removing hydrocarbon-containing soils from soiled surfaces comprising the steps of applying to a soiled surface an effective amount of the composition, as described above; and performing a mechanical operation on the surface with an abrasive article after applying the composition to the surface. An optional step of removing the composition from the surface may also be included in the method.

Description of the Preferred Embodiment(s)

A composition for removing hydrocarbon-containing soils in accordance with the present invention comprises a nonionic surfactant, a quaternary amine salt, a very slightly water-soluble polar organic compound, and water. The composition may also contain other optional but conventional additives.

Nonionic Surfactants

The nonionic surfactant serves the function of decreasing the surface tension of water within the compositions of the invention. Examples of nonionic surfactants useful in the present invention are nonionic surfactants formed by condensation of alkyl phenols, alkyl amines, or aliphatic alcohols with sufficient ethylene oxide, propylene oxide, or a combination thereof, to produce a compound having a polyoxyethylene and/or

60557-7096

polyoxypropylene chain within the molecule, that is, a chain composed of recurring (-O-CH₂-CH₂-) groups, or a chain composed of recurring (-O-CH₂-CH-CH₃) groups, or a combination thereof. Preferably, the nonionic surfactant is selected from the group consisting of a branched or linear primary alcohol ethoxylate, a secondary alcohol ethoxylate, a branched decyl/tridecyl alcohol ethoxylate, a branched or linear alkylphenol ethoxylate, a branched or linear alkyl amine ethoxylate, an alkyl ether amine ethoxylate, a linear alcohol alkoxyate, and a mixture thereof. Other examples of nonionic surfactants useful in the present invention include alkyl glucosides.

The nonionic surfactants preferably have an HLB value of about 7 to about 16. "HLB," as used herein, refers to an emulsification behavior of a surfactant as well as the relationship between hydrophilic and lipophilic portions of a molecule.

Preferred nonionic surfactants are commercially available and used for their detergent, surface active, wetting and emulsifying properties. One particularly preferred nonionic surfactant used in the invention contains sufficient ethylene oxide units to insure solubility of the nonionic surfactant in the composition or in any dilution thereof that may be used in practice. Another preferred group of nonionic surfactants includes from about 5 moles to about 40 moles of ethylene oxide per mole of nonionic surfactant, and more preferably about 5 moles to about 15 moles of ethylene oxide per mole of nonionic surfactant. Further suitable nonionic surfactants include linear alcohol ethoxylates such as available under the trade designation "TOMADYNE 101LF"TM, commercially available from Tomah Products, Inc., Milton, WI; ethoxylated tridecyl alcohols such as "ICONOL TDA6"TM (having 6 moles of ethylene oxide per mole of ethoxylated tridecyl alcohol), and "ICONOL TDA9"TM (having 9 moles of ethylene oxide per mole of ethoxylated tridecyl alcohol), commercially available from BASF, Mount Olive, NJ; "VARONIC K-205"TM (cocoamine ethoxylate having 5 moles of ethylene oxide per mole of cocoamine ethoxylate), commercially available from Sherex Chemical Co., Dublin, OH; and "TRITON DF-12"TM (modified polyethoxylated alcohol), commercially available from Dow, Midland, MI), alkyl glucosides such as "GLUCOPON 425"TM (a fatty alcohol C₈-C₁₆ polyglycoside) available from Cognis Corporation, Ambler, PA.

The weight percent of the nonionic surfactant typically ranges from about 0.1 to about 1.0 weight percent in ready-to-use formulations, with amounts of the surfactant


60557-7096

greater than about 1.0 weight percent being uneconomical and not typically rendering a more beneficial wetting property. If the amount of nonionic surfactant is below about 0.1 weight percent, insufficient wetting of the hydrocarbon-containing soil-covered surface may be noticed, but this is not necessarily considered outside of the invention.

It is also contemplated that blends of nonionic and cationic surfactants can be used in the present invention, provided the nonionic surfactant concentration is within the typical weight ranges of a non-blended nonionic surfactant. Examples of such surfactant blends include TOMADYNE 100TM and TOMADYNE 102TM, both commercially available from Tomah Products, Inc., Milton, Wisconsin.

Quaternary Amine Salt Surfactants

Quaternary amine salts are based on the reaction of high molecular weight aliphatic tertiary amines with an alkylating agent such as methyl chloride. They are generally more cationic and more stable to pH change than other amine-based surfactants such as ethoxylated amines. Quaternary amine salts useful as surfactants in the cleaning compositions of the invention which have a synergistic cleaning effect with the nonionic surfactant are those within general formula (I):

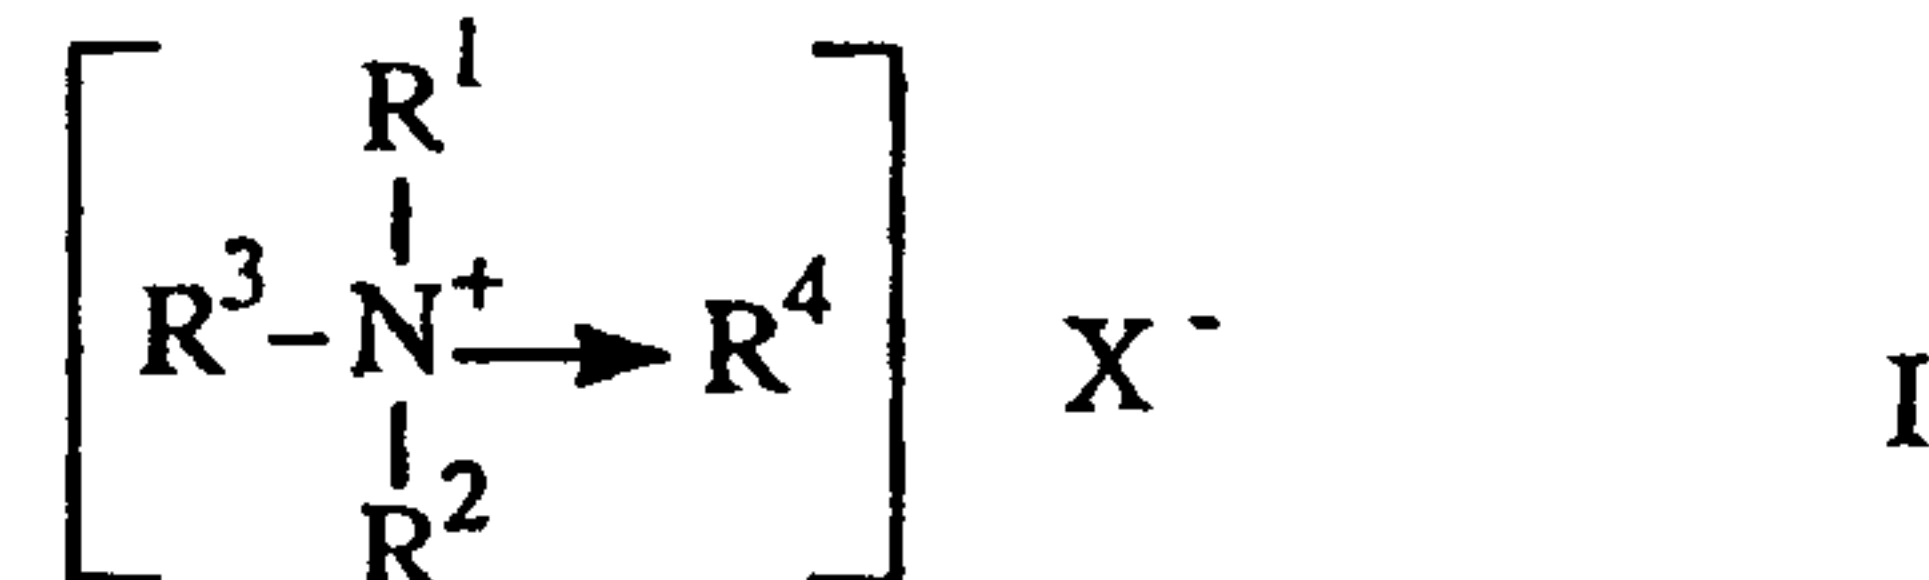

wherein R^1 and R^2 are the same or different and are selected from the group consisting of alkyl and substituted alkyl groups, R^3 is selected from the group consisting of straight chain alkyls, branched chain alkyls, straight chain heteroalkyls, and branched chain heteroalkyls having from about 10 to 20 carbon atoms, R^4 is selected from the group consisting of alkyl groups having from 1 to about 5 carbon atoms (preferably methyl), and X is a halogen atom, preferably atomic chlorine.

Those quaternary amine salts, which are readily combinable with the other ingredients of the compositions of the invention to form one-phase compositions, are preferred. Examples of such quaternary amine salts are "Q-17-5"TM (isotridecyloxypropyl poly(5) oxyethylene methyl ammonium chloride, and "Q-S-80"TM (mono soya ammonium chloride quaternary), both available from Tomah Products, Inc., Milton, WI.

60557-7096

In compositions in accordance with the present invention, the weight ratio of nonionic surfactant to quaternary amine salt typically ranges from about 1:4 to about 4:1, preferably from about 1:2 to about 2:1, and more preferably is about 1:1.

Slightly Water- Soluble Polar Organic Compound

5 Any number of slightly water-soluble polar organic compounds may be used in the compositions of the invention to promote fast drying properties of the compositions, and to solubilize the hydrocarbon-containing soils.

As used herein the term "slightly water-soluble" means that the polar organic compound has a water solubility ranging from about 0.01 weight percent to about
10 1.0 weight percent, more preferably ranging from about 0.01 weight percent to about 0.2 weight percent at about 20°C. Preferably, the slightly water soluble polar organic compound is not a hydrocarbon or halocarbon, contains one or more heteroatoms of oxygen, nitrogen, sulfur, phosphorous containing functional groups and contains an alkyl group containing about 7 carbon atoms to about 16 carbon atoms. More preferably, the
15 slightly water soluble polar organic compound contains a moiety selected from the group of an alcohol, an aldehyde, a ketone, an ether, a glycol ether, an acid, an amine, an ester, a pyrrolidone, and a compatible mixture thereof.

Such slightly water-soluble polar organic compounds are commercially available. One preferred class of slightly water-soluble polar organic compounds within the defined
20 solubility range are ethylene glycol ethers having from about 6 to about 12 carbon atoms. An example of a glycol ether meeting this description includes ethylene glycol 2-ethyl hexyl ether "EKTASOLVE EEH"TM (water solubility of about 0.2 weight), commercially available from Eastman Chemical, Kingsport, TN. Another class of slightly water-soluble polar organic compounds useful in the present invention includes normal and branched
25 chain alkyl alcohols having from about 6 to about 12 carbon atoms, such as isooctyl alcohol (water solubility of about 0.06 weight percent). Isooctyl alcohol is commercially available under the tradename "EXXAL 8"TM from Exxon, Houston, TX.

Yet another class of slightly water-soluble polar organic compounds useful in the present invention are N-alkyl pyrrolidones having water solubility within the preferred
30 ranges previously mentioned. One useful example is N-octyl pyrrolidone (solubility in

60557-7096

water of about 0.124 weight percent), available under the trade designation
"SURFADONE LP-100"TM from International Specialty Products, Wayne, NJ.

Other useful slightly water-soluble polar organic compounds include 1-octanol
having a water solubility of about 0.1 weight percent and di-isobutyl ketone having a water
solubility of about 0.05 weight percent, both commercially available from Aldrich
Chemicals, Milwaukee, WI.

Use of a mixture of any of the slightly water-soluble polar organic compounds
mentioned herein may be used, provided they are compatible with each other and with the
other ingredients.

In compositions according to the present invention, the weight ratio of active
slightly water-soluble polar organic compound to active surfactant (nonionic surfactant +
quaternary amine salt) typically ranges from about 0.1:1 to about 1:1.

Optional Additives

The compositions of the invention may include other optional but conventional
additives. For example, the composition according to the invention may contain a colorant
to provide a more aesthetic appearance, a fragrance to provide more acceptable smell, a
preservative to prevent bacterial growth in the solution, a suitable anti-microbial agent or
bacteriostat to eradicate germs, mold, mildew, and the like. Other surfactants, chelating
agents, antioxidants, foaming or anti-foaming agents, film-forming agents, and the like
may also be included.

The compositions of the present invention preferably have a pH (i.e., negative
logarithm of the hydrogen ion concentration), which renders the compositions basic, i.e.,
pH greater than 7.0, which renders the compositions more effective in solubilizing grease.
One preferred class of pH adjustment chemicals is the low molecular weight alkanol amine
compounds such as 2-amino-2-methyl-1-propanol (AMP95)TM, available from Dow, Midland,
MI), monoethanolamine and the like.

Further, it may be advantageous to include a compatible thickening agent to render
the viscosity of the compositions of the invention such that they may be applied to a
vertical surface, e.g., a baseboard, and not run therefrom. If such running occurs, the
residence time of the composition with respect to the surface being cleaned would be
reduced. Alternatively, the composition may run onto areas where it is not wanted.

60557-7096

Methods of Use of the Inventive Compositions

The compositions of the invention can, of course, be made sold and used as concentrates, or in diluted or "ready-to-use" form. When in "ready-to-use" form, the compositions preferably have the same ratios of actives as the concentrates. Actual
5 effective dilution of the concentrates will depend on the intended surface to be cleaned, type of soil, degree of soiling, and the like.

The compositions of the invention may be sprayed upon the soiled surface or simply poured thereon in concentrated or "ready-to-use" form as desired. Spraying can be accomplished by conventional mechanical spraying devices (such as by use of a
10 conventional trigger spray device) or by using an aerosol-dispensing container with a sufficient amount of suitable aerosol propellant such as a low boiling alkanes or mixtures thereof, such as a mixture isobutane and propane. Performing a mechanical operation to the soiled surface after application of a composition of the invention may be desired or required for removing hydrocarbon-containing soils. Performing a mechanical operation
15 may include wiping, abrading, scrubbing, brushing, and the like. However, if the underlying surface is soft and/or decorative, abrading or scrubbing may not be desirable.

An abrasive article that may be used includes, for example, a porous sponge material, or nonwoven or woven article. One preferred nonwoven material is that known under the trade designation "SCOTCH-BRITE"TM from Minnesota Mining and
20 Manufacturing Company (3M), St. Paul, MN. Such nonwoven products and their manufacture are described in U.S. Pat. No. 2,958,593 (Hoover et al.). After performing a mechanical operation on the surface, the composition is preferably removed. This can be accomplished by a variety of techniques that are generally known, including, for example, rinsing the composition from the surface, or the compositions may be simply wiped away
25 with an absorbent material.

The objects, features and advantages of the present invention are further illustrated by the following examples, but the particular materials and amounts thereof recited in these examples, as well as other conditions and details, should not be construed to unduly limit this invention. All materials are commercially available or known to those skilled in
30 the art unless otherwise stated or apparent. All parts and percentages in the Examples and

60557-7096

the Specification are by weight (based on 100% active material), unless otherwise specified.

Test Methods

Petroleum Grease Removal Test

A standard petroleum grease was prepared (at least 2-7 days prior to testing) consisting of 25 grams 20 weight (2W) oil, 25 grams industrial lithium grease known under the trade designation "STA-Grease"TM from Conoco Oil Company, 75 grams heptane, 75 grams methylene chloride and 0.2 gram oil soluble dye. These ingredients were mixed in a beaker equipped with a stir bar and placed on a heater/magnetic stirrer and the grease heated to about 30°C while keeping a watch glass over the beaker. After the composition reached about 30°C the beaker was removed from the heater/magnetic stirrer and allowed to cool to room temperature with continued stirring with a glass rod. 25 mm x 75 mm glass slides were then immersed for a few seconds into the petroleum grease and drawn up quickly so that the grease coated both sides of the slide (25 mm x 30 mm on each side). The petroleum grease-coated slides were then dried by hanging at room temperature (about 20°C) for 24 hours.

In the petroleum grease removal test, 140 ml of the composition to be tested was placed into a 150 ml glass beaker equipped with a magnetic stir bar. The beaker was then placed on a magnetic stirrer and the power setting adjusted until the bar rotated at 2000 rpm, using a strobe light to adjust the speed of rotation. The coated glass slide to be cleaned was then suspended vertically in the composition to be tested, coated portion pointing toward the bottom of the beaker with the other end attached to a suitable support, so that the glass slide did not touch anything but the composition being tested, and the stir bar did not hit the glass slide or the sides of the beaker. The percent removal of the petroleum grease was measured visually versus time for each slide and composition tested. Slides were not reused. This is a relative test that should be done as a comparison rather than an absolute scale.

Food Grease Removal Test

In the food grease removal tests, a standard food grease solution consisting of equal amounts of soy bean oil (10 grams) and lard (10 grams) dissolved in enough methylene

chloride (60 grams) to form a solution was prepared. A small amount of oil blue pigment (0.1 gram) was added to the solution. 25 mm x 75 mm glass slides were then immersed for a few seconds into the food grease and drawn up quickly so that the food grease coated both sides of the slide (25 mm x 30 mm on each side). The food grease-coated slides were then dried or "cured" by hanging at room temperature (about 20°C) for 24 hours. (To make the test more difficult, the slides may be aged for up to a week but all comparisons should be done on the same batch of slides aged identically.)

In the food grease removal test, 140 milliliters (ml) of the composition to be tested were placed into a 150 ml glass beaker equipped with a magnetic stir bar (2.5 cm in length). The beaker was then placed on a magnetic stirrer. The coated glass slide to be cleaned was then suspended vertically in the composition to be tested, coated portion pointing toward the bottom of the beaker with the other end attached to a suitable support, so that the glass slide did not touch anything but the composition being tested, and the stir bar did not hit the glass slide or the sides of the beaker. The magnetic stirrer was immediately turned on and the stirring speed adjusted with a strobe light to 2000 rpm, after which the percent removal of food grease versus time was measured visually for each side of the slide. Slides were not reused.

Reproducibility for the petroleum grease and food grease removal test methods was about +/- 5%.

Glossary

“TOMADYNE 101LF” is a linear alcohol ethoxylate, available from Tomah Products, Inc., Milton, WI.

“TOMADYNE 100” and “TOMADYNE 102” are linear alcohol ethoxylate and cationic surfactant blends, available from Tomah Products, Inc., Milton, WI.

“ICONOL TDA6” is an ethoxylated tridecyl alcohol (having 6 moles of ethylene oxide per mole of ethoxylated tridecyl alcohol), available from BASF, Mount Olive, NJ.

“VARONIC K-205” is a cocoamine ethoxylate (having 5 moles of ethylene oxide per mole of cocoamine ethoxylate), available from Sherex Chemical Co., Dublin, OH.

“TRITON DF-12” is a modified polyethoxylated alcohol, available from Dow, Midland, MI.

60557-7096

"GLUCOPON 425TM" is an alkyl glucosides (a fatty alcohol C₈-C₁₆ polyglycoside), available from Cognis Corporation, Ambler, PA;

"Q-17-5" is isotridecyloxypropyl poly(5) oxyethylene methyl ammonium chloride (75%), available from Tomah Products, Inc., Milton, WI.

5 "Q-S-80" is mono soya ammonium chloride quaternary (80%), available from Tomah Products, Inc., Milton, WI.

"Q-S-T-50"TM is trimethyl stearyl ammonium chloride quaternary (50%), available from Tomah Products, Inc., Milton, WI.

10 "EKTASOLVE EEH" is ethylene glycol 2-ethyl hexyl ether, available from Eastman Chemical, Kingsport, TN.

"EXXAL 8" is isooctyl alcohol, available from Exxon, Houston, TX.

"AMP95" is 2-amino-2-methylpropanol, available from Dow, Midland, MI

"Dequest 2010"TM is 1-Hydroxyethylidene-1-1-diphosphonic acid, available from Monsanto Company, St Louis, MO

15

Examples

Example 1 and Comparative Examples A-E

The compositions of Example 1 and Comparative Examples A-F as "ready-to-use" formulations are provided in Table 1. Example 1 was formulated to include a nonionic surfactant, a quaternary amine salt surfactant, and a slightly water-soluble polar organic compound. Comparative Example A was formulated to include only the nonionic surfactant "TOMADYNE 101LF". Comparative Example B was formulated to include only the quaternary amine salt surfactant "Q-17-5". Comparative Example C was formulated to include only the slightly water-soluble polar organic compound "EEH".

20 Comparative Example D was formulated to include only the "TOMADYNE 101LF" and the "EEH". Comparative Example E was formulated to include only the "Q-17-5" and the "EEH". Comparative Example F was formulated to include only the "TOMADYNE 101LF" and the "Q-17-5". These compositions were subjected to the petroleum grease and food grease removal tests, as described above. These results are shown in Table 2.

25 The data in Table 2 demonstrated that there appeared to be a synergistic effect of the nonionic surfactant, the quaternary amine salt surfactant, and the slightly water-soluble

30

polar organic compound as evidenced by the decreased soaking time required to achieve nearly 100% grease removal for Example 1.

Table 1

Example No.:	1	Comp. Ex. A	Comp . Ex. B	Comp. Ex. C	Comp . Ex. D	Comp. Ex. E	Comp. Ex. F
<i>Surfactants</i>							
TOMADYNE 101LF	0.13	0.26	--	--	0.26	--	0.13
Q-17-5	0.13	--	0.26	--	--	0.26	0.13
<i>Slightly water-soluble Polar organic compound</i>							
EEH	0.07	--	--	0.07	0.07	0.07	--
<i>Additives</i>							
AMP95	0.21	0.21	0.21	0.21	0.21	0.21	0.21
Dequest 2010	0.002	0.002	0.002	0.002	0.002	0.002	0.002
DI water	balance	balance	balance	balance	balance	balance	balance

Table 2

Grease Removal Rate (%)

Example No.:	1	Comp . Ex. A	Comp . Ex. B	Comp . Ex. C	Comp . Ex. D	Comp . Ex. E	Comp . Ex. F
<i>Petroleum grease removal</i>							
5 min	50	0	2	0	0	2	5
10 min	99	2	5	0	2	5	40
15min	-	2	5	0	2	35	85
<i>Food grease removal</i>							
5 min	95	5	10	0	100	100	-

Examples 2 and 3

Examples 2 and 3 were the same as Example 1 except that N-octyl pyrrolidone and “EXXAL 8”, respectively, were used as the slightly water-soluble polar compounds instead of “EEH”. These compositions were subjected to the petroleum grease and food grease removal tests, as described above. These results are shown in Table 3.

Table 3**Grease Removal Rate (%)**

Example No.:	2	3
<i>Petroleum grease removal</i>		
5 min	45	45
10 min	92	90
15min	--	--
<i>Food grease removal</i>		
5 min	100	100

Example 4 and Comparative Examples G-I

Example 4 was the same as Example 1 except that the nonionic surfactant used was "TRITON DF-12". Comparative Example G, similar to Comparative Example A, was formulated to include only the "TRITON DF-12". Comparative Example H, similar to Comparative Example D, was formulated to include only the "TRITON DF-12" and the "EEH". Comparative Example I, similar to Comparative Example F, was formulated to include only the "TRITON DF-12" and the "Q-S-T-50". These compositions were subjected to the petroleum grease and food grease removal tests, as described above. These results are shown in Table 4.

Table 4**Grease Removal Rate (%)**

Example No.:	4	Comp. Ex. G	Comp. Ex. H	Comp. Ex. I
<i>Petroleum grease removal</i>				
5 min	50	0	0	0
10 min	95	0	0	5
15min	--	0	0	10
<i>Food grease removal</i>				
5 min	100	--	99	--

Example 5 and Comparative Examples J-N

Example 5 was the same as Example 1 except that the nonionic surfactant used was "ICONOL TDA-6" and the quaternary amine salt surfactant use was "Q-S-80". Comparative Example J, similar to Comparative Example A, was formulated to include only the "ICONOL TDA-6". Comparative Example K, similar to Comparative

Example B, was formulated to include only the “Q-S-80”. Comparative Example L, similar to Comparative Example D, was formulated to include only the “ICONOL TDA-6” and the “EEH”. Comparative Example M, similar to Comparative Example E, was formulated to include only the “Q-17-5” and the “EEH”. Comparative Example N, similar to Comparative Example F, was formulated to include only the “ICONOL TDA-6” and the “Q-17-5. These compositions were subjected to the petroleum grease and food grease removal tests, as described above. These results are shown in Table 5.

Table 5**Grease Removal Rate (%)**

Example No.:	5	Comp. Ex. J	Comp. Ex. K	Comp. Ex. L	Comp. Ex. M	Comp. Ex. N
<i>Petroleum grease removal</i>						
5 min	75	3	0	4	0	0
10 min	100	5	2	33	0	0
15min	--	20	4	50	0	0
<i>Food grease removal</i>						
5 min	100	--	--	100	90	--

Example 6 and Comparative Examples O-Q

Example 6 was the same as Example 1 except that the nonionic surfactant used was “VARONIC K-205”. Comparative Example O, similar to Comparative Example A, was formulated to include only the “VARONIC K-205”. Comparative Example P, similar to Comparative Example D, was formulated to include only the “VARONIC K-205” and the “EEH”. Comparative Example Q, similar to Comparative Example F, was formulated to include only the “VARONIC K-205” and the “Q-17-5”. These compositions were subjected to the petroleum grease and food grease removal tests, as described above.

These results are shown in Table 6.

Table 6**Grease Removal Rate (%)**

Example No.:	6	Comp. Ex. O	Comp. Ex. P	Comp. Ex. Q
<i>Petroleum grease removal</i>				
5 min	40	0	0	2
10 min	75	2	3	10
15min	90	5	5	40
<i>Food grease removal</i>				
5 min	90	10	80	--

Examples 7 and 8 and Comparative Examples R-V

5 Example 7 was the same as Example 1 except that the nonionic surfactant used was “GLUCOPON 425”. Example 8 was the same as Example 7 except that the quaternary amine salt surfactant used was “Q-S-T-50”. Comparative Example R, similar to Comparative Example A, was formulated to include only the “GLUCOPON 425”. Comparative Example S, similar to Comparative Example B, was formulated to include only the “Q-S-T-50”. Comparative Example T, similar to Comparative Example D, was formulated include only the “GLUCOPON 425” and the “EEH”. Comparative Example U, similar to Comparative Example E, was formulated to include only the “Q-S-T-50” and “EEH”. Comparative Example V, similar to Comparative Example F, was formulated to include only the “GLUCOPON 425” and the “Q-S-T-50” and “EEH”. These compositions were subjected to the petroleum grease and food grease removal tests, as described above. These results are shown in Table 7.

Table 7**Grease Removal Rate (%)**

Example No.:	7	8	Comp . Ex. R	Comp . Ex. S	Comp . Ex. T	Comp . Ex. U	Comp . Ex. V
<i>Petroleum grease removal</i>							
5 min	40	45	0	0	0	0	0
10 min	80	85	0	0	10	0	6
15min	99	99	0	0	20	0	12
<i>Food grease removal</i>							
5 min	100	95	5	--	85	90	--

Various modifications and alterations of this invention will become apparent to those skilled in the art without departing from the scope and principles of this invention, and it should be understood that this invention is not to be unduly limited to the illustrative
5 embodiments set forth hereinabove.


60557-7096

CLAIMS:

1. A composition for removing hydrocarbon-containing soils comprising:

a) a nonionic surfactant selected from the group consisting of a branched or linear primary alcohol ethoxylate, a secondary alcohol ethoxylate, a branched decyl alcohol ethoxylate, a branched tridecyl alcohol ethoxylate, a branched or linear alkylphenol ethoxylate, a branched or linear alkyl amine ethoxylate, an alkyl ether amine ethoxylate, a branched or linear alcohol alkoxyate, alkyl glycosides, and a mixture thereof;

b) a quaternary ammonium salt surfactant within the general formula (I)

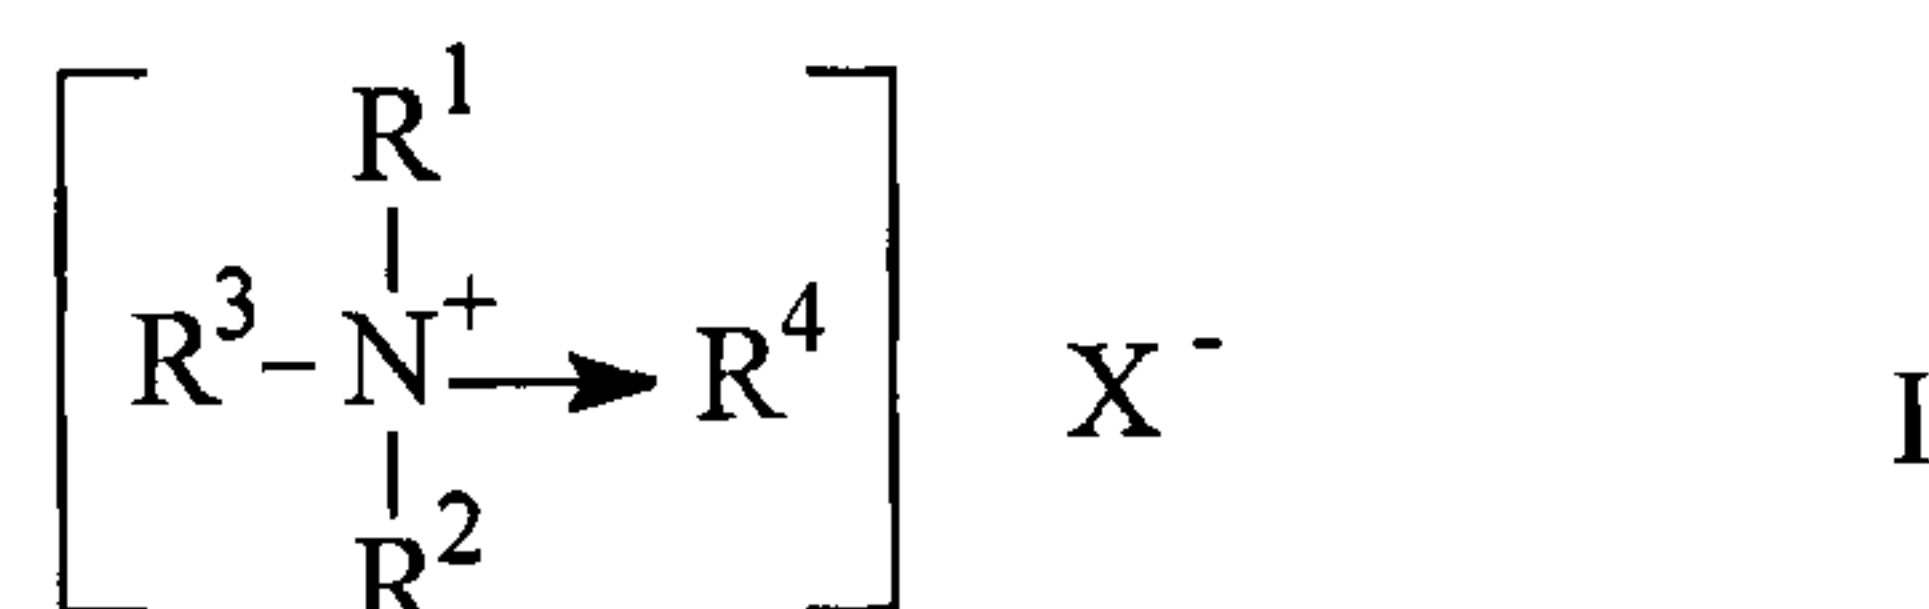

10

wherein R^1 and R^2 are the same or different and are selected from the group consisting of alkyl and substituted alkyl groups, R^3 is selected from the group consisting of straight chain alkyls, branched chain alkyls, straight chain heteroalkyls, and branched chain heteroalkyls having from 10 to 20 carbon atoms, R^4 is selected from the group consisting of alkyl groups having from 1 to 5 carbon atoms, and X is a halogen atom;

15

c) a slightly water soluble polar organic compound having a water solubility from about 0.01 weight percent to about 1.0 weight percent; and

d) water.

2. The composition of claim 1 wherein the slightly water-soluble polar organic compound has a water solubility from about 0.01 % by weight to about 0.2 % by weight.

20

3. The composition of claim 1 or 2 wherein the slightly water-soluble polar organic compound is not a hydrocarbon or halocarbon, contains one or more heteroatoms of oxygen, nitrogen, sulfur, or phosphorous containing functional groups and contains an alkyl group containing from 7 carbon atoms to 16 carbon atoms.

25

60557-7096

4. The composition of claim 3 wherein the slightly water-soluble polar organic compound contains a moiety selected from the group of an alcohol, an aldehyde, a ketone, an ether, a glycol ether, an acid, an amine, an ester, an N-alkyl pyrrolidone, and a compatible mixture thereof.
- 5 5. The composition of any one of claims 1 to 4 wherein the nonionic surfactant has an HLB value of from 7 to 16.
6. The composition of any one of claims 1 to 5 wherein the weight ratio of nonionic surfactant to quaternary ammonium salt surfactant ranges from about 1:4 to about 4:1.
- 10 7. The composition of claim 6 wherein the weight ratio of nonionic surfactant to quaternary ammonium salt surfactant ranges from about 1:2 to about 2:1.
8. The composition of claim 7 wherein the weight ratio of nonionic surfactant to quaternary ammonium salt surfactant is about 1:1.
- 15 9. The composition of any one of claims 1 to 8 wherein the weight ratio of active slightly water-soluble polar organic compound to active surfactant, which comprises the nonionic surfactant and the quaternary ammonium salt, ranges from about 0.1:1 to about 1:1.
10. The composition of any one of claims 1 to 9, further including an
20 additive wherein the additive is selected from a pH adjuster, a colorant, a fragrance, a preservative, an anti-microbial agent, a foaming agent, an anti-foaming agent, a film-forming agent, a thickener, and a mixture thereof.
11. The composition of any one of claims 1 to 10 wherein the slightly water-soluble polar organic compound comprises ethylene glycol 2-ethyl hexyl
25 ether, normal and branched chain alkyl alcohols having from 6 to 12 carbon atoms, N-alkyl pyrrolidones, 1-octanol, di-isobutyl ketone, or mixtures thereof.

60557-7096

12. The composition of claim 11 wherein the slightly water-soluble polar organic compound comprises ethylene glycol 2-ethyl hexyl ether, isooctyl alcohol, N-octyl pyrrolidone, 1-octanol, di-isobutyl ketone, or mixtures thereof.


13. The composition of any one of claims 1 to 12 wherein the water-soluble
5 polar organic compound comprises ethylene glycol 2-ethyl hexyl ether.

14. The composition of any one of claims 1 to 13 wherein the quaternary ammonium salt surfactant comprises isotridecyloxypropyl poly(5)oxyethylene methyl ammonium chloride or mono soya ammonium chloride quaternary.

15. The composition of claim 1 wherein the composition consists solely of:

10 a) a nonionic surfactant selected from the group consisting of a branched or linear primary alcohol ethoxylate, a secondary alcohol ethoxylate, a branched decyl alcohol ethoxylate, a branched tridecyl alcohol ethoxylate, a branched or linear alkylphenol ethoxylate, a branched or linear alkyl amine ethoxylate, an alkyl ether amine ethoxylate, a branched or linear alcohol
15 alkoxyate, alkyl glycosides, and a mixture thereof;

b) a quaternary ammonium salt surfactant within the general formula (I)

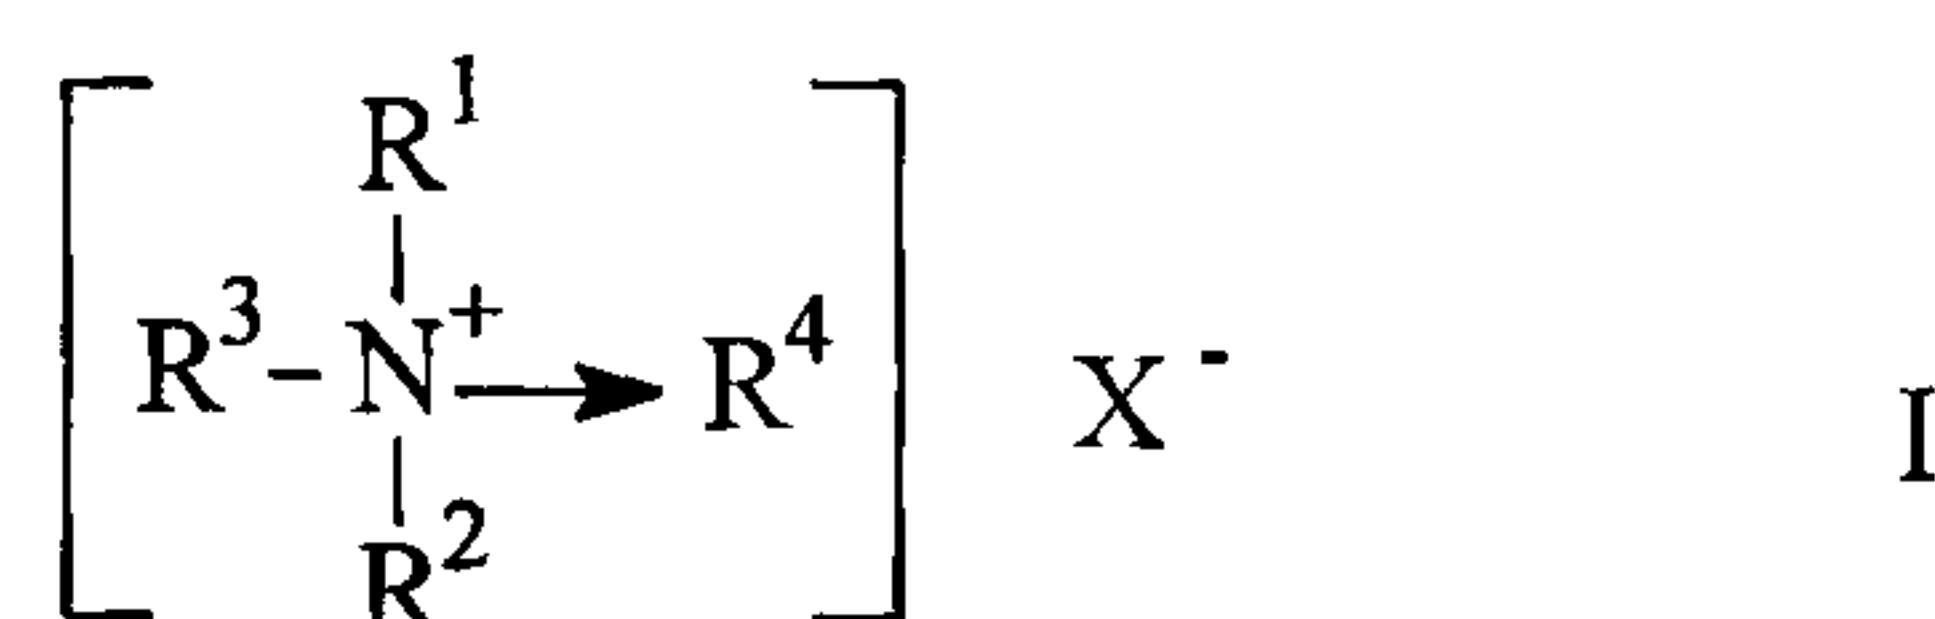

wherein R^1 and R^2 are the same or different and are selected from the group consisting of alkyl and substituted alkyl groups, R^3 is selected from the
20 group consisting of straight chain alkyls, branched chain alkyls, straight chain heteroalkyls, and branched chain heteroalkyls having from 10 to 20 carbon atoms, R^4 is selected from the group consisting of alkyl groups having from 1 to 5 carbon atoms, and X is a halogen atom;

c) a slightly water soluble polar organic compound having a water
25 solubility from about 0.01 weight percent to about 1.0 weight percent;

60557-7096

- d) an optional pH adjuster;
- e) an optional colorant;
- f) an optional fragrance; and
- g) water.

5 16. The composition of claim 15, wherein the composition contains:

- d) pH adjuster;
- e) a colorant; and
- f) a fragrance.

10 17. The composition of claim 15 or 16, wherein the weight ratio of slightly water-soluble polar organic compound (c) to the total amount of nonionic surfactant and quaternary ammonium salt surfactant present (a+b) ranges from about 0.1:1 to about 1:1.

15 18. The composition of claim 17, wherein the weight ratio of active slightly water-soluble polar organic compound (c) to the total amount of active nonionic surfactant and active quaternary ammonium salt surfactant present (a+b) ranges from about 0.1:1 to about 0.27:1.

19. A method of removing hydrocarbon-containing soils from a soiled surface comprising the steps of:

- a) applying to the soiled surface an effective amount of the composition of any one of claims 1 to 18; and
- b) performing a mechanical operation on the surface with an abrasive article after applying the composition to the surface.

20. The method of claim 19, further comprising the step of removing the composition from the surface after the performing a mechanical operation step.