



US009392888B2

(12) **United States Patent**  
**Spivey, Sr.**

(10) **Patent No.:** **US 9,392,888 B2**  
(45) **Date of Patent:** **\*Jul. 19, 2016**

(54) **CARTON WITH AN IMPROVED DISPENSING FEATURE**

2571/00141 (2013.01); B65D 2571/00469  
(2013.01); B65D 2571/00549 (2013.01); B65D  
2571/00728 (2013.01)

(71) Applicant: **Graphic Packaging International, Inc.,**  
Atlanta, GA (US)

(58) **Field of Classification Search**  
CPC ..... B65D 71/36  
USPC ..... 221/305  
See application file for complete search history.

(72) Inventor: **Raymond Rudolph Spivey, Sr.,**  
Mableton, GA (US)

(73) Assignee: **Graphic Packaging International, Inc.,**  
Atlanta, GA (US)

(56) **References Cited**

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.  
  
This patent is subject to a terminal disclaimer.

U.S. PATENT DOCUMENTS

902,347 A 10/1908 Tillinghast  
1,541,143 A 6/1925 Hoile  
(Continued)

(21) Appl. No.: **14/520,670**

FOREIGN PATENT DOCUMENTS

CA 874828 7/1971  
CA 2246020 2/2000  
(Continued)

(22) Filed: **Oct. 22, 2014**

(65) **Prior Publication Data**

US 2015/0034666 A1 Feb. 5, 2015

**Related U.S. Application Data**

(63) Continuation of application No. 13/963,418, filed on Aug. 9, 2013, now Pat. No. 8,887,952, which is a continuation of application No. 13/662,876, filed on Oct. 29, 2012, now Pat. No. 8,579,154, which is a  
(Continued)

OTHER PUBLICATIONS

“Dispensing Multipack, Coke Canner Rolls Out ‘Fridge-Friendly’ Pack,” Packaging World, Sep. 2001, p. 2, [Summit Publishing Company—Chicago].  
(Continued)


(51) **Int. Cl.**  
**B65D 71/36** (2006.01)  
**A47F 5/11** (2006.01)  
(Continued)

*Primary Examiner* — Timothy Waggoner  
(74) *Attorney, Agent, or Firm* — Womble Carlyle Sandridge and Rice LLP

(52) **U.S. Cl.**  
CPC . **A47F 5/112** (2013.01); **A47F 1/04** (2013.01);  
**A47F 1/12** (2013.01); **B65D 71/36** (2013.01);  
**B65D 2571/0045** (2013.01); **B65D 2571/0058**  
(2013.01); **B65D 2571/0066** (2013.01); **B65D**

(57) **ABSTRACT**  
A carton with an improved dispenser at one end of the carton which preserves the integrity of the carton when the carton is opened by permitting a bottom end flap attached to the bottom panel to remain in place and also a portion of each side end flap that is adjacent to the bottom end flap. This dispenser may also provide a safety net for the first container that is automatically dispensed when the carton is opened.

**16 Claims, 4 Drawing Sheets**

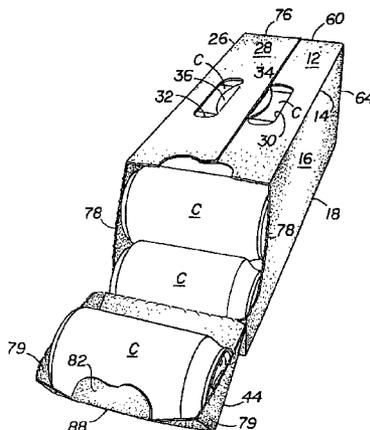

**Related U.S. Application Data**

continuation of application No. 13/357,997, filed on Jan. 25, 2012, now Pat. No. 8,302,811, which is a continuation of application No. 13/094,962, filed on Apr. 27, 2011, now Pat. No. 8,123,072, which is a continuation of application No. 12/406,537, filed on Mar. 18, 2009, now Pat. No. 7,946,451, which is a continuation of application No. 11/470,428, filed on Sep. 6, 2006, now Pat. No. 7,523,842, which is a continuation of application No. 10/959,870, filed on Oct. 6, 2004, now Pat. No. 7,175,047, which is a continuation of application No. 10/777,614, filed on Feb. 12, 2004, now Pat. No. 7,100,798, which is a continuation of application No. 10/425,846, filed on Apr. 29, 2003, now Pat. No. 6,715,639, which is a continuation of application No. 09/757,714, filed on Jan. 9, 2001, now Pat. No. 6,578,736.

- (51) **Int. Cl.**  
*A47F 1/04* (2006.01)  
*A47F 1/12* (2006.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,925,102 A	9/1933	Levkoff	4,411,365 A	10/1983	Horikawa et al.
2,124,808 A	7/1938	White et al.	4,416,410 A	11/1983	Herrmann
2,284,965 A	9/1942	Davidson	4,417,661 A	11/1983	Roccaforte
2,294,964 A	9/1942	Davidson	4,465,180 A	8/1984	Klygis
2,448,819 A	9/1948	Mitchell	4,498,581 A	2/1985	Dutcher
2,718,301 A	9/1955	Palmer	4,519,522 A	5/1985	McElwee
2,723,027 A	11/1955	Guyur	4,560,062 A	12/1985	Valiulis
2,754,047 A	7/1956	Schmidt et al.	4,582,199 A	4/1986	Schuster
2,842,304 A	7/1958	Ringler	4,588,084 A	5/1986	Holley, Jr.
2,868,431 A	1/1959	Painter	4,598,810 A	7/1986	Shore et al.
2,919,844 A	1/1960	Anderson, Jr.	4,605,128 A	8/1986	Rieke
2,930,516 A	3/1960	Fowle et al.	D286,987 S	12/1986	Golan et al.
2,975,891 A	3/1961	Stone	4,706,876 A	11/1987	Wilson
2,990,097 A	6/1961	Thompson	4,726,471 A	2/1988	Whately et al.
3,002,651 A	10/1961	Gauld	4,756,419 A	7/1988	Le Bras
3,018,031 A	1/1962	Ahlbor et al.	4,785,991 A	11/1988	Schuster
3,178,242 A	4/1965	Ellis et al.	4,817,866 A	4/1989	Wonnacott
3,228,582 A	1/1966	Osberg	D303,090 S	8/1989	Armor et al.
3,263,861 A	8/1966	Carr	4,860,944 A	8/1989	Wonnacott
3,265,283 A	8/1966	Farquhar	4,919,266 A	4/1990	McIntosh, Jr. et al.
RE26,083 E	9/1966	Forrer	4,961,507 A	10/1990	Higgins
3,300,115 A	1/1967	Schauer	4,966,324 A	10/1990	Steel
3,332,594 A	7/1967	De Capua	4,972,991 A	11/1990	Schuster
3,356,279 A	12/1967	Root	4,974,771 A	12/1990	Lavery
3,517,858 A	6/1970	Farquhar	4,981,253 A	1/1991	Quaintance
3,540,581 A	11/1970	Koolnis	5,002,186 A	3/1991	Cooper
3,599,858 A	8/1971	Samsing	5,031,825 A	7/1991	Romagnoli
3,669,251 A	6/1972	Phillips, Jr.	5,067,615 A	11/1991	Davitian
3,765,527 A	10/1973	Vargo	5,101,642 A	4/1992	Alexandrov
3,894,681 A	7/1975	Arneson et al.	5,123,589 A	6/1992	Cote
3,913,739 A	10/1975	Hennessey	5,137,211 A	8/1992	Summer et al.
3,933,303 A	1/1976	Kirby	5,170,934 A	12/1992	Lemoine
3,942,631 A	3/1976	Sutherland et al.	D332,915 S	2/1993	Hoell et al.
4,000,811 A	1/1977	Hardison et al.	5,205,436 A	4/1993	Savage
D243,508 S	3/1977	Killy	5,277,360 A	1/1994	DeMott
4,030,596 A	6/1977	Snyder et al.	5,279,440 A	1/1994	Fougeres et al.
D252,259 S	7/1979	Rinehart	5,284,292 A	2/1994	Johnson
4,214,660 A	7/1980	Hunt, Jr.	5,333,734 A	8/1994	Stout et al.
4,216,861 A	8/1980	Oliff	5,337,920 A	8/1994	Clausen
4,222,485 A	9/1980	Focke	5,368,194 A	11/1994	Oliff et al.
D263,204 S	3/1982	Dutcher	5,372,299 A	12/1994	Edgerton, Jr. et al.
4,325,482 A	4/1982	Feeser	5,402,933 A	4/1995	Behrmann
4,331,289 A	5/1982	Killy	5,427,242 A	6/1995	Oliff et al.
4,364,509 A	12/1982	Holley, Jr. et al.	5,465,831 A	11/1995	Smith
4,375,258 A	3/1983	Crayne et al.	5,505,372 A	4/1996	Edson et al.
D269,068 S	5/1983	Mann, Sr. et al.	5,518,111 A	5/1996	Stout
D270,041 S	8/1983	Vestal	5,622,309 A	4/1997	Matsuda et al.
4,396,143 A	8/1983	Killy	5,722,584 A	3/1998	Fujiwara
			5,775,574 A	7/1998	Whitnell
			5,788,117 A	8/1998	Zimmanck
			5,826,783 A	10/1998	Stout
			5,833,118 A	11/1998	Weiss
			5,873,515 A	2/1999	Dunn et al.
			5,878,947 A	3/1999	Hoy et al.
			5,881,884 A	3/1999	Podosek
			6,105,854 A	8/2000	Spivey et al.
			D436,859 S	1/2001	Botsford et al.
			6,176,419 B1	1/2001	Holley, Jr.
			6,283,293 B1	9/2001	Lingamfelter
			D454,784 S	3/2002	Oram
			6,386,369 B2	5/2002	Yuhus et al.
			6,435,351 B1	8/2002	Gibb
			6,478,219 B1	11/2002	Holley, Jr.
			6,484,903 B2	11/2002	Spivey et al.
			6,550,615 B2	4/2003	Lingamfelter
			6,578,736 B2*	6/2003	Spivey ..... B65D 71/36 221/305
			6,631,803 B2	10/2003	Rhodes et al.
			6,715,639 B2	4/2004	Spivey
			6,866,185 B2	3/2005	Harrelson
			7,059,494 B2	6/2006	Harrelson et al.
			7,100,798 B2	9/2006	Spivey
			7,175,047 B2	2/2007	Spivey
			7,523,842 B2	4/2009	Spivey
			7,946,451 B2	5/2011	Spivey
			8,123,072 B2	2/2012	Spivey
			8,302,811 B2	11/2012	Spivey
			8,579,154 B2	11/2013	Spivey
			8,887,952 B2*	11/2014	Spivey, Sr. .... B65D 71/36

(56)

References Cited

U.S. PATENT DOCUMENTS

2002/0070139	A1	6/2002	Bates
2002/0185499	A1	12/2002	Harrelson et al.
2002/0185527	A1	12/2002	Bates
2003/0141353	A1	7/2003	Wilson
2003/0192907	A1	10/2003	Bates
2004/0060972	A1	4/2004	Harrelson

FOREIGN PATENT DOCUMENTS

DE	2323589	11/1974
DE	75 10 538	8/1975
DE	76 06 493 U1	6/1976
DE	29 33 022 C2	2/1980
DE	81 35 176 U1	5/1982
DE	8514718.4	8/1985
DE	8629664.7	11/1986
DE	3612594 A1	10/1987
DE	30 07 769 C2	9/1991
DE	40 23 043 A1	12/1991
DE	94 12 885 U1	10/1994
DE	94 13 813 U1	10/1994
DE	295 19 931 U1	2/1996
DE	296 02 010 U1	3/1996
DE	299 09 008 U1	9/1999
DE	29913585 U1	10/1999
DE	694 21 620 T2	4/2000
EP	235 852 B1	9/1987
EP	0 323 596 A1	7/1989
EP	0 342 088 A1	11/1989
EP	0475147 A1	3/1992
EP	0 659 143	6/1995
EP	0 752 370 A2	1/1997
EP	0849189 A1	6/1998
EP	0 936 995	8/1999
EP	1 060 998 A2	12/2000
FR	2 683 207	5/1993
GB	2 186 550	8/1987
JP	7-9721	7/1993
WO	WO-88/09750	12/1988
WO	WO-95/25668	9/1995
WO	WO-96/29260 A1	9/1996
WO	WO-97/21607	6/1997
WO	WO-9831593 A1	7/1998
WO	WO-99/64301 A1	12/1999
WO	WO-00/23334	4/2000
WO	WO-00/71428 A1	11/2000
WO	WO-01/28871 A1	4/2001
WO	WO-02/04302 A1	1/2002
WO	WO-02/085739 A1	10/2002

221/305

OTHER PUBLICATIONS

“Hot Hit With Consumers,” International Bottler & Packer, Nov. 2001 [Binstead Publications Ltd.].

“Coke Bottler Tests a Slimmer Soda Package”, Wall Street Journal B3 (Aug. 10, 2001).

“Passing the Torch”, Beverage World p. 36 (Oct. 2002).

“Riverwood” For the Carton Designated as ‘Fridge Pack,’ International Bottler & Packer, Nov. 2001 [Binstead Publications Limited—United Kingdom].

“Coca-Cola Fridge Mate”, p. 3 Revise Woolworth’s Advertisement wca4000 / N1A.

*“Riverwood International Corporation v. MeadWestvaco Corporation”* Civ. Action No. 1:03CV1672 (Jun. 17, 2003 N.D. Ga.) Plaintiff’s [Riverwood] Motion for Prelim. Injunction.

*“Riverwood International Corporation v. MeadWestvaco Corporation”* Civ. Action No. 1:03CV1672 (N.D. Ga.) Defendant’s [MeadWestvaco] Memorandum in Opposition to Plaintiff’s [Riverwood] Motion for a Preliminary Injunction.

*“Riverwood International Corporation v. MeadWestvaco Corporation”* Civ. Action No. 1:03CV1672 (N.D. Ga.) Plaintiff’s [Riverwood] Reply to Defendant’s [MeadWestvaco] Memorandum in Opposition to Plaintiff’s [Riverwood] Motion for a Preliminary Injunction.

*“Riverwood International Corporation v. Meadwestvaco Corporation,”* Civ. Action No. 1:03-CV-1672 (TWT) (N.D. Ga.), Riverwood’s Supplemental Pre-Hearing Brief in Support of Plaintiffs [Riverwood] Motion for Preliminary Injunction.

*“Riverwood International Corporation v. Meadwestvaco Corporation,”* Civ. Action No. 1:03-CV-1672 (TWT) (N.D. Ga.), Meadwestvaco’s Supplemental Memorandum in Opposition to Riverwood’s Motion for a Preliminary Injunction.


The American College Dictionary. Copyright 1961, by Random House, Inc., p. 836.

*Graphic Packaging International, Inc. v. C. Brown Lingamfelter,* Civil Action No. 1-04-CV-0842 (JEC) (USDC N.D.Ga), Memorandum in Support of Conditional Motion to Stay Proceeding Pending Inter Partes Reexamination of U.S. Pat. No. 6,789,673, filed Jan. 25, 2005, on behalf of Graphic Packaging International, Inc., pp. 1 and 3.


*C. Brown Lingamfelter v. David J. Kappos et al.,* United States Court of Appeals for the Federal Circuit, Appeal No. 2011-1449, Appeal from the United States Patent and Trademark Office, Board of Patent Appeals and Interferences, Decided: Aug. 9, 2012.

*The C.W. Zumbiel Company, Inc. v. David J. Kappos et al.,* United States Court of Appeals for the Federal Circuit, Appeal Nos. 2011-1332,-1333, Appeal from the United States Patent and Trademark Office, Board of Patent Appeals and Interferences, Decided: Dec. 27, 2012.


\* cited by examiner

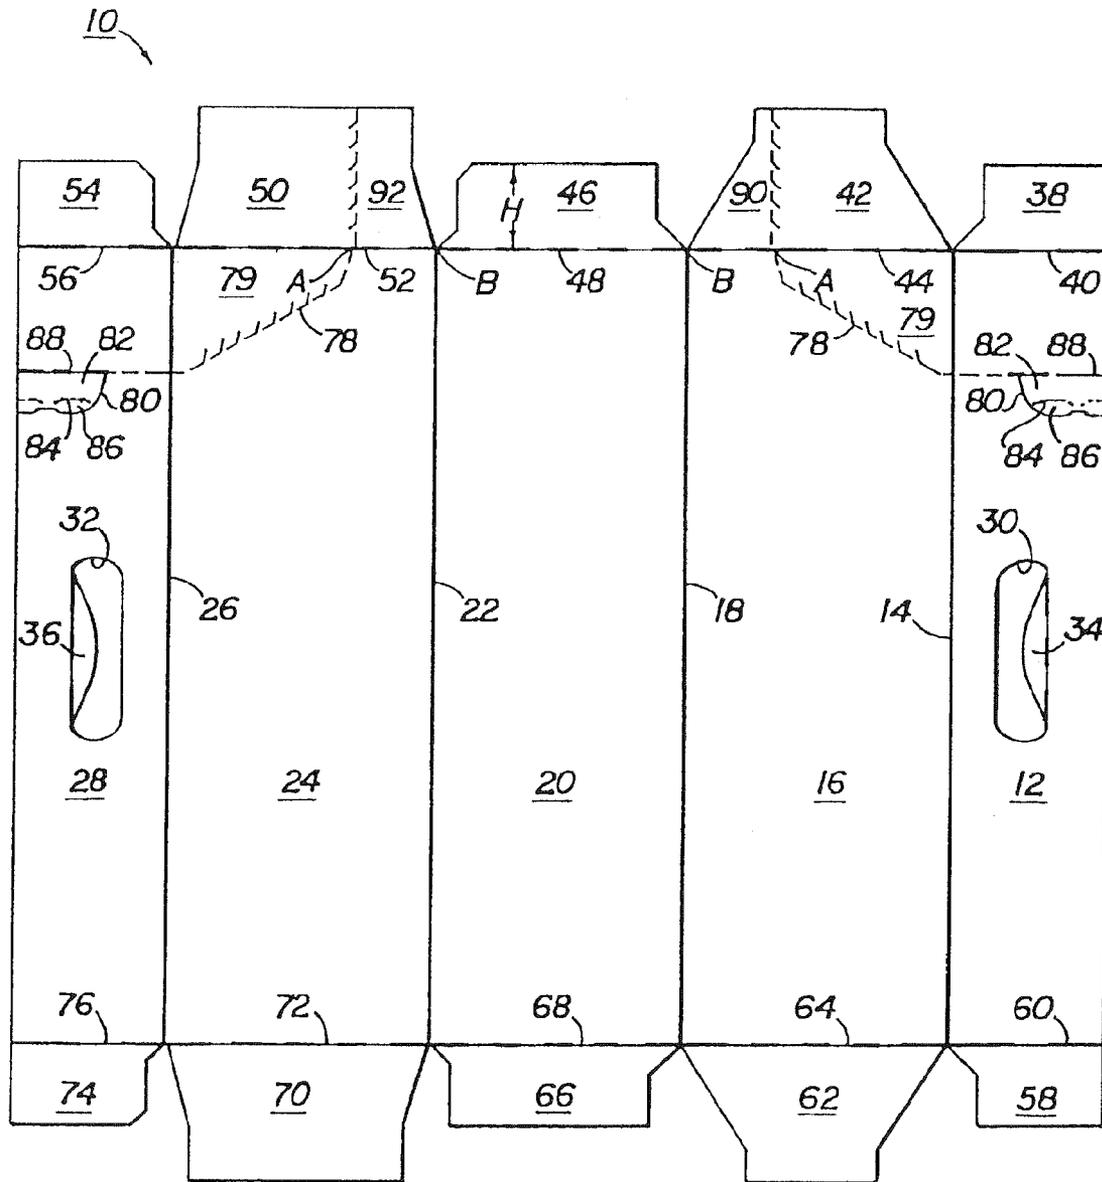


**FIG 1**

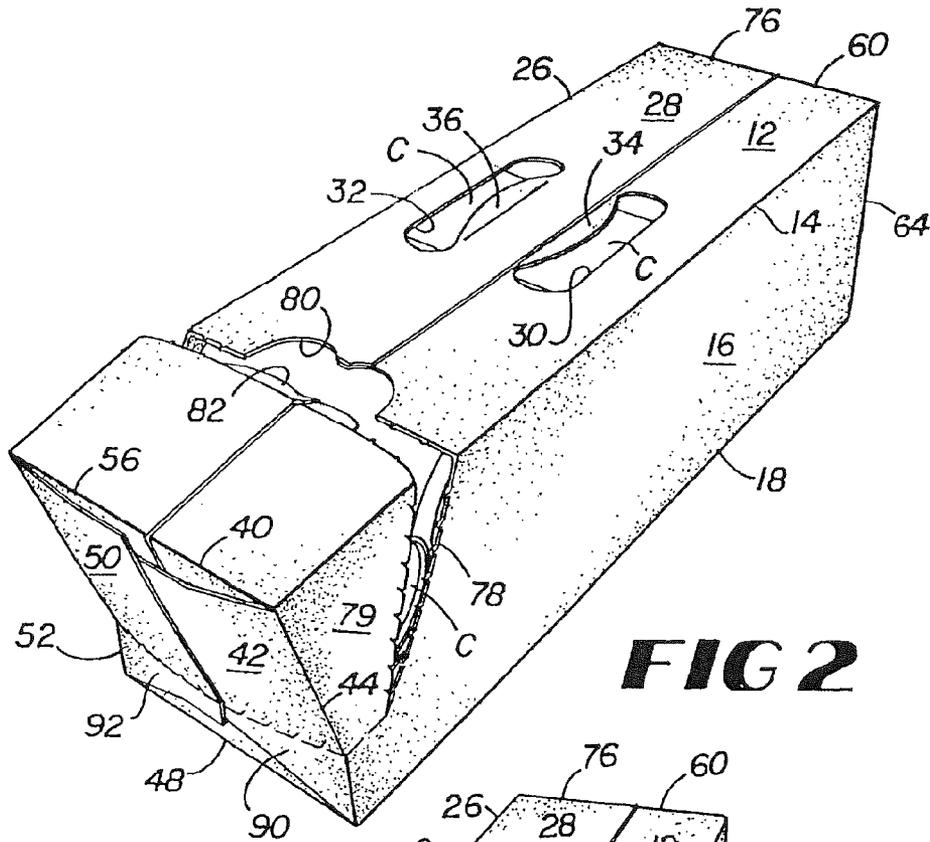


**FIG 2**

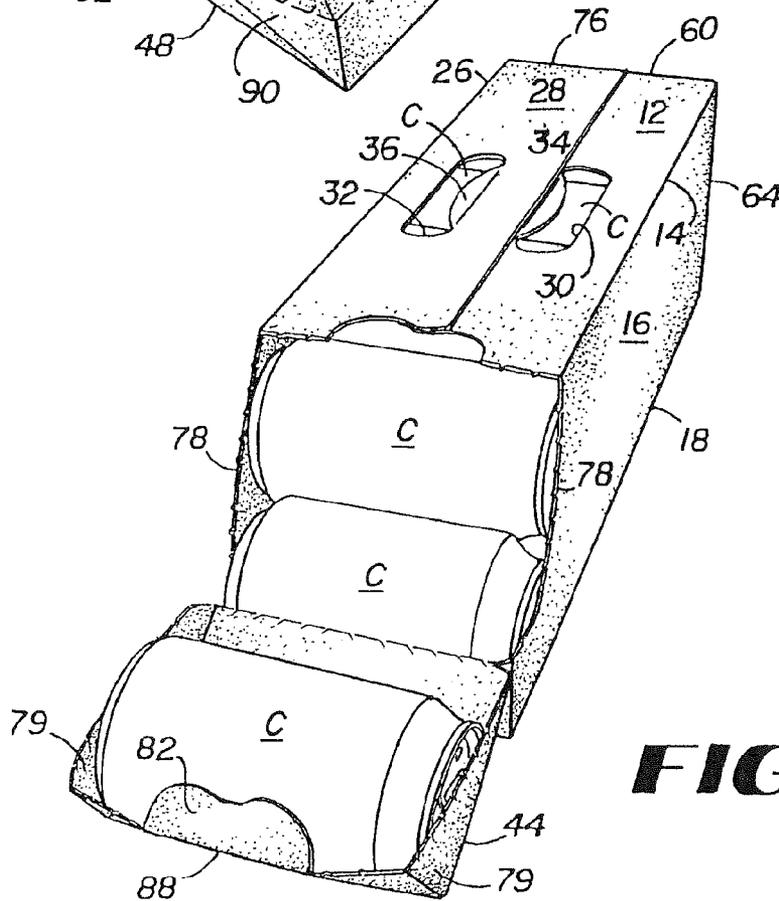

**FIG 3**

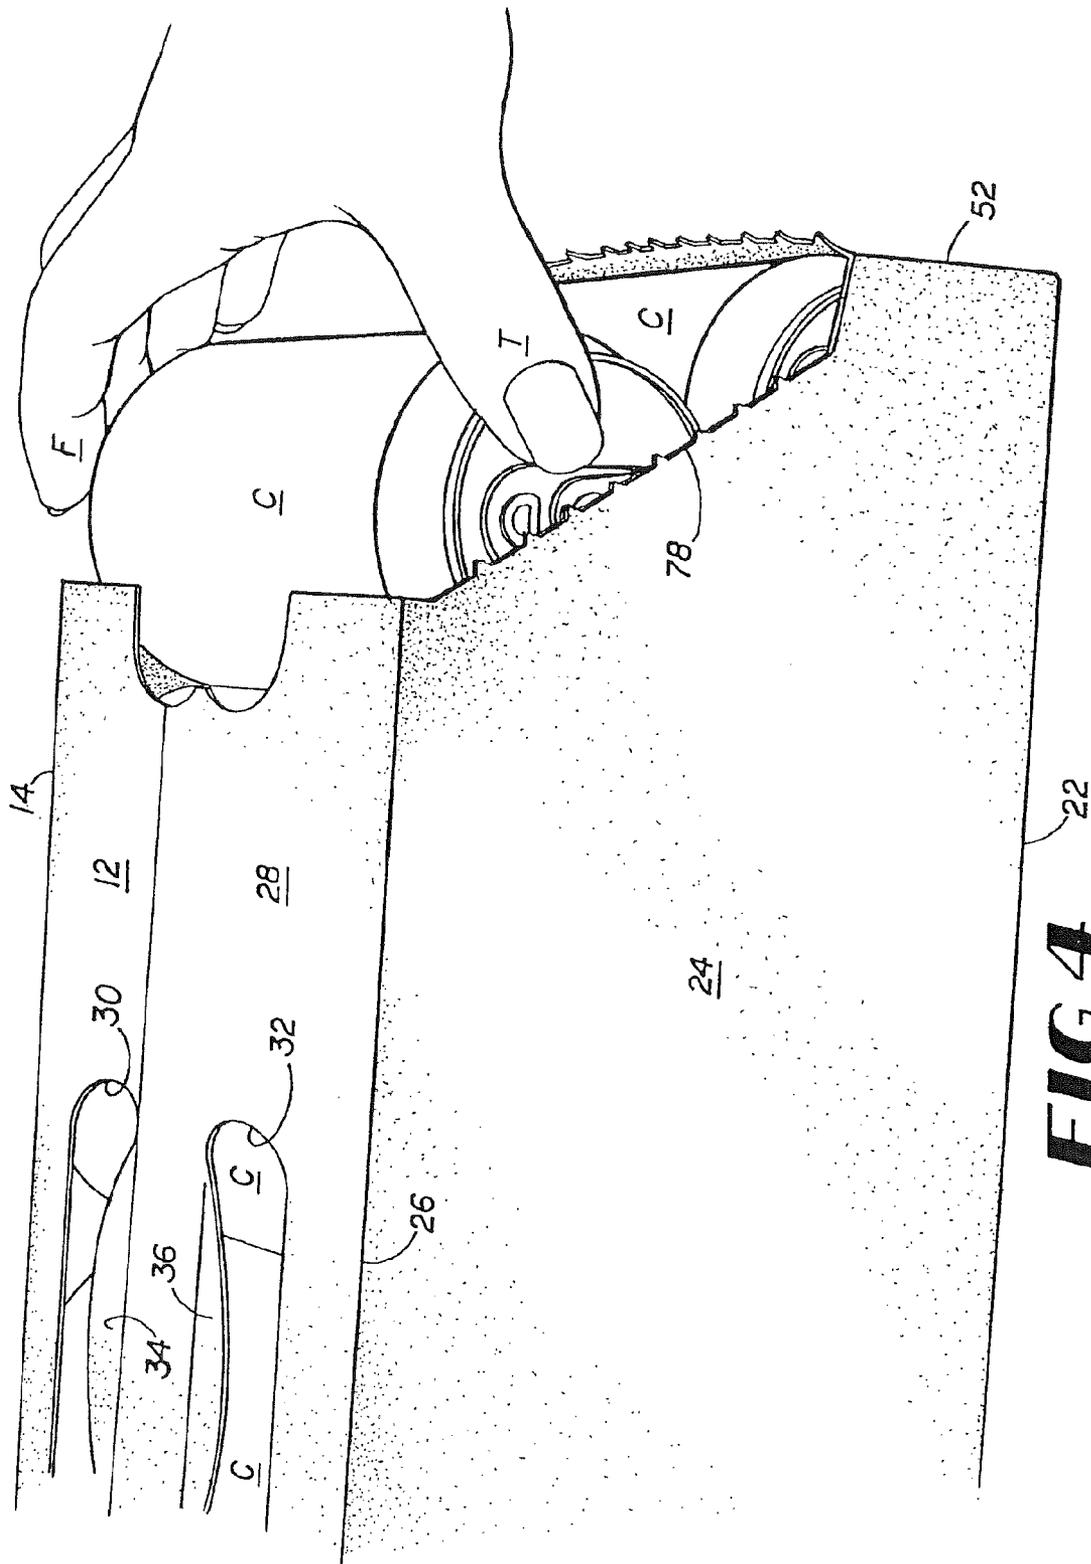

**FIG 4**

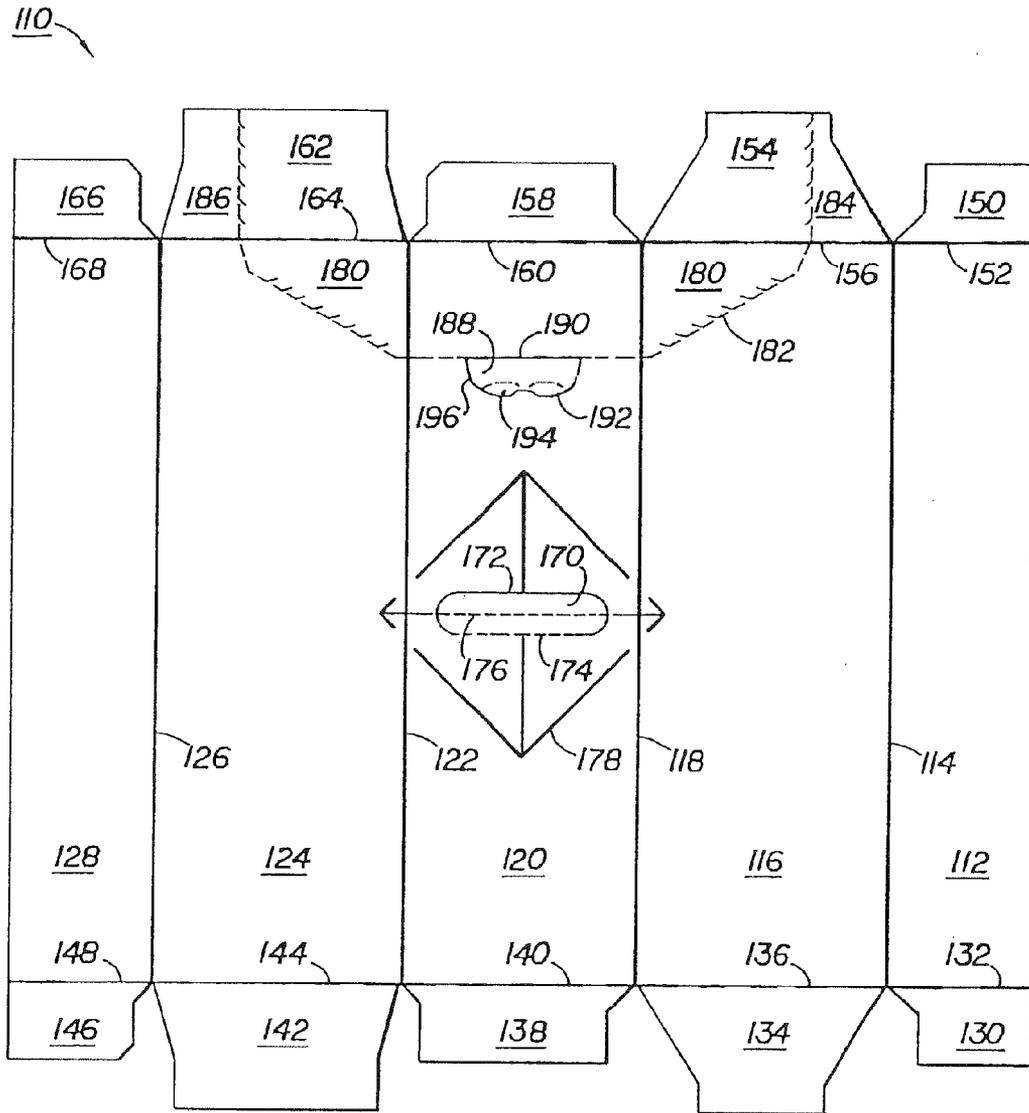

**FIG 5**

## CARTON WITH AN IMPROVED DISPENSING FEATURE

### CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 13/963,418, filed Aug. 9, 2013, which is a continuation of U.S. patent application Ser. No. 13/662,876, filed Oct. 29, 2012, now U.S. Pat. No. 8,579,154, which is a continuation of U.S. patent application Ser. No. 13/357,997, filed Jan. 25, 2012, now U.S. Pat. No. 8,302,811, which is a continuation of U.S. patent application Ser. No. 13/094,962, filed Apr. 27, 2011, now U.S. Pat. No. 8,123,072, which is a continuation of U.S. patent application Ser. No. 12/406,537, filed Mar. 18, 2009, now U.S. Pat. No. 7,946,451, which is a continuation of U.S. patent application Ser. No. 11/470,428, filed Sep. 6, 2006, now U.S. Pat. No. 7,523,842, which is a continuation of U.S. patent application Ser. No. 10/959,870, filed Oct. 6, 2004, now U.S. Pat. No. 7,175,047, which is a continuation of U.S. patent application Ser. No. 10/777,614, filed Feb. 12, 2004, now U.S. Pat. No. 7,100,798, which is a continuation of U.S. patent application Ser. No. 10/425,846, filed Apr. 29, 2003, now U.S. Pat. No. 6,715,639, which is a continuation of U.S. patent application Ser. No. 09/757,714, filed Jan. 9, 2001, now U.S. Pat. No. 6,578,736, which are incorporated herein by reference in their entirety.

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates generally to an enclosed paperboard carton capable of enclosing containers, which carton has a unique opening and dispensing feature that allows the containers, for example, cans or bottles, to be removed or dispensed without destroying the overall structural integrity of the carton. The dispensing feature may also provide a safety net for the first container that is automatically dispensed when the carton is opened. This dispensing feature also permits the carton to be carried from one location to another after the dispenser has been opened without the containers falling out of the carton.

#### 2. Background

Fully enclosed cartons capable of enclosing cans have been used in the past that have a feature for dispensing the cans one at a time. Dispenser sections have been provided at various locations within these cartons depending on the design. Many of these dispensers suffer from the disadvantage that once open, they allow all of the containers to roll out. In addition, it is difficult to carry one of these cartons without the containers falling out once the dispenser has been opened. Most of these dispensers have been designed for dispensing cans or bottles which have cylindrical tops and bottoms of substantially the same size and configuration. These dispensers are not suitable for dispensing bottles that have a neck of smaller diameter than the body of the bottle.

In effect, many of these dispensers destroy the overall carton integrity once they have been opened. Many of these dispensing features do not have any means for preventing the first container that is automatically dispensed from falling free from the carton. In other words, its dispensing feature has no safety net.

#### 3. Prior Art

U.S. Pat. No. 3,265,283 to Farquhar discloses a fully enclosed carton having a dispenser for dispensing the enclosed cans. The end wall of the carton has a dispensing flap which can be folded down upon opening. An aperture formed

by the flap extends into the side walls to permit grasping of the can to withdraw it from the carton. When the flap is opened, the cans are held in the carton by an accurate flap portion extending downwardly in the end wall into the center of the aperture. The structural integrity of this carton is compromised because the entire bottom end of the carton is opened. The dispensing flap does not provide a safety net to prevent a can from rolling out of the carton and falling to the floor. This carton cannot be easily moved from one location to another after the dispenser has been opened without the containers falling out. It will be realized that the design of this carton is not satisfactory for dispensing bottles with necks as the exiting container being dispensed needs to have a corresponding cylindrical top and bottom of approximately the same size to facilitate easy dispensing by a person grasping the ends of the exiting container.

U.S. Pat. No. 4,364,509 to Holley, Jr. et al. also discloses a fully enclosed carton with a dispenser in one of the end walls. This dispenser is likewise formed in the end wall by tearing out an end flap and lowering it into proper position. Expansion slits are provided in the side wall for the user's fingers to grasp the ends of the exiting can. This carton is not adapted for use with bottles, because of the necessity of grasping the ends of the container for removal. In addition, it is not adapted for carrying cans once the carton has been opened as they are likely to roll out of the dispenser. There is also no safety net to receive the cans as they are rolled out of the dispenser.

### SUMMARY OF THE INVENTION

It is an object of this invention to provide a dispenser that preserves the integrity of the carton after the dispenser has been opened. It is a further object to provide a dispenser that can be used with both cans and bottles. It is another object of this invention to provide a safety net or basket for the containers that are automatically dispensed when the dispenser is opened. It is a still further object of this invention to develop a dispenser that will permit the carton to be moved from one location to another after it has been opened without discharging containers. The final object of this invention is to provide a dispenser that can be easily opened.

Briefly described, in a preferred form, the objects of this invention are achieved by providing an enclosed carton that has a unique dispenser in the exiting end of the carton. This carton is generally rectangular and has a bottom, a top, two sides, a closed end and an exiting end. The carton is foldably constructed from a blank having panels and flaps. The exiting end or ends of the carton permits containers to be taken from the carton via the dispenser.

This carton has a dispenser that is torn from an end of the carton by tearing an end portion of the top panel, a triangular portion from the adjoining side panels, and all of the side end flaps except the bottom most portions, to form a dispenser. The top end flap is removed when this dispenser is opened. This dispenser may have a semi-circular score line attached to the dispenser score line in the top panel for easy opening of the dispenser. A person's fingers can be inserted between this semi-circular score line and the dispenser to commence the opening of the dispenser. This semi-circular score line is placed so that when it is pushed open, a person's fingers will go between the first and second containers inside of the carton. A score line can be provided that bisects the semi-circular score line parallel to the longitudinal axis of the containers to permit ease of entry of a person's fingers. The bottom portions of the side end flaps are left intact to preserve the structural

integrity of the carton and also to provide a wall to prevent an end container in the bottom of the carton from accidentally rolling out.

It should be realized that the dispenser does not have to be totally removed from the carton, as the score lines in the side and top panels can be broken and the dispenser flipped over along the score lines in the side end flaps to form a safety net or basket when the first container in the top of the carton rolls out of the dispenser. If the score line in the side end flaps is not broken, the dispenser can be reclosed.

This carton can be constructed by gluing, taping, stapling and the like, or by locking. The dispenser of this invention can be put in one end of the carton or in both ends. A dispenser can be torn from the carton and placed under the other end of the carton to elevate it to facilitate the removal of the containers from the carton. These and other objects, features, and advantages of the present invention will become more apparent upon reading the following specification in conjunction with the accompanying drawing figures.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a plan view of a blank from which a carton according to this invention is formed.

FIG. 2 is a perspective end view of the carton loaded with cans showing the dispenser being partially opened.

FIG. 3 is a perspective end view of the carton containing cans with the basket shaped dispenser open but attached and containing a can.

FIG. 4 is a perspective side view of the carton containing cans showing the top most end can being gripped by hand for removal from the carton.

FIG. 5 is a plan view of the blank from which a carton according to this invention is formed having a single handle opening with the bottoms flaps being designed to be glued together.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is intended primarily for use with cans and bottles of the types used to contain soft drinks, beer and the like. The blank 10 is formed from a foldable sheet material, such as paperboard. The blank has a top flap 12 which is connected by fold line 14 to side panel 16, which in turn is connected by fold line 18 to bottom panel 20. Bottom panel 20 is connected by fold line 22 to side panel 24, which in turn is connected by fold line 26 to top flap 28.

This carton is capable of containing cans or bottles in two rows of six containers each. This carton has the "racetrack" handle 30 and 32 formed in the top flaps, 12 and 28, respectively. Cushioning flaps 34 and 36 are provided for the comfort of a person's hands, and are foldably joined to top flaps 12 and 28. On the exiting-end of the carton, top end flap 38 is joined to top flap 12 by fold line 40. Side end flap 42 is joined to side panel 16 by fold line 44. Bottom end flap 46 is joined to bottom panel 20 by fold line 48. Side end flap 50 is joined by fold line 52 to side panel 24. Top end flap 54 is joined to top flap 28 by fold line 56.

On the closed end of the carton, top end flap 58 is connected to top flap 12 by fold line 60, side end flap 62 is connected to side panel 16 by fold line 64, bottom end flap 66 is attached to bottom panel 20 by fold line 68, side end flap 70 is connected to side panel 24 by fold line 72 and top end flap 74 is connected to top flap 28 by fold line 76.

It will be understood by those skilled in the art that the carton of the present invention is generally symmetrical about

a horizontal line of bisection, as viewed when FIG. 1 is rotated lengthwise. This symmetry aids in the efficient production of the present carton.

In forming this blank 10 into a carton, top flap 12 is glued to top flap 28 forming a sleeve. The cans or bottles are then loaded into the carton on their sides and the various end flaps on both ends are closed. Using one end as an example, top end flaps 38 and 54 are folded downwardly and bottom end flap 46 is folded upwardly and then side end flaps 42 and 50 are folded sideways. These various end flaps are held together by glue or other means. The other end of the carton is glued and closed in the same fashion.

When the blank is folded and glued, the resulting carton has a closed end and an exiting end. However, a dispenser can be placed on both ends of the carton. The containers exit the carton through the exiting end of the carton. The exiting end of the carton has a tear line 78 that extends through the top flaps 12 and 28, through the side panels 16 and 24 to form a triangular dispensing flap on the dispenser 79 into the side end flaps 42 and 50. In order to facilitate the opening of this dispenser 79, a finger flap 82 may be provided for the easy insertion of the fingers to start the tearing of the dispenser 79. Finger flap 82 is connected to top flaps 12 and 28 by tear line 80. Finger flap 82 may be provided with insertion flap 86 to facilitate entry of the fingers into the carton. For the opening of the dispenser 79, insertion flap 86 is connected to finger flap 82 by fold line 84. Finger flap 82 and insertion flap 86 are connected to the dispenser 79 by fold line 88 which interrupts the tear line 78. It will be noticed that tear line 78 extends into side end flaps 42 and 50 so as to form a substantial bottom portion 90 and 92 so that the end of the carton will have a bottom end when the dispenser 79 is opened.

FIG. 2 shows the carton full of cans with the dispenser 79 open except for the tear lines 78 through the side end flaps 42, 50. It will be noted that the dispenser is a unitary structure. The dispenser 79 is opened by a person inserting his or her fingers into finger flap 82 and pulling the dispenser 79 open. Insertion flap 86 is provided to facilitate the entry of the fingers into the opening provided by finger flap 82. Finger flap 82 and insertion flap 86 are placed so that the fingers will enter the interior of the carton between the first and second cans.

FIG. 3 shows the dispenser 79 completely opened but still attached to the carton by tear line 78 not being torn open through side end flaps 42 and 50. When the dispenser 79 is completely opened, the top can C will fall into the basket formed by the dispensing flap 79 and be retained. This dispenser 79 serves as a safety net to prevent the can from leaving the vicinity of the carton. The dispenser 79 forms a basket with triangular flaps forming side walls, side end flaps 42 and 50 forming a bottom wall and the torn off portions of the top flaps 12 and 28 forming an end wall.

In order to maintain the structural integrity of this carton, the bottom portions 90 and 92 of the side end flaps 42 and 50 are not removed from the carton when the dispenser is removed. The structural integrity of the carton is improved by the fact that the bottom end flap 46 is not removed. The bottom end flap 46 has a height H approximately equal to the distance between A and B along fold lines 44 and 52 respectively. This means that the bottom end flap 46 has the same height as the bottom portions 90 and 92 of the side end flaps 42 and 50, thus producing a strong bottom end structure. As shown in FIGS. 3 and 4, the height of the bottom end structure formed by 46, 90, and 92 is less than the diameter of a can C.

If desired, the dispenser 79 can be totally removed from carton or left attached along tear line 78 in side flaps 42 and 50 and reclosed.

5

As illustrated in FIG. 4, a can C can be easily removed from the carton by using the fingers F and the thumb T of a hand.

FIG. 5 is a plan view of a blank from which a carton containing cans in three rows of four cans each according to the invention is formed. This carton has a single slot handle for carrying. The blank 110 has a bottom flap 112 which is connected by fold line 114 to side panel 116, which in turn is connected by fold line 118 to top panel 120. Top panel 120 in turn is connected by fold line 122 to side panel 124 which in turn is connected by fold line 126 to bottom flap 128. On the closed end of the carton, bottom end flap 130 is foldably connected by fold line 132 to bottom flap 112. Side end flap 134 is connected by fold line 136 to side panel 116. Top end flap 138 is connected by fold line 140 to top panel 120. Side end flap 142 is connected by fold line 144 to side panel 124 and bottom end flap 146 is connected by fold line 148 to bottom flap 128. The exiting end of the carton has a bottom end flap 150 which is connected to bottom flap 112 by fold line 152. Side end flap 154 is connected by fold line 156 to side panel 116. Top end flap 158 is connected by fold line 160 to top panel 120. Side end flap 162 is connected by fold line 164 to side panel 124. Bottom end flap 166 is connected by fold line 168 to bottom flap 128.

This carton has a slot handle 170 formed by cut line 172 and fold lines 174 and 176. It also has a score line 178 to assist in dissipating the forces involved in lifting a loaded carton.

A dispenser 180 is formed by tearing tear line 182 which extends from the top panel 120 through side panels 116, 124 and into side end flaps 154 and 162. Tear line 182 extends into side end flaps 154 and 162, so as to leave bottom portions 184, 186 that has a height when the carton is formed along lines 156, 164 respectively that is approximately equal to the height of bottom end flaps 150 and 166 in order to provide structural strength to the carton. This carton may have a finger flap 188 connected to dispenser 180 by fold line 190 and insertion flap 192 connected to finger flap 188 by fold line 194. Finger flap 188 and insertion flap 192 are joined to top panel 120 by tear line 196.

A sleeve from this carton is prepared by gluing the bottom flaps 112 and 128 in an overlapping relationship. This carton is then loaded in the same manner as the carton shown in FIG. 2 through the end of the carton. Side end flaps 134, 142, 154, and 162 are glued over the bottom end flaps 130, 146, 150, 166 and top end flaps 138 and 158 to close the ends of the carton. The dispenser is opened in the same manner as the dispenser shown in FIGS. 1 and 2.

The dispenser of this invention can be used for both cans and other types of cylindrical containers. It is particularly useful for PET bottles having a stubby configuration.

#### UNIQUE FEATURES OF THE DISPENSER OF THIS INVENTION

One of the unique features of the dispenser of this invention is that it provides easy access to the cans or bottles in the carton but yet does not greatly diminish the structural integrity of the carton. This is partly because the bottom end of the end panel in which the dispenser is located is retained. This accomplished by leaving a bottom portion on the side end panel that is equal in height to the bottom end flaps.

The dispenser of this invention provides an easy opening feature in that it has a finger flap and insertion flap so that a person's fingers can be inserted between the first and second cans to open the dispenser.

This dispenser also provides a safety net or basket in that if the tear line for the dispenser is not torn along the side end

6

flaps, it remains attached to the carton and can catch in its basket a can as it is removed from the carton.

While the invention has been disclosed in its preferred forms, it will be apparent to those skilled in the art that many modifications, additions, and deletions can be made therein without departing from the spirit and scope of the invention and its equivalents as set forth in the following claims.

I claim:

1. A method of opening an enclosed carton containing a plurality of containers in two rows, with a top row and a bottom row, said containers each having a diameter and an axis, the containers in the top row including a first container and a second container, the second container contacting the first container; the carton comprising:

a top panel, a first side panel, a second side panel, a bottom panel, and closed ends, at least one of which is an exiting end; the exiting end being formed of end flaps; the first container contacting the exiting end; the containers in the bottom row including an end container; the end container contacting the exiting end;

a dispenser which can be flipped over at the exiting end to form an opening through which the containers may be removed;

the dispenser comprising portions of the carton; the portions including a portion of the top panel, a portion of the first side panel, a portion of the second side panel, and a portion of the exiting end; said portions being defined by a tear line extending across the top panel, the first side panel, the second side panel, and the exiting end;

the tear line extending across the top panel spaced between the axis of the first container and the axis of the second container; the tear line in the exiting end extending the entirety of the distance between the first side panel and the second side panel;

a finger flap located along the tear line in the top panel; the finger flap being located between the axis of the first container and the axis of the second container;

the tear line in the exiting end separating the portion of the exiting end comprising the dispenser from a bottom end structure; the bottom end structure having a height above the bottom panel that is less than the diameter of said end container; and

wherein, when the dispenser is flipped over along the tear line in the exiting end, a basket is formed, the basket catching the first container as the dispenser is flipped over along the tear line in the exiting end;

the method comprising:

separating the portion of the dispenser in the top panel; separating the portion of the dispenser in the first side panel and the portion of the dispenser in the second side panel; and,

wherein the dispenser remains attached to the carton at the exiting end thereby forming a basket at the exiting end of the carton.

2. The method of claim 1 wherein the first container is moved with the dispenser as the dispenser is being flipped over along the tear line in the exiting end.

3. The method of claim 1 wherein the dispenser can be reclosed.

4. The method of claim 1 wherein the containers are cans or bottles.

5. The method of claim 1 wherein the first container has a diameter at its largest section, and wherein at least a portion of the tear line in the top panel is spaced from the exiting end more than the diameter of the first container.

6. The method of claim 1 wherein when the carton is disposed on a substantially flat surface, the dispenser can be

detached from the top panel and opened to contact the surface without detaching the dispenser from the exiting end.

7. The method of claim 1 in which the dispenser remains attached to the carton when the dispenser is flipped over along the tear line in the exiting end. 5

8. The method of claim 1 wherein the carton is only capable of carrying six containers in the top row and six containers in the bottom row.

9. The method of claim 1 wherein the tear line in the exiting end is spaced from the bottom panel less than a diameter of the end container in the bottom row. 10

10. The method of claim 1 wherein structural integrity of the carton is preserved after the dispenser has been separated along the tear line in the top panel, in the first side panel, and in the second side panel. 15

11. The method of claim 1 wherein each of the containers in the top row is positioned directly above a corresponding container in the bottom row.

12. The method of claim 1 wherein the end container has a diameter and wherein the tear line in the exiting end is located a height from the bottom panel that is less than the diameter. 20

13. The method of claim 1 wherein the carton does not include cut lines for receiving adhesive on the first side panel or the second side panel.

14. The method of claim 1 wherein, after dispensing the first container, the dispenser can be pivoted toward the top panel to reclose the dispenser. 25

15. The method of claim 1 wherein the enclosed carton is not adhesively attached to another carton.

16. The method of claim 1, further including: 30  
subsequently removing the dispenser from the carton by detaching the dispenser at the portion of the exiting end.

\* \* \* \* \*