Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2732009 A1 2010/01/28

(21) 2 732 009

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2009/07/27
(87) Date publication PCT/PCT Publication Date: 2010/01/28
(85) Entrée phase nationale/National Entry: 2011/01/25
(86) N° demande PCT/PCT Application No.: BR 2009/000222
(87) N° publication PCT/PCT Publication No.: 2010/009527
(30) Priorité/Priority: 2008/07/25 (BR PI 0804694-8)

(51) Cl.Int./Int.Cl. *C22B 1/14* (2006.01), *B07B 1/00* (2006.01), *C22B 47/00* (2006.01)

(71) Demandeur/Applicant:
VALE S.A., BR

(72) Inventeurs/Inventors:
MAFRA, WASHINGTON LUIZ, BR;
SOUZA, JOAO BATISTA CONTI DE, BR

(74) Agent: OSLER, HOSKIN & HARCOURT LLP

(54) Titre : PROCEDE DE PRODUCTION DE GRANULES DE MANGANESE A PARTIR D'UN MINERAI DE MANGANESE NON CALCINE ET AGGLOMERE OBTENU SUIVANT CE PROCEDE

(54) Title: PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE AND AGGLOMERATE OBTAINED BY THIS PROCESS

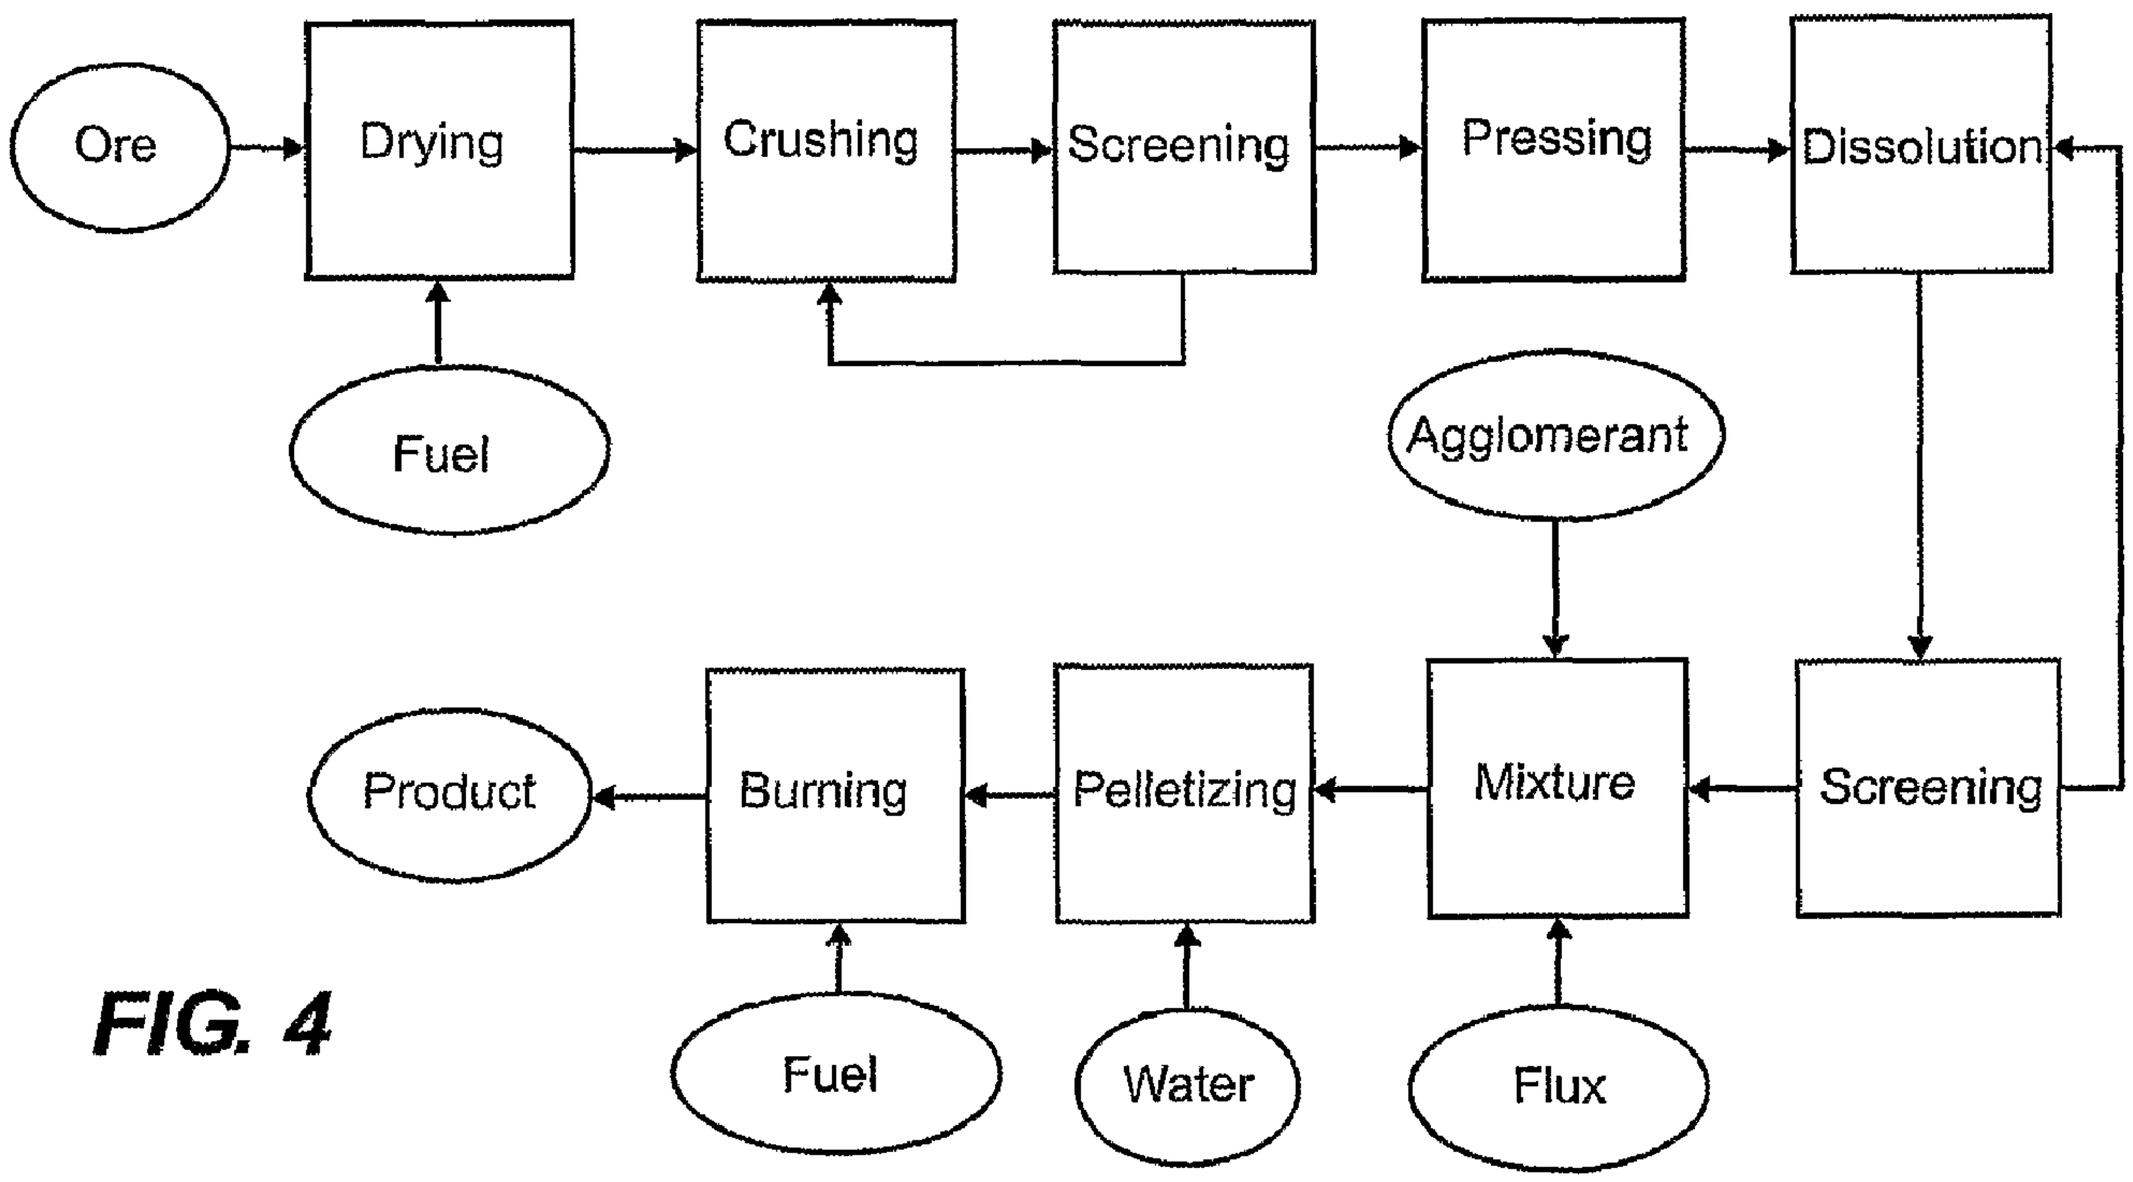


FIG. 4

(57) Abrégé/Abstract:
It is described a manganese pellet production from non-calcinated manganese ore, comprising the following phases: (a) ore size preparation through ore classification by function of particle size, smaller or equal to 1 mm particles being maintained from the ore particle fraction process so as to have a smaller or equal to 1 mm size, as well as the comminution of these particles; (b) flux addition; (c) agglomerant addition; (d) pelletizing resulting in crude pellets; and (e) thermal processing through crude pellet drying, pre-heating and heating.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 January 2010 (28.01.2010)

PCT

(10) International Publication Number
WO 2010/009527 A1

(51) International Patent Classification:
C22B 1/14 (2006.01) *B07B 1/00* (2006.01)
C22B 47/00 (2006.01)

(21) International Application Number:
PCT/BR2009/000222

(22) International Filing Date:
27 July 2009 (27.07.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PI 0804694-8 25 July 2008 (25.07.2008) BR

(71) Applicant *(for all designated States except US)*: **VALE S.A.** [BR/BR]; Avenida Graça Aranha, 26, Centro, 20030-000 Rio de Janeiro - RJ (BR).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **MAFRA, Washington Luiz** [BR/BR]; Avenida Beira Mar, 410 - Apto. 303, 29200-000 Guarapari - ES (BR). **SOUZA, João Batista Conti de** [BR/BR]; Avenida Munir Hilai, 352, Jardim Camburi, 29200-000 Vitória - ES (BR).

(74) Agent: **VEIRANO ADVOGADOS**; Avenida das Nações Unidas, 12995 - 18° andar, 04578-000 São Paulo - SP (BR).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE AND AGGLOMERATE OBTAINED BY THIS PROCESS

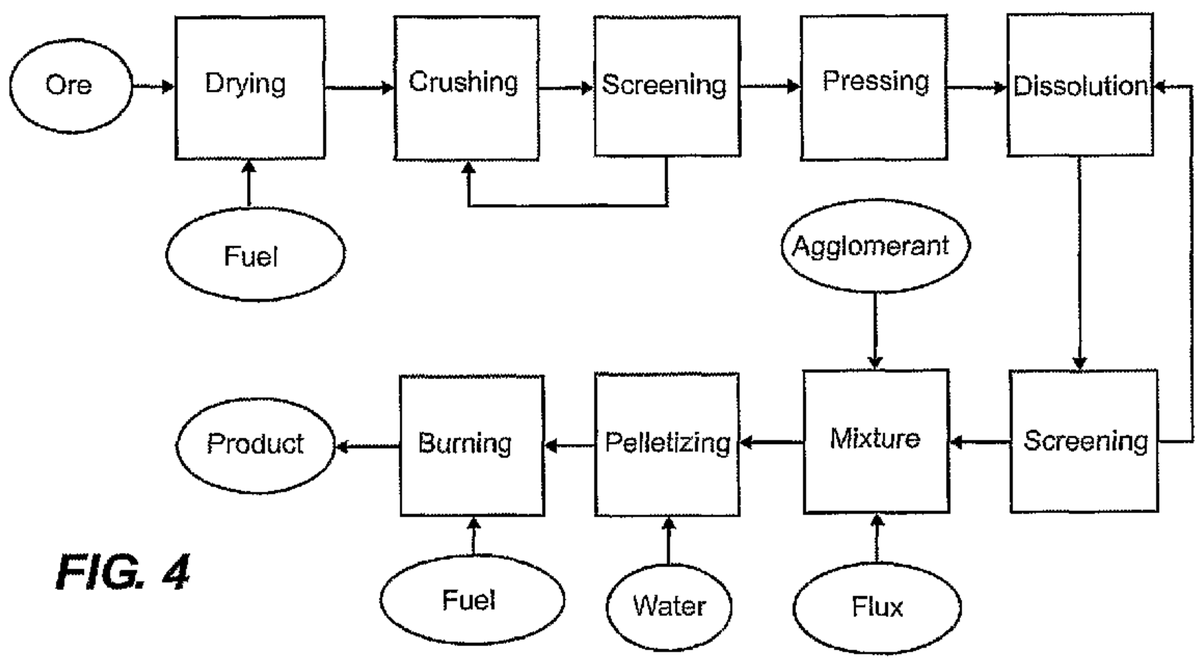


FIG. 4

(57) Abstract: It is described a manganese pellet production from non-calcinated manganese ore, comprising the following phases: (a) ore size preparation through ore classification by function of particle size, smaller or equal to 1 mm particles being maintained from the ore particle fraction process so as to have a smaller or equal to 1 mm size, as well as the comminution of these particles; (b) flux addition; (c) agglomerant addition; (d) pelletizing resulting in crude pellets; and (e) thermal processing through crude pellet drying, pre-heating and heating.

WO 2010/009527 A1

"PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE AND AGGLOMERATE OBTAINED BY THIS PROCESS."

Application field

This is a manganese pellet production process, based on non-calcinated manganese ore. The invention-obtained product (manganese ore pellets) is used in ferroalloy production (Fe - Mn, Fe - Si – Mn) in electric furnaces, in Blast Furnace manganese high-grade pig iron and/or as alloy element in producing special steels.

State of Art

Manganese has major importance in steelmaking. Approximately 90% of world manganese output is earmarked for steelmaking processes as ferroalloys.

Brazil holds manganese ore reserves in the states of Pará, Mato Grosso and Minas Gerais and these ores differ in their geologic formation.

Much fine is generated in ore extraction at the mines and in the manganese processing stations. Due to its grain size, such material has no direct use either in ferroalloy-making electric furnaces or in other furnaces. They are harmful to bed permeability, reducing plant productivity and increasing power consumption, in addition to environmental problems.

Manganese ore producers – especially those generating much fine – relentlessly pursue alternatives to increase the use of such ores. Among technological alternatives under consideration are fine agglomeration via sintering, pelletizing and briquetting.

The manganese sintering line is well established. This ore displays sintering-adequate behavior and produces appropriate sinter to be used in reduction electric furnaces – especially in local use – inasmuch as sinter lacks enough mechanical resistance to support excessive handling and long-distance hauling.

Some studies have been conducted in cold agglomeration via briquetting and pelletizing, but such studies have not been successful due to major problems in the physical and metallurgical quality of the agglomerates produced.

Hot manganese pellet-making has been studied before by companies and research centers. These studies showed that post-burn pellets are very brittle due to intensive crack generation. In all likelihood, this is due to much fire-caused loss of ore and to transformations in the manganese oxide phase. These facts have led to

including preliminary phases in ore thermal processing in the production chain, aimed at making feasible the production of high physical quality Mn pellets.

The most common manganese pellet production process uses previously-calcinated manganese ore, in a fluidized bed reducing atmosphere. This process involves manganese ore thermal treatment following pelletizing and raw pellet burning. This thermal treatment, also known as reducing calcination, aims mainly at generating magnetite and at facilitating iron elimination through magnetic separation, leading to ore enrichment. A side effect of this thermal treatment is the decomposing of manganese superior oxides which interfere with manganese pellet burning in traditional production processes (Grate Kiln and Traveling Grate). Hence, the conventional manganese pellet production route includes, in addition to previous calcination in a fluidized furnace atmosphere, the phases of milling, filtering, magnetic separation, pelletizing and burning in Traveling Grate-type furnaces.

The technique's major hurdle to be overcome is the difficulty in obtaining physically-adequate manganese pellets, when they are produced from non-calcinated ore. In the process of burning manganese gross pellets obtained from non-calcinated ore, many defects occur in the pellet structure, such as cracks and fissures which significantly reduce resistance to compression. In extreme cases, this could lead to full pellet structural deterioration, a.k.a. spalling. Such phenomenon is due to excessive steam generation in the drying and pre-heating phases, caused by water evaporation and decomposition of manganese superior oxides. In cases wherein pellets have no adequate porosity, the steam generated creates internal tensions in the pellet structure which are sufficient to make it brittle or even destroy it. A physically inadequate pellet may generate excessive fines when handled, in hauling and/or during in-furnace reduction. This generation of fines may lead to product loss, if there is sieve screening prior to furnace or lead to poor material performance during reduction, due to loss of bed permeability.

Although important for steelmaking, production of manganese ore pellets has been little studied so far, and few papers have been published.

The document JP 001040426 deals with obtaining pellets from pre-reduced manganese ores.

The document UA 16847U deals with obtaining manganese iron from poor-quality manganese ores.

The document US 4273575 deals with iron ore fines or manganese fines with particles under 150 microns, converted into spheres whose maximum size tops off at 6.0 mm, by adding agglomerants, followed by pelletizing and thermal treatment at 300 °C.

The document JP 57085939 deals with raw material for iron-manganese production, entailing manganese ore fines undergoing addition of 7.0 % of Portland-type cement agglomerant, and it may receive 7.0 % to 10.0 % water addition. Pellets are then cured at a time interval which can range from three days to one week.

ICOMI - Indústria e Comércio de Minérios do Amapá built and operated a pelletizing plant aimed at using manganese ore from its own mine. This plant was developed by the USA's Bethlehem Steel Corporation (BSC).

This plant's monthly production capacity was 20, 000 tons.

Physical properties of manganese pellets can be compared to those obtained/known in iron ore pellets.

Plant management and operation were handled by ICOMI and technical assistance was provided by BSC.

Ore from Serra do Navio Mine (SNV) was a manganese oxide ore (65% weight) displaying the following formation:

Cryptomelane	$KMn_8O_{16}.H_2O$	Predominant component
Hausmanite	Mn_3O_4	In lesser proportion
Alumina	Aluminum silicate	20%
Iron ore oxide	FeO(OH) Goethite	15%

FIGURE 1 shows the process flowchart for ore processing to feed the reducing calcination phase (Roaster) used by ICOMI.

Products from ICOMI's processing plant displayed the following features:

Coarse	75 – 13 mm	washed and sieve screened	48, 5% Mn
Gauged	13 – 8 mm	washed and sieve screened	48% Mn
Small	8 mm – 20 Mesh	Rake-type classifier	43% Mn

Fine	20 – 100 Mesh	hydrocyclone underflow	31% Mn
Slimes	<100 Mesh	hydrocyclone overflow	16% Mn

For purposes of ICOMI pellet production, in the desired grain size, the system was a mix of 75t small and 50t fines, or 60% and 40% respectively. This mix (8 mm to 150 Mesh grain size) was then fed into the fluidized bed furnace (Roaster), which is used for calcination in a reducing atmosphere. The chief objective at this phase was to transform iron ore content from Hematite to Magnetite. Magnetite removal was made possible by magnetic separation. This increases the manganese/iron ratio, that is, it enriches the manganese ore. Furthermore, it has a side effect of calcinating the ore, which ensures that breakdown of superior Mn oxides does not occur during the pellet-burning process.

In order to pelletize the Mn ore – concentrated and calcinated – ICOMI used bentonite as agglomerating agent, adding 20 kilograms per ton of ore (2.0%). Resistance to compression by the pellets produced was in the order of 250 kgf per pellet.

FIGURE 2 shows ore processing during reducing calcination up to pelletizing

The pelletizing disk was made with step-type levels, aimed at increasing resistance time of the material in the disk. This was conducive to better formation and superior finishing of crude pellets.

FIGURE 3 shows the schematic flow of crude pellet drying, pelletizing and screening.

A Traveling Grate-type furnace was used by ICOMI in the burn phase (see FIGURE 4 drawing representing pelletizing burn furnace). FIGURE 4 caption is in TABLE 1 herein below:

Description	Caption
Crude pellets	(1)
Upwards drying	(2)
Downwards drying	(3)
Pre-burning	(4)
Burning	(5)
Post-burning	(6)
Cooling	(7)
PE	(8)
Burnt pellets	(9)

TABLE 1 - Figure 4 Caption

TABLE 2 below indicates specification of ICOMI products:

Product	Size (mm)	Chemical Breakdown (% weight)							%< 6mm
		Mn	Fe	SiO2	Al2O3	Mn/Fe	K2O+Na2O	P	
Coarse	75-13	48, 5	5, 8	2, 5	5, 2	8/1	2, 0	0, 09	15
Gauged	13-8	48, 0	6, 0	2, 0	5, 0	8/1	-	-	-
Small	8-20#	43, 0	8, 0	5, 0	7, 0	5/1	1, 5	0, 10	100
Fines	20# - 100#	31, 0	10, 0	14, 0	12, 0	3/1	-	-	-
Slimes	<100#	16, 0	14, 0	25, 0	30, 0	1/1	-	-	-
Pellet	20-6	55, 1	6, 1	5, 2	7, 2	9/1	1, 1	0, 09	10

TABLE 2 - ICOMI Products's Specifications

In summary, ICOMI's pelletizing process demands a reducing calcination phase, followed by magnetic separation as an alternative to increase the Mn/Fe ratio in the ore, making it possible to reduce the degradation effect brought about by the chemical processing of pellets. Following this phase, the ore underwent wet milling, was classified by hydrocyclones, subject to thickening, homogenizing, filtering and ore drying, prior to its pelletizing phase.

Objectives of the invention

It is an objective of this invention to produce pellets with manganese ore fines, eliminating previous ore calcination and replacing the phases of milling, thickening, homogenizing, filtering and drying with natural roller press comminution.

The product obtained has pre-defined chemical breakdown and physical features, such as high resistance to compression and to wearing (abrasion), in order to withstand load-and-unload handling, long distance hauling and processing in steelmaking furnaces.

This invention downplays the catastrophic effect of pellet degradation, through:

- adequate control of ore grain-size distribution;
- knowledge of transformation mechanisms phases, thus increasing the temperature the ore is subject to (vide Table 3);
- elaboration of an adequate thermal cycle for purposes of controlling the burning phase.

TEMPERATURES	REACTIONS
560 – 630 °C	4 MnO_2 (c) at 2 Mn_2O_3 (c) + O_2 stable Pirolusite Criptomelane Reaction
840 – 900 ° C	2 KMn_8O_{16} (c) at 6 Mn_2O_3 (c) + 3 O_2 + $K_2Mn_4O_8$ (c) Criptomelane Partridgeit Potassium Permanganate
900 – 1020 ° C	3 Mn_2O_3 (c) at 2 MnO. Mn_2O_3 (c) + ½ O_2 Hausmanite Partridgeit 2 $K_2Mn_4O_8$ (c) at 4 Mn_2O_3 (c) + O_2 + 2K_2O (liq) Potassium Permanganate 2 K_2O (liq) + Al_2O_3 (c) + 2 SiO_2 (c) at 2 $KAlSiO_4$ (c) + 2 O_2

TABLE 3 - Temperature-dictated manganese ore reactions

Advantages of the invention

A new process was developed to obtain manganese pellets from previously non-calcinated ore. This process has some advantages, among them:

- to allow the obtention of a product with pre-set/known chemical breakdown; greater mass balance precision;
- to allow a reduction/elimination of heavy elements through their recovery via gas processing system;
- to allow the obtention of manganese pellets displaying adequate mechanical resistance to withstand long-distance hauling, handling and degradation during its use in metallurgic reactors, generating less fines in all these phases;
- significantly reduced operating cost vis-à-vis conventional process cost;
- to allow the improvement of metallurgical reactors performance. Increased productivity of alloy iron furnaces by function of a more homogeneous particle size and better load permeability;
- to allow the obtention of a more homogenous product in terms of chemical composition, physical and metallurgical qualities of its components – production of loads aimed at the fabrication of alloy irons, pig iron or as added element for the fabrication of special steels;

- to allow the reuse of fines generated during extraction, handling/beneficiation and transportations – maximization of reserves;
- to allow the reduction of environmental liabilities;
- to allow the recovery of dam-related materials – reuse of tailings. Turn fine ore considered waste into reserves;
- to allow the treatment of residues at their very generating source, thereby reducing environmental liabilities as well as fabrication costs as a result of reduced raw material cost by virtue of their decreased value and that of obtained substitution ratios;
- to allow the anticipation of solutions in the case of more severe environmental restrictions in Europe;
- to allow a lower moisture grade product, thus reducing freight costs with a metallic-richer product;
- to allow the introduction of a new and higher aggregate value product in the market;

Summarized description of the invention

Manganese agglomerates showing improved mechanical strength were developed, as well as their respective production processes through comminuted manganese ore agglomeration with no previous calcination, using hot pelletizing, comprising the following phases:

(a) ore size preparation through ore classification by function of particle size, smaller or equal to 1 mm particles being maintained from the ore particle fraction process so as to have a smaller or equal to 1 mm size, as well as the comminution of these particles;

(b) addition of flux;

(c) addition of agglomerant;

(d) pelletizing resulting in crude pellets; and

(e) thermal processing through drying, pre-heating and crude pellet heating.

Summarized description of the drawings

An elaborate description of this present invention is presented hereinafter

based on an execution example depicted by drawings. Pictures and photos show:

FIGURE 1 – shows ore treatment process flowchart for the reducing calcination phase feed (Roaster) used in the prior art;

FIGURE 2 – shows ore processing during the reducing calcination phase down to the pelletizing known in the state of art;

FIGURE 3 – shows the schematic flowchart drying phase, pelletizing and screening of the crude pellets known in the state of art;

FIGURE 4 – shows a Straight-type furnace – Grade Induration Machine known to the state of the technique;

FIGURE 5 – shows a flowchart containing the mixture compound for pelletizing and the process ore route preparation, object of this invention;

FIGURE 6 – shows a Pot-Grate burning furnace's schematic drawing used in the simulated travelling grate-type process.

FIGURE 7 – shows an induction furnace used in the simulated “steel belt” process.

FIGURE 8 – shows a graph containing temperatures obtained during sintering tests in the induction furnace according to FIGURE 7;

PHOTOS 1A and 1B – show the comminution equipment used in the process, object of this invention;

PHOTO 2 – shows a pelletizing disk used in the simulated “traveling grate” process;

PHOTO 3 – shows crude pellets used in the simulated “traveling grate” process;

PHOTO 4 – shows the Pot-Grade burning furnace used in the simulated “traveling grate” process;

PHOTO 5 – shows a 400 mm diameter lab disk used in the pelletizing test for the simulated “steel belt” process;

PHOTOS 6A and 6B – show moisturized and dry pellets used in the simulated “steel belt” process;

PHOTO 7 – shows 1300°C sintered pellets from the simulated “steel belt” process;

PHOTO 8 – shows a pelletizing disk used in the fabrication of crude pellets in the simulated “grate kiln” process; and

PHOTO 9 – shows the burning furnace used in the simulated “grate kiln” process.

Detailed description of the invention

Pelletizing is a mechanical and thermal agglomerating process to convert the ore's ultrafine fraction into spheres of about 8 to 18 mm size with suitable characteristics for reduction furnaces feed.

The present invention allows for the production of pellets from manganese ores without previous calcination and with a 40 to 60% passing size through a 0, 044 mm mesh (coarser material).

Manganese ore pellet production based on this present invention's process complies with the following phases:

1) Manganese ore drying;

2) Ore size preparation through comminution process;

3) Addition of fluxes (calcite or dolomite limestone or other MgO sources such as serpentinite, olivine, etc.) to manganese ore;

4) Addition of agglomerant to the manganese and flux ore misture;

5) Mixture of the resulting material from previous phase;

6) Final mixture pelletizing for the production of manganese ore crude pellets;

7) Crude pellet screening;

8) Managanese ore pellet burning;

9) Burnt pellet screening; and

10) Stocking and shipping of manganese ore pellet.

This process applies to a more oxide manganese ore as well as to ores from other same-type metals with specific size distribution, specific surface varying from 800 to 2000 cm^2/g and percent smaller than 0.044 mm from 40 to 60%. The ore shall be prepared in such a way as to prevent the generation of ultrafine material.

As far as the ore preparation process is concerned, the selected equipment depends on the ore's initial size. During this phase no ball milling shall be used for the material's particle size reduction. The most suitable equipment for the comminution process is: crusher and roller press or only a roller press with or without recirculation. In the case of ore fraction greater than 0.5 or 1.0 mm mesh particles size shall be previously reduced so as to obtain 100% of the passing

material through this mesh to be then submitted to the roller pressing process with and without recirculation. Materials with a fraction smaller than 0.5 or 1.0 mm can be roller press processed with and without recirculation. There must be enough pressing until a specific surface ranging from 800 to 2000 cm^2/g and/or a size from 40 to 60% is attained for the 0.044 mm mesh passing material. In the case of finer size ore, that is, those at the specific surface range and with mesh 0.044 mm passing percent, at the range or greater than 40%, crushing and pressing phases can be disregarded.

Crushing and/or roller press phases shall occur in a closed circuit with screen to ensure the desired product size from such operations.

The use of roller press with and without recirculation requires previous ore drying, the initial moisture of which is around 12 to 15% against final moisture between 9 and 10%. Drying shall be preferably performed in a solid or liquid fuel powered rotary dryer aimed at power generation.

Following through the pelletizing process, after the manganese ore size preparation, the comminuted material shall be mixed with flux, either calcite or dolomite limestone or any other MgO source such as serpentinite, olivine, etc.

Flux dosage can vary from 0.1 to 2.0% by function of the desired chemical composition for the pellet. Then the mixture receives the agglomerant dosage, which can be bentonite (from 0.5 to 2.0%), hydrate lime (2.0 to 3.0%) or CMC-type synthetic agglomerant, Carboximetilcelulose (from 0.05 to 0.10%). Quantities shall be suitable for the formation of crude pellets with enough resistance to support the transportation up to the furnace and thermal shocks to which they shall be subject during drying, pre-burning and burning phases. Both moisturized and dry pellets resistence shall be at least 1.0 and 2.0 kg/pellet, respectively, with a minimal resilience value, that is, 5 (five) drops.

Water dosage is performed during the pelletizing phase, either by disk or drum. The addition shall be by function of the mixture initial moisture in quantities enough to allow for the formation of good physical quality crude pellet. Depending on the size and agllomerant addition, moisture can vary from 14 to 18%.

Crude pellets shall be heat processed in a “traveling grate”, “grate kiln” or a steel belt-type furnace, depending mainly on the desired production volume. Due to thermal shock special attention shall be given to pellet's both drying and pre-burning

phases. The heating ratio shall vary from 50 to 150ºC/minute. Maximum temperature and total burning time shall be such as to ensure final product's quality in terms of physical resistance, mainly compression resistance. Top maximum temperature can vary from 1280 to 1340ºC and total time from 34 to 42 minutes. Pellet's compression resistance shall be at least 250 daN/pellet.

In order to better explain the invention examples of pelletizing and burning are given hereinafter but these should not be taken for limitative effects of the invention. The mixture composition for pelletizing and the ore preparation route for all examples are presented in FIGURE 5.

The calcite limestone was added as a flux and CaO source for the formation and composition adjustment of slag in the electrical furnace (FEA), and was prepared so as to have 70% of the material passing in a 325 mesh.

Bentonite was added as agglomerant and flux for the pelletizing process. Managanese and SiO_2 make a compound, the fusion point of which being on the order of 1.274ºC.

PHOTOS 1A and 1B show comminution equipment used for the invention: mill (A) and roller press, bench/pilot (B), used for the comminution of ores and fluxes.

Example 1 – Pelletizing and pilot scale manganese ore burning – "Traveling Grate" Process

Raw materials used in the study were manganese ore called MF15 from Mina do Azul (Carajás/PA), Northen calcite limestone and bentonite from India. TABLE 4 shows the chemical analyses of the materials used:

Materials	Fe	Mn	SiO_2	Al_2O_3	CaO	MgO	P	PPC
SFMn – MF15	4, 74	44, 20	3, 72	8, 12	0, 18	0, 23	0, 080	15, 36
Calcite limestone	ND	0, 020	2, 15	0, 89	51, 93	1, 25	0, 068	42, 22
Bentonite Ashapura	ND	ND	63, 50	16, 12	1, 30	2, 98	0, 020	6, 50

TABELA 4 – Chemical analyses of raw materials

A speed-adjustable belt feeder, a 1 (one) meter diameter pelletizing disk, 45º angle, 19 rpm speed and a water spray-based dosage system were used during the crude pellet production phase (PHOTO 2)

At times the disk angle was altered (from 45º to 43º) so as to allow for pellets to reach diameters ranging from 10 to 20 mm by function of longer residence time. The purpose of this activity was to ensure that, following the burning phase, pellets would be kept within the range of 8 to 18 mm by function of ore contraction due to dehydration, which was observed in bench scale tests, during the burning and crude pellet calcination phases.

For the purpose of characterizing crude pellets as shown in PHOTO 3, moisturized and dry crude pellets were subjected to compression resistance and number of drops assays (resilience), assays used to evaluate the performance of crude pellets while simulating handling phases during classification (crude pellet screening), haulage and transference to the burning furnace. The results are shown in TABLE 5 as follows:

Resistance to compression (kg/p)		Number of drops
Moisturized	Dry	
1, 15	8, 49	90, 73

TABLE 5 – Crude pellet physical quality.

Following the production of crude pellets, they were screened by 8, 10, 12.5, 16, 18, and 20 mm mesh for size distribution evaluation.

The 10-mm mesh passing materials and the ones retained on 20 mm mesh were discarded while materials within the range of 10 to 20 mm were mixed for the formation of crude pellet load to be heat processed in a Pot Grate-type pilot furnace.

FIGURE 6 and PHOTO 4 show a schematic drawing where remissive figures stand for, respectively, (3) top; (4) middle; (5) bottom; (6) lining, and the figures indicate (1) lining layer (10 cm) and (2) side layer (2 cm) and the pellet burning furnace photo. The following are data relative to such equipment:

Pot-Grate burning furnace:

Internal diameter	30 cm
External diameter	40 cm

Height	50 cm
Refractory lining	plates of silica-luminous material
Lining layer height	10 cm
Air pressure	variable
Air flow	variable
Temperature range	0° C to 1.350° C

For the assembly of the Pot Grate, burnt ore pellets were used as lining layer, being protected by a grate/steel screen and for the side layer 6 mm porcelain spheres were used.

After being fed with crude pellets, the furnace was sealed and the thermocouples were connected. The burning was scheduled during furnace load, specifying the thermal profile to be executed so that crude pellets can go through upstream drying, downstream drying, pre-heating, heating, post-heating and cooling off without the generation of pellet degrading fractures.

Upon completion of the cooling phase, burnt pellets were then unloaded, separated from the porcelain spheres, homogenized, quartered, and sent for compression and abrasion resistance physical assays and chemical analysis.

Burnt pellets were then subjected to lab chemical analyses as shown in TABLE 6 as follows:

Mn	SiO_2	CaO	Fe	Al_2O_3	Comp. Resist.	Abrasion Resist.
41, 00	5, 92	2, 43	5, 71	9, 26	250 daN/pellet	3, 0 % <0, 5mm Max

TABLE 6 – Burnt pellet chemical composition.

The evaluated burnt pellet physical quality parameters were Resistance to Compression (RC), the result of which being 269 daN/pellet, and the Abrasion Index (AI), with 1.4% passing through a 0.5 mm mesh.

Norms and ISO (International Standardization for Organizations) methodologies for iron ores were used to conduct the manganese pellet quality evaluation assays.

Example 2 – Pelletizing and bench scale manganese ore burning –"Steel Belt" process

Manganese ore fines chemical analyses were performed using mainly chemical to moisture methods, FAAS (atomic absorption), ICP (plasma), and a sulfur-carbon Leco analyzer. Heat loss was measured in an atmosphere of N2 to 1100°C.

TABLE 7 shows the chemical analysis.

Component	Mn	Fe	SiO_2	CaO	MgO	Al_2O_3	K	Na	S	C	L.O.I[1)]	H_2O
%	43.1	6.1	4.5	0.27	0.36	9.0	0.89	< 0.04	0.12	0.17	16.5	8.2

1) Heat loss

TABLE 7 – Mn ore chemical composition.

Calcite was used in tests as flux, the composition of which being as follows: heat loss of 49.6 % CaO and 43.0 %

The pelletizing test was performed in a 400 mm lab disk (PHOTO 5). The mixture for the pelletizing comprised manganese ore fines, calcite and bentonite, which were initially manually mixed and lately using a lab V mixer for 60 minutes. The mixed portion was manually fed into the disk. As the mixture was fed into the disk water is spray-controlled for the formation of pellets. The mean desired pellet diameter was 12 mm. Following the pelletizing test, moisturized and dry pellets diameters and compression resistance were then measured and the humidity of moisturized pellets was calculated.

An induction furnace (FIGURE 7) was used for sintering tests. Pellets were transported in a 110 ml alumina crucible, which was placed inside a bigger graphite crucible, with the set being placed into an induction furnace. The graphite crucible was previously lidded and air was injected into the test crucible with the system temperature being continuously measured. Pellets were then lab-scale heated in accordance with the desired temperature profile. The compression resistance target was 200 kg/pellet (suitable for a 12 mm size). FIGURE 8 shows these temperatures.

Pelletizing tests results are shown in TABLE 8 and the photos of moisturized and dry pellets are shown in PHOTOS 6A and 6B.

Moisture (%)	**Resistance (kg/pellet)**	
	Moisturized	**Dry**
14, 8	1, 46	7, 78

TABLE 8 – Crude pellet physical quality.

In the sintering test, pellets were heated pursuant to defined temperature profiles aimed at a lab scale description of the sintering in the metallic conveyor.

Actual sintering conditions shall be researched by means of a pilot bench scale test during an upcoming phase. A targeted compression resistance of 200 kg/pellet (12 mm diameter pellet) was obtained at 1300ºC. Compression resistance reached 300 kg/pellet at 1350ºC. PHOTO 7 shows pictures of sintered pellets at 1300ºC.

Example 3 – Bench scale manganese ores pelletizing and burning – "Grate Kiln" process

Chemical compositions of both manganese ore and input used for this study are shown in TABLES 9 through 11.

Element	Fe_{total}	FeO	Fe_2O_3	Mn_{total}	MnO	MnO_2	SiO_2
%	6.49	1.87	7.21	42.73	1.52	65.75	5.79

Al_2O_3	CaO	MgO	K_2O	Na_2O	P	S	LOI
7.24	1.12	0.26	1.19	0.042	0.093	0.035	6.82

TABLE 9 –Manganese ore chemical quality.

Element	Fe_{total}	Fe_2O_3	SiO_2	Al_2O_3	CaO	MgO	K_2O	Na_2O	P	S	LOI
%	9.10	13.01	50.97	17.32	2.89	0.26	0.16	2.52	0.053	0.035	11.91

TABLE 10 – Bentonite chemical quality.

Element	Fe_{total}	Fe_2O_3	SiO_2	Al_2O_3	CaO	MgO	LOI
Grade	0.17	0.24	0.65	0.22	54.89	0.26	43.32

TABLE 11 – Calcite limestone chemical quality.

Crude pellets made in pelletizing disks (PHOTO 8) using manganese ore mixtures, limestone and bentonite, as well as the effect of diverse parameters over the quality of crude pellets were evaluated. The process parameters observed in this evaluation phase are as follows:

- Pelletizing conditions: pelletizing time and compaction;
- Bentonite dosage;
- Limestone size;
- Coal dosage.

TABLES 12 through 14 show the results of these evaluations:

Pelletizing conditions		Bentonite/%	Number of drops	Moisturized compression resistance /N/pellet	Thermal shock Temp. /ºC	Moisture /%
Pelletizing time /min	Compaction time /min					

12	2	1.5	59.9	13.74	540	15.72
12	0	1.5	51.1	10.01	520	15.80
7	2	1.5	9.7	9.50	449	16.61

TABLE 12 – Effects of pelletizing time and compaction and bentonite dosage over crude pellet quality.

Basicity/CaO/SiO_2	Number of drops	Moisturized compression resistance /N/pellet	Thermal shock Temp./°C
0.18 (natural basicity)	9.7	9.50	449
0.30	10.9	13.48	270
0.50	9.1	14.03	261
0.70	13.6	16.39	260
0.90	13.8	12.14	225
1.10	19.6	14.85	206

TABELA 13 – Basicity effects over crude pellet quality.

Coal addition %	Number of drops	Moisturized compression resistance /N/pellet	Thermal shock Temp../°C
0	13.8	12.14	225
0.5	13.0	10.29	368
1.0	11.2	8.60	345

TABLE 14 – Effects of coal addition over crude pellet quality.

Based on such results we can conclude that:

- Most suitable pelletizing parameters should be the bentonite addition between 1.4 and 1.5%, moisture between 14 and 15% and pelletizing time on the order of 12 minutes. Under such conditions, drops totaled 50, and the thermal shock temperature was greater than 400°C while moisturized crude pellet compression resistance was greater than 10 N/pellet;
- Increased basicity implied and increased number of drops and increased moisturized crude pellet resistance compression. A striking decrease was also observed in the thermal shock temperature. On the other hand, the increased addition of coal affected significantly moisturized crude pellet compression resistance.

Crude pellets were burnt in a vertical furnace (PHOTO 9) and during this phase the effects of the following parameters over burnt pellet resistance compression were evaluated:

- Pre-heating, time and temperature conditions;
- Heating, time and temperature conditions;
- Binary basicity;
- Coal addition.

TABLES 15 to 18 show the results of these evaluations:

Temperature (°C)	Time (min)	Compression resistance (N)	
		1	2
1010	8	492	542
1010	10	577	594
1010	12	544	551
1010	15	/	549

1 – Pelletizing and compaction time of 12 and 2 min, respectively, and normal heating ratio.
2 - Pelletizing and compaction time of 7 and 2 min, respectively, and low heating ratio.
3 - % < 0, 044 mm = 60%.

TABLE 15 – Effects of temperature and pre-heating time over burnt pellet quality

Temperature (°C)	Time (min)	Compression resistance (N)		
		1	2	3
1250	15	/	1140	1232
1280	15	1493	/	/
1300	15	/	1437	1190
1316	15	1513	1881	2088
1330	15	/	/	/
1337	15	2433	2567	2241

1 – Pelletizing and compaction time of 12 and 2 min, respectively, and low heating ratio.
2 – Pelletizing and compaction time of 7 and 2 min, respectively, and low heating ratio.
3 – Pelletizing and compaction time of 7 min and low heating ratio.
4 - % < 0, 044 mm = 60%.

TABLE 16 – Effect of burning temperature over burnt pellet quality

Temperature (°C)	Time (min)	Compression resistance (N)	
		1	2
1337	12	/	1861

1337	15	2433	2567
1337	18	/	2530
1337	20	2338	/

1 – Pelletizing and compaction time of 12 and 2 min, respectively, and low heating ratio.
2 – Pelletizing and compaction time of 7 and 2 min, respectively, and low heating ratio.
3 - % < 0, 044 mm = 60%.

TABLE 17 – Effect of burning time over burnt pellet quality.

Temperature (°C)	Time (min)	Resistance to compression (N)				
		R0.3	R0.5	R0.7	R0.9	R1.1
1300	15	1120	1400	1438	1478	/
1320	15	/	1822	1853	2137	2235
1330	15	/	/	/	2167	2242
1337	15	2554	2799	2817	3136	3229
1337	12	/	/	/	/	2255

TABLE 18 – Effect of basicity over burnt pellet quality

Coal (%)	Pre-heating temperature (°C)	Pre-heating time (min)	Compression resistance (N)
0	1010	10	594
0.5	1000	10	241
0.5	1050	10	221
0.5	1100	10	260
1.0	1000	10	203
1.0	1050	10	178
1.0	1100	10	196

TABLE 19 – Effect of coal addition and pre-heating time over burnt pellet quality.

Based on such results we can conclude that:

(1) Crude pellet pre-heating conditions are very important for the production of good quality pre-heated pellets. When crude pellets were produced with ore 60% smaller than 0.044 mm, 1.5% bentonite, pelletizing time of 7 min and 2 min for compaction, temperature and pre-heating time of 1010°C and 10 min, respectively, it was possible to produce pre-heated pellets with 600N compression resistance.

(2) Burnt pellet compression resistance reached 600N during pre-heating and 2600N during heating, where temperature and processing time were 1010°C and 10 min, during pre-heating, and 1337°C and 15 min during heating;

(3) Burnt pellet compression resistance can be drastically improved with the addition of calcite limestone, with basicity varying between 0.3 to 1.1 during heating conditions mentioned in item 2.

(4) The addition of coal affects negatively burnt pellet compression resistance.

CLAIMS

1. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE characterized by the fact that it comprises the following phases:

(a) ore size preparation through ore classification by function of particle size, smaller or equal to 1 mm particles being maintained from the ore particle fraction process so as to have a smaller or equal to 1 mm size, as well as the comminution of these particles;

(b) flux addition;

(c) agglomerant addition;

(d) pelletizing resulting in crude pellets;

(e) thermal processing through drying, pre-heating and and heating the crude pellets.

2. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 1, characterized in that it can be applied to any more oxide manganese ore and ores from other metals of the same type with specific size distribution.

3. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 1, characterized in that the ore drying phase occurs before the size preparation phase so as to ensure a maximum moisture of 9%.

4. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 1, characterized in that during the comminution process at the size preparation phase both crushing and pressing operations are undertaken by function of ore particle size.

5. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 4, characterized in that at the ore size preparation phase, a fraction of manganese ore with particle size greater than or equal to 1.0 mm is handled with roller press.

6. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 1, characterized by the fact that at the end of the preparation process ore particles show specific surface between 800 to 2000 cm^2/g.

7. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 1, characterized by the fact that at the end of the preparation process ore particles show size varying from 40 to 60% in terms of mass of the passing material through a 0, 044 mm mesh.

8. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 1, characterized by the fact that the flux added during the flux addition phase is calcite or dolomite limestone, or their mixture, or any other MgO sources.

9. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 1, characterized by the fact that the agglomerant added during the agglomerant addition phase is selected from the group comprising bentonite, hydrated lime, carboximetilcelulose (CMC), or their mixture.

10. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 7, characterized by the fact that 0, 5% to 2% of mass is used, in relation to total bentonite mass.

11. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 10, characterized by the fact that 2% to 3% of hydrated lime mass is used, in relation to total mass.

12. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 10, characterized by the fact that 0.05% to 0.10% of carboximetilcelulose mass is used, in relation to total mass.

13. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, based on claim 1, characterized by the fact that at the end of the pelletizing phase crude pellets with 1 and 2

kg/pellet minimal resistance, respectively, are formed, with a resilience of at least 5 drops.

14. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 1, characterized by the fact that the crude pellet thermal processing phase occurs in a traveling grate, grate kiln or steel belt-type furnace.

15. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 14, characterized by the fact that the thermal processing phase shows maximum temperature varying from 1280 to 1340°C.

16. PROCESS TO PRODUCE MANGANESE PELLETS FROM NON-CALCINATED MANGANESE ORE, according to claim 14, characterized by the fact that the thermal processing phase total time ranges from 34 to 42 minutes.

17. IRON-MANGANESE AGGLOMERATE characterized by the fact that it is obtained through the process recited by claims 1 to 16.

18. IRON-MANGANESE AGGLOMERATE, according to claim 17, characterized by the fact that comprises an average diameter between 8 and 18 mm.

19. IRON-MANGANESE AGGLOMERATE, according to claim 17, characterized by the fact that it shows a minimal compression resistance of 250 daN/pellet.

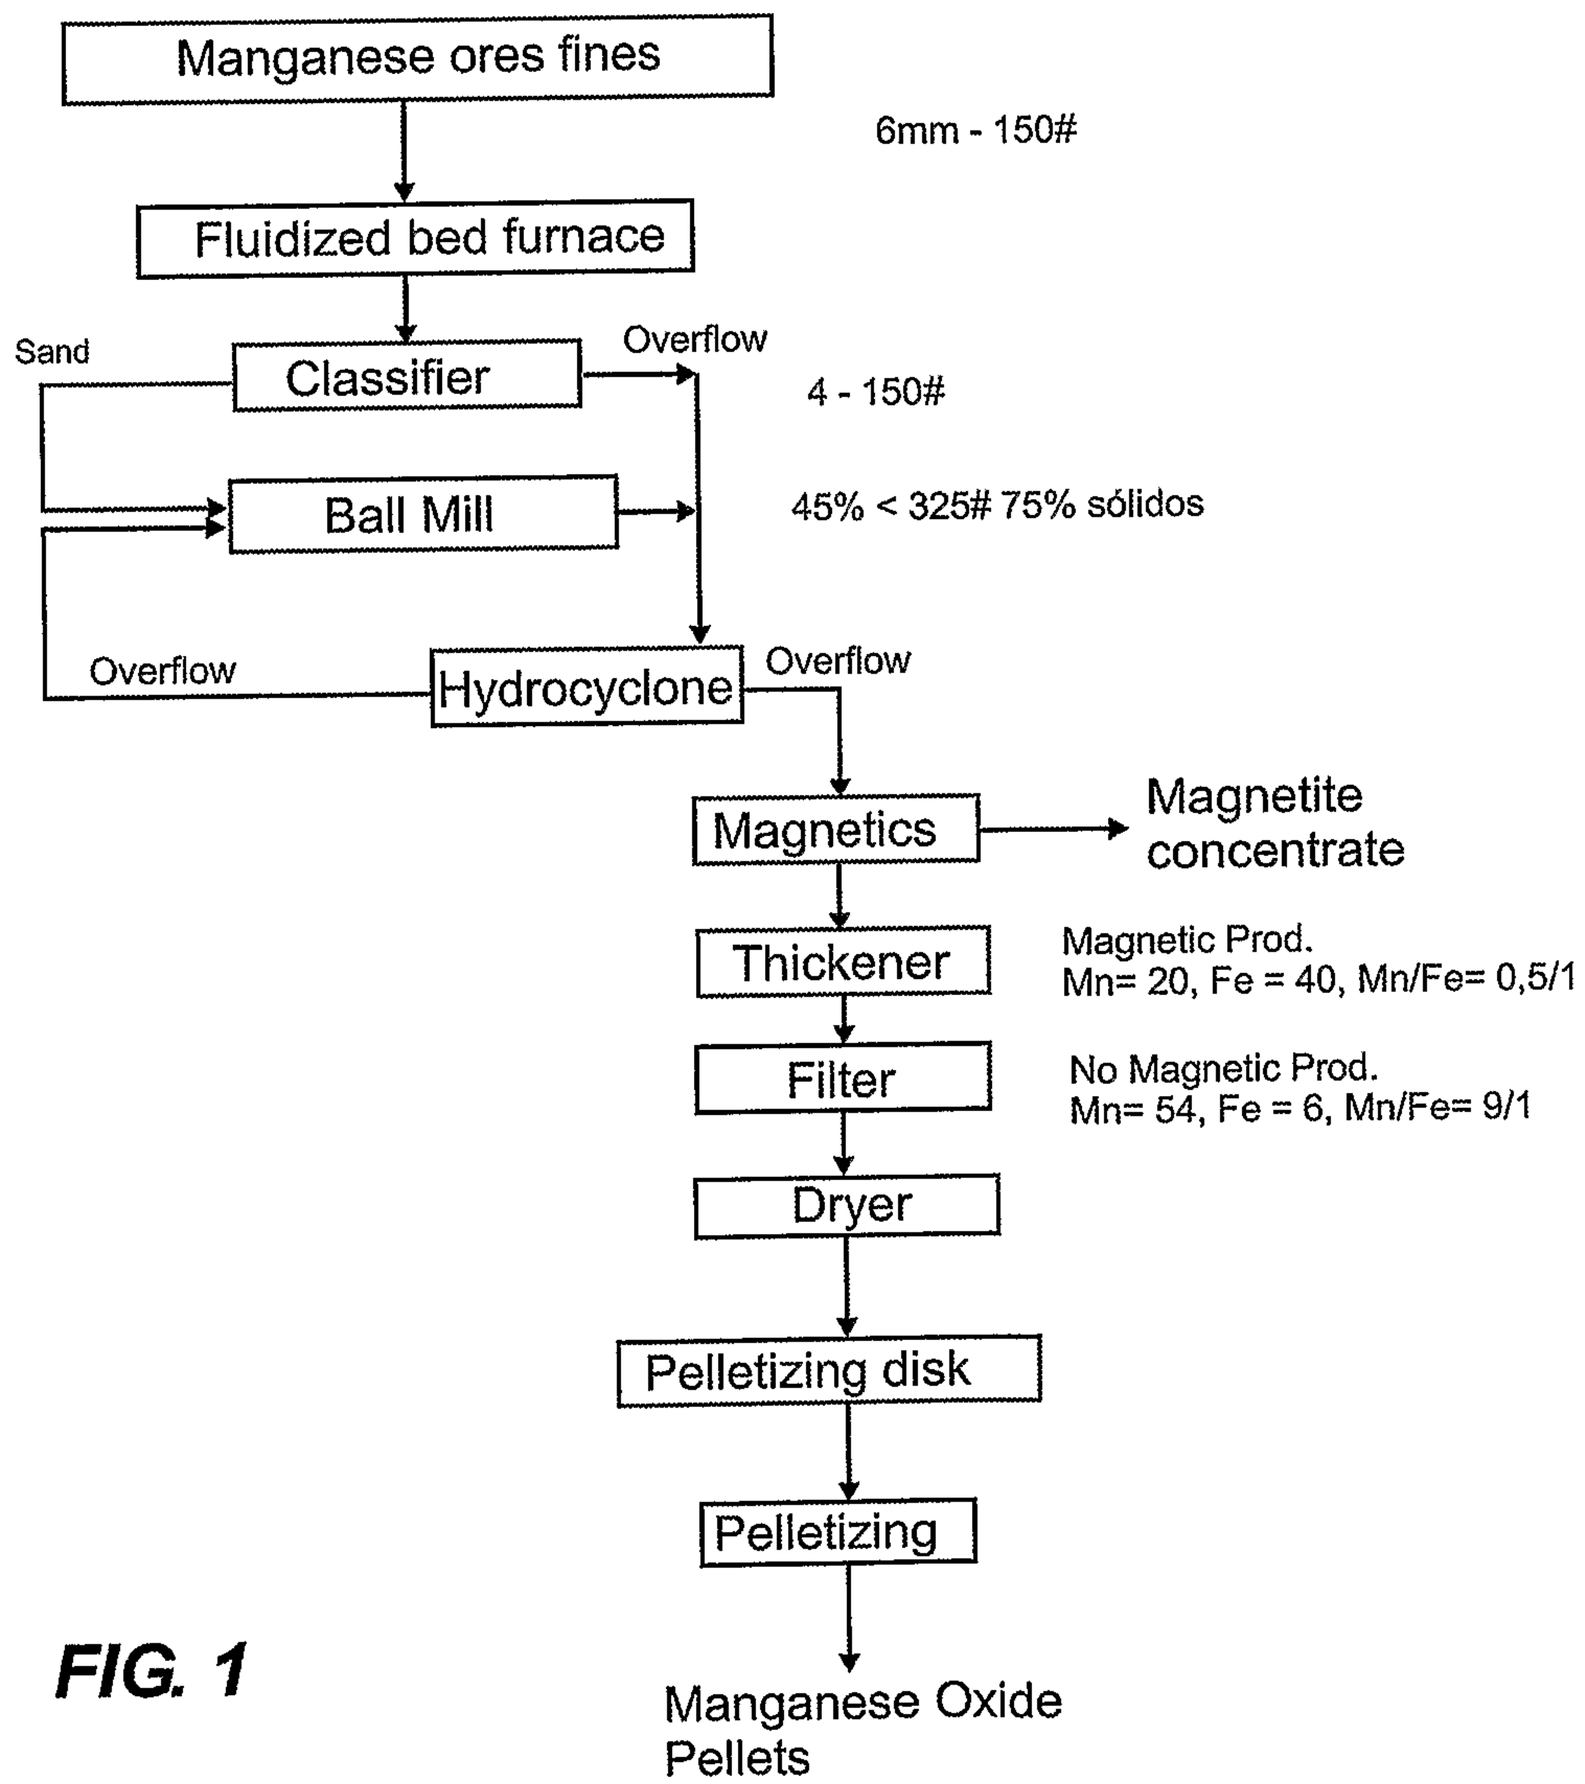

Manganese ores fines
6mm - 150#
Fluidized bed furnace
Sand
Classifier
Overflow
4 - 150#
Ball Mill
45% < 325# 75% sólidos
Overflow
Hydrocyclone
Overflow
Magnetics
Magnetite concentrate
Thickener
Magnetic Prod.
Mn= 20, Fe = 40, Mn/Fe= 0,5/1
Filter
No Magnetic Prod.
Mn= 54, Fe = 6, Mn/Fe= 9/1
Dryer
Pelletizing disk
Pelletizing
Manganese Oxide Pellets

FIG. 1

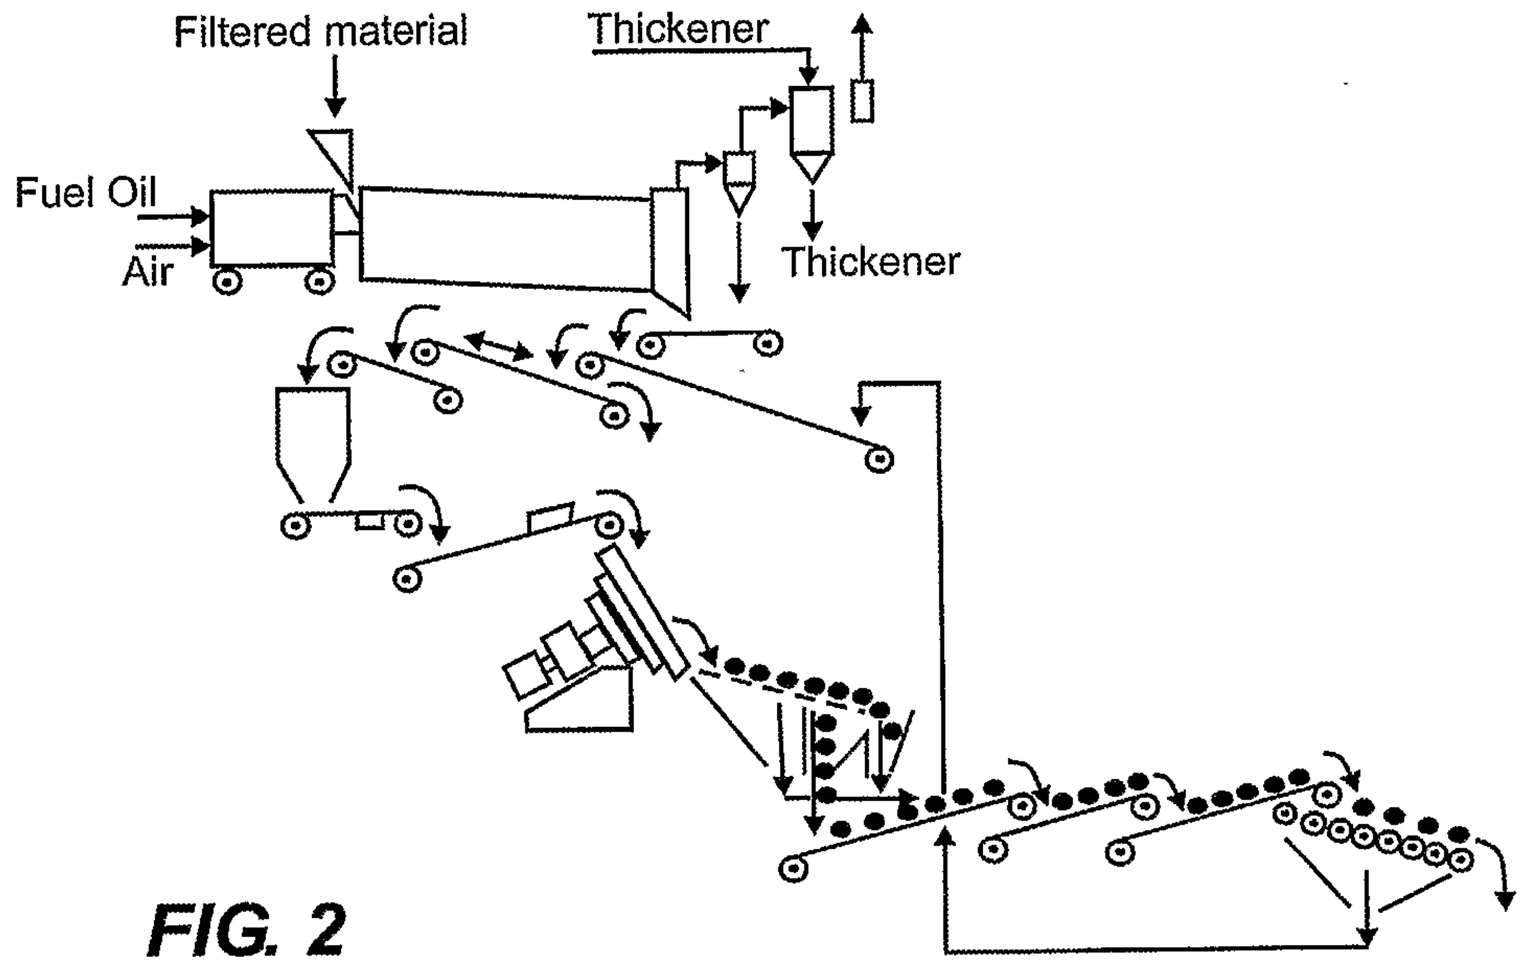

Filtered material
Thickener
Fuel Oil
Air
Thickener

FIG. 2

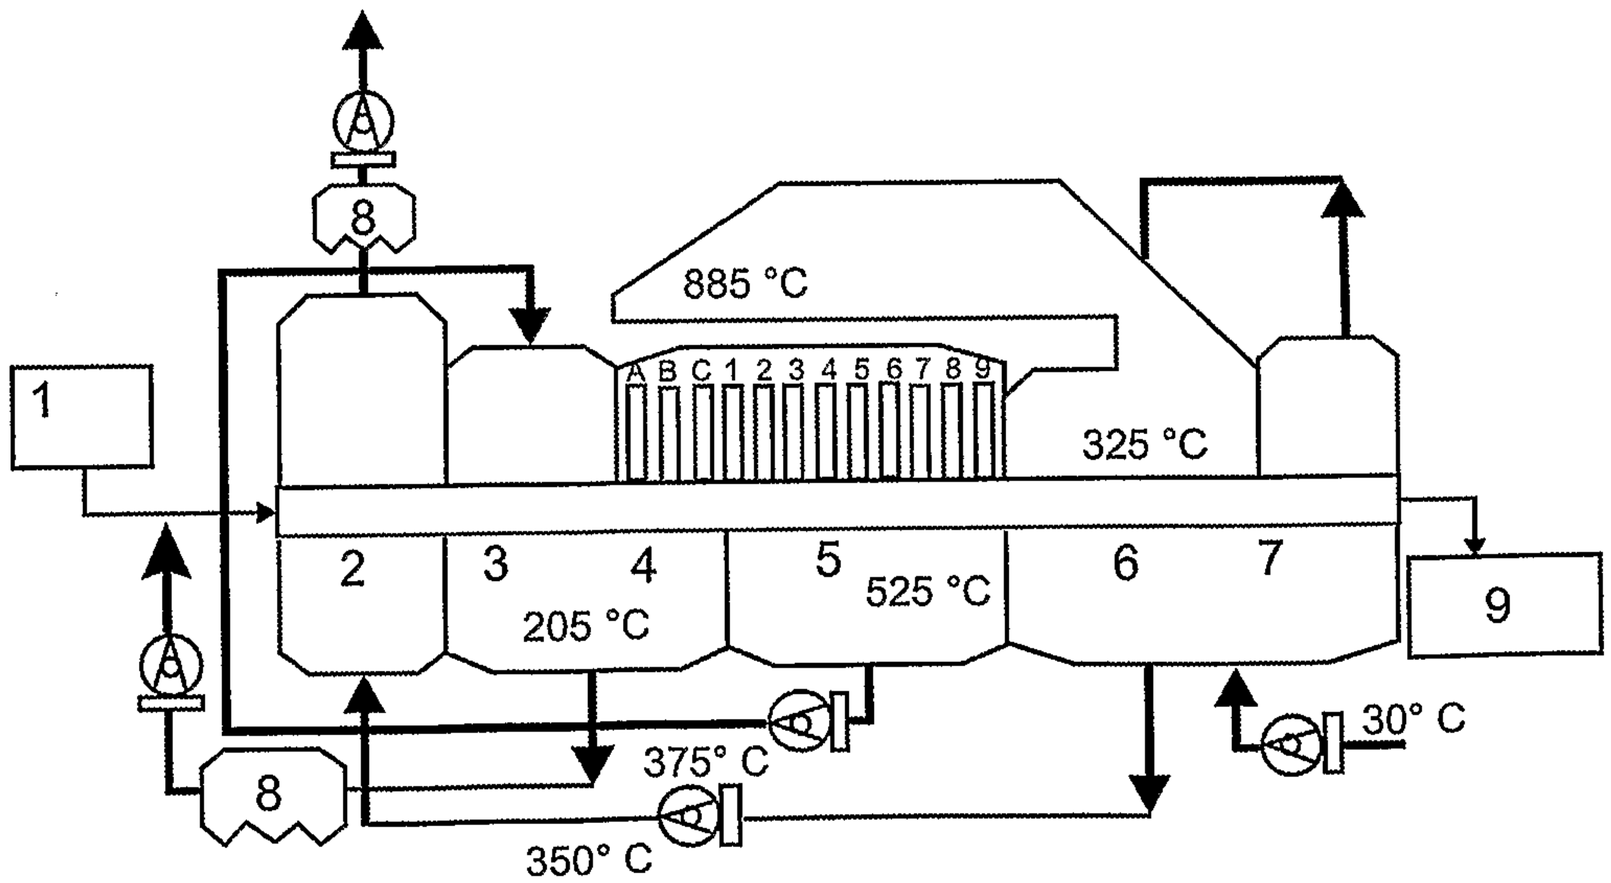

A
8
885 °C
A B C 1 2 3 4 5 6 7 8 9
1
325 °C
2
3
4
205 °C
5
525 °C
6
7
9
A
8
375° C
350° C
30° C

FIG. 3

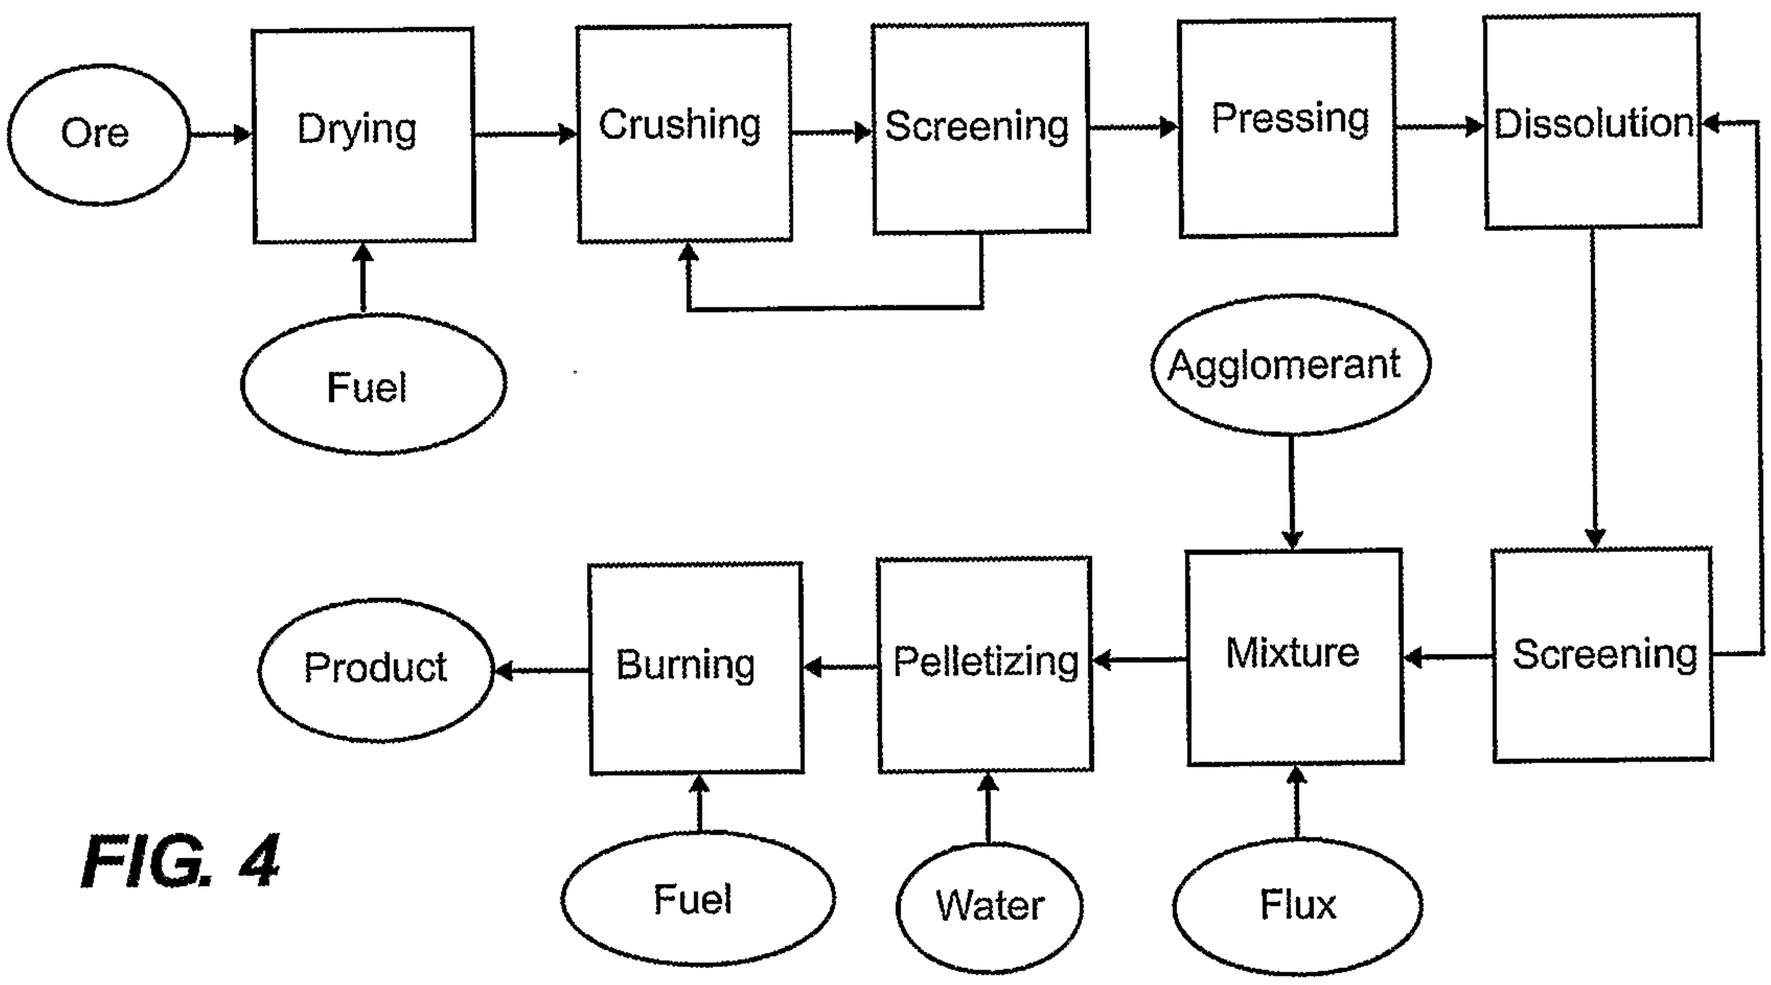

Ore
Drying
Crushing
Screening
Pressing
Dissolution
Fuel
Agglomerant
Product
Burning
Pelletizing
Mixture
Screening
Fuel
Water
Flux

FIG. 4

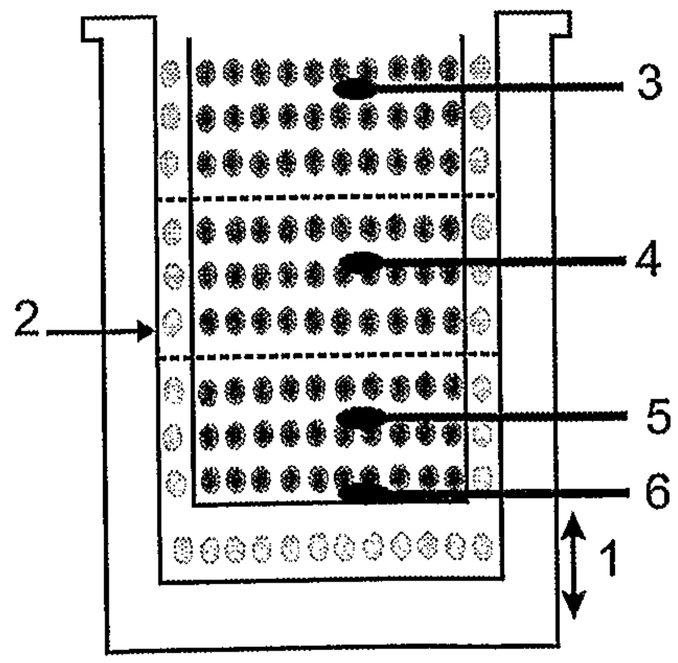

3
4
2
5
6
1

FIG. 5

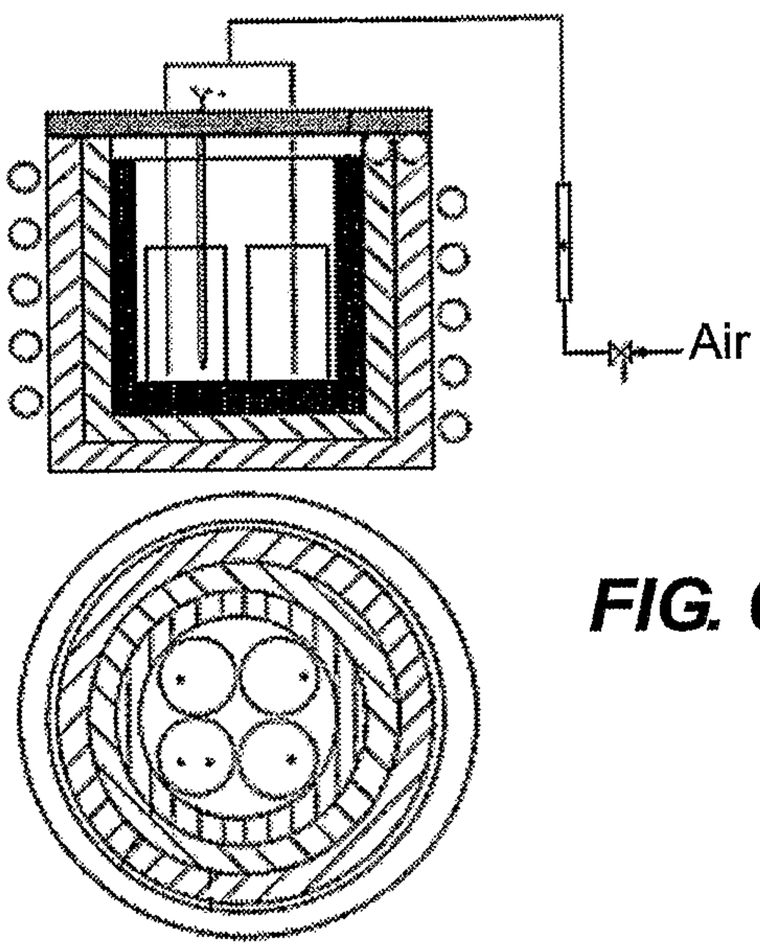


FIG. 6

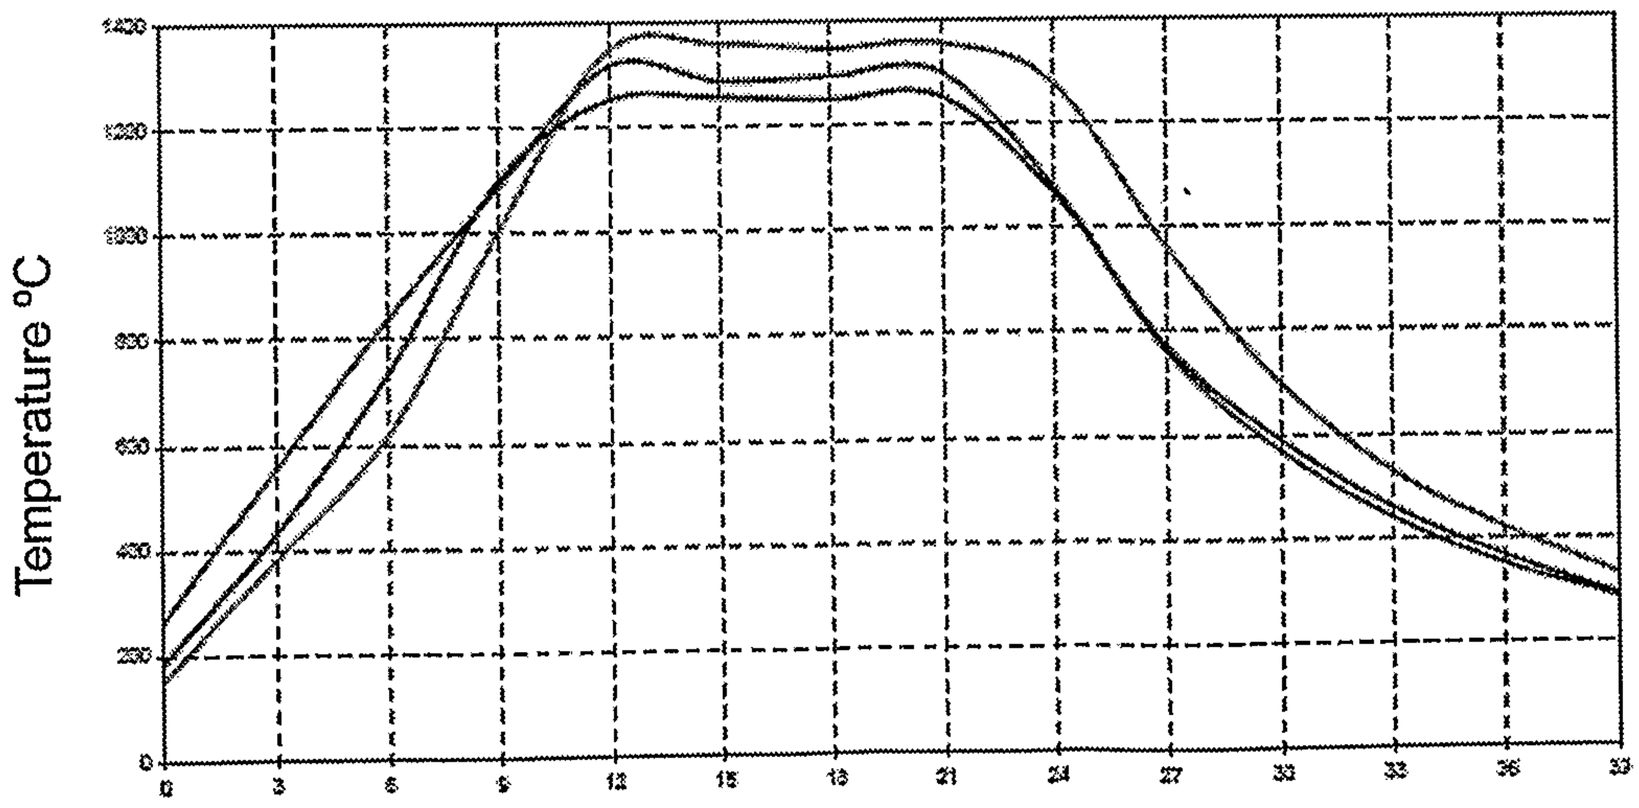


FIG. 7

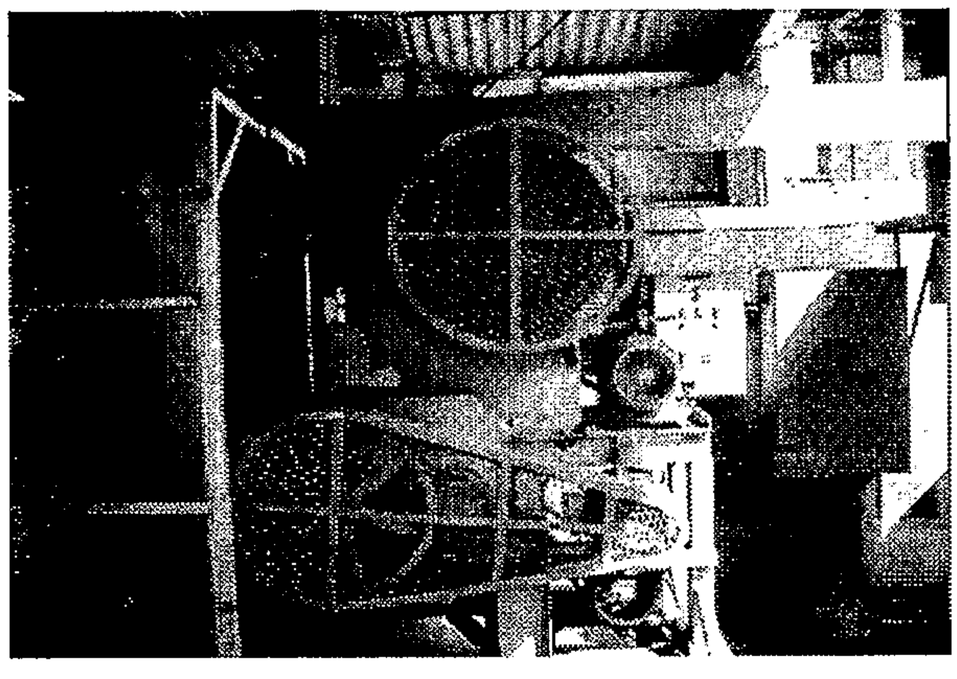


PHOTO 1A

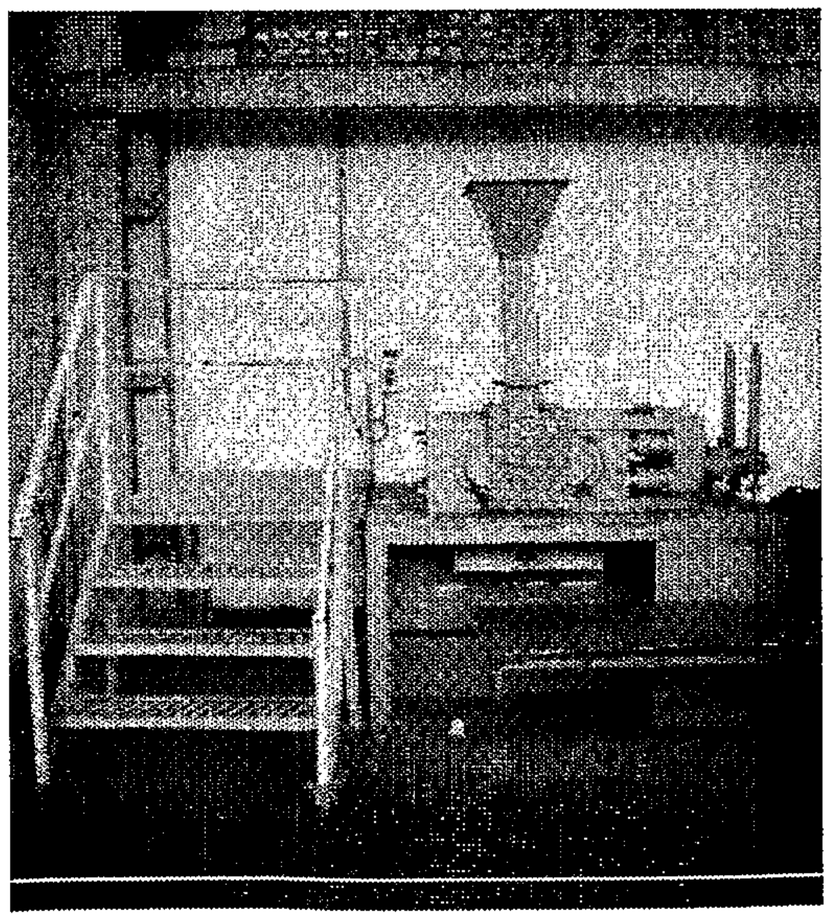


PHOTO 1B

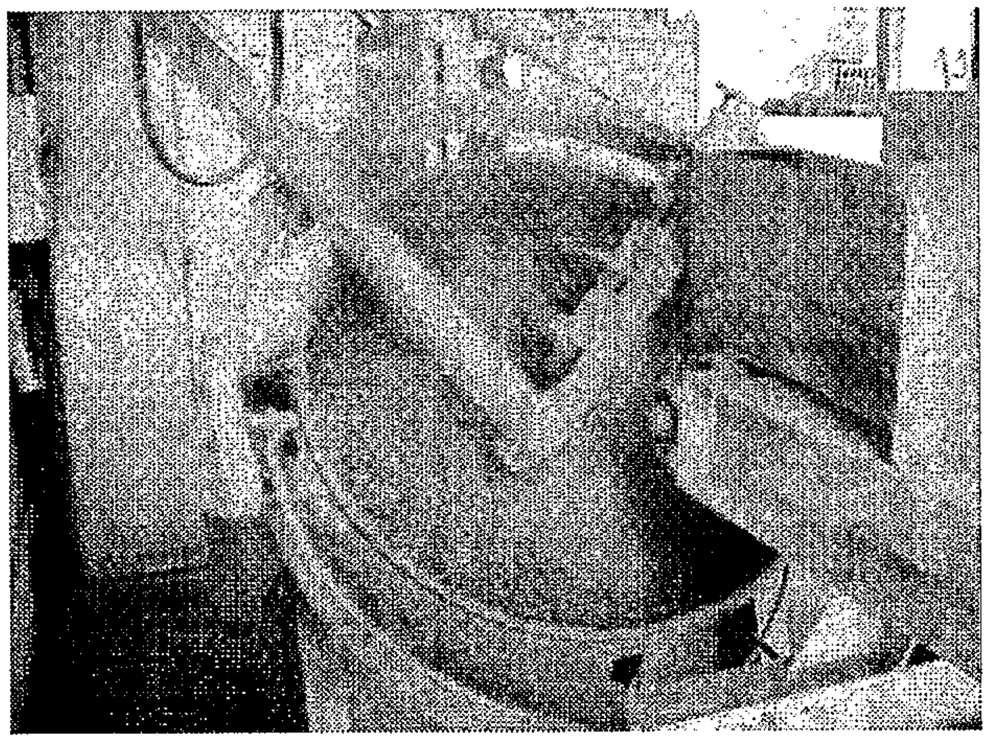


PHOTO 2

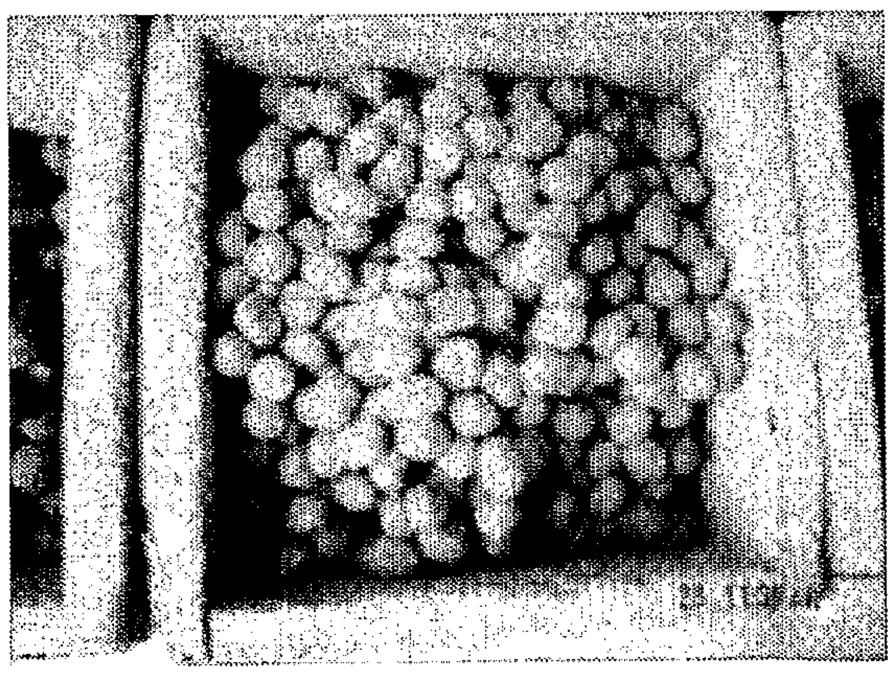


PHOTO 3

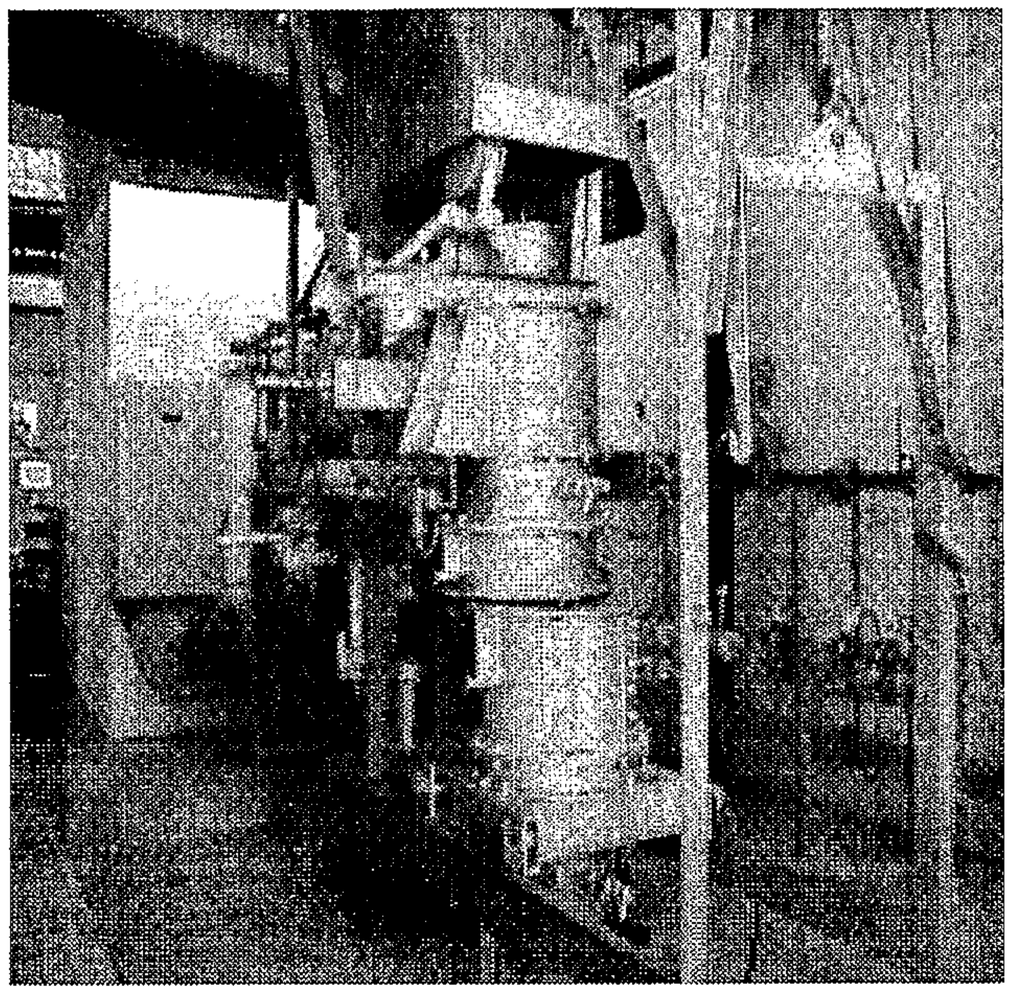


PHOTO 4

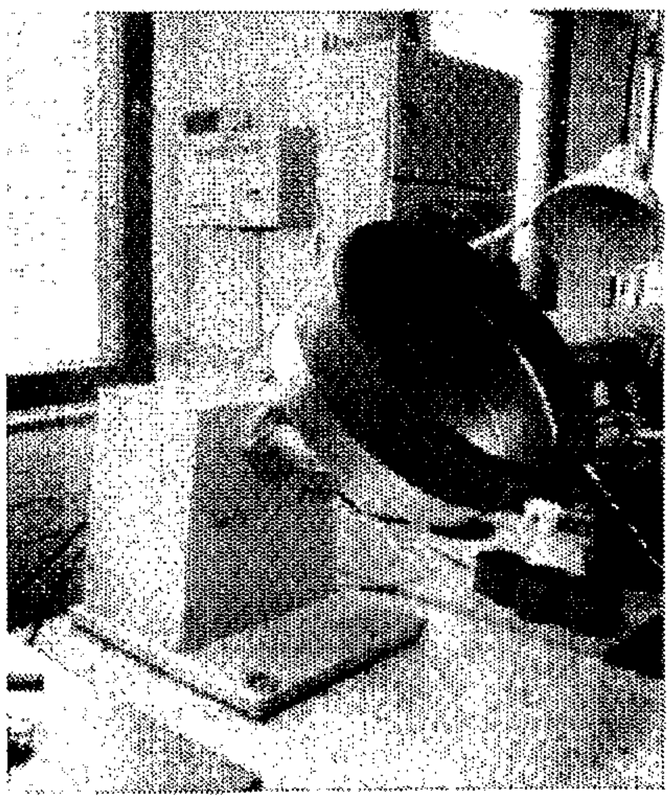


PHOTO 5

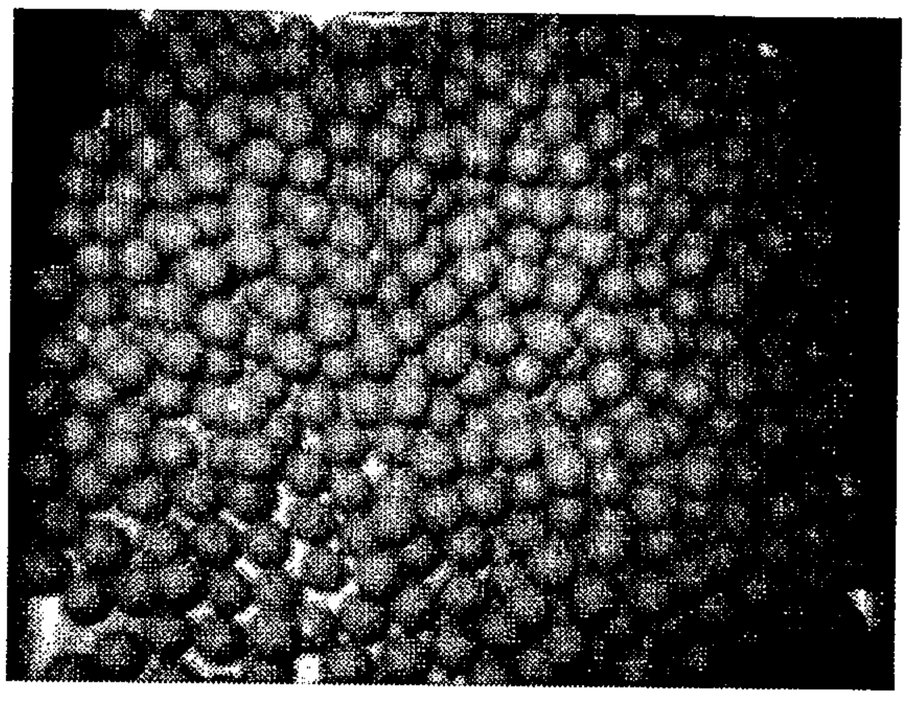


PHOTO 6A

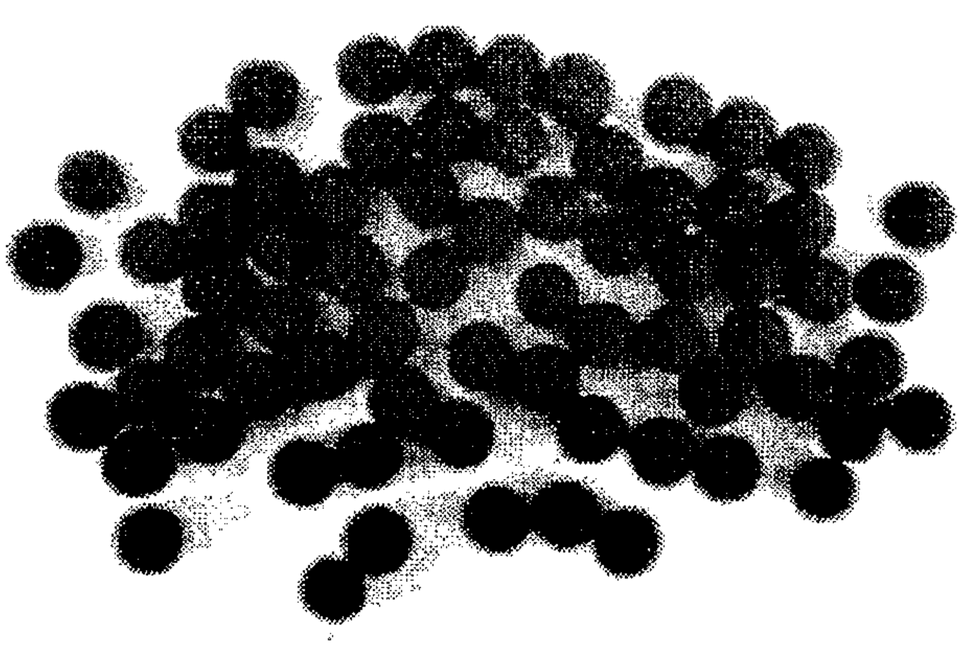


PHOTO 6B

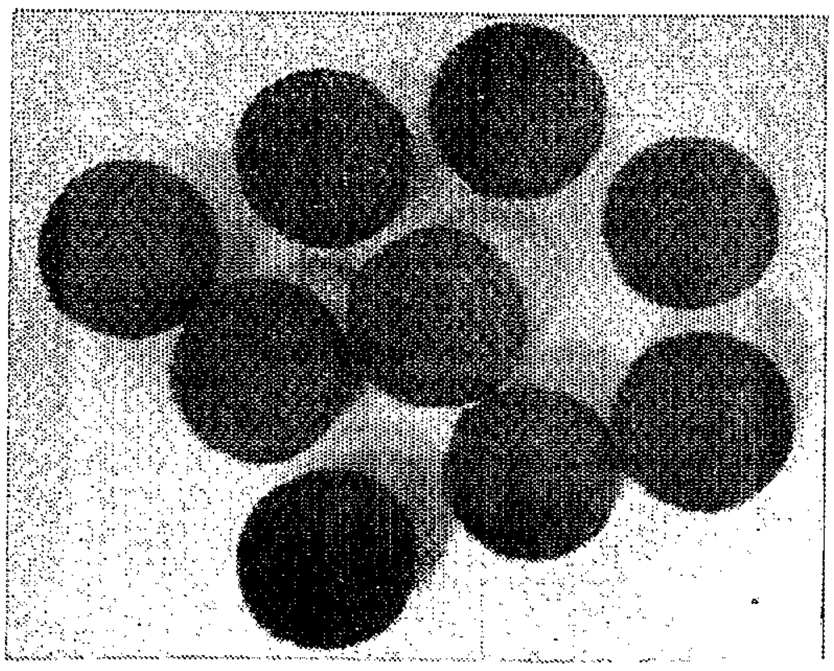


PHOTO 7



PHOTO 8

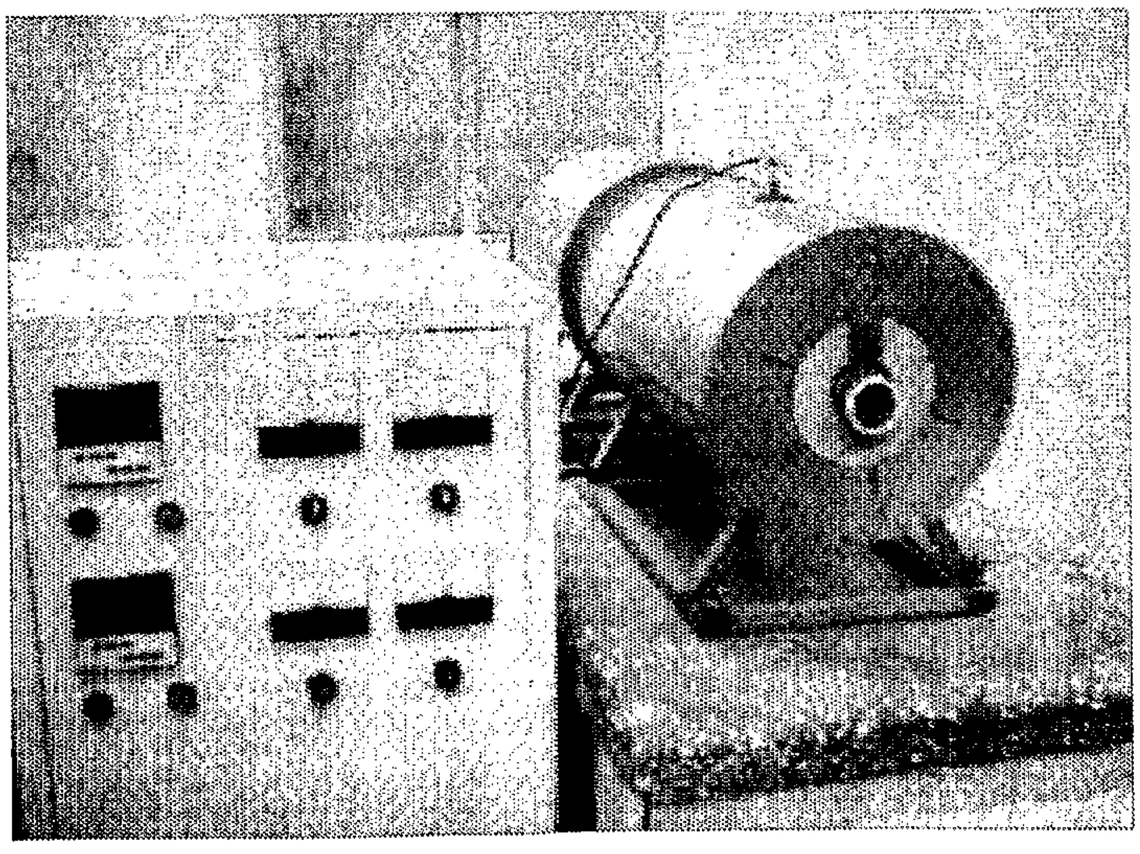


PHOTO 9

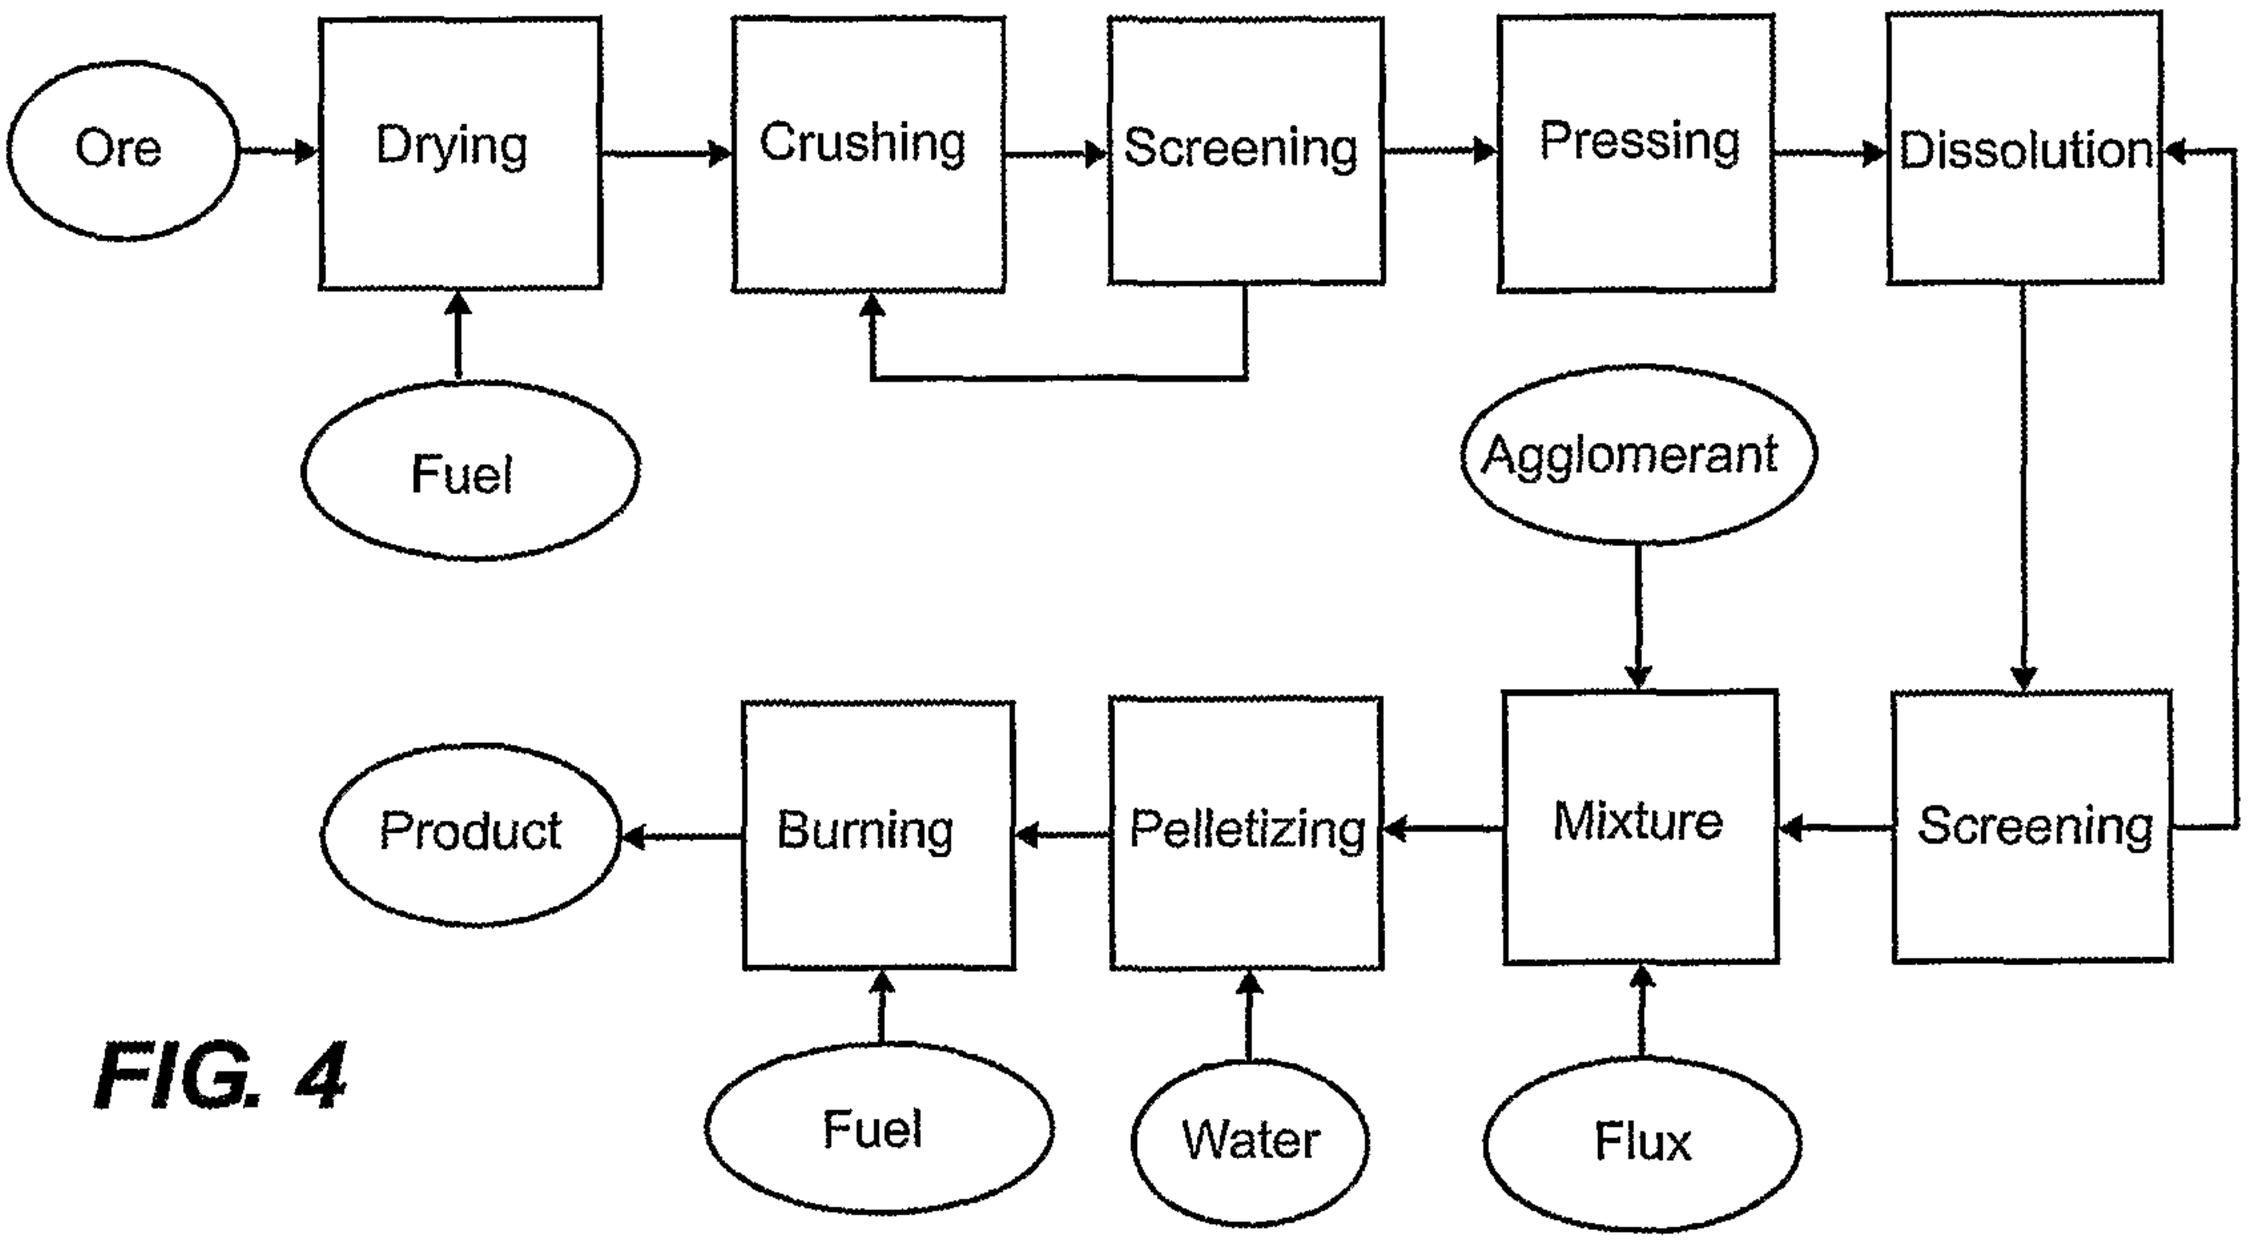

Ore
Drying
Crushing
Screening
Pressing
Dissolution
Fuel
Agglomerant
Product
Burning
Pelletizing
Mixture
Screening
Fuel
Water
Flux

FIG. 4