




(86) Date de dépôt PCT/PCT Filing Date: 2017/03/24
(87) Date publication PCT/PCT Publication Date: 2017/10/26
(45) Date de délivrance/Issue Date: 2021/08/10
(85) Entrée phase nationale/National Entry: 2018/10/15
(86) N° demande PCT/PCT Application No.: DE 2017/100242
(87) N° publication PCT/PCT Publication No.: 2017/182025
(30) Priorité/Priority: 2016/04/22 (DE10 2016 107 531.0)

(51) Cl.Int./Int.Cl. *H02B 1/56* (2006.01),
H05K 7/20 (2006.01)
(72) Inventeurs/Inventors:
CACHO ALONSO, JUAN CARLOS, DE;
IMMEL, MANFRED, DE;
SCHWIETZ, SANDRA, DE;
MESCHKAT, JAN, DE
(73) Propriétaire/Owner:
RITTAL GMBH & CO. KG, DE
(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : ARRANGEMENT D'ARMOIRE DE COMMANDE, COMPRENANT UN DISPOSITIF REFROIDISSEUR QUI EST RECU DANS UN LOGEMENT DE L'ARMOIRE DE COMMANDE
(54) Title: CONTROL CABINET ARRANGEMENT, COMPRISING A COOLING DEVICE WHICH IS RECEIVED IN A CONTROL CABINET HOUSING

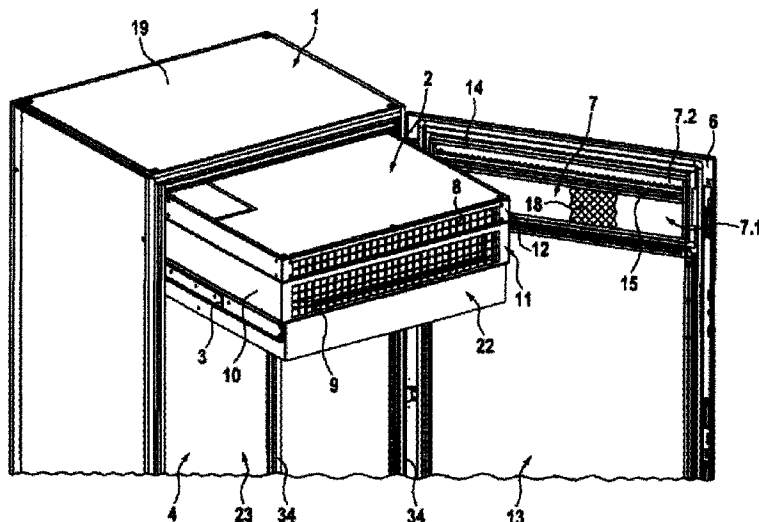

(57) Abrégé/Abstract:

The invention relates to a control cabinet arrangement, comprising a cooling device (2) which is received in a control cabinet housing (1), wherein the cooling device (2) can be slidably held on the control cabinet housing (1) via a linear adjusting unit (3), particularly a bar system, and can be adjusted between a pull-out position and a slide-in position, wherein the cooling device (2) in the slide-in position is completely received in the control cabinet housing (1), and in the pull-out position, the cooling device (2) protrudes at least partially beyond a door side (4) of the control cabinet housing (1) from the control cabinet housing (1), and is characterized in that a door element (6), which closes in its closed position the door side (4) of the control cabinet housing (1), comprises at least one air passage opening (7) which opens into an air outlet (8) and/or an air inlet (9) of the cooling device (2) in the closed position of the door element (6), when the cooling device (2) is in the slide-in position.

Abstract

The invention relates to a control cabinet arrangement, comprising a cooling device (2) which is received in a control cabinet housing (1), wherein the cooling device (2) can be slidably held on the control cabinet housing (1) via a linear adjusting unit (3), particularly a bar system, and can be adjusted between a pull-out position and a slide-in position, wherein the cooling device (2) in the slide-in position is completely received in the control cabinet housing (1), and in the pull-out position, the cooling device (2) protrudes at least partially beyond a door side (4) of the control cabinet housing (1) from the control cabinet housing (1), and is characterized in that a door element (6), which closes in its closed position the door side (4) of the control cabinet housing (1), comprises at least one air passage opening (7) which opens into an air outlet (8) and/or an air inlet (9) of the cooling device (2) in the closed position of the door element (6), when the cooling device (2) is in the slide-in position.

Control cabinet arrangement, comprising a cooling device which is received in a control cabinet housing

The invention relates to a control cabinet arrangement, comprising a cooling device which is received in a control cabinet housing, wherein the cooling device can be slidably held on the control cabinet housing via a linear adjusting unit, particularly a bar system, and can be adjusted between a pull-out position and a slide-in position, wherein the cooling device in the slide-in position is completely received in the control cabinet housing, and in the pull-out position, the cooling device protrudes at least partially beyond a door side of the control cabinet housing from the control cabinet housing.

Such a control cabinet arrangement is known from DE 20 2008 003 516 U1. The cooling device has a Peltier element and can be inserted into the control cabinet housing via bars provided on opposite sidewalls of the control cabinet. For the recooling of the warm side of the Peltier element, an air passage opening is formed on the rear wall of the control cabinet housing which opens into a warm air outlet opening of the Peltier cooling device.

Due to their use of Peltier elements as active cooling agent, the cooling devices known from the prior art are disadvantageous because they only provide comparatively low cooling capacity and thus frequently cannot meet the cooling capacity requirement for many IT applications and applications in the field of power electronics.

The invention thus addresses the problem of developing the known control cabinet arrangement such that it is also applicable in connection with cooling devices of higher performance classes, particularly in connection with refrigerating machines.

This problem is solved by a control cabinet arrangement with the features of claim 1. The dependent claims each relate to advantageous embodiments of the invention.

Accordingly, a door element, which closes in its closed position the door side of the control cabinet housing, comprises at least one air passage opening which opens into an air outlet and/or

an air inlet of the cooling device in the closed position of the door element, when the cooling device is in the slide-in position. The door element can have separate air passage openings, of which a first air passage opening opens into the air outlet and a second air passage opening opens into the air inlet.

Since the air passage opening in the control cabinet arrangement according to the invention is provided on a front-side door element of the control cabinet housing, it is ensured that a sufficient air volume can be provided via the air passage opening for the recooling, for example, of a condenser of a refrigerating machine. In particular, when control cabinet arrangements of the type in question are placed with their rear wall adjacent to a building wall, the air volume supply required for cooling devices of higher performance classes cannot be ensured with the arrangements known from the prior art.

The cooling device can have a cooling device housing with an air inlet side and/or an air outlet side which face the door element and are preferably arranged parallel to said door element, when the door element is in the closed position.

On its door inner side, which faces the cooling device in the closed position, the door element can have a sealing element, particularly a sealing frame, surrounding the air passage opening. Instead of the sealing frame, a foamed or extruded seal can also be provided. The sealing element can be dimensioned such that it seals the door inner side with respect to the border of the air outlet and/or the air inlet of the cooling device, when the door element is in the closed position.

It can further be provided that in the closed position, both the air outlet and the air inlet of the cooling device open into the air passage opening, wherein the air passage opening is designed in two parts with an air inlet opening, which opens into the air inlet of the cooling device, and an air outlet opening, which is fluidically separated from the air inlet opening and opens into the air outlet of the cooling device.

The air inlet opening and the air outlet opening can be fluidically separated from one another by a separator dividing the air passage opening, wherein the separator has a protruding partition,

particularly a brush strip, on the door inner side which faces the cooling device in the closed position of the door element, and so an air short-circuit between air inlet and air outlet is prevented.

In addition, at least the air outlet opening can have an air guide geometry, particularly lamellas, which are designed to guide air escaping from the control cabinet housing via the air outlet opening in a direction facing away from the air inlet opening.

The air passage opening can be an air inlet opening or have such an air inlet opening which, downstream in the air flow direction through the air inlet opening, has an air filter, particularly a filter mat, facing the door inner side of the cooling device in the closed position of the door element. As a result, it can be prevented that the outer circle of the cooling device is contaminated with contaminants from the surroundings of the control cabinet arrangement.

The cooling device can be a horizontal slide-in device which is adjustable in a slide-in plane parallel to a roof side and/or a floor side of the control cabinet housing. Alternatively, the cooling device can be a vertical slide-in device which is adjustable in a slide-in plane parallel to a side wall of the control cabinet.

If the cooling device is a horizontal slide-in device, the cooling device can extend on its front side, which faces the door element, over the entire horizontal clearance of the control cabinet interior. If the cooling device is a vertical slide-in device, the cooling device can extend on its front side, which faces the door element, over the entire clear vertical installation dimension of the control cabinet interior.

In both cases, it can be provided that on its rear side, which faces a rear wall of the control cabinet housing, the cooling device has a bus bar transfer space designed as a horizontal opening through the cooling device. This embodiment is particularly advantageous, when the control cabinet arrangement is a component of a row of control cabinets, in which a multiplicity of control cabinet arrangements and/or control cabinet housings of the type in question form a row of control cabinets that are supplied with electric energy via a bus bar system which extends

between the control cabinet housings through the adjacent sides of the individual control cabinet housings.

If the cooling device is a vertical slide-in device, it can be arranged adjacent to two lateral vertical profiles of a rack of the control cabinet housing, and so a control cabinet interior for receiving electronic components is delimited by a side wall of the cooling device facing away from said vertical profiles.

On the door side, the control cabinet housing can have a double-wing door arrangement, having a first door element, which has the air passage opening, and a second door element, which optionally closes the control cabinet interior, and so with an open first door element and a closed second door element, the cooling device can be adjusted between the slide-in position and the pull-out position. It is therefore ensured that, for example, in case of maintenance of the cooling device, the control cabinet interior fitted with possibly sensitive components does not have to be opened and is thus protected from unauthorized access.

It can further be provided that the vertical slide-in device extends in its depth direction parallel to the slide-in direction in the slide-in position essentially over the entire depth of the control cabinet interior, or at least aligns one front side of the housing of the vertical slide-in device with the door side of the control cabinet housing.

On an outer side of the door element, a device display of the cooling device can be arranged, wherein a connection cable of the device display is guided through the door element and emerges from the door element on a door inner side which faces the cooling device in the closed position of the door element, wherein on its front side facing the door element, the cooling device has a cable box for receiving the connection cable.

The cable box can have a cable entry, through which the connection cable emerging on the door inner side of the door element enters the cooling device, wherein the connection cable is preloaded in the direction of the cable entry. Preferably, the cable entry is arranged on a front side of the cooling device facing the door inner side of the door element. On a rear side facing

away from the cable entry and located in the interior of the cooling device, the cable box can have a cable exit, through which the device cable emerges from the cable box and is guided to a control device of the cooling device.

The door element can be either a control cabinet door pivotably attached by means of hinges to the control cabinet housing, or a door panel mounted on a vertical housing side of the cooling device which faces the door side of the control cabinet housing in the slide-in position, wherein the panel is adjustable perpendicularly, i.e. linearly to the door side.

If the door element is a linearly adjustable door panel, it can be firmly connected to the housing side of the cooling device and have a handle on its outer side facing away from the cooling device, and so the cooling device with the door panel is adjustable between the slide-in position and the pull-out position.

Further details of the invention shall be explained using the following drawings.

- Figure 1 shows the upper part of a control cabinet arrangement according to a first embodiment of the invention, wherein the cooling device is in a pull-out position;
- Figure 2 shows the embodiment according to Figure 1, wherein the cooling device is in the slide-in position;
- Figure 3 shows the embodiment according to Figures 1 and 2, wherein the cooling device is in the closed position;
- Figure 4 shows the embodiment according to Figure 3, wherein the cooling device and a sidewall are removed for better illustration;
- Figure 5 shows a control cabinet arrangement according to a further embodiment of the invention;

- Figure 6 shows the embodiment according to Figure 5 with open door elements;
- Figure 7 shows a detailed view of the depiction according to Figure 6;
- Figure 8 shows an embodiment of a cable box;
- Figure 9 shows a detailed view of the depiction according to Figure 6;
- Figure 10 shows the embodiment according to Figure 6 with the cooling device removed;
- Figure 11 shows a detailed view of the depiction according to Figure 10; and
- Figure 12 shows an embodiment in which the door element is a door panel.

Figure 1 shows an embodiment of the control cabinet arrangement 1 according to the invention, in which the cooling device 2 is designed as a horizontal slide-in device which is arranged in the upper area of the control cabinet interior 23 directly below the roof side 19 of the control cabinet 1 and extends essentially over the entire width of the control cabinet interior 23. The cooling device 2 is shown in its pulled-out position. By comparison, the view according to Figure 3 shows the cooling device 2 in the inserted position. A linear adjusting unit 3 is provided in order to adjust the cooling device 2 back and forth between the two positions shown in Figures 1 and 3.

On a front side 22, the cooling device has an air outlet 8 and an air inlet 9, by means of which the outer circle of the cooling device 2 is fluidically connected to the surroundings of the control cabinet housing 1. The depiction according to Figure 1 does not show the cooling air outlet arranged on the underside of the cooling device, i.e. on the side of the cooling device housing 10 facing the control cabinet interior 23, and the hot air inlet, by means of which the inner circle of the cooling device 2 is fluidically connected to the air in the control cabinet interior 23.

The control cabinet housing 1 has a door element 6 which is hinged to a vertical profile 34. In the

upper area of the door element 6, an air passage opening 7 is formed which is divided by a separator 15 into an air inlet opening 7.1 and an air outlet opening 7.2. As can be seen in the combined view of Figures 1 and 2, the air inlet opening 7, in the closed position of the door element 6 shown in Figure 2, opens into the air inlet 9 of the cooling device 2, and the air outlet opening 7.2 opens into the air outlet 8 of the cooling device 2. The air outlet 8 is formed on an air outlet side 12 of the cooling device 2, and the air inlet 9 is formed on an air inlet side 11 of the cooling device 2, wherein the air inlet side 11 and the air outlet side 12, in the closed position of the door element 6 shown in Figure 3, are arranged parallel to the door inner side 13 of the door element 6.

On the door inner side 13, a sealing element 14 surrounding the air passage opening 7 is formed which bears sealingly against the air inlet side 11 and the air outlet side 12 in the longitudinal position of the door element 6 shown in Figure 2. The sealing element 14 can be, for example, a continuously closed sealing lip.

In order to prevent an air short-circuit between the air inlet opening 7.1 and the air outlet opening 7.2, they are fluidically separated from one another by a separator 15. Furthermore, on the door inner side 13, a partition 16 in the form of a brush strip is arranged, the bristles of which extend perpendicularly to the door inner side 13, and in the closed position according to Figure 3 thus prevent an air short-circuit between the air outlet 8 and the air inlet 9 or between the air inlet opening 7.1 and the air outlet opening 7.2. The air inlet opening 7.1 is covered by the door inner side 13 by means of an air filter 18 in the form of an air-permeable filter mat.

Figure 3 shows that on the air outlet opening 7.2, an air guide geometry 17 is formed, by means of which the air emerging from the air outlet opening 7.2 is guided away from the air inlet opening 7.1.

Figure 4 shows that in the control cabinet interior 23, despite the cooling device (not depicted) installed in the upper area, a mounting plate 5 can extend essentially over the entire height of the control cabinet interior 23. A further mounting plate 5 is arranged upstream of the aforementioned mounting plate 5 in the lower area of the control cabinet interior 23.

Figure 5 shows a further embodiment of the invention, in which the cooling device (not depicted) is designed as a vertical slide-in device. The control cabinet housing 1 has a first door element 6, by means of which the cooling device 2 can be accessed, and a second door element 27, by means of which the control cabinet interior 23 can be accessed. This control cabinet housing also has a rack 34, wherein the cooling device (not depicted) is arranged straight in a left area adjacent to a sidewall 21 of the control cabinet housing 1. Correspondingly, the vertical sidewall of the cooling device (not depicted), which faces away from the sidewall 21 of the control cabinet housing, delimits the control cabinet interior 23.

On the outer side 28, the door element 6 has the air inlet opening 7.1 in the upper area, and the air outlet opening 7.2 in a lower area. In an area lying in between, a device display 29 for operating the cooling device is arranged on the front side 28 of the door element 6.

Figure 6 shows the control cabinet arrangement according to Figure 5, wherein the two door elements 6, 27 are open, and the cooling device 2 and the control cabinet interior 23 are thus accessible. The cooling device 2 is inserted into the control cabinet housing 1 via a linear adjusting unit 3. As can be seen in Figure 10, the linear adjusting unit 3 is essentially formed by two opposite, parallel L-profiles, on which the vertical cooling device 2 can be inserted into the control cabinet housing 1.

Once again, the cooling device 2, correspondingly to the openings 7.1, 7.2 in the door element 6, has an air outlet 8 and an air inlet 9. On the door inner side 13, sealing elements 14 are provided which surround the openings 7.1, 7.2, and so, in the closed position of the door element 6, they sealingly bear against the front side of the cooling device 2 which faces the door element 6, while surrounding the air outlet 8 or the air inlet 9.

It can further be seen that on the door inner side 13, the display 29 protrudes through the door element 6 and has a cable connection, from which a connection cable 30 extends from the device display 29 to a cable box 31 in the front side 22 of the cooling device 2. Via the cable box 31, the connection cable 30 is further guided to control electronics in the interior of the cooling device 2.

In the rear area, the cooling device 2 has in the inserted position shown in Figure 6 a bus bar transfer space 25, and so in the modular situation, in which a plurality of the control cabinet housing 1 shown in Figure 6 and/or further control cabinets form a row of control cabinets, bus bars can be guided through the row of control cabinets without interference by the cooling device 2.

Figure 7 once again shows the connection of the device display in detail. On the door inner side, the device display 29 protrudes through the door element 6 and is connected to a cable box 31 via a connection cable 30. The cable box 31 is designed to receive the cable in the closed position of the door element 6 and to uncover it in the open adjustment position of the door element 6 shown in Figure 7. For that purpose, a preloaded cable drum can be incorporated in the cable box 31.

The cable box 31 is shown in Figure 8. On the front side, it has a cable entry 32, and on the rear side, it has a cable exit 33, through which the connection cable 30 (see Figure 7) can emerge from the cable box 31 in order to be connected to control electronics of the cooling device.

The depiction according to Figure 9 shows the upper area of the embodiment according to Figure 6. A sealing element 14 surrounding the air inlet opening 7.1 is arranged on the door inner side 13 of the door element 6. In addition, on the door inner side 13, an air filter 18 in the form of a filter mat is arranged downstream of the air inlet opening 7.1 in fluid flow direction through the door element 6, said filter mat being surrounded by the sealing element 14. It can be seen that the sealing element 14 has external sealing flanges, with which it sealingly bears against the front side 22 of the cooling device 2, when the door element 6 is in the closed position, and only surrounds the air inlet of the cooling device 2.

In Figure 10, the cooling device 2 is completely removed from the embodiment of the control cabinet housing 1 shown in Figures 5 to 9. As a result, the linear adjusting unit 3 in the form of two opposite L-profiles formed on the floor side of the control cabinet housing 1 can be seen. The L-profiles have fastening seats, and on the floor side, the cooling device has corresponding

thread seats, and so in a defined arrangement between the L-profiles and the cooling device 2, the L-profiles can be screwed together with the cooling device 2.

The combined view of Figures 10 and 11 further shows that the L-profiles only reach two vertical profiles 26 which delimit a control cabinet side, and so the cooling device 2 can be received in a space-saving manner in the control cabinet housing 1 directly adjacent to the left sidewall 21 of the control cabinet housing 1 shown in Figure 10; as a result, a largest possible control cabinet interior 23 remains for receiving electronic components.

Figure 12 shows a control cabinet arrangement which differs from the control cabinet arrangement shown in Figure 6 in that the door element 6, instead of being a door hinged to the control cabinet housing 1, is a door panel 35 which can be adjusted perpendicularly to the door side 4, and which is mounted on a vertical housing side of the cooling device 2 which faces the control cabinet housing 1, when the door side 4 of the control cabinet housing 1 is in the slide-in position. The door panel 35 is firmly connected to the housing side of the cooling device 2, and has a handle 36 on its outer side facing away from the cooling device 2, and so the cooling device 2 with the door panel 35 is adjustable between the slide-in position and the pull-out position. The further door element 27 remains in order to be able to optionally close the control cabinet interior 23. In the depicted pull-out position, the cooling device 2 is not completely removed from the housing and also remains closed in this adjustment position with the closed further door element 27.

The features of the invention disclosed in the above description, in the drawing, and the claims can be essential for the realization of the invention both in isolation and in any combination.

List of reference signs

1	Control cabinet housing	26	Vertical profile
2	Cooling device	27	Further door element
3	Linear adjustment unit	28	Outer side
4	Door side	29	Device display
5	Mounting plate	30	Connection cable
6	Door element	31	Cable box
7	Air passage opening	32	Cable entry
7.1	Air inlet opening	33	Cable exit
7.2	Air outlet opening	34	Rack
8	Air outlet	35	Door panel
9	Air inlet	36	Handle
10	Cooling device housing		
11	Air inlet side		
12	Air outlet side		
13	Door inner side		
14	Sealing element		
15	Separator		
16	Partition		
17	Air guide geometry		
18	Air filter		
19	Roof side		
20	Floor side		
21	Sidewall		
22	Front side		
23	Control cabinet interior		
24	Rear wall		
25	Bus bar transfer space		

Patent claims

1. Control cabinet arrangement, comprising a cooling device (2) which is received in a control cabinet housing (1), wherein the cooling device (2) can be slidably held on the control cabinet housing (1) via a linear adjusting unit (3), particularly a bar system, and can be adjusted between a pull-out position and a slide-in position, wherein the cooling device (2) in the slide-in position is completely received in the control cabinet housing (1), and in the pull-out position, the cooling device (2) protrudes at least partially beyond a door side (4) of the control cabinet housing (1) from the control cabinet housing (1), characterized in that a door element (6), which closes in its closed position the door side (4) of the control cabinet housing (1), comprises at least one air passage opening (7) which opens into at least one of an air outlet (8) and an air inlet (9) of the cooling device (2) at least in the closed position of the door element (6), when the cooling device (2) is in the slide-in position,
wherein the cooling device (2) has a cooling device housing (10) with at least one of an air inlet side (11) and an air outlet side (12) which, at least in the closed position of the door element (6), face and are arranged parallel to the door element (6), and
wherein in the closed position, both the air outlet (8) and the air inlet (9) of the cooling device (2) open into the air passage opening (7), wherein the air passage opening (7) is designed in two parts with an air inlet opening (7.1), which opens into the air inlet (9) of the cooling device (2), and an air outlet opening (7.2), which is fluidically separated from the air inlet opening (7.1) and opens into the air outlet (8) of the cooling device (2).
2. Control cabinet arrangement according to claim 1, in which the door element (6) on its door inner side (13), which faces the cooling device (2) in the closed position, has a sealing element (14), particularly a sealing frame, that surrounds the air passage opening (7).
3. Control cabinet arrangement according to claim 1 or 2, in which the air inlet opening (7.1) and the air outlet opening (7.2) are fluidically separated from one another by a

separator (15) dividing the air passage opening (7), wherein the separator (15) has a protruding partition (16), particularly a brush strip, on the door inner side (13) which faces the cooling device (2) in the closed position of the door element (6), and so an air short-circuit between air inlet (9) and air outlet (8) is prevented.

4. Control cabinet arrangement according to any one of claims 1 to 3, in which at least the air outlet opening (7.2) has an air guide geometry (17), particularly lamellas, which are designed to guide air escaping from the control cabinet housing (1) via the air outlet opening (7.2) in a direction facing away from the air inlet opening (7.1).
5. Control cabinet arrangement according to any one of claims 1 to 4, in which the air passage opening (7) is or has an air inlet opening (7.1) which, downstream in the air flow direction through the air inlet opening, has an air filter (18), particularly a filter mat, facing the door inner side (13) of the cooling device (2) in the closed position of the door element (6).
6. Control cabinet arrangement according to any one of claims 1 to 5, in which the cooling device (2) is a horizontal slide-in device which is adjustable in a slide-in plane parallel to at least one of a roof side (19) and a floor side (20) of the control cabinet housing (1), or in which the cooling device (2) is a vertical slide-in device which is adjustable in a slide-in plane parallel to a side wall (21) of the control cabinet.
7. Control cabinet arrangement according to claim 6, in which the cooling device (2),
 - a) if it is a horizontal slide-in device, extends on its front side (22), which faces the door element (6), over the entire horizontal clearance of the control cabinet interior (23), and
 - b) if it is a vertical slide-in device, extends on its front side (22), which faces the door element (6), over the entire clear vertical installation dimension of the control cabinet interior (23),wherein on its rear side, which faces a rear wall (24) of the control cabinet housing (1), the cooling device (2) has a bus bar transfer space (25) designed as a horizontal opening

through the cooling device (2).

8. Control cabinet arrangement according to any one of claims 1 to 7, in which the cooling device (2) is a vertical slide-in device and arranged adjacent to two lateral vertical profiles (26) of a rack of the control cabinet housing (1), and so a control cabinet interior (23) for receiving electronic components is delimited by a side wall of the cooling device (2) facing away from said vertical profiles (26).
9. Control cabinet arrangement according to claim 8, in which, on the door side, the control cabinet housing (2) has a double-wing door arrangement, having a first door element (6), which has the air passage opening (7), and a second door element (27), which selectively closes or uncovers the control cabinet interior (23), and so with an open first door element (6) and a closed second door element (27), the cooling device (2) can be adjusted between the slide-in position and the pull-out position.
10. Control cabinet arrangement according to any one of claims 1 to 9, in which on an outer side (28) of the door element (6), a device display (29) of the cooling device (2) is arranged, wherein a connection cable (30) of the device display (29) is guided through the door element (6) and emerges from the door element (6) on a door inner side (13) which faces the cooling device (2) in the closed position of the door element (6), wherein on its front side (22) facing the door element (6), the cooling device (2) has a cable box (31) for receiving the connection cable (30).
11. Control cabinet arrangement according to claim 10, in which the cable box (31) has a cable entry (32), through which the connection cable (30) emerging on the door inner side (13) of the door element (6) enters the cooling device (2), wherein the connection cable (30) is preloaded in the direction of the cable entry (32).
12. Control cabinet arrangement according to any one of claims 1 to 11, in which the door element (6) is either a control cabinet door pivotably attached by means of hinges to the control cabinet housing (1), or a door panel (35) mounted on a vertical housing side of

the cooling device (2) which faces the door side (4) of the control cabinet housing (1) in the slide-in position, and which is adjustable perpendicularly to the door side (4).

13. Control cabinet arrangement according to claim 12, in which the door panel (35) is firmly connected to the housing side of the cooling device (2) and has a handle on its outer side facing away from the cooling device (2), and so the cooling device (2) with the door panel (35) is adjustable between the slide-in position and the pull-out position.
14. Control cabinet arrangement, comprising a cooling device (2) which is received in a control cabinet housing (1), wherein the cooling device (2) can be slidably held on the control cabinet housing (1) via a linear adjusting unit (3), particularly a bar system, and can be adjusted between a pull-out position and a slide-in position, wherein the cooling device (2) in the slide-in position is completely received in the control cabinet housing (1), and in the pull-out position, the cooling device (2) protrudes at least partially beyond a door side (4) of the control cabinet housing (1) from the control cabinet housing (1), characterized in that a door element (6), which closes in its closed position the door side (4) of the control cabinet housing (1), comprises at least one air passage opening (7) which opens into at least one of an air outlet (8) and an air inlet (9) of the cooling device (2) at least in the closed position of the door element (6), when the cooling device (2) is in the slide-in position,
wherein the cooling device (2) is a vertical slide-in device and arranged adjacent to two lateral vertical profiles (26) of a rack of the control cabinet housing (1), and so a control cabinet interior (23) for receiving electronic components is delimited by a side wall of the cooling device (2) facing away from said vertical profiles (26), and
wherein in the closed position, both the air outlet (8) and the air inlet (9) of the cooling device (2) open into the air passage opening (7), wherein the air passage opening (7) is designed in two parts with an air inlet opening (7.1), which opens into the air inlet (9) of the cooling device (2), and an air outlet opening (7.2), which is fluidically separated from the air inlet opening (7.1) and opens into the air outlet (8) of the cooling device (2).

#2165173

1 / 11

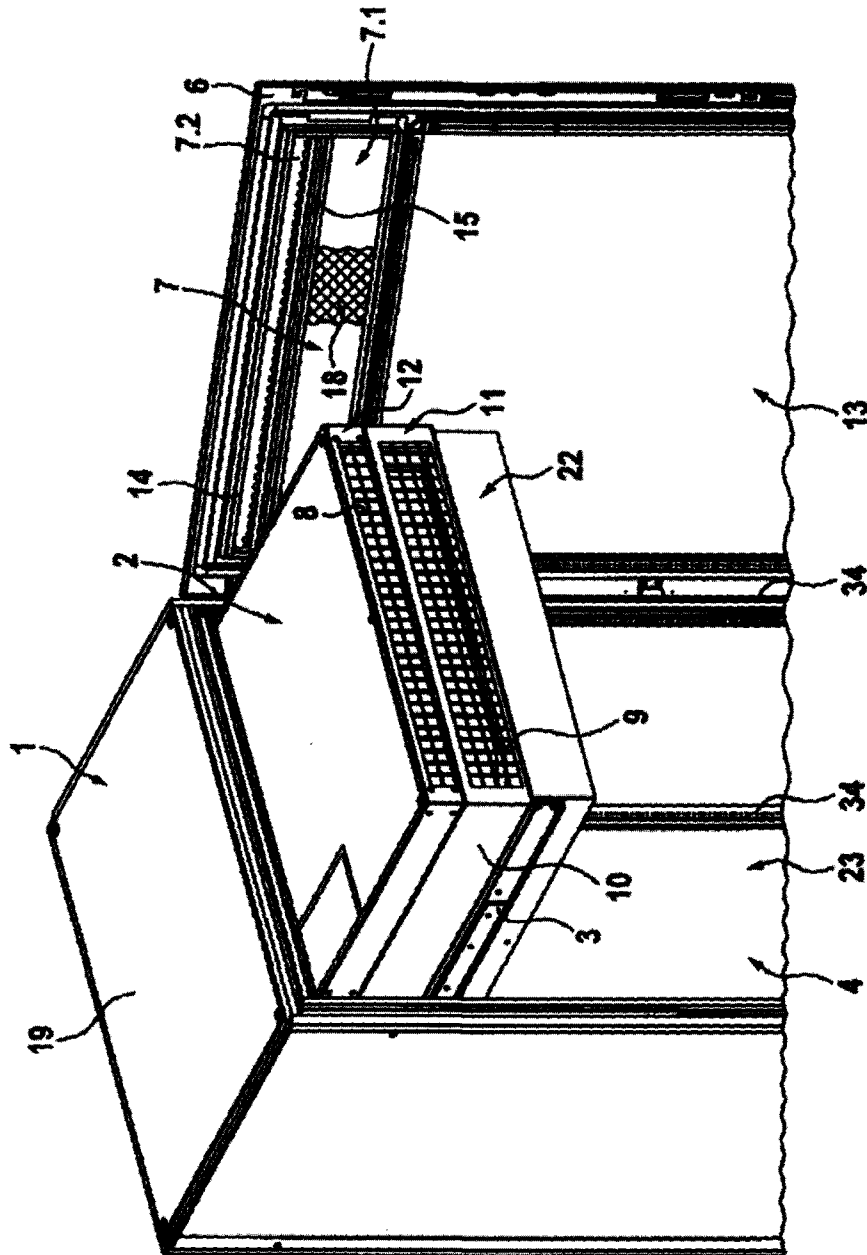


Fig. 1

Replacement sheet

2/11

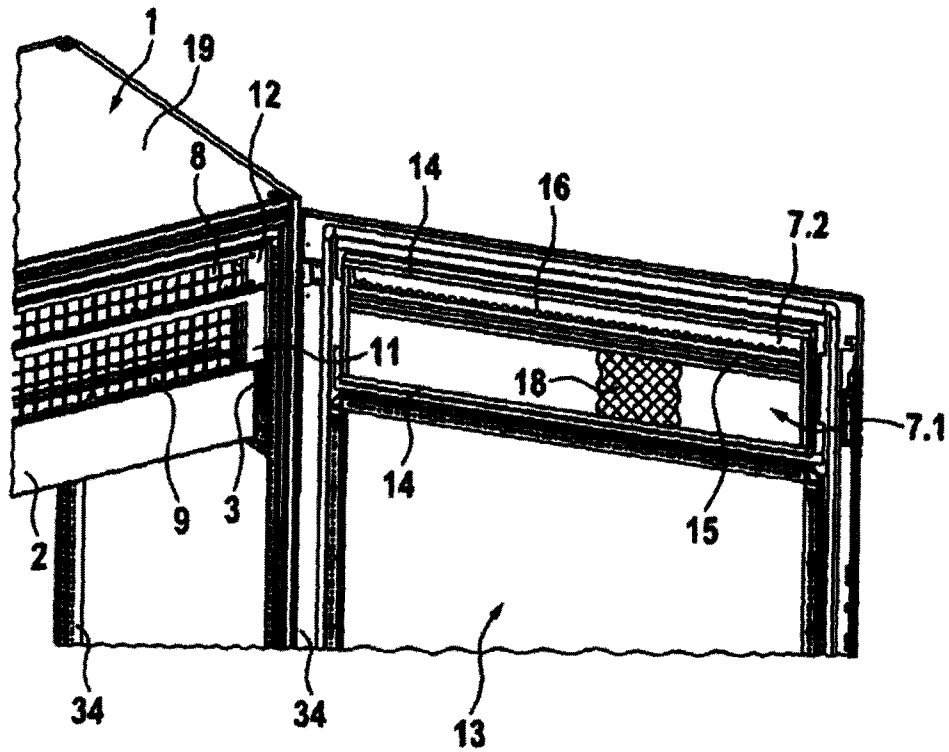


Fig. 2

Replacement sheet

4 / 11

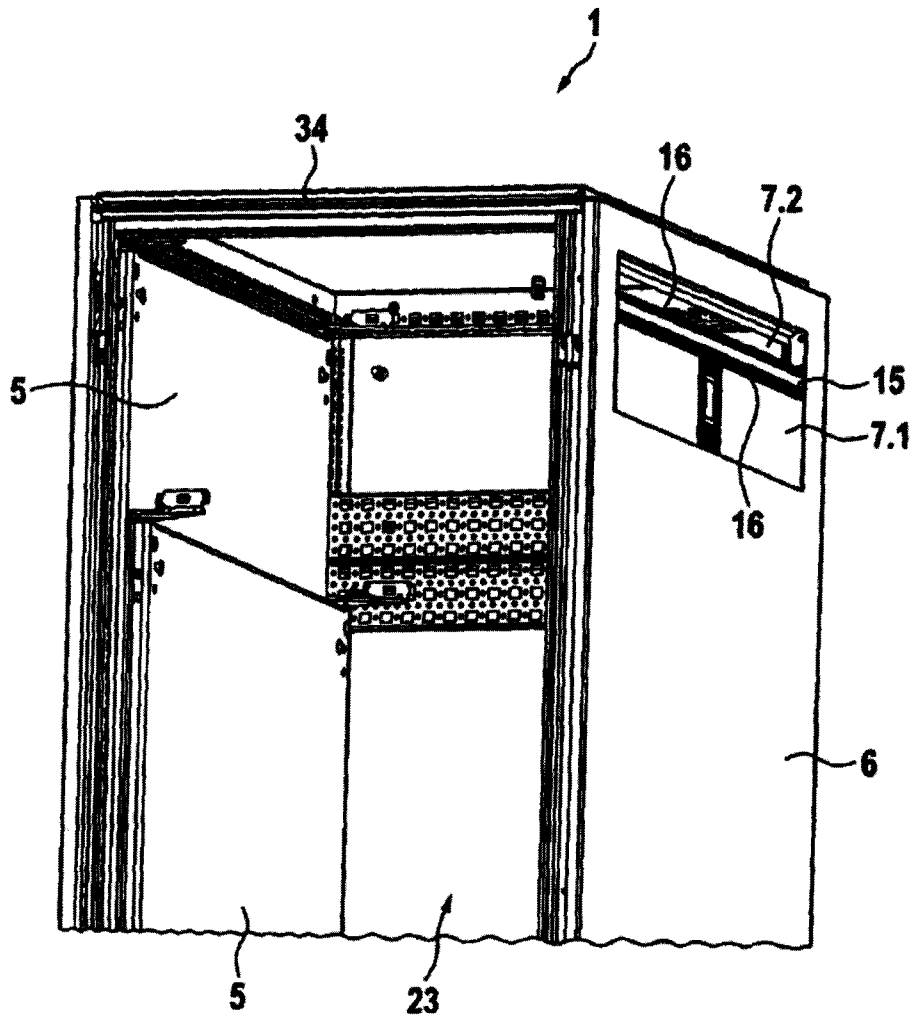


Fig. 4

Replacement sheet

5/11

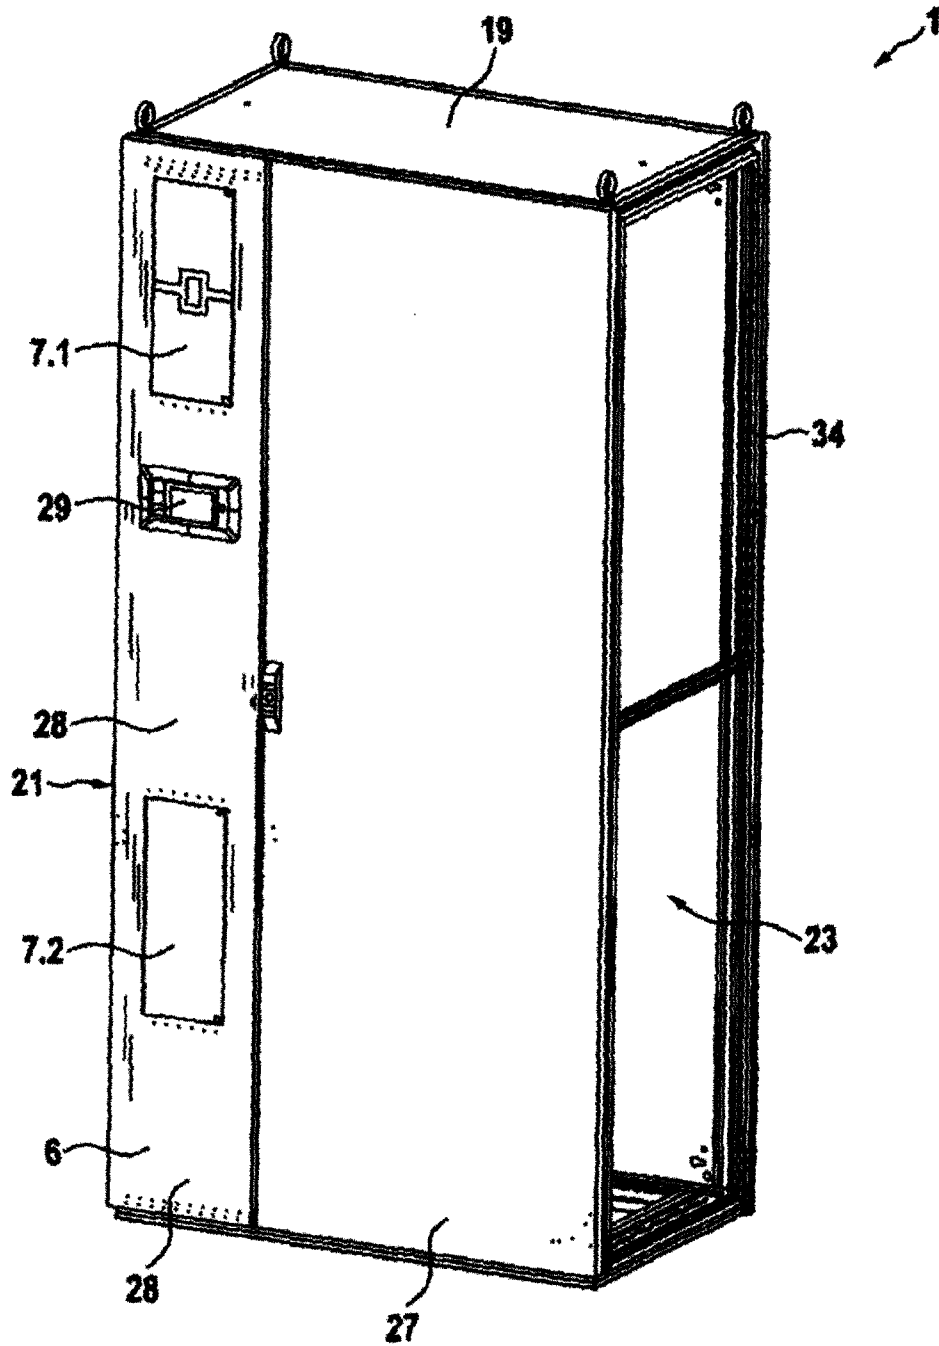


Fig. 5

Replacement sheet

6/11

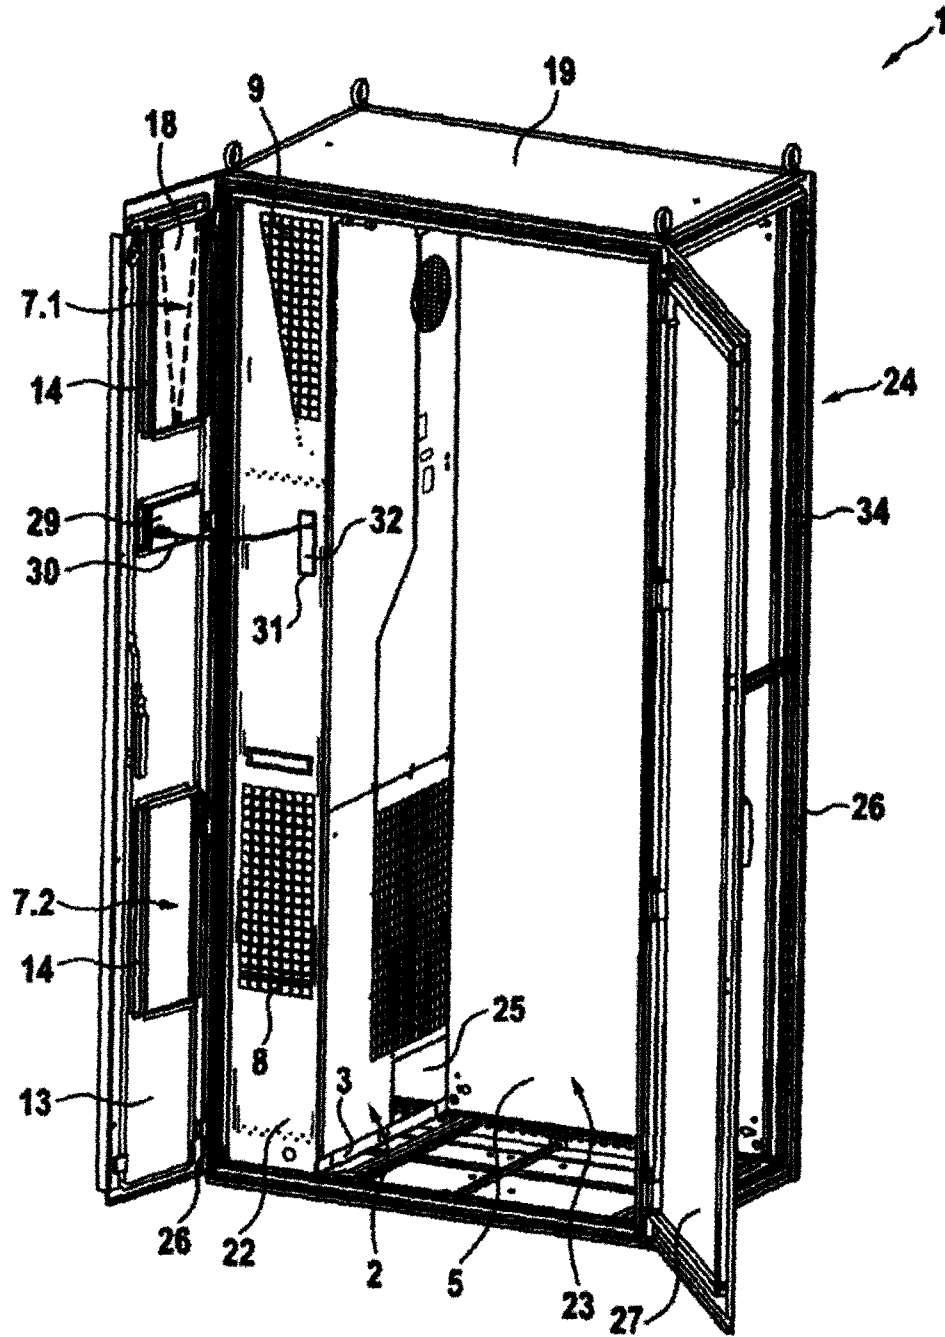


Fig. 6

Replacement sheet

7/11

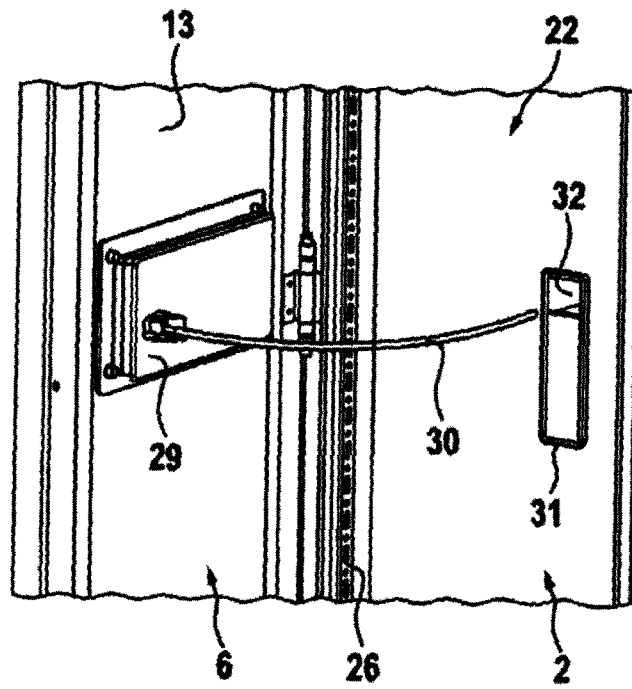


Fig. 7

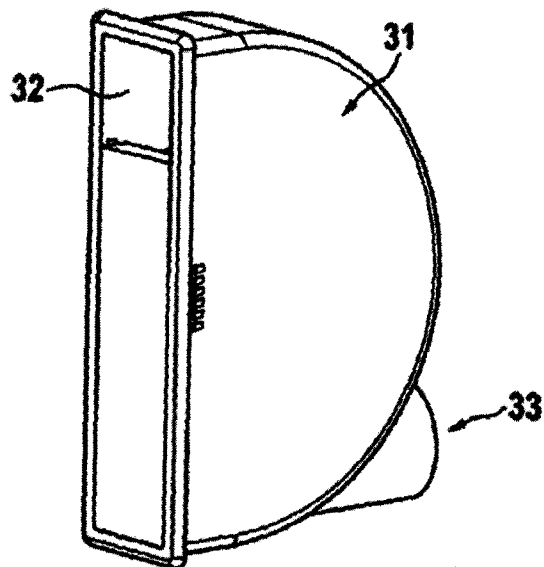


Fig. 8

Replacement sheet

8 / 11

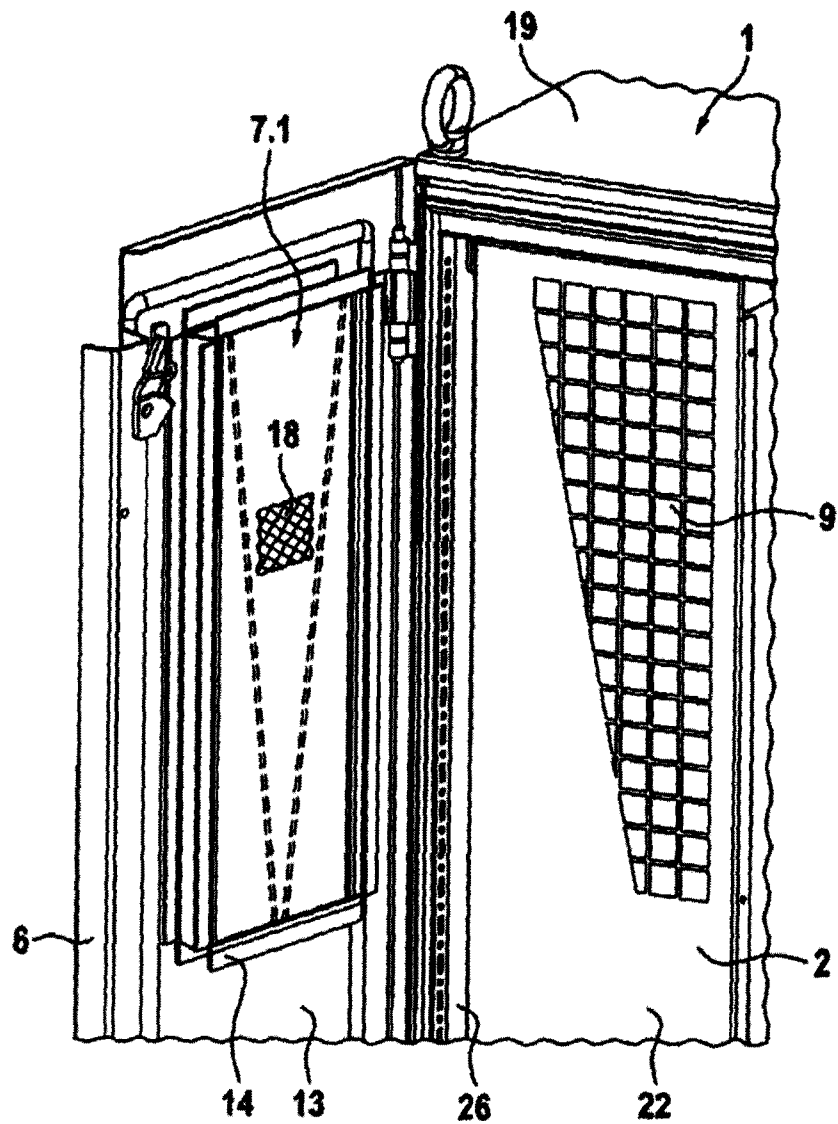


Fig. 9

Replacement sheet

9 / 11

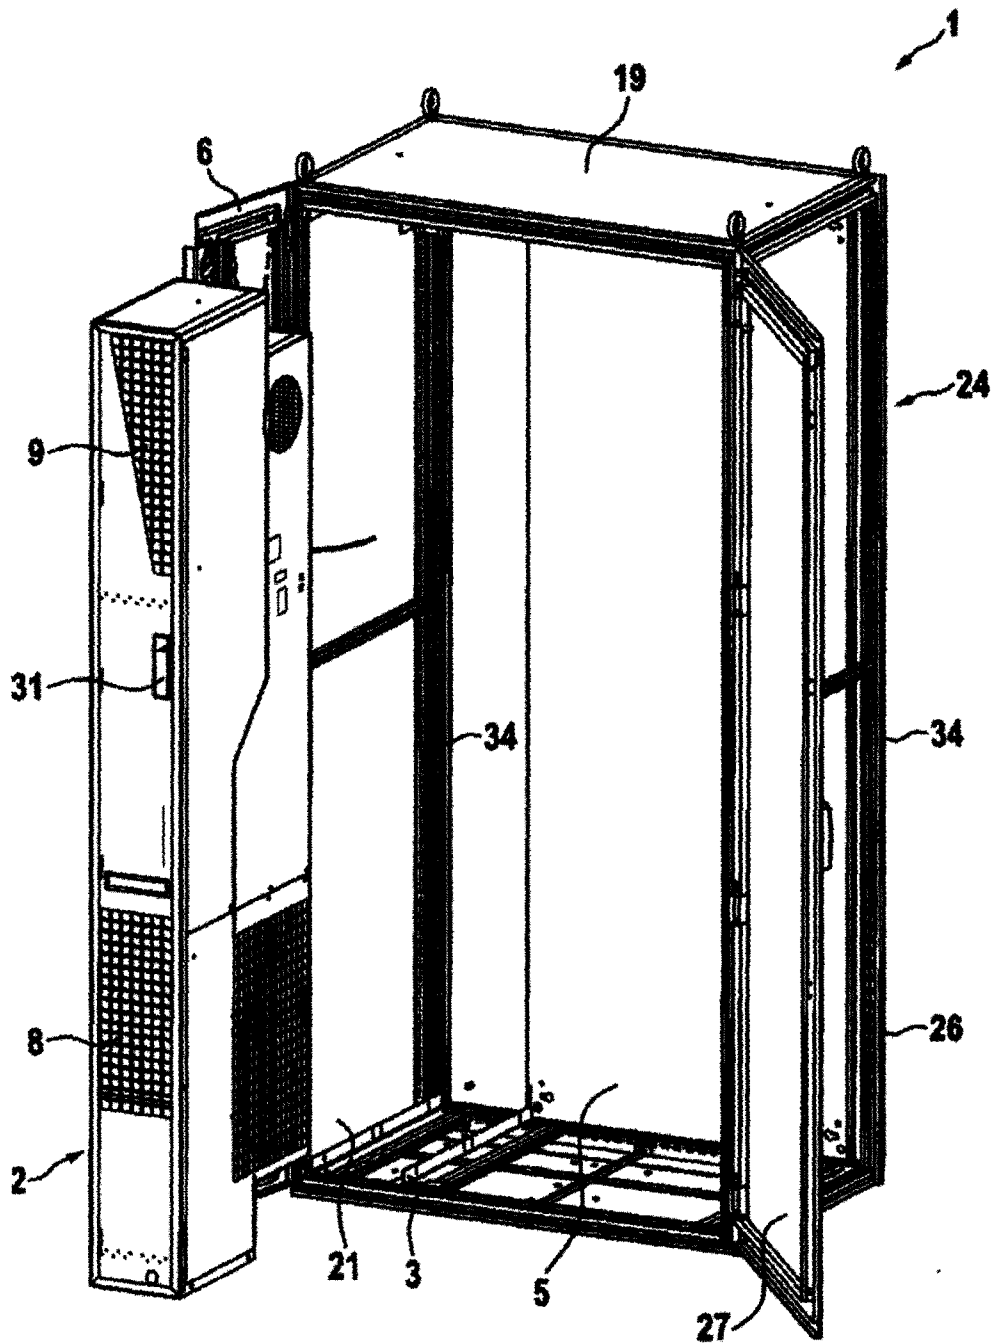


Fig. 10

Replacement sheet

10 / 11

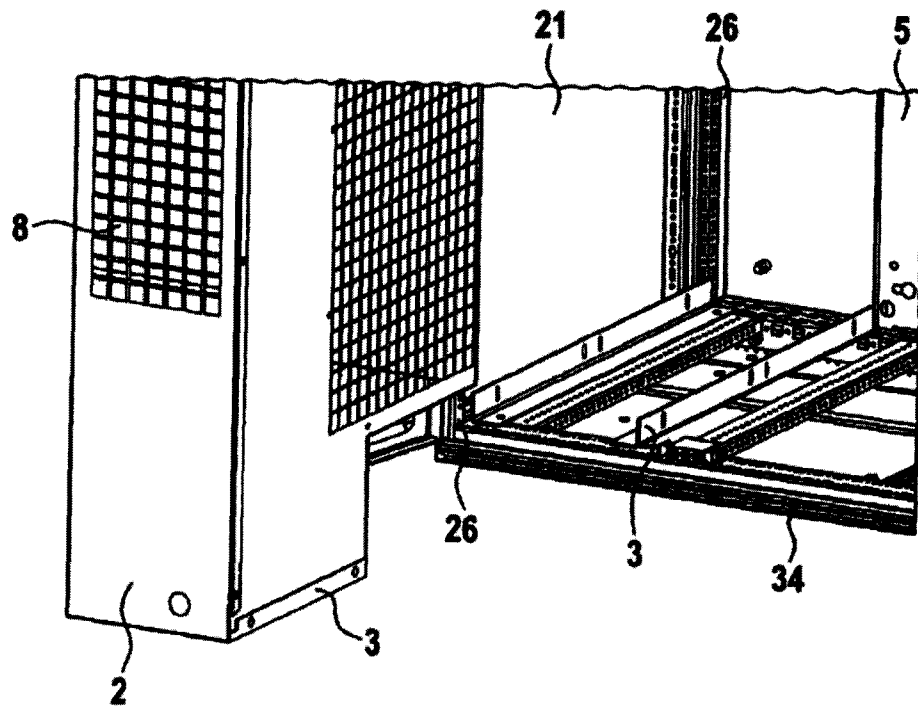


Fig. 11

Replacement sheet

11 / 11

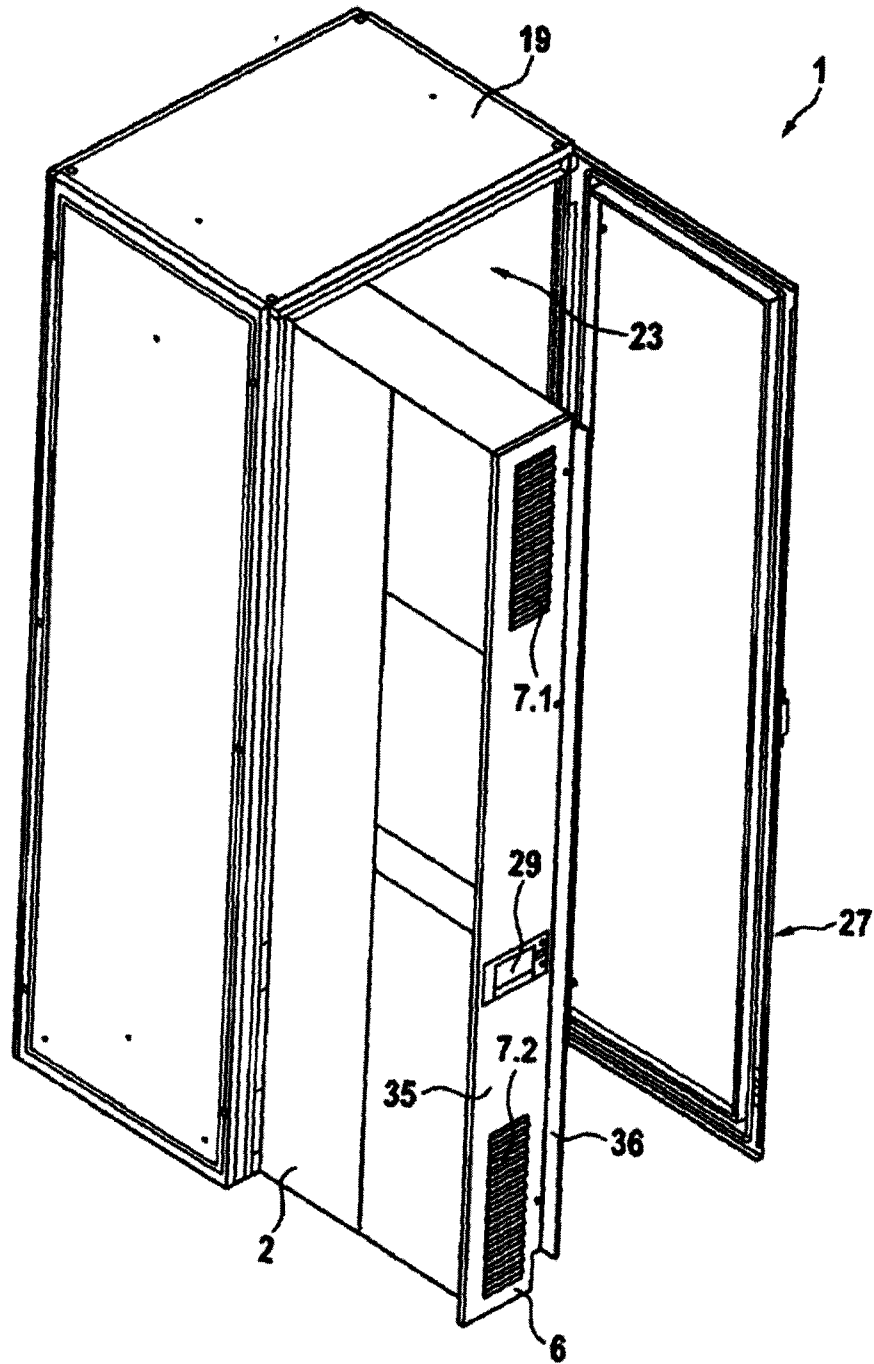


Fig. 12

Replacement sheet

