



- (51) International Patent Classification:  
*F02M 25/08* (2006.01)
- (21) International Application Number:  
PCT/IB2016/056992
- (22) International Filing Date:  
21 November 2016 (21.11.2016)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (30) Priority Data:  
102015000075515  
23 November 2015 (23.11.2015) IT
- (71) Applicant: FCA ITALY S.P.A. [IT/IT]; corso Giovanni Agnelli 200, I-10135 Torino (IT).
- (72) Inventors: SPADA, Luigi; c/o FCA Italy S.p.A., corso Giovanni Agnelli 200, I-10135 Torino (IT). SALVI, Giovanni; c/o FCA Italy S.p.A., corso Giovanni Agnelli 200, I-10135 Torino (IT).
- (74) Agent: NOTARO, Giancarlo; Buzzi, Notaro & Antonielli d'Oulx, via Maria Vittoria 18, I-10123 Torino (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

- (54) Title: CANISTER FOR A FUEL TANK OF A VEHICLE

FIG. 4

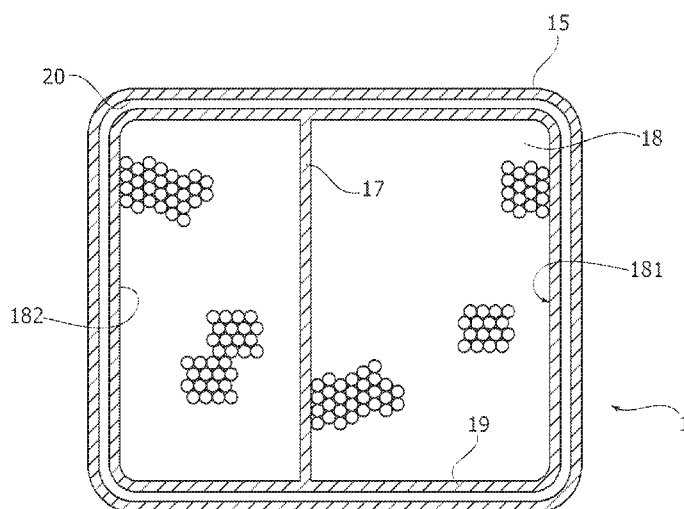

(57) Abstract: A canister (1) for absorption of fuel vapours from a fuel tank (3) of a motor-vehicle, comprises a hollow body defining at least one chamber (180) containing absorbent material (18) of fuel vapours, a first opening (4) for communication with a vent conduit (2) of the tank (3), a second opening (5) vented towards the atmosphere, and a third opening (6) for communication with a conduit (7) connected to the intake manifold (11) of the internal combustion engine (10) of the motor-vehicle. The body of the canister has an outer side wall (15) and an inner side wall (19) which are parallel to and spaced apart from each other, and which define therebetween a thermally insulating interspace which extends continuously for the whole circumferential extension of the outer side wall (15) of the canister, whereby said thermally insulating interspace surrounds said at least one internal chamber (180) and promotes saving of heat generated inside said at least one internal chamber (180) in the aforementioned absorption operating mode, during an inoperative stage of the engine, so as to improve scavenging efficiency of the canister (1) during a subsequent stage wherein the scavenging operating mode is

activated, when the engine is operative.

## CANISTER FOR A FUEL TANK OF A VEHICLE

\*\*\*

Field of the invention

The present invention relates to systems for fuel supply to a motor-  
5 vehicle engine, of the type in which a fuel tank is provided with a vent  
conduit connected to a device named "canister", which is arranged outside  
the tank, and is provided of a filter (for example with active carbons) for  
absorption of fuel vapours which are in the tank and in the vent conduit, in  
order to avoid that these vapours are released into the atmosphere. The  
10 canister has a first operative mode, named "absorption", which is actuated  
when the engine is inoperative, wherein fuel vapours generated within the  
tank are absorbed by the active carbon filter, and the canister has a  
second operative mode, named "scavenging", which is actuated when the  
engine is operative, wherein a flow of fresh air is sucked into the intake  
15 manifold of the engine of the motor-vehicle, so that the flow of air passes  
through the active carbon filter of the canister, thus obtaining scavenging  
of the active carbon filter.

In particular, the invention relates to a canister of the type  
comprising a hollow body having at least a top wall, a lower wall and a  
20 side wall which connects said top wall to said lower wall on all sides of the  
body of the canister, so as to define at least one internal chamber,

wherein said at least one internal chamber contains absorbent  
material of fuel vapours, and

wherein said hollow body of the canister has a first opening for  
25 communication with a vent conduit of the tank, a second opening vented  
towards the atmosphere, and a third opening for communication with a  
duct, connected to the intake manifold of the internal combustion engine  
of the motor-vehicle,

in such a way that, when the internal combustion engine is  
30 inoperative, any fuel vapour generated within the tank of the motor-vehicle  
is absorbed by said absorbent material in said at least one internal  
chamber of the canister, in an absorption operating mode of the canister,  
while when the internal combustion engine is operative, said canister is in  
a scavenging operating mode, wherein a flow of air taken from the  
35 atmosphere is sucked into the chamber of the canister and conveyed

through the absorbent material and into the duct connected to the intake manifold of the internal combustion engine, thus obtaining scavenging of the absorbent material and removal and conveyance into the engine of the fuel particles previously absorbed by the absorbent material.

5           Prior art

Canister of the type indicated above are for example known from documents WO 2015/104813 A1, US 6 474 312 B1, US 2014/041522 A1, EP 1 113 163 A2, US 2008/251139 A1, US 4 381 929 A, US 2011/247592 A1.

10           In the past, control systems of fuel vapours of the type indicated above has been proposed, in which is provided a device adapted to heat active carbons provided into the canister considering that scavenging stage of the canister is more effective if the active carbon filter is maintained at high temperature.

15           A solution of the type indicated above is for example known from document EP 2 740 925 A2 on behalf of Delphi Technologies. In this solution, a system is provided for transferring heat inside the canister in order to maintain the active carbon filter at higher temperature and in order to make more effective scavenging stage of the canister. As a matter of fact, the system described above comprises also a heater cartridge (containing an electric resistor) arranged at least partially into the canister and located in direct contact with the active carbon filter so as to transfer heat. This solution has the drawback of a canister with higher complexity and higher cost, and also an additional energy expenditure for energy supply of the heater.

20           Purpose of the invention

The purpose of the present invention is to provide a canister which is adapted to obtain high efficiency of scavenging stage, with simple and low cost means.

30           Summary of the invention

In view to achieve this purpose, the invention has for subject a canister having the features which has been indicated at the beginning of the present description and also characterized in that the body of said canister has an outer side wall and an inner side wall which are parallel to, and spaced apart from each other, and which define therebetween a

thermally insulating interspace which extends continuously for the entire circumferential extension of the outer side wall of the canister, on all sides of the canister body, with exception of the upper side and the lower side, whereby said thermally insulating interspace surrounds said at least one  
5 internal chamber and promotes saving of heat generated inside said at least one internal chamber in said absorption operating mode, during an inoperative stage of the engine, so as to improve scavenging efficiency during a subsequent stage wherein the scavenging operating mode is activated, when the engine is operative.

10 In a specific embodiment, the aforementioned interspace defines an empty space, while in a variant the interspace is filled with an insulating material so as to further improve thermal insulation.

Due to the invention it is possible to reduce quantity of absorbent material located into the canister comparing conventional solutions and  
15 also to reduce volume of sucked air needed for functioning of the absorbent material.

#### Detailed description of further embodiments

Further features and advantages of the invention will become apparent from the following description with reference to the annexed  
20 features, given purely by way of non limiting example, in which:

- figure 1 is a diagrammatic view which shows a fuel supply system for a motor-vehicle engine, with a canister provided according prior art,

- figure 2 is a cross-section top view of a canister according prior art,

25 - figure 3 is a cross-section top view of a canister according to a preferred embodiment of the invention,

- figure 4 is a cross-section view according line IV-IV of figure 3,

- figures 5-7 are variants of figure 3 which show alternative embodiments of the invention.

30 Figure 1 shows a diagrammatic view of a fuel supply system for a motor-vehicle engine comprising a canister 1. With reference also to figure 2 which shows a canister according prior art, the canister 1 has a hollow body containing a certain quantity of absorbent material 18 for absorption of fuel vapours from a fuel tank 3. The canister 1 has a first  
35 opening 4 constituting a vent port of the tank, wherein said first opening 4

is located in communication with the tank 3 by means of a vent conduit 2. Furthermore, the canister 1 has a second opening 5 vented towards the atmosphere by means of a passage in which is interposed an air filter 12 provided with expanded plastic material or paper and having function of protecting the canister from impurity during scavenging stages of the canister (as described in the following). Furthermore, the canister 1 has a third opening 6 constituting a scavenging port which communicates with a conduit 7 connected to the intake manifold 11 of the internal combustion engine 10 of the motor-vehicle. The communication between the canister 1 and the intake manifold 11 is controlled by a valve 9 controlled by an electronic control unit herein not illustrated.

Again according figure 1, the fuel tank 3 is in communication with the internal combustion engine 10 by means of a supply line 13 and a fuel pump 13A. According prior art, the line 13 supplies fuel to fuel injectors associated to the engine cylinders. Details relative to the injectors associated to the internal combustion engine receiving fuel by means of the line 13 are not herein illustrated, because they are not part of the scope of the present invention. Furthermore, the elimination of these details from drawings renders the latter simpler and easier to understand.

Figure 1 shows also a conduit 8 for filling the tank associated with a recirculation conduit 8A which is connected with the tank by means of a valve 8B which allows flowing of liquid fuel and vapours only towards the tank. Again in a known operative mode, the communication of the vent conduit 2 with the tank is controlled by a valve 2a which allows fuel vapours formed in the tank 3 to flow towards the canister 1 to the line 2, while preventing flowing of liquid fuel.

Figure 2 shows a cross-section top view of a canister according prior art. The body of the canister has a top wall 14 having the openings 4, 5, 6 previously described, a lower wall 16 and a side wall 15 which connects the top wall 14 and the lower wall 16 on all sides of the canister body. Consequently, the canister 1 is constituted by a hollow body which defines a chamber 180 containing a certain quantity of absorbent material 18 of fuel vapours generated by the fuel into the tank. Usually, the absorbent material 18 used is active carbon. Again as illustrated in figure 2, inside the canister 1 there is an internal baffle 17 which defines a first

and a second sub-chamber 181, 182 both containing absorbent material 18 and intended to be traversed in series by the fuel vapours. The aforementioned details related to the structure of the canister according prior art are important, considering that for these aspects the canister of  
5 the invention has same features, as will be illustrated in the following. However, as well as it will be explained below, in the canister according the invention the number of sub-chambers and the way in which they are arranged inside the canister can widely vary to what is illustrated in figure 2. In particular, it will be possible to provide a plurality of internal baffles  
10 defining a serpentine path of the fuel vapours towards a plurality of sub-chambers arranged in series and containing absorbent material.

As known, functioning of the canister 1 provides a first operating mode, absorption mode, which is actuated during stops of the internal combustion engine of the motor-vehicle. In this condition, fuel vapours  
15 generated into the tank 3 pass through the vent conduit 2, enter in the first opening 4, pass through the absorbent material 18 according a U path defined by the baffle 17 and in the end go out from the port 5. As a consequence of this process, only clean air is released from the port 5 towards the atmosphere because fuel vapours are retained into the  
20 absorbent material 18. As also known, the canister 1 provides a second operative mode, scavenging mode, which is actuated when the internal combustion engine is operative. In this condition, a flow of fresh air is constrained to pass through the canister 1 and to reach the intake manifold 11 of the engine due to the sucked effect generated by the  
25 engine cylinders. This flow of fresh air enters in the canister through the port 5 and is conveyed through the U path inside the canister and through the absorbent material 18 contained therein, up to reach a port 6 from which the flow of fresh air passes in the line 7 and in the intake manifold 11 of the engine. In this way it is obtained a "scavenging" of the absorbent  
30 material 18 with removal and conveyance of the fuel particles in the engine previously retained during the absorption stage.

Further according to figure 2, inside the canister 1 is defined a third sub-chamber 183 which is void of absorbent material 18. This third sub-chamber is arranged in series between the first and the second sub-chamber 181, 182 containing the absorbent material 18 and the third sub-  
35 chamber 183.

chamber 183 is formed inside the canister 1 since the absorbent material 18 is backed on a supporting elastic element, herein not illustrated, which is arranged with a distance from the lower wall 16. The supporting elastic element can be constituted of expanded plastic material or felt or grids supported by springs so as to guarantee constant compression of the absorbent material.

An embodiment of the present invention is illustrated in figures 3, 4. In these figures, parts in common to what is illustrated in figure 2 are indicated by the same reference numbers.

With reference to figures 3, 4, a fundamental characteristic of the canister 1 according to the invention is that the body of the canister comprises an inner side wall 19 which extends continuously around all sides of the chamber 180, with the three sub-chambers 181, 182, 183, and the inner side wall 19 and the outer side wall 15 are parallel to and spaced apart from each other, so as defining an interspace 20 which extends continuously for the whole circumferential extension of the side wall of the canister body 1, on all sides of the canister body, with the exception of the upper side and the lower side, as clearly understandable in the cross-section top view of figure 4, so as to surround the internal chamber 180. The walls 15 and 19 can be constituted by separated elements or can be provided in a single piece. In a variant it is possible to provide an interspace 20 which extends also at least partially on the upper side and/or the lower side of the canister body.

In the case of the solution of figures 3, 4, the interspace 20 defines an empty space between the inner wall 19 and the outer side wall 15 wherein the empty space acts as thermal mass capable of thermally isolating the absorbent material 18 inside the canister 1.

Figure 5 shows a cross-section view in an alternative embodiment of the invention wherein the inner wall 19 surrounding the chamber 180 let free an opening adjacent to the lower wall 16 of the canister 1, for the whole circumferential extension of the side wall of the canister or for portions thereof. Consequently, in the embodiment herein illustrated, the interspace 20 is in communication with the chamber 180 inside the canister 1.

The embodiment illustrated in figure 3 wherein the interspace 20 is not in communication with the chamber 180 is more effective of the embodiment illustrating in figure 5, from the point of view of the thermal insulation of the absorbent material 18. The solution shown in figure 5  
5 wherein the interspace 20 is in communication with the chamber 180 has the advantage to guarantee a manufacturing process of the canister more simple and economical and has the advantage to create an added volume in communication with the third sub-chamber 183: in this way, emissions of fuel vapours are limited with the motor-vehicle engine inoperative, since  
10 the volume that particles of hydrocarbons contained in fuel vapours have to saturate before being released into the atmosphere increases.

In figures 6, 7 two alternative embodiments of the inventions are shown wherein in both the embodiments the interspace 20 is filled with an insulating material 21, such as expanded plastic material, in order to  
15 further improve the insulating effect. In figure 6 the inner wall 19 surrounding the chamber 180 let free an opening adjacent to the lower wall 16 of the canister 1 (as in the case of figure 5). As in the embodiment of figure 3 without insulating material 21, in a further embodiment shown in figure 7, the interspace 20 filled with the insulating material 21 is instead  
20 completely isolated from the three sub-chambers 181, 182, 183 inside the canister 1.

Due to the interspace 20, the heat produced from the chemical reaction whereby the fuel vapours are absorbed by the canister 1 is retained by the interspace 20. During the scavenging stage previously  
25 described, the absorbent material 18 is so maintained with higher temperature and the scavenging stage results particularly effective. This result is achieved without prejudice advantages of a simple and low-cost production of the canister.

Naturally, while the principle of the invention remains the same, the  
30 details of construction and the embodiments may widely vary with respect to what has been described and illustrated purely by way of example, without departing from the scope of the present invention.



## CLAIMS

1. Filtering canister (1), for absorption of fuel vapours from a fuel tank (3) of a motor-vehicle,

5 wherein said canister (1) comprises a hollow body having at least a top wall (14), a lower wall (16) and a side wall (15) which connects said top wall to said lower wall (14,16) on all sides of the body of the canister (1), so as to define at least one internal chamber (180),

10 wherein said at least one internal chamber (180) contains absorbent material (18) of fuel vapours, and

15 wherein said hollow body of the canister (1) has a first opening (4) for communication of said at least one internal chamber (180) with a vent conduit (2) of the tank (3), a second opening (5) vented towards the atmosphere, and a third opening (6) for communication with a duct (7) connected to the intake manifold (11) of the internal combustion engine (10) of the motor-vehicle,

20 in such a way that, when the internal combustion engine (10) is inoperative, any fuel vapour generated within the tank (3) of the motor-vehicle is absorbed by said absorbent material (18) in said at least one internal chamber (180) of the canister (1), in an absorption operating mode of the canister, while when the internal combustion engine (10) is operative, said canister (1) is in a scavenging operating mode, wherein a flow of air taken from the atmosphere is sucked into the chamber (180) of the canister (1) and conveyed through the absorbent material (18) and into the duct (7) connected to the intake manifold (11) of the internal combustion engine (10), thus obtaining scavenging of the absorbent material (18) and removal and conveyance into the engine (10) of the fuel particles previously absorbed by the absorbent material (18),

25 characterized in that the body of said canister (1) has an outer side wall (15) and an inner side wall (19) which are parallel to, and spaced apart from each other, and which define therebetween a thermally insulating interspace (20) which extends continuously for the entire circumferential extension of the outer side wall (15) of the canister, on all sides of the canister body, with exception of the upper side and the lower side, whereby said thermally insulating interspace surrounds said at least

30

35

one internal chamber (180) and promotes saving of heat generated inside said at least one internal chamber (180) in said absorption operating mode, during an inoperative stage of the engine, so as to improve scavenging efficiency during a subsequent stage wherein the scavenging operating mode is activated, when the engine is operative.

2. Canister according to claim 1, characterized in that said insulating interspace (20) is an empty space.

3. Canister according to claim 2, characterized in that said insulating interspace (20) is filled with a thermally insulating material (21).

4. Canister according to claim 3 or 4, characterized in that said inner side wall (19) surrounding the chamber (180) defines a free opening adjacent to the lower wall (16) of the canister, in such a way that said interspace (20) is in communication with said at least one internal chamber (180) inside the canister (1).

5. Canister according to claim 1, characterized in that the interspace (20) extends also at least partially on the upper side and/or the lower side of the canister body.

6. Canister according to claim 1, characterized in that said at least one internal chamber (180) containing absorbent material (18) for adsorbing fuel vapours has an internal baffle (17) which defines a U-shaped path for the fuel vapours, wherein said internal baffle (17) defines a first and a second sub-chamber (181, 182) containing absorbent material (18), said first and second sub-chambers (181, 182) being arranged in series to each other.

7. Canister according to claim 5, characterized in that between said first and second sub-chamber (181, 182), a third sub-chamber (183) is interposed which does not contain absorbent material.

8. Canister according to claim 1, characterized in that said at least one internal chamber (180) containing absorbent material (18) for fuel vapours has a plurality of internal baffles defining a serpentine path for fuel vapours, through a plurality of sub-chambers arranged in series to each other and containing absorbent material.

9. System for fuel supply to a motor-vehicle engine, wherein said system comprises a filtering canister (1) according to any of previous claims.

FIG. 1

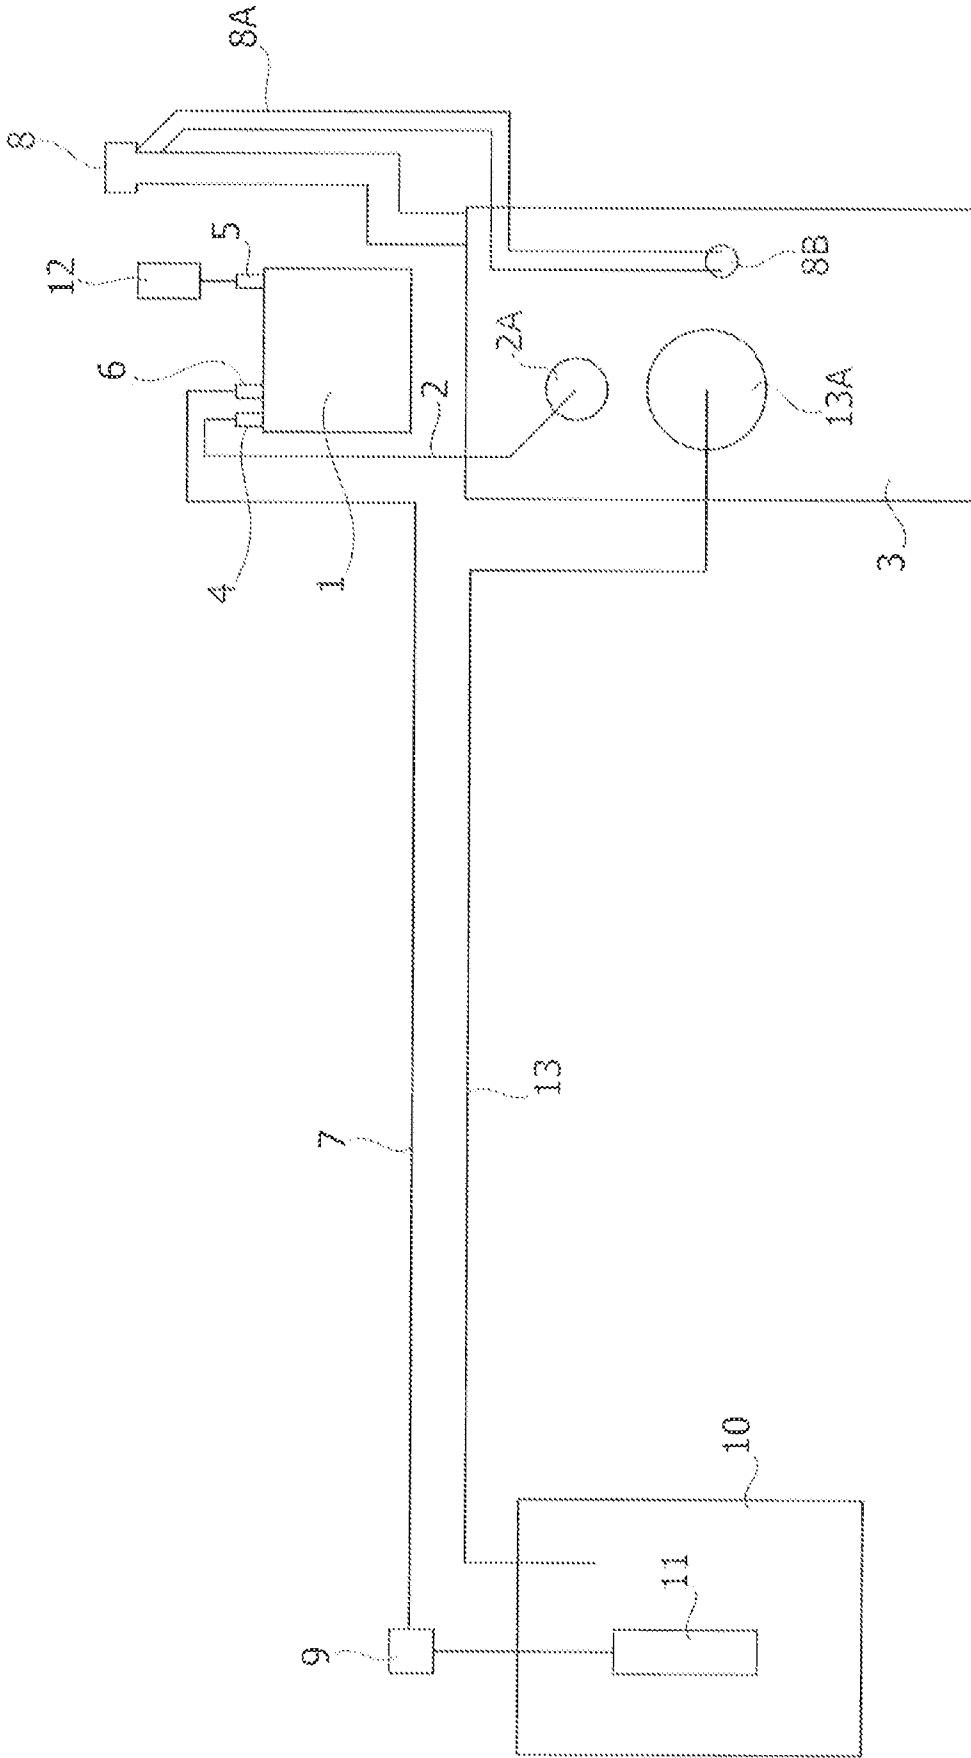
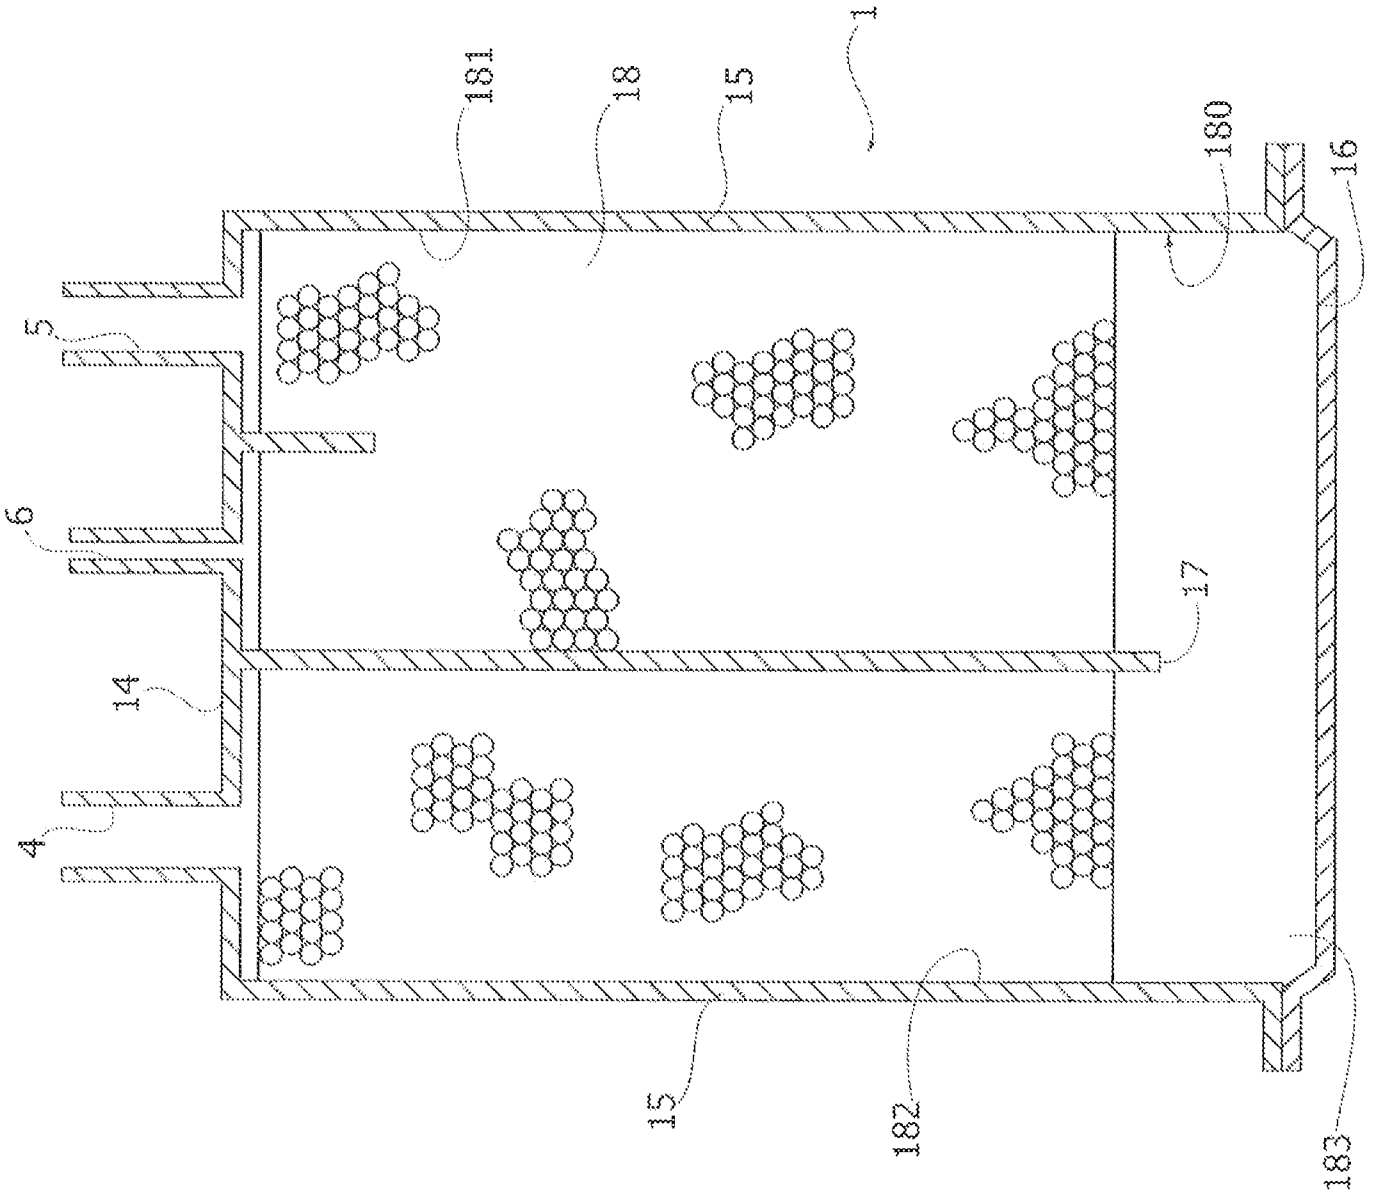


FIG. 2

PRIOR ART



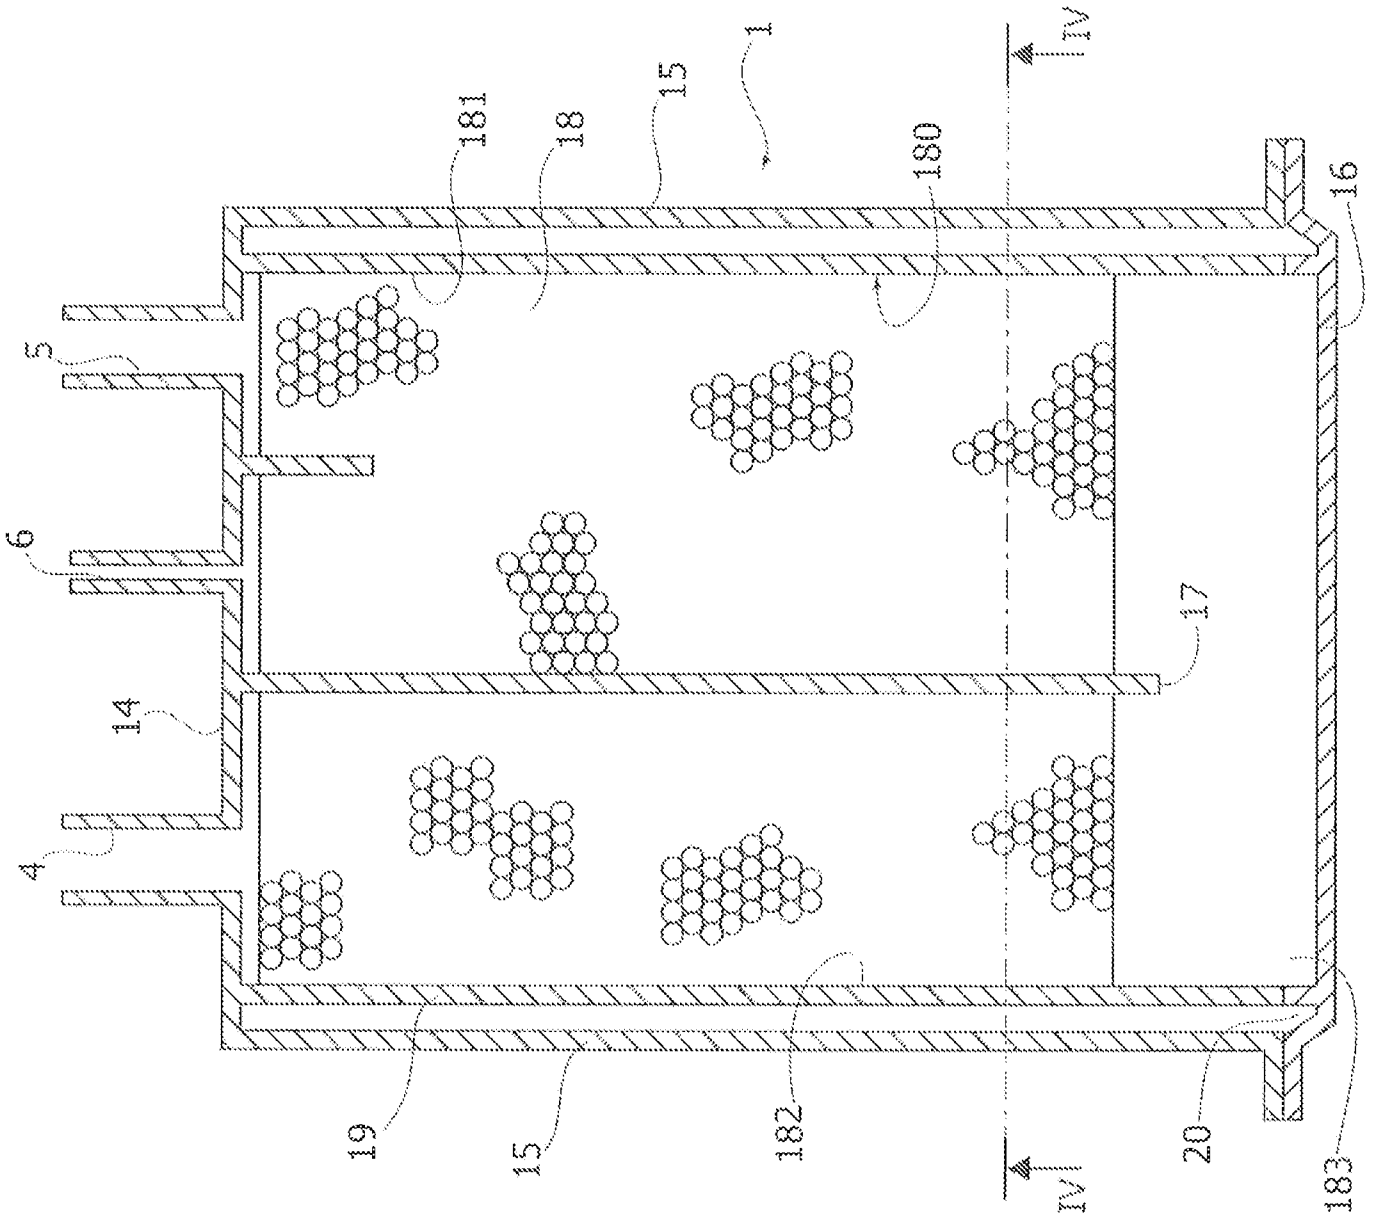
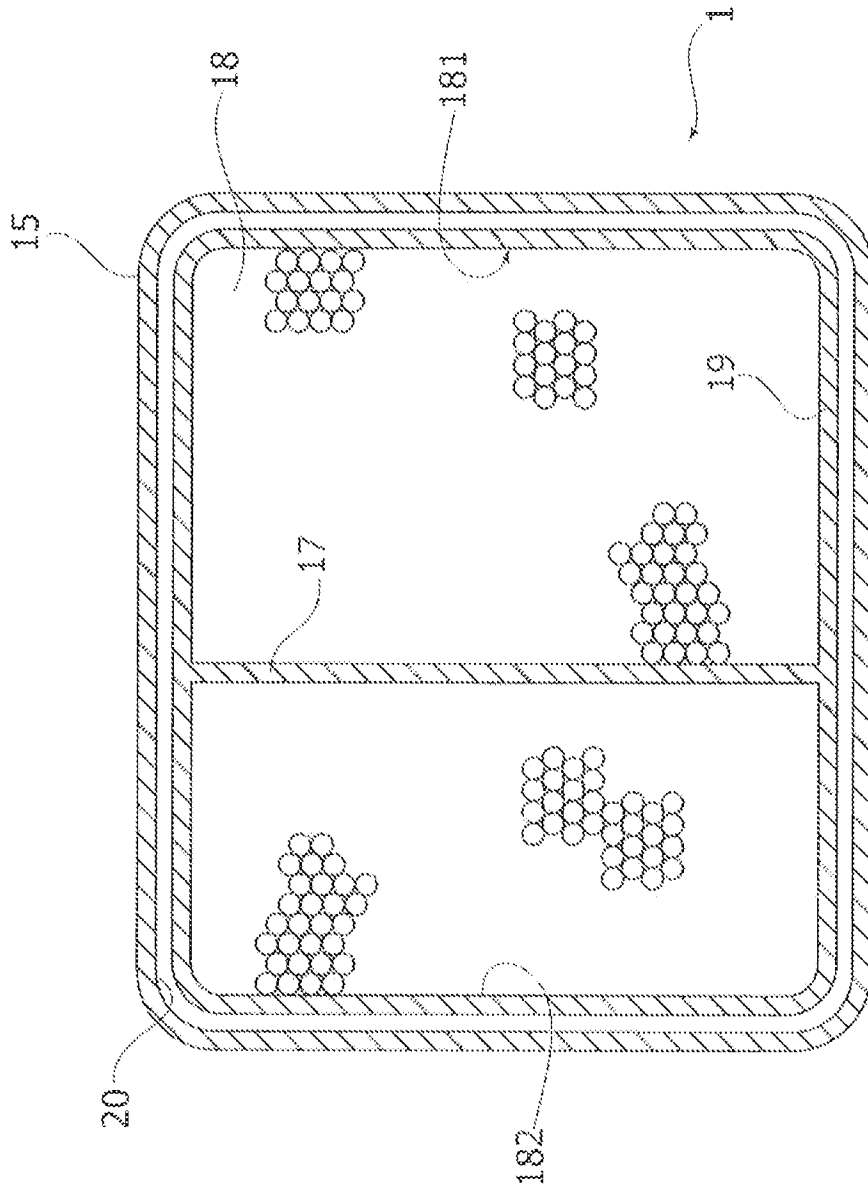


FIG. 3

FIG. 4



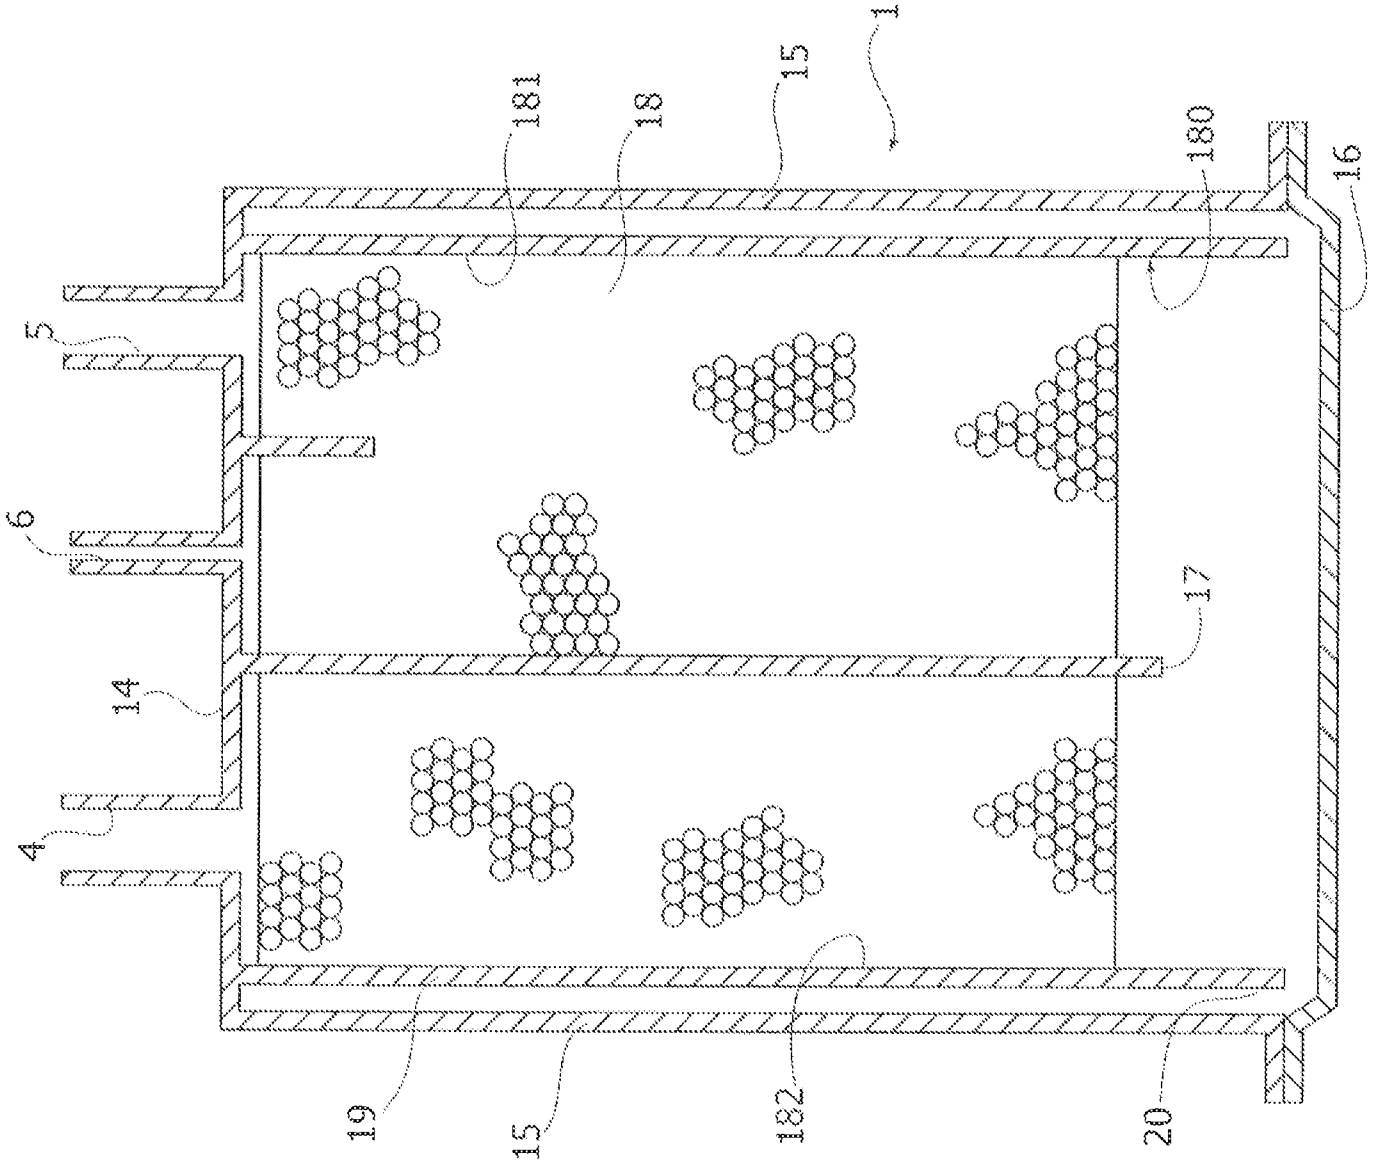


FIG. 5

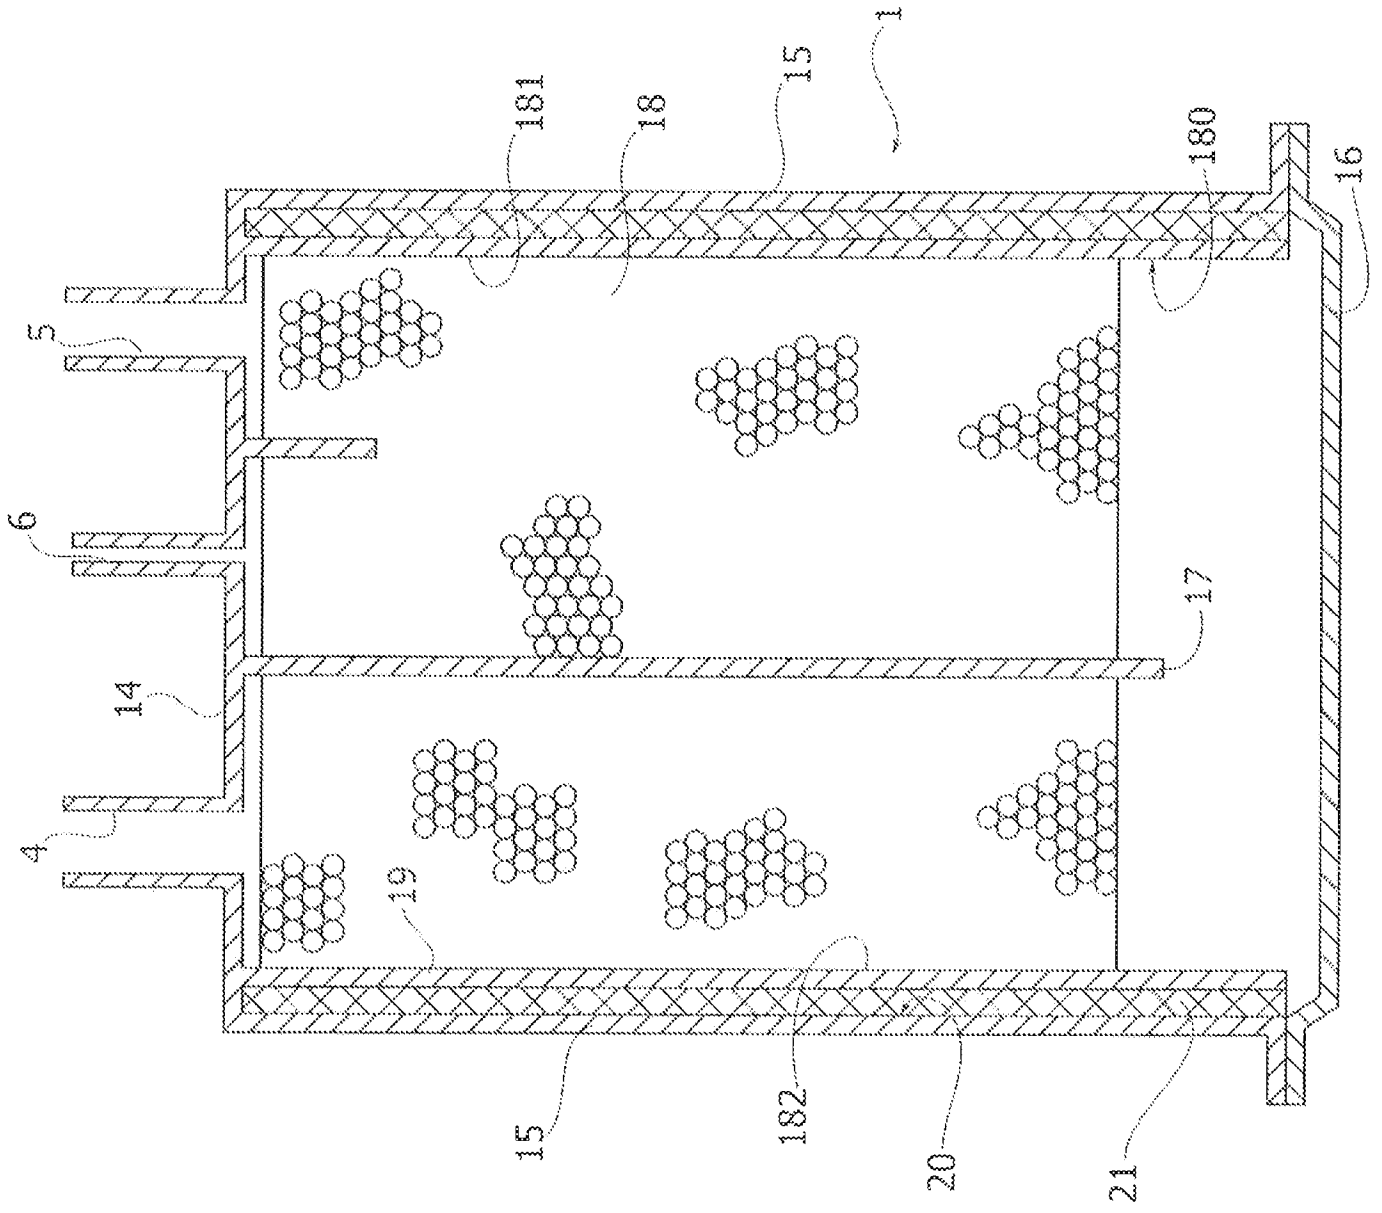


FIG. 6



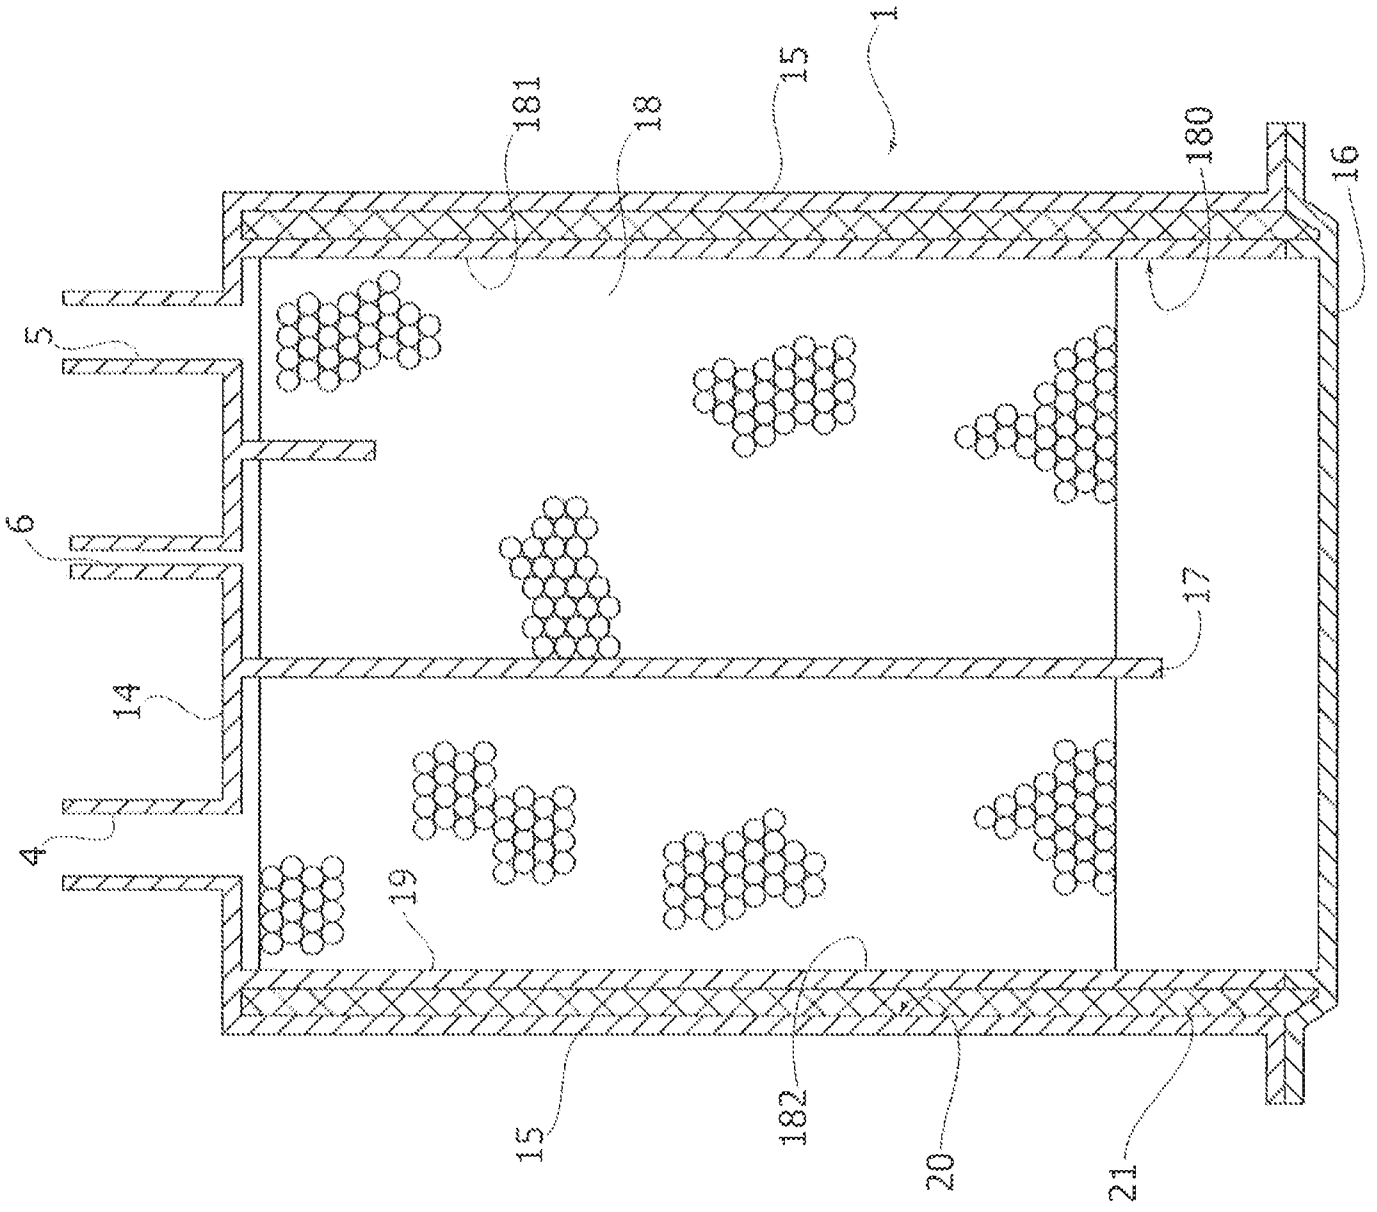


FIG. 7

# INTERNATIONAL SEARCH REPORT

International application No PCT/IB2016/056992
---

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> INV. F02M25/08 ADD.				
According to International Patent Classification (IPC) or to both national classification and IPC				
<b>B. FIELDS SEARCHED</b>				
Minimum documentation searched (classification system followed by classification symbols) F02M B60K				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data				
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 2006/196480 A1 (KOSUGI RYUJI [JP] ET AL) 7 September 2006 (2006-09-07)	1,3,5,6, 8,9		
Y	paragraph [0124] - paragraph [0125]; figures 2a-2c,28a	2,4		
X	----- US 2011/247592 A1 (KIM HYUN KI [KR] ET AL) 13 October 2011 (2011-10-13)	1,3,6,7, 9		
Y	paragraph [0076] - paragraph [0078]; figure 6			
Y	----- US 4 381 929 A (MIZUNO JUNZI [JP] ET AL) 3 May 1983 (1983-05-03)	2		
A	column 3, line 50 - column 4, line 7; figures 2-4	1,9		
	----- -/--			
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;"><input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.</td> <td style="width: 50%; border: none;"><input checked="" type="checkbox"/> See patent family annex.</td> </tr> </table>			<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.	<input checked="" type="checkbox"/> See patent family annex.
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.	<input checked="" type="checkbox"/> See patent family annex.			
* Special categories of cited documents :				
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention			
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone			
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art			
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family			
"P" document published prior to the international filing date but later than the priority date claimed				
Date of the actual completion of the international search	Date of mailing of the international search report			
1 March 2017	20/03/2017			
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Marsano, Flavio			

INTERNATIONAL SEARCH REPORT

International application No  
PCT/IB2016/056992

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 113 163 A2 (TENNEX CORP [JP]) 4 July 2001 (2001-07-04) paragraph [0046] - paragraph [0049]; figure 7	4
A	----- WO 2015/104813 A1 (MITSUBISHI ELECTRIC CORP [JP]) 16 July 2015 (2015-07-16) abstract; figure 5	1,9
A	----- US 2014/041522 A1 (YOSHIDA HIROYUKI [JP] ET AL) 13 February 2014 (2014-02-13) paragraph [0028] - paragraph [0033]; figure 1	1,9
A	----- US 2008/251139 A1 (WANG AARON [TW] ET AL) 16 October 2008 (2008-10-16) paragraph [0032] - paragraph [0033]; figure 5 -----	1,9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/IB2016/056992
---

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006196480	A1	07-09-2006	NONE
-----			
US 2011247592	A1	13-10-2011	CN 102032076 A 27-04-2011
			KR 20110033558 A 31-03-2011
			US 2011247592 A1 13-10-2011
-----			
US 4381929	A	03-05-1983	NONE
-----			
EP 1113163	A2	04-07-2001	DE 1113163 T1 17-01-2002
			DE 60023094 D1 17-11-2005
			DE 60023094 T2 04-05-2006
			EP 1113163 A2 04-07-2001
			JP 3995881 B2 24-10-2007
			JP 2001248504 A 14-09-2001
			US 2001015134 A1 23-08-2001
-----			
WO 2015104813	A1	16-07-2015	CN 105899795 A 24-08-2016
			JP 5944070 B2 05-07-2016
			US 2016245238 A1 25-08-2016
			WO 2015104813 A1 16-07-2015
-----			
US 2014041522	A1	13-02-2014	CN 103573479 A 12-02-2014
			JP 5940932 B2 29-06-2016
			JP 2014034909 A 24-02-2014
			US 2014041522 A1 13-02-2014
-----			
US 2008251139	A1	16-10-2008	TW 200840739 A 16-10-2008
			US 2008251139 A1 16-10-2008
-----			