

(19) **DANMARK**

(10) **DK/EP 3535511 T3**



(12)

Oversættelse af europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **F 16 L 9/12 (2006.01)** **F 16 L 11/127 (2006.01)** **F 16 L 58/00 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2022-04-04**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2021-12-29**
- (86) Europæisk ansøgning nr.: **17800428.9**
- (86) Europæisk indleveringsdag: **2017-11-01**
- (87) Den europæiske ansøgnings publiceringsdag: **2019-09-11**
- (86) International ansøgning nr.: **EP2017077973**
- (87) Internationalt publikationsnr.: **WO2018083127**
- (30) Prioritet: **2016-11-01 EP 16196711**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DK EE ES FI GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **EPFF Electrical Pipe For Fluid transport AB, Skottvägen 6, 736 32 Kungsör, Sverige**
- (72) Opfinder: **ANDERSSON, Thomas, Skottvägen 6, 736 32 KUNGSÖR, Sverige**
- (74) Fuldmægtig i Danmark: **Budde Schou A/S, Dronningens Tværgade 30, 1302 København K, Danmark**
- (54) Benævnelse: **REDUKTION AF MIKROBIOLOGISK VÆKST I RØR**
- (56) Fremdragne publikationer:
WO-A1-94/07790
AT-A4- 506 089
GB-A- 2 442 011
US-A1- 2008 053 550
US-A1- 2013 202 766

DESCRIPTION

Technical field

[0001] The proposed technology generally relates to the field of liquid transportation, dispensing, and recycling. In particular, it relates to the reduction of microbiological growth in pipes.

Background

[0002] Microbiological growth and the formation of biofilms on the inside of pipes is a concern in many applications where a liquid is conveyed. Properties of the liquid as such can be influenced by the microbiological growth and make it less suitable for its intended use. Microbiological growth in a pipe may also increase microbiological growth further downstream in equipment that is routinely cleaned from such growth. Microbiological growth can also detach from inside a pipe and cause clogging or damage in downstream equipment. It is also a known problem that microbiological growth on the inside of a pipe can introduce harmful pathogens in the conveyed liquid.

[0003] Three groups of applications where microbiological growth in a pipe can be a problem have been identified, namely liquid transportation, liquid recycling, and liquid dispensing.

[0004] An example of liquid transportation is water supply by public utilities. The pipes are used for long periods of time, typically stretching over several decades. Large quantities of microbiological material can build up in the pipes, which reduces the transport capacity of the pipes. The transport may also be over shorter distances, such as in dairy equipment at milk farms.

[0005] Examples of applications using liquid recycling where microbiological growth can be a problem are numerous. For example, it may be a problem in centralized domestic cooling of buildings, recycling of washing liquids in car washes, recycling of cutting fluids in metalworking, recycling of liquids in paper mills, and circulating low-temperature heating systems in buildings.

[0006] Examples of liquid dispensing applications are also numerous. The microbiological growth may be a problem in beverage dispensing, in particular in dispensing of beer from kegs, in dental equipment, and in domestic water systems, such as showers. The latter is a known source of legionella, which may be harmful to people.

[0007] There are also more complex systems that fall outside the simple classification above or are combinations of several types of applications, such as dialysis equipment in which liquids are both supplied and recirculated.

[0008] Pipes used in the handling of nutritious liquids, such as beer, require frequent cleaning, in particular if the transported liquids are stored at room temperature and cooled first at the dispensing point. This may cause rapid microbiological growth in the pipe conveying the liquids. It is known to cool such pipes to reduce the microbiological growth and prevent deterioration of the conveyed liquids. However, such a technology is typically costly to install and operate.

[0009] The cleaning of a pipe is often costly, both in itself and due to interruptions in the operation of the application. It also often requires the pipe to be flushed afterwards, which is not practical in many applications, such as in closed circulation systems and long distance water transportation.

[0010] There is a need for pipes in which microbiological growth and the formation of biofilms is reduced. Further, there is a need for pipes that have low installation and operation costs with respect to the prevention of microbiological growth. Replacing pipes in an existing application may be a costly operation. Thus, there is also a need for pipes preventing microbiological growth that can be retrofitted in an existing application.

[0011] Throughout these specifications, microbiological growth is understood to encompass the formation of a biofilm. For example, microbiological growth may be colonies of bacteria. A system according to the preamble of claim 1 is known from AT 506089A4 wherein the inner layer of a pipe is formed of an electrically conducting polymer comprising carbon black particles as anti microbiological agent.

[0012] Document US 2013/0202766 A1 discloses a system for preventing microbiological growth in a conduit conveying a liquid, wherein the system comprises a multi-layered pipe wherein discrete electrodes are connected to a power source.

Summary

[0013] It is an object of the proposed technology to meet one or more of the abovementioned needs. In a first aspect of the invention, this is achieved by a system for preventing microbiological growth and/or the formation of a biofilm in a conduit conveying a liquid. The system comprises a multi-layered pipe constituting said conduit and having an inner layer and an outer layer. The inner layer covers the complete inside of the pipe and is formed of an electrically conductive polymer material, wherein a liquid in the pipe is in direct contact with the inner layer. The outer layer covers at least a portion of the outside of the inner layer and is formed of an electrically insulating polymer material. The system further comprises a first electrical connector connecting to the inner layer from outside the pipe and a second electrical connector connecting to the inner layer from outside the pipe, wherein the first electrical connector and the second electrical connector are spaced apart along the pipe. The system also comprises an electric power source operationally connected to the first electrical

connector and the second electrical connector and configured for supplying an electric current to the inner layer, according to claim 1. The multilayered pipe may be a rigid pipe or a flexible hose. The following second to seventh aspects are sub-aspects of the invention.

[0014] In a second aspect, a method is provided for retrofitting a system for preventing microbiological growth in an existing conduit for conveying a liquid. The method comprises:

providing a system according to the first aspect, and

providing the pipe of the system inside the existing conduit.

[0015] In a third aspect, the above object is achieved by a method for preventing microbiological growth in the pipe of a system according to the first aspect, wherein the pipe conveys a liquid. The method comprises: supplying an electric current to the inner layer of the pipe with the electric power source.

[0016] In a fourth aspect, one or more of the abovementioned needs are met by a system for preventing microbiological growth and/or the formation of a biofilm in a conduit conveying a liquid, wherein the system comprises a single-layered flexible hose constituting said conduit and having a single layer, wherein the single layer is formed of an electrically conductive polymer material, and wherein a liquid in the hose is in direct contact with the single layer. The system further comprises a first electrical connector connecting to the single layer from outside the hose and a second electrical connector connecting to the single layer from outside the hose, wherein the first electrical connector and the second electrical connector are spaced apart along the hose. Additionally, the system comprises an electric power source operationally connected to the first electrical connector and the second electrical connector and configured for supplying an electric current to the single layer, and/or for supplying an electric potential over the first electrical connector and the second electrical connector.

[0017] In a fifth aspect, a method is provided for retrofitting a system for preventing microbiological growth in an existing conduit for conveying a liquid. The method comprises: providing a system according to the fourth aspect, and providing the hose of the system inside the existing conduit.

[0018] In a sixth aspect, the above object is achieved by a method for preventing microbiological growth in the hose of a system according to the fourth aspect, wherein the hose conveys a liquid. The method comprises: supplying an electric current to the single layer of the pipe with the electric power source.

[0019] The technology of the fourth to sixth aspects is particularly useful in applications where the hose is surrounded by electrically insulating material, for example within an existing plastic pipe.

[0020] In a seventh aspect, a beverage dispensing system is provided comprising a tapping station for dispensing the beverage and a beverage conduit for conveying a beverage from a container containing the beverage to the tapping station. The beverage dispensing system further comprises a system for preventing microbiological growth according to the first aspect or the fourth aspect, wherein the pipe or hose forms part of the beverage conduit. The beverage may be beer and the container may be a keg.

[0021] Here, and throughout these specifications, that a liquid is in direct contact with the inner layer means that there is no other material between the inner layer and the liquid.

[0022] It has been found that when a current is supplied to the inner layer or single layer, microbiological growth and formation of biofilms are significantly reduced. There is no established theory for why this happens, but a proof-of-concept is provided below. Further, the required electric power for operating the proposed systems is low, thus contributing to low operation costs. Further, the fact that the pipes are made of polymer-based materials means that the manufacturing costs are typically low, thus contributing to lower installation costs. A hose allows for a retrofitting inside existing pipes, which also contributes to lower installation costs.

[0023] The liquid may comprise water and/or water soluble substances, such as sugars, alcohols and salts. The main component of the liquid may be water.

Detailed description of the proposed technology

[0024] Further optional features of the different aspects of the proposed technology are presented below.

[0025] The electric current supplied to the inner layer or single layer may be a direct current. The direct current may be below 10 mA, below 1 mA, between 0.1 mA and 1 mA, or between 0.3 mA and 0.7 mA. The electric current may be generated at a voltage between the first electrical connector and the second electrical connector that is below 150 V, below 120 V, between 20 V and 100 V, or between 50 V and 70 V. The power supply may be configured to supply the direct current to the first electrical connector or the second electrical connector at the here listed voltages between the first electrical connector and the second electrical connector. It has been found that the operating parameters described here reduce microbiological growth, in particular in fast flowing sweet water in distribution mains.

[0026] The power source may be configured for changing the polarity between the first electrical connector and the second electrical connector. The changing of the polarity may be random in time or follow a predetermined schedule. The polarity may be changed at least once every 12 hours, or at least once every hour. There are indications that the change of polarity will inhibit the microbiological growth.

[0027] Alternatively, the electric current supplied to the inner layer or single layer may be an alternating current. The alternating current may be below 10 mA, below 1 mA, between 0.1 mA and 1 mA, or between 0.4 mA and 0.8 mA. The alternating current may be supplied at a voltage between the first electrical connector and the second electrical connector that is below 80 V, below 50 V, between 10 V and 50 V, between 20 V and 50 V, or between 30 V and 50 V. The power supply may be configured to supply the alternating current to the first electrical connector or the second electrical connector at the here listed voltages between the first electrical connector and the second electrical connector. The alternating current may have a frequency between 1 kHz and 5 kHz, or between 1 kHz and 2 kHz. It has been found that the operating parameters described here reduce microbiological growth, in particular in slowly flowing or still sweet water in distribution mains.

[0028] The power source may be further configured for supplying the electric current as a pulsed electric current, both for direct current and alternating current. The pulses may have combined pulse length over a period of time that is equal to or less than 50% of the length of the period. It has been found that the microbiological growth is reduced also for pulsed electric currents. The pulsing has the effect of reduced power consumptions, which contributes to lower operation costs. The power source may be further configured for changing the polarity between the first electrical connector and the second electrical connector between pulses. There are indications that this will inhibit the microbiological growth.

[0029] Alternatively to the abovementioned voltages at which the direct current and the alternating current are supplied, the electric current may be supplied at a voltage between the first electrical connector and the second electrical connector that is in the range 1 V and 10 V, 2 V and 8 V, or 3 V and 6. It is contemplated that these voltages will have a sufficient effect on the microbiological growth.

[0030] Alternatively, the electric current supplied to the inner layer or single layer may be a direct current or an alternating current below 10 mA, below 1 mA, between 0.1 mA and 1 mA, or between 0.4 mA and 0.8 mA. Additionally, the electric current may be supplied at a voltage between the first electrical connector and the second electrical connector that is in the range 0.5 kV and 6 kV, 0.5 kV and 4 kV, 0.5 kV and 2 kV, or 0.5 kV and 1 kV. Additionally or alternatively, the electric current may be pulsed. Further, the pulses of the electric current may have a pulse length in the range 1 ms and 500 ms, 1 ms and 100 ms, or 1 ms and 10 ms. It is contemplated that these operation parameter will have a significant effect on the microbiological growth.

[0031] The power source may be configured for varying the electric current and/or the electric potential randomly or according to predetermined values. The varying of the electric current and/or the electric potential may correspond to relative changes in the range 0.01 to 100, or 0.1 to 10. Additionally, the power source may be configured for varying the electric current and/or the electric potential randomly in time or according to predetermined schedule. The varying may result in a change of the electric current and/or the electric potential at least once every 12 hours, or at least once every hour. It is contemplated that the varying of these

parameter will disturb the microbiological growth.

[0032] The system may be configured for generating an electric current in the inner layer and an electric current in the liquid, and the electric current in the inner layer may be of the same order of magnitude as the electric current in the liquid, or the electric current in the inner layer may be in the range 0.02 to 50, or 0.1 to 10, times the electric current in the liquid. Additionally or alternatively, the system may be configured for generating an electric current between the inner layer and the liquid corresponding to an electric power in the range 0.01 mW to 500 mW, 0.1 mW to 100 mW, 0.5 mW to 50 mW, or 1 mW to 10 mW per unit area of the inside of the pipe. It should be noted that the parameter determined here depends on the properties of the inner layer and the liquid and can be determined by modeling or experiment.

[0033] The electrically conductive polymer material of the inner layer or the single layer may be a carbon-black filled polymer. Additionally or alternatively to carbon-black, the polymer may be filled with nanotubes, graphene, and/or metal fibers or filaments for providing the electrical conductivity. These materials typically have the advantage that a smaller amount of the material is required than for carbon-black for achieving a desired electrical conductivity.

[0034] In the case of a pipe, the electrically conductive polymer material may comprise or be composed of polyethylene, polypropylene, polyamide, or polyester. The polymer material of the electrically insulating polymer material, i.e. the outer layer, may comprise or be composed of polyethylene, polypropylene, polyamide, or polyester. In the case of a hose, the electrically conductive polymer material may comprise or be composed of polyethylene, polypropylene, polyamide, or polyester. The polymer material of the electrically insulating polymer material, i.e. the outer layer may comprise or be composed of polyethylene, polypropylene, polyamide, or polyesters.

[0035] Carbon black as such may contribute to an increased microbiological growth on the inside of the pipe or hose in the absence of an electric current. However, together with the electric current in the inner layer or single layer, it has been shown that the net effect will be a reduced microbiological growth.

[0036] The resistance between the first electrical connector and the second electrical connector of the of the inner layer multiplied with the inside diameter of the pipe and divided by the length between the first electrical connector and the second electrical connector may be in the range 0.2 k Ω to 10 k Ω , 0.5 k Ω to 7 k Ω , or 1 k Ω to 5 k Ω . Here, the resistance is determined without a liquid in the pipe. It has been found that pipes with these parameters are suitable for clean to moderately dirty water.

[0037] The first electrical connector and the second electrical connector may be spaced apart by a separation in the range 0.2 m to 50 m, or 1 m to 10 m.

Brief description of the drawings

[0038] A more complete understanding of the proposed technology and other features and advantages of the proposed technology, will be apparent from the following detailed description of the figures, where:

Figs. 1a-c

schematically illustrate the a setup of an embodiment of the proposed system,

Fig. 2

schematically illustrates an embodiment of the proposed system in a liquid transportation application,

Fig. 3

schematically illustrates an embodiment of the proposed system in a liquid dispensing application,

Fig. 4

schematically illustrates an embodiment of the proposed system in a liquid recycling application,

Fig. 5

schematically illustrates an embodiment of a beverage dispensing system including the proposed system for preventing microbiological growth,

Fig. 6

schematically illustrates an embodiment of a beverage dispensing system including a retrofitted proposed system for preventing microbiological growth, and

Fig. 7

is a graph illustrating the results of an investigation of the function of the proposed technology.

Detailed description of embodiments of the proposed technology

[0039] The setup of an embodiment of a system for reducing microbiological growth in a conduit is schematically illustrated in Figs. 1a-c. A multi-layered pipe 10 is provided having an inner layer 12 and an outer layer 14. The inner layer 12 is composed of carbon-black filled polyethylene with a 20 weight percentage of carbon-black. The outer layer is composed of polyethylene. This means that the inner layer 12 is electrically conductive and the outer layer 14 is electrically insulating. The inner layer 12 and the outer layer 14 have been co-extruded in a manner such that the inner layer 12 covers the complete inside 16 of the pipe 10 and the outer layer 14 covers the complete outside of the inner pipe 12, as is shown in Fig. 1c. There is no material between the inner pipe 12 and a liquid conveyed by the pipe 10.

[0040] In an alternative embodiment, the polymer of the inner layer 12 and the outer layer 14 is polyethylene, which means that the pipe 10 will have the properties of a hose with respect to manual handling.

[0041] The outer layer 14 is removed at the ends of the pipe 10, thereby making the inner layer 12 accessible from outside the pipe 10, as is shown in Fig. 1b. In alternative embodiments, the outer layer 14 is removed at other parts of the pipe 10, for example further in from the ends of the pipes, thus leaving the inner layer 12 covered by the outer layer 14 at the ends of the pipe 10.

[0042] A first electrical connector 18 is attached to the exposed inner layer 12 at one end of the pipe 10, and a second electrical connector 19 is attached to the exposed inner layer 12 at the other end of the pipe 10. Both connectors are tightened around the inner layer in a similar manner as a hose clamp is tightened, thus ensuring a good electrical connection between each of the connectors and the inner layer 12.

[0043] An electric power source 20 is provided that is operationally connected to the first connector 18 via a first cable 22 and to the second connector 19 via a second cable 24. When installed in an application and with a liquid running through the pipe 10, the electric power source 20 is set to supply a direct current in the inner layer 12 that is between 0.3 mA and 0.7 mA by way of the electric circuit established with the first connector 18, the second connector 19, the first cable 22, and the second cable 24. In an alternative embodiment, the electric power source 20 is also set to generate a stable potential in the range 50 V and 70 V between the first connector 18 and the second connector 19.

[0044] In alternative embodiments, the electric power source 20 is set to supply an alternating current in the inner layer 12 that is between 0.4 mA and 0.8 mA. Additionally or alternatively, the electric power source 20 is also set to generate a stable potential in the range 50 V and 70 V between the first connector 18 and the second connector 19.

[0045] The electric power source 20 is operated to supply a continuous electric current to the inner layer 12. In an alternative embodiment, the electric current is pulsed or intermittently operated. In one embodiment, the electric current is supplied in a cycle alternating between one week of electric current supply and one week without electric current supply, thus effectively having a combined pulse length over a period of time that is 50% of the length of the period.

[0046] An embodiment of the proposed system 8 is shown in Fig. 2. The system 8 is installed in a liquid transportation application 40. It has all the features of the system 8 described above in relation to Fig. 1. At one end, the pipe 10 is connected to a liquid supply 26, for example public water mains. At the other end, the pipe 10 is connected to a liquid recipient 28, such as the water inlet at a domestic or industrial building, or another section of the public water mains.

[0047] Fig. 3 schematically illustrates an embodiment of the proposed system 8 in a liquid dispensing application. The system 8 has all the features described above in relation to Fig. 1. At one end, the pipe 10 is connected to a liquid supply 30, for example a hot-water pipe in a domestic building. At the other end, the pipe 10 is connected to a liquid dispenser 32, such as a shower in a domestic or public building.

[0048] Another embodiment of the proposed system 8 is shown in Fig. 4. The system 8 is installed in a liquid recycling application 44. It has all the features of the system 8 described above in relation to Fig. 1. At both its ends the pipe 10 is connected to liquid recycler 28, such as the heat exchanger, the circulation pump, and the radiators of a low-temperature heating system of a building.

[0049] An embodiment of a beverage dispensing system 6 is schematically illustrated in Fig. 5. The dispensing system 6 has a liquid dispenser or tapping station for the beverage in the form of a beer tap 32 attached to a bar counter 34. It further has a beverage conduit 36 for conveying a beverage from a liquid supply or container containing the beverage in the form of a beer keg 30. A system 8 for preventing microbiological growth having the features of the embodiment described above in relation to Fig. 1 forms part of the dispensing system 6. The pipe 10 constitutes a portion of the beverage conduit 6. At one end, the pipe 10 is connected to the beer keg 30 via a beverage hose 37. At its other end, the pipe 10 is connected to the beer tap 32. When the electric power source 20 is operated as described above in relation to Fig. 1, microbiological growth is prevented in the pipe 10.

[0050] Another embodiment of a beverage dispensing system 6 is schematically illustrated in Fig. 6. The dispensing system 6 has a liquid dispenser or tapping station for the beverage in the form of a beer tap 32 attached to a bar counter 34. A system 8 for preventing microbiological growth, having the features of the embodiment described in relation to Fig. 1, forms part of the dispensing system 6. However, the system 8 differs in that the pipe 10 is a hose. The dispensing system 6 has an existing conduit 38 in the form of a rigid pipe 38. The hose 10 has been retrofitted in the rigid pipe 38 by the insertion of the hose 10 through the receiving end of the rigid pipe 38 and by connecting the hose 10 to the beer tap 32. At one end, the hose 10 is connected to a beer keg 30 via a beverage hose 37. Thus, the hose 10 forms part of a beverage conduit 36 conveying beer from the keg 30 to the beer tap 32. When the electric power source 20 is operated as described above in relation to Fig. 1, microbiological growth is prevented in the hose 10.

Proof-of-concept

[0051] An investigation of the proposed technology has been performed including three different setups. Three pipes of identical length and diameter were used. The length was 25 meter and the inner diameter was 63 mm. In the first setup, the pipe was a single-layer polyethylene pipe. In the second and third setups the pipes were identical multi-layered pipes with an inner layer of carbon-black-filled polyethylene. Electrical connectors were attached to the inner layer of the pipes at the ends of the pipes. Sweet water from public water mains was introduced in and allowed to flow through the pipes. An electric current of 0.5 mA was supplied to the electrical connectors of the third setup at a voltage in the range 60 V to 65 V.

[0052] The investigation was divided into two periods, the first period covering weeks 1 to 10

and the second period covering weeks 10 to 25.

[0053] Microbiological growth was monitored weekly by the taking of samples of the biofilm from the inner walls of the pipes. The samples were cultivated for 48 hours and the number of bacteria colonies was then calculated in each sample and used to represent the microbiological growth in the corresponding setup.

[0054] In the first period, the microbiological growth was allowed to settle on the inner walls and allowed to adjust to the environment inside the pipes. No conclusive results were achieved in the first period. The three setups were then moved and connected to the public mains at another point before the second period of investigation started.

[0055] The results of the second period are shown in Fig. 7. The weeks are indicated on the abscissa and the number of counted bacteria is indicated on the ordinate. For each week, the left bar represents the measurement from the first setup, i.e. with a single layer polyethylene pipe, the middle bar represents the measurement from the second setup, i.e. with an inner conductive layer without an electric current, and the right bar represents the measurement from the third setup, i.e. with an inner conductive layer with an electric current. It should be noted that no sampling was performed in the weeks without any bars.

[0056] As can be clearly seen in Fig. 7, after week 16 when the microbiological growth had established itself in the pipes, the microbiological growth in the second setup was greater than in the third setup, thus showing that the supplied electric current reduces the microbiological growth. It is contemplated that the high initial counts of the second and third setups is a result of an initial adaption to the environment inside the pipes with carbon-black in the inner layer.

Item list

[0057]

- 6 beverage dispensing system
- 8 system
- 10 pipe or hose
- 12 inner layer
- 14 outer layer
- 16 inside of the pipe
- 18

19	first electrical connector
20	second electrical connector
22	electric power source
24	first cable
26	second cable
28	liquid supply
30	liquid recipient
32	liquid supply
34	liquid dispenser
36	bar counter
37	a beverage conduit
38	beverage hose
40	existing conduit
42	liquid transportation application
44	liquid dispensing application
	liquid recycling application

REFERENCES CITED IN THE DESCRIPTION

Cited references

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all

liability in this regard.

Patent documents cited in the description

- AT506089A4 [0011]
- US20130202766A1 [0012]

Patentkrav

1. System (8) til forebyggelse af mikrobiologisk vækst i en ledning, der transporterer en væske, hvor systemet (8) omfatter:

- et flerlagsrør (10), der udgør ledningen og har et inderlag (12) og et yderlag (14), hvor inderlaget (12) tildækker hele indersiden (16) af røret (10) og er dannet af et elektrisk ledende polymermateriale, hvor en væske i røret (10) er i direkte kontakt med inderlaget (12), og hvor yderlaget (14) tildækker mindst en del af ydersiden af inderlaget (12) og er dannet af et elektrisk isolerende polymermateriale, **kendetegnet ved, at** systemet yderligere omfatter:
 - et første elektrisk forbindelseselement (18), der fra rørets (10) yderside har forbindelse med inderlaget (12), og et andet elektrisk forbindelseselement (19), der fra rørets (10) yderside har forbindelse med inderlaget (12), hvor det første elektriske forbindelseselement (18) og det andet elektriske forbindelseselement (19) er anbragt med afstand fra hinanden langs røret (10), og
 - en elektrisk strømkilde (20), der operativt er forbundet med det første elektriske forbindelseselement (18) og det andet elektriske forbindelseselement (19) og konfigureret til at forsyne inderlaget (12) med en elektrisk strøm.

2. System (8) ifølge krav 1, hvor den elektriske strøm er en jævnstrøm.

3. System (8) ifølge krav 2, hvor den elektriske strøm er under 10 mA, under 1 mA, mellem 0,1 mA og 1 mA eller mellem 0,3 mA og 0,7 mA.

4. System (8) ifølge krav 2 eller 3, hvor den elektriske strøm tilføres ved en spænding mellem det første elektriske forbindelseselement (18) og det andet elektriske forbindelseselement (19), der er under 150 V, under 120 V, mellem 20 V og 100 V eller mellem 50 V og 70 V.

5. System (8) ifølge krav 1, hvor den elektriske strøm er en vekselstrøm.

6. System (8) ifølge krav 4 eller 5, hvor den elektriske strøm er under 10 mA, under 1 mA, mellem 0,1 mA og 1 mA eller mellem 0,4 mA og 0,8 mA.

7. System (8) ifølge krav 5 eller 6, hvor den elektriske strøm tilføres ved en spænding mellem det første elektriske forbindelseselement (18) og det andet elektriske forbindelseselement (19), der er under 80 V, under 50 V, mellem 10 V og 50 V, mellem 20 V og 50 V eller mellem 30 V og 50 V.

8. System (8) ifølge et hvilket som helst af kravene 5-7, hvor vekselstrømmen har en frekvens mellem 1 kHz og 5 kHz.

9. System (8) ifølge et hvilket som helst af kravene 1-8, hvor strømkilden (20) yderligere er konfigureret til at tilføre en pulseret elektrisk strøm.

10. System (8) ifølge krav 9, hvor impulserne har en kombineret impuls længde i løbet af et tidsrum, der er lig med eller mindre end 50 % af tidsrummets længde.

11. System (8) ifølge et hvilket som helst af kravene 1-10, hvor inderlagets (12) elektrisk ledende polymermateriale er polyethylen fyldt med kønrøg.

12. System (8) ifølge et hvilket som helst af kravene 1-11, hvor flerlagsrøret (10) er en fleksibel slange.




13. System (8) ifølge krav 12, hvor inderlagets (12) elektrisk ledende polymermateriale er polyethylen fyldt med kønrøg.




14. Fremgangsmåde til eftermontering af et system (8) til forebyggelse af mikrobiologisk vækst i en eksisterende ledning til transport af en væske, hvilken fremgangsmåde omfatter:



- tilvejebringelse af et system (8) ifølge et hvilket som helst af kravene 1-13,
- tilvejebringelse af røret (10) inde i den eksisterende ledning.

15. Fremgangsmåde til forebyggelse af mikrobiologisk vækst i et rør (10) under anvendelse af et system (8) ifølge et hvilket som helst af kravene 1-13, hvor røret (10) transporterer en væske, og fremgangsmåden omfatter: tilførsel af en elektrisk strøm til rørets (10) inderlag (12) med den elektriske strømkilde (20).

DRAWINGS

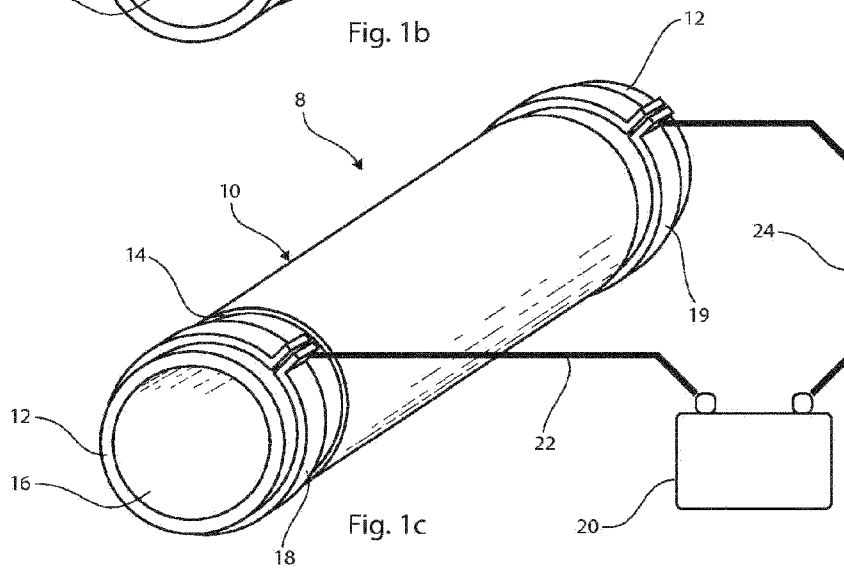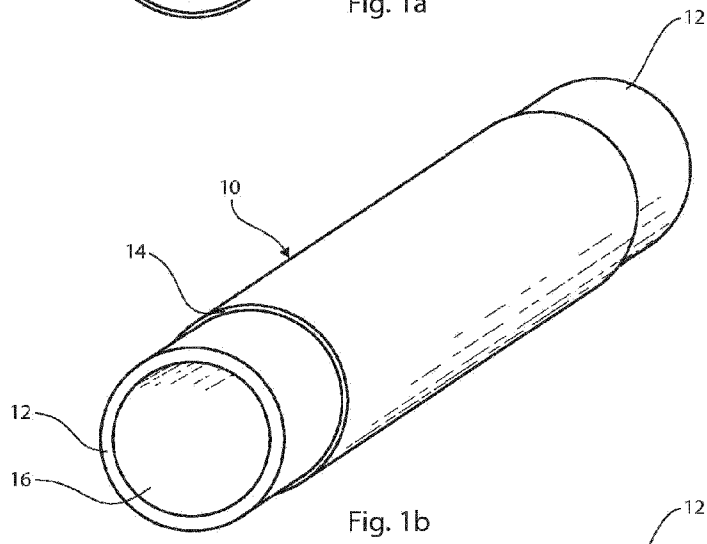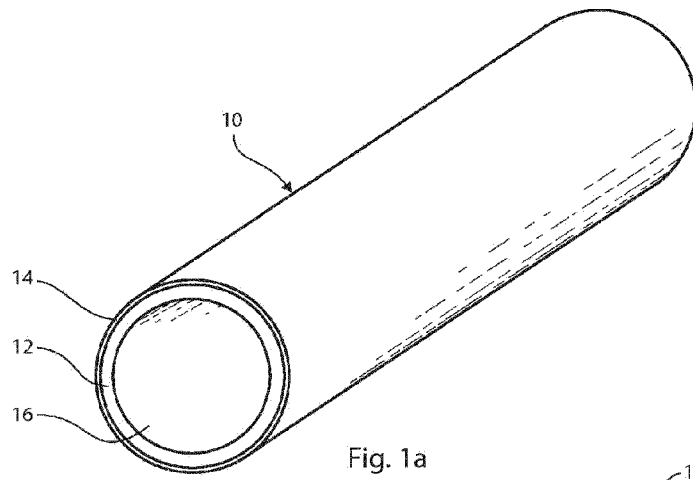

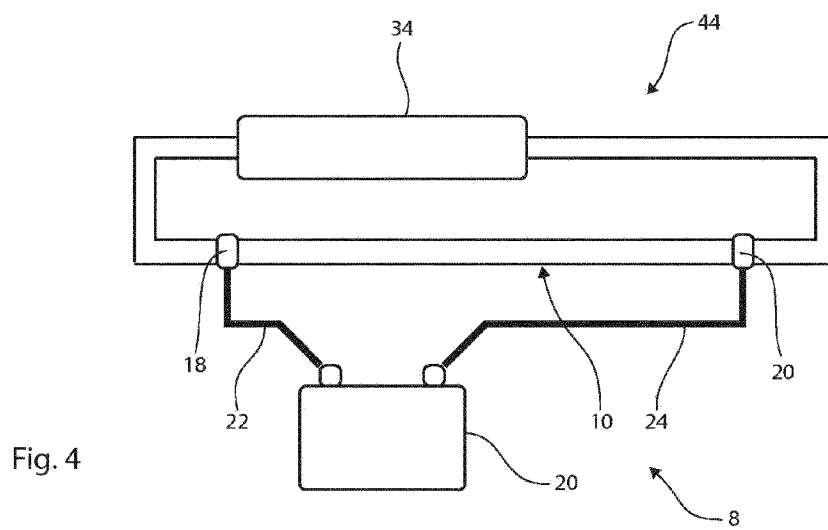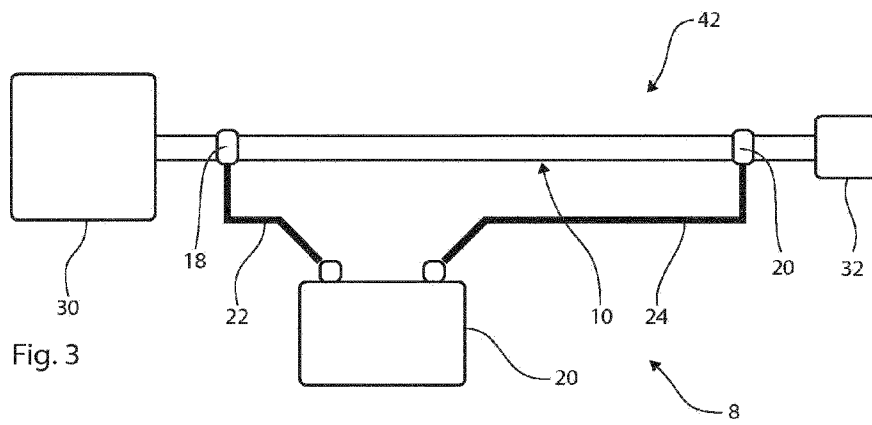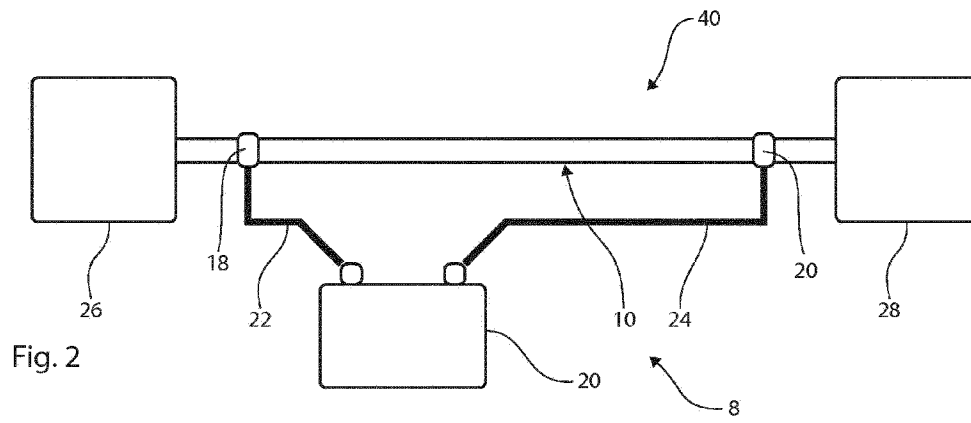

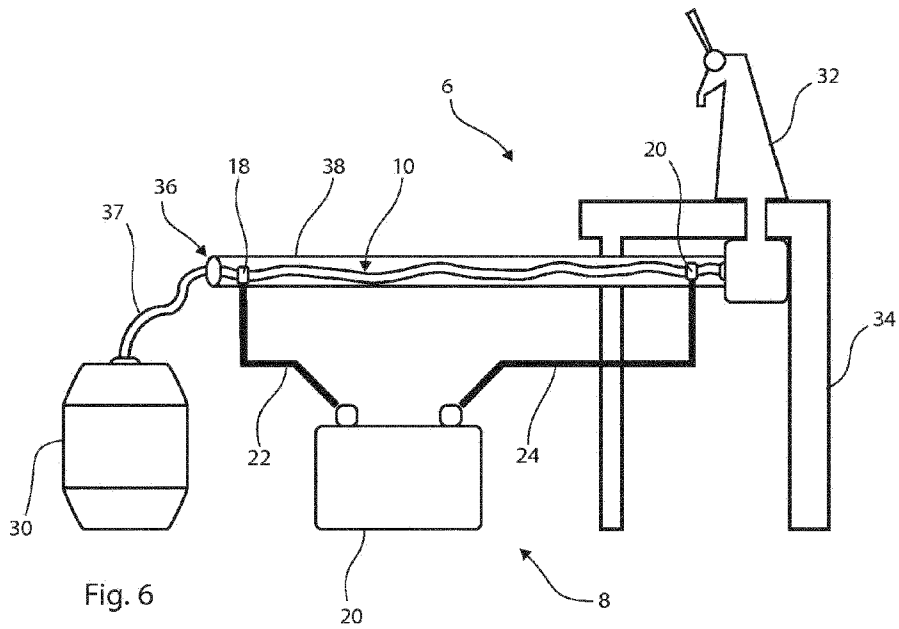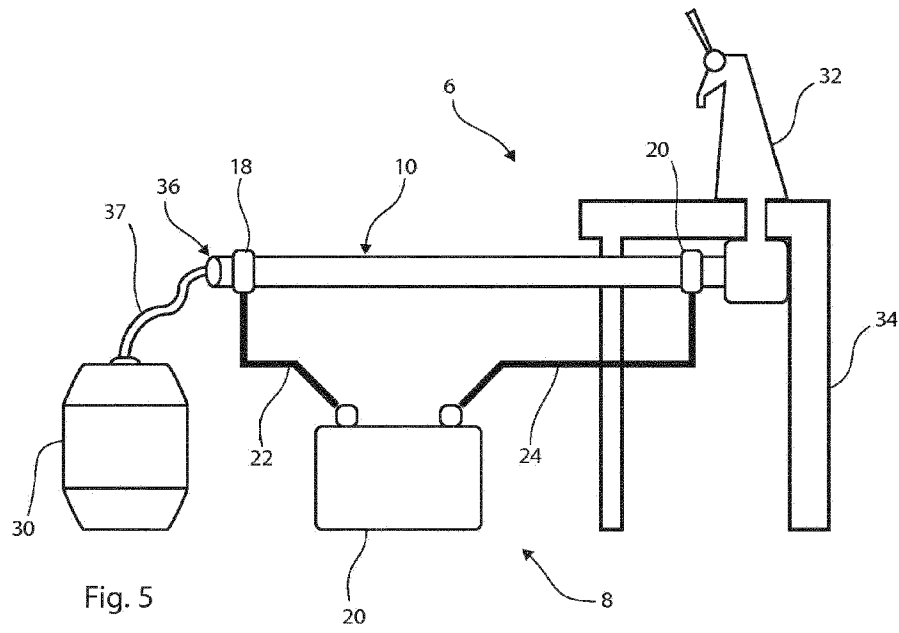

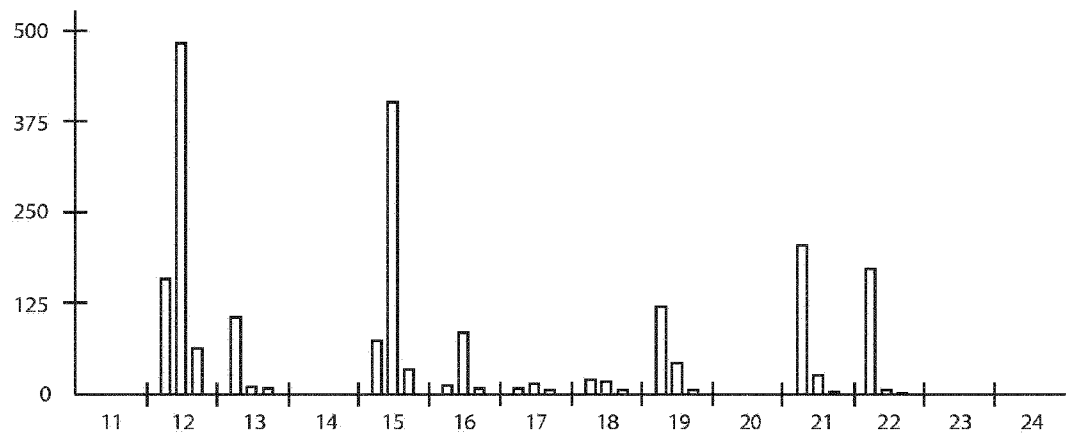


Fig. 7