



- | | |
|--|---|
| (51) International Patent Classification:
<i>E21B 33/03</i> (2006.01) | (72) Inventor; and |
| (21) International Application Number:
PCT/US2009/068141 | (75) Inventor/Applicant (for US only): HALLING, Horace, P. [GB/US]; 60 Green Lane, Durham, CT 06422-1903 (US). |
| (22) International Filing Date:
16 December 2009 (16.12.2009) | (74) Agents: DELIO, Anthony, P. et al.; DELIO & PETERSON, LLC, 121 Whitney Avenue, New Haven, CT 06510 (US). |
| (25) Filing Language: English | (81) Designated States (<i>unless otherwise indicated, for every kind of national protection available</i>): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW. |
| (26) Publication Language: English | |
| (30) Priority Data:
61/138,344 17 December 2008 (17.12.2008) US
12/635,883 11 December 2009 (11.12.2009) US | (84) Designated States (<i>unless otherwise indicated, for every kind of regional protection available</i>): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, |
| (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier applications:
US 12/635,883 (CON)
Filed on 11 December 2009 (11.12.2009)
US 61/138,344 (CON)
Filed on 17 December 2008 (17.12.2008) | |
| (71) Applicant (for all designated States except US): SEAL SCIENCE & TECHNOLOGY, LLC [US/US]; 60 Green Lane, Durham, CT 06422-1903 (US). | |

[Continued on next page]

- (54) Title:** BI-DIRECTIONAL WELLHEAD SEAL

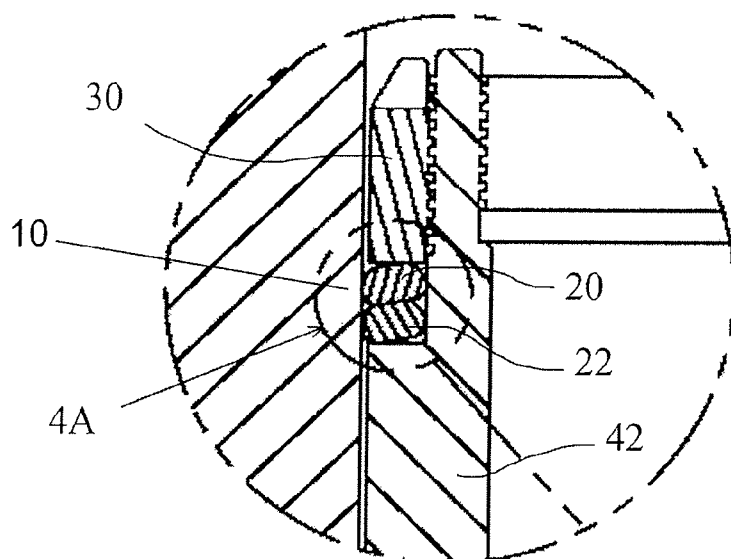


FIG. 4

- (57) Abstract:** A liquid and gas tight bi-directional metal frustro-conical seal is energized by compression between planar, annular faces causing its inner and outer diameters to sealingly engage opposing cylindrical surfaces of inner and outer metal pipes. The contact forces between the concentric sealing surfaces are high in order to locally deform the softer metal and eliminate leakage paths. The sealing ring is backed-up by a similar ring that is reduced in cross-sectional width, such that when compressed the ring does not engage the inner and outer cylindrical surfaces. The second ring is nested with and directly below the sealing ring, and equally axially compressed when the joint is assembled. When the pipe joints are disassembled, the second ring serves to restore the seal ring to its original, deeper frustro-conical shape, allowing the pipe joints to be easily separated for reuse of the piping in a different location.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— of inventorship (Rule 4.17(iv))

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

BI-DIRECTIONAL WELLHEAD SEAL

Cross Reference to Related Application

This application is a continuation of U.S. Application No. 12/635,883, filed on December 11, 2009, and claims priority to U.S. Provisional Application
5 No. 61/138,344, filed on December 17, 2008.

DESCRIPTION

Technical Field

The present invention relates to seals in general, and specifically to compression seals. More specifically, the present invention relates to wellhead
10 assemblies, and to an improved system, method and apparatus for forming a metal seal between inner and outer wellhead members. Ease of assembly and dismantling for reuse are desirable attributes.

Background Art

A variety of metallic seal configurations exist. Many metallic seals are
15 commonly held under compression between two opposed flanges of the elements being sealed to each other. Many examples of metallic seals are of an annular configuration, having a convoluted radial section which permits the seal to act as a spring and maintain engagement with the flanges despite changes or variations in the flange separation. Some of these seals have an S-like section, while others
20 have a section similar to the Greek capital letter sigma (Σ), with diverging base and top portions. Other seals are formed with additional convolutions.

Non-provisional US patent application serial no. 11/610,220, filed December 13, 2006, by Halling, entitled, "SEAL," and incorporated by reference herein, teaches the use of metal seals and, in particular, the use of frustro-conical
25 rings with a rounded-trapezoidal seal cross-section having two parallel sides, for large wellheads, usually provided with hydraulically-actuated systems for assembling and dismantling piping joints therein. For smaller wellheads, such functions must be performed by screw-threaded devices or smaller, radially-disposed hydraulic tools.

-2-

Further descriptions of the prior art are cited and illustrated by Jennings, published in U.S. Publication No. 2008/0265517 A1, entitled, "SYSTEM, METHOD, AND APPARATUS FOR ENERGIZABLE METAL SEALS IN WELL HEADS."

5 Disclosure of Invention

Bearing in mind the problems and deficiencies of the prior art, it is therefore an object of the present invention to provide a bi-directional wellhead seal which prevents leakage of liquid and gas especially for small wellheads.

It is another object of the present invention to provide a bi-directional wellhead
10 seal which is easily disassembled.

Still other objects and advantages of the invention will in part be obvious and will in part be apparent from the specification.

The above and other objects, which will be apparent to those skilled in the art, are achieved in the present invention which is directed to a bi-directional
15 wellhead seal for sealing an inner pipe to a corresponding outer pipe comprising: a sealing ring including a shaped outside diameter having a frustro-conical upper surface and a lower surface; a spring ejector ring including a shaped outside diameter having a frustro-conical upper surface, the spring ejector ring outside diameter less than the sealing ring outside diameter, the spring ejector ring in
20 mechanical communication with the sealing ring upon axial compression of the sealing ring.

In a second aspect, the present invention is directed to a compression seal co-axial pipes comprising: a sealing ring including a frustro-conical outside shape for engaging opposing cylindrical surfaces of the co-axial pipes, such that upon
25 compression, the sealing ring is in mechanical communication with an outside diameter of an inner pipe, and in mechanical communication with an inside diameter of an outer pipe; and a spring ejector ring in contact with the sealing ring, the spring ejector ring including a frustro-conical outside shape of a diameter less than the sealing ring such that upon insertion and absent axial compression,
30 the spring ejector ring forms a gap with the outside diameter of the inner pipe and a gap with the inside diameter of the outer pipe.

-3-

In a third aspect, the present invention is directed to a method for using a bi-directional wellhead seal comprising: providing an inner pipe having external threads on an upper end of the inner pipe and an abutment shoulder below the external threads; providing an outer pipe for sealing with the inner pipe; providing
5 a sealing ring having a shaped outside diameter including a frustro-conical upper surface and a lower surface; providing a spring ejector ring maintaining axial pressure on the sealing ring lower surface upon axial compression of the rings, the spring ejector ring having a shaped outside diameter including a frustro-conical upper surface and having the outside diameter less than the sealing ring outside
10 diameter; providing a sleeve nut having internal threads for attaching to external threads of the inner pipe; placing the spring ejector ring in contact with an abutment shoulder of the inner pipe; placing the sealing ring against the spring ring; and screwing the sleeve nut on the external threads of the inner pipe sufficient to deform the sealing ring such that the inner pipe and outer pipe are
15 sealed from gas or fluid leakage.

Brief Description of the Drawings

The features of the invention believed to be novel and the elements characteristic of the invention are set forth with particularity in the appended
20 claims. The figures are for illustration purposes only and are not drawn to scale. The invention itself, however, both as to organization and method of operation, may best be understood by reference to the detailed description which follows taken in conjunction with the accompanying drawings in which:

Fig. 1 is a cutaway cross section of the bi-directional wellhead seal
25 according to the present invention.

Fig. 1A is an enlarged view of the cross section of the seal shown in Fig.
1.

Fig. 2 is a cross sectional view of the seal ring according to the present
invention.

30 Fig. 3 is a cross sectional view of the spring backing ring according to the present invention.

-4-

Fig. 4 is a cutaway cross section of the bi-directional wellhead seal under compression according to the present invention.

Fig. 4A is an enlarged view of the cross section of the seal shown in Fig. 4.

5 Fig. 5 is a cutaway cross section of a second embodiment of the bi-directional wellhead seal according to the present invention.

Fig. 5A is a cutaway cross section of a second embodiment of the bi-directional wellhead seal under compression according to the present invention.

Modes for Carrying Out the Invention

10 In describing the preferred embodiment of the present invention, reference will be made herein to Figs. 1-5 of the drawings in which like numerals refer to like features of the invention.

Figs. 1 & 1A show a first embodiment of a bi-directional wellhead seal 10 according to the present invention. Wellhead seal 10 includes a one-piece, solid-
15 section sealing ring 20 with a frustro-conical upper surface and lower surface. Seal 10 is compressed between the planar, annular face of an abutment shoulder 40 at the terminal end of a reduced end portion of an inner pipe 42 having a threaded section 50 at its distal end, and an internally-threaded sleeve nut 30 with driving and locking features engaging the threaded portion.

20 As illustrated in Figs. 1 and 1A, in order to facilitate dismantlement of the joint after use, wellhead seal 10 is provided with a non-sealing spring ejector ring or spring backing ring 22 that will free sealing ring 20 when sleeve nut 30 is loosened or removed. Fig. 1A is an expanded view of wellhead seal 10 of Fig. 1 showing the wellhead joint with all components installed, axially touching but
25 without preload tightening of sleeve nut 30. In this illustrative example, spring ejector ring 22 is identical with sealing ring 20 except for removal of some material from the inner and outer diameters, expressing a void or gap 23a, 23b to ensure that spring ejector ring 22 does not jam against the cooperating cylindrical surfaces of the pipes when sealing ring 20 and spring ejector ring 22 are
30 compressed axially.

-5-

As shown in the enlarged cross-sectional views of sealing ring 20 and spring ejector ring 22, in Figs. 2 and 3 respectively, spring ejector ring 22 may be constructed from a sealing ring by removing material from the sealing ring to form the flat surfaces 60, 62. The cross section of spring ejector ring 22 may have other shapes and perform approximately as well, as will be apparent to those skilled in the art. Seal 10 may also be composed of different ring shapes without largely affecting the performance of the joint. For example, seals may be employed with curvatures having smaller or larger radii than currently illustrated. To construct spring ejector ring 22 from a sealing ring, material is removed from the outside and inside diameters of the sealing ring by lathe turning or grinding to produce a shape for spring ejector ring 22 as illustrated in the figures. Alternative approaches, such as the manufacture of a ring with a similar but smaller cross-section for spring ejector ring 22 will also be obvious to those skilled in the art, the only imperatives in the design of this component are its ability to generate sufficient force to eject sealing ring 20, and that contact between the two rings is at a position whereby the reaction force of spring ejector ring 22 when loaded tends to rotate sealing ring 20 in the desired direction.

Figs. 4 and 4A show bi-directional wellhead seal 10 in a preloaded, sealing condition. Sleeve nut 30 is tightened to a pre-determined torque level, at which point the inner and outer surfaces of sealing ring 20 are compressed against the cooperating cylindrical surfaces of the inner and outer pipes. Spring ejector ring 22 has been similarly compressed, but due to the removal or absence of material about its circumference, it is not in contact with either of the pipes. In the preloaded condition, a soft metal coating or softer parent metal of sealing ring 20 is locally deformed to fill all asperities and tool marks in the cooperating surfaces and achieves a gas-tight seal between the two pipes.

A searching, small molecule gas such as helium is employed at low pressure to check for leakage, for example, at about 25 psig to 50 psig. Because gas volumes needed to test long pipe "strings" would be prohibitively expensive if only helium were to be used, the gas is usually a mixture of helium and nitrogen, but the smaller molecular size of the helium makes it the leakage rate determinant.

-6-

The pipe joints are tested using oil and/or gas at very high pressures to simulate the operational uses of the piping systems conducting hydro-carbons. Such testing, including proof testing to provide a safety margin, may be conducted at pressures in excess of 10,000 psig.

5 After testing, which includes high pressure testing, the sealed joints must still be manually separable. Spring ejector ring 22 therefore must be capable of unseating the deformed surfaces of sealing ring 20 and assisting return of the sealing ring to its free state.

10 Figs.5 & 5A illustrate a second embodiment, in which sealing rings 20 and spring ejector rings 22 are double-stacked. This design is preferred in cases where the quality of piping surfaces is questionable and a "series" sealing system is needed to assure adequate leakage control. Fig. 5 depicts the double-stacked seal with sleeve nut 30 in a loosened state. Fig. 5A depicts the seal with sleeve nut 30 tightened.

15 While the present invention has been particularly described, in conjunction with a specific preferred embodiment, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art in light of the foregoing description. It is therefore contemplated that the appended claims will embrace any such alternatives, modifications and variations as falling within
20 the true scope and spirit of the present invention.

Thus, having described the invention, what is claimed is:

-7-

Claims

1. A bi-directional wellhead seal for sealing an inner pipe to a corresponding outer pipe comprising:
 - a sealing ring including a shaped outside diameter having a frustro-conical upper surface and a lower surface;
 - a spring ejector ring including a shaped outside diameter having a frustro-conical upper surface, said spring ejector ring outside diameter less than said sealing ring outside diameter, said spring ejector ring in mechanical communication with said sealing ring upon axial compression of said sealing ring.
2. The bi-directional wellhead seal of claim 1 wherein said spring ejector ring inside diameter is larger than said sealing ring inside diameter.
3. The bi-directional wellhead seal of claim 1 wherein said sealing ring lower surface includes a frustro-conical shape.
4. The bi-directional wellhead seal of claim 1 wherein said spring ejector ring includes a frustro-conical lower surface.
5. The bi-directional wellhead seal of claim 1 including a sleeve nut for compressing said sealing ring upon rotation.
6. The bi-directional wellhead seal of claim 5 wherein said sleeve nut includes internal threads for attaching to external threads of said inner pipe.
7. The bi-directional wellhead seal of claim 1 wherein said sealing ring is comprised of resilient material.
8. The bi-directional wellhead seal of claim 7 wherein said resilient material comprises metal.

-8-

9. The bi-directional wellhead seal of claim 1 wherein said spring ejector ring is comprised of resilient material.
- 5 10. The bi-directional wellhead seal of claim 9 wherein said resilient material comprises metal.
11. A compression seal co-axial pipes comprising:
- 10 a sealing ring including a frustro-conical outside shape for engaging opposing cylindrical surfaces of said co-axial pipes, such that upon compression, said sealing ring is in mechanical communication with an outside diameter of an inner pipe, and in mechanical communication with an inside diameter of an outer pipe; and
- 15 a spring ejector ring in contact with said sealing ring, said spring ejector ring including a frustro-conical outside shape of a diameter less than said sealing ring such that upon insertion and absent axial compression, said spring ejector ring forms a gap with said outside diameter of said inner pipe and a gap with said inside diameter of said outer pipe.
- 20 12. The compression seal of claim 11 including having said spring ejector ring generate sufficient force to eject said sealing ring upon removal of a sealing axial compression force.
- 25 13. The compression seal of claim 11 including having contact between said sealing ring and said spring ejector ring at a position whereby reaction force of said spring ejector ring when loaded will tend to rotate said sealing ring in a desired or predetermined direction.

-9-

14. The compression seal of claim 11 including having said sealing ring and said spring ejector ring in mechanical communication during axial compression such that said sealing ring forms a liquid- or gas-tight seal, or both.
- 5 15. The compression seal of claim 11 including multiple pairs of sealing rings and corresponding spring ejector rings axially aligned between inner and outer coaxial pipes.
- 10 16. The compression seal of claim 11 including having said spring ejector ring form a gap with said outside diameter of said inner pipe and a gap with said inside diameter of said outer pipe upon axial compression of said sealing ring and said spring ejector ring.
17. A method for using a bi-directional wellhead seal comprising:
- 15 providing an inner pipe having external threads on an upper end of the inner pipe and an abutment shoulder below the external threads;
- providing an outer pipe for sealing with the inner pipe;
- providing a sealing ring having a shaped outside diameter
- 20 including a frustro-conical upper surface and a lower surface;
- providing a spring ejector ring maintaining axial pressure on said sealing ring lower surface upon axial compression of said rings, said spring ejector ring having a shaped outside
- 25 diameter including a frustro-conical upper surface and having the outside diameter less than the sealing ring outside diameter;
- providing a sleeve nut having internal threads for attaching to external threads of the inner pipe;
- 30 placing the spring ejector ring in contact with an abutment shoulder of the inner pipe;

-10-

placing the sealing ring against the spring ring; and
screwing the sleeve nut on the external threads of the inner pipe
sufficient to deform the sealing ring such that the inner
pipe and outer pipe are sealed from gas or fluid leakage.

5

18. The method of claim 17 wherein said spring ejector ring inside diameter is
larger than said sealing ring inside diameter.

19. The method of claim 17 wherein said sealing ring includes a frustro-conical
10 lower surface.

20. The method of claim 17 wherein said spring ejector ring includes a frustro-
conical lower surface.

15

1/4

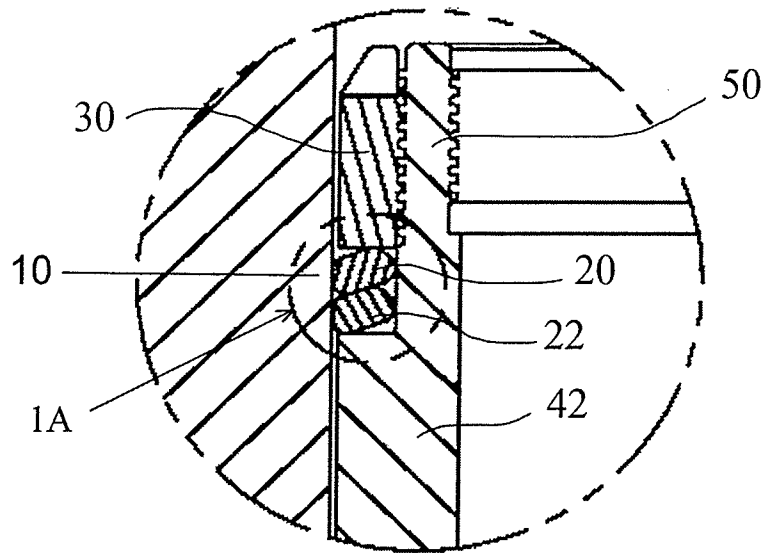


FIG. 1

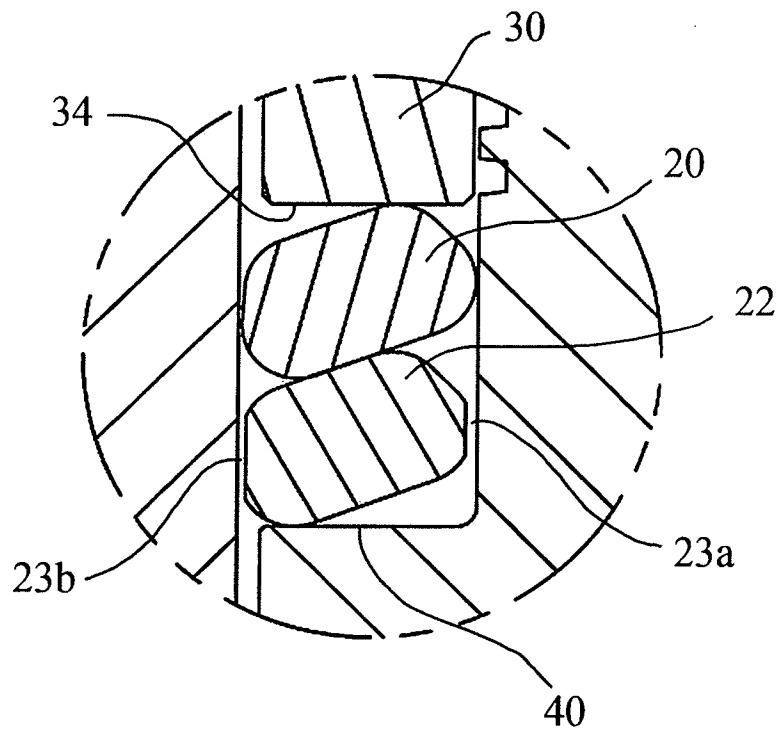


FIG 1A

2/4

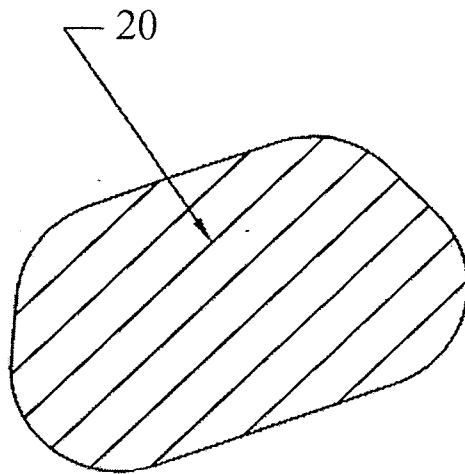


FIG. 2

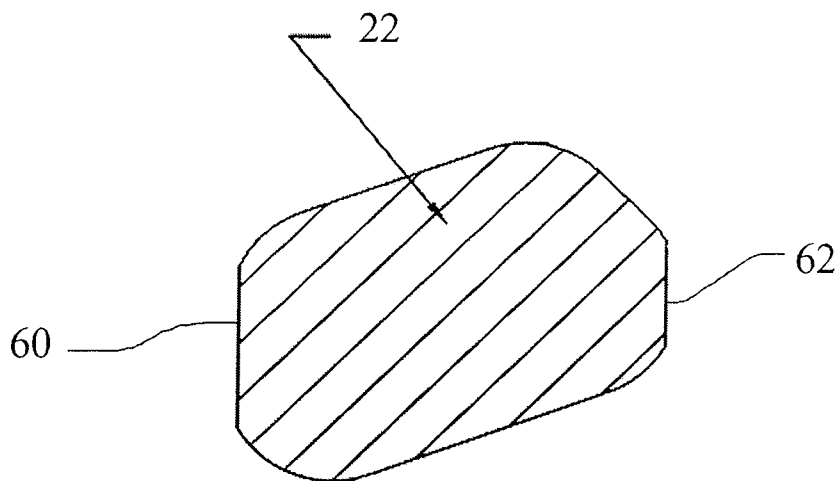


FIG. 3

3/4

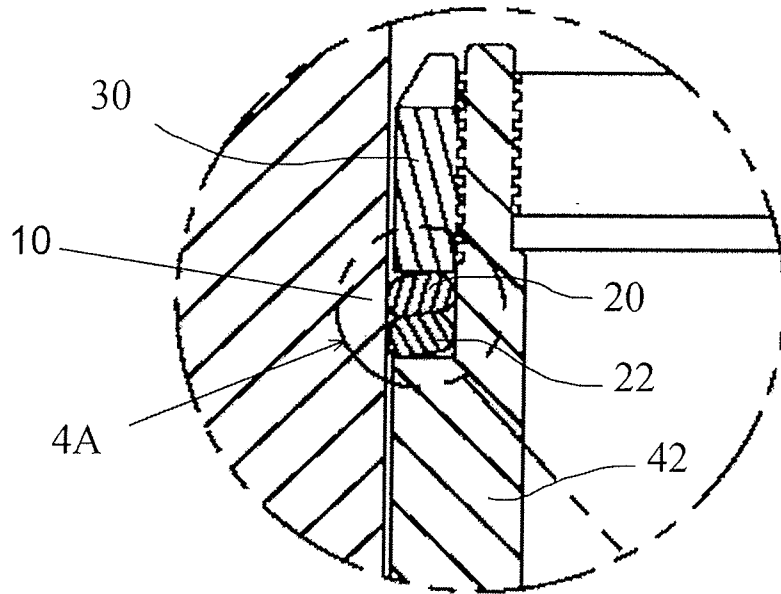


FIG. 4

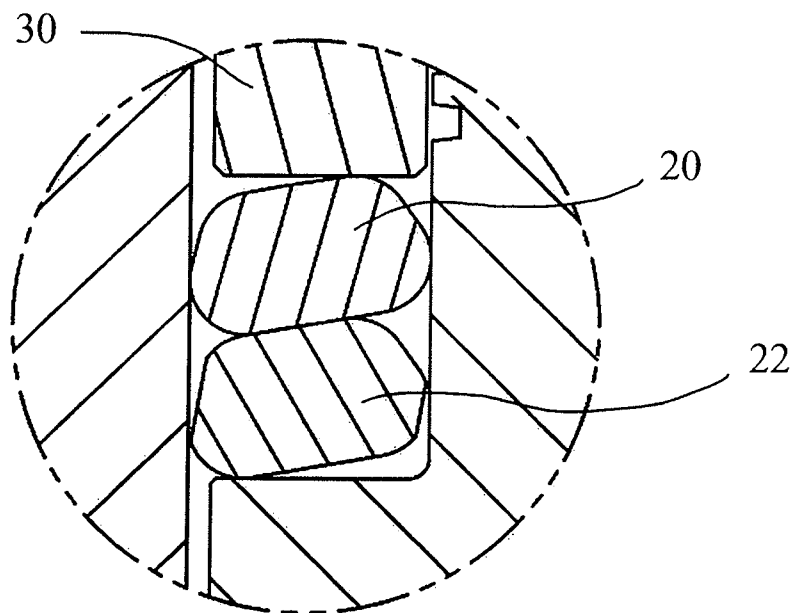


FIG. 4A

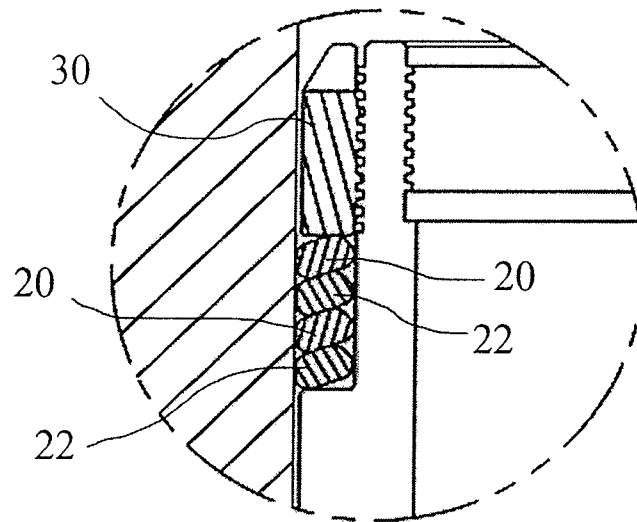


FIG. 5

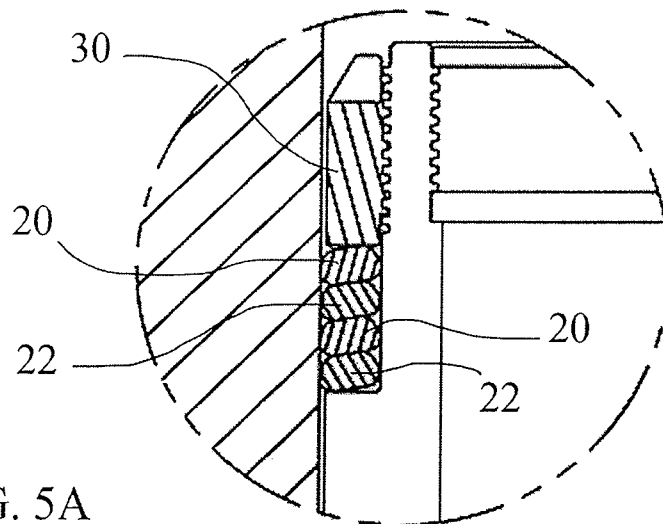


FIG. 5A

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2009/068141

A. CLASSIFICATION OF SUBJECT MATTER <i>E21B 33/03(2006.01)i</i> According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC: E21B 33/03; E21B 33/04; E21B 33/043; F16J 15/06; F16J 15/18; F16L 25/00 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models Japanese utility models and applications for utility models Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & Keywords: bi-directional, wellhead, seal, ring, shape		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5791657 A (DAVID E. CAIN et al.) 11 August 1998 See the abstract; figures 1-3; and claims 1-2	1-20
A	US 5180008 A (TOD ALDRIDGE et al.) 19 January 1993 See the abstract; figures 1-6; and claims 1-7	1-20
A	US 4384730 A (ROBERT J. DIEHL) 24 May 1983 See the abstract; figures 1-3; and claims 1-3	1-20
A	US 6510895 B1 (BASHIR M. KOLEILAT et al.) 28 January 2003 See the abstract; figures 1-4; and claims 1-20	1-20
A	US 4759409 A (STEVEN D. GULLION) 26 July 1988 See the abstract; figures 1-3; and claims 1-8	1-20
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
Date of the actual completion of the international search 25 MAY 2010 (25.05.2010)	Date of mailing of the international search report 27 MAY 2010 (27.05.2010)	
Name and mailing address of the ISA/KR  Korean Intellectual Property Office Government Complex-Daejeon, 139 Seonsa-ro, Seo-gu, Daejeon 302-701, Republic of Korea Facsimile No. 82-42-472-7140	Authorized officer JUNG Sug Woo Telephone No. 82-42-481-8443 	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2009/068141

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5791657 A	11.08.1998	GB 2287734 A	27.09.1995
US 5180008 A	19.01.1993	None	
US 4384730 A	24.05.1983	None	
US 6510895 B1	28.01.2003	WO 02-38913 A1	16.05.2002
US 4759409 A	26.07.1988	EP 0290112 A2	09.11.1988
		EP 0290112 A3	04.10.1989
		EP 0290112 B1	10.03.1993
		JP 63-272890 A	10.11.1988