



HU000025880T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 025 880**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 09 850638**(22) A bejelentés napja: **2009. 10. 22.**(51) Int. Cl.: **B65D 54/68** (2006.01)**B65D 5/36** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20090850638

(86) A nemzetközi (PCT) bejelentési szám:

PCT/SE 09/051203

(97) Az európai bejelentés közzétételi adatai:

EP 2490952 A1 **2011. 04. 28.**

(87) A nemzetközi közzétételi szám:

WO 11049493

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2490952 B1 **2015. 12. 02.**

(72) Feltaláló(k):

PETTERSSON, Claes, S-542 31 Mariestad (SE)
GRENNFELT, Kristian, S-431 59 Mölndal (SE)
KOLEHMAINEN, Jan, S-423 38 Torslanda (SE)
WERNERSSON, Lennart, S-331 53 Värnamo (SE)
HANSSON, Marcus, S-414 69 Göteborg (SE)
CANDER, Mateus, S-463 32 Lilla Edet (SE)
THONFORS, Patrik, S-417 63 Göteborg (SE)
ANDERSSON, Peter, S-542 31 Mariestad (SE)
GUNGNER, Susanne, S-446 36 Älvängen (SE)

(73) Jogosult(ak):

SCA Hygiene Products AB, 405 03 Göteborg (SE)

(74) Képviselő:

Danubia Szabadalmi és Jogi Iroda Kft., Budapest

(54)

Összehajtogatható kartonpapír doboz

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 490 952 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
02.12.2015 Bulletin 2015/49

(21) Application number: **09850638.9**

(22) Date of filing: **22.10.2009**

(51) Int Cl.:
B65D 5/468 ^(2006.01) **B65D 5/36** ^(2006.01)

(86) International application number:
PCT/SE2009/051203

(87) International publication number:
WO 2011/049493 (28.04.2011 Gazette 2011/17)

(54) **COLLAPSIBLE CARDBOARD BOX**

KLAPPBOX AUS KARTON

BOÎTE EN CARTON REPLIABLE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(43) Date of publication of application:
29.08.2012 Bulletin 2012/35

(73) Proprietor: **SCA Hygiene Products AB**
405 03 Göteborg (SE)

(72) Inventors:

- **PETTERSSON, Claes**
S-542 31 Mariestad (SE)
- **GRENNFELT, Kristian**
S-431 59 Mölndal (SE)
- **KOLEHMAINEN, Jan**
S-423 38 Torslanda (SE)
- **WERNERSSON, Lennart**
S-331 53 Värnamo (SE)
- **HANSSON, Marcus**
S-414 69 Göteborg (SE)

- **CANDER, Mateus**
S-463 32 Lilla Edet (SE)
- **THONFORS, Patrik**
S-417 63 Göteborg (SE)
- **ANDERSSON, Peter**
S-542 31 Mariestad (SE)
- **GUNGNER, Susanne**
S-446 36 Älvängen (SE)

(74) Representative: **Zacco Sweden AB**
P.O. Box 5581
114 85 Stockholm (SE)

(56) References cited:

FR-A1- 2 116 269	FR-A3- 2 742 731
GB-A- 2 377 921	JP-U- 50 019 847
JP-U- 50 123 643	JP-U- 54 021 034
JP-U- 57 159 616	US-A- 1 532 316
US-A- 4 406 380	US-A1- 2004 031 842

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The invention refers to a collapsible cardboard box comprising, in an erected state, a back wall, an opposing front wall, a first side wall and an opposing second side wall, the box also comprising a bottom side being made from folding together a front portion being attached to the front wall, a back portion attached to the back wall, a first side portion being attached to the first side wall and a second side portion being attached to the second side wall.

BACKGROUND ART

[0002] It is long known to use corrugated collapsible containers in the form of cardboard boxes formed from a blank. The box has in its erected state at least five sides and in its collapsed state the box can either be unfolded and then folded over itself, i.e. double folded, or may be unfolded to return to the blank state. When the box is in its collapsed state a double folded device is advantageous since it takes up less space than the blank state. Hence, the invention refers in general to boxes that are collapsed into a double folded device, i.e. into a double folded state.

[0003] There are known many different ways to knock-down a box from the erected state to the collapsed state. For example, GB 559084 teaches to knock-down the box into a double folded state by folding two opposing side walls over a centrally placed fold line and GB231697 teaches to knock-down a box by folding a rectangular cuboid shaped box over two diagonally opposed fold lines positioned in line with the corners of the box. The rectangular box then makes its transition to collapsed state over a parallelogram shape so that, in its collapsed state, the double folded box comprises a front wall and a first side wall opposite a back wall and a second side wall.

[0004] Another collapsible cardboard box is known from JP 50 123643U.

DISCLOSURE OF INVENTION

[0005] Even though the collapsible, knock-down, box has been known for many years a problem still remains. Namely, boxes collapsed into a double folded device/state are hard to carry due to their square or rectangular shape, especially if the double folded device is large and/or if many double folded devices are to be carried at the same time.

[0006] When describing the invention, a number of descriptive words have been used in order for facilitating the description of the invention, for example front, back, side, top and bottom. It should be noted that these words have no limiting effect as such and do not refer to an actual front, back or side, but are interchangeable and/or

replaceable with another word. However, if you have, for example, a five sided box it is normal to name that part supposed to be facing the ground the bottom.

[0007] The invention suggests solving this problem with a collapsible cardboard box comprising, in an erected state, a back wall, an opposing front wall, a first side wall and an opposing second side wall. The box comprises also a bottom side being made from folding together a front portion being attached to the front wall, a back portion being attached to the back wall, a first side portion being attached to the first side wall and a second side portion being attached to the second side wall. In a collapsed state, the box comprises a first through hole positioned in the front portion and a second through hole positioned in the back portion, and wherein the front portion comprises a third through hole and the back portion comprises a fourth through hole. In the collapsed state, the bottom side has been unfolded and the front portion, the back portion, the first side portion and the second side portion of the box have been folded over predetermined folding lines in such a way that the first and second through holes are in line with each other and/or that the third through hole and the fourth through hole are in line with each other forming a handle for allowing a person to carry the collapsed box by use of the first, second, third and fourth through holes. One advantage of the invention is that this standard type of cardboard box can be folded and then be carried by use of the handle instead as before having to grip about the side edges of the collapsed box.

[0008] Here, attachment could mean that a portion, for example the front portion, and a wall, for example the front wall, are made from one piece, e.g. a blank, but divided into the different parts by a folding line. Attachment could also mean that a portion, for example the front portion, and a wall, for example the front wall, are two pieces being forged to each other by any means known in the art, for example gluing, welding, mechanical pressure, and/or stitching. The forged portion will then have a use as a fold line when erecting or collapsing the box.

[0009] The box could be formed from a blank comprising the front wall, the back wall, the first and second side walls, the front portion, the back portion and the first and second side portions.

[0010] The advantage of using a blank is that it is easy to manufacture the box.

[0011] It is advantageous if, in the collapsed state, the front portion and the back portion, at least partly, are in contact with each other, since this allows for the user to secure the collapsed box in its folded position by grabbing/gripping the handle.

[0012] The method of knocking down the box can vary dependent on how the first and second through holes are positioned in the front portion and the back portion respectively. The bottom side shall be unfolded and then the box shall be folded about fold lines existing in the corner lines of the box into a double folded box via a

parallelogram shape so that the front wall faces at least a part of the first side wall; or should be folded over symmetrical fold lines positioned in the first and second side walls and first and second side portions such that the front wall faces only the back wall. These methods are simple and robust.

[0013] Here, "corner lines" means that part of the box existing in the transition area between the front wall, back wall, first side wall and second side wall.

[0014] These methods also normally means that, in both the collapsed state and the erected state, the front wall, the first side wall, the back wall and the second side wall are attached to each other.

[0015] Two examples will now be presented for creating the first, second, third and fourth through holes. However, only with reference to the first and second through holes are made.

[0016] In the first example; the front portion comprises the first through hole and the back portion comprises the second through hole, when the box is both in the erected state and in the collapsed state. Hence, the holes are pre-made.

[0017] In the second example; when the box is in the erected state, the front portion comprises a first area with weak perimeter, which first area is attached to an underlying part of the box in such a way that when unfolding the front portion the weak perimeter breaks and the first area stays attached to the underlying part wherein the first through hole is created, and wherein the back portion comprises a second area with weak perimeter, which second area is attached to an underlying part of the box in such a way that when unfolding the back portion the weak perimeter breaks and the second area stays attached to the underlying part wherein the second through hole is created. The first and second through holes are thus created when the box is collapsed for the first time. This also means that the first and second area must be permanently attached to an underlying or overlying portion of the box that allows for the weak perimeter to break and for the first and second area to stay attached. The erection of the box could be made in a manufacturing plant or the erection could be made by a user that erects the box upon use. The first and second areas could therefore be equipped with attachment means with or without a protective layer that could be removed before the erection for attaching the first and second area to the underlying or overlying portion. However, the attachment means could also be applied upon erection for attachment of the first and second area. Furthermore, the entire front portion and back portion could be attached to the first and second side portions to secure the box in the erected state. When collapsing the box, the bottom side is unfolded by breaking the bond between the front portion and the first and second side portions; and breaking the bond between the back portion and the first and second side portions. Since the first and second areas have weak perimeters being weaker than the bond, the areas stay attached to the first and second side portions re-

spectively instead of breaking the bond.

[0018] In the collapsed state, the first through hole and the second through hole are advantageously positioned to allow a person to balance the collapsed box approximately about the centre of gravity of the collapsed box. This has the advantage that the collapsed box becomes easier to carry.

BRIEF DESCRIPTION OF DRAWINGS

[0019] The invention will below be described in connection to a number of drawings, in which:

Fig. 1 schematically shows a perspective view of an erected five sided cardboard box that is not part of the invention with a bottom side of the box facing the reader;

Fig. 2 schematically shows a front view of a collapsed cardboard box according to figure 1;

Fig. 3 schematically shows a front view of a collapsed cardboard box according to figure 1, but with an additional top side;

Fig. 4 schematically shows a perspective view of an erected five sided cardboard box according to an example of the invention with a bottom side of the box facing the reader;

Fig. 5 schematically shows a perspective view of an erected five sided cardboard box that is not part of the invention with a bottom side of the box facing the reader

Fig. 6 schematically shows a front view of a collapsed cardboard box according to figure 5;

Fig. 7 schematically shows a front view of a collapsed cardboard box according to figure 5, but with an additional top side;

Fig. 8 schematically shows a front view of a blank comprising all elements making up a six sided box that is not part of the invention;

Fig. 9 schematically shows a front view of a blank comprising all elements making up a six sided box 1 according to an example of the invention, and in which;

Fig. 10 schematically shows a box 1 having a quadratic cross-section that is not part of the invention.

EMBODIMENT(S) OF THE INVENTION

[0020] Figure 1 schematically shows a perspective view of an erected five sided cardboard box 1 that is not

part of the invention with a bottom side 2 of the box facing the reader. The collapsible cardboard box 1 comprises, in the erected state, a front wall 3, an opposing back wall 4, a first side wall 5 and an opposing second side wall 6. The front wall 3, the back wall 4, the first side wall 5 and the second side wall 6 are attached to each other forming a box with a cube or rectangular cuboid shape. In figure 1, the front wall 3 and the back wall 4 is essentially of the same width L1 and height L2. The first side wall 5 and the second side wall 6 are essentially of the same width L3 and height L2. The height L2 of the front wall 3, the back wall 4, the first side wall 5 and the second side wall 6 is essentially equal. If the front wall width and back wall width L1 is equal to the first and second side wall width L3 and equal to the height L2, the box is cubic shaped but if any one of L1, L2 or L3 is different from the other the box 1 is in the shape of a rectangular cuboid.

[0021] In figure 1, the box 1 also comprises a bottom side 2 being made from folding together a front portion 7 being attached to the front wall 3, a back portion 8 attached to the back wall 4, a first side portion 9 being attached to the first side wall 5 and a second side portion 10 being attached to the second side wall 6.

[0022] Here attachment could mean that a portion 7-10, for example the front portion 7, and a wall 3-6, for example the front wall 3, are made from one piece, e.g. a blank, but divided into the different parts by a folding line. Attachment could also mean that the a portion 7-10, for example the front portion, and a wall 3-6, for example the front wall 3, are two pieces being forged to each other by any means known in the art, for example gluing, welding, mechanical pressure, and/or stitching. The forged portion will then have a use as a fold line when erecting or collapsing the box.

[0023] In figure 1, the front portion 7 and the front wall 3 is made from one piece comprising a predetermined first fold line 11 dividing the front portion 7 and the front wall 3. The back portion 8 and the back wall 4 are made from one piece comprising a predetermined second fold line 12 dividing the back portion 8 and the back wall 4. The first side portion 9 and the first side wall 5 are made from one piece comprising a predetermined third fold line 13 dividing the first side portion 9 and the first side wall 5. The second side portion 10 and the second side wall 6 are made from one piece comprising a predetermined fourth fold line 14 dividing the second side portion 10 and the second side wall 6.

[0024] The box has a first corner fold line 15 between the front wall 3 and the first side wall 5, a second corner fold line 16 between the front wall and the second side wall, a third corner fold line 17 between the back wall 4 and the first side wall 5, and a fourth corner fold line 18 between the back wall 4 and the second side wall 6. The first, second, third and fourth corner fold lines, 15-18 are used both when the box 1 is erected and collapsed.

[0025] The above mentioned fold lines 11-18 are predetermined zones that serve as guides for folding and unfolding the box. The fold lines 11-18 can be made in

any way known in the art, for example creased, weakened, reinforced, or slit.

[0026] The box in figure 1 is collapsed by unfolding the bottom side 2 and then collapsed over the first, second, third and fourth corner fold lines 15-18. A cubic or rectangular cuboid shaped box 1 then makes its transition to a collapsed state over a parallelogram shape so that, in its collapsed state, the double folded box 1 comprises the front wall 3 and the first side wall 5 opposite the back wall 4 and the second side wall 6.

[0027] The box 1 could be formed from a blank comprising the front wall 3, the back wall 4, the first and second side walls 5, 6, the front portion 7, the back portion 8 and the first and second side portions 9, 10. An example of such a blank is described in connection to figures 8 and 9.

[0028] In figure 1, the front portion 7 comprises a first through hole 19 and the back portion 8 comprises a second through hole 20. The first and second through holes 19, 20 are positioned such that when the box 1 is collapsed the first and second through holes are in line and form a grip. The advantage of the grip is that a user easily can carry one or more collapsed boxes. This will be described further below and in connection to figures 2-8.

[0029] The first and second through holes 19, 20 can be pre-made, i.e. can be a permanent feature in both the erected state and the collapsed state. The first and second through holes can also be created when the box 1 is collapsed for the first time, i.e. when unfolding the bottom side 2, by allowing parts/areas to be separated from the front portion 7 and back portion 8 respectively thereby creating the first and second through holes. The latter example will be explained also in detail in connection to figures 8 and 9.

[0030] The method for folding the front portion 7, the back portion 8, the first side portion 9 and the second side portion 10 into the bottom side 2 is dependent on whether the first and second through holes 19, 20 are pre-made or if they should be created when unfolding the bottom side 2. If the first and second through holes 19, 20 are pre-made it is not necessary on account of the first and second through holes 19, 20 how the bottom side 2 is created since the first and second through holes 19, 20 are already present in the correct position. However account should be taken to the size of the front portion 7, back portion 8, first side portion 9 and second side portion 10 regarding whether if the first through hole 19 and/or the second through hole 20 could be accepted as a through hole in the erected box or if the first and/or second through hole 20 should be covered with a part of any of the front portion 7, back portion 8, first side portion 9 and/or the second side portion 10.

[0031] If the first and second through holes 19, 20 are to be created when unfolding the bottom side 2, the first and second side portion 9, 10 advantageously are folded before the front portion 7 and back portion 8 since the parts/areas that are to be separated from the front portion 7 and back portion 8 respectively have to be permanently

attached to an underlying material, advantageously the first side portion 9 and the second side portion respectively. The advantage lies in the simplicity of folding together the bottom side 2 and the simplicity during manufacturing of the box, since essentially there is only needed one rectangular blank with slits forming the front portion 7, the back portion 8 the first side portion 9 and the second side portion 10. This will be explained further in connection to figures 8 and 9.

[0032] Figure 1 shows a box 1 with dimensions and method of folding the front portion 7, the back portion 8, the first side portion 9 and the second side portion 10 into the bottom side 2 that allows for both pre-made first and second through holes 19, 20 and first and second through holes 19, 20 that are to be created when unfolding the bottom side 2.

[0033] In figure 1 the first side portion 9 and the second side portion 10 is folded before the front portion 7 and the back portion 8. Hence, the front portion 7 partly overlies both the first side portion 9 and the second side portion 10 and the back portion 8 partly overlies both the first side portion 9 and the second side portion 10. The front portion 7 and the back portion 8 form an outer bottom surface 21 onto which the box 1 can rest.

[0034] In figure 1 the dimensions of the box 1 have the following denotations:

L1 is the width of the box 1 in a longitudinal direction X, i.e. the width of the front wall 3, the back wall 4, the bottom side 2, the front portion 7, the back portion 8 and an opening 22 in a five sided box, or a top side in a six sided box, taken between the first side wall 5 and the second side wall 6.

L2 is the height of the box 1 in a height direction Z, i.e. the height of the front wall 3, the back wall 4, the first side wall 5 and the second side wall 6 taken between the bottom side 2 and, for a five sided box, the opening 22; or, for a six sided box, taken between the bottom side 2 and the top side.

L3 is the width of the box 1 in a lateral direction Y, i.e. the width of the bottom side 2, the first side wall 5, the second side wall 6, the first side portion 9, the second side portion 10 and the opening in a five sided box, or the top side in a six sided box, taken between the front wall 3 and the back wall 4.

L1a is the width of the first side portion 9 taken from the first side wall 5.

L1a1 is the distance from the first side wall 5 to the centre of the first through hole 19 in the front portion 7. Here centre of the first through hole 19 refers to a geometrical representation of the centre of gravity of the first through hole.

L1b is the width of the second side portion 10 taken

from the second side wall 6.

L1b1 is the distance from the second side wall 6 to the centre of the second through hole 20 in the back portion 8. Here centre of the second through hole refers to a geometrical representation of the centre of gravity of the second through hole 20.

L3a is the width of the front portion 7 taken from the front wall 3.

L3a1 is the distance from the front wall 3 to the centre of the first through hole 19 in the front portion 7.

L3b is the width of the back portion 8 taken from the back wall 4.

L3b1 is the distance from the back wall 4 to the centre of the second through hole 20 in the back portion 8.

[0035] As mentioned above, figure 1 shows that the first and second side portions 9, 10 have been folded before the front portion 7 and the back portion 8. In figure 1, L1a is essentially equal to L1b which is essentially equal to L1 divided by two; and L3a is essentially equal to L3b which is essentially equal to L3 divided by two. This gives that the first and second side portions 9, 10 do not overlap each other and that the front portion 7 and back portion 8 do not overlap each other. This has the advantage that the outer bottom surface 21 becomes planar and also has the advantage of a simple manufacturing method since a rectangular blank can be used for erecting the box 1. It should be noted that L1a could be equal to, larger than or less than L1b, with $L1a + L1b \leq L1$, with the bottom surface 21 still being planar since the first and second side portions 9, 10 do not overlap each.

[0036] As mentioned above, the bottom side 2 can be created by various methods of folding the front portion 7, back portion 8, first side portion 9 and second side portion 10 into the bottom side. Said portions 7-10 may have various shapes and sizes, but if the first and second through holes 19, 20 are to be created when unfolding said portions 7-10 below two examples gives information on how the parts/areas can be permanently attached to the first side portion 9 and second side portion 10 respectively:

Example 1:

$$L1a \geq L1a1$$

and

$$L1b \geq L1b1$$

which means that the first side portion 9 has an extension L1a from the first side wall 5 that exceeds the distance L1a1 from the first side wall 5 to the centre of the first through hole 19 in the front portion 7, and that the second side portion 10 has an extension L1b from the second side

wall 6 that exceeds the distance L1b1 from the second side wall 6 to the centre of the second through hole 20 in the back portion 8. In this way the front portion 7 overlaps the first side portion 9 and the back portion 8 overlaps the second side portion 10 such that the parts/areas that are to be removed may be attached to the corresponding underlying portion.

Example 2:

$L3a \geq L3-L3b1$
and

$L3b \geq L3-L3a1$

which means that the front portion 7 has an extension L1a from the front wall 3 that exceeds the distance L3-L3a1 from the front wall 3 to the centre of the first through hole 19 in the back portion 8, and that the back portion 8 has an extension L3b from the back wall 4 that exceeds the distance L3-L3a1 taken from the back wall 4 to the centre of the first through hole 19 in the back portion 8. In this way the front portion 7 and the back portion 8 overlaps each other in such a way that the parts/areas that are to be removed may be attached to an underlying and an overlying portion. If only a part of the front portion has an extension L1a from the front wall 3 that exceeds the distance L3-L3a1 from the front wall 3 to the centre of the first through hole 19 in the back portion 8, and that only a part of the back portion 8 has an extension L3b from the back wall 4 that exceeds the distance L3-L3a1 taken from the back wall 4 to the centre of the first through hole 19 in the back portion 8, then the front portion 7 and the back portion 8 could overlap each other in such a way that the two parts/areas that are to be removed may be attached to an underlying portion. For the front portion 7, the underlying portion could be the back portion 8 if the back portion 8 has a slit in the lateral direction. For the back portion 8, the underlying portion could be the front portion 7 if the front portion 7 has a slit in the lateral direction. If the front portion 7 has a stepwise formation the underlying portion could, for the back portion 8, be the first side portion 9 or the second side portion 10. If the back portion 8 has a stepwise formation the underlying portion could, for the front portion 7, be the first side portion 9 or the second side portion 10.

[0037] If the pre-made first and second through holes 19, 10 are not to be allowed to be a through hole in the box 1, either the first side portion 9 must have an extension L1a, taken from the first side wall 5, such that the first through hole 19 is covered and the second side por-

tion 10 must have an extension L1b, taken from the second side wall 6, such that the second through hole 20 is covered; or the first side portion 9 must have an extension L1a, taken from the first side wall 5, such that the first through hole 19 and the second through hole are covered; or the second side portion 10 must have an extension L1b, taken from the second side wall 6, such that the first through hole 19 and the second through hole 20 are covered; or at least a part of the front portion 7 must have an extension L3a, taken from the front wall 3, such that the second through hole 20 is covered and at least a part of the back portion 8 must have an extension L3b, taken from the back wall 4, such that the first through hole 19 is covered.

[0038] A non-exhaustive list of examples of limitations for the box is as follows:

$$L1a \leq L1$$

$$L1b \leq L1$$

$$L3a \leq L3$$

$$L3b \leq L3 \quad 0 \leq L1a1 \leq L1$$

$$0 \leq L1b1 \leq L1$$

$$0 \leq L3a1 \leq L3a$$

$$0 \leq L3b1 \leq L3b$$

[0039] Here it could be deduced that, for example, when you move the oval first through hole 19 as depicted to a position where $L1a1 = 0$ or $L3a1 = L3a$, then only half the hole remains and the centre of gravity is no longer the same. However, if the centre of gravity was allowed to change with the diminished size of the hole, there would finally only be an infinitesimal slot left; or worse, if $L1a1 = 0$ and $L3a1 = L3a$ there would be only a singularity. Therefore, the definition of centre of gravity here refers to the geometrical representation of an imaginary hole being symmetric about an imaginary axis and when $L1a1 = 0$ or $L3a1 = L3a$ the imaginary axis becomes the zero axis that delimits the hole into half its original shape. When $L1a1 = 0$ and consequently $L1b1 = 0$ the other symmetrical half of the first through hole 19 could be positioned in the first side portion 9 and the other symmetrical half of the second through hole 20 could be positioned in the second side portion 10, such that when the box 1 is in the collapsed state the symmetrical halves in the front portion 7 and the first side portion 9 form the first through hole 19 and such that the symmetrical halves in the back portion 8 and the second side portion 10 form the second through hole 20 being in line forming a handle. Hence, when the first and second through holes 19, 20 are larger than $L1a1$ and $L1b1$ respectively a portion of the first through hole 19 could be positioned in the front portion 7 and the remaining portion of the first through

hole 20 could be positioned in the first side portion 9 and a portion of the second through hole 20 could be positioned in the back portion 8 and the remaining portion of the second through hole 20 could be positioned in the second side portion 10. Ultimately, $L1a1 = 0$ and consequently $L1b1 = 0$ and the first and second through holes 19, 20 are split in halves according to the above. This embodiment will be explained further in connection to figure 10.

[0040] It should be noted that the labelling of the different parts of the box in connection to figures 1-8 is only to facilitate the description of the invention. The front wall could be the back wall and the bottom side could be a top side. The five sided box could also be a six sided box with a top side and a bottom side. What is described in connection to figures 1-8 regarding the through holes in the front and back portions of the bottom side could as well refer to through holes in a front portion and a back portion being part of a top side, or the through holes could in a six sided box be positioned in the front portion and the back portion of both the top side and the bottom side so that the user could chose which grip to use.

[0041] Figure 2 schematically shows a front view of a collapsed cardboard box 1 according to figure 1. Figure 2 shows that the bottom side 2 has been unfolded and that the other parts of the box 1 has been folded in such a way that at least a part of the front wall 3 and at least a part of the back wall 4 face each other. Figure 2 shows that the box in its collapsed state comprises the first through hole 19 in the front portion 7 in line with the second through hole 20 in the back portion 8.

[0042] The first through hole 19 is positioned at a first distance $L3a-L3a1$ from a longitudinally X extending front portion edge 23 and the second through hole 20 is positioned at a second distance $L3b-L3b1$ from a longitudinally X extending back portion edge 24. The first distance $L3a-L3a1$ defines a first gripping area 25 in the front portion and the second distance $L3a-L3a1$ defines a second gripping area 26 in the back portion 8. The first and second gripping areas 25, 26 are essentially in line with each other and form a handle 27 for allowing a person to carry the collapsed box 1 by use of the first and second through holes.

[0043] In order for the first and second through holes to be aligned with each other the following has to be true:

$L3a-L3a1$ is essentially equal to $L3b-L3b1$

and

$L3b1$ is essentially equal to $L3a1$

and

$L3a$ is essentially equal to $L3b$

and

$L3a1$ is essentially equal to $L3b1$

and

$L1a1$ is essentially equal to $L1b1$

and

$L3+L1a1$ is essentially equal to $L3+L1b1$

[0044] As been discussed in connection to figure 1, the first side portion 9 and the second side portion 10 may have different size than the front portion 7 and the back portion 8 within the limitations described regarding pre-made first and second through holes 19, 20 or first and second through holes 19, 20 being created when unfolding the bottom side.

[0045] The symmetry of the box 1 and the alignment of the first and second through holes 19 gives that the opening and thus the handle 27 is positioned for allowing a person to balance the collapsed box approximately about the centre of gravity of the collapsed box 1.

[0046] If $L1=L3$ (not shown) the bottom side is quadratic and the only possible solution for collapsing the box via the corner fold lines 15-18 and getting the first and second through holes 19, 20 in line with the centre of gravity of the collapsed box is if: a first half of the first through hole 19 is positioned in the front portion 7 and if a second half of the first through hole 19 is positioned in the first side portion 9 together forming the first through hole 19 with a centre of gravity in line with the centre of gravity of the collapsed box; and at the same time a first half of the second through hole 20 is positioned in the back portion 8 and if a second half of the second through hole 20 is positioned in the second side portion 10 together forming the second through hole 20 with a centre of gravity in line with the centre of gravity of the collapsed box 1. Another solution to this problem is described in connection to figures 5-7.

[0047] The shape of the first and second through holes 19, 20 are advantageously such that a human user could fit the hand into the through holes, i.e. e.g. oval or rectangular shapes are possible, but not limiting for the invention. An elongated hole is therefore advantageous.

[0048] The first and second gripping areas 25, 26 should be long and thick enough for allowing a user to grip around at least one handle 27 and advantageously to be able to grip around several handles 27 of different collapsed boxes for simultaneous transport of many collapsed boxes. Since the size of the hand differs from person to person it would be unfair to state exact parameters for the opening and the handle, but a person skilled in the art could find a suitable best fit by use of known statistics on the most "normal" size of a hand.

[0049] Furthermore, the first and second through holes could also be used for storing and/or transporting one or more boxes by use of a machine. Such a machine would then comprise protruding means that could be fit into the

opening. This mechanical option could have impact on the size of the through holes and the handle in a trade off for best fit between machine and hand.

[0050] In figure 2 the front wall 3 and the back wall 4, at least partly, are in contact with each other for allowing the user to secure the collapsed box 1 in its folded position by grapping the handle 27.

[0051] In figure 2 the front wall 3, the front portion 7, the first side wall and the first side portion form a first side unit 28 of the collapsed box 1 and the back wall 4, the back portion 8, the second side wall 6 and the second side portion 10 form a second side unit 29. The first side unit 28 and the second side 29 unit face each other and are, at least partly, in contact with each other for allowing the user to secure the collapsed box 1 in its folded position by grabbing the handle 27.

[0052] Figure 3 schematically shows a front view of a collapsed cardboard box according to figure 1, but with an additional top side 30 to replace/cover the opening in figure 1. The top side 30 could be formed from a lid comprising one or many parts. In figure 3 the top side has been unfolded but figure 3 shows that the top side 30 comprises a top front portion 7a, a top back portion 8a, a top first side portion 9a and a top second side portion 10a which could be folded and equipped with a top first through hole 19a in the top front portion 7a and a top second through hole 20a in the top back portion 8a in accordance with what has been described in connection to figures 1-2.

[0053] Figure 4 schematically shows a perspective view of an erected five sided cardboard box 1 according to an example of the invention with a bottom side 2 of the box 1 facing the reader. The difference between the example in figure 4 and what has been described in connection to figures 1-3 is that there are four through holes 19, 20, 31, 32 instead of two. The description of the position of the through holes 19, 20, 31, 32 and the box 1 in connection to figures 1-3 is valid also for figure 4. The four through holes 19, 20, 30, 31 gives a user the opportunity to collapse the box 1 such that any pair of diagonally positioned through holes 19, 20, 30, 31 becomes in line with each other to form a handle 27 when the box 1 is collapsed. In figure 1 the first through hole 19 should be matched with the second through hole 20 as described in connection to figures 1-3, or a third through hole 30 could be matched to a fourth through hole 31. In figure 4, the first through hole 19 is positioned in the front portion 7 over the first side portion 9, the second through hole 20 is positioned in the back portion 8 over the second side portion 10, the third through hole 30 is positioned in the front portion 7 over the second side portion 10, and the fourth through hole 32 is positioned in the back portion 8 over the first side portion 9. In short, the above gives the advantage that a handle is always created no matter how the user collapses the box.

[0054] Figure 5 schematically shows a perspective view of an erected five sided cardboard box with a bottom side of the box facing the reader. The description of the

box 1 and position of the first and second through holes 19, 20 are referred to the description in connection of figures 1-4. In figure 5 the first through hole 19 is positioned symmetrically with reference to the first side wall 5 and the second side wall 6, i.e. $L1a=L1b=L1a1=L1b1=L1/2$ and the second through hole 20 is positioned symmetrically with reference to the first side wall 5 and the second side wall 6, i.e. $L1a1=L1b1=L1/2$. From figures 1-5 and corresponding description it can be deduced that, for the first through hole 19 to be aligned with the second through hole 20 when the box 1 is in the collapsed state, the first side wall 5 and the second side wall 6 must be folded over a symmetrical fold line 33 extending in the height direction Y, i.e. from the bottom side to the opening of a five sided box 1 or to the top side in a six sided box 1. The symmetrical fold lines 33 are positioned in the first side wall and the second side wall at a distance $L3/2$ from the front wall 3 and the back wall 4. The nature of the fold line has been discussed in connection to figures 1-4.

[0055] It should be noted that this example gives the possibility to have the first and second through holes 19, 20 positioned off the centre of gravity of the collapsed box, since the box is collapsed over the symmetrical fold line 35. This example also allows for simultaneous matching of many holes positioned in the front portion 7, back portion 8, first side portion 9 and second side portion 10 because of the symmetry rules allowed by the symmetrical fold line 35.

[0056] Figures 6 and 7 schematically shows a front view of the collapsed cardboard box according to figure 5. Figure 6 shows a five sided box 1 with an opening 22 and figure 7 shows a six sided box with a top side 30 replacing the opening. The box and the position of the first and second through holes have been described in connection to figures 1-7.

[0057] Fig. 8 schematically shows a front view of a blank comprising all elements making up a six sided box 1. The description of the holes geometries etcetera in figures 1-7 is valid also for figure 8.

[0058] The box 1 is formed from a blank 34 comprising the front wall 3, the back wall 4, the first and second side walls 5, 6, the front portion 7, the back portion 8 and the first and second side portions 9, 10. The blank 34 has been slit between: the front portion and the first side portion; and between the front portion 7 and the second side portion 10; and between the back portion 8 and the first side portion 9.

[0059] As been described in connection to figure 3, the top side comprises a top front portion 7, a top back portion 8, a top first side portion 9 and a top second side portion 10 which could be folded and equipped with a top first through hole (not shown) in the top front portion (not shown) and a top second through hole in the top back portion 8 in accordance with what has been described in connection to figures 1-2.

[0060] The blank 34 has been slit between: the top front portion and the top first side portion; and between

the top front portion 7 and the top second side portion 10; and between the top back portion 8 and the top first side portion 9.

[0061] The length of each slit defines L1a, L1b, L3a and L3b. In figure 8, L1a=L1b=L3a=L3b, but can vary dependent on hole position, folding methods etc. which have already been discussed in connection to figures 1-7. In figure 8 L1a, L1b, L3a and L3b refers both to the top side portions and to the bottom side portions, but it should be noted that this is just to easily describe the invention. The parameters L1a, L1b, L3a and L3b may be different in the top side 30 than in the bottom side 2 and the method of folding the bottom side may be different from the method of folding the top side 30. In figure 8, only the front portion and the back portions have first and second through holes.

[0062] The blank 34 in figure 8 is rectangular and the second side wall 6 is not connected or attached to the back wall 4, but the front wall is attached to the first side wall 5 and the second side wall 6 and the back wall 4 is connected to the first side wall 5. Naturally, this is only an example of a blank 34 and the disconnection between the walls 3-6 in the blank 34 can be between any of the walls 3-6 dependent on, for example production strategy. When creating the box from the blank 34, the front wall 3 is attached to the first side wall 5 and the second side wall 6 and the back wall 4 is connected to the first side wall 5 and the second side wall 6. The fold lines 11-18 described in connection to figures 1-7 are referred to with regard to the blank in figure 8.

[0063] The erected box 1 in figures 1-7 has been described to have either the first and second through holes 19, 20 pre-made or that the first and second through holes 19, 20 are created when the box 1 is collapsed for the first time, i.e. when unfolding the bottom side 2, by allowing parts/areas to be separated from the front portion 7 and back portion 8 respectively thereby creating the first and second through holes 19, 20.

[0064] Figure 8 shows the front portion 7 comprising a first area 35 with weak perimeter 36. In the erected box, the first area 35 is attached to an underlying part of the box 1 in such a way that when unfolding the front portion 7 the weak perimeter 36 breaks and the first area 35 stays attached to the underlying part wherein the first through hole 19 is created. Figure 8 shows with a first shaded portion 37 where the first area 35 will be positioned on the second side portion 10 when the second side portion 10 is underlying the front portion 7 according to figure 1.

[0065] The back portion 8 comprises a second area 38 with weak perimeter 39, which second area 38 is attached to an underlying part of the box 1 in such a way that when unfolding the back portion 8 the weak perimeter breaks 39 and the second area stays attached to the underlying part wherein the second through hole 20 is created. Figure 8 shows with a second shaded portion 40 where the second area 38 will be positioned on the first side portion 9 when the first side portion 9 is underlying the back por-

tion 8 according to figure 1. If L1a1 and L1b1 would have been shorter, the first shaded portion 37 could have been positioned in the first side portion 9 and the second shaded portion 39 could have been positioned in the second side portion 10.

[0066] If the first and second through holes 19, 20 are to be created when unfolding the bottom side 2, the first and second side portion 10 advantageously are folded before the front portion 7 and back portion 8 since the parts/areas that are to be separated from the front portion 7 and back portion 8 respectively has to be permanently attached to the attached an underlying material, advantageously the first side portion 9 and the second side portion respectively. The advantage lies in the simplicity of folding together the bottom side and the simplicity during manufacturing of the box since essentially there is only needed one rectangular blank with slits forming the front portion, the back portion the first side portion and the second side portion.

[0067] The first and second areas could be attached to the underlying material by way of any type of attachment means, for example glue, adhesive tape, welding (for example ultrasonic), calendaring and/or embossing.

[0068] Fig. 9 schematically shows a front view of a blank comprising all elements making up a six sided box 1 according to a fifth example of the invention. The description of the blank in figure 9 is identical to the description of figure 8, but with the addition of further through holes as been described, for example figures 3 and 4.

[0069] In figure 9 a third through hole 31 is positioned in the front portion 7 with a corresponding third area 41 being marked with a third shaded portion 47 positioned in the first side portion 9, and a fourth through hole 32 is positioned in the back portion 8 with a corresponding fourth area 42 being marked with a fourth shaded portion 48 positioned in the second side portion 10.

[0070] In figure 9 a top first through hole 19a is positioned in the top front portion 7a with a corresponding top first area 35a being marked with a top first shaded portion 37a positioned in the top second side portion 10a, and a top second through hole 20a is positioned in the top back portion 8a with a corresponding top second area 38a being marked with a top second shaded portion 40a positioned in the top first side portion 9a.

[0071] In figure 9 a top third through hole 31a is positioned in the top front portion 7a with a corresponding top third area 41a marked with a top third shaded portion 47a positioned in the top first side portion 9a, and a top fourth through hole 32a is positioned in the top back portion 8a with a corresponding top fourth area 42a being marked with a top fourth shaded portion 48a positioned in the top second side portion 10a.

[0072] The additional through holes and areas in figure 10 have the same properties and positions governed by rules of symmetry as been described in connection to holes and areas described in figure 9.

[0073] Furthermore, the areas described in connection to figure 9 are delimited by a weak perimeter in order for

the areas to be attached and to an underlying portion of the box and then to be removed when the box is collapsed. According to one example of the invention (not shown) the first and/or the second areas (and where appropriate additional areas for additional through holes) are only partly delimited by a weak perimeter/line which gives the user the possibility to create the through holes by pressing onto the first and/or second areas so that the weak lines are ruptured in such a way that the first and/or second area are still attached to the box and thus form a flap that can be used in the collapsed state for inserting into one or many through holes for a better grip and/or for securing the collapsed box in the collapsed state.

[0074] The areas that are to be removed when collapsing the box could be omitted in the example shown in figures 8 and 9. The through holes 19, 20, 31, 32, 19a, 20a, 31a, 32a are then pre-made as described in connection to figures 1-7.

[0075] Figure 10 shows a box 1 having a quadratic cross-section. In figure 10 $L1=L3$ which gives a quadratic bottom side 2. In figure 1 $L2 > L1=L3$ which means that the box 1 is rectangular cuboid, but $L2$ could be equal to $L1$ and $L3$ giving the box a cubic shape. In order for the first and second through holes 19, 20 to be in line when the box 1 is collapsed, $L1a1$ must be equal to $L3a1$ being equal to zero when the box is collapsed over the first, second third and fourth corner fold lines 15, 16, 17, 18 positioned between the walls. The embodiment shown in figure 5, with a symmetrical fold lines gives different possibilities because the rules of symmetry works differently.

[0076] In figure 10, $L1a1=L1$ $b1=0$ and the imaginary axis becomes the zero axis that delimits the first through hole 19 into a first and second hole portions 43, 44 and the second through hole 20 into a third and fourth hole portions 45, 46. When $L1a1 = 0$ rules of symmetry gives that $L1b1=0$ and the first and second through holes 19, 20 becomes into two halves compared to the original shape as depicted in figure 1. In figure 10, the first hole portion 43 of the first through hole 19 is positioned in the front portion 7 and second hole portion 44 of the first through hole 19 is positioned in the first side portion 9, such that when the box 1 is in the collapsed state the first and second hole portions 43, 44 in the front portion 7 and the first side portion 9 respectively form the first through hole 19. The third and fourth hole portions 45, 46 in the back portion 8 and the second side portion 10 respectively form the second through hole 20. The first and second through holes 19, 20 then are in line with each other when the box 1 is in the collapsed state forming the handle 27. Hence, when the first and second through holes 19, 20 are larger than $L1a1$ and $L1b1$ respectively a portion of the first through hole 19 could be positioned in the front portion 7 and the remaining portion of the first through hole 20 could be positioned in the first side portion 9 and a portion of the second through hole 20 could be positioned in the back portion 8 and the remaining portion of the second through hole 20 could be positioned

in the second side portion 10. Ultimately, $L1a1 = 0$ and consequently $L1b1=0$ and the first and second through holes 19, 20 are split in halves according to the above.

[0077] The example in figure 10 is valid for all example and embodiments described in connection to figures 1-9 when $L1$ and $L3$ relative each other are such that the size of the first and second through holes 19, 20 (or any other of the described through holes) have a size giving a length $L1a1$ and a length $L1b1$ being less than half the hole. This happens when $L1-L3$ is less than $L1a1$ and $L1b1$. The rules of symmetry gives that $L1a1=L1b1$ and $L3a1=L3b1$ in order for the first and second through holes 19, 20 shall be in line when each other forming the previously described handle when the box is collapsed. The first and second hole portions 43, 44 and the third and fourth hole portions 45, 46 may either be part of the box when erected as described in connection to figures 1-7 or may be created by removal of corresponding areas as described in connection to figures 8 and 9.

Claims

1. A collapsible cardboard box (1) comprising, in an erected state, a front wall (3) an opposing back wall (4), a first side wall (5) and an opposing second side wall (6), the box also comprising a bottom side (2) being made from folding together a front portion (7) being attached to the front wall (3), a back portion (8) attached to the back wall (4), a first side portion (9) being attached to the first side wall (5) and a second side portion (10) being attached to the second side wall (6), wherein, in a collapsed state, the box (1) comprises a first through hole (19) positioned in the front portion (7) and a second through hole (20) positioned in the back portion (8), **characterized in that**, in the collapsed state, the front portion (7) comprises a third through hole (31) and that the back portion (8) comprises a fourth through hole (32), wherein the bottom side (2) has been unfolded and the front portion (7), the back portion (8), the first side portion (9) and the second side portion (10) of the box (1) have been folded over predetermined folding lines (15-18; 33) in such a way that the first and second through holes (19, 20) are in line with each other and/or that the third through hole (31) and the fourth through hole (32) are in line with each other forming a handle (27) for allowing a person to carry the collapsed box (1).
2. A collapsible box (1) according to claim 1, wherein the front portion (7) and the front wall (3) are made from one piece comprising a predetermined first fold line (11) dividing the front portion (7) and the front wall (3), wherein the back portion (8) and the back wall (4) are made from one piece comprising a predetermined second fold line (12) dividing the back portion (8) and the back wall (4), wherein the first

- side portion (9) and the first side wall (5) are made from one piece comprising a predetermined third fold line (13) dividing the first side portion (9) and the first side wall (5), and wherein the second side portion (10) and the second side wall (6) are made from one piece comprising a fourth predetermined fold line (14) dividing the second side portion (10) and the second side wall (6).
3. A collapsible box (1) according to claim 2, wherein the box (1) is formed from a blank (34) comprising the front wall (3), the back wall (4), the first and second side walls (5, 6), the front portion (7), the back portion (8) and the first and second side portions (9, 10).
 4. A collapsible box (1) according to any one of the preceding claims, wherein, in the collapsed state, at least a part of the front wall (3) and at least a part of the second side wall (6) face each other.
 5. A collapsible box (1) according to claim 4, wherein, in the collapsed state, the front wall (3) and the second side wall (6), at least partly are in contact with each other and wherein the back wall (4) and the first side wall (5), at least partly, are in contact with each other, for allowing the user to secure the collapsed box (1) in its folded position by gripping the handle (27).
 6. A collapsible box (1) according to claim 5, wherein, in the collapsed state, the front wall (3) and the second side wall (6), are in contact with only each other and wherein the back wall (4) and the first side wall (5) are in contact with only each other, for allowing the user to secure the collapsed box (1) in its folded position by gripping the handle (27).
 7. A collapsible box (1) according to any one of the preceding claims, wherein, in the collapsed state, the front wall (3), the front portion (7), the first side wall (5) and the first side portion (9) form a first side unit (28) of the collapsed box and wherein the back wall (4), the back portion (8), the second side wall (6) and the second side portion (10) form a second side unit (29), and wherein the first side unit (28) and the second side unit (29) faces each other and are, at least partly, in contact with each other for allowing the user to secure the collapsed box (1) in its folded position by grabbing the handle (27).
 8. A collapsible box (1) according to any one of claims 1-3, wherein, in the collapsed state, the first side wall (5) and the second side wall (6) have been folded over symmetrical fold lines (33) being positioned in the first side wall (5) and the second side wall (6) extending in a direction from the bottom side (2) to an opening (22) of a five sided box (1) or to a top side (30) in a six sided box (1), wherein, in the collapsed state, the front wall (3) faces only the back wall (4) and the front portion (7) faces only the back portion (8), and wherein the first side wall (5), the first side portion (9), the second side wall (6) and the second side portion (10) are double folded.
 9. A collapsible box (1) according to any one of claims 1-8, wherein in the erected state, the front portion (7) comprises the first through hole (19) and wherein the back portion (8) comprises the second through hole.
 10. A collapsible box (1) according to any one of claims 1-8, wherein, in the erected state, the front portion (7) comprises a first area (35) with weak perimeter (36), which first area (35) is attached to an underlying part of the box (1) in such a way that when unfolding the front portion (7) the weak perimeter (36) breaks and the first area (35) stays attached to the underlying part wherein the first through hole (19) is created, and wherein the back portion (8) comprises a second area (38) with weak perimeter (39), which second area (38) is attached to an underlying part of the box (1) in such a way that when unfolding the back portion (8) the weak perimeter (39) breaks and the second area (38) stays attached to the underlying part wherein the second through hole (20) is created.
 11. A collapsible box (1) according to any one of claims 1-8, wherein the front portion (7) comprises a first area (35) and wherein the back portion (8) comprises a second area (38), wherein the first and/or the second areas (35, 36) are only partly delimited by a weak perimeter/line for allowing the user the possibility to create the first and second through holes (19, 20) by pressing onto the first and/or second areas (35, 36) so that the weak lines are ruptured in such a way that the first and/or second areas (35, 36) are still attached to the box and thus form a flap that can be used in the collapsed state for inserting into one or many through holes (19, 20) for a better grip and/or for securing the collapsed box in the collapsed state.
 12. A collapsible box (1) according to any one of the preceding claims, wherein, in the collapsed state, the first through hole (19) and the second through hole (20) are positioned for allowing a person to balance the collapsed box (1) approximately about the centre of gravity of the collapsed box (1).
 13. A collapsible box (1) according to any one of the preceding claims, wherein, in both the collapsed state and the erected state, the front wall (3), the first side wall (5), the back wall (4) and the second side wall (6) are attached to each other.
 14. A collapsible box (1) according to any one of the

- preceding claims, wherein the box (1) comprises a top side (30) opposite the bottom side (22) comprising a top front portion (7a), a top back portion (8a), a top first side portion (9a) and a top second side portion (10a), wherein the top front portion (7a) comprises a top first through hole (19a) and the top back portion (8a) comprises a top second through hole (20a), wherein in the collapsed state, the top first through hole (19a) is in line with the top second through hole (20a) for forming a handle.
15. A collapsible box (1) according to claim 14, wherein the top first through hole (19a) is positioned in the top front portion (7a) with a corresponding removable top first area (35a) for creating the top first through hole (19a) upon removal and wherein the top second through hole (20a) is positioned in the top back portion (8a) with a corresponding removable top second area (38a) for creating the top second through hole (20a) upon removal.
16. A collapsible box (1) according to claim 14 or 15, wherein the top front portion (7a) comprises a top third through hole (31 a) and wherein the top back portion (8a) comprises a top fourth through hole (32a) that could be in line with each other when the box (1) is in the collapsed state.
17. A collapsible box (1) according to claim 16, wherein the top third through hole (31 a) is positioned in the top front portion (7a) with a corresponding removable top third area (41a) for creating the top third through hole (31a) upon removal and wherein the top fourth through hole (32a) is positioned in the top back portion (8a) with a corresponding removable top fourth area (42a) for creating the top fourth through hole (32a) upon removal.
18. A collapsible box (1) according to any one of the preceding claims, wherein the first and second through holes (19, 20) are elongated to fit a hand of a human user.

Patentansprüche

1. Klappbox (1) aus Karton umfassend, im aufgerichteten Zustand, eine Vorderwand (3), eine entgegengesetzte Rückwand (4), eine erste Seitenwand (5) und eine entgegengesetzte zweite Seitenwand (6), wobei die Box auch eine Bodenseite (2) umfasst, die durch Zusammenfallen eines an der Vorderwand (3) befestigten Vorderteils (7), eines an der Rückwand (4) befestigten Rückteils (8), eines ersten an der ersten Seitenwand (5) befestigten Seitenteils (9) und eines zweiten an der zweiten Seitenwand (6) befestigten Seitenteils (10) hergestellt ist, wobei die Box (1) im zusammengeklappten Zustand eine erste im

Vorderteil (7) positionierte Durchgangsbohrung (19) und eine zweite im Rückteil (8) positionierte Durchgangsbohrung (20) umfasst, **dadurch gekennzeichnet, dass**, im zusammengeklappten Zustand, der Vorderteil (7) eine dritte Durchgangsbohrung (31) umfasst, und dass der Rückteil (8) eine vierte Durchgangsbohrung (32) umfasst, wobei die Bodenseite (2) entfaltet ist und der Vorderteil (7), der Rückteil (8), der erste Seitenteil (9) und der zweite Seitenteil (10) der Box (1) über vorgegebene Faltlinien (15-18; 33) so gefaltet sind, dass die erste und zweite Durchgangsbohrung (19, 20) auf einer Linie liegen und/oder dass die dritte Durchgangsbohrung (31) und die vierte Durchgangsbohrung (32) auf einer Linie liegen und dabei einen Griff (27) bilden, damit eine Person die zusammengeklappte Box (1) tragen kann.

2. Klappbox (1) nach Anspruch 1, wobei der Vorderteil (7) und die Vorderwand (3) in einem Stück hergestellt sind, umfassend eine vorgegebene erste Faltlinie (11), die den Vorderteil (7) und die Vorderwand (3) teilt, wobei der Rückteil (8) und die Rückwand (4) in einem Stück hergestellt sind, umfassend eine vorgegebene zweite Faltlinie (12), die den Rückteil (8) und die Rückwand (4) teilt, wobei der erste Seitenteil (9) und die erste Seitenwand (5) in einem Stück hergestellt sind, umfassend eine vorgegebene dritte Faltlinie (13), die den ersten Seitenteil (9) und die erste Seitenwand (5) teilt, und wobei der zweite Seitenteil (10) und die zweite Seitenwand (6) in einem Stück hergestellt sind, umfassend eine vierte vorgegebene Faltlinie (14), die den zweiten Seitenteil (10) und die zweite Seitenwand (6) teilt.
3. Klappbox (1) nach Anspruch 2, wobei die Box (1) aus einem Rohling (34) gebildet ist, umfassend die Vorderwand (3), die Rückwand (4), die erste und zweite Seitenwand (5, 6), den Vorderteil (7), den Rückteil (8) und den ersten und zweiten Seitenteil (9, 10).
4. Klappbox (1) nach einem der vorgehenden Ansprüche, wobei, im zusammengeklappten Zustand, zumindest ein Teil der Vorderwand (3) und zumindest ein Teil der zweiten Seitenwand (6) einander zugewandt sind.
5. Klappbox (1) nach Anspruch 4, wobei, im zusammengeklappten Zustand, die Vorderwand (3) und die zweite Seitenwand (6) zumindest teilweise miteinander in Kontakt sind, und wobei die Rückwand (4) und die erste Seitenwand (5) zumindest teilweise miteinander in Kontakt sind, damit der Benutzer die zusammengeklappte Box (1) in ihrer gefalteten Position durch Greifen des Griffs (27) sichern kann.
6. Klappbox (1) nach Anspruch 5, wobei, im zusammengeklappten Zustand, die Vorderwand (3) und die zweite Seitenwand (6) zumindest teilweise miteinander in Kontakt sind, und wobei die Rückwand (4) und die erste Seitenwand (5) zumindest teilweise miteinander in Kontakt sind, damit der Benutzer die zusammengeklappte Box (1) in ihrer gefalteten Position durch Greifen des Griffs (27) sichern kann.

- mengeklappten Zustand, die Vorderwand (3) und die zweite Seitenwand (6) nur miteinander in Kontakt sind, und wobei die Rückwand (4) und die erste Seitenwand (5) nur miteinander in Kontakt sind, damit der Benutzer die zusammengeklappte Box (1) in ihrer gefalteten Position durch Greifen des Griffs (27) sichern kann.
7. Klappbox (1) nach einem der vorgehenden Ansprüche, wobei, im zusammengeklappten Zustand, die Vorderwand (3), der Vorderteil (7), die erste Seitenwand (5) und der erste Seitenteil (9) eine erste Seiteneinheit (28) der zusammengeklappten Box bilden, und wobei die Rückwand (4), der Rückteil (8), die zweite Seitenwand (6) und der zweite Seitenteil (10) eine zweite Seiteneinheit (29) bilden, und wobei die erste Seiteneinheit (28) und die zweite Seiteneinheit (29) einander zugewandt sind und zumindest teilweise miteinander in Kontakt sind, damit der Benutzer die zusammengeklappte Box (1) in ihrer gefalteten Position durch Greifen des Griffs (27) sichern kann.
8. Klappbox (1) nach einem der Ansprüche 1-3, wobei, im zusammengeklappten Zustand, die erste Seitenwand (5) und die zweite Seitenwand (6) über symmetrische Faltlinien (33) gefaltet sind, welche in der ersten Seitenwand (5) und der zweiten Seitenwand (6) positioniert sind und sich in einer Richtung von der Bodenseite (2) zu einer Öffnung (22) einer fünfseitigen Box (1) oder zu einer oberen Seite (30) in einer sechseitigen Box (1) erstrecken, wobei, im zusammengeklappten Zustand, die Vorderwand (3) nur der Rückwand (4) zugewandt ist, und der Vorderteil (7) nur dem Rückteil (8) zugewandt ist, und wobei die erste Seitenwand (5), der erste Seitenteil (9), die zweite Seitenwand (6) und der zweite Seitenteil (10) zweifach gefaltet sind.
9. Klappbox (1) nach einem der Ansprüche 1-8, wobei im aufgerichteten Zustand, der Vorderteil (7) die erste Durchgangsbohrung (19) umfasst, und wobei der Rückteil (8) die zweite Durchgangsbohrung umfasst.
10. Klappbox (1) nach einem der Ansprüche 1-8, wobei, im aufgerichteten Zustand, der Vorderteil (7) einen ersten Bereich (35) mit einem geschwächten Umfang (36) umfasst, welcher erste Bereich (35) an einem unterliegenden Teil der Box (1) so befestigt ist, dass der geschwächte Umfang (36) beim Entfalten des Vorderteils (7) bricht und der erste Bereich (35) am unterliegenden Teil, worin die erste Durchgangsbohrung (19) ausgeformt ist, befestigt bleibt, und wobei der Rückteil (8) einen zweiten Bereich (38) mit einem geschwächten Umfang (39) umfasst, welcher zweite Bereich (38) an einem unterliegenden Teil der Box (1) so befestigt ist, dass der geschwächte Umfang (39) beim Entfalten des Rückteils (8) bricht und der zweite Bereich (38) am unterliegenden Teil, worin die zweite Durchgangsbohrung (20) ausgeformt ist, befestigt bleibt.
11. Klappbox (1) nach einem der Ansprüche 1-8, wobei der Vorderteil (7) einen ersten Bereich (35) umfasst, und wobei der Rückteil (8) einen zweiten Bereich (38) umfasst, wobei der erste und/oder zweite Bereich (35, 36) nur teilweise durch einen geschwächten Umfang/eine geschwächte Linie begrenzt ist bzw. sind, damit der Benutzer die Möglichkeit hat, die erste und zweite Durchgangsbohrung (19, 20) durch Drücken auf den ersten und/oder zweiten Bereich (35, 36) zu erstellen, so dass die geschwächten Linien so gebrochen werden, dass der erste und/oder zweite Bereich (35, 36) immer noch an der Box befestigt ist bzw. sind und somit eine Lasche bildet bzw. bilden, die im zusammengeklappten Zustand zum Einführen in eine oder mehrere Durchgangsbohrungen (19, 20) zum besseren Greifen und/oder zum Sichern der zusammengeklappten Box im zusammengeklappten Zustand verwendet werden kann.
12. Klappbox (1) nach einem der vorgehenden Ansprüche, wobei, im zusammengeklappten Zustand, die erste Durchgangsbohrung (19) und die zweite Durchgangsbohrung (20) so positioniert sind, dass eine Person die zusammengeklappte Box (1) ungefähr um den Gleichgewichtspunkt der zusammengeklappten Box (1) ausgleichen kann.
13. Klappbox (1) nach einem der vorgehenden Ansprüche, wobei, sowohl im zusammengeklappten als auch im aufgerichteten Zustand, die Vorderwand (3), die erste Seitenwand (5), die Rückwand (4) und die zweite Seitenwand (6) an einander befestigt sind.
14. Klappbox (1) nach einem der vorgehenden Ansprüche, wobei die Box (1) eine obere Seite (30) gegenüber der Bodenseite (22) umfasst, umfassend einen oberen Vorderteil (7a), einen oberen Rückteil (8a), einen oberen ersten Seitenteil (9a) und einen oberen zweiten Seitenteil (10a), wobei der obere Vorderteil (7a) eine obere erste Durchgangsbohrung (19a) umfasst und der obere Rückteil (8a) eine obere zweite Durchgangsbohrung (20a) umfasst, wobei im zusammengeklappten Zustand, die obere erste Durchgangsbohrung (19a) mit der oberen zweiten Durchgangsbohrung (20a) zum Bilden eines Griffs auf einer Linie liegt.
15. Klappbox (1) nach Anspruch 14, wobei die obere erste Durchgangsbohrung (19a) im oberen Vorderteil (7a) mit einem entsprechenden entfernbaren oberen ersten Bereich (35a) zum Erstellen der oberen ersten Durchgangsbohrung (19a) beim Entfernen positioniert ist, und wobei die obere zweite

Durchgangsbohrung (20a) im oberen Rückteil (8a) mit einem entsprechenden entfernbaren oberen zweiten Bereich (38a) zum Erstellen der oberen zweiten Durchgangsbohrung (20a) beim Entfernen positioniert ist.

16. Klappbox (1) nach Anspruch 14 oder 15, wobei der obere Vorderteil (7a) eine obere dritte Durchgangsbohrung (31 a) umfasst, und wobei der obere Rückteil (8a) eine obere vierte Durchgangsbohrung (32a) umfasst, die auf einer Linie liegen könnten, wenn die Box (1) im zusammengeklappten Zustand ist.
17. Klappbox (1) nach Anspruch 16, wobei die obere dritte Durchgangsbohrung (31 a) im oberen Vorderteil (7a) mit einem entsprechenden entfernbaren oberen dritten Bereich (41 a) zum Erstellen der oberen dritten Durchgangsbohrung (31 a) beim Entfernen positioniert ist, und wobei die obere vierte Durchgangsbohrung (32a) im oberen Rückteil (8a) mit einem entsprechenden entfernbaren oberen vierten Bereich (42a) zum Erstellen der oberen vierten Durchgangsbohrung (32a) beim Entfernen positioniert ist.
18. Klappbox (1) nach einem der vorgehenden Ansprüche, wobei die erste und zweite Durchgangsbohrung (19, 20) länglich sind, damit eine Hand eines menschlichen Benutzers einpassen kann.

Revendications

1. Boîte en carton pliable (1) comprenant, dans un état érigé, une paroi avant (3), une paroi arrière opposée (4), une première paroi latérale (5) et une deuxième paroi latérale opposée (6), la boîte comprenant également un face inférieure (2) étant fabriquée à partir du pliage d'une partie avant (7) étant fixée à la paroi avant (3), une partie arrière (8) fixée à la paroi arrière (4), une première partie latérale (9) étant fixée à la première paroi latérale (5) et une deuxième partie latérale (10) étant fixée à la deuxième paroi latérale (6), dans un état replié, la boîte (1) comprenant un premier trou traversant (19) positionnée dans la partie avant (7) et un deuxième trou traversant (20) positionnée dans la partie arrière (8), **caractérisée en ce que**, dans l'état replié, la partie avant (7) comprend un troisième trou traversant (31), et **en ce que** la partie arrière (8) comprend un quatrième trou traversant (32), la face inférieure (2) ayant été dépliée et la partie avant (7), la partie arrière (8), la première partie latérale (9) et la deuxième partie latérale (10) de la boîte (1) ayant été pliées sur des lignes de pliage prédéterminées (15-18; 33) d'une telle manière que les premier et deuxième trous traversants (19, 20) sont en ligne l'une avec l'autre, et/ou que le troisième trou traversant (31) et le quatrième trou

traversant (32) sont en ligne l'un avec l'autre formant une poignée (27) pour permettre à une personne de transporter la boîte pliée (1).

2. Boîte pliable (1) selon la revendication 1, dans laquelle la partie avant (7) et la paroi avant (3) sont fabriquées à partir d'une seule pièce comprenant une première ligne de pliage prédéterminée (11) séparant la partie avant (7) et la paroi avant (3), dans laquelle la partie arrière (8) et la paroi arrière (4) sont fabriquées à partir d'une seule pièce comprenant une deuxième ligne de pliage prédéterminée (12) divisant la partie arrière (8) et la paroi arrière (4), dans laquelle la première partie latérale (9) et la première paroi latérale (5) sont fabriquées à partir d'une seule pièce comprenant une troisième ligne de pliage prédéterminée (13) divisant la première partie latérale (9) et la première paroi latérale (5), et dans laquelle la deuxième partie latérale (10) et la deuxième paroi latérale (6) sont fabriquées à partir d'une seule pièce comprenant une quatrième ligne de pliage prédéterminée (14) divisant la deuxième partie latérale (10) et la deuxième paroi latérale (6).
3. Boîte pliable (1) selon la revendication 2, dans laquelle la boîte (1) est formée à partir d'une ébauche (34) comprenant la paroi avant (3), la paroi arrière (4), les première et deuxième parois latérales (5, 6), la partie avant (7), la partie arrière (8) et les première et deuxième parties latérales (9, 10).
4. Boîte pliable (1) selon l'une quelconque des revendications précédentes, dans laquelle, dans l'état replié, au moins une partie de la paroi avant (3) et au moins une partie de la deuxième paroi latérale (6) se font face.
5. Boîte pliable (1) selon la revendication 4, dans laquelle, dans l'état replié, la paroi avant (3) et la deuxième paroi latérale (6), au moins en partie sont en contact l'une avec l'autre, et dans laquelle la paroi arrière (4) et la première paroi latérale (5), au moins en partie, sont en contact l'une avec l'autre, pour permettre à l'utilisateur de fixer la boîte repliée (1) dans sa position repliée en saisissant la poignée (27).
6. Boîte pliable (1) selon la revendication 5, dans laquelle, dans l'état replié, la paroi avant (3) et la deuxième paroi latérale (6) ne sont en contact que l'une avec l'autre, et dans laquelle la paroi arrière (4) et la première paroi latérale (5) ne sont en contact que l'une avec l'autre, pour permettre à l'utilisateur de fixer la boîte repliée (1) dans sa position repliée en saisissant la poignée (27).
7. Boîte pliable (1) selon l'une quelconque des revendications précédentes, dans laquelle, dans l'état re-

plié, la paroi avant (3), la partie avant (7) et la première partie latérale (5) et la première paroi latérale (9) forment une première unité latérale (28) de la boîte pliée, dans laquelle la paroi arrière (4), la partie arrière (8), la deuxième paroi latérale (6) et la deuxième partie latérale (10) forment une deuxième unité latérale (29), et dans laquelle la première unité latérale (28) et la deuxième unité latérale (29) se font face et sont, au moins partiellement, en contact l'une avec l'autre pour permettre à l'utilisateur de fixer la boîte repliée (1) dans sa position repliée en saisissant la poignée (27).

8. Boîte pliable (1) selon l'une quelconque des revendications 1 à 3, dans laquelle, dans l'état replié, la première paroi latérale (5) et la deuxième paroi latérale (6) sont repliées sur des lignes de pliage symétriques (33) étant positionnées dans la première paroi latérale (5) et la deuxième paroi latérale (6) s'étendant dans une direction à partir de la face inférieure (2) à une ouverture (22) d'une boîte à cinq côtés (1) ou à un côté supérieur (30) dans une boîte à six côtés (1), dans laquelle, dans l'état replié, la paroi avant (3) ne fait face qu'à la paroi arrière (4) et la partie avant (7) ne fait face qu'à la partie arrière (8), et dans laquelle le première paroi latérale (5), la première partie latérale (9), la deuxième paroi latérale (6) et la deuxième partie latérale (10) sont pliées à double.
9. Boîte pliable (1) selon l'une quelconque des revendications 1 à 8, dans laquelle dans l'état érigé, la partie avant (7) comprend le premier trou traversant (19) et dans laquelle la partie arrière (8) comprend le deuxième trou traversant.
10. Boîte pliable (1) selon l'une quelconque des revendications 1 à 8, dans laquelle dans l'état érigé, la partie avant (7) comprend une première zone (35) à périmètre faible (36), ladite première zone (35) étant fixée à une partie sous-jacente de la boîte (1) d'une telle manière que lors du dépliage de la partie avant (7), le périmètre faible (36) est rompu et la première zone (35) reste fixée à la partie sous-jacente dans laquelle le premier trou traversant (19) est créé, et dans laquelle la partie arrière (8) comprend une deuxième zone (38) à périmètre faible (39), ladite deuxième zone (38) étant fixée à une partie sous-jacente de la boîte (1) d'une telle manière que lors du dépliage, la partie arrière (8) à périmètre faible (39) est rompue et la deuxième zone (38) reste fixée à la partie sous-jacente, dans laquelle le deuxième trou traversant (20) est créé.
11. Boîte pliable (1) selon l'une quelconque des revendications 1 à 8, dans laquelle la partie avant (7) comprend une première zone (35), et dans laquelle la partie arrière (8) comprend une deuxième zone (38),

dans laquelle les première et/ou deuxième zones (35, 36) ne sont que partiellement délimitées par une périmètre/ligne faible pour permettre à l'utilisateur la possibilité de créer les premier et deuxième trous traversants (19, 20) en pressant sur les première et/ou deuxième zones (35, 36) si bien que les lignes faibles sont rompues d'une telle manière que les première et/ou deuxième zones (35, 36) restent toujours attachées à la boîte, et ainsi forment un rabat qui peut être utilisé dans l'état replié pour l'insertion dans un ou plusieurs trous traversants (19, 20) pour une meilleure adhérence et/ou fixation de la boîte pliée à l'état replié.

12. Boîte pliable (1) selon l'une quelconque des revendications précédentes, dans laquelle, dans l'état replié, le premier trou traversant (19) et le deuxième trou traversant (20) sont positionnés pour permettre à une personne d'équilibrer la boîte pliée (1) à peu près autour du centre de gravité de la boîte pliée (1).
13. Boîte pliable (1) selon l'une quelconque des revendications précédentes, dans laquelle, dans l'état replié et dans l'état érigé, la paroi avant (3), la première paroi latérale (5), la paroi arrière (4) et la deuxième paroi latérale (6) sont fixées l'une à l'autre.
14. Boîte pliable (1) selon l'une quelconque des revendications précédentes, dans laquelle la boîte (1) comprend une face supérieure (30) opposée à la face inférieure (22) comprenant une partie avant supérieure (7a), une partie arrière supérieure (8a), une première partie latérale supérieure (9a) et une deuxième partie latérale supérieure (10a), dans laquelle la partie avant supérieure (7a) comprend un premier trou traversant supérieur (19a) et la partie arrière supérieure (8a) comprend un deuxième trou traversant supérieur (20a), dans laquelle, à l'état replié, le premier trou traversant supérieur (19a) est en ligne avec le deuxième trou traversant supérieur (20a) pour former une poignée.
15. Boîte pliable (1) selon la revendication 14, dans laquelle le premier trou traversant supérieur (19a) est positionné dans la partie avant supérieure (7a) avec une première zone amovible correspondante (35a) pour créer le premier trou traversant supérieur (19a) lors de l'enlèvement, et dans lequel le deuxième trou traversant supérieur (20a) est positionné dans la partie arrière supérieure (8a) avec une deuxième zone supérieure amovible correspondante (38a) pour créer le deuxième trou traversant (20a) lors de l'enlèvement.
16. Boîte pliable (1) selon la revendication 14 ou 15, dans laquelle la partie avant supérieure (7a) comprend un troisième trou traversant supérieur (31 a) et dans laquelle la partie arrière supérieure (8a) com-

prend un quatrième trou traversant supérieur (32a) qui pourraient être en ligne l'un avec l'autre lorsque la boîte (1) est à l'état replié.

17. Boîte pliable (1) selon la revendication 16, dans laquelle le troisième trou traversant supérieur (31 a) est positionné dans la partie avant supérieure (7a) avec une troisième zone supérieure amovible correspondante (41 a) pour créer le troisième trou traversant supérieur (31 a) lors de l'enlèvement et dans laquelle le quatrième trou traversant supérieur (32a) est positionné dans la partie arrière supérieure (8a) avec une quatrième zone supérieure amovible correspondante (42a) pour créer le quatrième trou traversant supérieur (32a) lors de l'enlèvement.
18. Boîte pliable (1) selon l'une quelconque des revendications précédentes, dans laquelle les premier et deuxième trous traversants (19, 20) sont allongés pour être compatibles avec une main d'un utilisateur humain.

5

10

15

20

25

30

35

40

45

50

55

Fig. 1

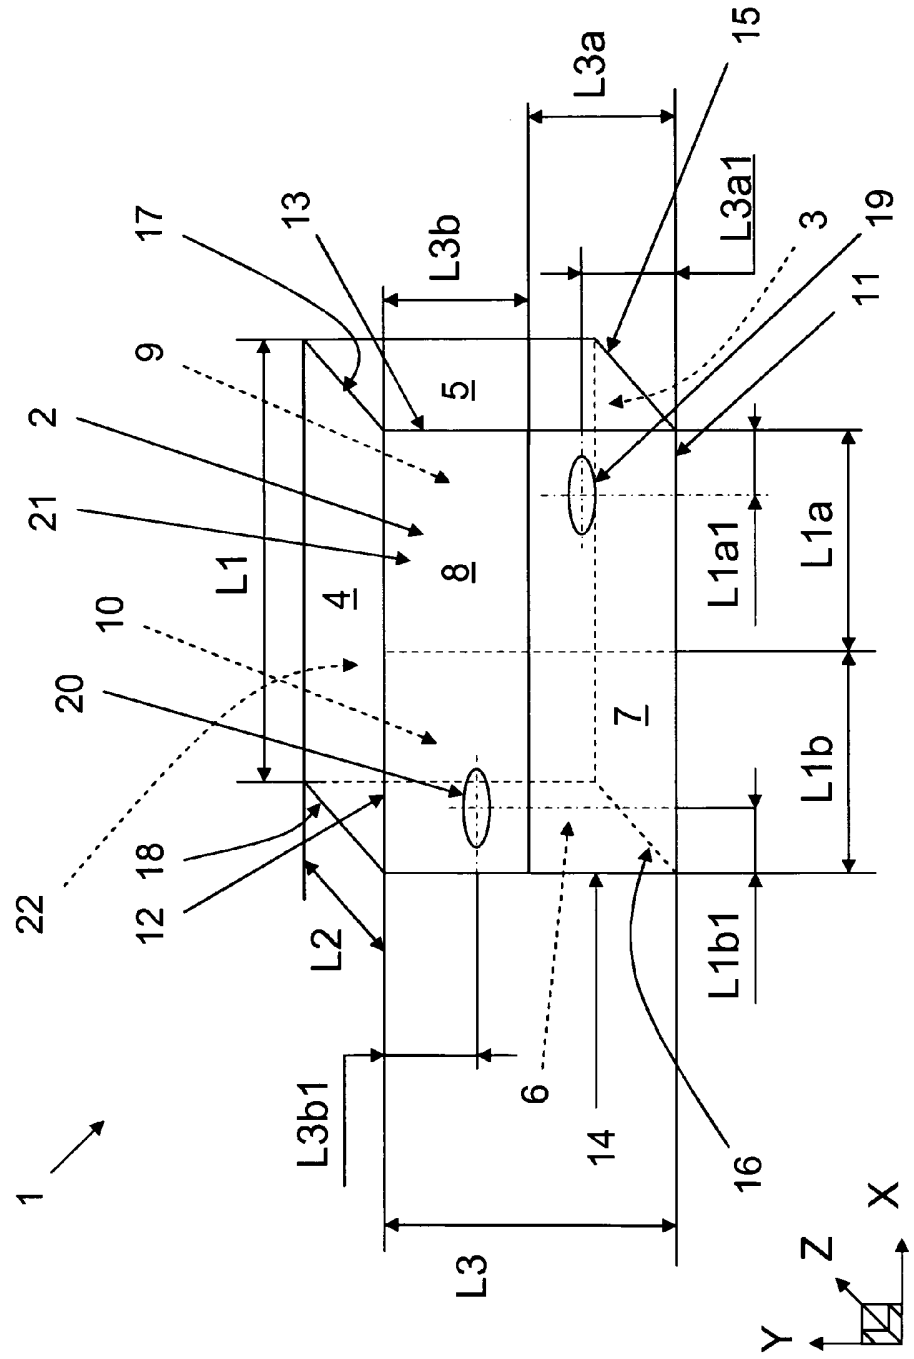


Fig. 2

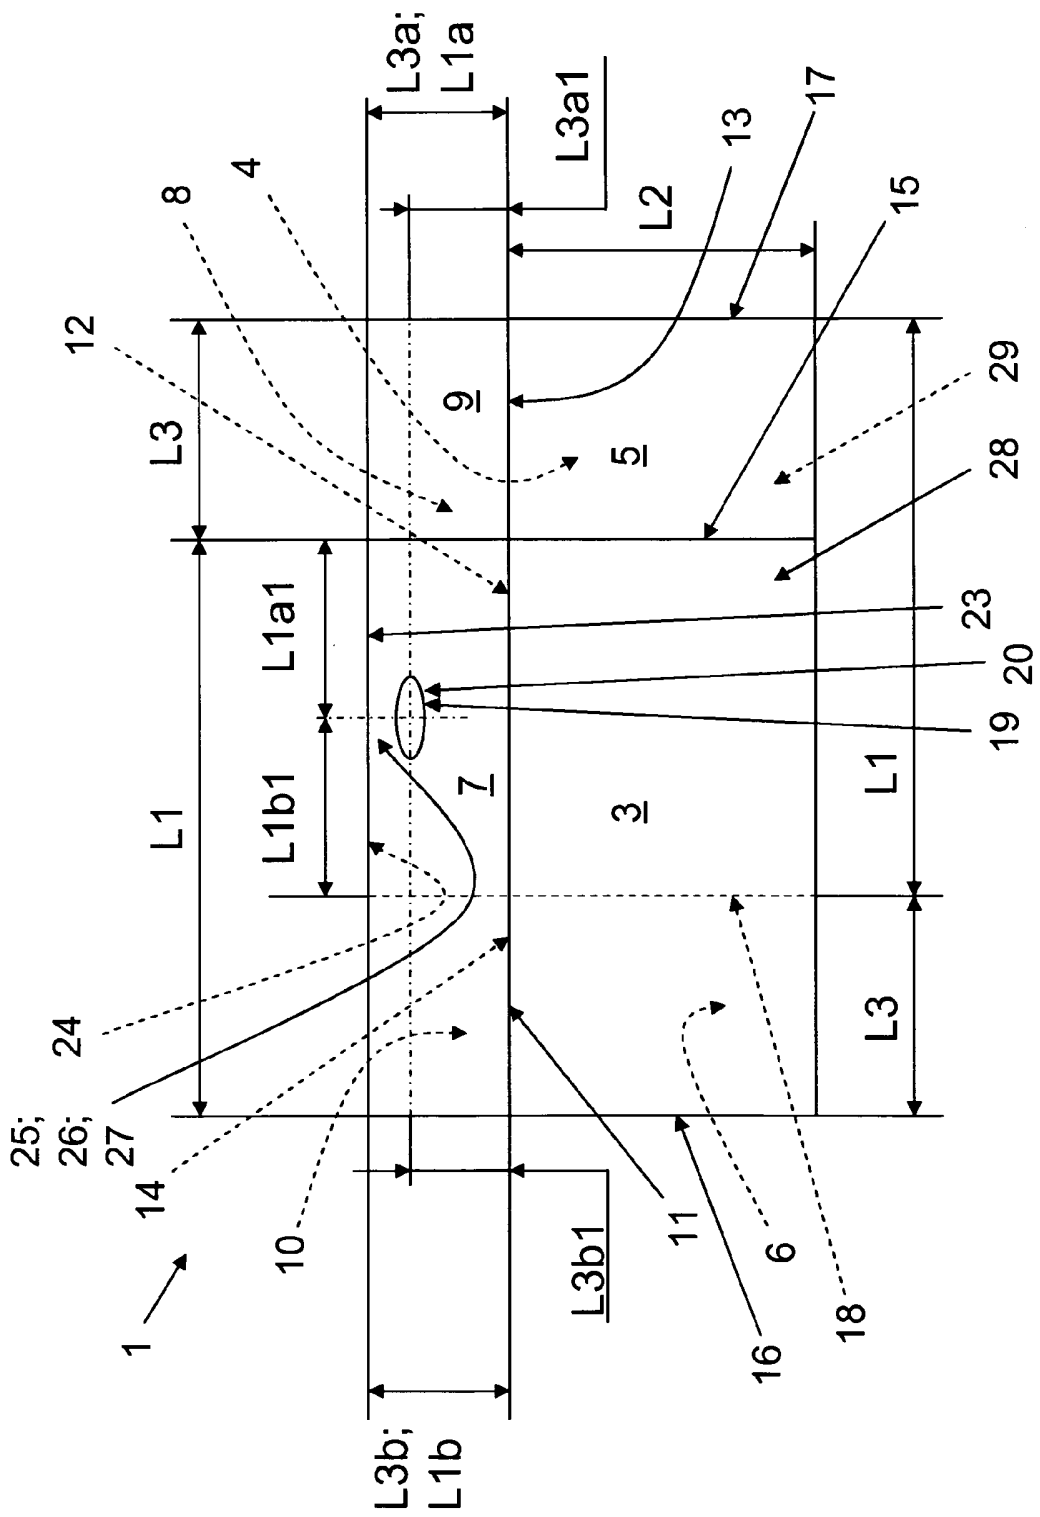


Fig. 3

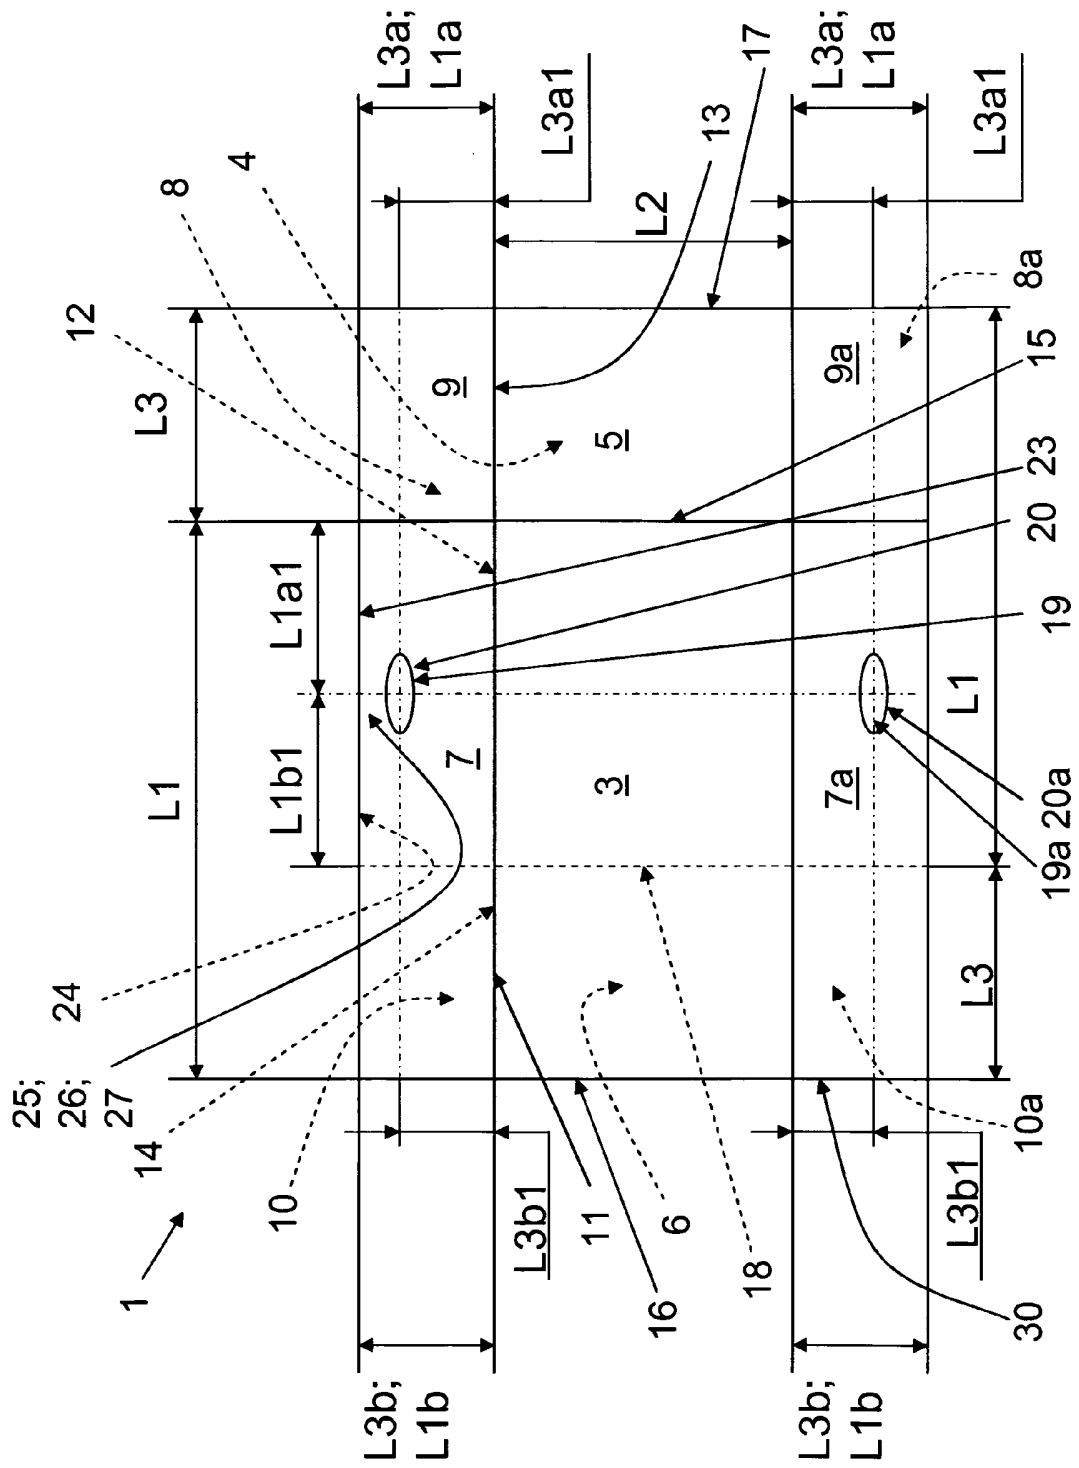


Fig. 4

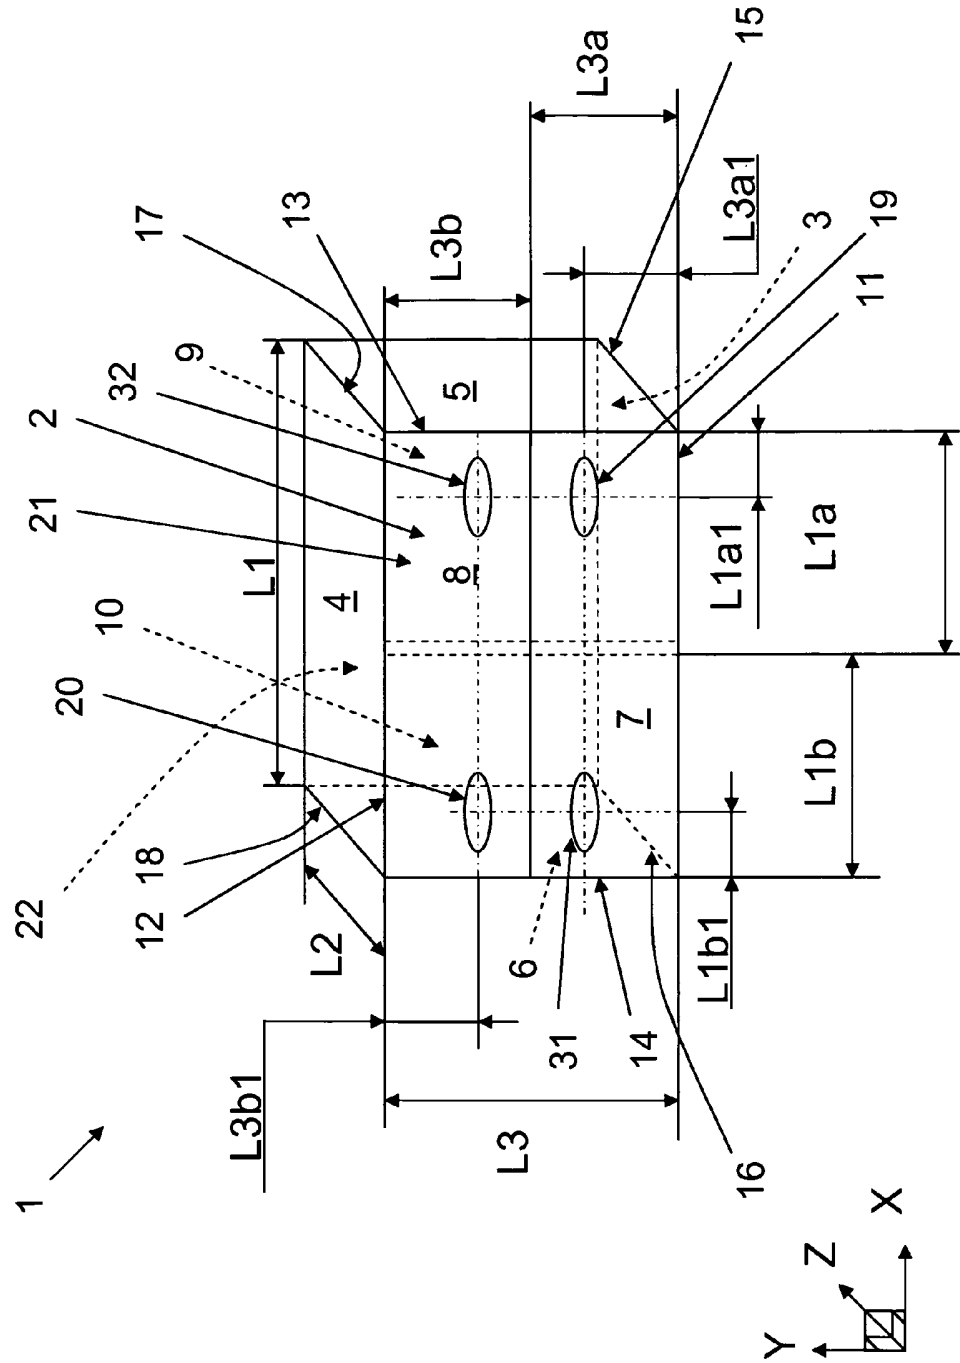


Fig. 5

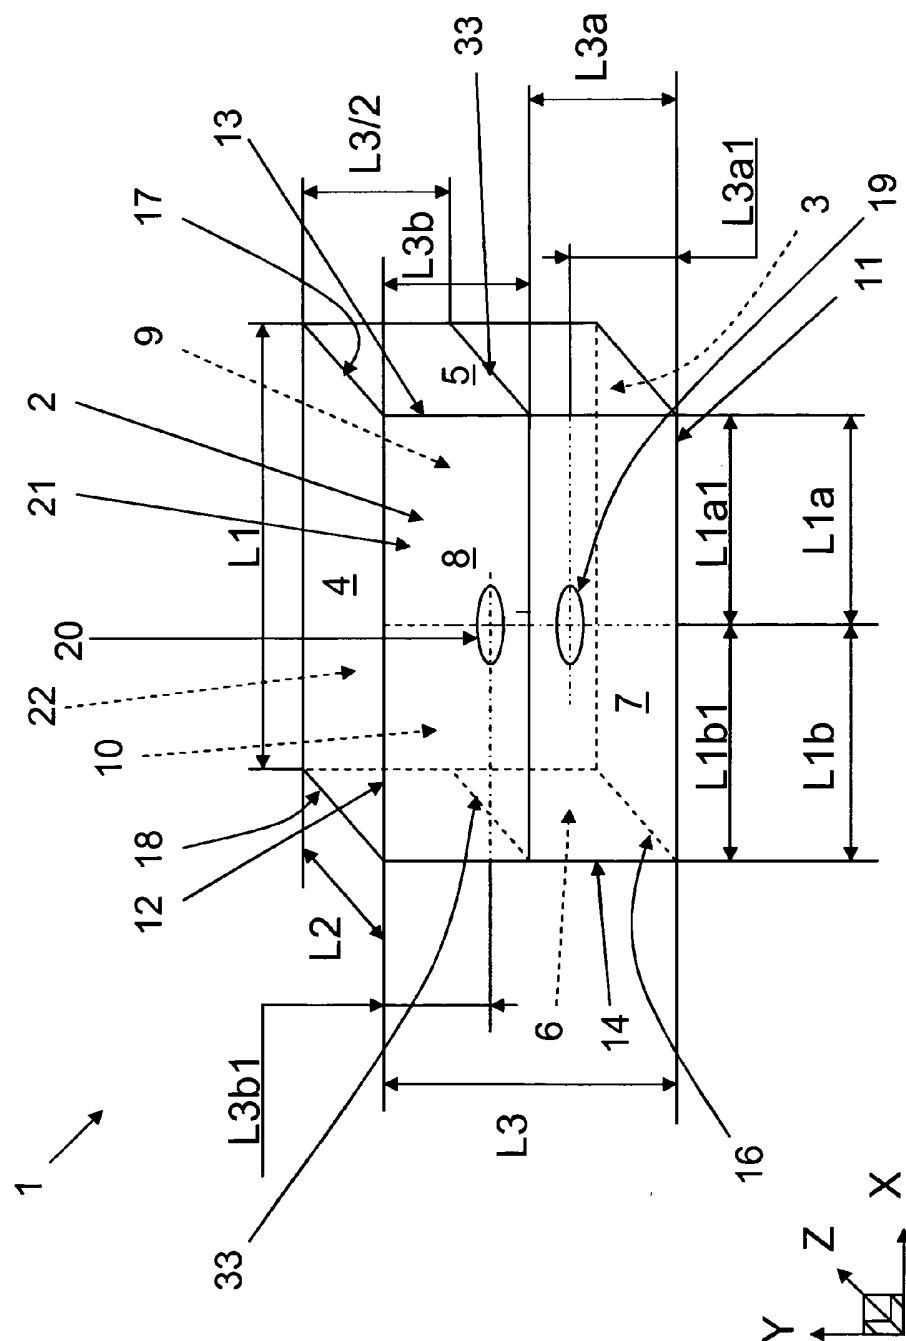


Fig. 6

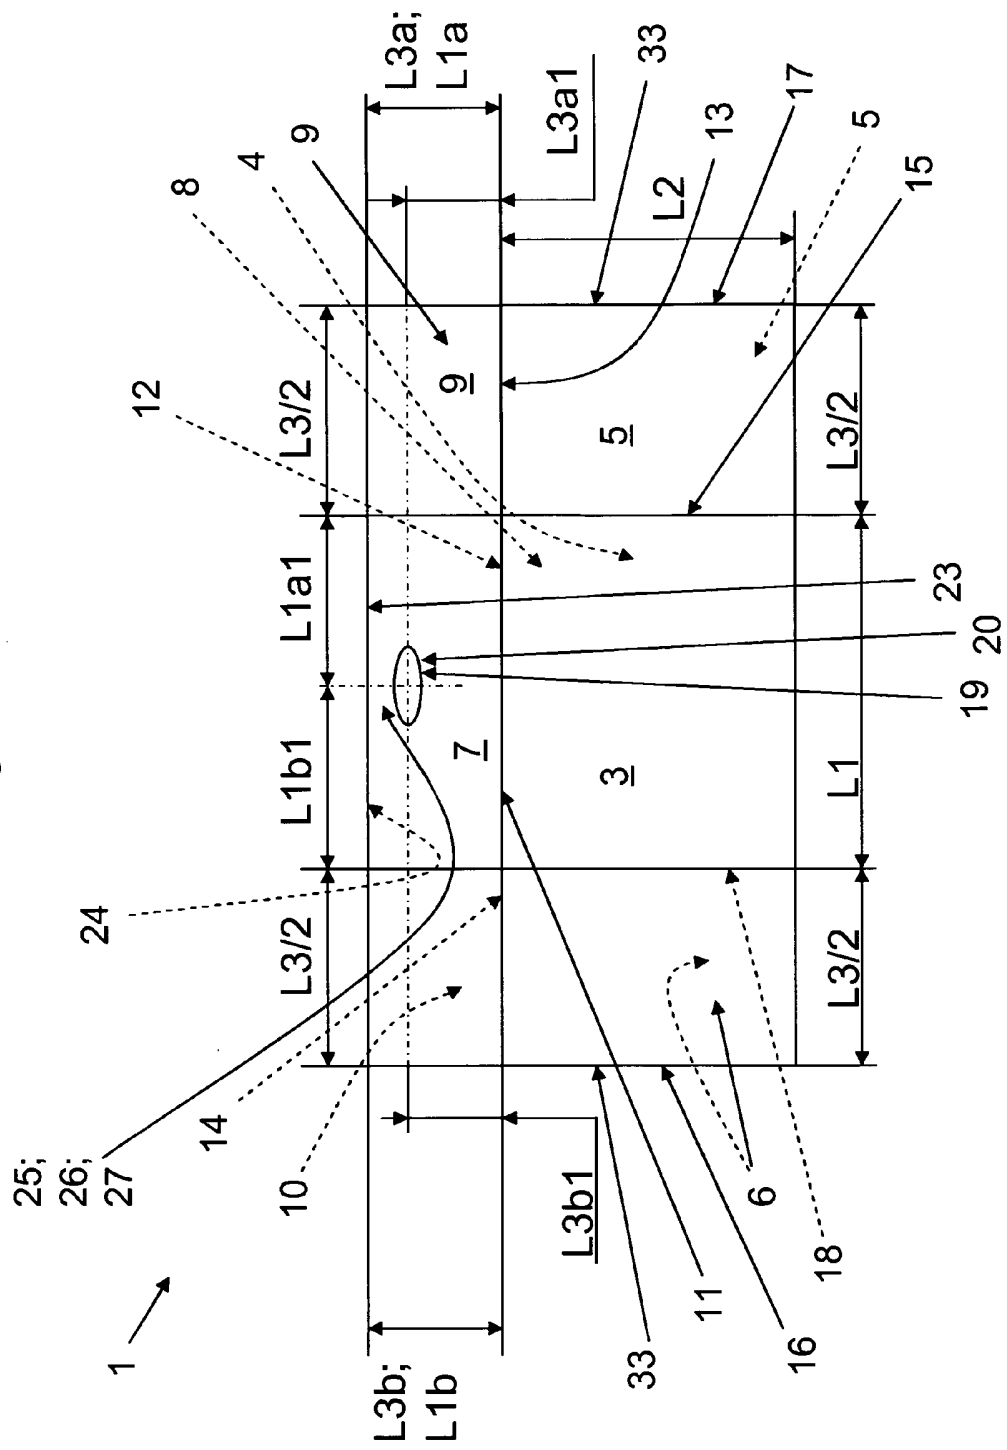


Fig. 7

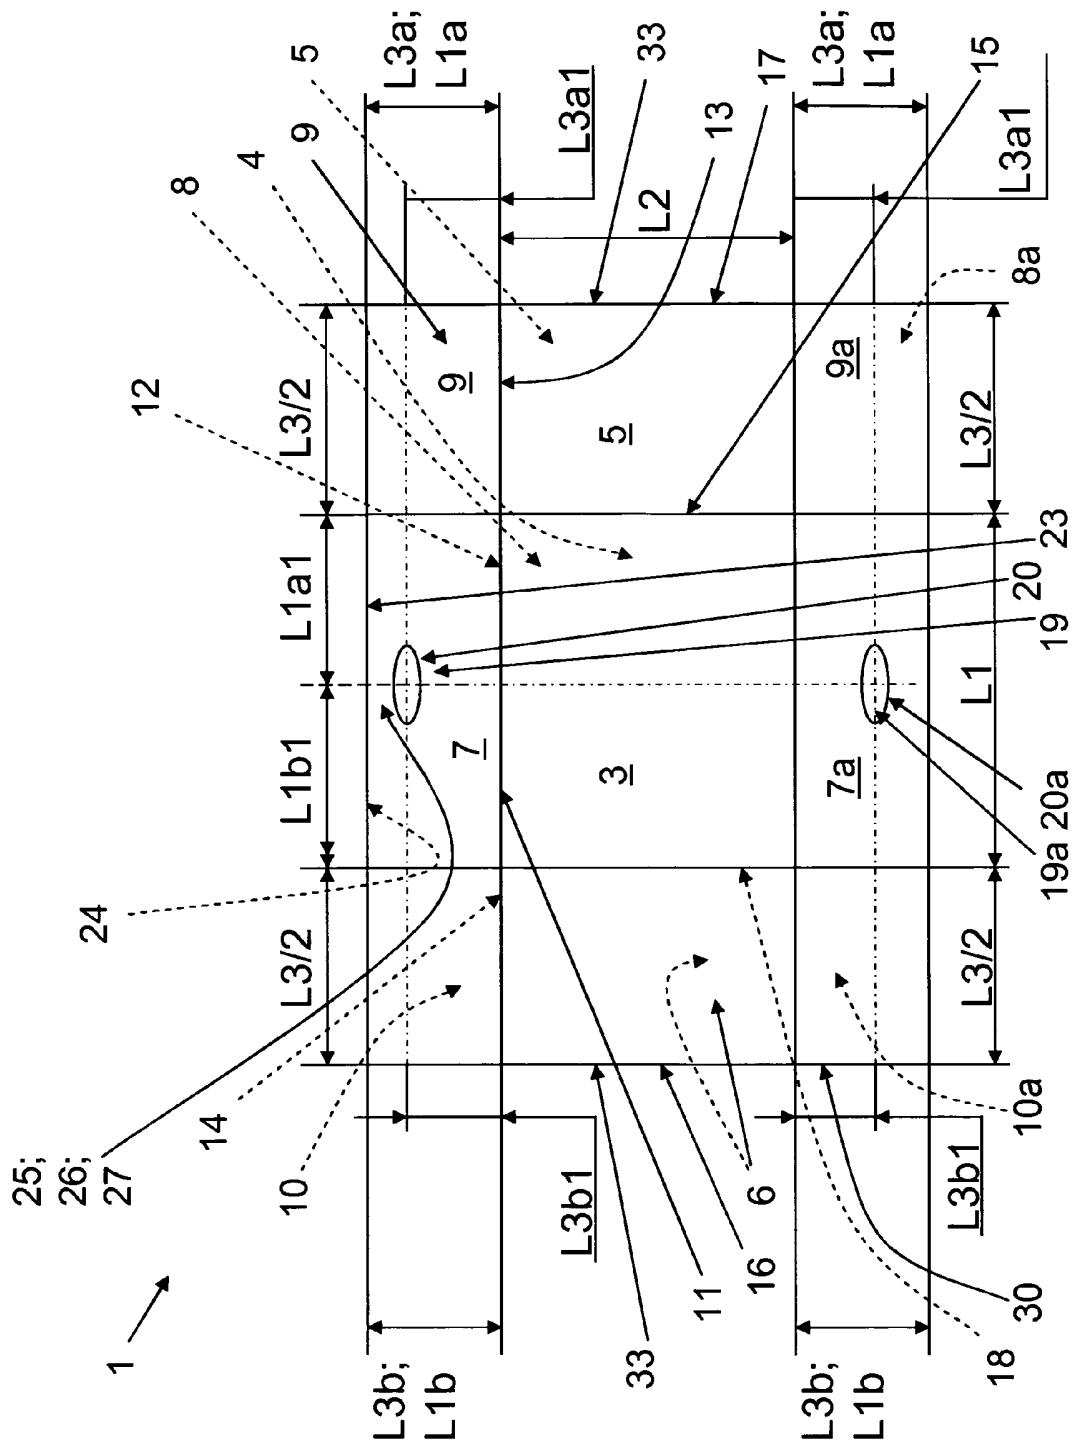


Fig. 8

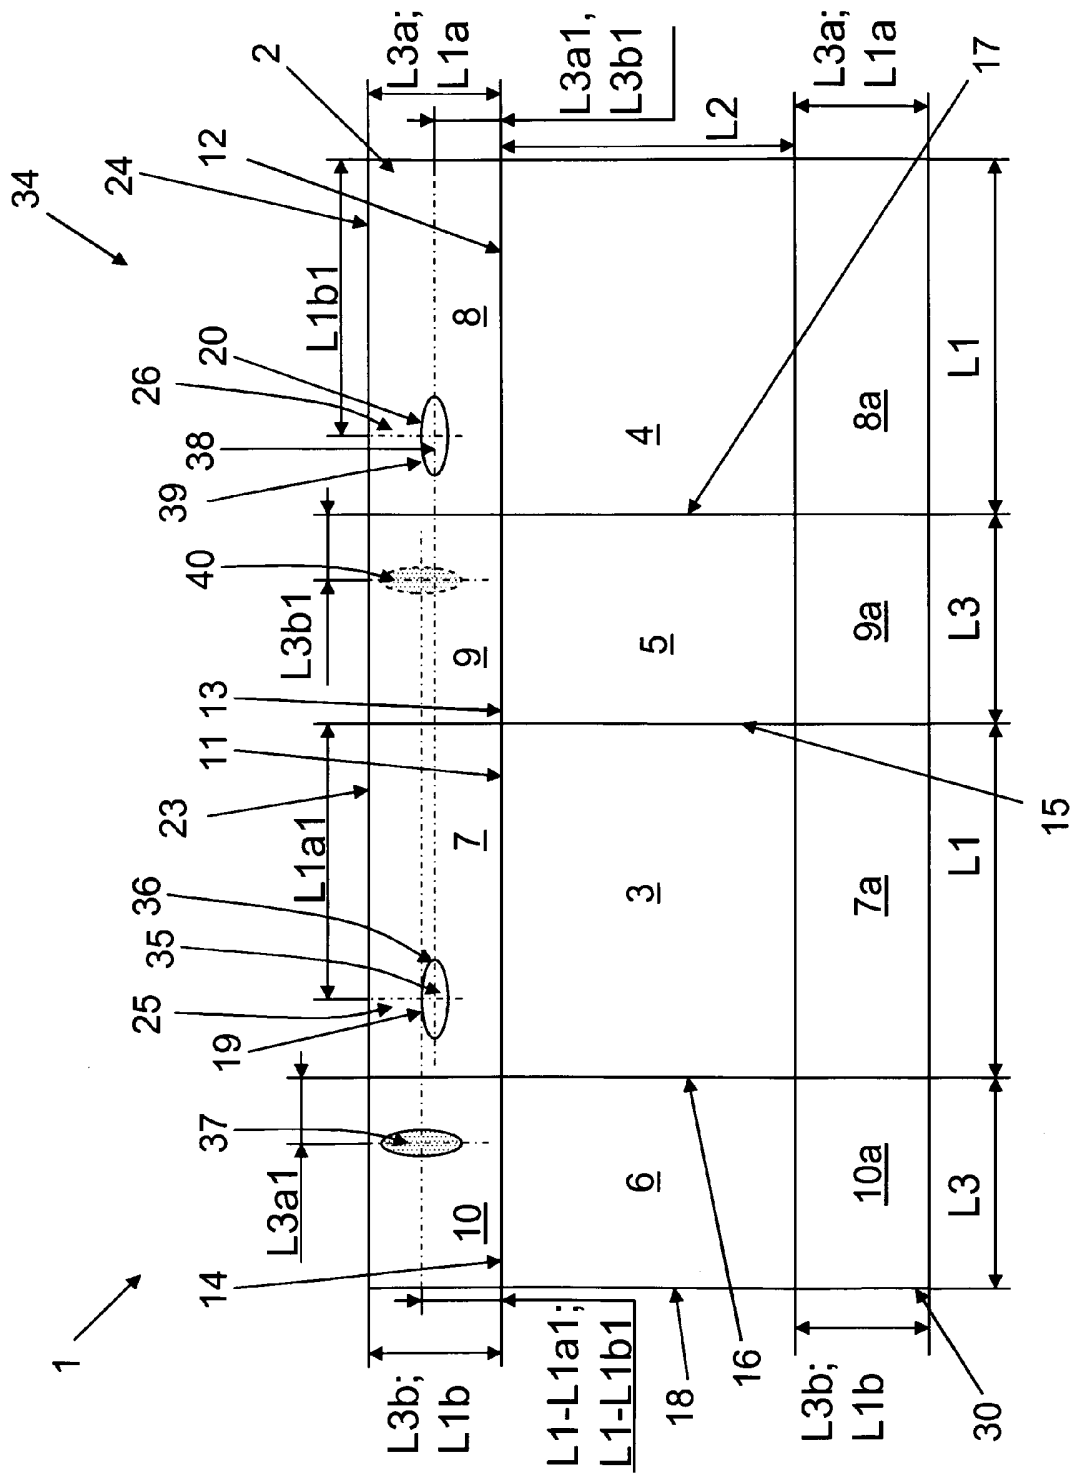


Fig. 9


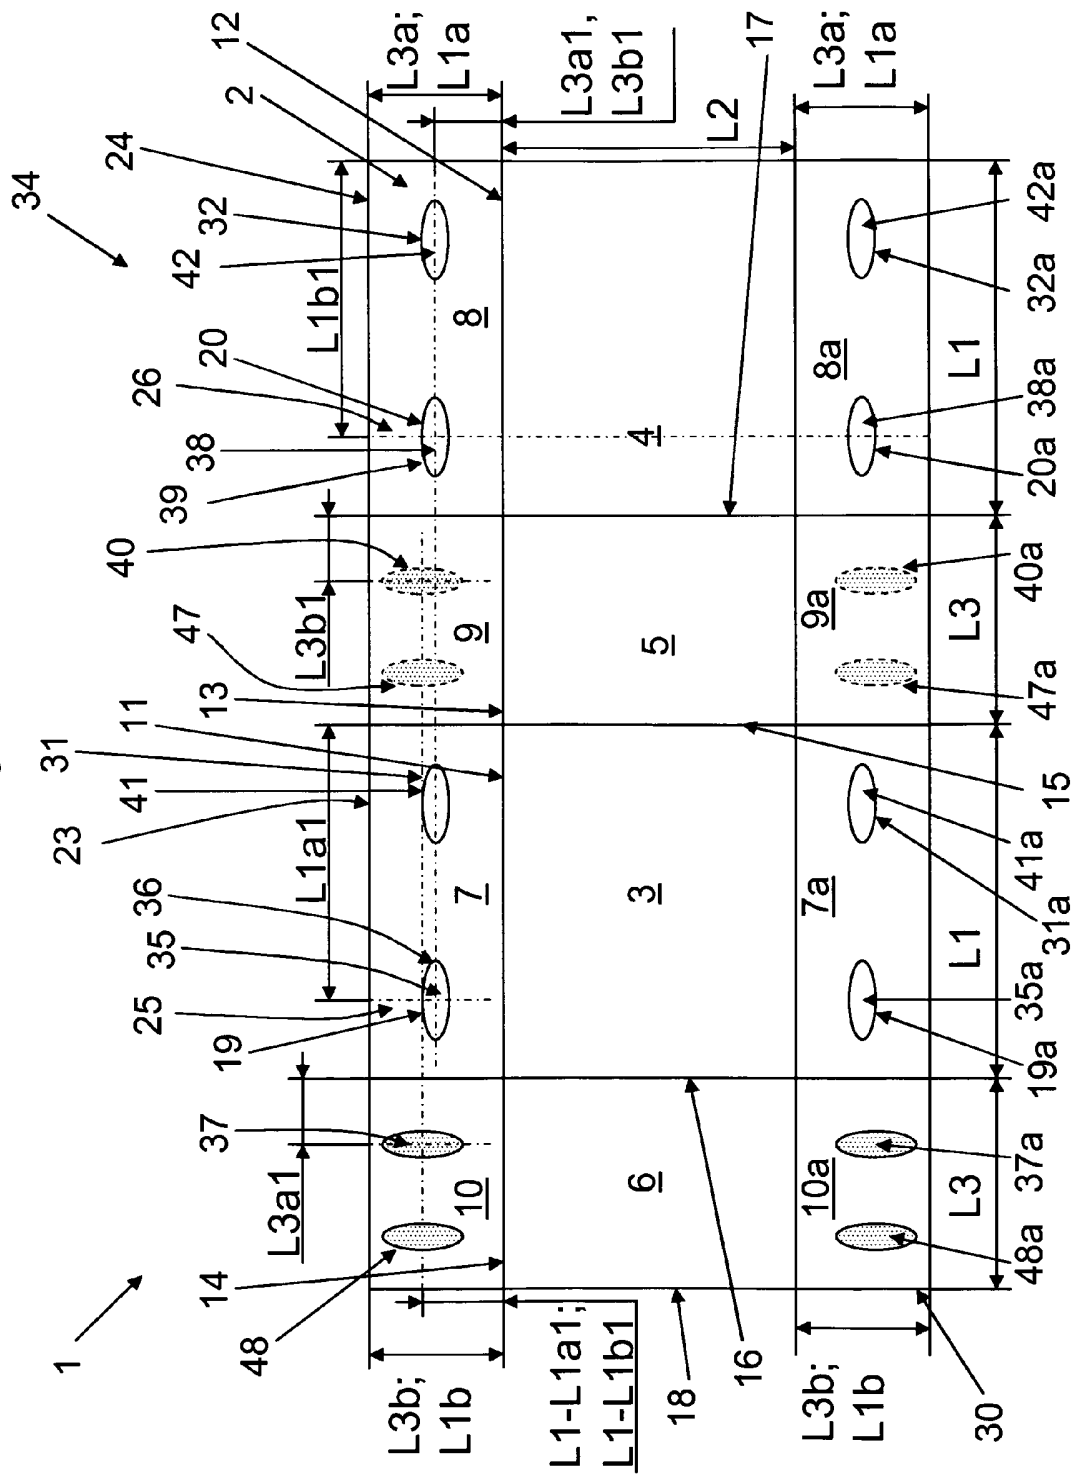


Fig. 10

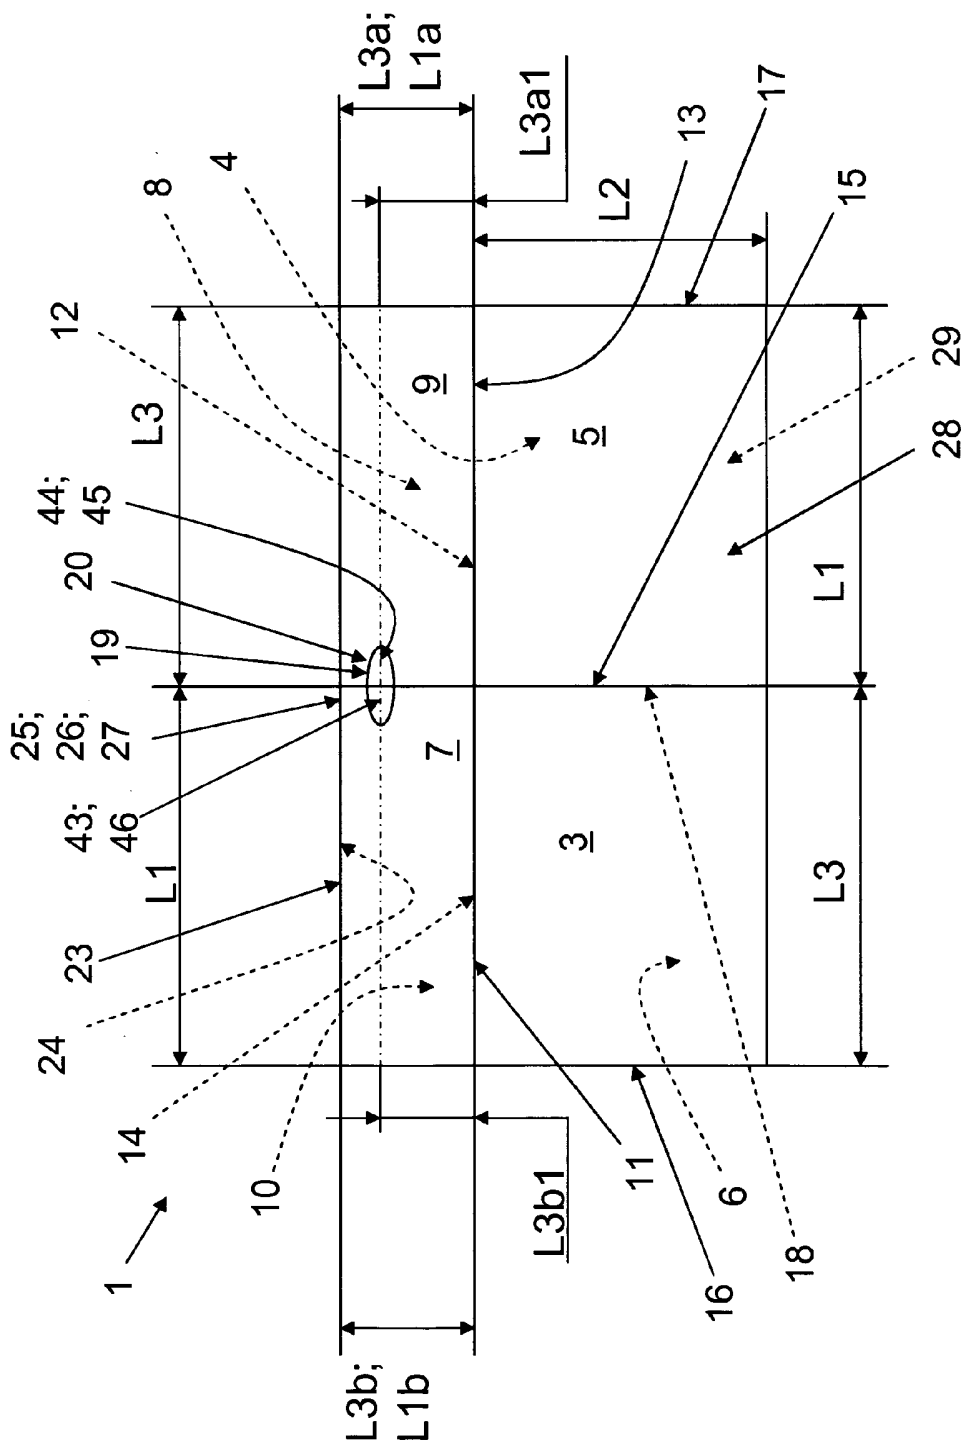

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 559084 A [0003]
- GB 231697 A [0003]
- JP 50123643U B [0004]

ÖSSZEHAJTOGATHATÓ KARTONPAPÍR DOBOZ

SZABADALMI IGÉNYPONTOK

1. Összehajtogatható kartonpapír doboz (1), amelynek összeállított állapotban mellső fala (3), egy ezzel szemkötti hátsó fala (4), egy első oldalfala (5), valamint egy ezzel szemkötti második oldalfala (6) van, ahol a doboznak van továbbá egy alsó oldala (2), amely a mellső falhoz (3) csatlakoztatott mellső rész összehajtásával alakul ki, továbbá egy hátsó része (8), amely a hátsó falhoz (4) van csatlakoztatva, továbbá első oldalsó része (9), amely az első oldalfalhoz (5), valamint egy második oldalsó rész (10), amely a második oldalfalhoz (6) van csatlakoztatva, és összehajtott állapotában a doboz (1) mellső részén (7) első átmenőnyílás (12), valamint hátsó részén (8) második átmenőnyílás (20) van kialakítva, **azzal jellemezve**, hogy összehajtott állapotban a mellső rész (7) harmadik átmenőnyílással (31) van ellátva, valamint a hátsó részen (8) negyedik átmenőnyílás (32) van kiképezve, továbbá ha az alsó oldal (2) ki van hajtva, és a mellső oldal (7), a hátsó rész (8), az első oldalsó rész (9) és a doboz (1) második oldalsó része (10) előre meghatározott hajtogatási vonalak (15-18; 33) mentén be van hajtva oly módon, hogy az első és második átmenőnyílások (19, 20) egymással egyvonalban vannak, és/vagy úgy, hogy a harmadik átmenőnyílás (31), valamint a negyedik átmenőnyílás (32) egyvonalban vannak egymással, az összehajtogatott doboz (1) hordozására szolgáló fogantyú (27) van kialakítva.

2. Az 1. igénypont szerinti összehajtogatható doboz (1), ahol a mellső rész (7), valamint a mellső fal (3) egyetlen darabból vannak kialakítva, amely a mellső részt (7) és a mellső falat (3) elválasztó, előre meghatározott első hajtásvonalat (11) tartalmaz, és ahol a hátsó rész (8) és a hátsó fal (4) egy darabból vannak kialakítva, és a hátsó részt (8), valamint a hátsó falat (4) egymástól elválasztó, előre meghatározott második hajtásvonallal (12) van ellátva, továbbá az első oldalsó rész (9), valamint az első oldalfal (5) egyetlen darabból vannak kiképezve, amelyen az első oldalsó részt (9) és az első oldalfalat (5) egymástól elválasztó, előre meghatározott harmadik hajtásvonal (13) van kialakítva, és a második oldalsó rész (10), valamint a második oldalfal (6) egyetlen darabból vannak kiképezve, amely a második oldalsó részt (10) és a második oldalfalat (6) egymástól elválasztó, negyedik előre meghatározott hajtásvonallal (14) van ellátva.

3. A 2. igénypont szerinti összehajtogatható doboz (1), ahol a doboz (1) kartonlemezéből (34) van kiképezve, amely tartalmazza a mellső falat (3), a hátsó falat (4), az első és második oldalfalakat (5, 6), a mellső részt (7), a hátsó részt (8), valamint az első és második oldalrészeket (9, 10).

4. Az előző igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol összehajtott állapotban legalább a mellső fal (3) egy része, valamint legalább a második oldalfal (6) egy része egymás felé néz.

5. A 4. igénypont szerinti összehajtogatható doboz (1), ahol összehajtott állapotban a mellső fal (3), valamint a második oldalfal (6) legalább részben érintkezésben van egymással, és ahol a hátsó fal (4), valamint az első oldalfal (5) legalább részben érintkezésben van egymással annak érdeké-

ben, hogy lehetővé tegyék a felhasználó számára, hogy az összehajtogatott dobozt (1) összehajtott helyzetében a fogantyút (27) megfogva rögzítse.

6. Az 5. igénypont szerinti összehajtogatható doboz (1), ahol összehajtogatott állapotban a mellő fal (3), valamint a második oldalfal (6) csak egymással vannak érintkezésben, és ahol a hátsó fal (4), valamint az első oldalfal (5) csak egymással vannak érintkezésben annak érdekében, hogy lehetővé tegyék a felhasználó számára, hogy az összehajtogatott dobozt (1) összehajtott helyzetében a fogantyút (27) megfogva rögzítse.

7. Az előző igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol összehajtogatott állapotban a mellő fal (3), a mellő rész (7), az első oldalfal (5), valamint az első oldalrész (9) az összehajtogatott doboz első oldalegységét (28) képezik, és ahol a hátsó fal (4), a hátsó rész (8), a második oldalfal (6), valamint a második oldalrész (10) egy második oldalsó egységet (29) képeznek, és ahol az első oldalsó egység (28), valamint a második oldalsó egység (29) egymás felé néznek, és legalább részben érintkezésben vannak egymással annak érdekében, hogy lehetővé tegyék a felhasználó számára, hogy az összehajtogatott dobozt (1) összehajtott helyzetében a fogantyút (27) megfogva rögzítse.

8. Az 1. – 3. igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol összehajtogatott állapotban az első oldalfal (5) és a második oldalfal (6) szimmetrikus hajtásvonalak (33) mentén vannak összehajtva, amelyek az első oldalfalon (5), valamint a második oldalfalon (6) vannak kiképezve, és olyan irányban húzódnak az alsó oldaltól (2) ötoldalú doboz (1) nyílásáig (22), vagy egy hatoldalú doboz (1) felső oldaláig (30), amelyben összehajtott állapotban a mellő fal (3) csak a hátsó fal (4) felé néz, és a mellő rész (7) csak a hátsó rész (8) irányába néz, és ahol az első oldalfal (5), az első oldalsó rész (9), a második oldalfal (6), valamint a második oldalsó rész (10) kétszeresen vannak összehajtva.

9. Az 1. – 8. igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol összeállított állapotban az első átmenőnyílás (19) a mellő részen (7), második átmenőnyílás a hátsó részen (8) van.

10. Az 1. – 8. igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol felállított állapotban a mellő résznek (7) gyengített kerületű (36) első tartománya (35) van, és az első tartomány (35) van a doboz (1) alatt fekvő részhez van csatlakoztatva oly módon, hogy a mellő részt (7) kihajtva a gyengített kerület (36) elreped, és az első tartomány (35) érintkezésben marad az alul fekvő résszel, ahol az első átmenőnyílás (12) van kialakítva, és a hátsó résznek (8) gyengített kerületű (39) második tartománya (38) van, és a második tartomány (38) a doboz (1) alatt lévő részhez van csatlakoztatva oly módon, hogy a hátsó részt (8) kihajtva a gyengített kerület (39) elreped, és a második tartomány (38) csatlakoztatva marad az alul fekvő részhez, amelyen a második átmenőnyílás (20) van kiképezve.

11. Az 1. – 8. igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol a mellő résznek (7) első tartománya (35), a második résznek (8) második tartománya (38) van, ahol az első és/vagy a második tartomány (35, 38) csak részben vannak gyengített kerülettel/vonallal határolva annak érdekében, hogy lehetővé tegyék a felhasználó számára, hogy első és második átmenőnyílásokat (19, 20) alakítson ki úgy, hogy nyomást gyakorol az első és/vagy második tartományra (35, 38)

úgy, hogy a gyengített vonalakat megtöri oly módon, hogy az első és/vagy második tartomány (35, 36) még csatlakoztatva marad a dobozhoz, és lapot képez, amely összehajtogatott állapotban beilleszthető egy vagy több átmenőnyílásba (19, 20) annak érdekében, hogy jobb megfogást hozzunk létre és/vagy hogy az összehajtott dobozt összehajtott állapotban rögzítsük.

12. Az előző igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol összehajtogatott állapotban az első átmenőnyílás (12), valamint a második átmenőnyílás (20) úgy vannak elrendezve, hogy lehetővé tegyék egy személy számára, hogy kiegyensúlyozza az összehajtott dobozt (1) kb. az összehajtott doboz (1) tömegközéppontja körül.

13. Az előző igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol mind összehajtott, mind pedig összeállított állapotban a mellő fal (3), az első oldalfal (5), a hátsó fal (4), valamint a második oldalfal (6) egymáshoz vannak csatlakoztatva.

14. Az előző igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol a doboznak (1) az első oldallal (22) szemben lévő felső oldala (30) van, amelynek felső része (7a), felső hátsó része (8a), felső első oldalrész (9a), valamint felső második oldalrész (10a) van, ahol a felső mellő résznek (7a) felső első átmenőnyílása (19a) van, valamint a felső hátsó résznek (8a) felső második átmenőnyílása (20a) van, és összehajtott állapotban a felső első átmenőnyílás (19a) egyvonalban van a felső második átmenőnyílással (20a) és fogantyút képez.

15. A 14. igénypont szerinti összehajtogatható doboz (1), ahol a felső első átmenőnyílás (19a) a felső mellő részen (7a) van elhelyezve és megfelelő eltávolítható felső első tartománnyal (35a) van ellátva, amely eltávolítása során felső első átmenőnyílást (19a) képez, és ahol a felső második átmenőnyílás (20a) a felső hátsó részen (8a) van elrendezve, és megfelelő eltávolítható felső második tartománnyal (38a) van ellátva, és eltávolításával második átmenőnyílás (20a) alakul ki.

16. A 14. vagy 15. igénypont szerinti összehajtogatható doboz (1), ahol a felső mellő résznek (7a) felső harmadik átmenőnyílása (31a), a felső hátsó részen (8a) felső negyedik átmenőnyílás (32a) van kialakítva, amelyek egymással egyvonalba hozhatók, amikor a doboz (1) összehajtott állapotában van.

17. A 16. igénypont szerinti összehajtogatható doboz (1), ahol a felső harmadik átmenőnyílás (31a) a felső mellő részen (7a) van elrendezve, és megfelelő eltávolítható felső harmadik tartománnyal (41a) van ellátva, amelynek eltávolításával felső harmadik átmenőnyílás (31a) alakul ki, és a felső negyedik átmenőnyílás (32a) a felső hátsó részen (8a) van kiképezve és megfelelő eltávolítható felső negyedik tartománnyal (42a) van ellátva, amelynek eltávolításával felső negyedik átmenőnyílás (32a) alakul ki.

18. Az előző igénypontok bármelyike szerinti összehajtogatható doboz (1), ahol az első és második átmenőnyílások (19, 20) a felhasználó kezéhez illeszkedő, hosszúkásak átmenőnyílások (19, 20).