

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 August 2009 (06.08.2009)

PCT

(10) International Publication Number
WO 2009/096852 A1


- (51) **International Patent Classification:**
A61M 1/00 (2006.01) A61F 2/04 (2006.01)
A61M 5/00 (2006.01)
- (21) **International Application Number:**
PCT/SE2009/000037
- (22) **International Filing Date:** 28 January 2009 (28.01.2009)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/006,711 28 January 2008 (28.01.2008) US
- (71) **Applicant (for all designated States except US):** MILUX HOLDING SA [LU/LU]; 6 rue Guillaume Schneider, L-2522 Luxembourg (LU).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** FORSELL, Peter [SE/CH]; Aegeristrasse 66, CH-6300 Zug (CH).
- (74) **Agent:** BERGENSTRÅHLE & LINDVALL AB; Box 17704, S-118 93 Stockholm (SE).

- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** AN IMPLANTABLE DRAINAGE DEVICE

Fig. 33

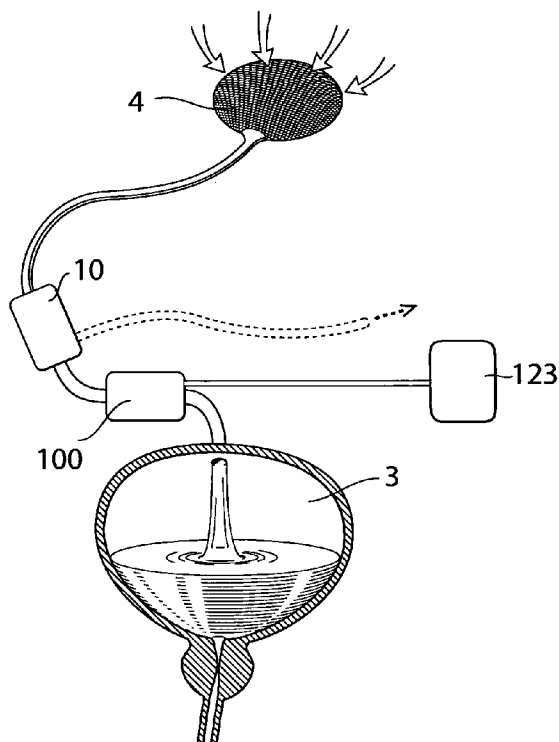

(57) **Abstract:** An implantable drainage device is provided. The device is adapted to move body fluid from one part of the body of a patient to another part of the body.

WO 2009/096852 A1



Published:

— *with international search report*

An implantable drainage device

TECHNICAL FIELD

The present invention relates to a method and a device for draining body fluid.

5

BACKGROUND

Body fluid drains are used at so-called drainage sites for draining fluids from cavities in a patient's body, typically during and after surgical procedures. The drainage site may be a natural body cavity or orifice or may be surgically formed.

10

The drain device used for draining fluid from the body typically comprises a tube extending from the treatment area within the body through the skin of the patient and ending in a manual pump located outside the body. The pump is associated with a reservoir for storing the drained fluid. The reservoir is then emptied at suitable time intervals by manually

15 compressing the reservoir.

A drain can be required for shorter or longer periods of time depending on the condition for which the drain is used. In particular when the drain is used for a longer period of time the drains existing today are cumbersome to use and impractical for the patient who is required

20 to move the drain with him/her when moving around.

Also, US 7195,608 describes a drainage device for moving fluid to the urine bladder.

Hence, there exists a need for a drain that is less cumbersome to use and which enables a

25 patient to more easily move around while still being attached to the drain.

SUMMARY

It is an object of the present invention to overcome or at least reduce some of the problems associated existing drainage devices

It is another object of the present invention to provide a drainage device that enables a patient to more easily move around while still being attached to the drain.

- 5 It is yet another object to provide a drainage device that is more user-friendly and which does not require manual monitoring.

These objects and others are obtained by the method, apparatus, device and system as set out in the appended claims. Thus, by providing an implantable drain adapted to move body
10 fluid from one part of the body to another part of the body, a drainage device that which is completely implanted and which does not have any mechanical structure penetrating through the skin of the patient is obtained.

The apparatus for drainage of a body fluid in a human or mammal patient in accordance
15 with the present invention comprises a drainage device for pumping body fluid. The drainage device is powered by an energy source and may be powered by any suitable means such as an electrical or a hydraulic motor. At least one connecting tube is connected to the drainage device so that the drainage device and the tube form a drainage arrangement. The drainage arrangement is adapted to be implanted inside the body of the patient, and placed
20 so that the tube interconnects one part of the body with another part of the body and where drainage device is adapted to suck body fluid from the one part of the body via the tube to the other part of the body. Hereby an implantable drainage device is obtained which can pump body fluid from a treatment area to another part of the body where the fluid can be absorbed and transported out from the body in a normal way.

25

In accordance with one embodiment a drainage device is provided with a pump comprising a bellow having an inlet with an inlet return valve and an outlet with an outlet return valve. In addition a spring may be adapted to move the bellow to expand to suck from the inlet, and a motor may be adapted to compress the bellow and move fluid out via the outlet

thereby pre-tensioning the spring. The motor is advantageously adapted to repeat the compression at suitable time intervals whereby the drainage device is enabled to repeat the sucking and moving of fluid to substantially constantly suck fluid when not moving fluid to the other part of the body. In one embodiment of the present invention the motor is adapted
5 to compress and decompress the bellow with or without the use of a spring force in a repeated pattern. Hereby a substantially constant drain of the drained area is obtained without any manual interaction.

The implantable drainage device in accordance with the present invention can be used to
10 move body fluid between different parts of the body depending on the type of body fluid being drained. For example and without limitation the drainage device can be adapted to drain urine from the urine accumulating renal part of the kidney, and moving the urine via at least one tube to the urine bladder. The drainage device can also be adapted to drain liquid from the hydrocephalus in the brain area, and moving it to the abdomen. The drainage
15 device can also be adapted to drain liquid from ascites in the abdomen, and moving it to the lymphatic system of the body. Also, the drainage device can also be adapted to drain liquid from the thoraxial cavity, and moving the liquid to the abdomen.

Depending on the type of treatment and where the body fluid is sucked from and to where in
20 the body the fluid is delivered the tubes used may be shaped to suit the particular treatment.

The motor powering the drainage device can be provided with an energy source that is chargeable from outside the body. For example, the energy source of the motor may comprise an internal energy source and external energy source transmitting wireless energy
25 and further comprising an energy transmitter transmitting wireless energy from the external energy source to charge said internal energy source. The energy can be transferred to the internal energy source for example by inductive manner using a coil. Energy can also be transferred using a non-inductive mechanism such as via ultra sound or by way of light.

Hereby there is no need for surgery when the energy source of the motor needs to be recharged. In addition the apparatus can further be adapted to send feedback information from inside the body to the outside thereof to give feed back related to any functional parameter of the device or a physical parameter of the patient. The functional and or
5 physical parameter(s) of the device can be correlated to the transfer of energy for charging the internal energy source whereby the energy transfer can be regulated. Also the drainage device can be adapted to non-invasively have any of its functions regulated by an energy transmitter

10 In order to prevent or remove a possible occlusion in the tube the drainage device can be provided with a backward release member adapted to generate a backward pressure of fluid or air in the tube for removing or preventing a possible occlusion in the tube. The backward pressure is preferably repeatedly according to a predetermined time schedule. In accordance with one embodiment the release member comprises a pre-pressurized reservoir of air and a
15 valve adapted to release a puff of air in the tube. In accordance with another embodiment the pump is adapted to move fluid or air in the tube in the reversed direction thereby creating a reverse flow for prevent or remove a possible occlusion in the tube. In accordance with yet another embodiment a reservoir of the drainage is pre-pressurized by the pump, and a valve of the device is adapted to release a puff of fluid or air in the tube extending from
20 the pre-pressurized reservoir when the pressure has reached a predetermined level.

The implantable device in accordance with the present invention can be placed within the body of a patient at a suitable location depending on the particular treatment. For example and without limitation the implantable drainage device may be placed subcutaneously via
25 surgery or be placed in the abdomen.

In accordance with one embodiment the drain device comprises a subcutaneous switch, which is adapted to manually and non-invasively control any function of the drainage device. In accordance with another embodiment the further comprises a hydraulic device,

comprising a hydraulic reservoir, wherein the drainage device is adapted to non-invasively be regulated by manually pressing the reservoir. In yet another embodiment the device comprises a wireless remote control, wherein the drainage device is adapted to non-invasively have any of its functions regulated by the remote control.

5

In accordance with one embodiment the device according to the present invention may be provided with a sensor sensing a physical parameter of the patient and/or a sensor sensing a functional parameter of the drainage device. Also there may be provided an internal control unit acting in response to a sensor sending information. In one embodiment the sensor is a
10 pressure sensor. The control unit may provide control signals to an operation device which acts to move fluid within the drainage.

The device according to the present invention can be regulated in various ways. For example any function of the device is regulated from outside the human or mammal body.

15 In accordance with one embodiment the regulation is performed by manually pressing a subcutaneous switch or a reservoir or using a remote control or using an energy transmitter.

The invention also extends to a method of implanting and operating the device. The method comprises the steps of:

- 20
- implanting a source of energy in the patient,
 - providing an external source of energy,
 - controlling the external source of energy to release wireless energy,
 - charging non-invasively the implanted source of energy with the wireless energy,
 - controlling the implanted source of energy from outside the patient's body, and

25

 - releasing energy for use in connection with the operation of the drainage device.

The method may additionally comprise the steps of placing at least one connecting tube connected to said drainage device in the specific treatment area in the human or mammal body,

sucking body fluid from one part of the body, through the tube,
supplying energy to said drainage device from said energy source, and
moving fluid to another part of the body, using power from said energy source

- 5 The present invention also extends to an operation method for surgically implanting the device in accordance with the present invention in a patient, comprising the steps of:
cutting the skin,
dissecting a treatment area
dissecting a placement area
- 10 placing the drainage device in the placement area, and
placing the tube leading from the placement area to the treatment area

In accordance with a method for treating a patient needing drainage of an area in the body, the following steps may be performed;

- 15 cutting an opening in the abdominal wall
dissecting the at least two intended areas
placing a drainage device and at least one tube in the dissected areas
suturing the abdominal wall.
- 20 In accordance with a method for implanting a drainage device the following steps may be performed:
inserting a needle like tube into the abdomen of the patients body,
using the tube to fill the abdomen with gas thereby expanding the abdominal cavity,
placing at least two laparoscopic trocars in the patient's body,
- 25 inserting a camera through one of the trocars into the abdomen,
inserting at least one dissecting tool through a trocar and dissecting at two intended areas of the patient,
placing at least one drainage device in the abdomen.

In accordance with a method for implanting a drainage device the following steps may be performed:

cutting the skin,

dissecting an area around the renal part of the kidney area

- 5 dissecting a placement area where to place an implantable drainage device inside the abdomen or retroperitoneal or subcutaneously

dissecting a delivery area around the urine bladder

placing the implantable drainage device in the placement area

placing a tube leading from the placement area to the renal kidney

- 10 placing a second tube leading from the placement area to the urine bladder.

In accordance with a method for implanting a drainage device the following steps may be performed:

cutting the skin,

- 15 dissecting an area in the brain

dissecting a placement area where to place an implantable drainage device inside the abdomen or retroperitoneal or subcutaneously

dissecting a delivery area in the abdomen

placing the implantable drainage device in the placement area

- 20 placing a tube leading from the placement area to the brain

placing a second tube leading from the placement area to the abdomen.

In accordance with a method for implanting a drainage device the following steps may be performed:

- 25 cutting the skin,

dissecting an area in the abdomen

dissecting a placement area where to place an implantable drainage device inside the abdomen or retroperitoneal or subcutaneously

dissecting a delivery area around the lymphatic system

placing the implantable drainage device in the placement area
placing the tube leading from the placement area to the abdomen
placing a second tube leading from the placement area to the lymphatic system.

5 In accordance with a method for implanting a drainage device the following steps may be performed:

cutting the skin,

dissecting an area in the thorax

dissecting a placement area where to place an implantable drainage device inside the

10 abdomen or thorax or retroperitoneal or subcutaneously

dissecting a delivery in around the abdomen

placing the implantable drainage device in the placement area

placing the tube leading from the placement area to the thorax

placing a second tube leading from the placement area to the abdomen.

15

In accordance with one embodiment a method of securing a connecting tube for use in an implantable device is provided. The tube is adapted to move body fluid from one part of the body, via the at least one connecting tube to another part of the body, the connecting tube having a distal end adapted to be located in the bladder of the human or mammal patient for

20 drainage of a body fluid from a treatment area of the human or mammal patient into the bladder, the method comprising the steps of:

- opening a hole in the bladder,

- placing the end of the tube in the bladder.

- securing the tube on the outside of the bladder by invaginating the tube using sutures or

25 staples, thus creating a tunnel around the tube, wherein said tube comprising a net material

secured to said tube, the further method comprising,

placing the net material in connection to the opening of the invaginated tunnel, and

securing the net material to the outside of the bladder.

The bladder can be the urine bladder or the peritoneum. The same method can also be used for securely fastening a tube into other organs.

5 In accordance with one embodiment a tube adapted to be inserted in a luminal or bladder organ of a patient, said tube adapted to enter said organ in a tube passageway. The tube comprises a combined securing and sealing device adapted for long term closing of the tube passageway and for long term securing the tube onto an organ. The combined securing and sealing device can comprise a patch comprising a net mounted onto the tube. The net can be adapted to a seal of overgrowth of human fibrotic tissue over the whole net and the patched
10 part of said organ, thereby completely sealing said net and attaching said net to said organ, thus sealing around said tubular passageway. In accordance with one embodiment a net structure is provide with openings less than 2,5 mm, preferable 0,5 mm, to allow said tissue overgrowth.

15 According to one embodiment there is provided a cleaning device for removing clots and particles from the fluid passing through the drainage device. In accordance with one embodiment there is also provided a cleaning device for cleaning the filter. One possibility is to clean the filter mechanically.

20 The cleaning device preferably is adapted to move particles away from the passageway to a place free inside the patient's body, where the body itself will take care of the particles, such as clots.

25 Alternatively, a collecting volume, such as a bag, is provided for collecting particles that have been mechanically cleaned from the filter. Most likely such a bag will then be placed inside the body.

In a preferred embodiment, the cleaning device is adapted to slice, push or scratch away any particles from the filter, but the cleaning device can also suck away any particles from the filter.

- 5 In one embodiment, the cleaning device comprises a first piston, with preferably is provided with a first recess in an outer end portion thereof to collect particles and clots removed from the filter. By providing the first piston with a plurality of channels for accommodating the filter in an extended position of the first piston, it can surround the filter, ensuring essentially complete removal of particles therefrom. This is preferably performed if the first
10 piston is movable in a direction perpendicular to the direction of the flow passageway.

The movement of the first piston can be controlled by a source of pressurized air, ensuring rapid acceleration of the first piston and thereby short cleaning cycles. The movement of the first piston can alternatively be controlled by an electric motor, a solenoid or the like.

15

The filter can in one embodiment be made of biocompatible material in order to avoid unnecessary interference with the environment.

- 20 In one embodiment, a second piston is provided across the flow passageway from the first piston, wherein the second piston is movable in a direction essentially perpendicular to the direction of the flow passageway and spring biased in the direction of the first piston. If an outer end portion of the second piston is provided with a second recess, the first piston and the second piston cooperate to catch particles for further removal. This further removal can be accomplished by means of a third piston, which is movable in a direction perpendicular
25 to both the direction of the flow passageway and the direction of movement of the first piston and of the second piston.

In a preferred embodiment, the flow passageway of the cleaning device has an essentially square cross-sectional shape, which provides for a laminated flow, particularly if the square shape is combined with a filter comprising parallel strips.

5 The system can comprise a switch, preferably a subcutaneous switch being adapted to manually and non-invasively control any function of the cleaning device.

According to one embodiment there is provided a filter for removing clots and particles from the fluid passing through the drainage device. The filter can be powered by a suitable energy supply thereby providing an active filter. In accordance with one embodiment there
10 is provided a powered cleaning device for cleaning the filter. One possibility is to clean the filter mechanically. In accordance with one embodiment the active filter is obtained by periodically changing the filter. The filter can be powered by any suitable energy source. In particular the same energy source used for the pump used for moving fluid through the drainage device can be used to power the active filter. By providing an active filter the filter
15 can be cleaned a suitable times thereby reducing the risk that the filter will be clogged. The way of achieving a clean filter can either be by cleaning the filter while in place or by cleaning it while not in position. If the filter is cleaned while not in position in the fluid passageway of the drain, the drain can either be stopped while cleaning the filter or by replacing the filter with another filter.

20

In one embodiment a cassette of filter is provided. When a filter risks being clogged, the filter is replaced by another filter in the cassette. The used filter can then either be disposed of or be cleaned for later reuse.

25 In one embodiment the cassette is formed by a revolving cylinder comprising a number of filters. When the cylinder revolves on step a new filter is placed in the passageway of the drain.

The cleaning device preferably is adapted to move particles away from the passageway to a place free inside the patient's body, where the body itself will take care of the particles/clots.

- 5 The system for removing particles preferably comprises a hydraulic device having a hydraulic reservoir, wherein the cleaning device is adapted to non-invasively be regulated by manually pressing the hydraulic reservoir.

A wireless remote control can non-invasively regulate any function of the cleaning device.

10

Even more important any function of the device may be programmable by such a remote control.

- 15 Also, a wireless energy transmitter can non-invasively energize the cleaning device. In one embodiment the same energy source is used for the pump of the drainage device and to power the cleaning device.

- 20 The system preferably comprises a feedback device for sending information from inside the patient's body to the outside thereof to give feedback information related to at least one functional parameter of the device or a physical parameter of the patient, thereby optimizing the performance of the system. One preferred functional parameter of the device is correlated to the transfer of energy for charging the internal energy source.

- 25 The system preferably comprises an operation device for operating the cleaning device. This operation device can comprise a motor or a pump, an electrically powered operation device, a hydraulic operation device, or an electric motor.

To improve the performance of the system for removing particles, a physical parameter sensor, such as a pressure sensor, is provided for sensing a physical parameter of the patient. An internal control unit can act in response to the physical parameter sensed by the sensor.

- 5 A functional parameter sensor sensing a functional parameter of the cleaning device can also be provided. An internal control unit acting in response to the functional parameter sensed by the sensor can also be provided.

10 A method of using the system is also provided, wherein at least one function of the cleaning device is regulated from outside the patient's body. The regulation is in a preferred embodiment non-invasively by manually pressing a subcutaneous switch. In an alternative embodiment, non-invasively regulation is performed by manually pressing a hydraulic reservoir connected to the cleaning device.

- 15 Alternatively, the cleaning system comprises a wireless remote control, wherein non-invasively regulation is performed using said remote control.

In a preferred embodiment, the cleaning system for removing particles comprises a wireless energy transmitter, wherein non-invasively regulation is performed using said energy
20 transmitter.

Preferably, an energy source is used for powering and adjusting any function of the cleaning device. The energy source may comprise an internal energy source, which preferably is associated with an external energy source adapted to transmit wireless energy. Energy is
25 preferably transmitted from the external energy source to charge the internal energy source. Feedback information is preferably sent from inside the body to the outside thereof to give feedback related to the functional parameters of the device or physical parameters of the patient. The functional parameter of the device is correlated to the transfer of energy for charging the internal energy source.

In one embodiment, wireless energy is transmitted for powering the operation device.

In a preferred embodiment, the method of using a cleaning system for removing particles comprises the steps of: implanting an implantable source of energy in the patient, providing
5 an external source of energy, controlling the external source of energy to release wireless energy, charging non-invasively the implantable source of energy with the wireless energy, controlling the implantable source of energy from outside the patient's body, and releasing energy for use in connection with operation of the cleaning device. The wireless energy is preferably stored in the implantable source of energy.

10

In another preferred embodiment, the method of using a system for removing particles comprises the steps of: providing an external source of energy outside the patient's body, and controlling the external source of energy from outside the patient's body to release
15 wireless energy, and using released wireless energy for operating the operation device. The wireless energy is preferably transformed into electrical energy inside the patient's body using an implanted energy-transforming device and using the electrical energy when operating the cleaning device.

In one embodiment, the electrical energy is used directly in connection with operation of the
20 cleaning device, as a transforming device transforms the wireless energy into the electrical energy.

In another embodiment, the external source of energy is controlled from outside the patient's body to release non-magnetic wireless energy, and released non-magnetic wireless
25 energy is used for operating the cleaning device.

In yet an alternative embodiment, the external source of energy is controlled from outside the patient's body to release electromagnetic wireless energy, and released electromagnetic wireless energy is used for operating the cleaning device.

The invention also extends to a method for placing a cleaning device, comprising a surgical method via a laparoscopic abdominal approach. The method comprises the steps of: inserting a needle or tube like instrument into the abdomen of the patient's body, using the
5 needle or tube like instrument to fill the patient's abdomen with gas thereby expanding the patient's abdominal cavity, placing at least two laparoscopic trocars in the patient's body, inserting a camera through one of the trocars into the patient's abdomen, inserting at least one dissecting tool through a trocar and dissecting the intended placement area of the patient, placing at least one cleaning device in any part of an implantable drainage device.

10

Further preferred embodiments are defined by the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail by way of non-limiting
15 examples and with reference to the accompanying drawings, in which:

- Figs. 1a and 1b are views of an implantable drainage device in accordance with a first embodiment,
- Fig. 2 is a view of an implantable drainage device in accordance with a second
20 embodiment, and
- Fig. 3 is a flowchart illustrating different steps performed when implanting an implantable drainage device.
- Fig. 4 is a sectional view of a cleaning device according to the invention.
- Fig. 5 is a cross sectional view of the cleaning device of Fig. 4 taken along the line III-III
25 before a cleaning operation.
- Fig. 6 is a sectional view of the cleaning device of Fig. 4 taken along the line IV-IV.
- Fig. 7 is a sectional view similar to that of Fig. 4 showing particles before a cleaning operation.
- Fig. 8 is a sectional view similar to that of Fig. 4 during a first step of a cleaning operation.

- Fig. 9 is a sectional view similar to that of Fig. 4 during a second step of a cleaning operation.
- Fig. 10 is a sectional view similar to that of Fig. 4 during a third step of a cleaning operation.
- 5 - Fig. 11 is a cross sectional view similar to that of Fig. 5 during a cleaning operation.
- Fig. 12 is a sectional view of the cleaning device of Fig. 10 taken along the line X-X showing a cleaning ejection piston before ejection of particles.
- Fig. 13 is a view similar to that of Fig. 11 but after ejection of particles.
- Fig. 14 is a schematic diagram of a cleaning system.
- 10 - Figs. 15 - 30 show various embodiments based on the system of Fig. 14.
- Fig. 31 is a view of an alternative embodiment of a cleaning system.
- Fig. 32 is a general view of an implanted drainage system in a patient.
- Fig. 33 is a detailed view of a drainage system.
- Figs. 34a – 34d are views of exemplary designs of tube ends for different treatment areas.
- 15 - Fig. 35 is a view of a securing arrangement for securing a tube end in a bladder, such as the urine bladder.
- Fig. 36a is a circuit diagram showing an energy transfer amplifier, where the energy is transferred by ultrasonic waves.
- Fig. 36b', 36b'' is a circuit diagram showing further another embodiment of an amplifier.
- 20 - Fig. 36c-d are graphs showing different waveforms of signals in the amplifier of the ultrasonic embodiment.
- Fig. 37 is general view of an implanted drainage apparatus with a filter in a patient.
- Fig. 38 is a detailed view of a powered filter.
- Figs. 39a and 39b are views of a filter cassette.
- 25 - Figs. 40a and 40b are views of a filter cassette.

DETAILED DESCRIPTION

In Figs. 1a and 1b views illustrating an implantable drainage device 100 are shown. The device 100 comprises a bellow 101 adapted to move between a compressed position in

which the bellow has a small inside volume and an expanded position in which the bellow has a larger inside volume. The view in Fig. 1a shows the bellow in a compressed position and the view in Fig. 1b shows the bellow in an expanded position.

5 The device 100 further comprises a member such as screw 103 adapted to compress the bellow 101. The screw 103 is accordance with one embodiment driven by a motor 105. The motor may many type of suitable motor including but not limited an electrical motor and a hydraulic motor. In accordance with one embodiment the motor is associated with a clutch 107 for regulating the power applied to the screw 103.

10

The inside of the bellow 101 is adapted receive and eject body fluid. The body fluid enters the bellow via an inlet 109 when the bellow expands. The fluid exits the bellow 101 via an outlet 111 when the bellow is compressed. In order for the fluid to only enter the bellow via the inlet when the bellow expands, a valve 113 is provided to prevent fluid to enter via the outlet 111 during the expansion phase. Similarly, the valve 113 is adapted to prevent fluid to exit via the inlet 109 when the bellow is compressed. The valve 113 is controlled by a control member 115 such as a solenoid.

20 The inlet and outlet are shaped to have tubes (not shown) fitted thereon. The tube connected to the inlet is preferably shaped and adapted to be placed in a treatment area from which body fluid is to be removed. The tube connected to the outlet is preferably shaped and adapted to be placed in a delivery area to which body fluid is to be moved from the treatment area.

25 During operation the device is adapted to compress the bellow in a compression phase during which fluid is ejected from the device 100 via the outlet tube to the delivery area for example by driving the motor to drive the screw. In a preferred embodiment a spring 117 is also compressed during the compression phase. During operation the device is further adapted to expand the bellow in an expansion phase during which fluid is sucked into the

device 100 via the inlet tube from the treatment area for example by driving the screw in the opposite direction. In a preferred embodiment the spring 117 drives the bellow to expand during the expansion phase. When treating a patient the compression phase and expansion phase are continuously repeated whereby body fluid is removed from the treatment area to
5 the delivery area.

In Fig 2 the device 100 is shown as supplemented with a control unit 119 for controlling the operation of the device 100. The control unit 119 can receive and transmit signals for a remote unit 121. The unit 121 is typically located outside the body when the device 100 is
10 implanted inside a patient. In addition the device can be provided with a chargeable power source 123 connected to the motor. The power source 123 is adapted to receive wireless power from a second power source 125 which typically is located outside the patient when the implantable device 100 is implanted in a patient. Hereby the power source 123 can be recharged at suitable time intervals thereby removing the need for replacing the power
15 source.

In order to prevent or remove a possible occlusion in the tube the drainage device can be provided with a backward release member 126 adapted to generate a backward pressure of fluid or air in the tube for removing or preventing a possible occlusion in the tube. The
20 backward pressure is preferably repeatedly according to a predetermined time schedule. In accordance with one embodiment the release member comprises a pre-pressurized reservoir of air and a valve adapted to release a puff of air in the tube. In accordance with another embodiment the device 100 is adapted to move fluid or air in the tube in the reversed direction thereby creating a reverse flow for prevent or remove a possible occlusion in the
25 tube. This can for example be obtained by controlling the valve 113 to a reversed more of operating so that fluid exits the device 100 via the inlet. In accordance with yet another embodiment a reservoir of the drainage is pre-pressurized by the pump, and a valve of the device is adapted to release a puff of fluid or air in the tube extending from the pre-pressurized reservoir when the pressure has reached a predetermined level.

In Fig. 3 a flowchart illustrating step performed when implanting the device 100 in a patient. First in a step 301 the skin is cut at locations corresponding to the location where the device is to be placed and where the tubes leading to and from the device are going to be placed.

5 Next, in a step 303 the area from which body fluid is to be removed, the treatment area is dissected. Then, in a step 305, the area to which body fluid is to be moved, the delivery area, is dissected. Thereupon, in a step 307, the area where the device is to be placed, the placement area is dissected, if the placement area is different from the treatment area and the delivery area. Next, in a step 309 the device is placed in the placement area and the
10 tubes extending between the device and the treatment area and the delivery area are put into place in steps 311 and 313, respectively.

In accordance with one embodiment a cleaning device 10 is inserted in the flow passageway from the treatment area to where the fluid is moved, I.e. the delivery area.

15

The design of a first preferred embodiment of a cleaning device 10 will now be described in detail, with reference to Figs. 4-6. Fig. 4 shows a sectional view wherein the cleaning device 10 is provided in the flow passageway provided by a tube 2b. A filter 12 is provided across the flow passageway 14 formed in a housing 11 with the function of stopping particles
20 brought forward in tube 2b by the flow, indicated by arrows in the figure. In this preferred embodiment, the filter 12 comprises a plurality of preferably equally spaced strips 12a of some suitable material, such as biocompatible metal or plastic. These strips 12a are preferably arranged mutual parallel.

25 The distance between two adjacent strips is small enough to stop any particles larger than some predetermined size. In accordance with one embodiment the distance is less than 2 millimeters, and even less than 1.0 millimeters. Also for some applications the distance could be larger. The flow passageway 14 can have an essentially square cross-sectional shape or can it can take any suitable shape, such as rectangular or circular.

By providing a plurality of strips 12a as a filter across the flow passageway 14, a laminar flow is achieved downstream of the filter, which is can be advantageous. The flow configuration can be further enhanced by giving the plurality of strips 12a a desired cross-sectional shape, although the rectangular shape shown in Fig. 6 will be adequate for most purposes.

A first piston 16 is provided movable in a direction essentially perpendicular to the direction of the flow passageway 14, i.e., essentially perpendicular to the direction of the flow. This first piston 16 is driven by some suitable actuator means, such as pressurized air, a solenoid arrangement, an electrical servo motor or the like. A motor could be used to build up a stored power that could be released very fast, one example being a spring. In a preferred embodiment, pressurized air acts as the actuator means, since by latching the piston by means of a suitable latching means for the piston, building up the air pressure, and subsequently releasing the piston, very high speed of the piston is achieved, with enables short cleaning times of the filter.

The outer end portion of the first piston 16, i.e., the end portion facing the flow passageway 14, is essentially flush with the wall of the flow passageway in a non-active state of the cleaning device 10. Also, the outer end portion is provided with a concave portion or recess 16a (exaggerated in the figures) in order to act as a particle capturing means, as will be explained below.

The strike range of the first piston 16 is preferably such that it extends all way across the flow passageway 14, as will be explained below with reference to Figs. 7-10. A number of channels 16b corresponding to the number of strips 12a is provided in the first piston 16 to accommodate the strips when the first piston is in an extended position.

The first piston 16 is also provided with a plurality of through holes 17 in the direction of the flow passageway. These through holes will allow a flow through the flow passageway also during a cleaning operation, as will be explained below with reference to Fig. 11.

5 A second piston 18 is provided across the flow passageway 14 from the first piston 16. Also this second piston 18 is movable in a direction essentially perpendicular to the direction of the flow passageway 14 and is biased in the direction thereof by means of a spring 18a, for example. Likewise, the outer end portion of the second piston is provided with a recess 18b similar to the recess 16a of the first piston 16.

10

The first and second pistons 16, 18, are sealed to the housing 11 by means of a respective sealing 20, such as an O sealing.

15

A preferred embodiment of a cleaning method according to the invention will now be described with reference to Figs. 7-10, showing different operational steps of the above-described device. Fig. 7 is a view similar to that of Fig. 4. However, this figure shows the cleaning device 10 during operation, wherein particles, generally designated 22, have assembled on the filter 12.

20

In Fig. 8, the first piston 16 has moved linearly from the retracted starting position shown Fig. 7 to an extended position, wherein the outer end portion thereof is in contact with the second piston 18. Due to the recess 16a in the outer end of the first piston 16, the particles 22 have been assembled in the recess 16a, whereby they have been brought with the first piston 16 during the movement thereof. In the step shown in Fig. 8, the particles are

25

confined in the recess 16a between the first and second pistons 16, 18.

By moving the first piston 16 an additional distance from the position shown in Fig. 8, the second piston 18 is pushed against the force of the spring 18a to a fully retracted position, see Fig. 9. The plurality of strips 12a is in this position fully received in a respective channel

16b in the first piston. It is seen that the outer ends of the first and second pistons define an unobstructed cavity in which the particles are confined. It is thereby possible to remove these by some suitable means. One such means could be a third piston 24, which is movable in a direction perpendicular to both the direction of the flow passageway 14 and the
5 direction of movement of the first and second pistons 16, 18. This third piston, the movement of which could be controlled by means of pressurized air, a solenoid, an electric motor etc., scrapes off the particles collected by the first piston 16 and moves them to a place outside of the cleaning device 10 and the flow passageway 14.

10 Fig. 11 shows a side view of the first piston 16 in a fully extended position, i.e., corresponding to the view of Fig. 10. It is here seen that in this position the through holes 17 will be aligned with the flow passageway 14, thereby allowing a flow therethrough also during cleaning of the filter 12.

15 Fig. 12 shows a cross-sectional view taken along line X-X of Fig. 10. It is here seen that the third piston 24 collects the particles 22 during a downward movement, indicated by an arrow in the figure. The particles are ejected from the cleaning device 10 when the third piston 24 has reached its lower end position, shown in Fig. 13.

20 Again with reference to Fig. 9, it will be realized that pressurized air can be used for ejecting the collected particles from the cavity formed by the first piston 16 and the second piston 18.

25 A cleaning system, generally designated 28 and comprising a cleaning device as described above will now be described with reference to Figs. 14-26.

A cleaning system is shown in a more generalized block diagram form in Fig. 14, wherein the patient's skin 36, generally shown by a vertical line, separates the interior of the patient to the right of the line from the exterior to the left of the line.

Fig. 15 shows an embodiment of the invention identical to that of Fig. 14, except that a reversing device in the form of an electric switch 38 operable by polarized energy also is implanted in the patient for reversing the cleaning device 10. The wireless remote control of the external energy transmission device 34 transmits a wireless signal that carries polarized energy and the implanted energy transforming device 30 transforms the wireless polarized energy into a polarized current for operating the electric switch 38. When the polarity of the current is shifted by the implanted energy transforming device 30 the electric switch 38 reverses the function performed by the cleaning device 10.

10

Fig. 16 shows an embodiment of the invention identical to that of Fig. 14, except that an operation device 40 implanted in the patient for regulating the cleaning device 10 is provided between the implanted energy transforming device 30 and the cleaning device 10. This operation device can be in the form of a motor 40, such as an electric servo motor. The motor 40 is powered with energy from the implanted energy transforming device 30, as the remote control of the external energy transmission device 34 transmits a wireless signal to the receiver of the implanted energy transforming device 30.

15

Fig. 17 shows an embodiment of the invention identical to that of Fig. 14, except that it also comprises an operation device in the form of an assembly 42 including a motor/pump unit 78 and a fluid reservoir 46 is implanted in the patient. In this case the cleaning device 10 is hydraulically operated, i.e. hydraulic fluid is pumped by the motor/pump unit 44 from the fluid reservoir 46 through a conduit 48 to the cleaning device 10 to operate the cleaning device, and hydraulic fluid is pumped by the motor/pump unit 44 back from the cleaning device 10 to the fluid reservoir 46 to return the cleaning device to a starting position. The implanted energy transforming device 30 transforms wireless energy into a current, for example a polarized current, for powering the motor/pump unit 44 via an electric power supply line 50.

20

25

Instead of a hydraulically operated cleaning device 10, it is also envisaged that the operation device comprises a pneumatic operation device. In this case, pressurized air can be used for regulation and the fluid reservoir is replaced by an air chamber and the fluid is replaced by air.

5

Fig. 18 shows an embodiment of the invention comprising the external energy transmission device 34 with its wireless remote control, the cleaning device 10, in this case hydraulically operated, and the implanted energy transforming device 30, and further comprising a hydraulic fluid reservoir 52, a motor/pump unit 44 and an reversing device in the form of a hydraulic valve shifting device 54, all implanted in the patient. The motor of the motor/pump unit 44 is an electric motor. In response to a control signal from the wireless remote control of the external energy transmission device 34, the implanted energy transforming device 30 powers the motor/pump unit 44 with energy from the energy carried by the control signal, whereby the motor/pump unit 44 distributes hydraulic fluid between the hydraulic fluid reservoir 52 and the cleaning device 10. The remote control of the external energy transmission device 34 controls the hydraulic valve shifting device 54 to shift the hydraulic fluid flow direction between one direction in which the fluid is pumped by the motor/pump unit 44 from the hydraulic fluid reservoir 52 to the cleaning device 10 to operate the cleaning device, and another opposite direction in which the fluid is pumped by the motor/pump unit 44 back from the cleaning device 10 to the hydraulic fluid reservoir 52 to return the cleaning device to a starting position.

Fig. 19 shows an embodiment of the invention identical to that of Fig. 14, except that an internal control unit 56 controlled by the wireless remote control of the external energy transmission device 34, an accumulator 58 and a capacitor 60 also are implanted in the patient. The internal control unit 56 arranges storage of electric energy received from the implanted energy transforming device 30 in the accumulator 58, which supplies energy to the cleaning device 10. In response to a control signal from the wireless remote control of the external energy transmission device 34, the internal control unit 56 either releases

25

electric energy from the accumulator 58 and transforms the released energy via power lines 62 and 64, or directly transforms electric energy from the implanted energy transforming device 30 via a power line 66, the capacitor 60, which stabilizes the electric current, a power line 68 and the power line 64, for the operation of the cleaning device 10.

5

The internal control unit is preferably programmable from outside the patient's body. In a preferred embodiment, the internal control unit is programmed to regulate the cleaning device 10 to remove any particles from the drainage device and place the particles outside the drainage device repeatedly according to a pre-programmed time-schedule.

10 In accordance with an alternative, the capacitor 60 in the embodiment of Fig. 19 may be omitted. In accordance with another alternative, the accumulator 58 in this embodiment may be omitted.

Fig. 20 shows an embodiment of the invention identical to that of Fig. 14, except that a
15 battery 70 for supplying energy for the operation of the cleaning device 10 and an electric switch 72 for switching the operation of the cleaning device 10 also are implanted in the patient. The electric switch 72 is operated by the energy supplied by the implanted energy transforming device 30 to switch from an off mode, in which the battery 70 is not in use, to an on mode, in which the battery 70 supplies energy for the operation of the cleaning device
20 10.

Fig. 21 shows an embodiment of the invention identical to that of Fig. 20, except that an internal control unit 56 controllable by the wireless remote control of the external energy transmission device 34 also is implanted in the patient. In this case, the electric switch 72 is
25 operated by the energy supplied by the implanted energy transforming device 30 to switch from an off mode, in which the wireless remote control is prevented from controlling the internal control unit 56 and the battery is not in use, to a standby mode, in which the remote control is permitted to control the internal control unit 56 to release electric energy from the battery 70 for the operation of the cleaning device 10.

Fig. 22 shows an embodiment of the invention identical to that of Fig. 21, except that an accumulator 58 is substituted for the battery 70 and the implanted components are interconnected differently. In this case, the accumulator 58 stores energy from the implanted energy transforming device 30. In response to a control signal from the wireless remote control of the external energy transmission device 34, the internal control unit 56 controls the electric switch 72 to switch from an off mode, in which the accumulator 58 is not in use, to an on mode, in which the accumulator 58 supplies energy for the operation of the cleaning device 10.

Fig. 23 shows an embodiment of the invention identical to that of Fig. 22, except that a battery 70 also is implanted in the patient and the implanted components are interconnected differently. In response to a control signal from the wireless remote control of the external energy transmission device 34, the internal control unit 56 controls the accumulator 58 to deliver energy for operating the electric switch 72 to switch from an off mode, in which the battery 70 is not in use, to an on mode, in which the battery 70 supplies electric energy for the operation of the cleaning device 10.

Alternatively, the electric switch 72 may be operated by energy supplied by the accumulator 58 to switch from an off mode, in which the wireless remote control is prevented from controlling the battery 70 to supply electric energy and is not in use, to a standby mode, in which the wireless remote control is permitted to control the battery 70 to supply electric energy for the operation of the cleaning device 10.

Fig. 24 shows an embodiment of the invention identical to that of Fig. 20, except that a motor 40, a mechanical reversing device in the form of a gear box 74, and an internal control unit 56 for controlling the gear box 74 also are implanted in the patient. The internal control unit 56 controls the gear box 74 to reverse the function performed by the cleaning device 10 (mechanically operated).

Fig. 25 shows an embodiment of the invention identical to that of Fig. 23 except that the implanted components are interconnected differently. Thus, in this case the internal control unit 56 is powered by the battery 70 when the accumulator 58, suitably a capacitor, activates the electric switch 72 to switch to an on mode. When the electric switch 72 is in its on mode
5 the internal control unit 56 is permitted to control the battery 70 to supply, or not supply, energy for the operation of the cleaning device 10.

Fig. 26 schematically shows conceivable combinations of implanted components of the apparatus for achieving various communication options. Basically, there are the cleaning
10 device 10, the internal control unit 56, motor/pump unit 44, and the external energy transmission device 34 including the external wireless remote control. As already described above the wireless remote control transmits a control signal which is received by the internal control unit 56, which in turn controls the various implanted components of the apparatus.

15

A feedback device, preferably in the form of a sensor 76, may be implanted in the patient for sensing a physical parameter of the patient, such as the pressure in a blood vessel. The internal control unit 56, or alternatively the external wireless remote control of the external energy transmission device 34, may control the cleaning device 10 in response to signals
20 from the sensor 76. A transceiver may be combined with the sensor 76 for sending information on the sensed physical parameter to the external wireless remote control. The wireless remote control may comprise a signal transmitter or transceiver and the internal control unit 56 may comprise a signal receiver or transceiver. Alternatively, the wireless remote control may comprise a signal receiver or transceiver and the internal control unit 56
25 may comprise a signal transmitter or transceiver. The above transceivers, transmitters and receivers may be used for sending information or data related to the cleaning device 10 from inside the patient's body to the outside thereof.

Alternatively, the sensor 76 may be arranged to sense a functional parameter of the cleaning device 10.

Where the motor/pump unit 44 and battery 70 for powering the motor/pump unit 44 are
5 implanted, the battery 70 may be equipped with a transceiver for sending information on the condition of the battery 70.

Fig. 27 shows an alternative embodiment wherein the cleaning device 10 is regulated from outside the patient's body. The cleaning system 28 comprises a cleaning device 10
10 connected to a battery 70 via a subcutaneous switch 80. Thus, the regulation of the cleaning device 10 is performed non-invasively by manually pressing the subcutaneous switch, whereby the operation of the cleaning device 10 is switched on and off. It will be appreciated that the shown embodiment is a simplification and that additional components, such as an internal control unit, can be added to the cleaning system.

15

Fig. 28 shows an alternative embodiment, wherein the cleaning system 28 comprises a cleaning device 10 in fluid connection with a hydraulic fluid reservoir 52. Non-invasive regulation is performed by manually pressing the hydraulic reservoir connected to the cleaning device 10.

20

A further embodiment of a system according to the invention comprises a feedback device for sending information from inside the patient's body to the outside thereof to give feedback information related to at least one functional parameter of the clot removal device or system or a physical parameter of the patient, thereby optimizing the performance of the
25 system.

One preferred functional parameter of the device is correlated to the transfer of energy for charging the internal energy source.

In Fig. 29, an arrangement is schematically illustrated for supplying an accurate amount of energy to a cleaning system 28 implanted in a patient, whose skin 36 is indicated by a vertical line. A cleaning device 10 is connected to an implanted energy transforming device 30, likewise located inside the patient, preferably just beneath the patient's skin 36.

5 Generally speaking, the implanted energy transforming device 30 may be placed in the abdomen, thorax, muscle fascia (e.g. in the abdominal wall), subcutaneously, or at any other suitable location. The implanted energy transforming device 30 is adapted to receive wireless energy E transmitted from an external energy source 34a provided in the external energy transmission device 34 located outside the patient's skin 36 in the vicinity of the
10 implanted energy transforming device 30.

As is well known in the art, the wireless energy E may generally be transferred by means of any suitable Transcutaneous Energy Transfer (TET) device, such as a device including a primary coil arranged in the external energy source 34a and an adjacent secondary coil
15 arranged in the implanted energy transforming device 30. When an electric current is fed through the primary coil, energy in the form of a voltage is induced in the secondary coil which can be used to operate a cleaning device, e.g. after storing the incoming energy in an energy storing device or accumulator, such as a battery or a capacitor. However, the present invention is generally not limited to any particular energy transfer technique, TET devices
20 or energy storing devices, and any kind of wireless energy may be used. Other energy transfer methods include but are not limited to non-induction methods such as by means of ultra-sonic devices or using light.

The amount of transferred energy can be regulated by means of an external control unit 34b
25 controlling the external energy source 34a based on the determined energy balance, as described above. In order to transfer the correct amount of energy, the energy balance and the required amount of energy can be determined by means of an internal control unit 56 connected to the cleaning device 10. The internal control unit 56 may thus be arranged to receive various measurements obtained by suitable sensors or the like, not shown,

measuring certain characteristics of the cleaning device 10, reflecting the required amount of energy needed for proper operation of the cleaning device 10. Moreover, the current condition of the patient may also be detected by means of suitable measuring devices or sensors, in order to provide parameters reflecting the patient's condition. Hence, such characteristics and/or parameters may be related to the current state of the cleaning device 10, such as power consumption, operational mode and temperature, as well as the patient's condition reflected by, e.g., body temperature, blood pressure, heartbeats and breathing.

Furthermore, an energy storing device or accumulator 58 may optionally be connected to the implanted energy transforming device 30 for accumulating received energy for later use by the cleaning device 10. Alternatively or additionally, characteristics of such an accumulator, also reflecting the required amount of energy, may be measured as well. The accumulator may be replaced by a battery, and the measured characteristics may be related to the current state of the battery, such as voltage, temperature, etc. In order to provide sufficient voltage and current to the cleaning device 10, and also to avoid excessive heating, it is clearly understood that the battery should be charged optimally by receiving a correct amount of energy from the implanted energy transforming device 30, i.e. not too little or too much. The accumulator may also be a capacitor with corresponding characteristics.

For example, battery characteristics may be measured on a regular basis to determine the current state of the battery, which then may be stored as state information in a suitable storage means in the internal control unit 56. Thus, whenever new measurements are made, the stored battery state information can be updated accordingly. In this way, the state of the battery can be "calibrated" by transferring a correct amount of energy, so as to maintain the battery in an optimal condition.

Thus, the internal control unit 56 is adapted to determine the energy balance and/or the currently required amount of energy, (either energy per time unit or accumulated energy) based on measurements made by the above-mentioned sensors or measuring devices on the

cleaning device 10, or the patient, or an energy storing device if used, or any combination thereof. The internal control unit 56 is further connected to an internal signal transmitter 82, arranged to transmit a control signal reflecting the determined required amount of energy, to an external signal receiver 34c connected to the external control unit 34b. The amount of
5 energy transmitted from the external energy source 34a may then be regulated in response to the received control signal.

Alternatively, sensor measurements can be transmitted directly to the external control unit 34b wherein the energy balance and/or the currently required amount of energy can be
10 determined by the external control unit 34b, thus integrating the above-described function of the internal control unit 56 in the external control unit 34b. In that case, the internal control unit 56 can be omitted and the sensor measurements are supplied directly to the internal signal transmitter 82 which sends the measurements over to the external signal receiver 34c and the external control unit 34b. The energy balance and the currently required amount of
15 energy can then be determined by the external control unit 34b based on those sensor measurements.

Hence, feedback of information indicating the required energy can be used, which is more efficient because it is based on the actual use of energy that is compared to for example the
20 received energy, e.g. with respect to the amount of energy, the energy difference, or the energy receiving rate as compared to the energy rate used by the cleaning device. The cleaning device may use the received energy either for consuming or for storing the energy in an energy storage device or the like. The different parameters discussed above would thus be used if relevant and needed and then as a tool for determining the actual energy balance.
25 However, such parameters may also be needed per se for any actions taken internally to specifically operate the clot removal device.

The internal signal transmitter 82 and the external signal receiver 34c may be implemented as separate units using suitable signal transfer means, such as radio, IR (Infrared) or

ultrasonic signals. Alternatively, the internal signal transmitter 82 and the external signal receiver 34c may be integrated in the implanted energy transforming device 30 and the external energy source 34a, respectively, so as to convey control signals in a reverse direction relative to the energy transfer, basically using the same transmission technique.

5 The control signals may be modulated with respect to frequency, phase or amplitude.

The energy supply arrangement illustrated in Fig. 29 may operate basically in the following manner. The energy balance is first determined by the internal control unit 56. A control signal reflecting the required amount of energy is also created by the internal control unit
10 56, and the control signal is transmitted from the internal signal transmitter 82 to the external signal receiver 34c. Alternatively, the energy balance can be determined by the external control unit 34b instead depending on the implementation, as mentioned above. In that case, the control signal may carry measurement results from various sensors. The amount of energy emitted from the external energy source 34a can then be regulated by the
15 external control unit 34b, based on the determined energy balance, e.g. in response to the received control signal. This process may be repeated intermittently at certain intervals during ongoing energy transfer, or may be executed on a more or less continuous basis during the energy transfer.

20 The amount of transferred energy can generally be regulated by adjusting various transmission parameters in the external energy source 34a, such as voltage, current, amplitude, wave frequency and pulse characteristics.

A method is thus provided for controlling transmission of wireless energy supplied to an
25 electrically operable cleaning device implanted in a patient. The wireless energy E is transmitted from an external energy source located outside the patient and is received by an internal energy receiver located inside the patient, the internal energy receiver being connected to the clot removal device for directly or indirectly supplying received energy thereto. An energy balance is determined between the energy received by the internal

energy receiver and the energy used for the cleaning device. The transmission of wireless energy E from the external energy source is then controlled based on the determined energy balance.

5 A system is also provided for controlling transmission of wireless energy supplied to an electrically operable cleaning device implanted in a patient. The system is adapted to transmit the wireless energy E from an external energy source located outside the patient which is received by an implanted energy transforming device located inside the patient, the implanted energy transforming device being connected to the cleaning device for directly or
10 indirectly supplying received energy thereto. The system is further adapted to determine an energy balance between the energy received by the implanted energy transforming device and the energy used for the cleaning device, and control the transmission of wireless energy E from the external energy source, based on the determined energy balance.

15 The functional parameter of the device is correlated to the transfer of energy for charging the internal energy source.

In yet an alternative embodiment, the external source of energy is controlled from outside the patient's body to release electromagnetic wireless energy, and released electromagnetic
20 wireless energy is used for operating the cleaning device.

In another embodiment, the external source of energy is controlling from outside the patient's body to release non-magnetic wireless energy, and released non-magnetic wireless energy is used for operating the cleaning device.

25

Those skilled in the art will realize that the above various embodiments according to Figs. 14-30 could be combined in many different ways. For example, the electric switch 38 operated polarized energy could be incorporated in any of the embodiments of Figs. 16, 19-

25, the hydraulic valve shifting device 54 could be incorporated in the embodiment of Fig. 17, and the gear box 74 could be incorporated in the embodiment of Fig. 16.

Wireless transfer of energy for operating the cleaning device has been described to enable
5 non-invasive operation. It will be appreciated that the cleaning device can be operated with wire bound energy as well. One such example is shown in Fig. 30, wherein an external switch 84 is interconnected between the external energy source 34a and an operation device, such as an electric motor regulating the cleaning device 10, by means of power lines 86 and 88. An external control unit 34b controls the operation of the external switch to effect
10 proper operation of the cleaning device 10.

Also other filters can be used in the cleaning device 10. One such filter is depicted in Fig. 31. The filter 90 in Fig. 31 comprises a rotating member 91 located in the flow passage way of the drainage device. The rotating member can be formed by a number of segments 92.
15 Particles in the flow will be caught by the segments and moved to the rim of the rotating member 91 where the particles can be effectively removed from the flow pathway of the drainage device. The cleaning device in Fig. 31 can be powered in the same manner as the cleaning device described above.

20 In Fig. 32 a general view of a patient having an implanted drainage system as described herein. The system comprises a first end of the drainage system located in a treatment area 1. The system further comprises a pump 100 adapted to move fluid from the treatment area 1 to a delivery area 3. The treatment area can be any area from which fluid is to be moved including but not limited to the abdomen, the lungs and the brain. Similarly the delivery area
25 can be any suitable delivery area within the body, including but not limited to the Urine bladder and the stomach.

The pump can be powered by an energy source 123 as described above. The energy source can be energized from outside the patient using a wireless energy transfer device. The

energy transfer device can transfer energy in a way suitable such as by inductive energy using coils or ultra sonic energy transfer or by transmitting light through the skin of the patient. Also the fluid passageway from the treatment area to the delivery area can comprise a cleaning device 10 as described above. The cleaning device can in one embodiment be
5 powered by a motor and the motor can then be supplied with energy from the energy source
123.

In Fig. 33 the drainage system is shown in more detail. The view in Fig. 33 corresponds to the view in Fig. 32. However instead of showing the treatment area1, Fig. 33 shows and end
10 member 4 of the tube located in the treatment area. As described above the end member 4 can be designed differently for different treatment areas. Different end members are described in more detail below.

In Figs. 34a – 34d different exemplary designs of end members 4 are shown in more detail.
15 Thus, a connecting tube for use in an implantable drainage device being adapted to move body fluid from one part of the body, herein termed treatment area, of a human or mammal patient is provided. A distal end of the connecting tube comprises in accordance with one embodiment a portion having a flat shape. Such an end portion can advantageously be used in the lungs when moving fluid from the lungs. The end portion can have an essential
20 circular shape as is shown in Fig. 34a or have a polygonal shape as is shown in Fig 34b.

In accordance with one embodiment the distal end of the connecting tube can comprises a portion having a generally cylindrical shape as is shown in Fig. 34c. Such a shape can be preferred in applications where there is a risk that the tube end is sucked towards the wall of
25 the treatment area. In Fig. 34d yet another embodiment is shown with a very flexible tube end that can be used as a versatile tube in that it combines advantages of a flat tube end and a cylindrical tube end at the expense of the disadvantages of being flexible.

The tube ends are provided with holes or formed by a netlike structure. The diameter of the hole can in accordance with one embodiment be in the range of 1 – 10 mm. The number of holes and the diameter can typically depend on the treatment. As a general rule more holes and larger holes will give a lower sucking force and vice versa. Thus, areas where a low sucking force is required such as in the lungs can be treated using a tube end having many and large holes in the tube end.

In Fig. 35 a securing arrangement for securing a second end of a tube of the drainage device into the urine bladder is depicted. The arrangement comprises a tube end placed in the urine bladder 3 through a hole made in the wall of the urine bladder. On the outside the tube is led through a tunnel 95 formed by folding the outside wall of the urine bladder around the tube. The tunnel is secured around the tube by sutures 97 or similar. At the end of the tunnel a net structure 96 is tightly secured to the tube. The net structure has small diameter typically smaller than 0.5 mm. In any event the net structure has holes that will be small enough to be overgrown by tissue thereby providing a tight sealing so that no leakage occur. As stated above energy can be transferred in different manners from outside a patient into a implanted drain as described herein. In particular the energy can be transferred by means of an inductive energy transfer or by transmission using an ultrasonic energy transmission, or by transmission of energy using light.

20

Fig 36a illustrates a triangle wave generator circuit, the output of which is connected as an input terminal of an amplifier used for transmitting energy using an ultrasonic energy transmission. In figures 36a and 36b', 36b'' the symbols Y1, Y2, Y3 and so on symbolize test points within the circuit. The components in the circuit diagrams and their respective values are values that work in this particular implementation which of course is only one of an infinite number of possible design solutions.

25

Fig. 36a shows a circuit diagram containing most of an exemplary amplifier, in the lower left corner of Fig. 36a there is the LF input which is the input for the 25 kHz sine wave that

should be amplified into a digital output signal. The LF-input there is the triangle wave input emanating from the Triangle schematic. To the right in the middle in the Core schematic there is the transmitting crystal, X4, connected to the differential digital outputs, positive and negative output, of the amplifier. The transmitting crystal X4 is in series with its associated tuning circuit components tuned to the sending frequency, which in this particular case is 25 kHz. Figs. 36c-36d displays the relationship between the input and the output signal of the amplifier, in Fig.36c Y25 is the input signal and Y2 is the positive digital output signal from the amplifier and in Fig. 36d Y13 is the negative digital output from the amplifier.

10

As described above the implanted drainage device can be powered by an internal power supply. The same power supply or another power supply can be used to provide energy the filter and or cleaning device 10 as described herein. In Fig. 37 a general view similar to the view in Fig. 32 is shown where the filter and the cleaning device 10 is connected to a power supply. The apparatus in Fig. 37 comprises a first end of the drainage apparatus located in a treatment area 1. The apparatus further comprises a pump 100 adapted to move fluid from the treatment area 1 to a delivery area 3. The treatment area can be any area from which fluid is to be move including but not limited to the abdomen, the lungs and the brain. Similarly the delivery area can be any suitable delivery area within the body, including but not limited to the Urine bladder and the stomach. The apparatus can as stated above further comprise a filter and or a cleaning device 10. The filter and or cleaning device 10 can be powered by an energy source 123a as described above. The energy source can be the same as the energy source 123 powering a pump, but can also be another energy source. The energy source 123a can be energized from outside the patient using a wireless energy transfer device. The energy transfer device can transfer energy in a way suitable such as by inductive energy using coils or ultra sonic energy transfer or by transmitting light through the skin of the patient. Also the fluid passageway from the treatment area to the delivery area can comprise a cleaning device 10 as described above. The cleaning device can in one

25

embodiment be powered by a motor and the motor can then be supplied with energy from the energy source 123a.

In Fig. 38 the power supply to a filter and a cleaning device 10 is shown in more detail. The view in Fig. 38 corresponds to the view in Fig. 37. However instead of showing the treatment area 1, Fig. 38 shows an end member 4 of the tube located in the treatment area. As is shown in Fig. 38 the energy source 123 and 123a can be energized from outside the skin 5 of a patient by an external energy source 6. The energy source can also receive and transmit information to and from an external signaling device 7. The cleaning device can also be connected to changeable filter cassettes 127. In accordance with one embodiment a dirty filter of a cassette 127 is adapted to be replaced by a new filter of the cassette. The filter can also comprise a net structure.

In Fig. 39a a cassette 127 for holding filters is shown. The cassette 27 comprises a revolving cylinder 129 having segments 130 each holding a filter. The cylinder 129 is tightly sealed between two supports 131 holding the cylinder 129 in place and providing a tight sealing. The fluid passage way of an implantable drainage apparatus passes through the cassette 127. The cassette is driven by a motor 133 causing the cylinder 129 to revolve at suitable times. The motor is powered by a power supply 123b. The power supply can be a power supply like the power supplies 123 or 123a. In accordance with one embodiment the power supplies 123, 123a and 123b is the one and same power supply. As with the power supplies 123 and 123a, the power supply 123b can receive wireless energy in a suitable form, including but not limited to inductive energy ultrasonic energy, light energy or any other form of wireless energy set out above. The energy is supplied by an external wireless energy transmitter 6 adapted to transmit energy through the skin 5 of a patient having the cassette 127 implanted. The power supply 132b can also comprise a control unit as described above for controlling the revolving cassette 127. The control unit can provide feedback to the outside and receive input data from an external transceiver 7 in a manner similar to the control unit used in conjunction with control of the pump.

In Fig. 39b the cassette 127 is shown from the side with the supports 131 and the revolving cylinder spaced apart is a disassembled view.

5 In Fig. 40a an alternative embodiment of the cassette 127 is shown. The view in Fig. 39a is similar to the view in Fig. 39a. In the embodiment in Fig. 40a a magazine 135 having a number of cylinders 129 stored therein is provided. Hereby a cylinder 129 can be replaced by shifting the cylinders in the magazine 135. In one embodiment the cylinders are shifted by pressurized air.

10

In Fig. 40b the cassette 127 is shown from the side with the supports 131 and the revolving cylinder spaced apart is a disassembled view.

Please note that any embodiment or part of embodiment or feature or method or associated
15 system or part of system described herein may be combined in any combination.

CLAIMS

1. An apparatus for drainage of a body fluid in a human or mammal patient, comprising:
- 5 - a drainage device,
- an energy source adapted to supply energy to said drainage device, and
- at least one connecting tube connected to said drainage device, the drainage device and the tube forming a drainage arrangement, wherein
- 10 the drainage arrangement is adapted to be implanted inside the body of the patient, and wherein said tube interconnects one part of the body with another part of the body and said drainage device is adapted to suck body fluid from the one part of the body via the connecting tube to the other part of the body and wherein the device includes an expanding reservoir comprising:
- 15 - a bellow having an inlet with an inlet return valve and an outlet with an outlet return valve,
- a member adapted to move the bellow to expand to suck fluid, and
- a motor adapted to compress the bellow and move fluid out, wherein said drainage device is adapted to repeat the sucking and moving of fluid to substantially constantly suck fluid when not moving fluid to the other part of the body.
- 20
2. The apparatus according to claim 1, wherein the connecting tube is adapted to have the size, shape and configuration adapted to a specific treatment area of the one and/ or the other part of the body.
- 25 3. The apparatus according to claim 1, wherein the drainage device includes a pump comprising a bellow provided with one inlet having an inlet return valve and one outlet having an outlet return valve and further comprising a motor adapted to move the bellow to compress the bellow and pump out via the outlet.

4. An apparatus according to claim 1, wherein the drainage device includes a pump comprising a bellow provided with one inlet having an inlet return valve and one outlet with an outlet return valve and further comprising a motor adapted to expand the bellow to suck from the inlet.

5

5. The apparatus according to claim 1, wherein said drainage device constantly sucks fluid using a pre-tensioned load when not moving fluid to the other part of the body.

6. The apparatus according to claim 5, wherein said pre-tensioned load comprises a spring loaded by a motor.

10

7. The apparatus according to claim 1, further, comprising
- an energy source adapted to supply energy to said bellow.

8. The apparatus according to claim 1, wherein the connecting tube is adapted to have the size, shape and configuration adapted to a specific treatment area of the one and/ or the another part of the body.

15

9. The apparatus according to claim 8, wherein said bellow comprises an inlet with an inlet return valve and an outlet with an outlet return valve and further comprising a passive spring adapted to move the bellow to expand to suck from the inlet, the bellow further being associated with a motor adapted to compress the bellow and move fluid out from the outlet and thereby pre-tensioning said spring, said drainage device further being adapted to repeat the sucking and moving of fluid to substantially constantly suck fluid when not moving fluid to another part of the body.

20

25

10. An apparatus for drainage of a body fluid with the body of a human or mammal patient, comprising:
- a pump,

- an energy source adapted to supply energy to said pump,
- at least one tube connected to said pump the tube and pump are adapted to be placed inside the body without any mechanical connection to the outside through the skin, and wherein said pump is adapted to pump body fluid from on part of the body, in a fluid passageway, to
5 another part of the body using power from said energy source, wherein said fluid passageway is provided with a cleaning device.

11. The apparatus according to claim 10, wherein the connecting tube is adapted to have the size, shape and configuration adapted to a specific treatment area of the one and/ or the
10 another part of the body.

12. An apparatus for drainage of a body fluid within the body of a human or mammal patient, comprising:
- a drainage device,
- a cleaning device
15 - an energy source adapted to supply energy to said drainage device,
- at least one first connecting tube connected to said drainage device adapted to drain urine from the urine accumulating renal part of the kidney, and
- a second connecting tube adapted to be connected to the urine bladder, the first and second connecting tubes and the drainage device being implantable in the body adapted to move
20 urine from the renal kidney to the urine bladder, using power from said energy source.

13. The apparatus according to claim 12, wherein the energy source is adapted to receive energy via wireless ultrasound transmission.

14. The apparatus according to claim 12, wherein the cleaning device is adapted to
25 move away cleaned matter.

15. The apparatus according to claim 12, wherein the tube end in the delivery area is provided with a net structure,

16. The apparatus according to claim 15, wherein the net structure is sealed around the tube,
17. The apparatus according to claim 15, wherein the net structure is provided with holes having a diameter adapted to be overgrown by tissue.
- 5 18. The apparatus according to claim 12, wherein the at least one first connecting tube is adapted to have the size, shape and configuration adapted to have the size, shape and configuration to drain urine from the urine accumulating renal part of the kidney.
19. An apparatus for drainage of a body fluid in a human or mammal patient,
10 comprising:
- a drainage a device
- an energy source adapted to supply energy to said drainage device
- at least one first connecting tube connected to said drainage device adapted to drain liquid from the a hydrocephalus in the brain area, and
15 - at least one second connecting tube adapted to be connected to the abdomen, the at least one first and second connecting tubes and the drainage device being adapted to be implanted inside the body, the drainage device further being adapted to move liquid from the hydrocephalus to the abdomen, using power from said energy source.
- 20 20. The apparatus according to claim 19, wherein the at least one first connecting tube is adapted to have the size, shape and configuration adapted to drain liquid from the hydrocephalus in the brain area.
21. The apparatus according to claim 19, further comprising a cleaning device.
25
22. The apparatus according to claim 21, wherein the cleaning device is adapted to move away cleaned matter.

23. The apparatus according to claim 21, wherein the tube end in the delivery area is provided with a net structure.

24. The apparatus according to claim 23, wherein the net structure is sealed around the
5 tube.

25. The apparatus according to claim 23, wherein the net structure is provided with holes having a diameter adapted to be overgrown by tissue.

10 26. An apparatus for drainage of a body fluid in a human or mammal patient, comprising:

- a drainage a device

- an energy source adapted to supply energy to said drainage device

15 - at least one first connecting tube connected to said drainage device adapted to drain liquid from ascites in the abdomen, and

- at least one second connecting tube adapted to be connected to the lymphatic system of the body, the at least one first and second connecting tubes and the drainage device being adapted to be implanted inside the body, the drainage device further being adapted to move liquid from the ascites in the abdomen into the lymphatic system, using power from said

20 energy source.

27. The apparatus according to claim 26, further comprising a cleaning device.

28. The apparatus according to claim 27, wherein the cleaning device is adapted to move
25 away cleaned matter.

29. The apparatus according to claim 27, wherein the tube end in the delivery area is provided with a net structure,

30. The apparatus according to claim 29, wherein the net structure is sealed around the tube,

31. The apparatus according to claim 29, wherein the net structure is provided with holes having a diameter adapted to be overgrown by tissue.

5 32. An apparatus for drainage of a body fluid in a human or mammal patient, comprising:

- a drainage a device,

- a cleaning device

- an energy source adapted to supply energy to said drainage device

10 - at least one first connecting tube connected to said drainage device adapted to drain liquid from ascites in the abdomen, and

- at least one second connecting tube adapted to be connected to the lymphatic system of the body, the at least one first and second connecting tubes and the drainage device being adapted to be implanted inside the body, the drainage device further being adapted to move
15 liquid from the ascites in the abdomen into the urine bladder, using power from said energy source.

33. The apparatus according to claim 32, wherein the energy source is adapted to receive energy via wireless ultrasound transmission.

20 34. The apparatus according to claim 32, wherein the cleaning device is adapted to move away cleaned matter.

35. The apparatus according to claim 32, wherein the tube end in the delivery area is provided with a net structure,

36. The apparatus according to claim 35, wherein the net structure is sealed around the tube,

37. The apparatus according to claim 35, wherein the net structure is provided with holes having a diameter adapted to be overgrown by tissue.

38. The apparatus according to claim 32, wherein the at least one first connecting tube is adapted to have the size, shape and configuration adapted to have the size, shape and configuration to drain liquid from the ascites in the abdomen.

39. An apparatus for drainage of a body fluid in a human or mammal patient, comprising:

- 10 - a drainage a device
- an energy source adapted to supply energy to said drainage device
- at least one first connecting tube connected to said drainage device adapted to drain liquid from the thoraxial cavity, and
- at least one second connecting tube adapted to be connected to the abdomen, the at least
- 15 one first and second connecting tubes and the drainage device being adapted to be implanted inside the body, the drainage device further being adapted to move liquid from the thorax to the abdomen, using power from said energy source.

40. - The apparatus according to claim 39, further comprising a cleaning device.

20

41. The apparatus according to claim 40, wherein the cleaning device is adapted to move away cleaned matter.

42. The apparatus according to claim 40, wherein the tube end in the delivery area is provided with a net structure,

25 43. The apparatus according to claim 42, wherein the net structure is sealed around the tube,

44. The apparatus according to claim 42, wherein the net structure is provided with holes having a diameter adapted to be overgrown by tissue.

45. The apparatus according to claim 39, wherein the at least one first connecting tube is adapted to have the size, shape and configuration adapted to drain liquid from the thorax.

46. An apparatus for drainage of a body fluid in a human or mammal patient, according to any of claims 1,10, 12, 19, 26, 32 or 39 wherein the energy source comprising an internal energy source and external energy source transmitting wireless energy and further comprising an energy transmitter transmitting wireless energy from the external energy source to charge said internal energy source and the apparatus further adapted to send feedback information from inside the body to the outside thereof to give feed back related to any functional parameter of the device or physical parameter of the patient.

47. The apparatus according to claim 46, wherein the functional parameter of the device is correlated to the transfer of energy for charging the internal energy source.

48. The apparatus according to claim 46, further comprising a device adapted to receive transmitted wireless ultra sonic energy.

49. The apparatus according to claim 46, further comprising a device adapted to receive transmitted wireless inductive energy.

50. The apparatus according to claim 46, further comprising a device adapted to receive transmitted wireless light energy.

51. The apparatus according to claim 46, further comprising a device adapted to transmit feedback information.

52. The apparatus according to any claims 1,10, 12, 19, 26, 32 or 39 , wherein said drainage device comprises a bellow comprising an inlet with an inlet return valve and an outlet with an outlet return valve and further comprising a passive spring adapted to move
5 the bellow to expand to suck from the inlet, the bellow further being associated with a motor adapted to compress the bellow and move fluid out from the outlet and thereby pre-tensioning said spring, said drainage device further being adapted to repeat the sucking and moving of fluid to substantially constantly suck fluid when not moving fluid to another part of the body.
- 10
53. The apparatus according to any of claims 1, 10, 12, 19, 26, 32 or 39, comprising a backward release member adapted to generate a backward pressure of fluid or air in the tube for removing or preventing a possible occlusion in the tube.
- 15
54. The apparatus according to claim 53, wherein said backward release member is adapted to generate the backward pressure repeatedly according to a predetermined time schedule.
- 20
55. The apparatus according to claim 53, wherein said release member comprises a pre-pressurized reservoir of air and a valve adapted to release a puff of air in the tube.
56. The apparatus according to claim 53, comprising a pump adapted to move fluid or air in the tube in the reversed direction.
- 25
57. The apparatus according to claim 56, further comprising a reservoir, said reservoir being pre-pressurized by said pump, the apparatus further comprising a valve adapted to release a puff of fluid or air in the tube extending from the pre-pressurized reservoir when the pressure has reached a predetermined level.

58. The apparatus according to claim 1, 10, 12, 19, 26, 32 or 39 , wherein the drainage device is adapted to be placed subcutaneously via surgery.

59. The apparatus according to claim 1, 10, 12, 19, 26, 32 or 39 wherein the drainage
5 device is adapted to be placed in the abdomen.

60. The apparatus according to any of claims 1, 10, 12, 19, 26, 32 or 39 , further comprising a subcutaneous switch, the switch being adapted to manually and non-invasively control any function of the drainage device.

10

61. The apparatus according to any of claims 1, 10, 12, 19, 26, 32 or, further comprising a hydraulic device, comprising a hydraulic reservoir, wherein the drainage device is adapted to non-invasively be regulated by manually pressing said reservoir.

15 62. The apparatus according to any of claims 1, 10, 12, 19, 26, 32 or 39 , further comprising a wireless remote control, wherein the drainage device is adapted to non-invasively have any of its functions regulated by said remote control.

20 63. The apparatus according to any of claims, 1, 10, 12, 19, 26, 32 or, comprising a wireless energy transmitter, wherein the drainage device is adapted to non-invasively have any of its functions regulated by said energy transmitter.

64. The apparatus according to any of claims 1, 10, 12, 19, 26, 32 or, wherein the energy source is adapted to power the drainage device to adjust any of it functions.

25

65. The apparatus according to claim 64, wherein said energy source comprise an internal energy source.

66. The apparatus according to claim 64, wherein said energy source is adapted to receive energy from an external energy source transmitting energy in a wireless mode.

67. The apparatus according to claim 66, wherein the internal energy source is
5 chargeable.

68. The apparatus according to any of claims 1, 10, 12, 19, 26, 32 or, comprising an operation device for operating the drainage device.

69. The apparatus according to claim 68, wherein the operation device comprises a
10 motor or a pump.

70. The apparatus according to claim 68, wherein the operation device comprises an electrically powered operation device.

15 71. The apparatus according to claim 68, wherein the operation device comprises a hydraulic operation device.

72. The apparatus according to claim 69, wherein the operation device comprises an electric motor.
20

73. The apparatus according to any claims 1, 10, 12, 19, 26, 32 or 39, further comprising a sensor sensing a physical parameter of the patient.

74. The apparatus according to any of claims 1, 10, 12, 19, 26, 32 or 39, further
25 comprising a sensor sensing a functional parameter of the drainage device.

75. The apparatus according to claim 73, further comprising an internal control unit acting in response to the sensor sending information.

76. The apparatus according to claim 74, further comprising an internal control unit acting in response to the sensor sending information.

77. The apparatus according to claim 73, wherein the sensor is a pressure sensor.

5

78. The apparatus according to any claims 1, 10, 12, 19, 26, 32 or 39, comprising a filtering device for removing particles from a fluid of a patient, the filtering device being implantable in the patient's body and comprising:

a filter connected to a tube for filtering any particles passing through the tube.

10

79. The apparatus according to claim 78 further comprising a cleaning device for cleaning the filter.

15

80. The apparatus according to claim 79, wherein the cleaning device is powered by a motor.

81. The apparatus according to claim 79, wherein the cleaning device is adapted to move any particles away from the fluid passageway.

20

82. The apparatus according to claim 79, wherein the cleaning device is adapted to move particles to a location within the body of the patient.

83. The apparatus according to claim 79, wherein the cleaning device is adapted to take into account the fibrotic capsula covering the cleaning device when implanted.

84. The apparatus according to claim 79, wherein the filter comprises a rotating member.

25

85. The apparatus according to claim 79, wherein the cleaning device is adapted to slice, push or scratch away any particles from the filter.

86. The apparatus according to claim 79, wherein the cleaning device is adapted to suck away any particles from the filter.
87. The apparatus according to claim 79, wherein the cleaning device comprises a first piston.
- 5 88. The apparatus according to claim 87, wherein an outer end portion of the first piston is provided with a first recess.
89. The apparatus according to claim 87, wherein the first piston is provided with a plurality of channels for accommodating the filter in an extended position of said first piston.
- 10 90. The apparatus according to claim 87, wherein the first piston is movable in a direction perpendicular to the direction of the flow passageway.
91. The apparatus according to claim 90, wherein the first piston during movement is arranged to take away any particles from the filter.
92. The apparatus according to claim 87, comprising a source of pressurized fluid
15 controlling the movement of the first piston.
93. The apparatus according to claim 87, comprising an electric motor controlling the movement of the first piston.
94. The apparatus according to claim 87, comprising a solenoid controlling the movement of the first piston.
- 20 95. The apparatus according to claim 87, comprising a second piston provided across the flow passageway from the first piston.
96. The apparatus according to claim 95, wherein the second piston is movable in a direction essentially perpendicular to the direction of the flow passageway

97. The apparatus according to claim 95, wherein the second piston is spring biased in the direction of the first piston.
98. The apparatus according to claim 95, wherein an outer end portion of the second piston is provided with a second recess.
- 5 99. The apparatus according to claim 95, comprising a third piston, which is movable in a direction perpendicular to both the direction of the flow passageway and the direction of movement of the first piston and of the second piston.
100. The apparatus according to claim 79, wherein the filter is of biocompatible material.
- 10 101. The apparatus according to claim 79, wherein the filter comprises a plurality of strips.
102. The apparatus according to claim 101, wherein the plurality of strips are equally spaced.
103. The apparatus according to any claims 1, 10, 12, 19, 26, 32 or 39, wherein the
15 tube end in the delivery area is provided with a net structure.
104. The apparatus according to claim 103, wherein the net structure is sealed around the tube.
105. The apparatus according to claim 103, wherein the net structure is provided with holes having a diameter that will be overgrown by tissue.
- 20 106. The apparatus according to claim 105, wherein the diameter of the holes is smaller than 2.5 mm.
107. A device for securing a tube through an inner organ of mammal patient, comprising:

- a tube having tube end provided with a net structure secured at a distance from the tube end, the tube being adapted to be inserted into an organ with the net structure on the outside.

108. The device according to claim 107, wherein a tube area between the net structure and the organ is adapted to be invaginated in the organ wall.

5 109. The device according to claim 107, wherein the net structure is sealed around the tube.

110. The device according to claim 107, wherein the net structure is provided with holes having a diameter that will be overgrown by tissue.

10 111. The device according to claim 110, wherein the diameter of the holes is smaller than 2.5 mm.

112. A connecting tube for use in an implantable drainage device being adapted to suck body fluid from one part of the body, via the at least the connecting tube, using power from an energy source, the connecting tube having a distal end adapted to be located in a specific treatment area of a body of a human or mammal patient for drainage of a body fluid
15 from the treatment area of the human or mammal patient, wherein the distal end of the connecting tube comprises a portion having a flat shape.

113. The tube according to claim 112, wherein the portion having a generally flat shape is provided with openings or is formed by a netlike structure.

20 114. The tube according to claim 113, wherein the diameter of the openings is in the range 1-10 mm.

115. The tube according to claim 112, wherein the portion having a generally flat shape is generally circular.

116. The tube according to claim 112 wherein the portion having a generally flat shape is generally polygonal.

117. A connecting tube for use in an implantable drainage device being adapted to suck body fluid from one part of the body, via the at least the connecting tube and further adapted to another part of the body, using power from an energy source, the connecting tube having a distal end adapted to be located in a specific treatment area of a body of a human or mammal patient for drainage of a body fluid from the treatment area of the human or mammal patient, wherein the distal end of the connecting tube comprises a portion having a generally cylindrical shape.
118. The tube according to claim 117, wherein the portion having a generally cylindrical shape is provided with openings or is formed by a netlike structure.
119. The tube according to claim 118, wherein the diameter of the openings is in the range 1-10 mm.
120. A connecting tube for use in an implantable drainage device being adapted to suck body fluid from one part of the body, via the at least the connecting tube and further adapted to another part of the body, using power from an energy source, the connecting tube having a distal end adapted to be located in a specific treatment area of a body of a human or mammal patient for drainage of a body fluid from the treatment area of the human or mammal patient, wherein the distal end of the connecting tube comprises a portion is made of a flexible material.
121. The tube according to claim 120, wherein the distal end is provided with openings or is formed by a netlike structure.
122. The tube according to claim 121, wherein the diameter of the openings is in the range 1-10 mm.
123. A method of using the apparatus according to any of claims 1, 10, 12, 19, 26, 32 or 39, wherein an operation device is used for operating the drainage device.

124. The method according to claim 123, wherein the operation device comprises an electrical powered operation device.
125. The method according to claim 123, wherein the operation device comprises a hydraulic operation device.
- 5 126. The method according to claim 124, wherein the operation device comprises an electric motor.
127. A method of using the apparatus according to any claims 1, 10, 12, 19, 26, 32 or 39, , wherein at least one function of the device is regulated from outside the human or mammal body.
- 10 128. The method according to claim 127, wherein the non-invasively regulation are performed by manually pressing a subcutaneous switch.
129. The method according to claim 127, when the apparatus comprises a hydraulic regulated drainage device and a hydraulic reservoir connected to said constriction device, wherein non-invasively regulation are performed by manually pressing said reservoir.
- 15 130. The method according to claim 127, when the apparatus comprises a wireless remote control, wherein the non-invasively regulation is performed using said remote control.
131. The method according to claim 127, when the apparatus comprises a wireless energy transmitter, wherein the non-invasively regulation is performed using said energy
20 transmitter.
132. The method according to claim 127, wherein the energy source is used for powering said drainage device adapted to adjust any of its functions.
133. The method according to any of claims 1, 10, 12, 19, 26, 32 or 39, , wherein the energy source used comprises an internal energy source.

134. The method according to claim 133, wherein said energy source is associated with an external energy source transmitting wireless energy.

135. The method according to claim 134, further comprising transmitting energy from the external energy source to charge said internal energy source.

5 136. The method according to claim 135, further comprising feedback information being sent from inside the body to the outside thereof to give feed back related to the functional parameters of the device or physical parameters of the patient.

137. The method according to claim 136, wherein the functional parameter of the device is correlated to the transfer of energy for charging the internal energy source.

10 138. A method of using the apparatus according to any of claims 1, 10, 12, 19, 26, 32 or 39, wherein wireless energy is transmitted for powering the operation device.

139. A method of using the apparatus according to any of claims 1, 10, 12, 19, 26, 32 or 39, comprising the steps of:

- implanting a source of energy in the patient,
- 15 - providing an external source of energy,
- controlling the external source of energy to release wireless energy,
- charging non-invasively the implanted source of energy with the wireless energy,
- controlling the implanted source of energy from outside the patient's body, and
- releasing energy for use in connection with the operation of the drainage device.

20 140. The method according to claim 139, wherein the wireless energy is stored in the implantable source of energy.

141. The method according to claim 123, comprising the steps of:

- providing a source of energy outside the patient's body, and
- controlling the external source of energy from outside the patient's body to release
- 25 wireless energy, and using the released wireless energy for operating the operation device.

142. The method according to claim 141, comprising transforming the wireless energy into electrical energy inside the patient's body using an implanted energy-transforming device and using the electrical energy when operating the drainage device.

143. The method according to claim 142, further comprising directly using the electrical energy in connection with the operation of the drainage device, as a transforming device transforms the wireless energy into the electrical energy.

144. The method according to claim 139, further comprising the steps of:
- controlling the external source of energy from outside the patient's body to release non-magnetic wireless energy, and

10 - using the released non-magnetic wireless energy for operating the drainage device.

145. The method according to claim 139, further comprising the steps of
- controlling the external source of energy from outside the patient's body to release electromagnetic wireless energy, and
- using the released electromagnetic wireless energy for operating the drainage device.

15 146. A method for drainage of a body fluid in a human or mammal patient, comprising the steps of;

- implanting a drainage a device comprising an energy source

- placing at least one connecting tube connected to said drainage device in the specific treatment area in the human or mammal body,

20 - sucking body fluid from one part of the body, through the tube,

- supplying energy to said drainage device from said energy source, and

- moving fluid to another part of the body, via a cleaning device using power from said energy source.

147. The method according to claim 146, comprising the steps of:

- sensing a physical parameter of the patient or a functional parameter of the device, and
- sending sensing information to a control unit adapted for regulating said drainage device.

148. A method for drainage of a body fluid in a human or mammal patient,

5 comprising the steps of;

- implanting a drainage a device comprising an energy source and a bellow having an inlet with an inlet return valve and an outlet with an outlet return valve and further comprising a spring,

10 - placing at least one connecting tube connected to said drainage device in the specific treatment area in the human or mammal body,

- sucking body fluid from one part of the body, through the tube,

- supplying energy to said drainage device from said energy source, and

- moving fluid to another part of the body, using power from said energy source.

- moving the bellow to expand itself,

15 - sucking from the inlet,

- accumulating fluid in the bellow,

- compressing said bellow and

- moving fluid out from the outlet and thereby,

- pre-tensioning said spring, and

20 - repeating the sucking and moving of fluid to substantially constantly being sucking fluid when not moving fluid to another part of the body.

149. A method for drainage of a body fluid in a human or mammal patient, using a pump and an energy source adapted to supply energy to said pump and at least one

25 connecting tube connected to said pump comprising the steps of;

- implanting the tube and pump completely inside the body,

- pumping body fluid from one part of the body to another part of the body via a cleaning device using power from said energy source.

150. An operation method for surgically placing the apparatus according to any of
5 claims 1, 10, 12, 19, 26, 32 or 39, in a patient, comprising the steps of:

- cutting the skin,
- dissecting a treatment area
- dissecting a placement area
- placing the drainage device in the placement area, and
- 10 - placing the tube leading from the placement area to the treatment area

151. An operation method for surgically placing the apparatus according to any of
claims 1, 10, 12, 19, 26, 32 or 39, in a patient, comprising the steps of:

- cutting the skin,
- 15 - dissecting a treatment area
- dissecting a placement area
- dissecting a delivery area
- placing the drainage device in the placement area
- placing the tube leading from the placement area to the treatment area
- 20 - placing a second tube leading from the placement area to the delivery area

152. The method according to claim 151, comprising

- sensing a physical parameter of the patient or a functional parameter of the device, and
- sending sensing information to a control unit adapted for regulating said drainage device.

25

153. A method of powering the apparatus according to any of claims 1, 10, 12, 19,
26, 32 or 39, , comprising the steps of;

- transmitting wireless energy,
- storing said wireless energy in a internal source of energy
- powering said drainage device with said stored energy

5 154. A surgical method for treating a patient needing drainage of an area in the body, comprising the steps of;

- cutting an opening in the abdominal wall,
- dissecting at least two intended areas ,
- placing a drainage device according to any of claims 1, 10, 12, 19, 26, 32 or 39,
- 10 comprising and at least one tube in the dissected areas, and
- suturing the abdominal wall

15 155. A method using an apparatus according to any of claims 1, 10, 12, 19, 26, 32 or 39, , for postoperatively and non-invasively regulating the drainage device comprising the steps of;

- moving fluid away from one area of the human or mammal body,
- moving fluid to another part of the body.

20 156. A method for placing a drainage device according to any of claims 1, 10, 12, 19, 26, 32 or 39, , comprising a surgical method via a laparoscopic abdominal approach, the method comprising the steps of:

- inserting a needle like tube into the abdomen of the patients body,
- using the tube to fill the abdomen with gas thereby expanding the abdominal cavity,
- placing at least two laparoscopic trocars in the patient's body,
- 25 - inserting a camera through one of the trocars into the abdomen,
- inserting at least one dissecting tool through a trocar and dissecting at two intended areas of the patient,

- placing at least one drainage device in the abdomen

157. The method according to claim 156, wherein the device is adjusted from outside the patients body.

- 5 158. The method according to claim 156, comprising the steps of
- sensing a physical parameter of the patient or a functional parameter of the device, and
 - sending sensing information to a control unit adapted for regulating said drainage device.

159. A method of placing a drainage device according to any of claims 1, 10, 12,
10 19, 26, 32 or 39, , comprising a surgical method via a laparoscopic thoraxial approach, the method comprising the steps of:

- inserting a needle like tube into the thorax of the patients body,
- using the tube to fill the thorax with gas thereby expanding the thoraxical cavity,
- placing at least two laparoscopic trocars in the patient's body,
- 15 - inserting a camera through one of the trocars into the thorax,
- inserting at least one dissecting tool through a trocar and dissecting at two intended areas of the patient,
- placing at least one drainage device in the thorax
- moving fluid away from one part of the body post operatively to another part of the
20 body
- powering the device with a source of energy, and

160. The method according to claim 159, wherein the device is adjusted from outside the body of the patient.

161. The method according to claim 159, comprising the steps of

- sensing a physical parameter of the patient or a functional parameter of the device, and
- sending sensing information to a control unit adapted for regulating said drainage device.

5 162. An operation method for surgically placing the apparatus according to any of claim 12 comprising the steps of:

- cutting the skin,
- dissecting an area around the renal part of the kidney area
- dissecting a placement area where to place the drainage device inside the abdomen or
10 retroperitoneal or subcutaneously
- dissecting a delivery area around the urine bladder
- placing the drainage device in the placement area
- placing the tube leading from the placement area to the renal kidney
- placing a second tube leading from the placement area to the urine bladder.

15

163. A method according to claim 162, comprising the steps of

- sensing a physical parameter of the patient or a functional parameter of the device, and
- sending sensing information to a control unit adapted for regulating said drainage device
when moving fluid to said urine bladder.

20

164. An operation method for surgically placing the apparatus according to claim 19 comprising the steps of:

- cutting the skin,
- dissecting an area in the brain
- 25 - dissecting a placement area where to place the drainage device inside the abdomen or
retroperitoneal or subcutaneously

- dissecting a delivery area in the abdomen
- placing the drainage device in the placement area
- placing the tube leading from the placement area to the brain
- placing a second tube leading from the placement area to the abdomen

5

165. A method according to claim 164, comprising the steps of

- sensing a physical parameter of the patient or a functional parameter of the device, and
- sending sensing information to a control unit adapted for regulating said drainage device.

166. An operation method for surgically placing the apparatus according to claim

10 26 comprising the steps of:

- cutting the skin,
- dissecting an area in the abdomen
- dissecting a placement area where to place the drainage device inside the abdomen or retroperitoneal or subcutaneously
- 15 - dissecting a delivery area around the lymphatic system
- placing the drainage device in the placement area
- placing the tube leading from the placement area to the abdomen
- placing a second tube leading from the placement area to the lymphatic system.

20 167. A method according to claim 166, comprising the steps of

- sensing a physical parameter of the patient or a functional parameter of the device, and
- sending sensing information to a control unit adapted for regulating said drainage device when moving fluid to the lymphatic system.

25 168. An operation method for surgically placing the apparatus according to claim 32 comprising the steps of:

- cutting the skin,
- dissecting an area in the thorax
- dissecting a placement area where to place the drainage device inside the abdomen or thorax or retroperitoneal or subcutaneously
- 5 - dissecting a delivery in around the abdomen
- placing the drainage device in the placement area
- placing the tube leading from the placement area to the thorax
- placing a second tube leading from the placement area to the abdomen.

10 169. A method according to claim 168, comprising the steps of

- sensing a physical parameter of the patient or a functional parameter of the device, and
- sending sensing information to a control unit adapted for regulating said drainage device when moving fluid to the abdomen.

15 170. A method of using the apparatus according to claim 12, the apparatus comprising a bellow having an inlet with an inlet return valve and an outlet with an outlet return valve and further comprising a spring, the method comprising the steps of:

- moving the bellow to expand itself,
- sucking from the inlet and further from the renal part of the kidney,
- accumulating fluid in the bellow,
- 20 - compressing said bellow and
- moving fluid out from the outlet to the urine bladder and thereby,
- pre-tensioning said spring, and
- repeating the sucking and moving of urine to substantially constantly being sucking urine when not moving fluid to the urine bladder

25

171. The method according to claim 170, comprising the step of:

- repeatedly moving fluid to the urine bladder in response to a signal generated by a pressure sensor.

172. A method using the apparatus according to claim 19, the apparatus comprising a bellow having an inlet with an inlet return valve and an outlet with an outlet return valve and further comprising a spring, the method comprising the steps of:

- 5 - moving the bellow to expand itself,
- sucking from the inlet and further from the brain,
- accumulating fluid in the bellow,
- compressing said bellow,
- moving fluid out from the outlet into the abdomen and thereby pre-tensioning said spring,
- 10 and
- repeating the sucking and moving of fluid to substantially constantly being sucking fluid when not moving fluid to the abdomen.

173. The method according to claim 172, comprising the step of:

- 15 - repeatedly moving fluid to the abdomen in response to a signal generated by a pressure sensor.

174. A method of using an apparatus according to claim 26, the apparatus comprising a bellow having an inlet with an inlet return valve and an outlet with an outlet return valve and further comprising a spring,

- 20 - moving the bellow to expand itself,
- sucking from the inlet and further from the abdomen,
- accumulating fluid in the bellow,
- compressing said bellow
- moving fluid out from the outlet into the lymphatic system and thereby pre-tensioning said
- 25 spring, and
- repeating the sucking and moving of fluid to substantially constantly being sucking fluid when not moving fluid to the lymphatic system.

175. The method according to claim 174, comprising the step of:

- repeatedly moving fluid to the lymphatic system in response to a signal generated by a pressure sensor.

5 176. A method of using an apparatus according to claim 32, the apparatus comprising a bellow having an inlet with an inlet return valve and an outlet with an outlet return valve and further comprising a spring,

- moving the bellow to expand itself,

- sucking from the inlet and further from the thorax,

10 - accumulating fluid in the bellow,

- compressing said bellow and

- moving fluid out from the outlet into the abdomen and thereby pre-tensioning said spring,
and

- repeating the sucking and moving of fluid to substantially constantly being sucking fluid

15 when not moving fluid to the abdomen.

177. The method according to claim 176, comprising the step of:

- repeatedly moving fluid to the abdomen in response to a signal generated by a pressure sensor.

20 178. A filtering device for removing particles from a fluid of a patient, the filtering device being implantable in the patient's body and comprising:

- a tube forming a fluid passageway,

- an active filter connected to the tube for filtering any particles passing through the tube.

25 179. The device according to claim 178, comprising a cassette for changing the filter.

180. The device according to claim 178 or 179, comprising a cleaning device for cleaning the filter.
181. The device according to claim 178 or 179, wherein the filter and or cassette is powered by a motor.
- 5 182. The device according to claim 181, wherein the motor is connected to an internal power supply.
183. The device according to claim 182, wherein the power supply is connected to the filter and to the cassette.
184. The device according to claim 182, wherein the power supply is connected to a
10 pump for moving fluid through the fluid passageway.
185. The device according to claim 179, comprising a revolving cylinder revolving over the fluid passage way.
186. The device according to claim 185, wherein the revolving cylinder revolving over the fluid passage way comprises a number of segments.
- 15 187. The device according to claim 186, wherein segments are adapted to hold a filter.
188. The device according to claim 185, further comprising a magazine adapted to hold a number of cylinders.
189. The device according to claim 180, wherein the cleaning device is adapted to move any particles away from the fluid passageway.
- 20 190. The device according to claim 180, wherein the cleaning device is adapted to move particles to a location within the body of the patient.

191. The device according to claim 180, wherein the cleaning device is adapted to take into account the fibrotic capsula covering the cleaning device when implanted.
192. The device according to claim 180, wherein the filter comprises a rotating member.
- 5 193. The device according to claim 180, wherein the cleaning device is adapted to slice, push or scratch away any particles from the filter.
194. The device according to claim 180, wherein the active filter is adapted be cleaned by sucking away any particles from the filter.
195. The device according to claim 194, wherein the filter is of biocompatible
10 material.
196. The device according to claim 194, wherein the filter comprises a plurality of strips.
197. The device according to claim 196, wherein the plurality of strips are equally spaced.
- 15 198. The device according to claim 178, comprising a collecting volume adapted to collect cleaned matter that has been cleaned from the filter.
199. The device according to claim 198, wherein the collecting volume comprises a reservoir.
200. The device according to claim 178, wherein the filter comprises a net structure.
- 20 201. The device according to claim 178, comprising a switch, the switch being adapted to manually and non-invasively control any function of the filtering device.
202. The device according to claim 201, wherein the switch is a subcutaneous switch.

203. The device according to claim 202, wherein the switch is an electric switch.
204. The device according to claim 178, comprising a hydraulic device having a hydraulic reservoir, wherein the filtering device is adapted to non-invasively be regulated by manually pressing said hydraulic reservoir.
- 5 205. The device according to claim 178, comprising a wireless remote control, wherein the filtering device is adapted to non-invasively have at least one of its functions regulated by said wireless remote control.
206. The device according to claim 205, wherein the wireless remote control comprises at least one external signal transmitter and an internal signal receiver implantable
10 in the patient.
207. The device according to claim 205, wherein the wireless remote control is adapted to transmit at least one wireless control signal for controlling the filtering device.
208. The device according to claim 207, wherein the wireless control signal comprises a frequency, amplitude, or phase modulated signal or a combination thereof.
- 15 209. The device according to claim 207, wherein the wireless control signal comprises an analogue or a digital signal, or a combination of an analogue and digital signal.
210. The device according to claim 178, comprising a wireless energy receiver, wherein the filtering device is adapted to non-invasively be energized by said wireless energy receiver.
- 20 211. The device according to claim 210, wherein the energy receiver is adapted to receive energy as at least one wireless energy signal.
212. The device according to claim 211, wherein the wireless energy signal comprises an analogue or a digital signal, or a combination of an analogue and digital signal.

213. The device according to claim 178, comprising an internal energy source.
214. The device according to claim 213, wherein the energy source is an internal energy source adapted to receive energy from an external energy source transmitting energy in a wireless mode.
- 5 215. The device according to claim 213 wherein the internal energy source is adapted to be charged by energy in a wireless mode.
216. The device according to claim 178, further comprising a sensor for sensing a parameter.
217. The device according to claim 216, wherein the sensor is a functional parameter
10 sensor for sensing a functional parameter of the filtering apparatus.
218. The device according to claim 217, wherein the functional parameter of the apparatus is correlated to the transfer of energy for charging an internal energy source.
219. The device according to claim 216, comprising a feedback device for sending
15 information from inside the patient's body to the outside thereof to give feedback information related to a functional parameter.
220. The device according to claim 216, comprising an internal control unit adapted to act in response to a functional parameter sensed by the sensor.
221. The device according to claim 216, wherein the sensor is a physical parameter sensor for sensing a physical parameter of the patient.
- 20 222. The device according to claim 221, wherein the physical parameter is at least one of: body temperature, blood pressure, blood flow, heartbeats and breathing.
223. The device according to claim 221, wherein the physical parameter sensor is a pressure sensor.

224. The device according to claim 221, further comprising an internal control unit adapted to act in response to a physical parameter signal.

225. The device according to claim 178, comprising an operation device for operating the filtering device.

5 226. The device according to claim 225, wherein the operation device comprises a motor or a pump.

227. The device according to claim 225, wherein the operation device comprises an electric motor.

10 228. The device according to claim 225, wherein the operation device is electrically powered.

229. The device according to claim 225, wherein the operation device comprises a hydraulic operation device.

230. The device according to claim 225, wherein the operation device comprises a pneumatic operation device.

15 231. The device according to claim 225, wherein the physical parameter is at least one of: body temperature, blood pressure, blood flow, heartbeats and breathing.

232. The device according to claim 225, wherein the physical parameter sensor is a pressure sensor.

20 233. The device according to claim 225, further comprising an internal control unit adapted to act in response to a physical parameter signal.

234. The device according to claim 178, comprising an operation device for operating the filtering device.

235. The device according to claim 225, wherein the operation device comprises a motor or a pump.

236. The device according to claim 225, wherein the operation device comprises an electric motor.

5 237. The device according to claim 225, wherein the operation device is electrically powered.

238. The device according to claim 225, wherein the operation device comprises a hydraulic operation device.

10 239. The device according to claim 225, wherein the operation device comprises a pneumatic operation device.

Fig. 1a

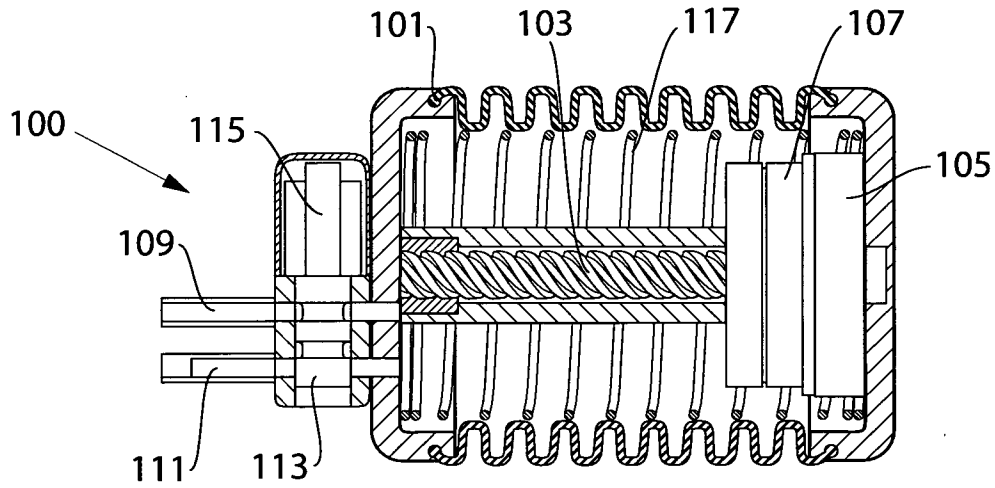


Fig. 1b


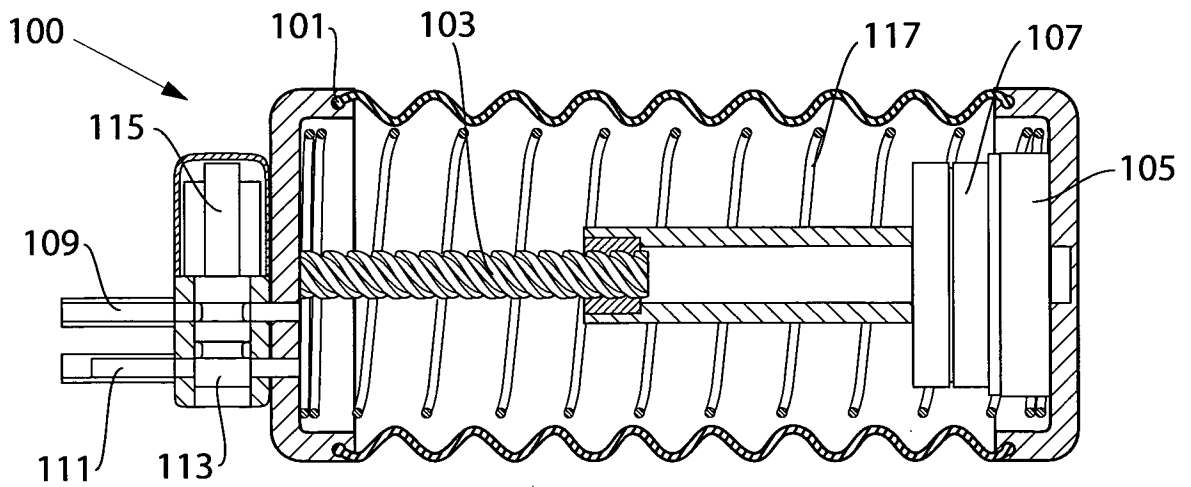


Fig. 2

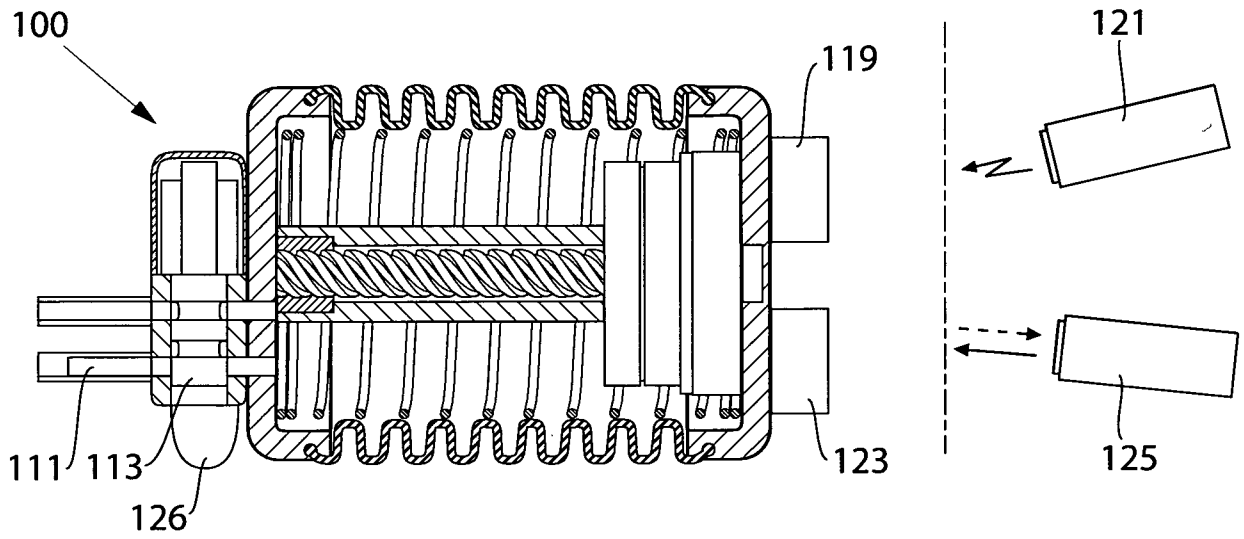

3/25

Fig.3

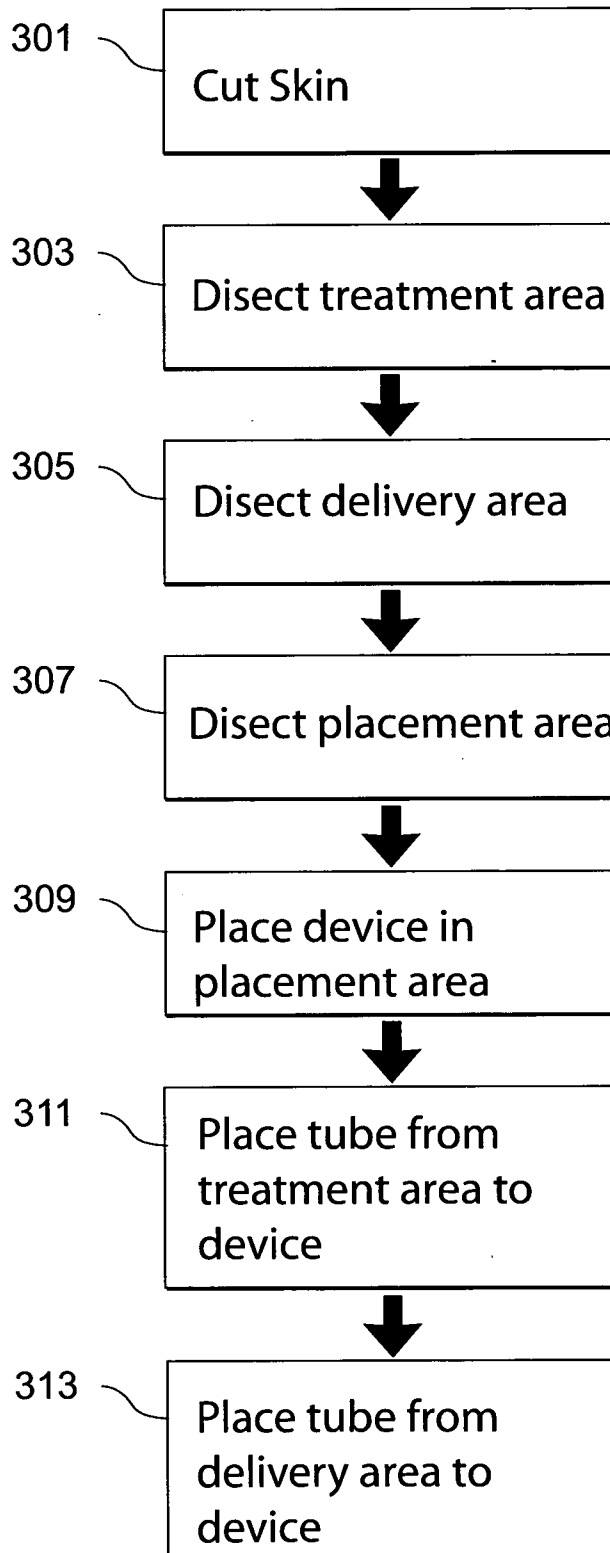


Fig. 7

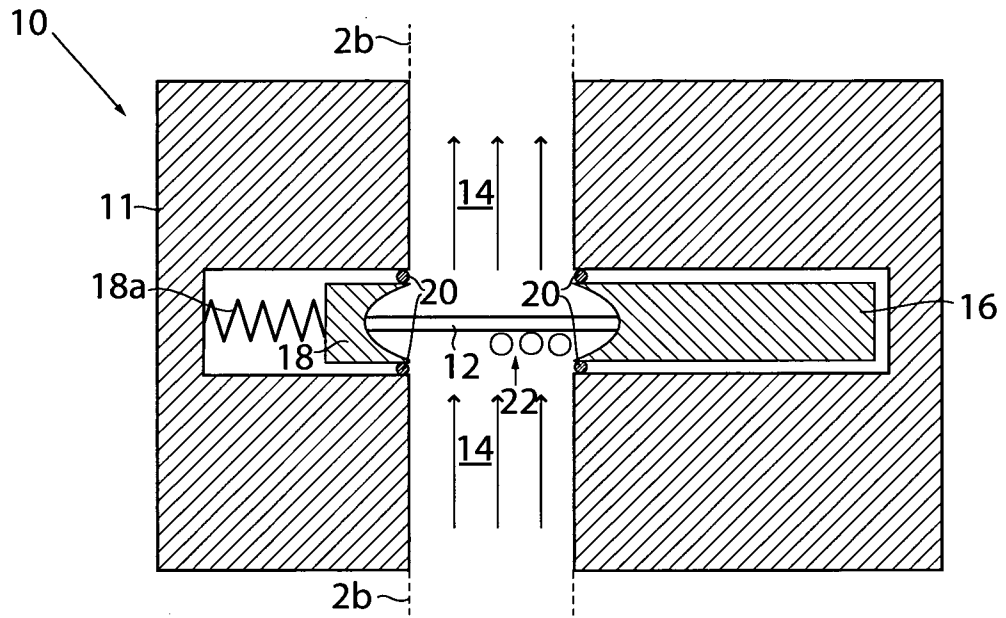


Fig. 8

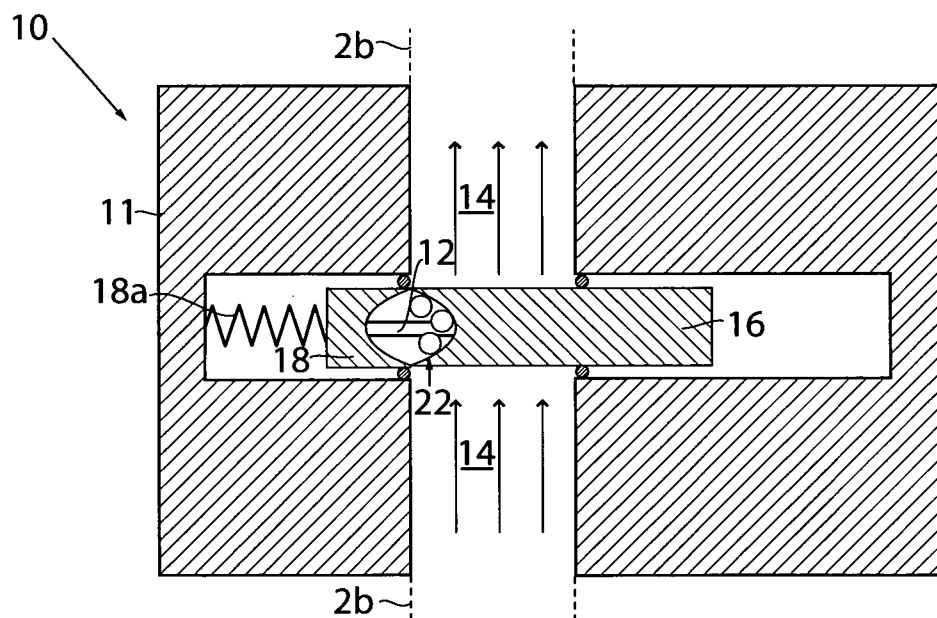


Fig. 9

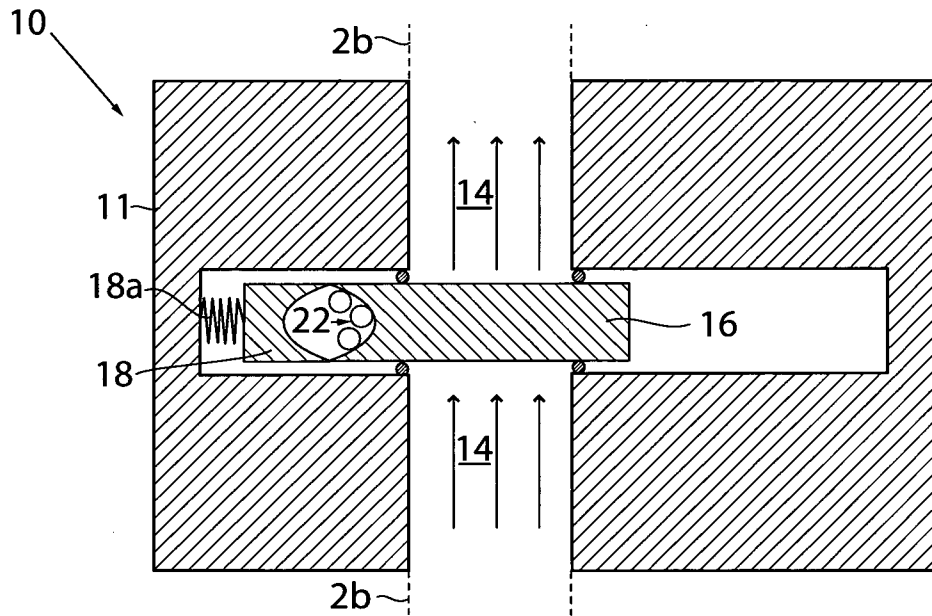


Fig. 10

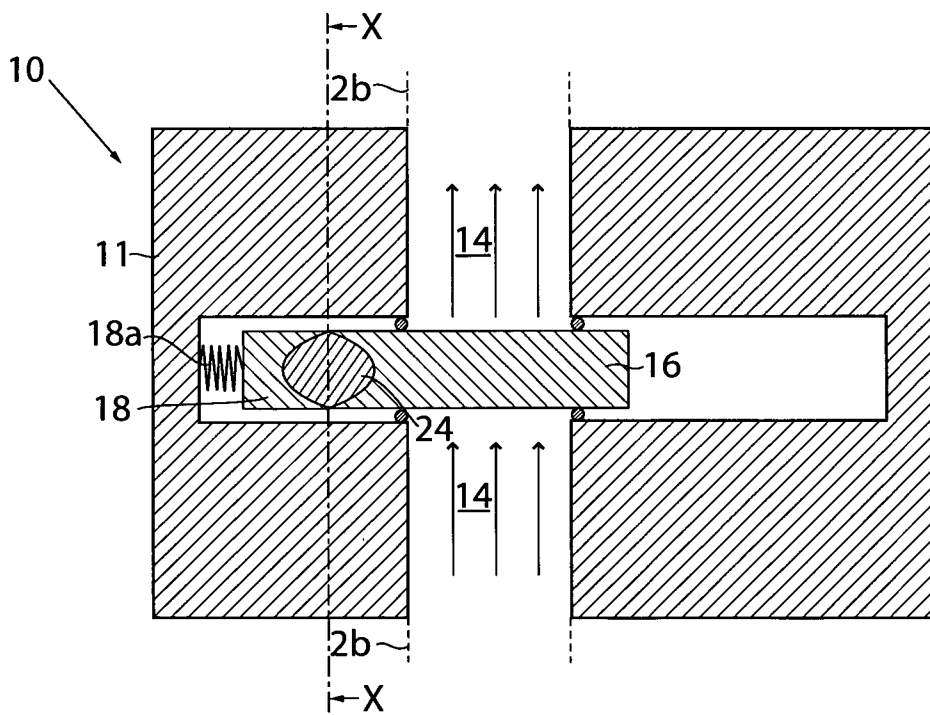


Fig. 11

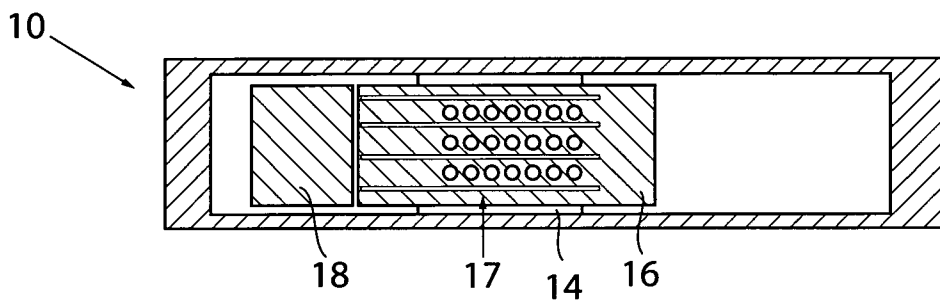


Fig. 12


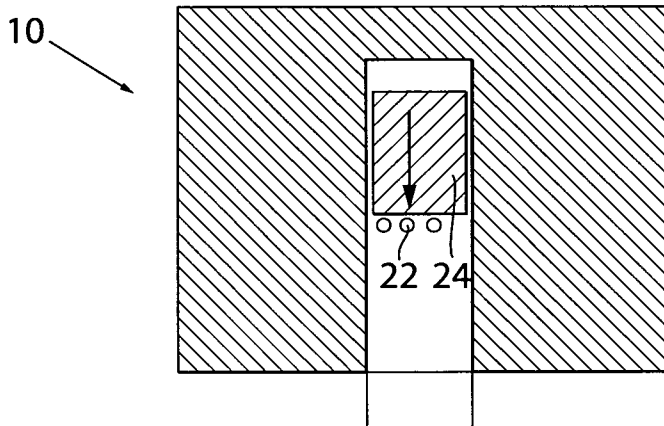


Fig. 13

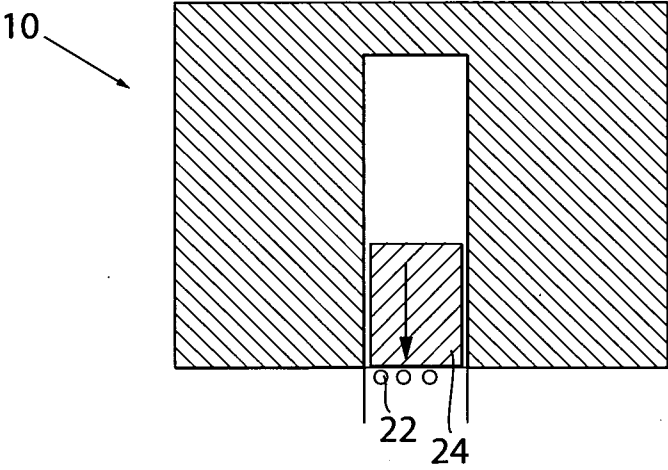

9/25

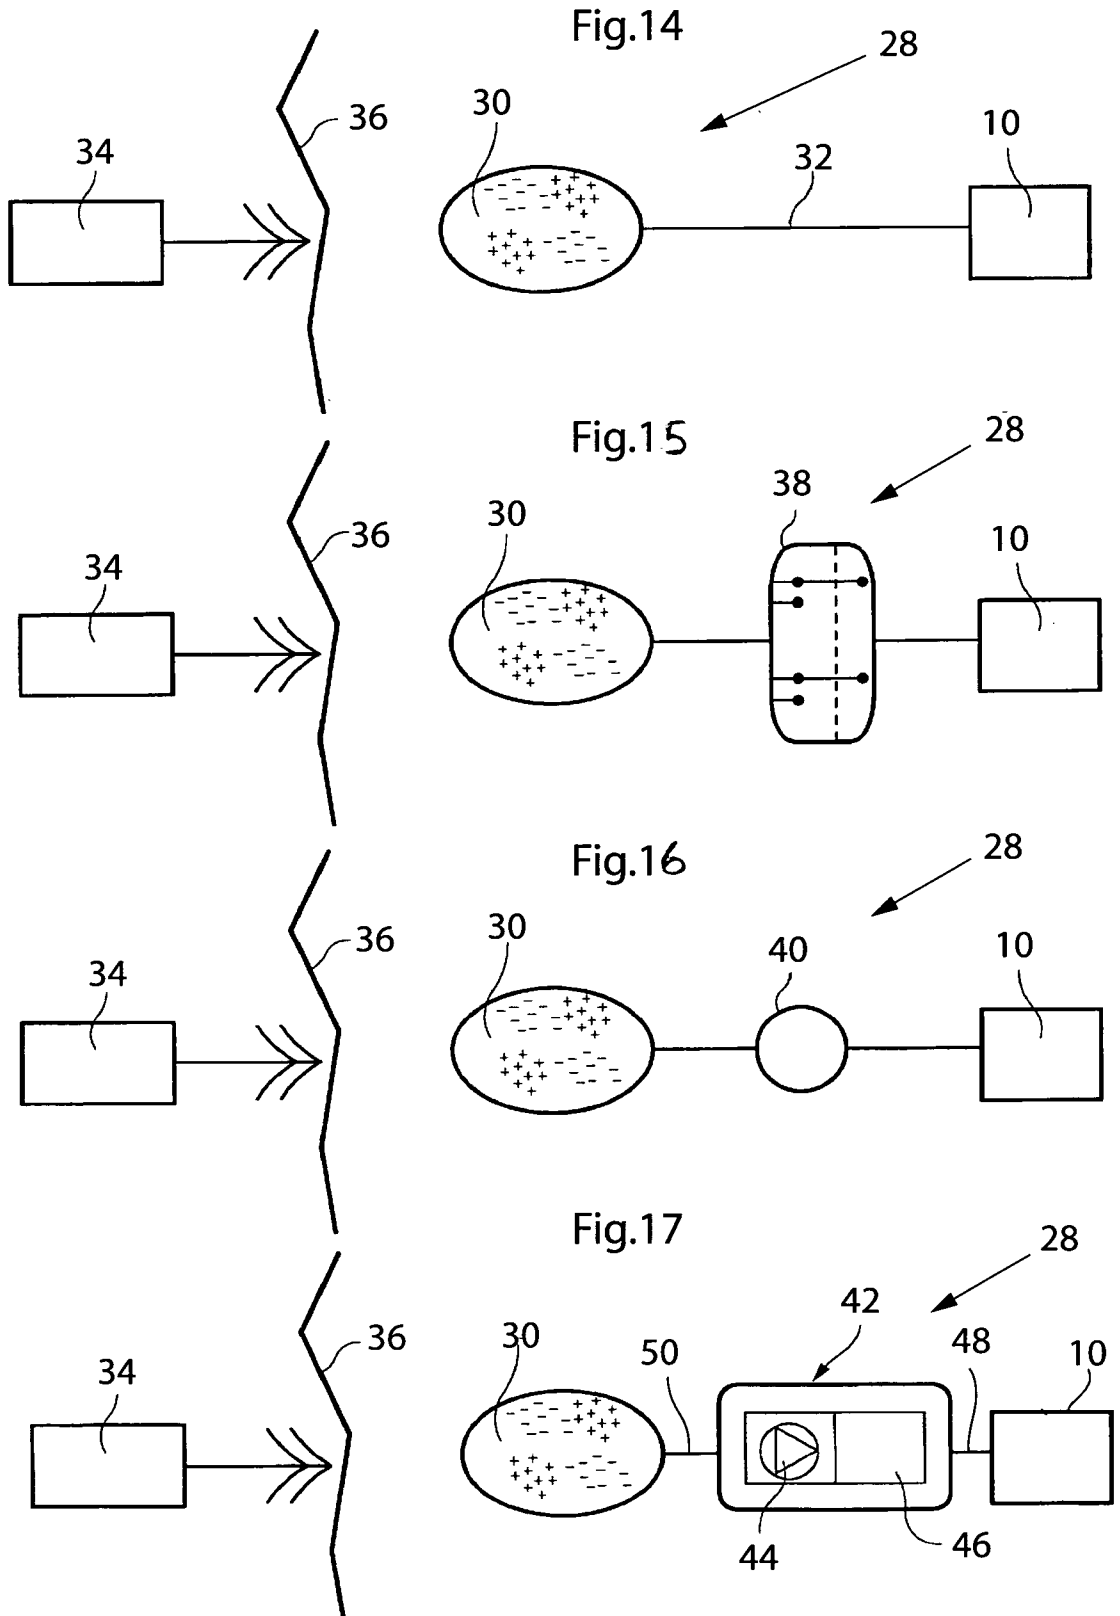


Fig.18

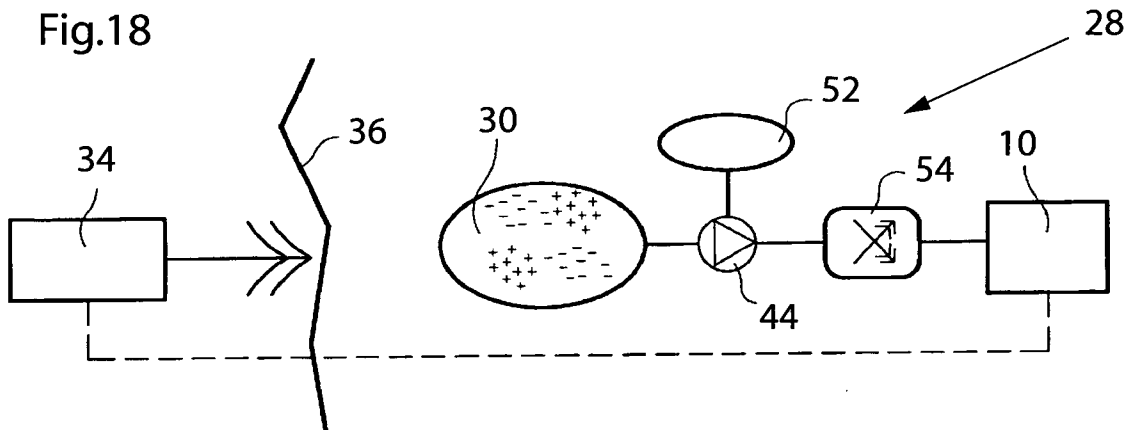


Fig.19

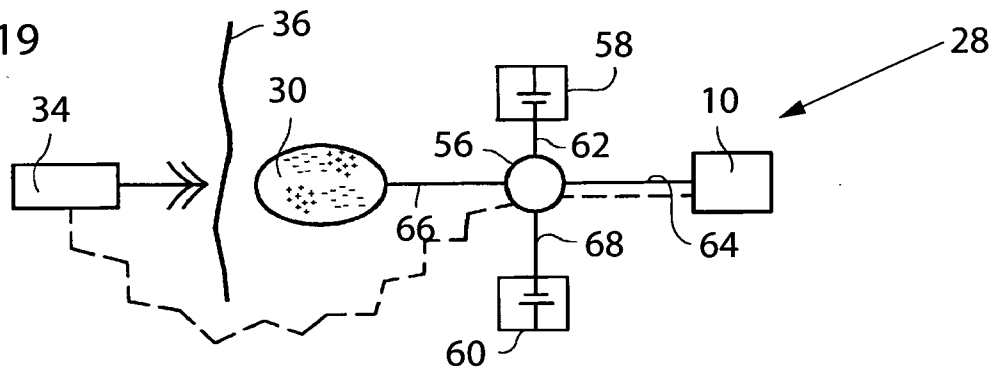


Fig.20

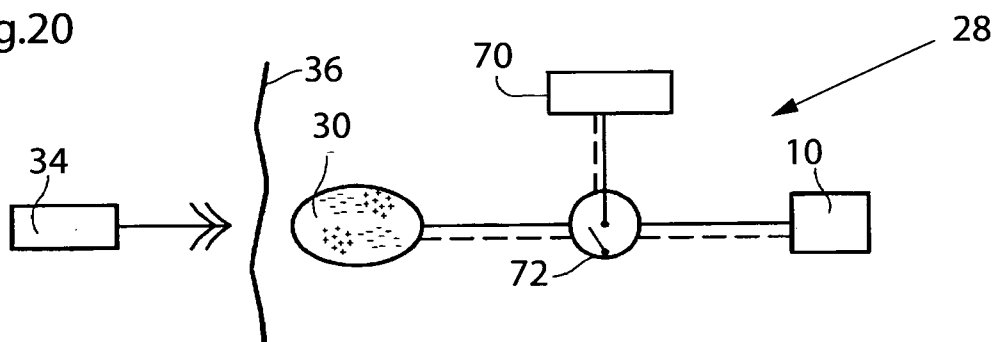


Fig.21

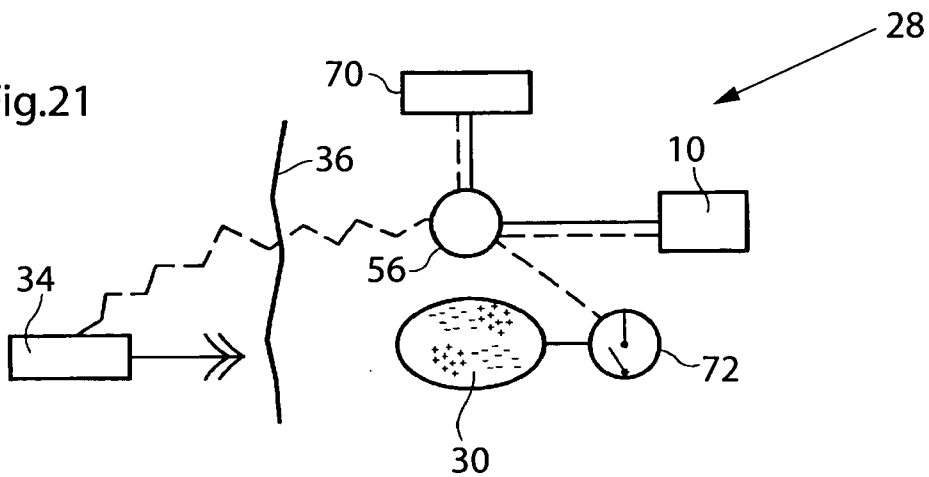


Fig.22

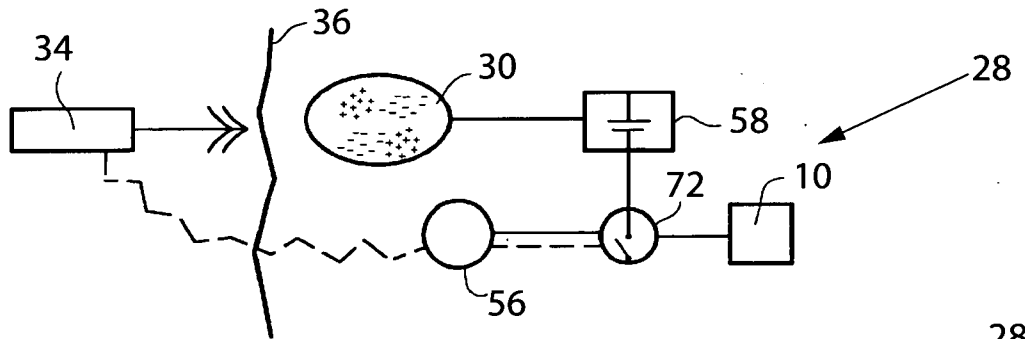


Fig.23

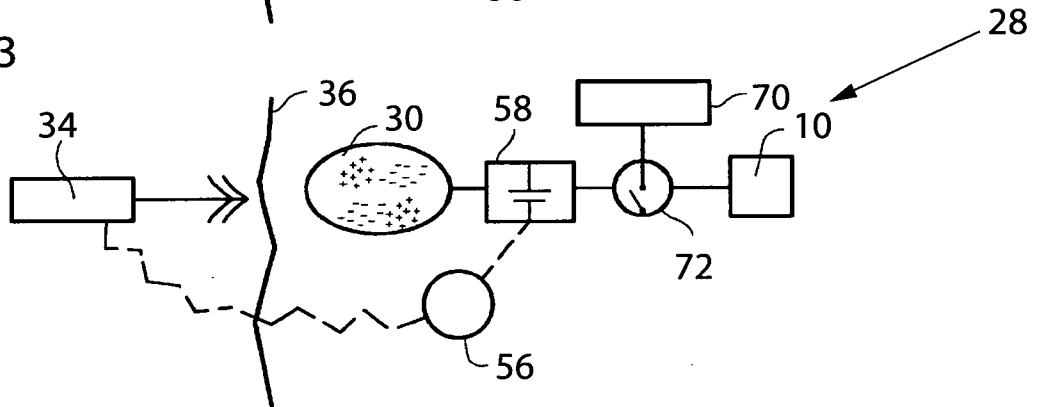


Fig.24


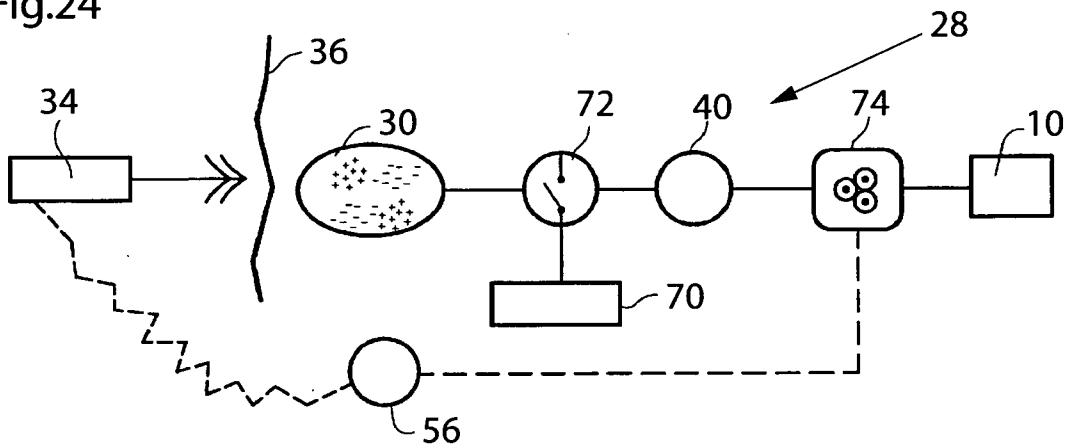


Fig.25

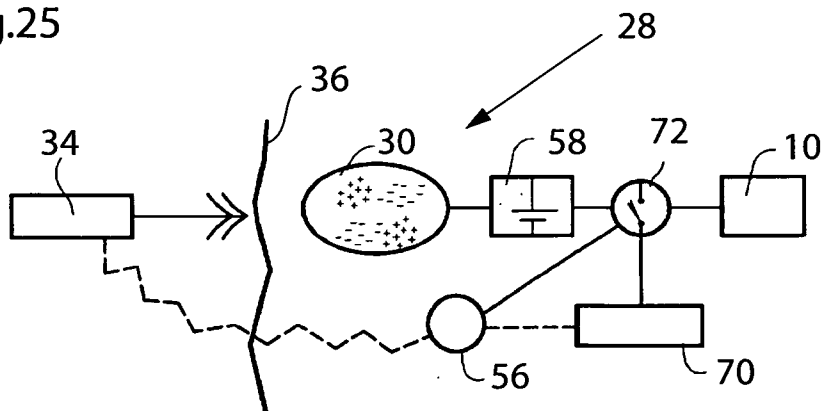

12/25

Fig.26

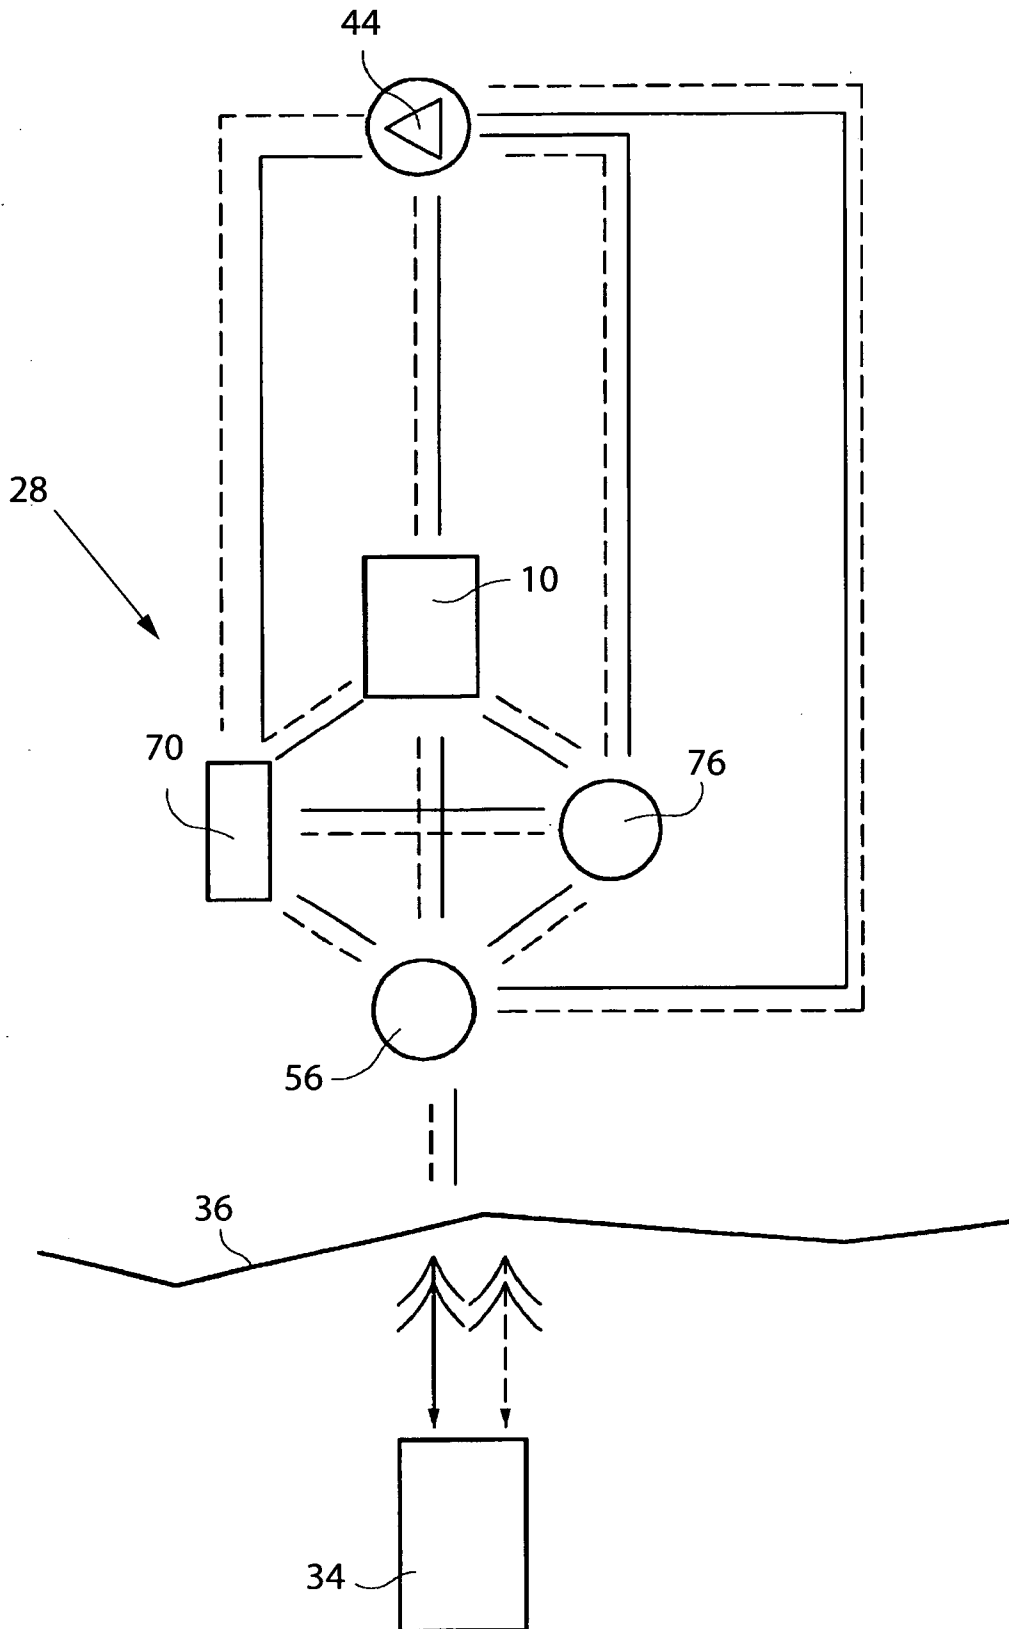


Fig.27

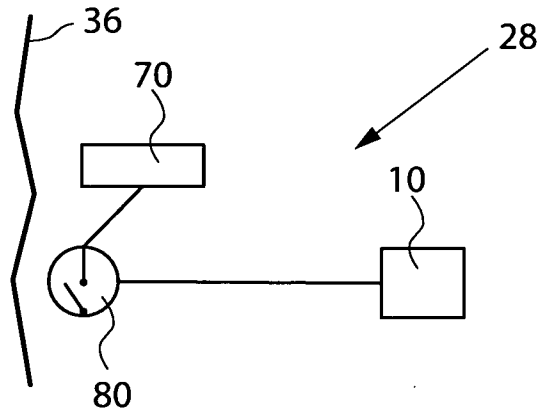


Fig.28

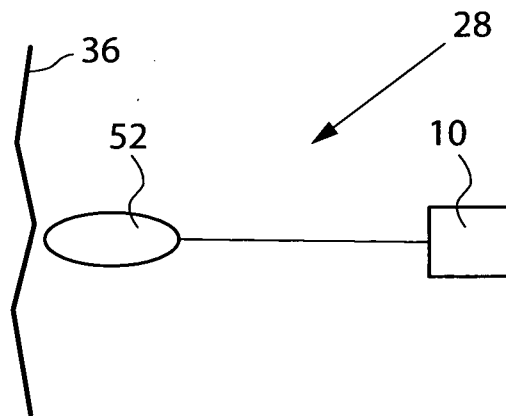


Fig.29

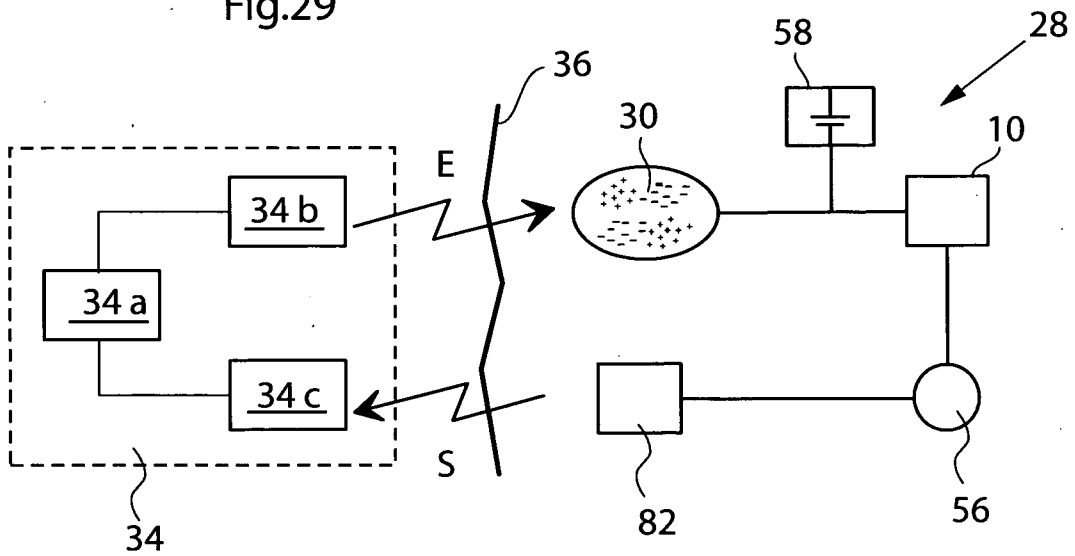


Fig.30


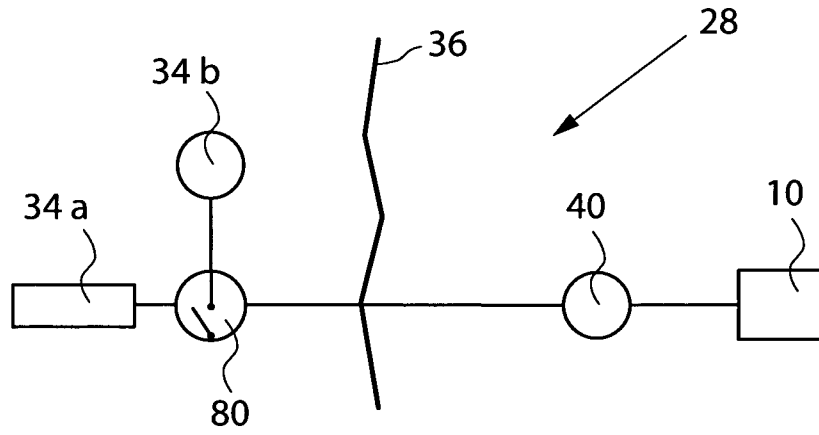


Fig.31

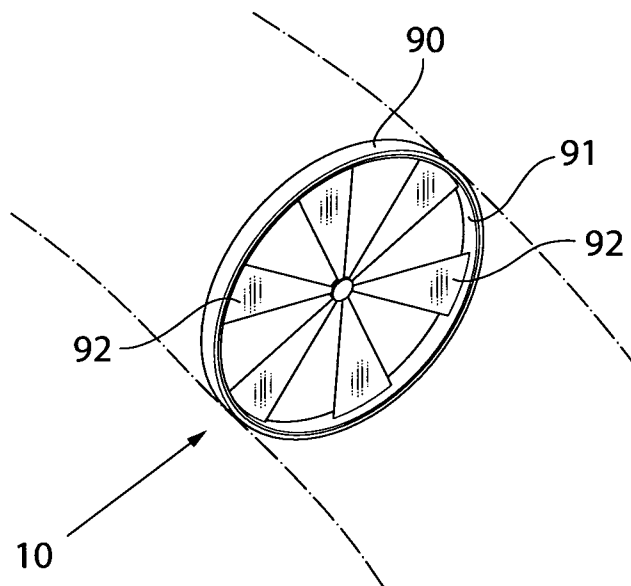

15/25

Fig. 32

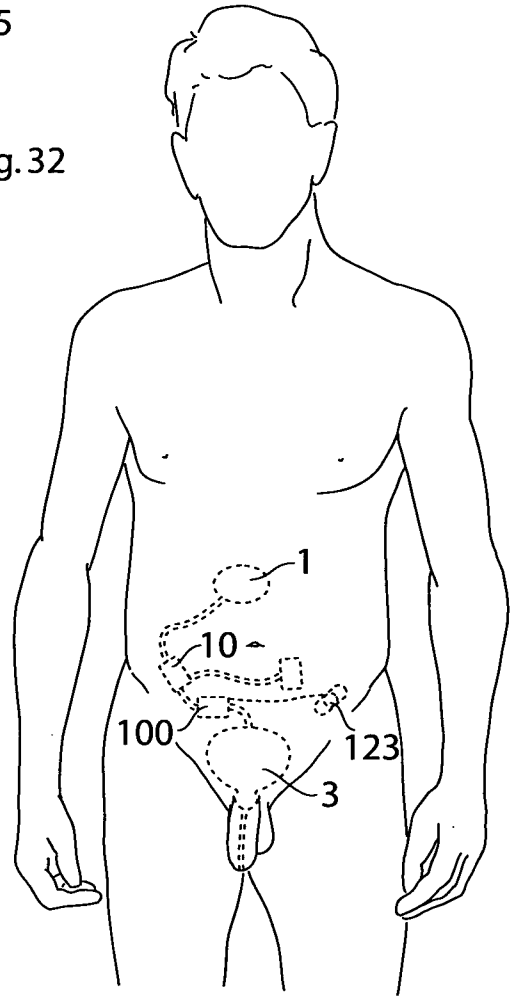


Fig. 33

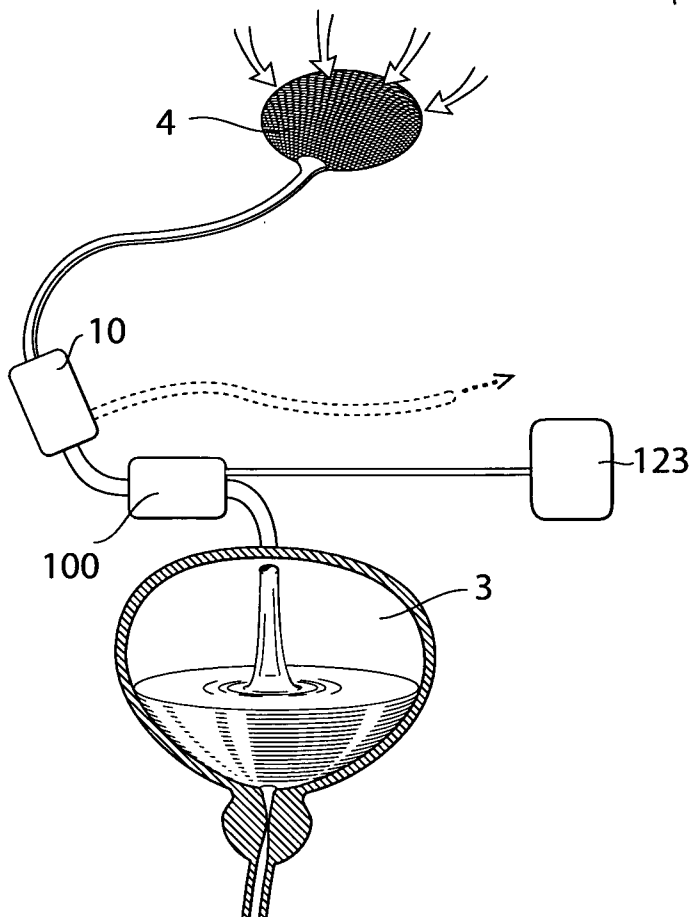


Fig. 34a

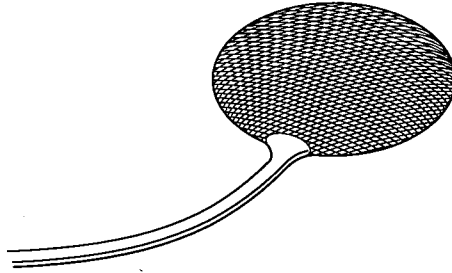


Fig. 34b

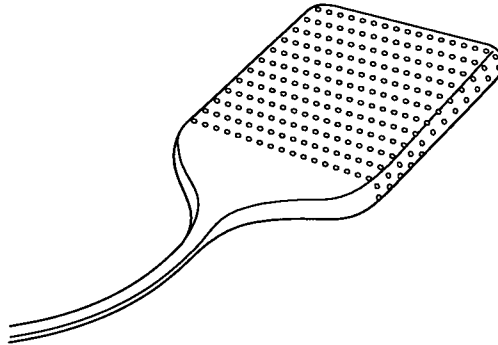


Fig. 34c

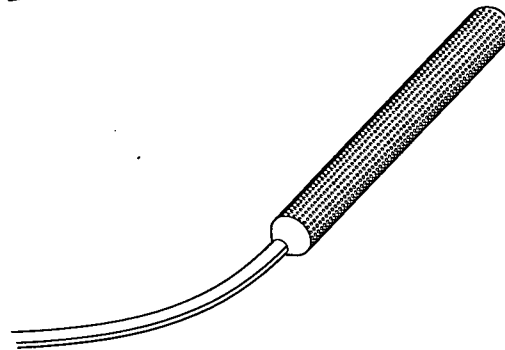


Fig. 34d




Fig.35

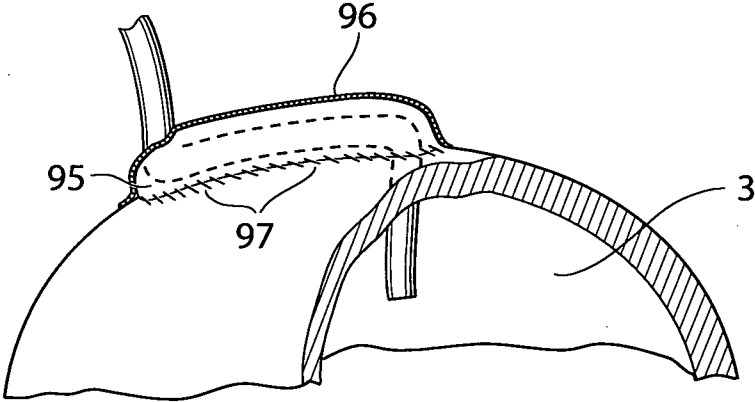


Fig. 36a


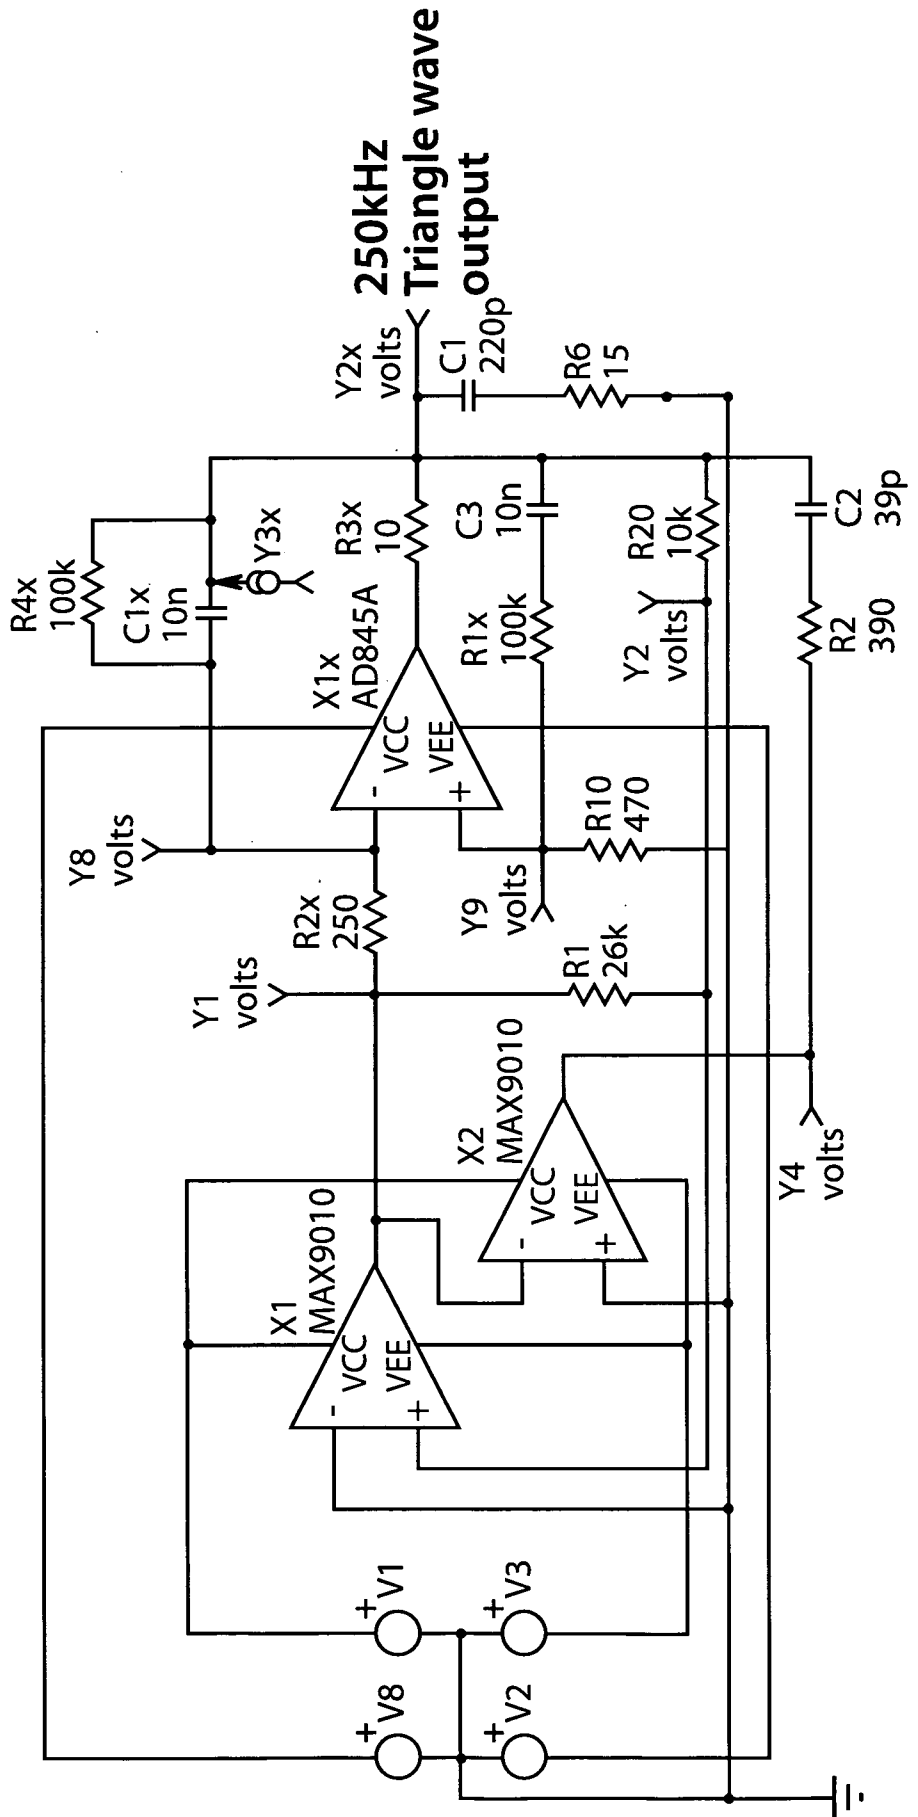


Fig.36b'

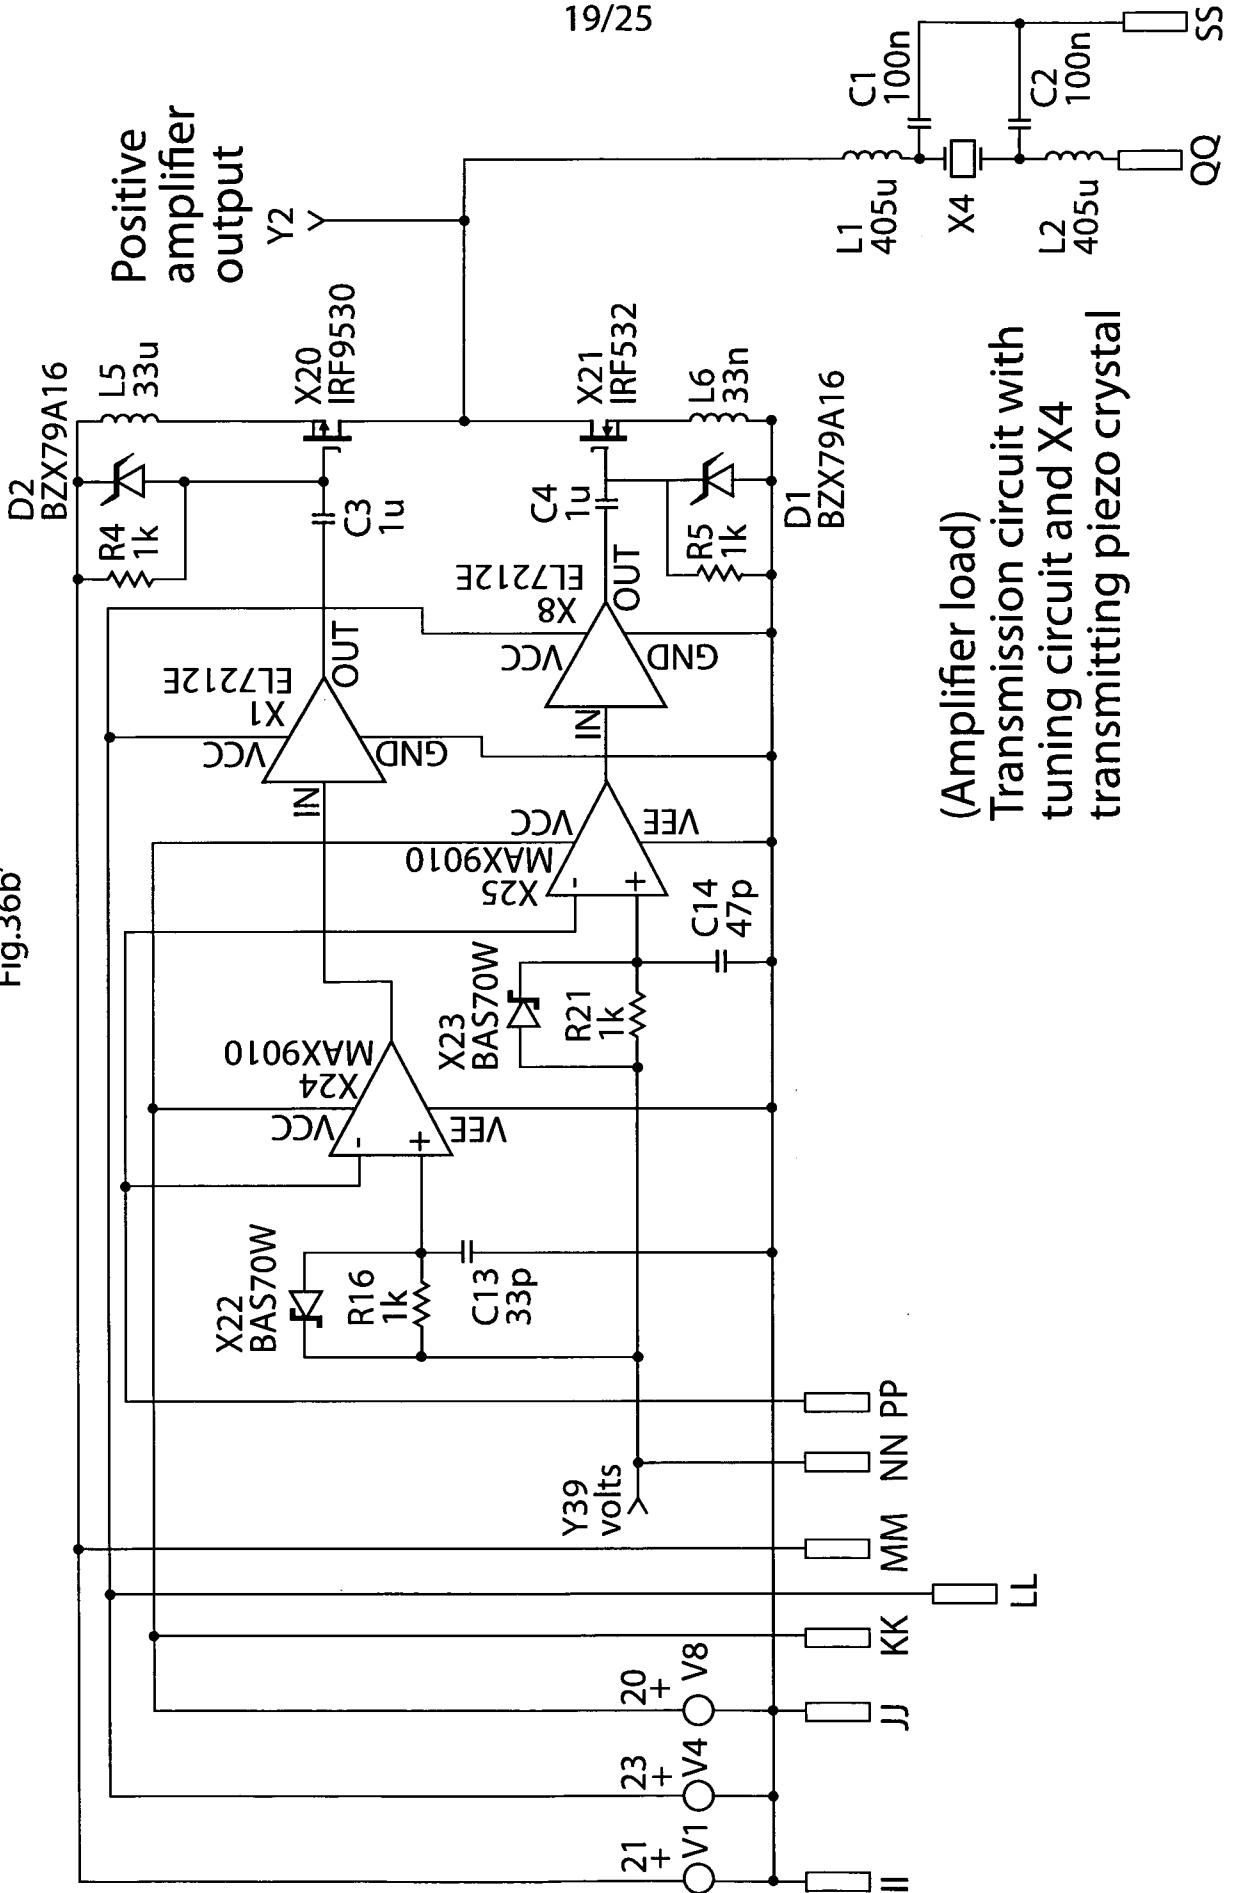

(Amplifier load)
Transmission circuit with
tuning circuit and X4
transmitting piezo crystal

Fig.36c


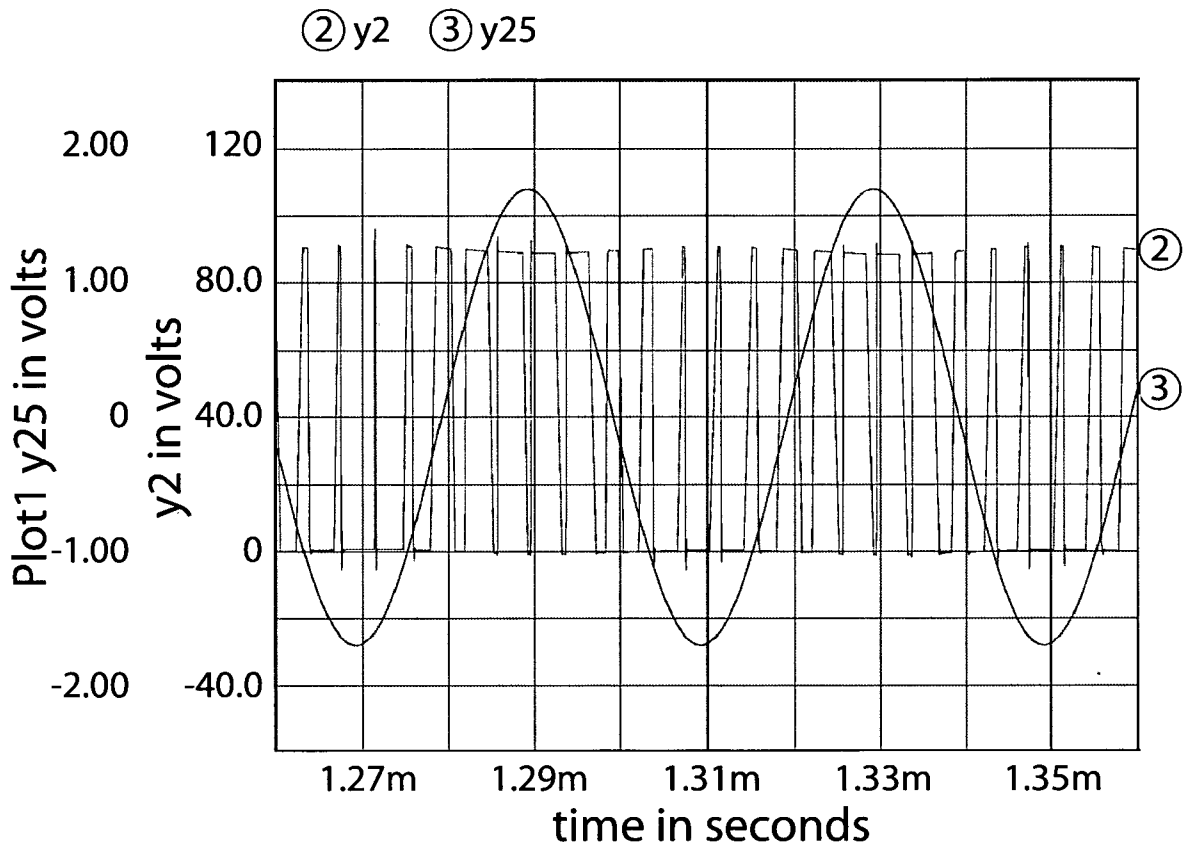


Fig.36d

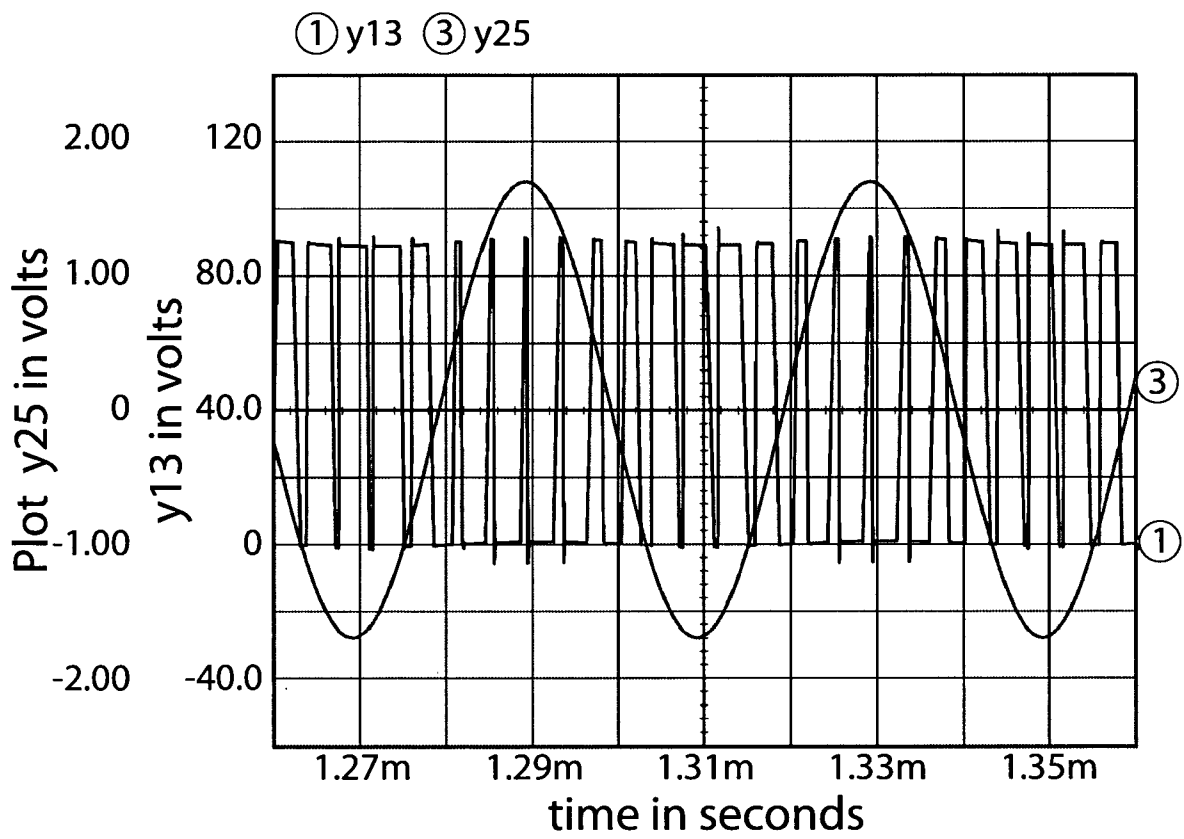

23/25

Fig. 37

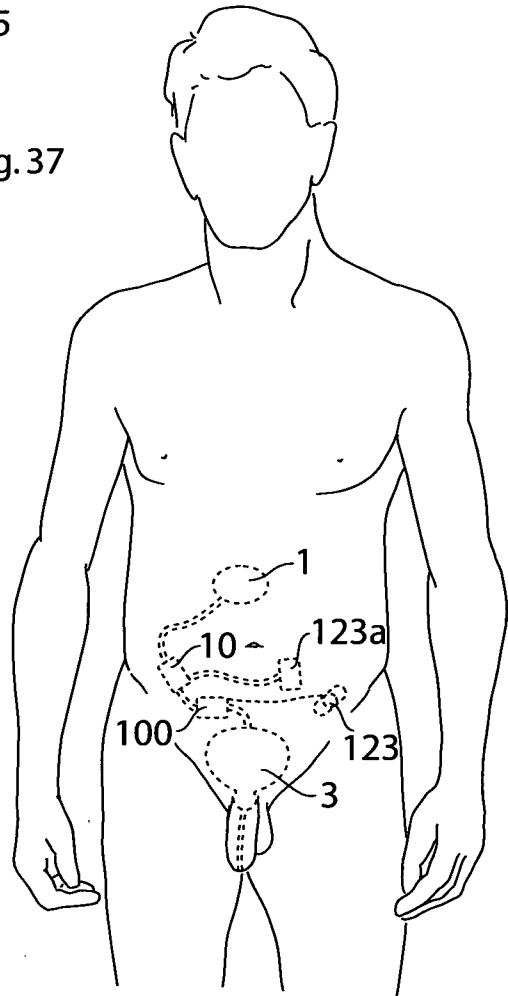


Fig. 38

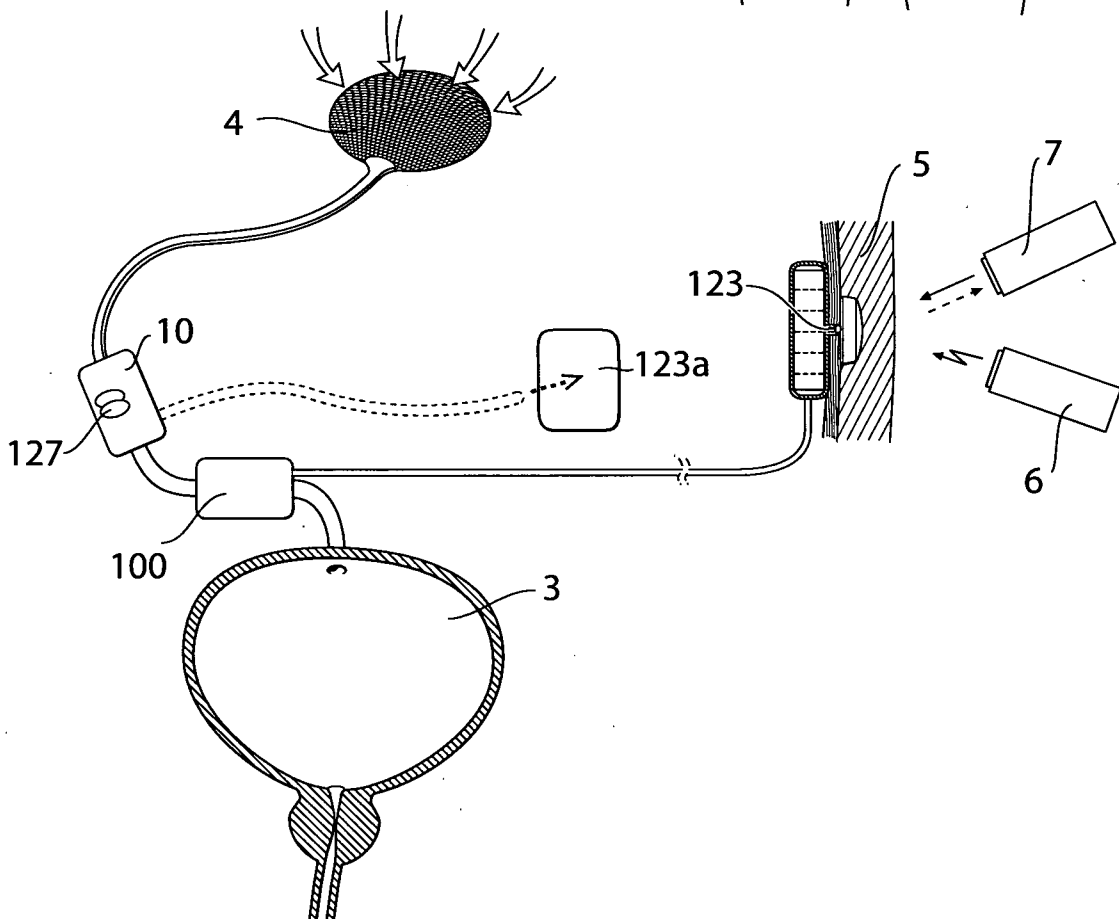


Fig. 39a

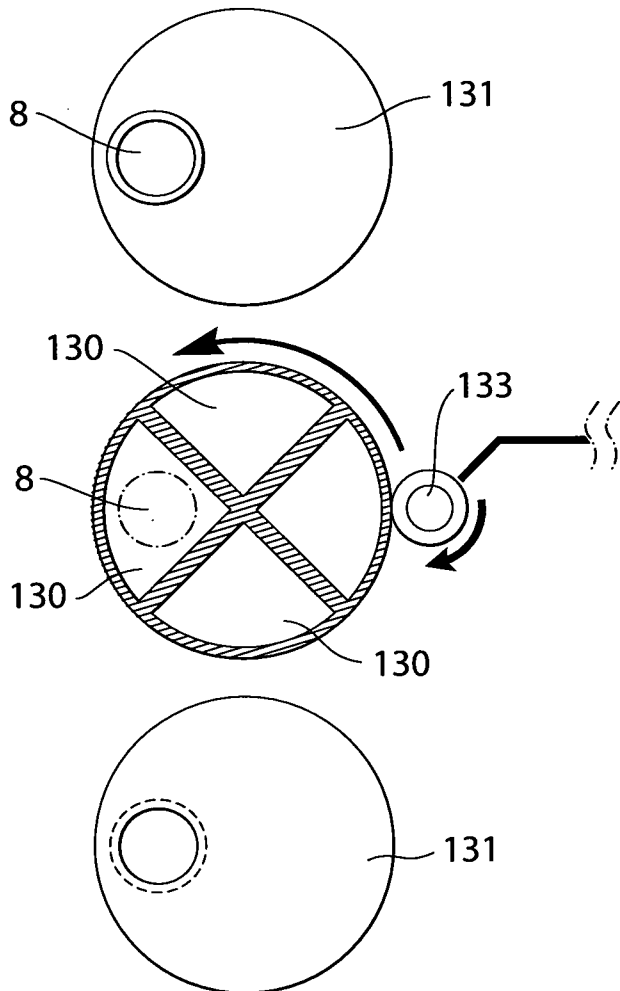
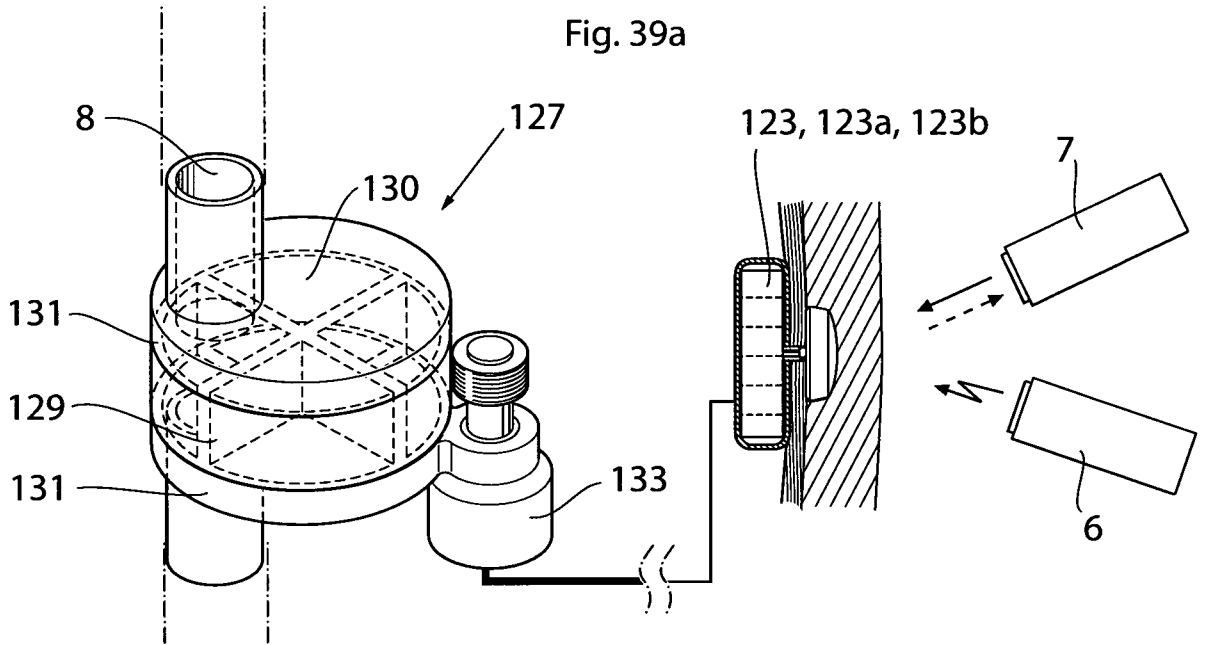


Fig. 39b

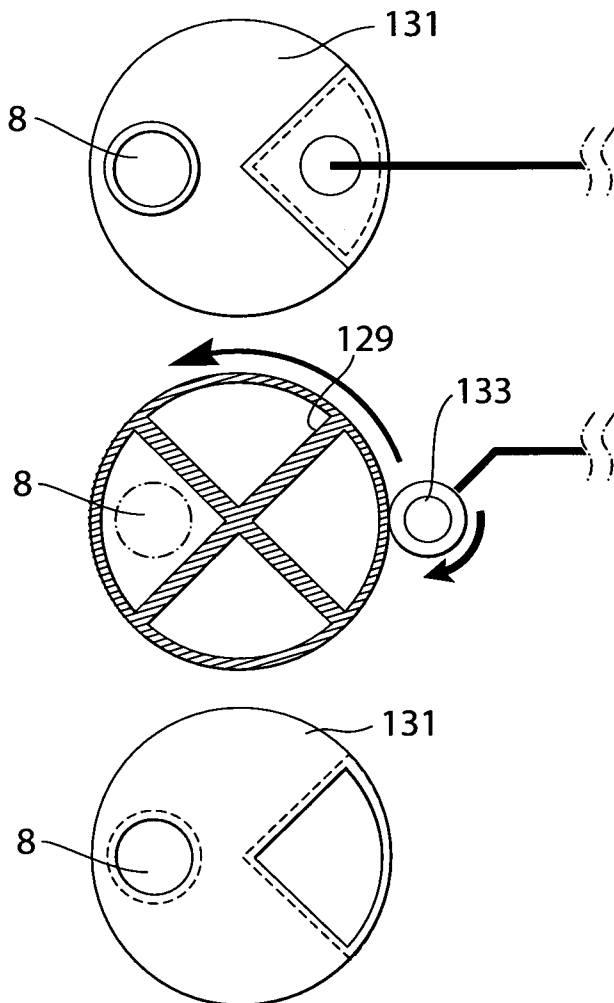
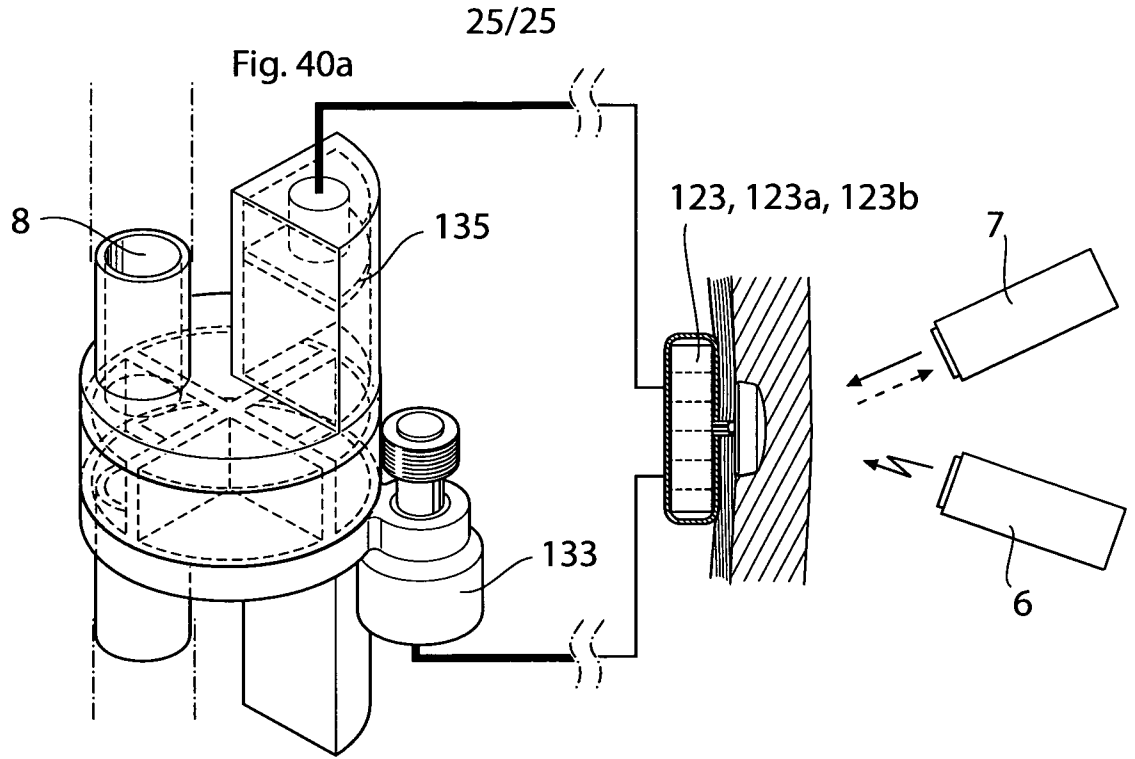


Fig. 40b

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2009/000037

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A61M, A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, BIOSIS, COMPDX, EMBASE, INSPEC, MEDLINE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6689085 B1 (RUBENSTEIN, EDWARD ET AL), 10 February 2004 (10.02.2004), column 5, line 3 - line 12; column 7, line 9 - line 30; column 11, line 15 - line 42, figures 9, 10A, 10E, abstract	1-9
X	--	10-177
Y	US 4610658 A (BUCHWALD, HENRY ET AL), 9 Sept 1986 (09.09.1986), column 6, line 19 - column 7, line 18, figures 1,8, abstract	1-9
	--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 April 2009

Date of mailing of the international search report

27-04-2009

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Sara Backman/EÖ
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2009/000037

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7311690 B2 (BURNETT, DANIEL R.), 25 December 2007 (25.12.2007), column 2, line 27 - line 67; column 3, line 50 - line 56; column 9, line 4 - line 26, claim 1, abstract --	10-239
X	US 5902336 A (MISHKIN, GARY J.), 11 May 1999 (11.05.1999), column 1, line 65 - column 2, line 12, figure 1, claim 1, abstract --	10-239
X	WO 9850099 A1 (S.L.I.M. TECH, LTD.), 12 November 1998 (12.11.1998), figure 2, abstract --	178-239
A	US 6772011 B2 (DOLGIN, ALEXANDER), 3 August 2004 (03.08.2004), abstract --	1-239
A	US 20060127246 A1 (FORSELL, PETER), 15 June 2006 (15.06.2006), abstract --	1-239
A	US 20030208247 A1 (SPINELLI, MICHELE ET AL), 6 November 2003 (06.11.2003), abstract --	107-111
A	US 5057075 A (MONCRIEF, JACK W. ET AL), 15 October 1991 (15.10.1991), abstract -- -----	107-111

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2009/000037**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
Claims 123-152, 154-239 relate to a method for treatment of the human or animal body by surgery or by therapy, as well as diagnostic methods, see PCT rule 39.1(iv). Nevertheless, a search has been made for these claims. The search has been directed to the technical content of the claims.
2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

The present application has been considered to contain two inventions which are not linked such that they form a single general inventive concept, as required by Rule 13 PCT for the following reasons:

.../...

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

Box III

Invention 1: Claims 1-177 directed to a method and implantable drainage device for moving body fluid between different parts of the body.

Invention 2: Claims 178-239 directed to an implantable filter device for filtering particles in body fluid.

Claims 1-177 relate to the problem of transfer fluid within the body without any mechanical structure penetrating the patient's skin. This problem appears to be solved by a completely implantable drainage device.

Claims 178-239 relate to the problem of removing particles from a fluid of a patient. This problem is solved by a filtering device.

As both the problems and solutions are technically different, no single general concept can be formulated based on the technical features of the inventions. Consequently, the requirements of Rule 13.1 PCT are not met.

International patent classification (IPC)**A61M 1/00** (2006.01)**A61M 5/00** (2006.01)**A61F 2/04** (2006.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se (English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se (Swedish version)

Use the application number as username. The password is

SPWGXPBMW.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE2009/000037

US	6689085	B1	10/02/2004	NONE		
US	4610658	A	09/09/1986	NONE		
US	7311690	B2	25/12/2007	US	20040147871 A	29/07/2004
US	5902336	A	11/05/1999	WO	9816171 A	23/04/1998
WO	9850099	A1	12/11/1998	AU	732067 B	12/04/2001
				AU	7139398 A	27/11/1998
				CA	2288691 A	12/11/1998
				EP	1015064 A	05/07/2000
				US	6022333 A	08/02/2000
				US	6190347 B	20/02/2001
US	6772011	B2	03/08/2004	AU	2003265530 A,B	08/11/2007
				CA	2495819 A	04/03/2004
				EP	1534381 A	13/08/2008
				JP	2005536286 T	02/12/2005
				US	20040039423 A	26/02/2004
				WO	2004018037 A	04/03/2004
US	20060127246	A1	15/06/2006	NONE		
US	20030208247	A1	06/11/2003	NONE		
US	5057075	A	15/10/1991	NONE		