



(51) International Patent Classification:

*E21B 34/06* (2006.01) *E21B 34/16* (2006.01)  
*E21B 19/16* (2006.01)

(21) International Application Number:

PCT/US2012/028281

(22) International Filing Date:

8 March 2012 (08.03.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/048,075 15 March 2011 (15.03.2011) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TAIT, Alasdair R.** [GB/GB]; 15e Claremont Street, Aberdeen AB10 6QQ (GB).

(74) Agent: **PORTER, Andre J.**; Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: REMOTE SUBTERRANEAN TOOL ACTIVATION SYSTEM

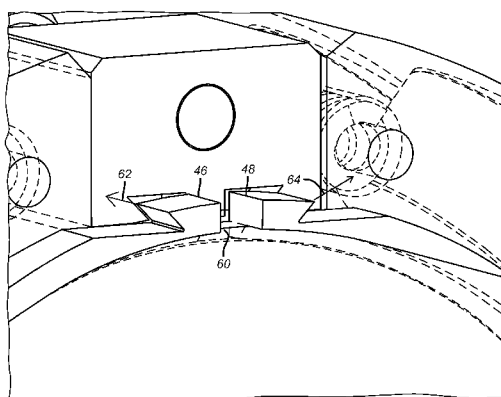


FIG. 3

(57) Abstract: An actuation tool uses a lock that when released allows a moving magnet to move into position to repel another magnet. The repelling force on the second magnet moves it away from a locking position on a stored potential energy system where the release of the potential energy creates kinetic energy to drive an actuation assembly to set the tool. In a preferred application the tool can be a liner hanger. The release device can be a selectively energized electromagnet or a solenoid that shifts at least one magnet into alignment with at least one second magnet so as to defeat the second magnet from effectively storing the potential energy that can set the tool when the lock is defeated.



## REMOTE SUBTERRANEAN TOOL ACTIVATION SYSTEM

Inventor: Alasdair R. Tait

## FIELD OF THE INVENTION

**[0001]** The field of the invention is actuation devices for subterranean tools and more particularly devices that enable selective remote actuation while avoiding wall openings and their associated seals that can present potential leak paths. The device will allow actuation of equipment without a need to have any plug in the tubing against which pressure has to be applied.

## BACKGROUND OF THE INVENTION

**[0002]** Pressure actuated assemblies that are designed to selectively actuate a subterranean tool typically involves a ball seat and a ball that is dropped or pumped to the ball seat and landed. Once the ball is landed internal pressure is built up through a wall opening to a piston housing surrounding the main bore so that a tool can be actuated. Typically a piston receives the internal pressure through a wall port and has an opposite end referenced to annulus pressure. Raising the tubing pressure moves the piston which actuates the tool. In one example of a liner hanger, the piston can move slips and a sealing element to support a liner from a surrounding casing.

**[0003]** There can be issues with such a design. The tool can be in a long horizontal run so that it may take the ball a long time to get to the seat without having to be pumped. In a horizontal run the ball may not locate on the seat even with a flowing stream urging the ball to the seat. Wall openings to piston housings can also present potential leak paths if seals deteriorate or fail.

**[0004]** Accordingly, an actuation system is needed that can be selectively operated from a remote location to operate a tool at the desired location. In the preferred embodiment an actuation system is described that locks in potential energy with a lock that is disabled to release the potential energy to set the tool. In a preferred application a liner hanger slip system and seal can be set with the device. The lock is defeated with physical movement that is induced with an applied field or with an electromechanical device to name a few preferred options. In one embodiment the field is magnetic and the lock release is accomplished with a repelling response to a magnet that serves at

least in part as a locking key and whose movement results in a release of the potential energy force. Those skilled in the art will better appreciate aspects of the preferred embodiments of the invention from a review of the description of the preferred embodiment and the associated FIGS. while recognizing that the full scope of the invention is to be found in the appended claims.

**[0005]** USP 7,703,532 illustrates moving a magnet in position to hold open a flapper in a safety valve in the open position and to reduce its tendency to chatter in the open position. US Publication 2009/0032238 illustrates a magnet used to assist the movement of a flapper in a safety valve to go to an open position by adding to the gravity force of the flapper weight that tends to move it to the open position. Another magnet can be used to urge the flapper to the closed position. USP 7,828,066 transmits power through a magnetic shaft coupling. USP 3,264,994 shows the use of a magnet on a dart that is pumped past a tool to use the field to trigger tool actuation. US Publication 2010/0126716 illustrates a hard wired system for initiating tool actuation using a magnetic field. Other patents of interest with regard to the present invention are: USP RE 30,988; 7,703,532; 7,669,663; 7,562,712; 7,604,061; 7,626,393 and 7,413,028.

#### SUMMARY OF THE INVENTION

**[0006]** An actuation tool uses a lock that when released allows a moving magnet to move into position to repel another magnet. Alternatively a magnetic field can be triggered in a stationary magnet such as one delivered on wireline, for example, to accomplish tool actuation. The repelling force on the second magnet moves it away from a locking position on a stored potential energy system where the release of the potential energy creates kinetic energy to drive an actuation assembly to set the tool. In a preferred application the tool can be a liner hanger. The release device can be a selectively energized electromagnet or a solenoid that shifts at least one magnet into alignment with at least one second magnet so as to defeat the second magnet from effectively storing the potential energy that can set the tool when the lock is defeated.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0007]** FIG. 1 is a perspective view of the trigger mechanism for the lock shown in the run in position and in perspective;

**[0008]** FIG. 2 is a side view of FIG. 1 showing the retainer for the snap ring retracted by a solenoid;

**[0009]** FIG. 3 is an alternative view of the FIG. 2 position showing the snap ring in perspective and a portion of the snap ring that extends into a circular groove to allow the snap ring to function as a travel stop;

**[0010]** FIG. 4 is a perspective view of the FIG. 3 position just before the springs push the tandem rings to reposition the magnets in those rings;

**[0011]** FIG. 5 is a section view of a liner hanger in the run in position showing the tandem rings holding locking segments in a locked position to prevent the slips from setting;

**[0012]** FIG. 6 is the view of FIG. 5 showing the tandem rings shifted and the locking segments repelled so that the setting spring for the slips can move the slips;

**[0013]** FIG. 7 is the view of FIG. 6 with the slips fully activated for gripping a surrounding tubular;

**[0014]** FIG. 8 is a perspective view of a run in position for an alternative mechanism to the FIG. 1 embodiment that actuates with an applied magnetic field;

**[0015]** FIG. 9 is the view of FIG. 8 in the set position;

**[0016]** FIG. 10 is a perspective view for run in of a liner hanger using the mechanism of FIG. 8;

**[0017]** FIG. 11 is the view of FIG. 10 in the set position;

**[0018]** FIG. 12 is a section view of an alternative embodiment that uses a running tool to unlock the tool using an electro-magnetic field to repel the locking magnet;

**[0019]** FIG. 13 is a detailed view of a locking segment that is repelled to shear a pin with the field presented from the running tool of FIG. 12;

**[0020]** FIG. 14 is an alternative embodiment of the locking segment of FIG. 13.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

**[0021]** FIGS. 1-4 are best understood in conjunction with FIGS. 5-7. FIGS. 5-7 illustrate an example of an application of the actuation system in the form of a liner hanger **10** that has, in one embodiment, a ring of segments **12** that axially translate with respect to each other to increase in diameter as better seen in FIGS. 10 and 11. The drawings are schematic and are intended to illustrate that the slips **12** in whatever way they are assembled are axially translated in tandem or relative to each other depending on the design by the force of spring **14** acting on setting sleeve **16** to push it in the direction of arrow **18**. One or more lock segments **20** are initially disposed in matching grooves **22** to prevent motion in the direction of arrow **18** by the setting sleeve **16**. Lower magnet ring **24** and upper magnet ring **26** are retained by snap ring **28** against shoulder **30** in a position where magnets **32** attract the lock segments **20** such that segments **20** are partly into groove **22** and partly into a recess **34** in the housing **36**. Instead of using magnet ring **24** a retainer that is overcome when ring **26** moves into position can be used as an alternative arrangement to retain the initial locked position. Snap ring **28** is a primary lock while segments **20** are considered the secondary lock that is actuated as a result of release of the primary lock or snap ring **28** in the preferred embodiment. Setting Sleeve **16** contains T-slots into which the segment ring **12** interlocks. Spring **14** cannot move the sleeve **16** as long as the lock segments **20** straddle grooves **22** and recesses **34**. The attraction from magnets **32** acting on lock segments **20** retains the segments **20** in the FIG. 5 position where the grooves **22** and the recesses **34** are straddled to hold the springs **14** in the compressed position.

**[0022]** Actuation involves a release of the snap ring **28** that in turn allows the springs **40** to axially move rings **24** and **26** so that magnets **42** now align with segments **32**. Alternatively the magnets **32** and **42** can be on a single ring that can rotate instead of translating to change the polarity of the magnet facing the segments **20**. The magnets **42** have an opposite pole facing the segments **20** such that the segments **20** are now radially outwardly repelled to move out of recess **34** and fully into groove **22**. The sleeve **16** is now free to

move in the direction of arrow **18** so that the slips **12** can move out radially to engage a surrounding tubular either by riding up a taper or as shown in FIGS. 10 and 11 by relative axial movement of tapered segments that have wickers **44** as shown in FIGS. 5-7, for example.

**[0023]** FIGS. 1-4 show in more detail how the snap ring **28** is released. Snap ring **28** has shaped ends **46** and **48** that are retained by similarly shaped grooves in block **50**. Block **50** is selectively actuated from a surface location to move in the direction of arrow **52** by a solenoid valve assembly **54** that has an axially movable shaft **56** that moves in the direction of arrow **52** when power that is schematically represented by dashed line **58** is supplied to coil in the assembly **54**. FIG. 2 shows the block **50** retracted in the direction of arrow **52** and the ends **46** and **48** no longer retained by block **50**. The stored potential energy in the ring **28** allows it to snap out of its associated groove **60** best seen in FIG. 3 as the ends **46** and **48** move respectively in the direction of arrows **62** and **64**. At this point the springs **40** are able to push the rings **24** and **26** in tandem so that the segments **20** can then be radially outwardly repelled to allow the force stored in the spring **14** to move the sleeve **16** and cause the wickers **44** to bite into a surrounding tubular that is not shown. FIG. 4 shows the components just in the instant before the springs **40** move the rings and FIG. 7 is a section view after that movement has happened showing the wickers **44** in a set position against the surrounding tubular.

**[0024]** FIGS. 8 and 9 show another way to release the snap ring **28'** by movement of the block **50'**. In this embodiment a surface controlled power source shown schematically as dashed line **66** selectively energized an electromagnet **68** that when energized repels the permanent magnet **70** to displace the block **50'** to the FIG. 11 position. As before when the snap ring **28** has ends **46** and **48** exposed, the rings **24** and **26** are able to move in tandem under the force of spring **40** and the setting proceeds as previously described.

**[0025]** FIGS. 12-14 use a running tool **100** that has an electro-magnet **102** that is oriented as such that upon activation from a power source will provide an opposite pole at the outward facing surface from that of the inward facing

surface of the magnet **104** to drive segment **104** radially outwardly into recess **106** so as to allow the spring **108** to push against stop **110** to allow slips **112** to climb ramp **114** to allow wickers **116** to bite the surrounding tubular. Set screw **118** holds the segment **104** to the housing **122** for run in via threads **120**. With electro-magnet **102** activated, the repelling force is sufficient to shear out the shear plate **124** to get the segments **104** fully into the recess **106**. In FIG. 13 a plate **124** has the screw **118** extending through it and secured to housing **122** by threads **120**. In FIG. 14 the screw **118'** integrates what is the plate **124** of FIG. 13 as part of the screw head again to secure the segment **104** at thread **120'**.

**[0026]** Those skilled in the art will now appreciate that what is disclosed is a surface controlled system that can release a stored potential energy force to set a tool where dropping objects on seats and pressuring up through wall openings that present leak paths are not an issue. Instead a primary device such as a solenoid or an electromagnet to illustrate some examples is triggered to then allow movement of magnetic members to release a key to then liberate the stored potential energy force to create kinetic energy to set a tool.

While a liner hanger is used in the illustrations above, other types of well tools are also contemplated. Rings **24** and **26** while shown as two discrete rings with magnet inserts **32** and **42** that are in each ring with their polarity on the outward side being different, could also be a single ring or ring segments. The entirety of the rings **24** and **26** could be magnetic rings or segments. The lock segments **20** can be magnets themselves or they can simply be constructed of a magnetic material and can have a variety of shapes that are compatible with movement of segments **20** in recesses **34** or grooves **22**. The lock segments may be a sub assembly of two components – one component will be of a mechanically strong material to ensure that the locking device can hold the stored load of springs **14** and form the shape of a cap to surround the magnetic material. The second part will be the magnetic component which will act as previously described to force the cap out of recess **34** and allow the tool to set without requiring mechanical properties from the magnetic component when being run in hole. While a coil spring **40** is illustrated the movement of the

rings **24** and **26** can be accomplished with equivalent devices that store potential energy such as a volume of compressed gas or a stack of Belleville washers as some examples. While the embodiments show removing support for a snap ring **28** other alternatives that allow movement of the rings **24** and **26** can be used such as a shear ring that is snapped by a driving mechanism that gets the same motion accomplished as assembly **54**. Using a member that fails in shear will require more applied force than the illustrated embodiments that translate a block and expose ends **46** and **48** of a snap ring **28**. The attracting magnet **32** in the running tool may be removed and as such the locking segments **20** may be retained in recess **34** by another means - such as an overlaying leaf spring - until the repelling force is applied. The repelling force will always be strong enough to repel the locking segments **20** as well as overcoming any forces that are present in order to hold the locking segment **20** in place.

**[0027]** The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below.

I claim:

1. An actuation apparatus for a subterranean tool selectively operable from a remote location, comprising:
  - a housing further comprising a selectively locked source of potential energy whose release operates the tool;
  - an assembly associated with said housing and selectively actuated from the remote location, whereby actuation of said assembly creates movement which unlocks said source of potential energy for setting the tool.
2. The apparatus of claim **1**, wherein:
  - said assembly comprises a primary lock whose defeat allows said assembly to move relatively to said potential energy source.
3. The apparatus of claim **2**, wherein:
  - said assembly moves axially without contact of said selectively locked potential energy source as said assembly unlocks said potential energy source.
4. The apparatus of claim **3**, wherein:
  - said potential energy source is selectively retained by a secondary lock;
  - said secondary lock responsive to a magnetic field for unlocking.
5. The apparatus of claim **4**, wherein:
  - said assembly comprises a source for at least one magnetic field.
6. The apparatus of claim **5**, wherein:
  - said source for the magnetic field acts on said secondary lock in both a first and a second position of said assembly.
7. The apparatus of claim **6**, wherein:
  - said source for said magnetic field attracts said secondary lock in said first position and repels said secondary lock in said second position or said secondary lock is retained in said first position with a retainer that is overcome when said second position of said secondary lock is attained.
8. The apparatus of claim **7**, wherein:
  - said secondary lock comprises at least one segment that straddles opposed recesses on said housing and on an outer housing;

said potential energy source disposed between said housing and said outer housing and prevented from moving said outer housing relative to said housing when said segment straddles said recesses.

9. The apparatus of claim **8**, wherein:

repelling said segment moves said segment out of said recess in said housing to allow said potential energy source to move said outer housing relative to said housing to set the tool.

10. The apparatus of claim **9**, wherein:

said outer housing comprises a portion of a liner hanger and movement of said outer housing extends at least one slip to grip a surrounding tubular;

said potential energy source comprises at least one of a coil spring, a compressed gas reservoir and a Belleville washer stack.

11. The apparatus of claim **7**, wherein:

said source comprises at least one first magnet with an outer face being a north pole and at least one second magnet with an outer face being a south pole, said magnets aligned with each other on at least one ring whereby movement of said ring aligns a different magnet with said secondary lock.

12. The apparatus of claim **11**, wherein:

said ring translates when said primary lock is defeated.

13. The apparatus of claim **2**, wherein:

said primary lock comprises a snap ring held to a housing groove by a retainer that selectively retains opposed ends of said snap ring.

14. The apparatus of claim **13**, wherein:

said retainer is shifted in response to a signal from the remote location to release said ends of said snap ring that allows said snap ring to come out of the housing groove.

15. The apparatus of claim **14**, wherein:

said retainer is shifted by one of a solenoid valve member and a magnetic field energized from the remote location.


16. The apparatus of claim **15**, wherein:  
said retainer comprises a magnet and said housing comprises an adjacent electromagnet, whereupon actuation of said electromagnet creates a magnetic field that affects movement of said magnet on said retainer.
17. The apparatus of claim **14**, wherein:  
said assembly comprises at least one first magnet with an outer face being a north pole and at least one second magnet with an outer face being a south pole, said magnets aligned with each other on at least one ring whereby movement of said ring aligns a different magnet with said secondary lock.
18. The apparatus of claim **17**, wherein:  
said secondary lock comprises at least one segment that straddles opposed recesses on said housing and on an outer housing;  
said potential energy source disposed between said housing and said outer housing and prevented from moving said outer housing relative to said housing when said segment straddles said recesses.
19. The apparatus of claim **18**, wherein:  
repelling said segment moves said segment out of said recess in said housing to allow said potential energy source to move said outer housing relative to said housing to set the tool.
20. The apparatus of claim **19**, wherein:  
said outer housing comprises a portion of a liner hanger and movement of said outer housing extends at least one slip to grip a surrounding tubular;  
said potential energy source comprises at least one of a coil spring, a compressed gas reservoir and a Belleville washer stack.
21. The apparatus of claim **1**, wherein:  
said assembly is mounted to a running tool inserted into a passage through said housing.
22. The apparatus of claim **21**, wherein:  
said assembly comprises a magnet that repels at least one segment initially in a housing groove out of said housing groove to allow said potential energy source to relatively move an outer housing located about said housing and thereby set the tool.

23. The apparatus of claim **22**, wherein:

said segment is secured with a fastener to said housing groove and said magnet on said running tool when brought into proximity to said segment applies a repelling force to said segment sufficient to shear said fastener and then move said segment out of said housing groove so that said outer housing can move axially to set the tool.

24. The apparatus of claim **7**, wherein

said source comprises at least one first magnet with an outer face being of a first polarity on at least one ring whereby movement of said ring aligns said first magnet with a second magnet of opposite polarity on said secondary lock to defeat said secondary lock.

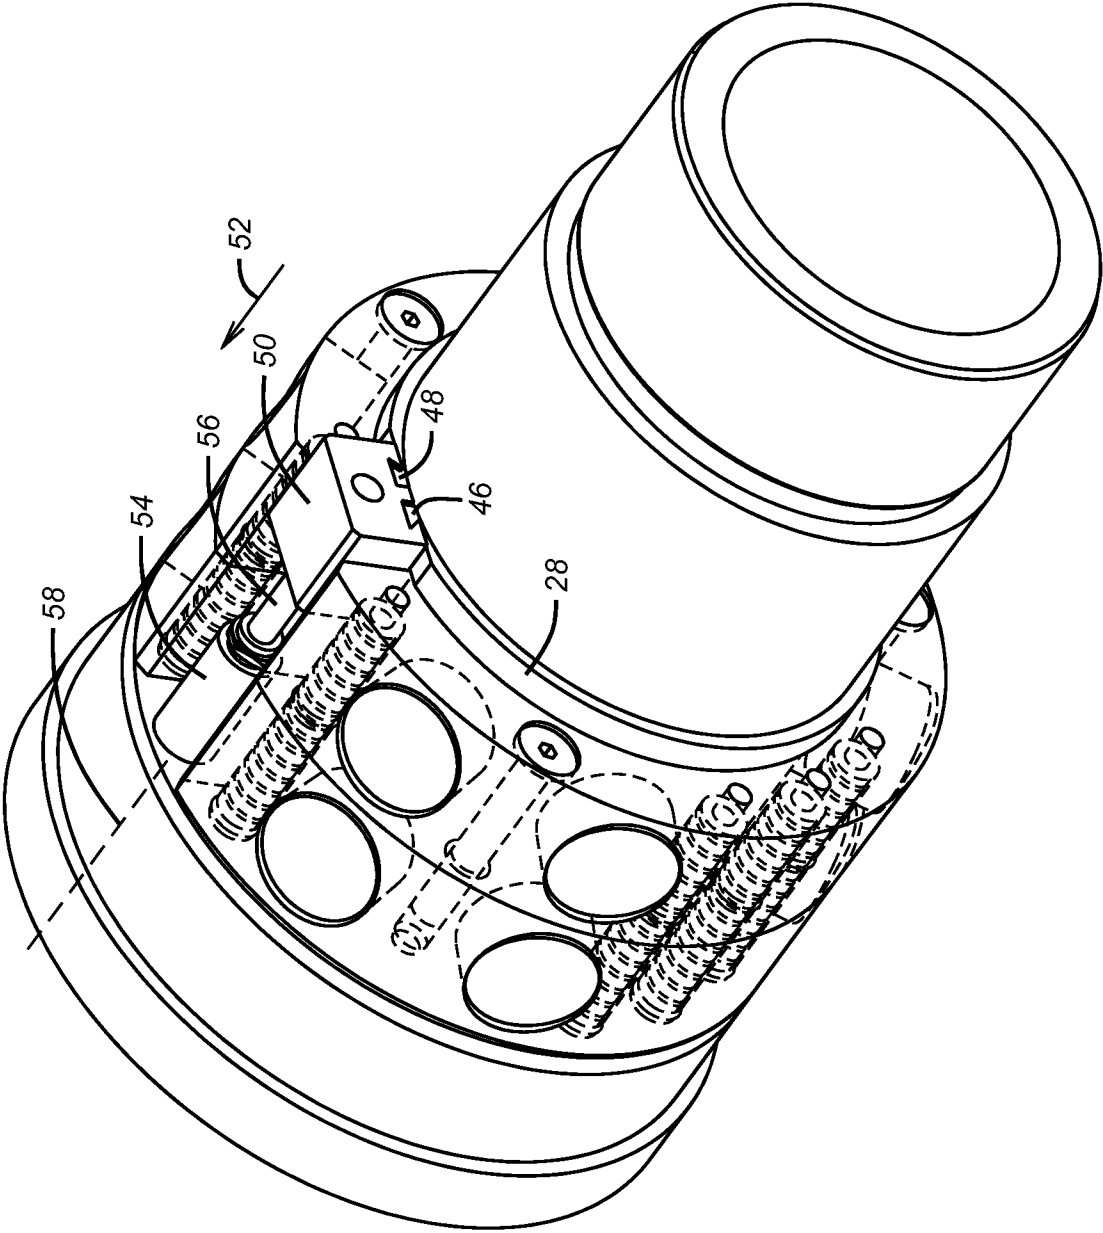

**FIG. 1**

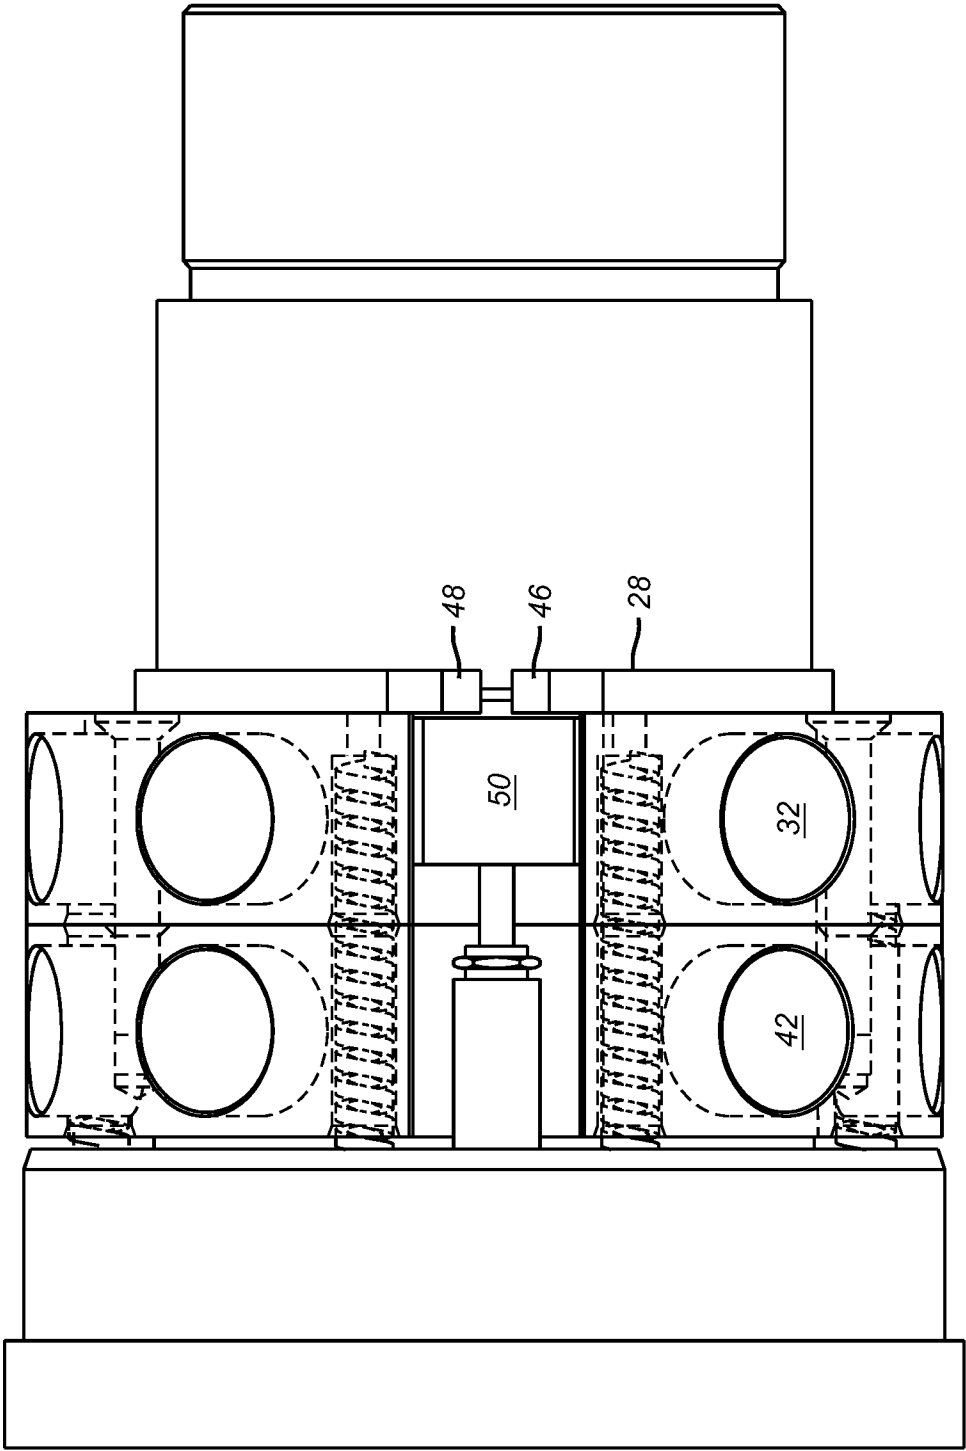


FIG. 2


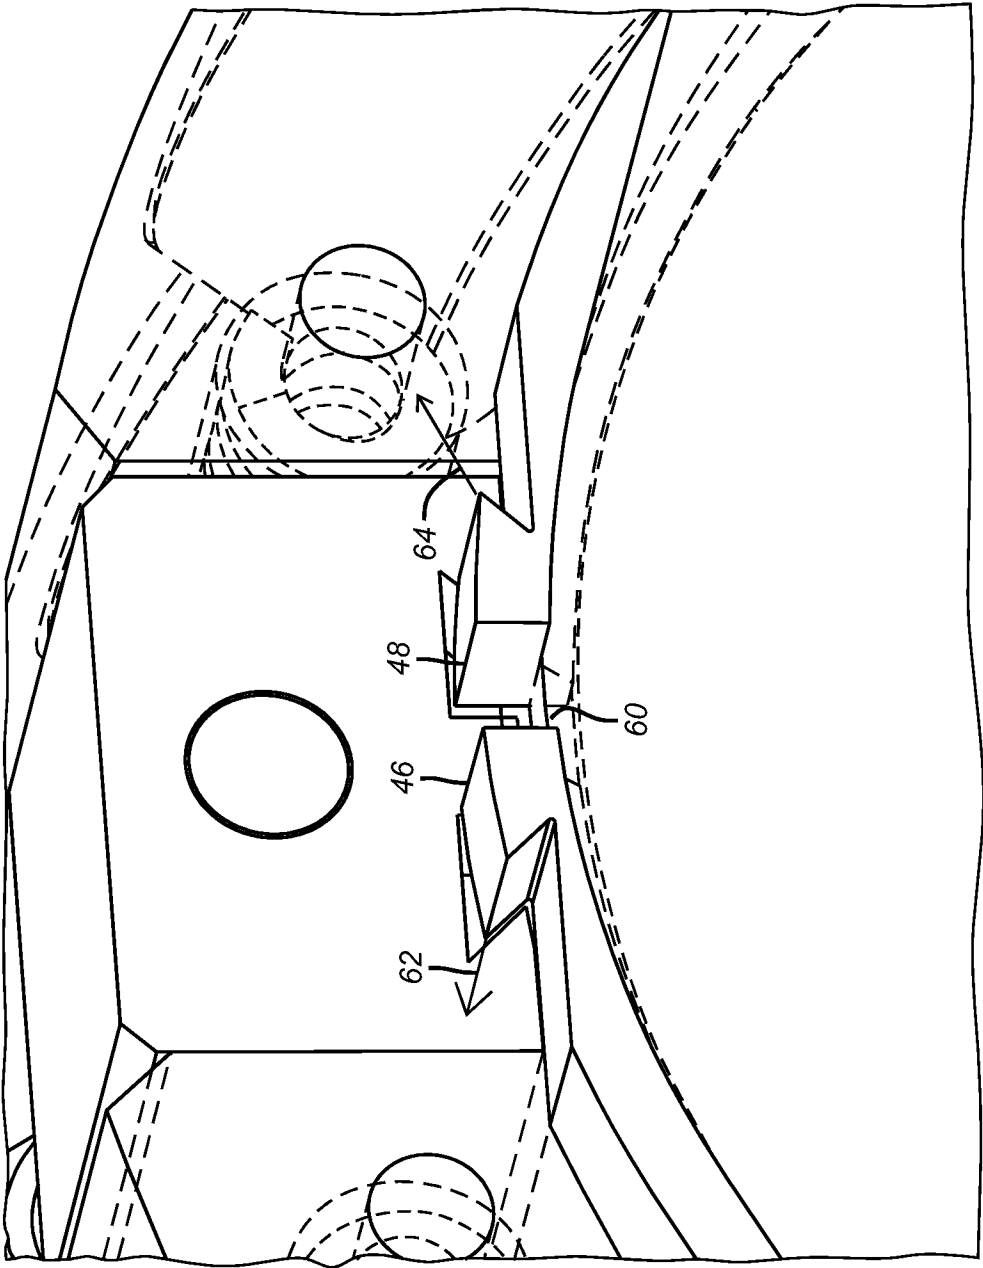



FIG. 3

4/8

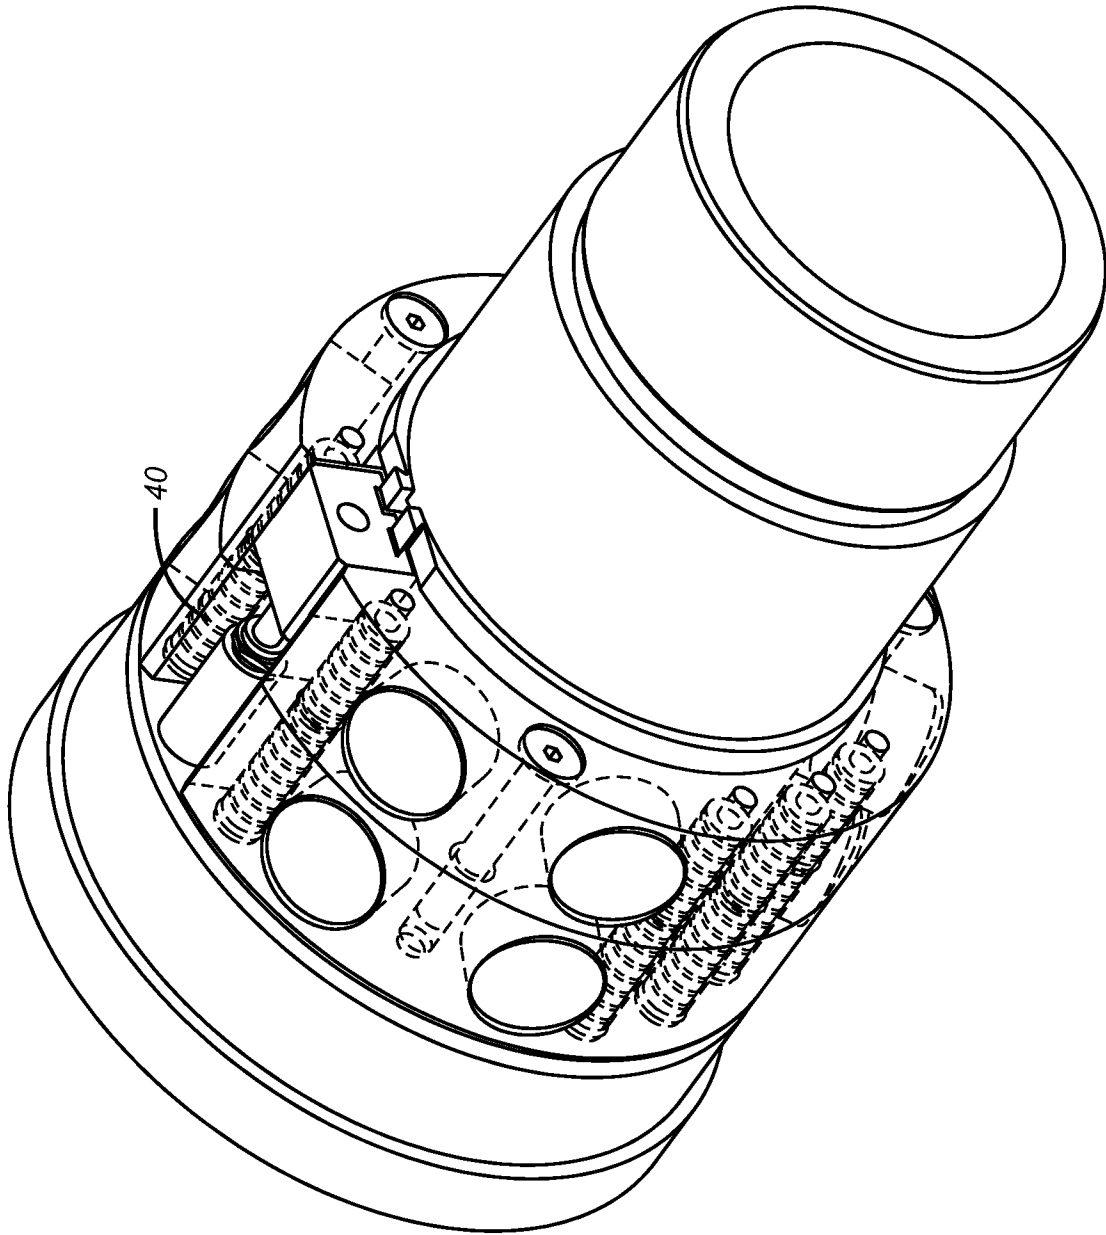


**FIG. 4**


5/8

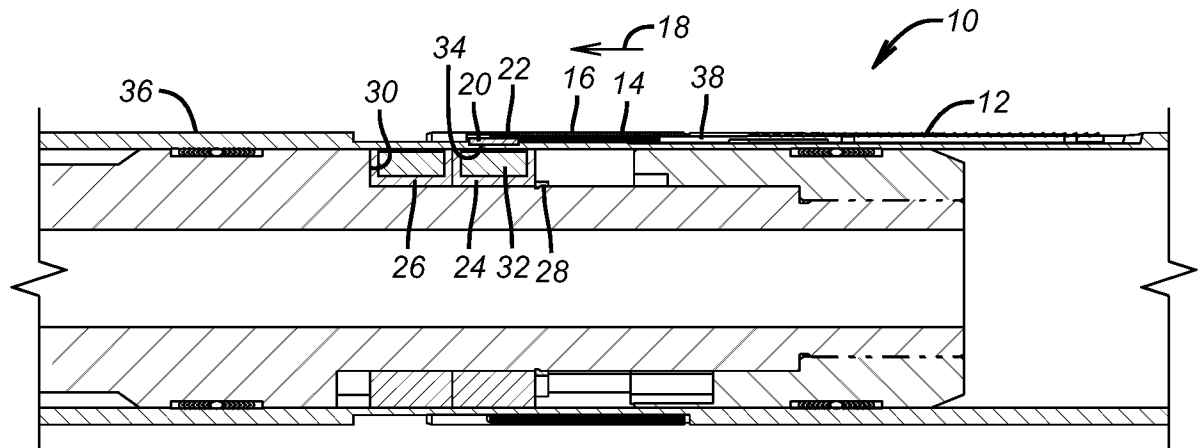


**FIG. 5**

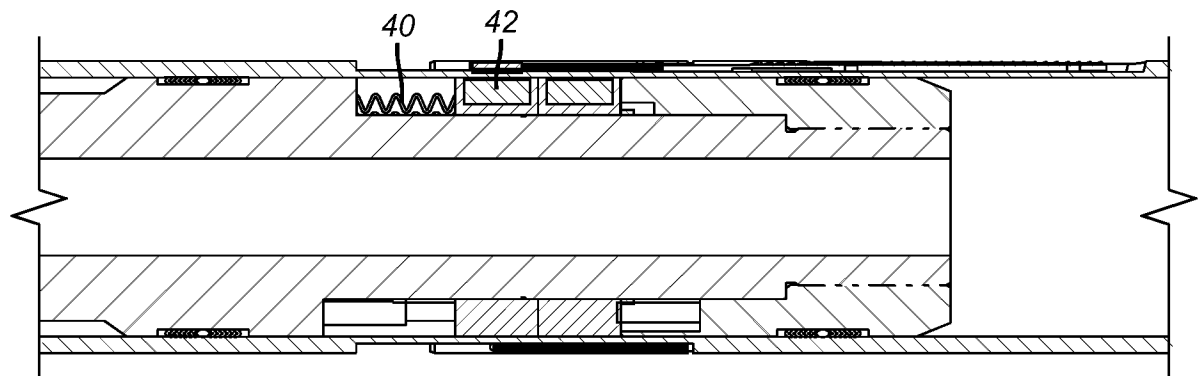


**FIG. 6**

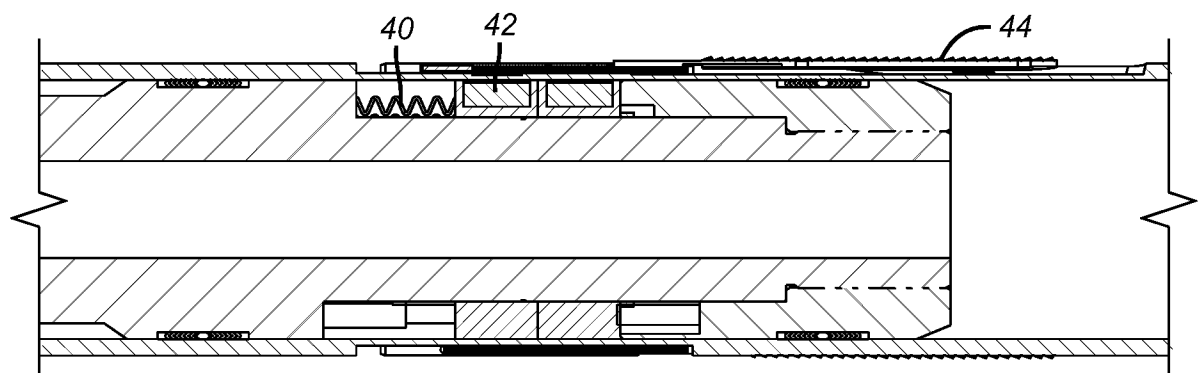

**FIG. 7**

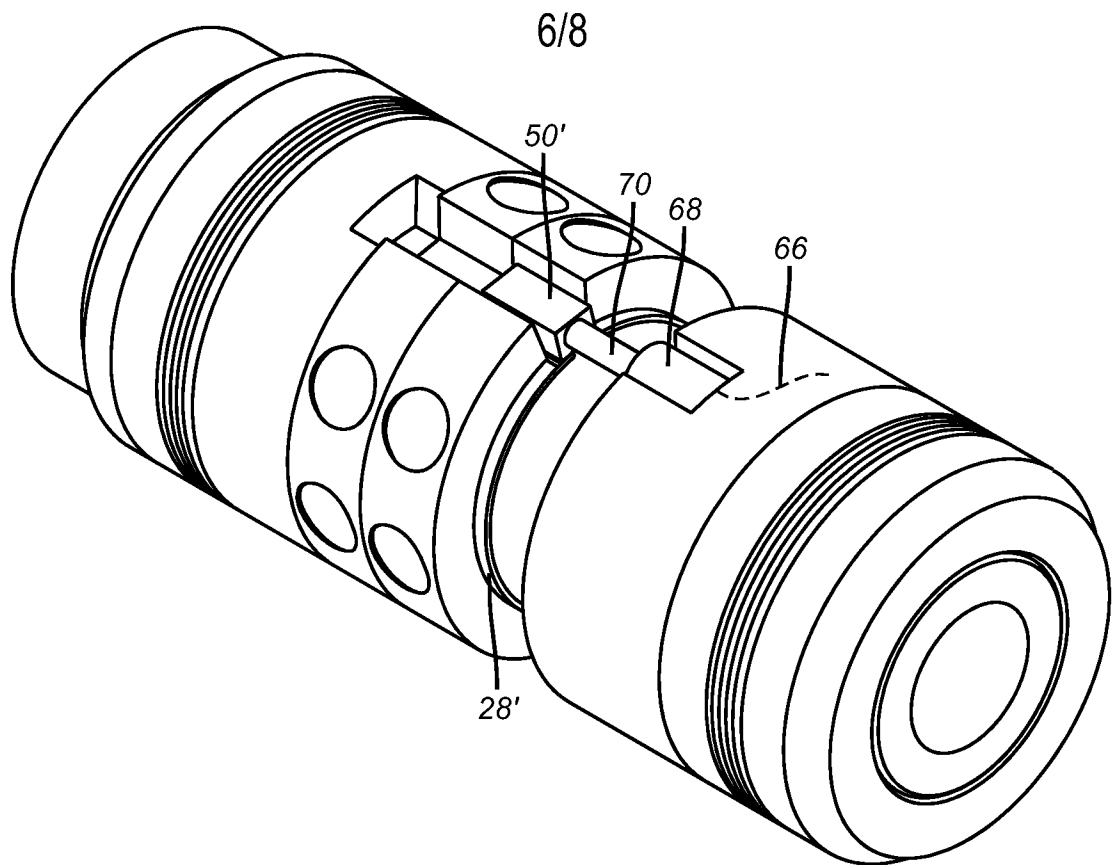


**FIG. 8**

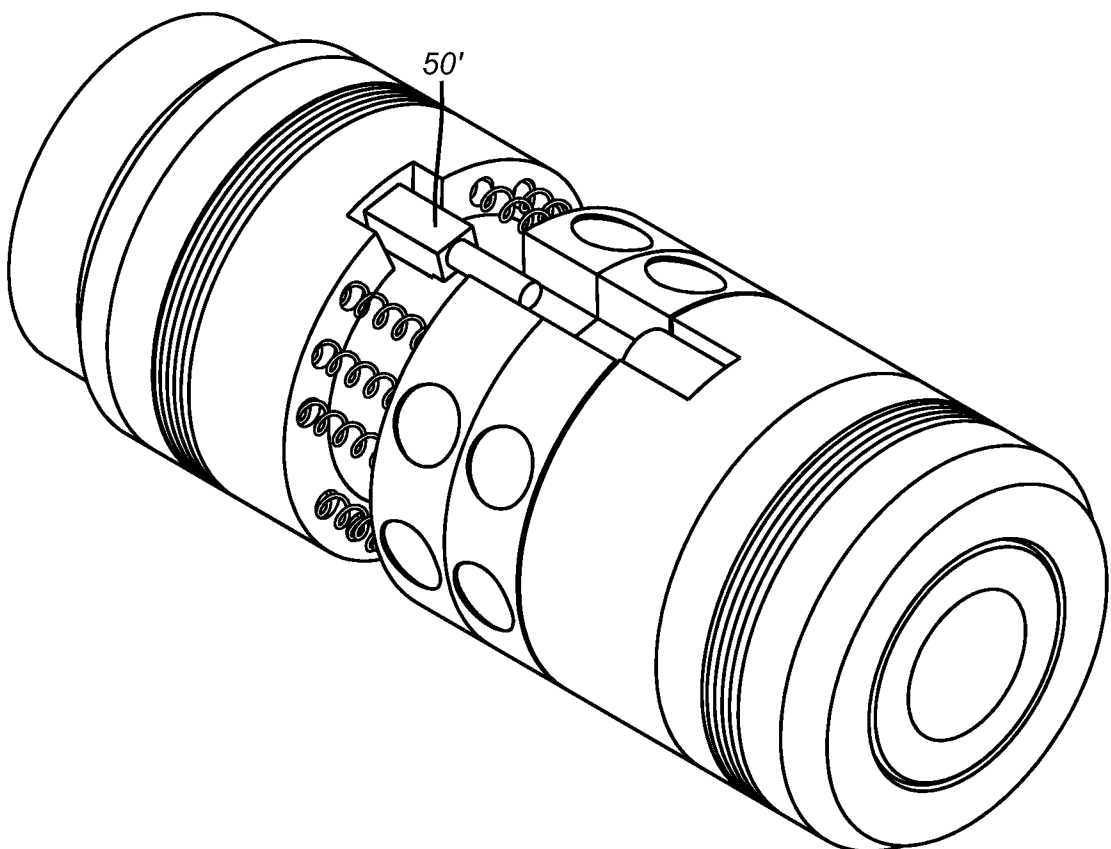


**FIG. 9**

7/8

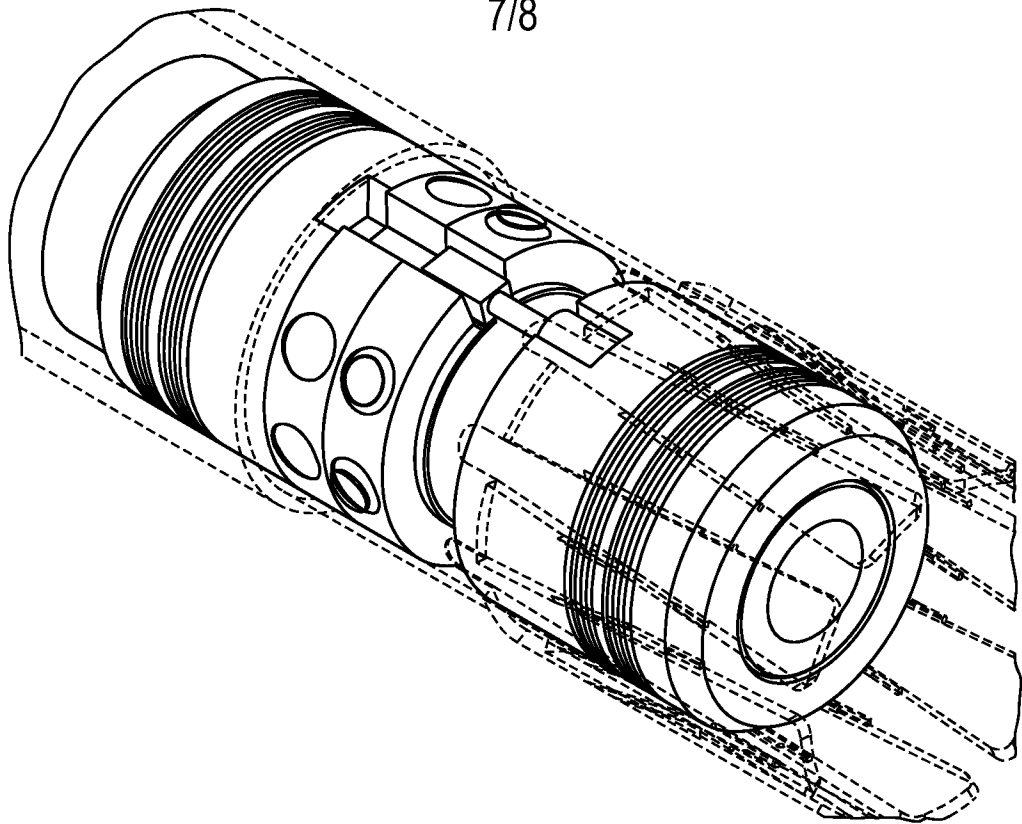

**FIG. 10**

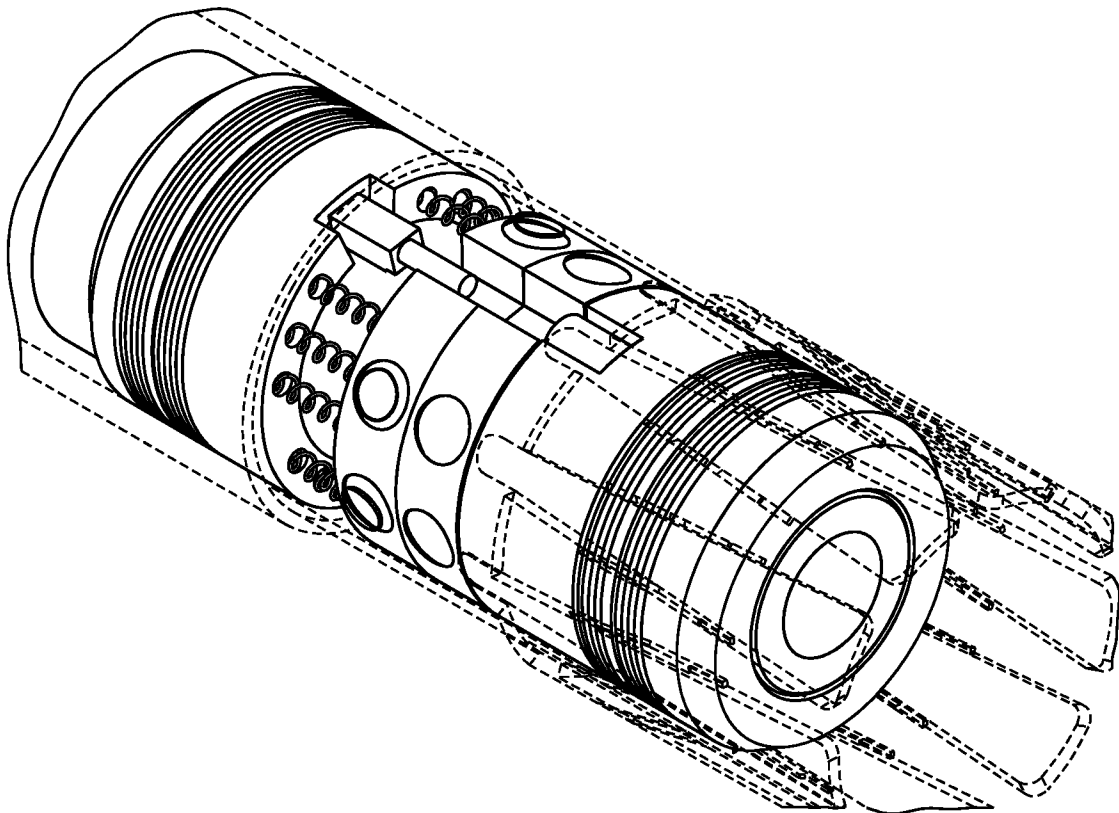

**FIG. 11**

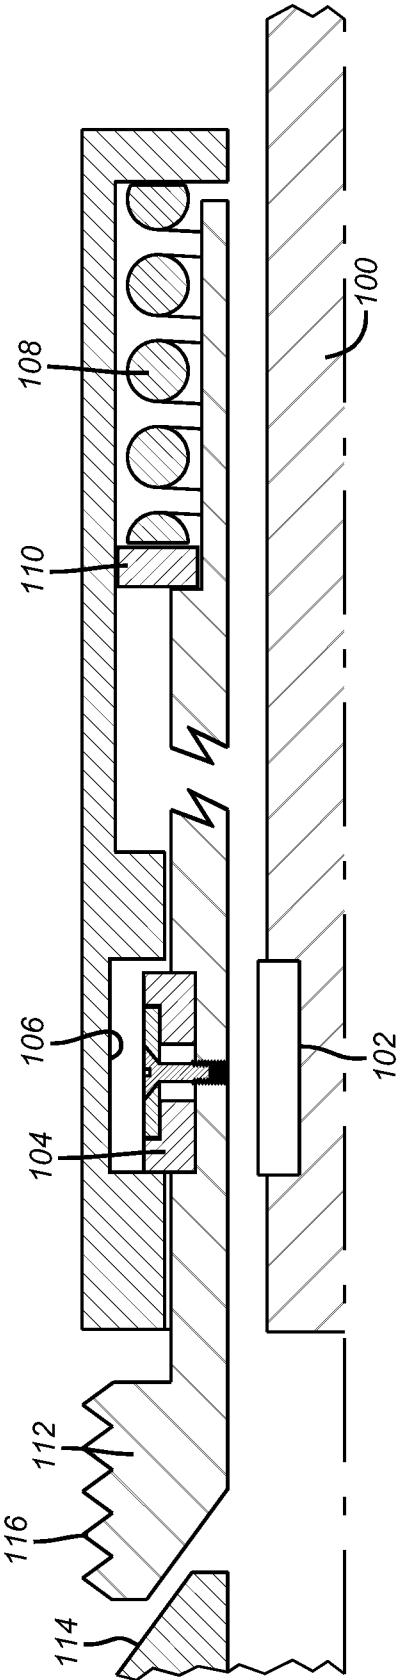


FIG. 12

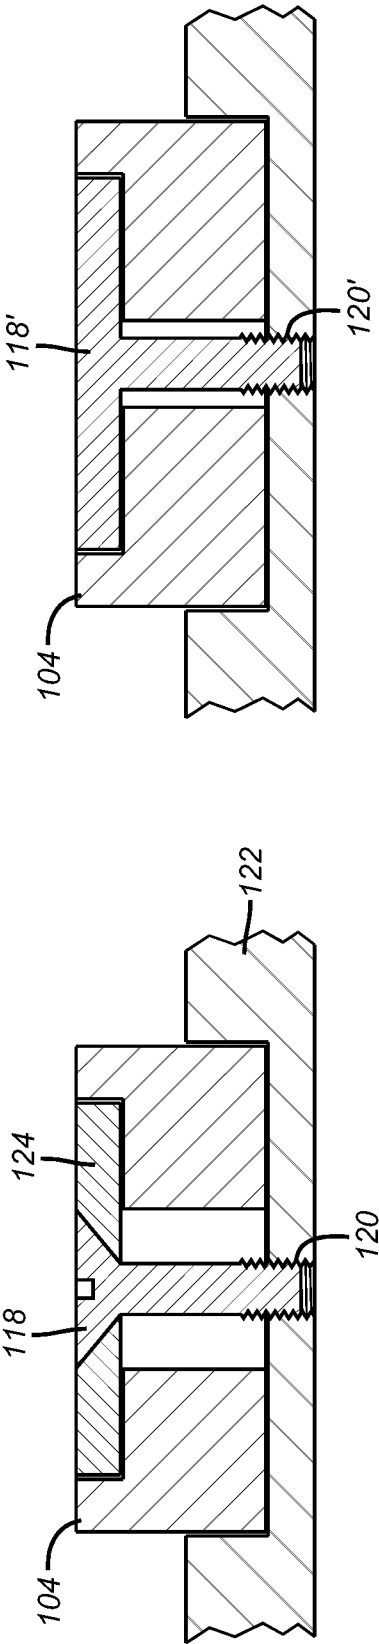


FIG. 13

FIG. 14