(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
22 October 2015 (22.10.2015)

WIPO | PCT

(10) International Publication Number
WO 2015/157883 A1

(51) International Patent Classification:
G08G 5/00 (2006.01)

(21) International Application Number:
PCT/CN2014/073143

(22) International Filing Date:
17 April 2014 (17.04.2014)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **SZ DJI TECHNOLOGY CO., LTD.** [CN/CN]; 6/F HKUST SZ IER Bldg, 9 Yuexing 1st Road, Hi-Tech Park (South), Nanshan District, Shenzhen, Guangdong 518057 (CN).

(72) Inventors: **WANG, Ming yu**; 6/F HKUST SZ IER Bldg, 9 Yuexing 1st Road, Hi-Tech Park (South), Nanshan District, Shenzhen, Guangdong 518057 (CN). **WANG, Tao**; 6/F HKUST SZ IER Bldg, 9 Yuexing 1st Road, Hi-Tech Park (South), Nanshan District, Shenzhen, Guangdong 518057 (CN).

(74) Agent: **SHENZHEN SCIENBIZIP INTELLECTUAL PROPERTY AGENCY CO., LTD.**; 9F, Rongqun building, No. 83 Longguan East Rd., Longhua New Dist., Shenzhen, Guangdong 518109 (CN).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) **Title**: FLIGHT CONTROL FOR FLIGHT-RESTRICTED REGIONS

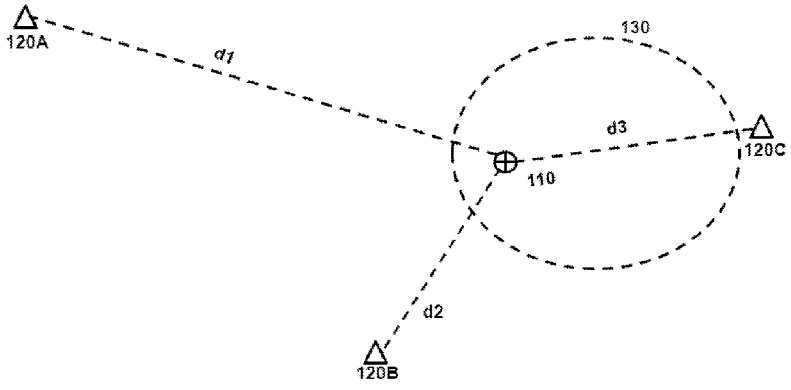


Fig. 1

(57) **Abstract**: A method for assessing flight response of an unmanned aerial vehicle (UAV) to a flight-restricted region, said method is comprised of following steps: assessing a location of UAV; assessing location of a flight-restricted region; calculating distance between UAV and flight-restricted region; instructing UAV to take different response measure according to different thresholds. An UAV is also provided.

WO 2015/157883 A1

FLIGHT CONTROL FOR FLIGHT-RESTRICTED REGIONS

BACKGROUND OF THE INVENTION

[0001] Aerial vehicles such as unmanned aerial vehicles (UAVs) can be used for performing surveillance, reconnaissance, and exploration tasks for military and civilian applications. Such vehicles may carry a payload configured to perform a specific function.

[0002] The air traffic control of every country (for example in the US, this is the FAA) has various regulations for airspace near airports or other regions. For example, within a certain distance of an airport, all UAVs are prohibited from flying, no matter what altitude or range of the UAV. That is to say, it is illegal to fly UAVs within a certain distance of an airport. In fact, it is also extremely dangerous.

SUMMARY OF THE INVENTION

[0003] In some instances, it may be desirable for to control flight of an aerial vehicle, such as an unmanned aerial vehicle (UAV), to permit a response to detected flight-restricted regions, such as airports. Thus, a need exists for improved flight control for flight-restricted regions. The present invention provides systems, methods, and devices related to detecting and responding to flight-restricted regions. Relative locations between a UAV and one or more flight-restricted regions may be determined. This may include calculating a distance between the UAV and the flight-restricted region. Based on this information, a flight response of the UAV may be implemented, such as landing the UAV immediately, providing some time to permit the UAV to land, and/or providing an alert or warning of the proximity of the flight-restricted region.

[0004] An aspect of the invention is directed to a method for assessing flight response of an unmanned aerial vehicle to a flight-restricted region, said method comprising: assessing a location of the unmanned aerial vehicle; assessing a location of a flight-restricted region; calculating, with aid of a processor, a distance between the unmanned aerial vehicle and the flight-restricted region using the location of the unmanned aerial vehicle and the location of the flight-restricted region; assessing, with aid of the processor, whether the distance falls within a first distance threshold or a second distance threshold greater than the first distance threshold; and instructing the unmanned aerial vehicle to take (1) a first flight response measure when the distance falls within the first distance threshold, and (2) a second flight response different from the first flight response measure when the distance falls within the second distance threshold and outside the first distance threshold.

[0005] In some embodiments, the location of the unmanned aerial vehicle can be assessed with aid of a GPS signal at the unmanned aerial vehicle. The location of the flight-restricted region can be assessed by accessing a local memory of unmanned aerial vehicle which includes locations for a plurality of flight-restricted regions. The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection. In some instances, the local memory is updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with a communication network.

[0006] The flight-restricted region may be an airport.

[0007] In accordance with some implementations, the distance can be calculated using an ENU coordinate system. The location of the unmanned aerial vehicle may be converted to an ECEF coordinate system. The location of the unmanned aerial vehicle can be further converted to an ENU coordinate system. The distance may be calculated at specified time intervals.

[0008] The flight-restricted region may be selected from a plurality of possible flight restricted regions based on proximity of the unmanned aerial vehicle when the unmanned aerial vehicle is turned on.

[0009] The first flight response measure may be to automatically land the aerial vehicle on a surface. The second flight response measure can be to provide an operator of the unmanned aerial vehicle with a time period to land the aerial vehicle on a surface, after which the unmanned aerial vehicle will automatically land. The method may further comprise assessing, with aid of the processor, whether the distance falls within a third distance threshold greater than the second distance threshold; and instructing the unmanned aerial vehicle to take (3) a third flight response different from the first flight response and the second flight response when the distance falls within the third threshold and outside the second threshold. The third flight response measure may be to provide an alert to an operator of the unmanned aerial vehicle that the unmanned aerial vehicle is near the flight-restricted region.

[0010] An unmanned aerial vehicle may be provided in accordance with another aspect of the invention. The unmanned aerial vehicle may comprise: a processor configured to (1) receive a location of the unmanned aerial vehicle and calculate a distance between the location of the unmanned aerial vehicle and a location of a flight-restricted region, and (2) assess whether the distance falls within a first distance threshold or a second distance threshold greater than the first distance threshold; andone or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take (1) a first flight response measure when the distance falls within

the first distance threshold, and (2) a second flight response different from the first flight response measure when the distance falls within the second distance threshold and outside the first distance threshold.

[0011] The location of the unmanned aerial vehicle may be received with aid of a GPS signal at the unmanned aerial vehicle. The unmanned aerial vehicle may include a local memory that stores the location of the flight-restricted region and further stores locations for a plurality of flight-restricted regions. The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection. The local memory can be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with a communication network.

[0012] The flight-restricted region may be an airport.

[0013] In some embodiments, the processor of the unmanned aerial vehicle calculates the distance using an ENU coordinate system. The processor may convert the location of the unmanned aerial vehicle to an ECEF coordinate system.The processor may further convert the location of the unmanned aerial vehicle to an ENU coordinate system. Optionally, the processor calculates the distance at specified time intervals.

[0014] The processor may select the flight-restricted region from a plurality of possible flight restricted regions based on proximity of the unmanned aerial vehicle when the unmanned aerial vehicle is turned on.

[0015] The first flight response measure may be to automatically land the aerial vehicle on a surface. The second flight response measure can be to provide an operator of the unmanned aerial vehicle with a time period to land the aerial vehicle on a surface, after which the unmanned aerial vehicle will automatically land. The method may further comprise assessing, with aid of the processor, whether the distance falls within a third distance threshold greater than the second distance threshold; and instructing the unmanned aerial vehicle to take (3) a third flight response different from the first flight response and the second flight response when the distance falls within the third threshold and outside the second threshold. The third flight response measure may be to provide an alert to an operator of the unmanned aerial vehicle that the unmanned aerial vehicle is near the flight-restricted region.

[0016] Additional aspects of the invention may be directed to a method for assessing flight response of an unmanned aerial vehicle to a flight-restricted region, said method comprising: assessing a general location of the unmanned aerial vehicle by assessing a location of an external

device in communication with the unmanned aerial vehicle;assessing a location of a flight-restricted region;calculating, with aid of a processor, a distance between the unmanned aerial vehicle and the flight-restricted region using the general location of the unmanned aerial vehicle and the location of the flight-restricted region; assessing, with aid of the processor, whether the distance falls within a distance threshold; andinstructing the unmanned aerial vehicle to take a flight response measure when the distance falls within the distance threshold.

[0017] The location of the external device may be assessed with aid of a GPS signal at the external device. The general location of the unmanned aerial vehicle may be the location of the external device. The external device may be a mobile terminal capable of receiving data from the unmanned aerial vehicle. The data may include image data captured by a camera of the unmanned aerial vehicle and the mobile terminal includes a display capable of displaying the image data.The mobile terminal may be a mobile phone in some implementations. The mobile terminal may be capable of transmitting control data to the unmanned aerial vehicle and thereby control the flight of the unmanned aerial vehicle.The mobile terminal may communicate with the unmanned aerial vehicle via a direct communication technique.The direct communication technique can include WiFi or Bluetooth.The mobile terminal may communicate with the unmanned aerial vehicle via an indirect communication technique. A mobile base station may be used to assess the location of the mobile terminal.

[0018] Optionally, the location of the flight-restricted region can be assessed by accessing a local memory of unmanned aerial vehicle which includes locations for a plurality of flight-restricted regions. The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection. The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle a communication network.

[0019] In some embodiments, the flight-restricted region is an airport.

[0020] The distance may be calculated using an ENU coordinate system. The location of the unmanned aerial vehicle may be converted to an ECEF coordinate system. In some cases, the location of the unmanned aerial vehicle is further converted to an ENU coordinate system. The distance may be calculated at specified time intervals.

[0021] The flight-restricted region may be selected from a plurality of possible flight restricted regions based on proximity of the unmanned aerial vehicle when the unmanned aerial vehicle is turned on.

[0022] Optionally, the flight response measure can be to automatically land the aerial vehicle on a surface. In another implementation, the flight response measure can be to provide an operator of the unmanned aerial vehicle with a time period to land the aerial vehicle on a surface, after which the unmanned aerial vehicle will automatically land. Alternatively, the flight response measure may be to provide an alert to an operator of the unmanned aerial vehicle that the unmanned aerial vehicle is near the flight-restricted region.

[0023] Further aspects of the invention may be directed to an unmanned aerial vehicle comprising:a processor configured to (1) receive a location of an external device in communication with the unmanned aerial vehicle and assess a general location of the unmanned aerial vehicle using the location of the external device, (2) calculate a distance between the general location of the unmanned aerial vehicle and a location of a flight-restricted region, and (3) assess whether the distance falls within a distance threshold; andone or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take a flight response measure when the distance falls within the distance threshold.

[0024] In some embodiments, the location of the external device may be received with aid of a GPS signal at the external device.The general location of the unmanned aerial vehicle may be the location of the external device.The external device can be a mobile terminal capable of receiving data from the unmanned aerial vehicle. The data may include image data captured by a camera of the unmanned aerial vehicle and the mobile terminal includes a display capable of displaying the image data. The mobile terminal may be a mobile phone in some implementations. The mobile terminal may be capable of transmitting control data to the unmanned aerial vehicle and thereby control the flight of the unmanned aerial vehicle. The mobile terminal may communicate with the unmanned aerial vehicle via a direct communication technique. The direct communication technique can include WiFi or Bluetooth. The mobile terminal may communicate with the unmanned aerial vehicle via an indirect communication technique. A mobile base station may be used to assess the location of the mobile terminal.

[0025] The unmanned aerial vehicle may include a local memory storing the location of the flight-restricted region and further storing locations for a plurality of flight-restricted regions.The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection. In some instances, the local memory is updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle a communication network.

[0026] The flight-restricted region can be an airport, in accordance with some implementations of the invention.

[0027] The processor may be configured to calculate the distance using an ENU coordinate system. Optionally, the processor is configured to convert the location of the unmanned aerial vehicle to an ECEF coordinate system.The processor may be configured to further convert the location of the unmanned aerial vehicle to an ENU coordinate system. In some instances, the processor is configured to calculate the distance at specified time intervals.

[0028] The processor may be configured to select the flight-restricted region from a plurality of possible flight restricted regions based on proximity of the unmanned aerial vehicle when the unmanned aerial vehicle is turned on.

[0029] Optionally, the flight response measure can be to automatically land the aerial vehicle on a surface. In another implementation, the flight response measure can be to provide an operator of the unmanned aerial vehicle with a time period to land the aerial vehicle on a surface, after which the unmanned aerial vehicle will automatically land. Alternatively, the flight response measure may be to provide an alert to an operator of the unmanned aerial vehicle that the unmanned aerial vehicle is near the flight-restricted region.

[0030] A method for assessing flight response of an unmanned aerial vehicle to a flight-restricted region may be provided in accordance with another aspect of the invention. The method may comprise: assessing a location of the unmanned aerial vehicle;assessing a location of a flight-restricted region;calculating, with aid of a processor, relative positioning between the unmanned aerial vehicle and the flight-restricted region using the location of the unmanned aerial vehicle and the location of the flight-restricted region; assessing, with aid of the processor, a jurisdiction within which the unmanned aerial vehicle is located, based on the location of the unmanned aerial vehicle, and one or more flight restriction rules provided within the jurisdiction; andinstructing the unmanned aerial vehicle to take a flight response measure when the relative positioning between the unmanned aerial vehicle and the flight-restricted region falls under the one or more flight restriction rules.

[0031] The location of the unmanned aerial vehicle may be assessed with aid of a GPS signal at the unmanned aerial vehicle. The location of the flight-restricted region can be assessed by accessing a local memory of unmanned aerial vehicle which includes locations for a plurality of flight-restricted regions. The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection. The local memory can be updated with the locations of the plurality

of flight-restricted regions when the unmanned aerial vehicle communicates with a communication network.

[0032] The flight-restricted region may be an airport.

[0033] The relative positioning between the unmanned aerial vehicle and the flight-restricted regionmay include a distance between the unmanned aerial vehicle and the flight-restricted region.The distance may be calculated using an ENU coordinate system.The one or more flight restriction rules may provide the flight response measure when the distance falls within a distance threshold.The distance threshold may be selected based on the one or more flight restriction rules of the jurisdiction.The jurisdiction may be a country and the one or more flight restriction rules may include laws or regulations of the country.

[0034] In some embodiments, the flight response measure may be to automatically land the aerial vehicle on a surface.The flight response measure is to provide an operator of the unmanned aerial vehicle with a time period to land the aerial vehicle on a surface, after which the unmanned aerial vehicle will automatically land, in accordance with other embodiments.The flight response measure may be to provide an alert to an operator of the unmanned aerial vehicle that the unmanned aerial vehicle is near the flight-restricted region.

[0035] Aspects of the invention may also provide an unmanned aerial vehicle comprising:a processor configured to (1) receive a location of an unmanned aerial vehicle and calculate a relative position between the location of the unmanned aerial vehicle and a location of a flight-restricted region, and (2) assess a jurisdiction within which the unmanned aerial vehicle is located, based on the location of the unmanned aerial vehicle, and one or more flight rules provided within the jurisdiction; andone or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take a flight response measure when the relative positioning between the unmanned aerial vehicle and the flight-restricted region falls under the one or more flight restriction rules.

[0036] The location of the unmanned aerial vehicle may be received with aid of a GPS signal at the unmanned aerial vehicle.The unmanned aerial vehicle may include a local memory storing the location of the flight-restricted region and further storing locations for a plurality of flight-restricted regions.The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection.The local memory can be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with a communication network.

[0037] In some embodiments, the flight-restricted region is an airport.

[0038] The relative positioning between the unmanned aerial vehicle can include a distance between the unmanned aerial vehicle and the flight-restricted region.The processor may calculate the distance using an ENU coordinate system.The one or more flight restriction rules may provide the flight response measure when the distance falls within a distance threshold.The distance threshold can be selected based on the one or more flight restriction rules of the jurisdiction.The jurisdiction may be a country and the one or more flight restriction rules may include laws or regulations of the country.

[0039] In some embodiments, the flight response measure may be to automatically land the aerial vehicle on a surface. The flight response measure is to provide an operator of the unmanned aerial vehicle with a time period to land the aerial vehicle on a surface, after which the unmanned aerial vehicle will automatically land, in accordance with other embodiments. The flight response measure may be to provide an alert to an operator of the unmanned aerial vehicle that the unmanned aerial vehicle is near the flight-restricted region.

[0040] Moreover, aspects of the invention may provide a method for evaluating a takeoff condition for an unmanned aerial vehicle, said method comprising:assessing a location of the unmanned aerial vehicle at rest on a surface;assessing a location of a flight-restricted region;calculating, with aid of a processor, a distance between the unmanned aerial vehicle and the flight-restricted region using the location of the unmanned aerial vehicle and the location of the flight-restricted region; assessing, with aid of the processor, whether the distance falls within a distance threshold; andpreventing the unmanned aerial vehicle from taking off from the surface when the distance falls within the distance threshold.

[0041] The location of the unmanned aerial vehicle may be assessed with aid of a GPS signal at the unmanned aerial vehicle.The location of the flight-restricted region may be assessed by accessing a local memory of unmanned aerial vehicle which includes locations for a plurality of flight-restricted regions.The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection.The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with a communication network.

[0042] The flight-restricted region may be an airport.

[0043] In some embodiments, the distance can be calculated using an ENU coordinate system.The location of the unmanned aerial vehicle may be converted to an ECEF coordinate system.The location of the unmanned aerial vehicle can be further converted to an ENU coordinate system.

[0044] The flight-restricted region may be selected from a plurality of possible flight restricted regions based on proximity of the unmanned aerial vehicle when the unmanned aerial vehicle is turned on.

[0045] An unmanned aerial vehicle may be provided in accordance with further aspects of the invention. The unmanned aerial vehicle may comprise:a processor configured to (1) receive a location of the unmanned aerial vehicle and calculate a distance between the location of the unmanned aerial vehicle and a location of a flight-restricted region, and (2) assess whether the distance falls within a distance threshold; andone or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take off when the distance exceeds the distance threshold, and prevents the unmanned aerial vehicle from taking off when the distance falls within the distance threshold, in response to instructions from the processor.

[0046] In some embodiments, the location of the unmanned aerial vehicle is received with aid of a GPS signal at the unmanned aerial vehicle.The unmanned aerial vehicle may include a local memory storing the location of the flight-restricted region and further storing locations for a plurality of flight-restricted regions.The local memory is updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection. The local memory may be updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with a communication network.

[0047] The flight-restricted region may be an airport.

[0048] In some implementations, the processor of the unmanned aerial vehicle may calculate the distance using an ENU coordinate system.The processor may convert the location of the unmanned aerial vehicle to an ECEF coordinate system.The processor may further convert the location of the unmanned aerial vehicle to an ENU coordinate system.The processor may select the flight-restricted region from a plurality of possible flight restricted regions based on proximity of the unmanned aerial vehicle when the unmanned aerial vehicle is turned on.

[0049] It shall be understood that different aspects of the invention can be appreciated individually, collectively, or in combination with each other. Various aspects of the invention described herein may be applied to any of the particular applications set forth below or for any other types of movable objects. Any description herein of aerial vehicles, such as unmanned aerial vehicles, may apply to and be used for any movable object, such as any vehicle. Additionally, the systems, devices, and methods disclosed herein in the context of aerial motion (e.g., flight) may also be applied in the

context of other types of motion, such as movement on the ground or on water, underwater motion, or motion in space.

[0050] Other objects and features of the present invention will become apparent by a review of the specification, claims, and appended figures.

INCORPORATION BY REFERENCE

[0051] All publications, patents, and patent applications mentioned in this specification are herein incorporated by reference to the same extent as if each individual publication, patent, or patent application was specifically and individually indicated to be incorporated by reference.

BRIEF DESCRIPTION OF THE DRAWINGS

[0052] The novel features of the invention are set forth with particularity in the appended claims. A better understanding of the features and advantages of the present invention will be obtained by reference to the following detailed description that sets forth illustrative embodiments, in which the principles of the invention are utilized, and the accompanying drawings of which:

[0053] FIG. 1 provides an example of unmanned aerial vehicle locations relative to a flight-restricted region, in accordance with an embodiment of the invention.

[0054] FIG. 2 shows an example of a plurality of flight-restricted region proximity zones, in accordance with an embodiment of the invention.

[0055] FIG. 3 provides a schematic illustration of an unmanned aerial vehicle in communication with an external device, in accordance with an embodiment of the invention.

[0056] FIG. 4 provides an example of an unmanned aerial vehicle using a global positioning system (GPS) to determine the location of the unmanned aerial vehicle, in accordance with an embodiment of the invention.

[0057] FIG. 5 is an example of an unmanned aerial vehicle in communication with a mobile device, in accordance with an embodiment of the invention.

[0058] FIG. 6 is an example of an unmanned aerial vehicle in communication with one or more mobile devices, in accordance with an embodiment of the invention.

[0059] FIG. 7 provides an example of unmanned aerial vehicle with an on-board memory unit, in accordance with an aspect of the invention.

[0060] FIG. 8 shows an example of an unmanned aerial vehicle in relation to multiple flight-restricted regions, in accordance with an embodiment of the invention.

[0061] FIG. 9 illustrates an unmanned aerial vehicle, in accordance with an embodiment of the invention.

[0062] FIG. 10 illustrates a movable object including a carrier and a payload, in accordance with an embodiment of the invention.

[0063] FIG. 11 is a schematic illustration by way of block diagram of a system for controlling a movable object, in accordance with an embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0064] The systems, devices, and methods of the present invention provide flight control for an aerial vehicle in response to one or more detected flight-restricted region. The aerial vehicle may be an unmanned aerial vehicle (UAV), or any other type of movable object. Some jurisdictions have one or more no-fly zones where UAVs are not permitted to fly. For example, in the US, UAVs may not fly within certain proximities of airports. Therefore, a need exists to provide a no-fly function to UAVs to prevent them from flying in flight prohibited regions.

[0065] The location of one or more flight-restricted regions, such as airports, may be stored on-board the UAV. Alternatively, information about the location of one or more flight-restricted regions may be accessed from a data source off-board the UAV.The location of the UAV may be determined. This may occur prior to take-off of the UAV and/or while the UAV is in flight. In some instances, the UAV may have a GPS receiver that may be used to determine the location of the UAV. In other examples, the UAV may be in communication with an external device, such as a mobile control terminal. The location of the external device may be determined and used to approximate the location of the UAV.

[0066] The distance between the UAV and a flight-restricted region may be calculated. Based on the calculated distance, one or more flight response measures may be taken. For example, if the UAV is within a first radius of a flight-restricted region, the UAV may automatically land. If the UAV is within a second radius of the flight-restricted region, the UAV may be give an operator a time period to land, after which the UAV will automatically land. If the UAV is within a third radius of the flight-restricted region, the UAV may provide an alert to an operator of the UAV regarding the proximity of the flight-restricted region. In some instances, if the UAV is within a particular distance from the flight-restricted region, the UAV may not be able to take off.

[0067] The systems, devices, and methods herein may provide automated response of a UAV to a detected proximity to a flight-restricted region. Different actions may be taken, based on different detected distances to the restricted region, which may permit the user to take action with reduced interference when not too close, and which may provide greater interference to provide automated landing when the UAV is too close to comply with regulations and provide greater safety. The

systems, devices, and methods herein may also use various systems for determining the location of the UAV to provide greater assurance that the UAV will not inadvertently fly into a flight-restricted region.

[0068] FIG. 1 provides an example of unmanned aerial vehicle locations 120A, 120B, 120C relative to a flight-restricted region 110, in accordance with an embodiment of the invention.

[0069] A flight-restricted region 110 may have any location. In some instances, a flight-restricted region location may be a point, or the center or location of the flight-restricted region may be designated by a point (e.g., latitude and longitude coordinates, optionally altitude coordinate). For example, a flight-restricted region location may be a point at the center of an airport, or representative of the airport or other type of flight-restricted region. In other examples, a flight-restricted region location may include an area or region. The area or region 130 may have any shape (e.g., rounded shape, rectangular shape, triangular shape, shape corresponding to one or more natural or man-made feature at the location, shape corresponding to one or more zoning rules, or any other boundaries. For example, the flight-restricted region may be the boundaries of an airport or other type of flight-restricted region. In some instances, the flight-restricted region may include a space. The space may be a three-dimensional space that includes latitude, longitude, and/or altitude coordinates. The three-dimensional space may include length, width, and/or height. The flight-restricted region may include space from the ground up to any altitude above the ground. This may include altitude straight up from one or more flight-restricted region on the ground. For example, for some latitudes and longitudes, all altitudes may be flight restricted. In some instances, some altitudes for particular lateral regions may be flight-restricted, while others are not. For example, for some latitudes and longitudes, some altitudes may be flight restricted while others are not. Thus, the flight-restricted region may have any number of dimensions, and measurement of dimensions, and/or may be designated by these dimension locations, or by a space, area, line, or point representative of the region.

[0070] A flight-restricted region may include one or more locations where unauthorized aerial vehicles may not fly. This may include unauthorized unmanned aerial vehicles (UAVs) or all UAVs. Flight-restricted regions may include prohibited airspace, which may refer to an area (or volume) of airspace within which flight of aircraft is not allowed, usually due to security concerns. Prohibited areas may contain airspace of defined dimensions identified by an area on the surface of the earth within which the flight of aircraft is prohibited. Such areas can be established for security or other reasons associated with the national welfare. These areas may be published in the Federal Register and are depicted on aeronautical charts in the United States, or in other publications in various

jurisdictions. The flight-restricted region may include one or more of special use airspace (e.g., where limitations may be imposed on aircraft not participating in designated operations), such as restricted airspace (i.e., where entry is typically forbidden at all times from all aircraft and is not subject to clearance from the airspace's controlling body), military operations areas, warning areas, alert areas, temporary flight restriction (TFR) areas, national security areas, and controlled firing areas.

[0071] Examples of flight-restricted regions may include, but are not limited to, airports, flight corridors, military or other government facilities, locations near sensitive personnel (e.g., when the President or other leader is visiting a location), nuclear sites, research facilities, private airspace, de-militarized zones, certain jurisdictions (e.g., townships, cities, counties, states/provinces, countries, bodies of water or other natural landmarks), or other types of no-fly zones. A flight-restricted region may be a permanent no-fly zone or may be a temporary area where flight is prohibited. In some instances, a list of flight-restricted regions may be updated. Flight-restricted regions may vary from jurisdiction to jurisdiction. For instance, some countries may include schools as flight-restricted regions while others may not.

[0072] An aerial vehicle, such as a UAV 120A, 120B, 120C may have a location. The location of a UAV may be determined to be one or more coordinates of the UAV relative to a reference frame (e.g., underlying earth, environment). For example, the latitude and/or longitude coordinates of a UAV may be determined. Optionally, an altitude of the UAV may be determined. The location of the UAV may be determined to any degree of specificity. For example, the location of the UAV may be determined to within about 2000 meters, 1500 meters, 1200 meters, 1000 meters, 750 meters, 500 meters, 300 meters, 100 meters, 75 meters, 50 meters, 20 meters, 10 meters, 7 meters, 5 meters, 3 meters, 2 meters, 1 meter, 0.5 meters, 0.1 meters, 0.05 meters, or 0.01 meters.

[0073] A location of a UAV 120A, 120B, 120C may be determined relative to a location of flight-restricted region 110. This may include comparing coordinates representative of the location of the UAV with coordinates of a location representative of the flight-restricted region. In some embodiments, assessing relative locations between the flight-restricted region and the UAV may include calculating a distance between the flight-restricted region and the UAV. For example, if a UAV 120A is at a first location, the distance d1 between the UAV and the flight-restricted region 110 may be calculated. If the UAV 120B is at a second location, the distance d2 between the UAV and the flight-restricted region may be calculated. In another example, if the UAV 120C is at a third location, the distance d3 between the UAV and the flight-restricted region may be calculated. In some instances, only the distances between the UAV and the flight-restricted region may be located

and/or calculated. In other examples, other information, such as direction or bearing between the UAV and flight-restricted region may be calculated. For example, the relative cardinal direction (e.g., north, west, south, east) between the UAV and flight-restricted region, or angular direction (e.g., angular between) between the UAV and flight-restricted region may be calculated. Relative velocities and/or acceleration between the UAV and flight-restricted region and related directions may or may not be calculated.

[0074] The distance may be calculated periodically or continuously while the UAV is in flight. The distance may be calculated in response to a detected event (e.g., receiving a GPS signal after not having received the GPS signal for a period of time prior). As the location of the UAV is updated, the distance to the flight-restricted region may also be recalculated.

[0075] The distance between a UAV 120A, 120B, 120C and a flight-restricted region 110 may be used to determine whether to take a flight response measure and/or which type of flight response measure to take. Examples of flight response measures that may be taken by a UAV may include automatically landing the UAV immediately, providing a time period for an operator of the UAV to land the UAV on a surface after which the UAV will automatically land if the operator has not already landed the UAV, provide an alert to an operator of the unmanned aerial vehicle that the unmanned aerial vehicle is near the flight-restricted region, automatically take evasive action by adjusting the flight path of the UAV, or any other flight response measure.

[0076] In one example, it may be determined whether the distance d1 falls within a distance threshold value. If the distance exceeds the distance threshold value, then no flight response measure may be needed and a user may be able to operate and control the UAV in a normal manner. In some instances, the user may control the flight of the UAV by providing real-time instructions to the UAV from an external device, such as a remote terminal. In other instances, the user may control flight of the UAV by providing instructions ahead of time (e.g., flight plan or path) that may be followed by the UAV. If the distance d1 falls beneath the distance threshold value, then a flight response measure may be taken. The flight response measure may affect operation of the UAV. The flight response measure may take control of the UAV away from the user, may provide a user limited time to take corrective action before taking control of the UAV away from the user, and/or may provide an alert or information to the UAV.

[0077] The distance may be calculated between coordinates representative of the UAV and the flight-restricted region. A flight response measure may be taken based on the calculated distance. The flight response measure may be determined by the distance without taking direction or any other information into account. Alternatively, other information, such as direction may be taken into

account. In one example, a UAV at a first position 120B may be a distance d2 from the flight-restricted region. A UAV at a second position 120C may be a distance d3 from the flight-restricted region. The distance d2 and d3 may be substantially the same. However, the UAVs 120B, 120C may be at different directions relative to the flight-restricted region. In some instances, the flight response measure, if any, may be the same for the UAVs based solely on the distance and without regard to the directions. Alternatively, the directions or other conditions may be considered and different flight response measures may possibly be taken. In one example, a flight-restricted region may be provided over an area 130 or space. This area or space may include portions that are or are not equidistant from coordinates representative of the flight-restricted region 110. In some instances, if flight-restricted region extends further to the east, even if d3 is the same as d2, different flight response measures may or may not be taken. Distances may be calculated between the UAV had flight-restricted region coordinates. Alternatively, distance from the UAV to the closest boundary of the flight-restricted region may be considered.

[0078] In some examples, a single distance threshold value may be provided. Distances exceeding the distance threshold value may permit regular operation of the UAV while distance within the distance threshold value may cause a flight response measure to be taken. In other examples, multiple distance threshold values may be provided. Different flight response measures may be selected based on which distance threshold values that a UAV may fall within. Depending on the distance between the UAV and the flight-restricted region, different flight response measures may be taken.

[0079] In one example, a distance d2 may be calculated between a UAV 120B and the fight-restricted region 110. If the distance falls within a first distance threshold, a first flight response measure may be taken. If the distance falls within a second distance threshold, a second flight response measure may be taken. In some instances, if the second distance threshold may be greater than the first distance threshold. If the distance meets both distance thresholds, both the first flight response measure and the second flight response measure may be taken. Alternatively, if the distance falls within the second distance threshold but outside the first distance threshold, the second flight response measure is taken without taking the first flight response measure, and if the distance falls within the first distance threshold, the first flight response measure is taken without taking the second flight response measure. Any number of distance thresholds and/or corresponding flight response measures may be provided. For example, a third distance threshold may be provided. The third distance threshold may be greater than the first and/or second distance thresholds. A third flight response measure may be taken if the distance falls within the third distance threshold. The

third flight response measure may be taken in conjunction with other flight response measures, such as the first and second flight response measures if the first and second distance thresholds are also met respectively. Alternatively, the third flight response measure may be taken without taking the first and second flight response measures.

[0080] Distance thresholds may have any value. For example, the distance thresholds may be on the order of meters, tens of meters, hundreds of meters, or thousands of meters. The distance thresholds may be about 0.1 miles, 0.5 miles, 1 mile, 2 miles, 2.5 miles, 3 miles, 3.5 miles, 4 miles, 4.5 miles, 5 miles, 5.5 miles, 6 miles, 6.5 miles, 7 miles, 7.5 miles, 8 miles, 8.5 miles, 9 miles, 9.5 miles, 10 miles, 11 miles, 12 miles, 13 miles, 14 miles, 15 miles, 17 miles, 20 miles, 30 miles, 40 miles, 50 miles, 75 miles, or 100 miles. The distance threshold may optionally match a regulation for a flight-restricted region (e.g., if FAA regulations did not allow a UAV to fly within X miles of an airport, the distance threshold may optionally be X miles), may be greater than the regulation for the flight-restricted region (e.g., the distance threshold may be greater than X miles), or may be less than the regulation for the flight-restricted region (e.g., the distance threshold may be less than X miles). The distance threshold may be greater than the regulation by any distance value (e.g., may be X + 0.5 miles, X + 1 mile, X + 2 miles, etc). In other implementations, the distance threshold may be less than the regulation by any distance value (e.g., may be X – 0.5 miles, X – 1 mile, X – 2 miles, etc.).

[0081] A UAV location may be determined while the UAV is in flight. In some instances, the UAV location may be determined while the UAV is not in flight. For instance, the UAV location may be determined while the UAV is resting on a surface. The UAV location may be assessed when the UAV is turned on, and prior to taking off from the surface. The distance between the UAV and the flight-restricted region may be assessed while the UAV is on a surface (e.g., prior to taking off / after landing). If the distance falls beneath a distance threshold value, the UAV may refuse to take off. For example, if the UAV is within 4.5 miles of an airport, the UAV may refuse to take off. In another example if the UAV is within 5 miles of an airport, the UAV may refuse to take off. Any distance threshold value, such as those described elsewhere herein may be used. In some instances, multiple distance threshold values may be provided. Depending on the distance threshold value, the UAV may have different take-off measures. For example, if the UAV falls beneath a first distance threshold, the UAV may not be able to take off. If the UAV falls within a second distance threshold, the UAV may be able to take off, but may only have a very limited period of time for flight. In another example, if the UAV falls within a second distance threshold, the UAV may be able to take off but may only be able to fly away from the flight-restricted region (e.g., increase the distance

between the UAV and the flight-restricted region). In another example if the UAV falls beneath a second distance threshold or a third distance threshold, the UAV may provide an alert to the operator of the UAV that the UAV is near a flight-restricted region, while permitting the UAV to take off.

[0082] FIG. 2 shows an example of a plurality of flight-restricted region proximity zones 220A, 220B, 220C, in accordance with an embodiment of the invention. A flight-restricted region 210 may be provided. The location of the flight-restricted region may be represented by a set of coordinates (i.e., a point), area, or space. One or more flight-restricted proximity zones may be provided around the flight-restricted region.

[0083] In one example, the flight-restricted region 210 may be an airport. Any description herein of an airport may apply to any other type of flight-restricted region, or vice versa. A first flight-restricted proximity zone 220A may be provided, with the airport therein. In one example, the first flight-restricted proximity zone may include anything within a first radius of the airport. For example, the first flight-restricted proximity zone may include anything within 4.5 miles of the airport. The first flight-restricted proximity zone may have a substantially circular shape, including anything within the first radius of the airport. The flight-restricted proximity zone may have any shape. If a UAV is located within the first flight-restricted proximity zone, a first flight response measure may be taken. For example, if the UAV is within 4.5 miles of the airport, the UAV may automatically land. The UAV may automatically land without any input from an operator of the UAV, or may incorporate input from the operator of the UAV. The UAV may automatically start decreasing in altitude. The UAV may decrease in altitude at a predetermined rate, or may incorporate location data in determining the rate at which to land. The UAV may find a desirable spot to land, or may immediately land at any location. The UAV may or may not take input from an operator of the UAV into account when finding a location to land. The first flight response measure may be a software measure to prevent users from being able to fly near an airport. An immediate landing sequence may be automatically initiated when the UAV is in the first flight-restricted proximity zone.

[0084] A second flight-restricted proximity zone 220B may be provided around an airport. The second flight-restricted proximity zone may include anything within a second radius of the airport. The second radius may be greater than the first radius. For example, the second flight-restricted proximity zone may include anything within 5 miles of the airport. In another example, the second flight-restricted proximity zone may include anything within 5 miles of the airport and also outside the first radius (e.g., 4.5 miles) of the airport. The second flight-restricted proximity zone may have a substantially circular shape including anything within the second radius of the airport, or a

substantially ring shape including anything within the second radius of the airport and outside the first radius of the airport. If a UAV is located within the second flight-restricted proximity zone, a second flight response measure may be taken. For example, if the UAV is within 5 miles of the airport and outside 4.5 miles of the airport, the UAV may prompt an operator of the UAV to land within a predetermined time period (e.g., 1 hour, 30 minutes, 14 minutes, 10 minutes, 5 minutes, 3 minutes, 2 minutes, 1 minute, 45 seconds, 30 seconds, 15 seconds, 10 seconds, or five seconds). If the UAV is not landed within the predetermined time period, the UAV may automatically land.

[0085] When the UAV is within the second flight-restricted proximity zone, the UAV may prompt the user (e.g., via mobile application, flight status indicator, audio indicator, or other indicator) to land within the predetermined time period (e.g., 1 minute). Within the time period, the operator of the UAV may provide instructions to navigate the UAV to a desired landing surface and/or provide manual landing instructions. After the predetermined time period has been exceeded, the UAV may automatically land without any input from an operator of the UAV, or may incorporate input from the operator of the UAV. The UAV may automatically start decreasing in altitude after the predetermined time period. The UAV may decrease in altitude at a predetermined rate, or may incorporate location data in determining the rate at which to land. The UAV may find a desirable spot to land, or may immediately land at any location. The UAV may or may not take input from an operator of the UAV into account when finding a location to land. The second flight response measure may be a software measure to prevent users from being able to fly near an airport. A time-delayed landing sequence may be automatically initiated when the UAV is in the second flight-restricted proximity zone. If the UAV is able to fly outside the second flight-restricted proximity zone within the designated time period, then the automated landing sequence may not come into effect and the operator may be able to resume normal flight controls of the UAV. The designated time period may act as a grace period for an operator to land the UAV or exit the area near the airport.

[0086] A third flight-restricted proximity zone 220C may be provided around an airport. The third flight-restricted proximity zone may include anything within a third radius of the airport. The third radius may be greater than the first radius and/or second radius. For example, the third flight-restricted proximity zone may include anything within 5.5 miles of the airport. In another example, the third flight-restricted proximity zone may include anything within 5.5 miles of the airport and also outside the second radius (e.g., 5 miles) of the airport. The third flight-restricted proximity zone may have a substantially circular shape including anything within the third radius of the airport, or a substantially ring shape including anything within the third radius of the airport and outside the

second radius of the airport. If a UAV is located within the third flight-restricted proximity zone, a third flight response measure may be taken. For example, if the UAV is within 5.5 miles of the airport and outside 5 miles of the airport, the UAV may send an alert to an operator of the UAV. Alternatively, if the UAV is anywhere within 5.5 miles of the airport, an alert may be provided.

[0087] Any numerical value used to describe the dimension of the first, second, and/or third flight-restricted proximity zones are provided by way of example only and may be interchanged for any other distance threshold value or dimension as described elsewhere herein.

[0088] When the UAV is within the third flight-restricted proximity zone, the UAV may alert the user (e.g., via mobile application, flight status indicator, audio indicator, or other indicator) regarding the close proximity to the flight-restricted region. In some examples, an alert can include a visual alert, audio alert, or tactile alert via an external device. The external device may be a mobile device (e.g., tablet, smartphone, remote controller) or a stationary device (e.g., computer). In other examples the alert may be provided via the UAV itself. The alert may include a flash of light, text, image and/or video information, a beep or tone, audio voice or information, vibration, and/or other type of alert. For example, a mobile device may vibrate to indicate an alert. In another example, the UAV may flash light and/or emit a noise to indicate the alert. Such alerts may be provided in combination with other flight response measures or alone.

[0089] In one example, the location of the UAV relative to the flight-restricted region may be assessed. If the UAV falls within the first flight-restricted proximity zone, the UAV may not be able to take off. For example, if the UAV is within 4.5 miles of the flight-restricted region (e.g., airport), the UAV may not be able to take off. Information about why the UAV is not able to take off may or may not be conveyed to the user. If the UAV falls within the second flight-restricted proximity zone, the UAV may or may not be able to take off. For example, if the UAV is within 5 miles of the airport, the UAV may not be able to take off. Alternatively, the UAV may be able to take off but have restricted flight capabilities. For example, the UAV may only be able to fly away from the flight-restricted region, may only be able to fly to a particular altitude, or have a limited period of time for which the UAV may fly. If the UAV falls within the third flight-restricted proximity zone, the UAV may or may not be able to take off. For example, if the UAV is within 5.5 miles of the airport, the UAV may provide an alert to the user about the proximity to the airport. Distance, bearing, airport name, type of facility, or other information may be provided in the alert to the user. The alert may be provided to the user when the UAV is within 5.5 miles of the airport but outside 5 miles. In another example, the alert may be provided if the UAV is within 5.5 miles, and may be

combined with other take-off responses or provided on its own. This may provide a safety measure that may prevent the UAV from flying in a flight-restricted region.

[0090] In some instances, flight response measures closer to a flight-restricted region may provide more rapid response by the UAV to land. This may reduce user autonomy in controlling the UAV flight but may provide greater compliance with regulations and provide greater safety measures. Flight response measures further from the flight-restricted region may permit a user to have more control over the UAV. This may provide increased user autonomy in controlling the UAV and allow the user to take action to prevent the UAV from entering restricted airspace. The distance can be used to measure risk or likelihood of the UAV falling within restricted airspace, and based on the measure of risk take an appropriate level of action.

[0091] FIG. 3 provides a schematic illustration of an unmanned aerial vehicle 300 in communication with an external device, 310 in accordance with an embodiment of the invention.

[0092] The UAV 300 may include one or more propulsion units that may control position of the UAV. The propulsion units may control the location of the UAV (e.g., with respect to up to three directions, such as latitude, longitude, altitude) and/or orientation of the UAV (e.g., with respect to up to three axes of rotation, such as pitch, yaw, roll). The propulsion units may permit the UAV to maintain or change position. The propulsion units may include one or more rotor blades that may rotate to generate lift for the UAV. The propulsion units may be driven by one or more actuators 350, such as one or more motors. In some instances, a single motor may drive a single propulsion unit. In other examples, a single motor may drive multiple propulsion units, or a single propulsion unit may be driven by multiple motors.

[0093] Operation of one or more actuator 350 of the UAV 300 may be controlled by a flight controller 320. The flight controller may include one or more processors and/or memory units. The memory units may include non-transitory computer readable media, which may comprise code, logic, or instructions for performing one or more steps. The processors may be capable of performing one or more steps described herein. The processors may provide the steps in accordance with the non-transitory computer readable media. The processors may perform location-based calculations and/or utilize algorithms to generate a flight command for the UAV.

[0094] The flight controller 320 may receive information from a receiver 330 and/or locator 340. The receiver 330 may communicate with an external device 310. The external device may be a remote terminal. The external device may be a control apparatus that may provide one or more sets of instructions for controlling flight of the UAV. A user may interact with the external device to issue instructions to control flight of the UAV. The external device may have a user interface that

may accept a user input that may result in controlling flight of the UAV. Examples of external devices are described in greater detail elsewhere herein.

[0095] The external device 310 may communicate with the receiver 330 via a wireless connection. The wireless communication may occur directly between the external device and the receiver and/or may occur over a network, or other forms of indirect communication. In some embodiments, the wireless communications may be proximity-based communications. For example, the external device may be within a predetermined distance from the UAV in order to control operation of the UAV. Alternatively, the external device need not be within a predetermined proximity of the UAV. Communications may occur directly, over a local area network (LAN), wide area network (WAN) such as the Internet, cloud environment, telecommunications network (e.g., 3G, 4G), WiFi, Bluetooth, radiofrequency (RF), infrared (IR), or any other communications technique. In alternate embodiments, the communications between the external device and the receiver may occur via a wired connection.

[0096] Communications between the external device and the UAV may be two-way communications and/or one-way communications. For example, the external device may provide instructions to the UAV that may control the flight of the UAV. The external device may operate other functions of the UAV, such as one or more settings of the UAV, one or more sensors, operation of one or more payloads, operation of a carrier of the payload, or any other operations of the UAV. The UAV may provide data to the external device. The data may include information about the location of the UAV, data sensed by one or more sensors of the UAV, images captured by a payload of the UAV, or other data from the UAV. The instructions from the external device and/or data from the UAV may be transmitted simultaneously or sequentially. They may be transferred over the same communication channel or different communication channels. In some instances, instructions from the external device may be conveyed to the flight controller. The flight controller may utilize the flight control instructions from the external device in generating a command signal to one or more actuators of the UAV.

[0097] The UAV may also include a locator 340. The locator may be used to determine a location of the UAV. The location may include a latitude, longitude, and/or altitude of the aerial vehicle. The location of the UAV may be determined relative to a fixed reference frame (e.g., geographic coordinates). The location of the UAV may be determined relative to a flight-restricted region. The location of the flight-restricted region relative to the fixed reference frame may be used to determine the relative locations between the UAV and the flight-restricted region. The locator may use any technique or later developed in the art to determine the location of the UAV. For example, the

locator may receive a signal from an external location unit 345. In one example, the locator may be a global positioning system (GPS) receiver and the external location unit may be a GPS satellite. In another example, the locator may be an inertial measurement unit (IMU), ultrasonic sensor, visual sensors (e.g., cameras), or communication unit communicating with an external location unit. The external location unit may include a satellite, tower, or other structure that may be capable of providing location information. One or more external location units may utilize one or more triangulation techniques in order to provide a location of the UAV. In some instances, the external location unit may be the external device 310 or other remote control device. The location of the external device may be used as the location of the UAV or to determine the location of the UAV. The location of the external device may be determined using a location unit within the external device and/or one or more base stations capable of determining the location of the external device. The location unit of the external device may use any of the techniques described herein including, but not limited to, GPS, laser, ultrasonic, visual, inertial, infrared, or other location sensing techniques. The location of an external device may be determined using any technique, such as GPS, laser ultrasonic, visual, inertial, infrared, triangulation, base stations, towers, relays, or any other technique.

[0098] In alternate embodiments, an external device or external location unit may not be needed to determine the location of the UAV. For instance, the IMU may be used to determine the location of the UAV. An IMU can include one or more accelerometers, one or more gyroscopes, one or more magnetometers, or suitable combinations thereof. For example, the IMU can include up to three orthogonal accelerometers to measure linear acceleration of the movable object along up to three axes of translation, and up to three orthogonal gyroscopes to measure the angular acceleration about up to three axes of rotation. The IMU can be rigidly coupled to the aerial vehicle such that the motion of the aerial vehicle corresponds to motion of the IMU.Alternatively the IMU can be permitted to move relative to the aerial vehicle with respect to up to six degrees of freedom. The IMU can be directly mounted onto the aerial vehicle, or coupled to a support structure mounted onto the aerial vehicle. The IMU may be provided exterior to or within a housing of the movable object. The IMU may be permanently or removably attached to the movable object. In some embodiments, the IMU can be an element of a payload of the aerial vehicle. The IMU can provide a signal indicative of the motion of the aerial vehicle, such as a position, orientation, velocity, and/or acceleration of the aerial vehicle (e.g., with respect to one, two, or three axes of translation, and/or one, two, or three axes of rotation). For example, the IMU can sense a signal representative of the acceleration of the aerial vehicle, and the signal can be integrated once to provide velocity

information, and twice to provide location and/or orientation information. The IMU may be able to determine the acceleration, velocity, and/or location/orientation of the aerial vehicle without interacting with any external environmental factors or receiving any signals from outside the aerial vehicle. The IMU may alternatively be used in conjunction with other location determining devices, such as GPS, visual sensors, ultrasonic sensors, or communication units.

[0099] The location determined by the locator 340 may be used by the flight controller 320 in the generation of one or more command signal to be provided to the actuator. For instance, the location of the UAV, which may be determined based on the locator information, may be used to determine a flight response measure to be taken by the UAV. The location of the UAV may be used to calculate a distance between the UAV and the flight-restricted region. The flight controller may calculate the distance with aid of a processor. The flight controller may determine which flight response measure, if any, needs to be taken by the UAV. The flight controller may determine the command signal to the actuator(s), which may control the flight of the UAV.

[00100] The UAV's flight controller may calculate its own current location via the locator (e.g., GPS receiver) and the distance to the flight-restricted region (e.g., center of the airport location or other coordinates representative of the airport location). Any distance calculation known or later developed in the art may be used.

[00101] In one embodiment, the distance between the two points (i.e., UAV and flight-restricted region) may be calculated using the following technique. An Earth-centered, Earth-fixed (ECEF) coordinate system may be provided. The ECEF coordinate system may be a Cartesian coordinate system. It may represents positions as X, Y, and Z coordinates. Local East, North, Up (ENU) coordinates are formed from a plane tangent to the Earth's surface fixed to a specific location and hence it is sometimes known as a "local tangent" or "local geodetic" plane. The east axis is labeled x, the north y and the up z.

[00102] For navigation calculations, the location data (e.g., GPS location data) may be converted into the ENU coordinate system. The conversion may contains two steps:

1) The data can be converted from a geodetic system to ECEF.

$$X = (N(\phi) + h)cos\phi cos\lambda$$

$$Y = (N(\phi) + h)cos\phi sin\lambda$$

$$Z = (N(\phi)(1 - e^2) + h)sin\phi$$

where

$$N(\phi) = \frac{a}{\sqrt{1 - e^2 sin^2\phi}}$$

a and *e* are the semi-major axis and the first numerical eccentricity of the ellipsoid respectively.

N(Φ) is called the Normal and is the distance from the surface to the Z-axis along the ellipsoid normal.

2) The data in ECEF system may then be converted to the ENU coordinate system.

To transform data from the ECEF to the ENU system, the local reference may be chosen to the location when the UAV just receives a mission is sent to the UAV.

$$\begin{bmatrix} x \\ y \\ z \end{bmatrix} = \begin{bmatrix} -sin\lambda_r & cos\lambda_r & 0 \\ -sin\phi_r cos\lambda_r & -sin\phi_r sin\lambda_r & cos\phi_r \\ cos\phi_r cos\lambda_r & cos\phi_r sin\lambda_r & sin\phi_r \end{bmatrix} \begin{bmatrix} X - X_r \\ Y - Y_r \\ Z - Z_r \end{bmatrix}$$

[00103] The calculations may employ the Haversine Formula, which may give that the distance between two points A and B on the Earth surface is:

$$d_{A-B} = 2arcsin\left(\sqrt{sin^2\left(\frac{\Delta\phi}{2}\right) + cos\phi_A cos\lambda_B sin^2\left(\frac{\Delta\lambda}{2}\right)}\right) R_e$$

Where $\Delta\phi = \phi_A - \phi_B$, $\Delta\lambda = \lambda_A - \lambda_B$, and $R_e$is the radius of the Earth.

[00104] If the UAV is continuously calculating the current position and the distance to thousands of potential flight-restricted regions, such as airports, a large amount of computational power may be used. This may result in slowing down operations of one or more processors of the UAV. One or more techniques to simplify and/or speed up the calculations may be employed.

[00105] In one example, the relative location and/or distance between the UAV and the flight-restricted region may be calculated at specified time intervals. For example, the calculations may occur every hour, every half hour, every 15 minutes, every 10 minutes, every 5 minutes, every 3 minutes, every 2 minutes, every minute, every 45 seconds, every 30 seconds, every 15 seconds, every 12 seconds, every 10 seconds, every 7 seconds, every 5 seconds, every 3 seconds, every second, every 0.5 seconds, or every 0.1 second. The calculations may be made between the UAV and one or more flight-restricted regions (e.g., airports).

[00106] In another example, every time the aircraft's location is first obtained (e.g., via GPS receiver), the relatively distant airports may be filtered out. For example, airports that are far away need not pose any concern for the UAV. In one example, flight-restricted regions outside a distance threshold may be ignored. For example, flight-restricted regions outside a flight range of a UAV may be ignored. For example, if the UAV is capable of flying 100 miles in a single flight, flight-restricted regions, such as airports, that are greater than 100 miles away when the UAV is turned on

may be ignored. In some instances, the distance threshold may be selected based on the type of UAV or capability of UAV flight.

[00107] In some examples, the distance threshold may be about 1000 miles, 750 miles, 500 miles, 300 miles, 250 miles, 200 miles, 150 miles, 120 miles, 100 miles, 80 miles, 70 miles, 60 miles, 50 miles, 40 miles, 30 miles, 20 miles, or 10 miles. Removing remote flight-restricted regions from consideration may leave only a few nearby coordinates, every time calculate the distance to these points. For example, only several airports or other types of flight-restricted regions may be within the distance threshold from the UAV. For example, when a UAV is first turned on, only several airports may fall within a distance of interest to the UAV. The distance of the UAV relative to these airports may be calculated. They may be calculated continuously in real-time, or may be updated periodically at time intervals in response to detected conditions. By reducing the number of flight-restricted regions of interest, less computational power may be employed, and calculations may occur more quickly and free up other operations of the UAV.

[00108] FIG. 4 provides an example of an unmanned aerial vehicle using a global positioning system (GPS) to determine the location of the unmanned aerial vehicle, in accordance with an embodiment of the invention. The UAV may have a GPS module. The GPS module may include a GPS receiver 440 and/or a GPS antenna 442. The GPS antenna may pick up one or more signals from a GPS satellite or other structure and convey the captured information to the GPS receiver. The GPS module may also include a microprocessor 425. The microprocessor may receive information from the GPS receiver. The microprocessor may convey the data from the GPS receiver in a raw form or may process or analyze it. The microprocessor may perform calculations using the GPS receiver data and/or may provide location information based on the calculations.

[00109] The GPS module may be operably connected to a flight controller 420. The flight controller of a UAV may generate command signals to be provided to one or more actuators of the UAV and thereby control flight of the UAV. Any connection may be provided between the GPS module and the flight controller. For example, a communication bus, such as a controller area network (CAN) bus may be used to connect the GPS module and the flight controller. The GPS receiver may receive data via the GPS antenna, and may communicate data to the microprocessor, which may communicate data to a flight controller via the communication bus.

[00110] The UAV may find a GPS signal prior to taking off. In some instances, once the UAV is turned on, the UAV may search for the GPS signal. If the GPS signal is found, the UAV may be able to determine its location prior to taking off. If the GPS signal is found before the UAV has taken off, it can determine its distance relative to one or more flight-restricted region. If the distance

falls beneath a distance threshold value (e.g., is within a predetermined radius of the flight-restricted region) the UAV may refuse to take off. For example if the UAV is within a 5 mile range of an airport, the UAV may refuse to take off.

[00111] In some embodiments, if the UAV is unable to find the GPS signal prior to takeoff, it may refuse to takeoff. Alternatively, the UAV may take off, even if it unable to find the GPS signal prior to takeoff. In another example, if the flight controller cannot detect the presence of the GPS module (which may include the GPS receiver, GPS antenna and/or microprocessor), it may refuse to take off. Inability to obtain the GPS signal and inability to detect the presence of the GPS module may be treated as different situations. For example, the inability to obtain the GPS signal may not prevent the UAV from taking off if the GPS module is detected. This may be because a GPS signal may be received after the UAV has taken off. In some instances, increasing the altitude of the UAV or having fewer obstructions around the UAV may make it easier to receive a GPS signal, and as long as the module is detected and operational. If the UAV finds a GPS signal during flight, it can obtain its location and take emergency measures. Thus, it may be desirable to permit the UAV to take off when the GPS module is detected, regardless of whether a GPS signals detected prior to take off. Alternatively, the UAV may take off when the GPS signal is detected and may not take off when the GPS signal is not detected.

[00112] Some embodiments may rely on the aircraft GPS module to determine the location of the UAV. If the GPS module takes too long to successfully determine position, this will affect the capabilities of the flight. UAV flight functionality may be limited if the GPS module is inoperational or a GPS signal can not be detected. In some instances, other systems and methods may be used to determine a location of the UAV. Other location techniques may be used in combination with GPS or in the place of GPS.

[00113] FIG. 5 is an example of an unmanned aerial vehicle in communication with a mobile device, in accordance with an embodiment of the invention. The UAV may have a GPS module. The GPS module may include a GPS receiver 540 and/or a GPS antenna 542. The GPS antenna may pick up one or more signals from a GPS satellite or other structure and convey the captured information to the GPS receiver. The GPS module may also include a microprocessor 525. The microprocessor may receive information from the GPS receiver. The GPS module may be operably connected to a flight controller 520.

[00114] In some instances, the flight controller 520 may be in communication with a communication module. In one example, the communication module may be a wireless module. The wireless module may be a wireless direct module 560 which may permit direct wireless

communications with an external device 570. The external device may optionally be a mobile device, such as a cell phone, smartphone, watch, tablet, remote controller, laptop, or other device. The external device may be a stationary device, e.g., personal computer, server computer, base station, tower, or other structure. The external device may be a wearable device, such as a helmet, hat, glasses, earpiece, gloves, pendant, watch, wristband, armband, legband, vest, jacket, shoe, or any other type of wearable device, such as those described elsewhere herein. Any description herein of a mobile device may also encompass or be applied to a stationary device or any other type of external device and vice versa. The external device may be another UAV. The external device may or may not have an antenna to aid in communications. For example, the external device may have a component that may aid in wireless communications. For example, direct wireless communications may include WiFi, radio communications, Bluetooth, IR communications, or other types of direct communications.

[00115] The communication module may be provided on-board the UAV. The communication module may permit one-way or two-way communications with the mobile device. The mobile device may be a remote control terminal, as described elsewhere herein. For example, the mobile device may be a smartphone that may be used to control operation of the UAV. The smartphone may receive inputs from a user that may be used to control flight of the UAV. In some instances, the mobile device may receive data from the UAV. For example, the mobile device may include a screen that may display images captured by the UAV. The mobile device may have a display that shows images captured by a camera on the UAV in real-time.

[00116] For example, one or more mobile devices570may be connected to the UAV via a wireless connection (e.g., WiFi) to be able to receive data from the UAV in real-time. For example, the mobile device may show images from the UAV in real-time. In some instances, the mobile device (e.g., mobile phone) can be connected to the UAV and may be in close proximity to the UAV. For example, the mobile device may provide one or more control signals to the UAV. The mobile device may or may not need to be in close proximity to the UAV to send the one or more control signals. The control signals may be provided in real-time. The user may be actively controlling flight of the UAV and may provide flight control signals to the UAV. The mobile device may or may not need to be in close proximity to the UAV to receive data from the UAV. The data may be provided in real-time. One or more image capture device of the UAV or other types of sensors may capture data, and the data may be transmitted to the mobile device in real-time. In some instances, the mobile device and UAV may be in close proximity, such as within about 10 miles, 8 miles, 5

miles, 4 miles, 3 miles, 2 miles, 1.5 miles, 1 mile, 0.75 miles, 0.5 miles, 0.3 miles, 0.2 miles, 0.1 miles, 100 yards, 50 yards, 20 yards, or 10 yards.

[00117] A location of the mobile device 570 may be determined. The mobile device location results can be transmitted to the UAV, because during flight, the mobile device and UAV distance will typically not be too far. The mobile device location may be used by the UAV as the UAV location. This may be useful when the GPS module is inoperational or not receiving a GPS signal. The mobile device may function as a location unit. The UAV can perform assessments using the mobile device location results. For example, if it is determined that the mobile device is at a particular set of coordinates or a certain distance from a flight-restricted region, that data may be used by the flight controller. The location of the mobile device may be used as the UAV location, and the UAV flight controller may perform calculations using the mobile device location as the UAV location. Thus, the calculated distance between the UAV and the flight-restricted region may be the distance between the mobile device and the flight-restricted region. This may be a viable option when the mobile device is typically close to the UAV.

[00118] The mobile device may be used to determine the location of the UAV in addition to or instead of using a GPS module. In some instances, the UAV may not have a GPS module and may rely on the mobile device for determining the UAV location. In other instances, the UAV may have a GPS module, but may rely on the mobile device when unable to detect a GPS signal using the GPS module. Other location determining for the UAV may be used in combination of instead of the techniques described herein.

[00119] FIG. 6 is an example of an unmanned aerial vehicle in communication with one or more mobile devices, in accordance with an embodiment of the invention. The UAV may have a GPS module. The GPS module may include a GPS receiver 640 and/or a GPS antenna 642. The GPS antenna may pick up one or more signals from a GPS satellite or other structure and convey the captured information to the GPS receiver. The GPS module may also include a microprocessor 625. The microprocessor may receive information from the GPS receiver. The GPS module may be operably connected to a flight controller 620.

[00120] In some instances, the flight controller 620 may be in communication with a communication module. In one example, the communication module may be a wireless module. The wireless module may be a wireless direct module 560 which may permit direct wireless communications with an external mobile device 570. For example, direct wireless communications may include WiFi, radio communications, Bluetooth, IR communications, or other types of direct communications.

[00121] Alternatively, the wireless module may be a wireless indirect module 580 which may permit indirect wireless communications with an external mobile device 590. Indirect wireless communication may occur over a network, such as a telecommunications/mobile network. The network may be the type of network that requires insertion of a SIM card to permit communications. The network may utilize 3G/4G or other similar types of communications.The UAV can use a mobile base station to determine the location of the mobile device. Alternatively, the mobile base station location may be used as the mobile device location and/or the UAV location. For example, the mobile base station may be a mobile phone tower, or other type of static or moving structure. Although this technique may not be precise as GPS, this error can be very, very small relative to distance thresholds described (e.g., 4.5 miles, 5 miles, 5.5 miles). In some implementations, the UAV can use the Internet to connect to the user's mobile device, to obtain the mobile device's base station location. The UAV may communicate with the mobile device which may communicate with a base station, or the UAV may communicate directly with the base station.

[00122] The UAV may have both a wireless direct module and a wireless indirect module. Alternatively, the UAV may have only a wireless direct module, or only a wireless indirect module. The UAV may or may not have a GPS module in combination with the wireless module(s). In some instances, when multiple location units are provided, the UAV may have a preference of order. For example, if the UAV has a GPS module and the GPS module is receiving a signal, the UAV may preferably use the GPS signal to provide the location of the UAV without using communication modules. If the GPS module is not receiving a signal, the UAV may rely on a wireless direct or indirect module. The UAV may optionally first try a wireless direct module, but if unable to get a location may try to use the wireless indirect module to get a location. The UAV may have a preference for a location technique that has a higher likelihood of providing a more precise and/or accurate location of the UAV. Alternatively, other factors may be provided, such as location technique that uses less power or is more reliable (less likely to fail) may have a higher preference. In another example, the UAV may gather location data from multiple sources and may compare the data. For example, the UAV may use GPS data in conjunction with data from a communication module using the location of the mobile device or base station. The data may or may not be averaged or other calculations may be performed to determine the location of the UAV. Simultaneous location data gathering may occur.

[00123] FIG. 7 provides an example of unmanned aerial vehicle700 with an on-board memory unit750, in accordance with an aspect of the invention. The UAV may have a flight controller 720 which may generate one or more command signals to effect flight of the UAV. A location unit

740may be provided. The location unit may provide data indicative of a location of the UAV. The location unit may be a GPS receiver, communication module receiving location data from an external device, ultrasonic sensor, visual sensor, IR sensor, inertial sensor, or any other type of device that may be useful for determining the location of the UAV. The flight controller may use the location of the UAV to generate the flight command signal.

[00124] The memory unit 750 may include data about location of one or more flight-restricted regions. For example, one or more on-board database or memory 755A may be provided, storing lists of flight-restricted regions and/or their location. In one example, coordinates of various flight-restricted regions, such as airports, may be stored in the on-board memory of the UAV. In one example, the memory storage device may store latitude and longitude coordinates of many airports. All airports in the world, continent, country, or region of the world may be stored in the memory unit. Other types of flight-restricted regions may be stored. The coordinates may include only latitude and longitude coordinates, may further include altitude coordinates, or may include boundaries of flight-restricted regions. Thus information about flight-restricted regions, such as locations and/or associated rules, may be pre-programmed onto the UAV.In one example, every airport's latitude and longitude coordinates may be respectively stored as a "double" data type. For instance, every airport's position may occupy 16 bytes.

[00125] The UAV may be able to access the on-board memory to determine the location of flight-restricted regions. This may be useful in situations where a communication of a UAV may be inoperable or may have trouble accessing an external source. For instance, some communication systems may be unreliable. In some instances, accessing on-board stored information may be more reliable and/or may require less power consumption. Accessing on-board stored information may also be faster than downloading the information in real-time.

[00126] In some instances, other data may be stored on-board the UAV. For example, databases and/or memory 755B may be provided about rules relating to the particular flight-restricted regions or different jurisdictions. For example, the memory may store information on-board about flight rules for different jurisdictions. For example, Country A may not permit a UAV to fly within 5 miles of an airport, while Country B may not permit a UAV to fly within 9 miles of an airport. In another example, Country A may not permit a UAV to fly within 3 miles of a school during school hours, while Country B has no restrictions on UAV flight near schools. In some instances, the rules may be specific to jurisdictions. In some instances the rules may be specific to flight-restricted regions, regardless of jurisdiction. For example, within Country A, Airport A may not permit UAV flight anywhere within 5 miles of the airport at all times, while Airport B may permit UAV flight

near the airport from 1:00-5:00 A.M. The rules may be stored on-board the UAV and may optionally be associated with the relevant jurisdictions and/or flight-restricted regions.

[00127] The flight controller 720 may access the on-board memory to calculate a distance between the UAV and a flight-restricted region. The flight controller may use information from the location unit 740 as the location of the UAV, and may use information from the on-board memory 750 for the flight-restricted region location. A calculation of the distance between the UAV and flight-restricted region may be made by the flight controller, with aid of a processor.

[00128] The flight controller 720 may access on-board memory to determine a flight response measure to take. For example, the UAV may access the on-board memory about different rules. The location of the UAV and/or the distance may be used to determine the flight response measure to be taken by the UAV in accordance with the relevant rules. For example, if the location of the UAV is determined to be within Country A, and Airport A is nearby, the flight controller may review the rules for Country A and Airport A in determining the flight response measure to take. This may affect the command signal generated and sent to one or more actuators of the UAV.

[00129] The on-board memory 750 of the UAV may be updated. For example, a mobile device in communication with the UAV may be used for updates. When the mobile device and UAV are connected the on-board memory may be updated. The mobile device and the UAV may be updated via a wireless connection, such as a direct or indirect wireless connection. In one example, the connection may be provided via WiFi or Bluetooth. The mobile device may be used to control flight of the UAV and/or receive data from the UAV. Information such as flight-restricted regions, or locations/rules associated with the flight-restricted regions may be updated. Such updates may occur while the mobile device interacting with the UAV. Such updates may occur when the mobile device first connects with the UAV, at periodic time intervals, when events are detected, or continuously in real-time.

[00130] In another example, a wired connection may be provided between the UAV and an external device for providing updates to on-board memory. For example, a USB port or similar port on the UAV may be used to connect to a personal computer (PC), and may use PC software to update. In another example, the external device may be a mobile device, or other type of external device. The updates may occur when the UAV first connects to the external device, at periodic time intervals while the wired connection remains, when events are detected, or continuously in real-time while the wired connection remains.

[00131] An additional example may permit the UAV to have a communication device for accessing the Internet or other network. Every time the UAV starts, it can automatically check whether the on-

board memory needs to be updated. For example, every time the UAV starts, it can automatically check whether information about flight-restricted regions needs to be updated. In some embodiments, the UAV only checks whether there are updates to be made upon being turned on. In other embodiments, the UAV may make checks periodically, upon detected events or commands, or continuously.

[00132] FIG. 8 shows an example of an unmanned aerial vehicle 810 in relation to multiple flight-restricted regions 820a, 820b, 820c, in accordance with an embodiment of the invention. For example, a UAV may be flying near several airports or other types of flight-restricted regions. The location of the flight-restricted regions may be stored on-board the UAV. Alternatively, the UAV may download or access the locations of the flight-restricted regions from off-board the UAV.

[00133] A location of the UAV may be compared with the location of the flight restricted regions. Respective distances d1, d2, d3 may be calculated. A flight response measure may be determined for the UAV with respect to the flight-restricted regions based on the distances. For example, the UAV 810 may be within a first radius of a first flight-restricted region 820A, which may cause the UAV to take a first flight response measure. The UAV may be within a second radius of a second flight-restricted region 820B, but may exceed the first radius. This may cause the UAV to take a second flight response measure.

[00134] In some instances, different jurisdictions may have different UAV no-fly provisions. For example, different countries may have different rules and/or some rules may be more complicated depending on jurisdiction, and may need to be accomplished step by step. Examples of jurisdictions may include, but are not limited to continents, unions, countries, states/provinces, counties, cities, towns, private property or land, or other types of jurisdictions.

[00135] The location of the UAV may be used to determine the jurisdiction within which the UAV is currently located and whole rules may apply. For example, GPS coordinates can be used to determine the country at which the UAV is located, and which laws apply. For example, Country A may prohibit flight of a UAV within 5 miles of an airport, whileCountry B may prohibit flight within 6 miles of an airport. Then after the aircraft obtains GPS coordinates, it can determine whether it is currently located within Country A or Country B. Based on this determination, it may assess whether the flight restrictions are in play5 miles or 6 miles, and may take a flight response measure accordingly.

[00136] For example, a boundary between jurisdictions 830 may be provided. The UAV may be determined to fall within Country A which is to the right of the boundary, based on the UAV location. Country B may be to the left of the boundary and may have different rules from Country

A. In one example, the location of the UAV may be determined using any of the location techniques described elsewhere herein. Coordinates of the UAV may be calculated. In some instances, an on-board memory of the UAV may include boundaries for different jurisdiction. For example, the UAV may be able to access on-board memory to determine which jurisdiction the UAV falls within, based on its location. In other examples, information about the different jurisdictions may be stored off-board. For example, the UAV may communicate externally to determine which jurisdiction into which the UAV falls.

[00137] Rules associated with various jurisdictions may be accessed from on-board memory of the UAV. Alternatively, the rules may be downloaded or accessed from a device or network outside the UAV. In one example, Country A and Country B may have different rules. For example, Country A, within which the UAV 810 is located, may not permit UAVs to fly within 10 miles of an airport. Country B may not permit UAVs to fly within 5 miles of an airport. In one example, a UAV may currently have a distance d2 9 miles from Airport B 820B. The UAV may have a distance d3 7 miles from Airport C 820C. Since the UAV is in Country A, the UAV may need to take measures in response to its 9 mile proximity to Airport B, which falls within the 10 mile threshold. However, if the UAV was in Country B, no flight response measures may be required. Since Airport B is located in Country B, no flight response measure may be required by the UAV, since it is beyond the 5 mile threshold applicable in Country B.

[00138] Thus, the UAV may be able to access information about the jurisdiction into which the UAV falls and/or applicable flight rules for the UAV. The no-fly rules that are applicable may be used in conjunction with the distance/location information to determine whether a flight response measure is needed and/or which flight response measure should be taken.

[00139] The systems, devices, and methods described herein can be applied to a wide variety of movable objects. As previously mentioned, any description herein of a UAV may apply to and be used for any movable object. Any description herein of a UAV may apply to any aerial vehicle. A movable object of the present invention can be configured to move within any suitable environment, such as in air (e.g., a fixed-wing aircraft, a rotary-wing aircraft, or an aircraft having neither fixed wings nor rotary wings), in water (e.g., a ship or a submarine), on ground (e.g., a motor vehicle, such as a car, truck, bus, van, motorcycle, bicycle; a movable structure or frame such as a stick, fishing pole; or a train), under the ground (e.g., a subway), in space (e.g., a spaceplane, a satellite, or a probe), or any combination of these environments. The movable object can be a vehicle, such as a vehicle described elsewhere herein. In some embodiments, the movable object can be carried by a

living subject, or take off from a living subject, such as a human or an animal. Suitable animals can include avines, canines, felines, equines, bovines, ovines, porcines, delphines, rodents, or insects.

[00140] The movable object may be capable of moving freely within the environment with respect to six degrees of freedom (e.g., three degrees of freedom in translation and three degrees of freedom in rotation). Alternatively, the movement of the movable object can be constrained with respect to one or more degrees of freedom, such as by a predetermined path, track, or orientation. The movement can be actuated by any suitable actuation mechanism, such as an engine or a motor. The actuation mechanism of the movable object can be powered by any suitable energy source, such as electrical energy, magnetic energy, solar energy, wind energy, gravitational energy, chemical energy, nuclear energy, or any suitable combination thereof. The movable object may be self-propelled via a propulsion system, as described elsewhere herein. The propulsion system may optionally run on an energy source, such as electrical energy, magnetic energy, solar energy, wind energy, gravitational energy, chemical energy, nuclear energy, or any suitable combination thereof. Alternatively, the movable object may be carried by a living being.

[00141] In some instances, the movable object can be a vehicle. Suitable vehicles may include water vehicles, aerial vehicles, space vehicles, or ground vehicles. For example, aerial vehicles may be fixed-wing aircraft (e.g., airplane, gliders), rotary-wing aircraft (e.g., helicopters, rotorcraft), aircraft having both fixed wings and rotary wings, or aircraft having neither (e.g., blimps, hot air balloons). A vehicle can be self-propelled, such as self-propelled through the air, on or in water, in space, or on or under the ground. A self-propelled vehicle can utilize a propulsion system, such as a propulsion system including one or more engines, motors, wheels, axles, magnets, rotors, propellers, blades, nozzles, or any suitable combination thereof. In some instances, the propulsion system can be used to enable the movable object to take off from a surface, land on a surface, maintain its current position and/or orientation (e.g., hover), change orientation, and/or change position.

[00142] The movable object can be controlled remotely by a user or controlled locally by an occupant within or on the movable object. In some embodiments, the movable object is an unmanned movable object, such as a UAV. An unmanned movable object, such as a UAV, may not have an occupant onboard the movable object. The movable object can be controlled by a human or an autonomous control system (e.g., a computer control system), or any suitable combination thereof. The movable object can be an autonomous or semi-autonomous robot, such as a robot configured with an artificial intelligence.

[00143] The movable object can have any suitable size and/or dimensions. In some embodiments, the movable object may be of a size and/or dimensions to have a human occupant within or on the

vehicle. Alternatively, the movable object may be of size and/or dimensions smaller than that capable of having a human occupant within or on the vehicle. The movable object may be of a size and/or dimensions suitable for being lifted or carried by a human. Alternatively, the movable object may be larger than a size and/or dimensions suitable for being lifted or carried by a human. In some instances, the movable object may have a maximum dimension (e.g., length, width, height, diameter, diagonal) of less than or equal to about: 2 cm, 5 cm, 10 cm, 50 cm, 1 m, 2 m, 5 m, or 10 m. The maximum dimension may be greater than or equal to about: 2 cm, 5 cm, 10 cm, 50 cm, 1 m, 2 m, 5 m, or 10 m. For example, the distance between shafts of opposite rotors of the movable object may be less than or equal to about: 2 cm, 5 cm, 10 cm, 50 cm, 1 m, 2 m, 5 m, or 10 m. Alternatively, the distance between shafts of opposite rotors may be greater than or equal to about: 2 cm, 5 cm, 10 cm, 50 cm, 1 m, 2 m, 5 m, or 10 m.

[00144] In some embodiments, the movable object may have a volume of less than 100 cm x 100 cm x 100 cm, less than 50 cm x 50 cm x 30 cm, or less than 5 cm x 5 cm x 3 cm. The total volume of the movable object may be less than or equal to about: 1 cm^3, 2 cm^3, 5 cm^3, 10 cm^3, 20 cm^3, 30 cm^3, 40 cm^3, 50 cm^3, 60 cm^3, 70 cm^3, 80 cm^3, 90 cm^3, 100 cm^3, 150 cm^3, 200 cm^3, 300 cm^3, 500 cm^3, 750 cm^3, 1000 cm^3, 5000 cm^3, 10,000 cm^3, 100,000 cm^3, 1 m^3, or 10 m^3. Conversely, the total volume of the movable object may be greater than or equal to about: 1 cm^3, 2 cm^3, 5 cm^3, 10 cm^3, 20 cm^3, 30 cm^3, 40 cm^3, 50 cm^3, 60 cm^3, 70 cm^3, 80 cm^3, 90 cm^3, 100 cm^3, 150 cm^3, 200 cm^3, 300 cm^3, 500 cm^3, 750 cm^3, 1000 cm^3, 5000 cm^3, 10,000 cm^3, 100,000 cm^3, 1 m^3, or 10 m^3.

[00145] In some embodiments, the movable object may have a footprint (which may refer to the lateral cross-sectional area encompassed by the movable object) less than or equal to about: 32,000 cm^2, 20,000 cm^2, 10,000 cm^2, 1,000 cm^2, 500 cm^2, 100 cm^2, 50 cm^2, 10 cm^2, or 5 cm^2. Conversely, the footprint may be greater than or equal to about: 32,000 cm^2, 20,000 cm^2, 10,000 cm^2, 1,000 cm^2, 500 cm^2, 100 cm^2, 50 cm^2, 10 cm^2, or 5 cm^2.

[00146] In some instances, the movable object may weigh no more than 1000 kg. The weight of the movable object may be less than or equal to about: 1000 kg, 750 kg, 500 kg, 200 kg, 150 kg, 100 kg, 80 kg, 70 kg, 60 kg, 50 kg, 45 kg, 40 kg, 35 kg, 30 kg, 25 kg, 20 kg, 15 kg, 12 kg, 10 kg, 9 kg, 8 kg, 7 kg, 6 kg, 5 kg, 4 kg, 3 kg, 2 kg, 1 kg, 0.5 kg, 0.1 kg, 0.05 kg, or 0.01 kg. Conversely, the weight may be greater than or equal to about: 1000 kg, 750 kg, 500 kg, 200 kg, 150 kg, 100 kg, 80 kg, 70 kg, 60 kg, 50 kg, 45 kg, 40 kg, 35 kg, 30 kg, 25 kg, 20 kg, 15 kg, 12 kg, 10 kg, 9 kg, 8 kg, 7 kg, 6 kg, 5 kg, 4 kg, 3 kg, 2 kg, 1 kg, 0.5 kg, 0.1 kg, 0.05 kg, or 0.01 kg.

[00147] In some embodiments, a movable object may be small relative to a load carried by the movable object. The load may include a payload and/or a carrier, as described in further detail

elsewhere herein. In some examples, a ratio of a movable object weight to a load weight may be greater than, less than, or equal to about 1:1. In some instances, a ratio of a movable object weight to a load weight may be greater than, less than, or equal to about 1:1. Optionally, a ratio of a carrier weight to a load weight may be greater than, less than, or equal to about 1:1. When desired, the ratio of an movable object weight to a load weight may be less than or equal to: 1:2, 1:3, 1:4, 1:5, 1:10, or even less. Conversely, the ratio of a movable object weight to a load weight can also be greater than or equal to: 2:1, 3:1, 4:1, 5:1, 10:1, or even greater.

[00148] In some embodiments, the movable object may have low energy consumption. For example, the movable object may use less than about: 5 W/h, 4 W/h, 3 W/h, 2 W/h, 1 W/h, or less. In some instances, a carrier of the movable object may have low energy consumption. For example, the carrier may use less than about: 5 W/h, 4 W/h, 3 W/h, 2 W/h, 1 W/h, or less. Optionally, a payload of the movable object may have low energy consumption, such as less than about: 5 W/h, 4 W/h, 3 W/h, 2 W/h, 1 W/h, or less.

[00149] FIG. 9 illustrates an unmanned aerial vehicle (UAV) 900, in accordance with embodiments of the present invention. The UAV may be an example of a movable object as described herein. The UAV 900 can include a propulsion system having four rotors 902, 904, 906, and 908. Any number of rotors may be provided (e.g., one, two, three, four, five, six, or more). The rotors, rotor assemblies, or other propulsion systems of the unmanned aerial vehicle may enable the unmanned aerial vehicle to hover/maintain position, change orientation, and/or change location. The distance between shafts of opposite rotors can be any suitable length 910. For example, the length 910 can be less than or equal to 2 m, or less than equal to 11 m. In some embodiments, the length 910 can be within a range from 40 cm to7 m, from70 cm to 2 m, or from 11 cm to 11 m. Any description herein of a UAV may apply to a movable object, such as a movable object of a different type, and vice versa. The UAV may use an assisted takeoff system or method as described herein.

[00150] In some embodiments, the movable object can be configured to carry a load. The load can include one or more of passengers, cargo, equipment, instruments, and the like. The load can be provided within a housing. The housing may be separate from a housing of the movable object, or be part of a housing for an movable object. Alternatively, the load can be provided with a housing while the movable object does not have a housing. Alternatively, portions of the load or the entire load can be provided without a housing. The load can be rigidly fixed relative to the movable object. Optionally, the load can be movable relative to the movable object (e.g., translatable or rotatable relative to the movable object). The load can include a payload and/or a carrier, as described elsewhere herein.

[00151] In some embodiments, the movement of the movable object, carrier, and payload relative to a fixed reference frame (e.g., the surrounding environment) and/or to each other, can be controlled by a terminal. The terminal can be a remote control device at a location distant from the movable object, carrier, and/or payload. The terminal can be disposed on or affixed to a support platform. Alternatively, the terminal can be a handheld or wearable device. For example, the terminal can include a smartphone, tablet, laptop, computer, glasses, gloves, helmet, microphone, or suitable combinations thereof. The terminal can include a user interface, such as a keyboard, mouse, joystick, touchscreen, or display. Any suitable user input can be used to interact with the terminal, such as manually entered commands, voice control, gesture control, or position control (e.g., via a movement, location or tilt of the terminal).

[00152] The terminal can be used to control any suitable state of the movable object, carrier, and/or payload. For example, the terminal can be used to control the position and/or orientation of the movable object, carrier, and/or payload relative to a fixed reference from and/or to each other. In some embodiments, the terminal can be used to control individual elements of the movable object, carrier, and/or payload, such as the actuation assembly of the carrier, a sensor of the payload, or an emitter of the payload. The terminal can include a wireless communication device adapted to communicate with one or more of the movable object, carrier, or payload.

[00153] The terminal can include a suitable display unit for viewing information of the movable object, carrier, and/or payload. For example, the terminal can be configured to display information of the movable object, carrier, and/or payload with respect to position, translational velocity, translational acceleration, orientation, angular velocity, angular acceleration, or any suitable combinations thereof. In some embodiments, the terminal can display information provided by the payload, such as data provided by a functional payload (e.g., images recorded by a camera or other image capturing device).

[00154] Optionally, the same terminal may both control the movable object, carrier, and/or payload, or a state of the movable object, carrier and/or payload, as well as receive and/or display information from the movable object, carrier and/or payload. For example, a terminal may control the positioning of the payload relative to an environment, while displaying image data captured by the payload, or information about the position of the payload. Alternatively, different terminals may be used for different functions. For example, a first terminal may control movement or a state of the movable object, carrier, and/or payload while a second terminal may receive and/or display information from the movable object, carrier, and/or payload. For example, a first terminal may be used to control the positioning of the payload relative to an environment while a second terminal

displays image data captured by the payload. Various communication modes may be utilized between a movable object and an integrated terminal that both controls the movable object and receives data, or between the movable object and multiple terminals that both control the movable object and receives data. For example, at least two different communication modes may be formed between the movable object and the terminal that both controls the movable object and receives data from the movable object.

[00155] FIG. 10 illustrates a movable object 1000 including a carrier 1002 and a payload 1004, in accordance with embodiments. Although the movable object 1000 is depicted as an aircraft, this depiction is not intended to be limiting, and any suitable type of movable object can be used, as previously described herein. One of skill in the art would appreciate that any of the embodiments described herein in the context of aircraft systems can be applied to any suitable movable object (e.g., an UAV). In some instances, the payload 1004 may be provided on the movable object 1000 without requiring the carrier 1002. The movable object 1000 may include propulsion mechanisms 1006, a sensing system 1008, and a communication system 1010.

[00156] The propulsion mechanisms 1006 can include one or more of rotors, propellers, blades, engines, motors, wheels, axles, magnets, or nozzles, as previously described. The movable object may have one or more, two or more, three or more, or four or more propulsion mechanisms. The propulsion mechanisms may all be of the same type. Alternatively, one or more propulsion mechanisms can be different types of propulsion mechanisms. The propulsion mechanisms 1006 can be mounted on the movable object 1000 using any suitable means, such as a support element (e.g., a drive shaft) as described elsewhere herein. The propulsion mechanisms 1006 can be mounted on any suitable portion of the movable object 1000, such on the top, bottom, front, back, sides, or suitable combinations thereof.

[00157] In some embodiments, the propulsion mechanisms 1006 can enable the movable object 1000 to take off vertically from a surface or land vertically on a surface without requiring any horizontal movement of the movable object 1000 (e.g., without traveling down a runway). Optionally, the propulsion mechanisms 1006 can be operable to permit the movable object 1000 to hover in the air at a specified position and/or orientation. One or more of the propulsion mechanisms 1000 may be controlled independently of the other propulsion mechanisms. Alternatively, the propulsion mechanisms 1000 can be configured to be controlled simultaneously. For example, the movable object 1000 can have multiple horizontally oriented rotors that can provide lift and/or thrust to the movable object. The multiple horizontally oriented rotors can be actuated to provide vertical takeoff, vertical landing, and hovering capabilities to the movable

object1000. In some embodiments, one or more of the horizontally oriented rotors may spin in a clockwise direction, while one or more of the horizontally rotors may spin in a counterclockwise direction. For example, the number of clockwise rotors may be equal to the number of counterclockwise rotors. The rotation rate of each of the horizontally oriented rotors can be varied independently in order to control the lift and/or thrust produced by each rotor, and thereby adjust the spatial disposition, velocity, and/or acceleration of the movable object 1000 (e.g., with respect to up to three degrees of translation and up to three degrees of rotation).

[00158] The sensing system 1008 can include one or more sensors that may sense the spatial disposition, velocity, and/or acceleration of the movable object 1000 (e.g., with respect to up to three degrees of translation and up to three degrees of rotation). The one or more sensors can include global positioning system (GPS) sensors, motion sensors, inertial sensors, proximity sensors, or image sensors. The sensing data provided by the sensing system 1008 can be used to control the spatial disposition, velocity, and/or orientation of the movable object 1000 (e.g., using a suitable processing unit and/or control module, as described below). Alternatively, the sensing system 1008 can be used to provide data regarding the environment surrounding the movable object, such as weather conditions, proximity to potential obstacles, location of geographical features, location of manmade structures, and the like.

[00159] The communication system 1010 enables communication with terminal 1012 having a communication system 1014 via wireless signals 1016. The communication systems 1010, 1014 may include any number of transmitters, receivers, and/or transceivers suitable for wireless communication. The communication may be one-way communication, such that data can be transmitted in only one direction. For example, one-way communication may involve only the movable object 1000 transmitting data to the terminal 1012, or vice-versa. The data may be transmitted from one or more transmitters of the communication system 1010 to one or more receivers of the communication system 1012, or vice-versa. Alternatively, the communication may be two-way communication, such that data can be transmitted in both directions between the movable object 1000 and the terminal 1012. The two-way communication can involve transmitting data from one or more transmitters of the communication system 1010 to one or more receivers of the communication system 1014, and vice-versa.

[00160] In some embodiments, the terminal 1012 can provide control data to one or more of the movable object 1000, carrier 1002, and payload 1004 and receive information from one or more of the movable object 1000, carrier 1002, and payload 1004 (e.g., position and/or motion information of the movable object, carrier or payload; data sensed by the payload such as image data captured by

a payload camera). In some instances, control data from the terminal may include instructions for relative positions, movements, actuations, or controls of the movable object, carrier and/or payload. For example, the control data may result in a modification of the location and/or orientation of the movable object (e.g., via control of the propulsion mechanisms 1006), or a movement of the payload with respect to the movable object (e.g., via control of the carrier 1002). The control data from the terminal may result in control of the payload, such as control of the operation of a camera or other image capturing device (e.g., taking still or moving pictures, zooming in or out, turning on or off, switching imaging modes, change image resolution, changing focus, changing depth of field, changing exposure time, changing viewing angle or field of view). In some instances, the communications from the movable object, carrier and/or payload may include information from one or more sensors (e.g., of the sensing system 1008 or of the payload 1004). The communications may include sensed information from one or more different types of sensors (e.g., GPS sensors, motion sensors, inertial sensor, proximity sensors, or image sensors). Such information may pertain to the position (e.g., location, orientation), movement, or acceleration of the movable object, carrier and/or payload. Such information from a payload may include data captured by the payload or a sensed state of the payload. The control data provided transmitted by the terminal 1012 can be configured to control a state of one or more of the movable object 1000, carrier 1002, or payload 1004. Alternatively or in combination, the carrier 1002 and payload 1004 can also each include a communication module configured to communicate with terminal 1012, such that the terminal can communicate with and control each of the movable object 1000, carrier 1002, and payload 1004 independently.

[00161] In some embodiments, the movable object 1000 can be configured to communicate with another remote device in addition to the terminal 1012, or instead of the terminal 1012. The terminal 1012 may also be configured to communicate with another remote device as well as the movable object 1000. For example, the movable object 1000 and/or terminal 1012 may communicate with another movable object, or a carrier or payload of another movable object. When desired, the remote device may be a second terminal or other computing device (e.g., computer, laptop, tablet, smartphone, or other mobile device). The remote device can be configured to transmit data to the movable object 1000, receive data from the movable object 1000, transmit data to the terminal 1012, and/or receive data from the terminal 1012. Optionally, the remote device can be connected to the Internet or other telecommunications network, such that data received from the movable object 1000 and/or terminal 1012 can be uploaded to a website or server.

[00162] FIG. 11 is a schematic illustration by way of block diagram of a system 1100 for controlling a movable object, in accordance with embodiments. The system 1100 can be used in combination with any suitable embodiment of the systems, devices, and methods disclosed herein. The system 1100 can include a sensing module 1102, processing unit 1104, non-transitory computer readable medium 1106, control module 1108, and communication module 1110.

[00163] The sensing module 1102 can utilize different types of sensors that collect information relating to the movable objects in different ways. Different types of sensors may sense different types of signals or signals from different sources. For example, the sensors can include inertial sensors, GPS sensors, proximity sensors (e.g., lidar), or vision/image sensors (e.g., a camera). The sensing module 1102 can be operatively coupled to a processing unit 1104 having a plurality of processors. In some embodiments, the sensing module can be operatively coupled to a transmission module 1112 (e.g., a Wi-Fi image transmission module) configured to directly transmit sensing data to a suitable external device or system. For example, the transmission module 1112 can be used to transmit images captured by a camera of the sensing module 1102 to a remote terminal.

[00164] The processing unit 1104 can have one or more processors, such as a programmable processor (e.g., a central processing unit (CPU)). The processing unit 1104 can be operatively coupled to a non-transitory computer readable medium 1106. The non-transitory computer readable medium 1106 can store logic, code, and/or program instructions executable by the processing unit 1104 for performing one or more steps. The non-transitory computer readable medium can include one or more memory units (e.g., removable media or external storage such as an SD card or random access memory (RAM)). In some embodiments, data from the sensing module 1102 can be directly conveyed to and stored within the memory units of the non-transitory computer readable medium 1106.The memory units of the non-transitory computer readable medium 1106 can store logic, code and/or program instructions executable by the processing unit 1104 to perform any suitable embodiment of the methods described herein. For example, the processing unit 1104 can be configured to execute instructions causing one or more processors of the processing unit 1104 to analyze sensing data produced by the sensing module. The memory units can store sensing data from the sensing module to be processed by the processing unit 1104.In some embodiments, the memory units of the non-transitory computer readable medium 1106 can be used to store the processing results produced by the processing unit 1104.

[00165] In some embodiments, the processing unit 1104 can be operatively coupled to a control module 1108 configured to control a state of the movable object. For example, the control module 1108 can be configured to control the propulsion mechanisms of the movable object to adjust the

spatial disposition, velocity, and/or acceleration of the movable object with respect to six degrees of freedom. Alternatively or in combination, the control module 1108 can control one or more of a state of a carrier, payload, or sensing module.

[00166] The processing unit 1104 can be operatively coupled to a communication module 1110 configured to transmit and/or receive data from one or more external devices (e.g., a terminal, display device, or other remote controller). Any suitable means of communication can be used, such as wired communication or wireless communication. For example, the communication module 1110 can utilize one or more of local area networks (LAN), wide area networks (WAN), infrared, radio, WiFi, point-to-point (P2P) networks, telecommunication networks, cloud communication, and the like. Optionally, relay stations, such as towers, satellites, or mobile stations, can be used. Wireless communications can be proximity dependent or proximity independent. In some embodiments, line-of-sight may or may not be required for communications. The communication module 1110 can transmit and/or receive one or more of sensing data from the sensing module 1102, processing results produced by the processing unit 1104, predetermined control data, user commands from a terminal or remote controller, and the like.

[00167] The components of the system 1100 can be arranged in any suitable configuration. For example, one or more of the components of the system 1100 can be located on the movable object, carrier, payload, terminal, sensing system, or an additional external device in communication with one or more of the above. Additionally, although FIG. 11 depicts a single processing unit 1104 and a single non-transitory computer readable medium 1106, one of skill in the art would appreciate that this is not intended to be limiting, and that the system 1100 can include a plurality of processing units and/or non-transitory computer readable media. In some embodiments, one or more of the plurality of processing units and/or non-transitory computer readable media can be situated at different locations, such as on the movable object, carrier, payload, terminal, sensing module, additional external device in communication with one or more of the above, or suitable combinations thereof, such that any suitable aspect of the processing and/or memory functions performed by the system 1100 can occur at one or more of the aforementioned locations.

[00168] While preferred embodiments of the present invention have been shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art without departing from the invention. It should be understood that various alternatives to the embodiments of the invention described herein may be employed in practicing the invention. It is

intended that the following claims define the scope of the invention and that methods and structures within the scope of these claims and their equivalents be covered thereby.

and instructing the unmanned aerial vehicle to take (3) a third flight response different from the first flight response and the second flight response when the distance falls within the third threshold and outside the second threshold.

11. The method of claim 10 wherein the third flight response measure is to provide an alert to an operator of the unmanned aerial vehicle that the unmanned aerial vehicle is near the flight-restricted region.

12. An unmanned aerial vehicle comprising:

a processor configured to (1) receive a location of the unmanned aerial vehicle and calculate a distance between the location of the unmanned aerial vehicle and a location of a flight-restricted region, and (2) assess whether the distance falls within a first distance threshold or a second distance threshold greater than the first distance threshold; and

one or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take (1) a first flight response measure when the distance falls within the first distance threshold, and (2) a second flight response different from the first flight response measure when the distance falls within the second distance threshold and outside the first distance threshold.

13. The unmanned aerial vehicle of claim 12 further comprising a local memory that stores the location of the flight-restricted region and further stores locations for a plurality of flight-restricted regions.

14. The unmanned aerial vehicle of claim 13 wherein the local memory is updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection.

15. The unmanned aerial vehicle of claim 13 wherein the local memory is updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with a communication network.

16. A method for assessing flight response of an unmanned aerial vehicle to a flight-restricted region, said method comprising:

assessing a general location of the unmanned aerial vehicle by assessing a location of an external device in communication with the unmanned aerial vehicle;

assessing a location of a flight-restricted region;

calculating, with aid of a processor, a distance between the unmanned aerial vehicle and the flight-restricted region using the general location of the unmanned aerial vehicle and the location of the flight-restricted region;

assessing, with aid of the processor, whether the distance falls within a distance threshold; and

instructing the unmanned aerial vehicle to take a flight response measure when the distance falls within the distance threshold.

17. The method of claim 16 wherein the general location of the unmanned aerial vehicle is the location of the external device.

18. The method of claim 16 wherein the external device is a mobile terminal capable of receiving data from the unmanned aerial vehicle.

19. The method of claim 18 wherein the data includes UAV location and/or status data and the mobile terminal includes a display capable of displaying the UAV location and/or status data.

20. The method of claim 18 wherein the mobile terminal is a mobile phone.

21. The method of claim 18 wherein the mobile terminal is capable of transmitting control data to the unmanned aerial vehicle and thereby control the flight of the unmanned aerial vehicle.

22. The method of claim 18 wherein the mobile terminal communicates with the unmanned aerial vehicle via a direct communication technique.

23. The method of claim 18 wherein the mobile terminal communicates with the unmanned aerial vehicle via an indirect communication technique.

24. The method of claim 23 wherein a mobile base station is used to assess the location of the mobile terminal.

25. An unmanned aerial vehicle comprising:

a processor configured to perform the method of claim 16; and

one or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take the flight response measure.

26. A method for assessing flight response of an unmanned aerial vehicle to a flight-restricted region, said method comprising:

assessing a location of the unmanned aerial vehicle;

assessing a location of a flight-restricted region;

calculating, with aid of a processor, relative positioning between the unmanned aerial vehicle and the flight-restricted region using the location of the unmanned aerial vehicle and the location of the flight-restricted region;

assessing, with aid of the processor, a jurisdiction within which the unmanned aerial vehicle is located, based on the location of the unmanned aerial vehicle, and one or more flight restriction rules provided within the jurisdiction; and

instructing the unmanned aerial vehicle to take a flight response measure when the relative positioning between the unmanned aerial vehicle and the flight-restricted region falls under the one or more flight restriction rules.

27. The method of claim 26 wherein the relative positioning between the unmanned aerial vehicle includes a distance between the unmanned aerial vehicle and the flight-restricted region, and wherein the one or more flight restriction rules provide the flight response measure when the distance falls within a distance threshold.

28. The method of claim 27 wherein the distance threshold is selected based on the one or more flight restriction rules of the jurisdiction.

29. The method of claim 26 wherein the jurisdiction is a country and the one or more flight restriction rules include laws or regulations of the country.

30. An unmanned aerial vehicle comprising:

a processor configured to perform the method of claim 26; and

one or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take the flight response measure.

CLAIMS

WHAT IS CLAIMED IS:

1. A method for assessing flight response of an unmanned aerial vehicle to a flight-restricted region, said method comprising:

assessing a location of the unmanned aerial vehicle;

assessing a location of a flight-restricted region;

calculating, with aid of a processor, a distance between the unmanned aerial vehicle and the flight-restricted region using the location of the unmanned aerial vehicle and the location of the flight-restricted region;

assessing, with aid of the processor, whether the distance falls within a first distance threshold or a second distance threshold greater than the first distance threshold; and

instructing the unmanned aerial vehicle to take (1) a first flight response measure when the distance falls within the first distance threshold, and (2) a second flight response different from the first flight response measure when the distance falls within the second distance threshold and outside the first distance threshold.

2. The method of claim 1 wherein the location of the unmanned aerial vehicle is assessed with aid of a GPS signal at the unmanned aerial vehicle.

3. The method of claim 1 wherein the flight-restricted region is an airport.

4. The method of claim 1 wherein the distance is calculated using an ENU coordinate system.

5. The method of claim 4 wherein the location of the unmanned aerial vehicle is converted to an ECEF coordinate system, and is further converted to an ENU coordinate system.

6. The method of claim 1 wherein the distance is calculated at specified time intervals.

7. The method of claim 1 wherein the flight-restricted region is selected from a plurality of possible flight restricted regions based on proximity of the unmanned aerial vehicle when the unmanned aerial vehicle is turned on.

8. The method of claim 1 wherein the first flight response measure is to automatically land the aerial vehicle on a surface.

9. The method of claim 1 wherein the second flight response measure is to provide an operator of the unmanned aerial vehicle with a time period to land the aerial vehicle on a surface, after which the unmanned aerial vehicle will automatically land.

10. The method of claim 1 further comprising assessing, with aid of the processor, whether the distance falls within a third distance threshold greater than the second distance threshold;

and instructing the unmanned aerial vehicle to take (3) a third flight response different from the first flight response and the second flight response when the distance falls within the third threshold and outside the second threshold.

11. The method of claim 10 wherein the third flight response measure is to provide an alert to an operator of the unmanned aerial vehicle that the unmanned aerial vehicle is near the flight-restricted region.

12. An unmanned aerial vehicle comprising:

a processor configured to (1) receive a location of the unmanned aerial vehicle and calculate a distance between the location of the unmanned aerial vehicle and a location of a flight-restricted region, and (2) assess whether the distance falls within a first distance threshold or a second distance threshold greater than the first distance threshold; and

one or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take (1) a first flight response measure when the distance falls within the first distance threshold, and (2) a second flight response different from the first flight response measure when the distance falls within the second distance threshold and outside the first distance threshold.

13. The unmanned aerial vehicle of claim 12 further comprising a local memory that stores the location of the flight-restricted region and further stores locations for a plurality of flight-restricted regions.

14. The unmanned aerial vehicle of claim 13 wherein the local memory is updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with an external device via a wired or wireless connection.

15. The unmanned aerial vehicle of claim 13 wherein the local memory is updated with the locations of the plurality of flight-restricted regions when the unmanned aerial vehicle communicates with a communication network.

16. A method for assessing flight response of an unmanned aerial vehicle to a flight-restricted region, said method comprising:

assessing a general location of the unmanned aerial vehicle by assessing a location of an external device in communication with the unmanned aerial vehicle;

assessing a location of a flight-restricted region;

calculating, with aid of a processor, a distance between the unmanned aerial vehicle and the flight-restricted region using the general location of the unmanned aerial vehicle and the location of the flight-restricted region;

assessing, with aid of the processor, whether the distance falls within a distance threshold; and

instructing the unmanned aerial vehicle to take a flight response measure when the distance falls within the distance threshold.

17. The method of claim 16 wherein the general location of the unmanned aerial vehicle is the location of the external device.

18. The method of claim 16 wherein the external device is a mobile terminal capable of receiving data from the unmanned aerial vehicle.

19. The method of claim 18 wherein the data includes UAV location and/or status data and the mobile terminal includes a display capable of displaying the UAV location and/or status data.

20. The method of claim 18 wherein the mobile terminal is a mobile phone.

21. The method of claim 18 wherein the mobile terminal is capable of transmitting control data to the unmanned aerial vehicle and thereby control the flight of the unmanned aerial vehicle.

22. The method of claim 18 wherein the mobile terminal communicates with the unmanned aerial vehicle via a direct communication technique.

23. The method of claim 18 wherein the mobile terminal communicates with the unmanned aerial vehicle via an indirect communication technique.

24. The method of claim 23 wherein a mobile base station is used to assess the location of the mobile terminal.

25. An unmanned aerial vehicle comprising:

a processor configured to perform the method of claim 16; and

one or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take the flight response measure.

26. A method for assessing flight response of an unmanned aerial vehicle to a flight-restricted region, said method comprising:

assessing a location of the unmanned aerial vehicle;

assessing a location of a flight-restricted region;

calculating, with aid of a processor, relative positioning between the unmanned aerial vehicle and the flight-restricted region using the location of the unmanned aerial vehicle and the location of the flight-restricted region;

assessing, with aid of the processor, a jurisdiction within which the unmanned aerial vehicle is located, based on the location of the unmanned aerial vehicle, and one or more flight restriction rules provided within the jurisdiction; and

instructing the unmanned aerial vehicle to take a flight response measure when the relative positioning between the unmanned aerial vehicle and the flight-restricted region falls under the one or more flight restriction rules.

27. The method of claim 26 wherein the relative positioning between the unmanned aerial vehicle includes a distance between the unmanned aerial vehicle and the flight-restricted region, and wherein the one or more flight restriction rules provide the flight response measure when the distance falls within a distance threshold.

28. The method of claim 27 wherein the distance threshold is selected based on the one or more flight restriction rules of the jurisdiction.

29. The method of claim 26 wherein the jurisdiction is a country and the one or more flight restriction rules include laws or regulations of the country.

30. An unmanned aerial vehicle comprising:

a processor configured to perform the method of claim 26; and

one or more propulsion units in communication with the processor that permit the unmanned aerial vehicle to take the flight response measure.

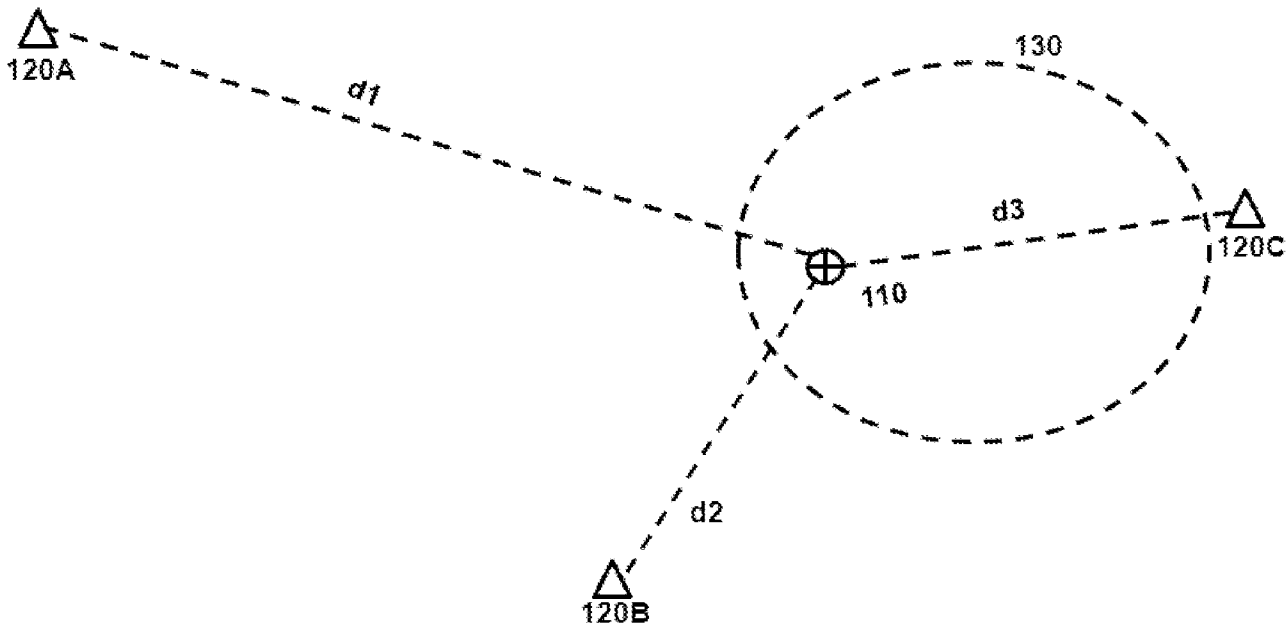

120A
d1
130
d3
120C
110
d2
120B

Fig. 1

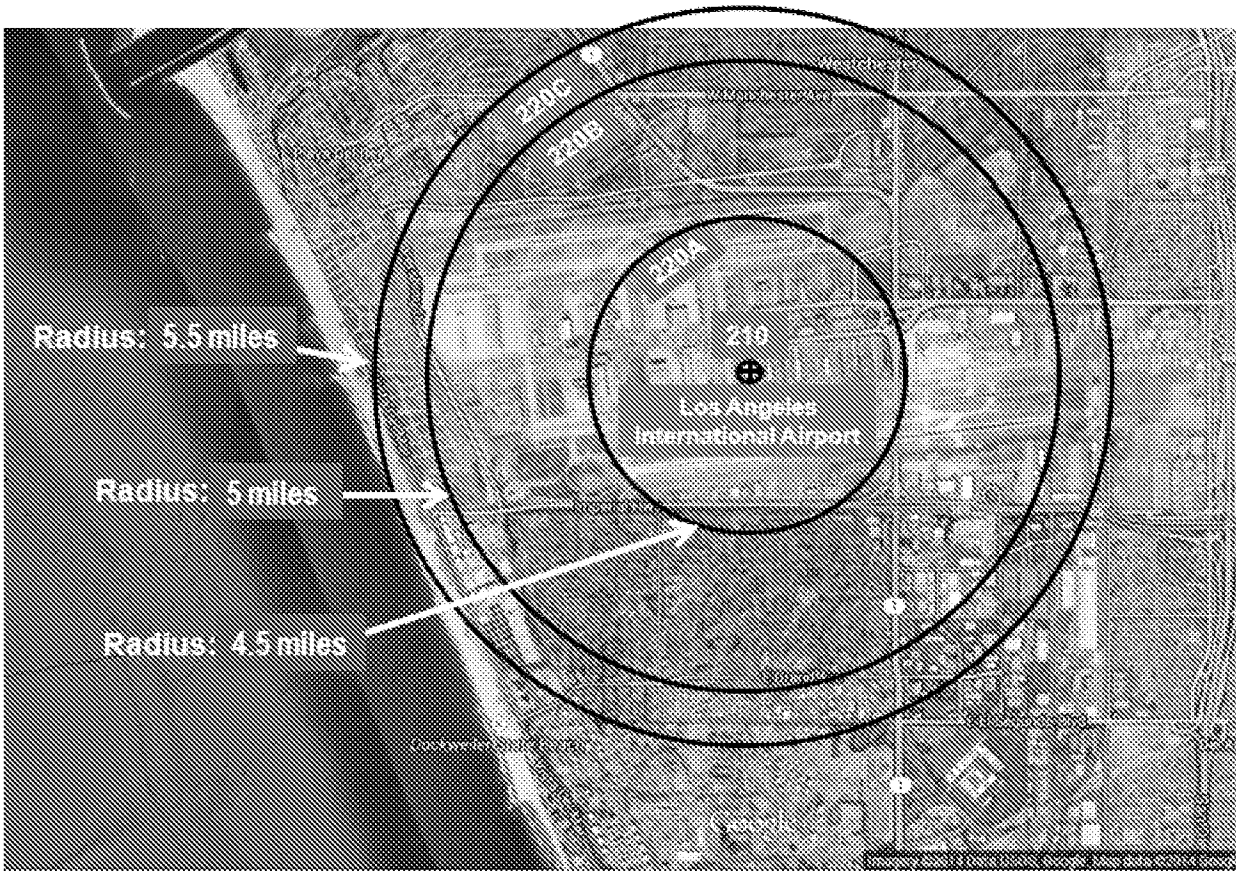

220C
220B
220A
210
Los Angeles
International Airport
Radius: 5.5 miles
Radius: 5 miles
Radius: 4.5 miles

Fig. 2

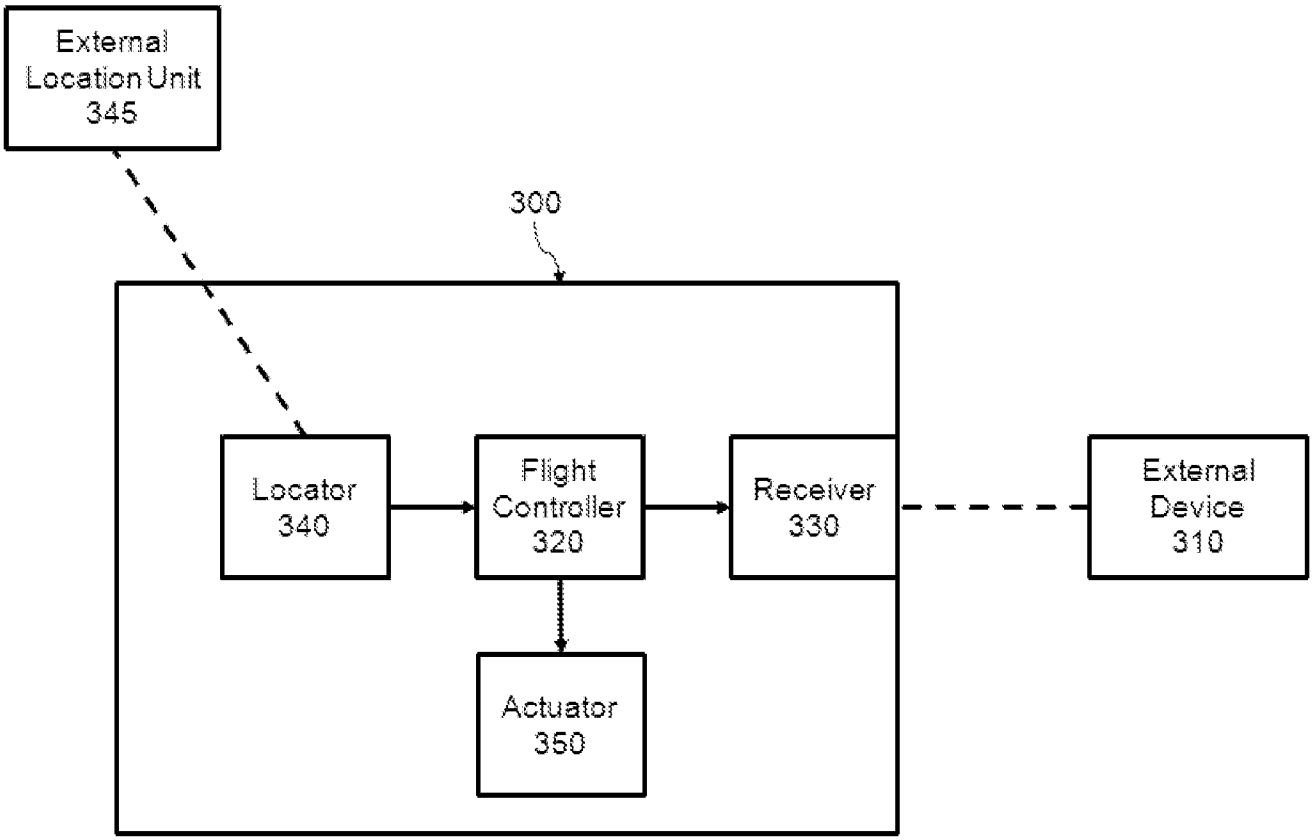

External Location Unit 345
300
Locator 340
Flight Controller 320
Receiver 330
External Device 310
Actuator 350

Fig. 3

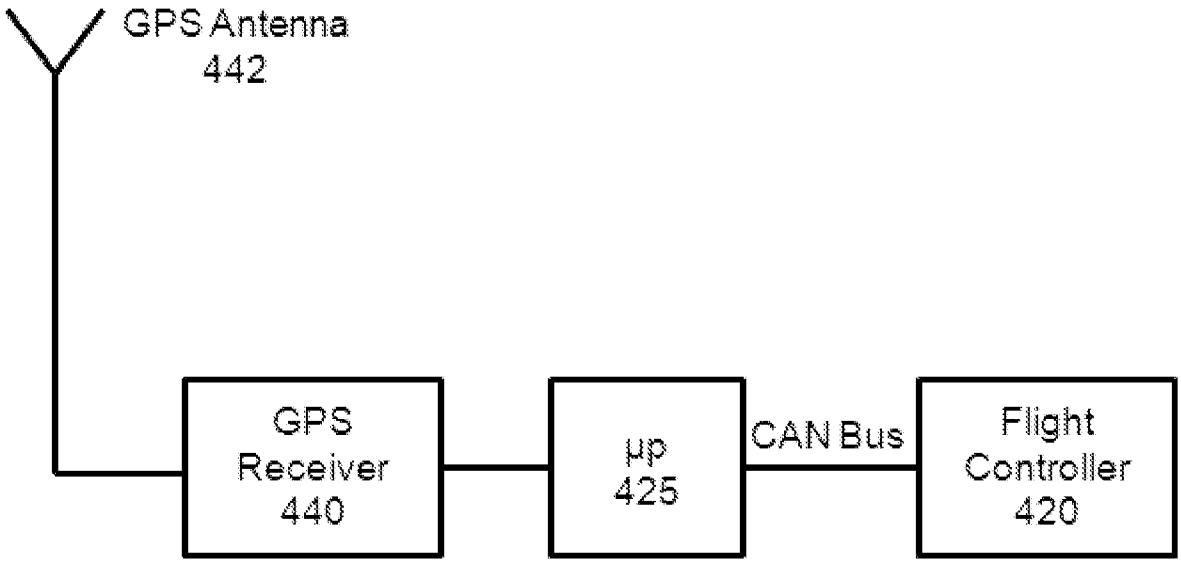

GPS Antenna 442
GPS Receiver 440
µp 425
CAN Bus
Flight Controller 420

Fig. 4

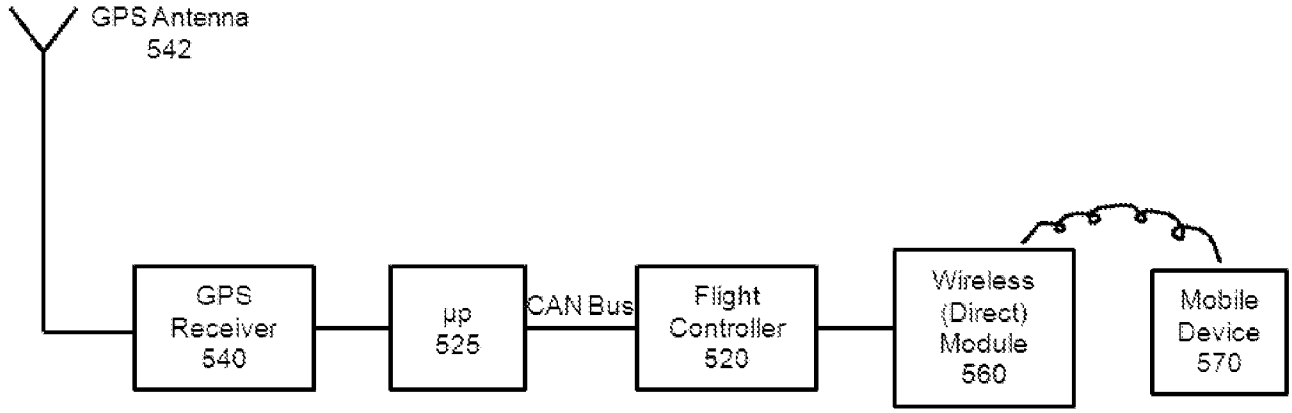

GPS Antenna
542
GPS
Receiver
540
µp
525
CAN Bus
Flight
Controller
520
Wireless
(Direct)
Module
560
Mobile
Device
570

Fig. 5

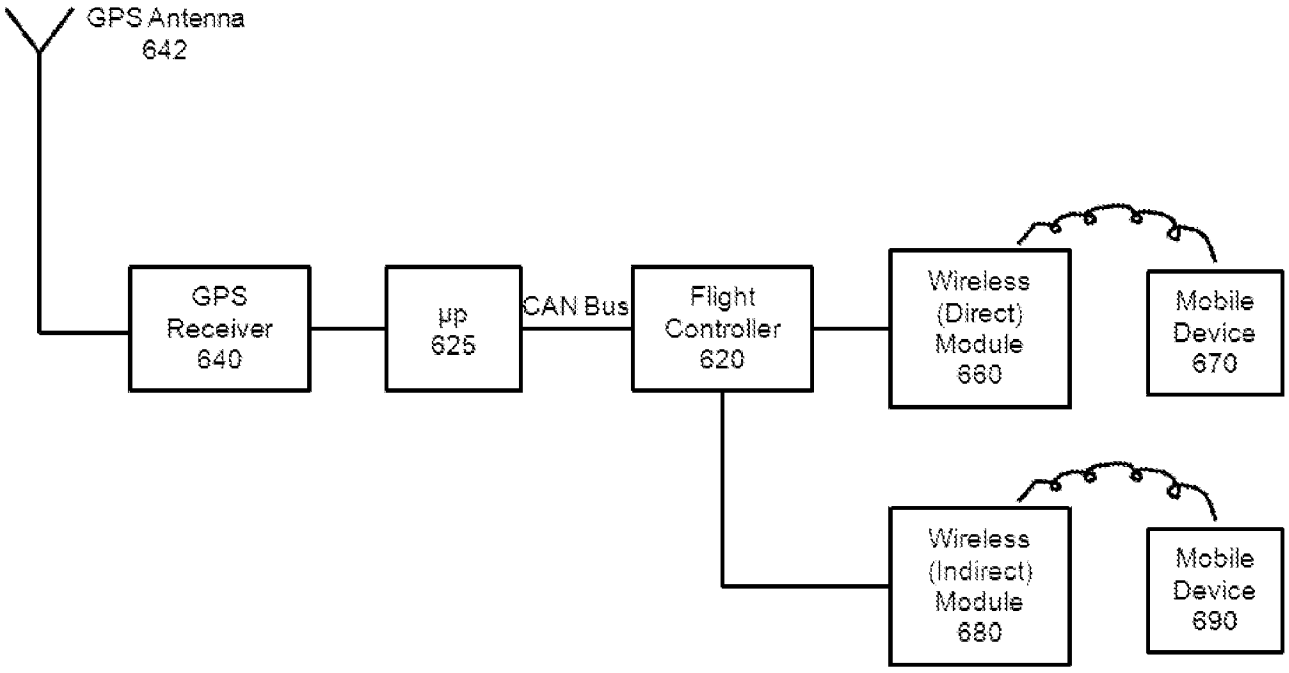

GPS Antenna
642
GPS
Receiver
640
µp
625
CAN Bus
Flight
Controller
620
Wireless
(Direct)
Module
660
Mobile
Device
670
Wireless
(Indirect)
Module
680
Mobile
Device
690

Fig. 6

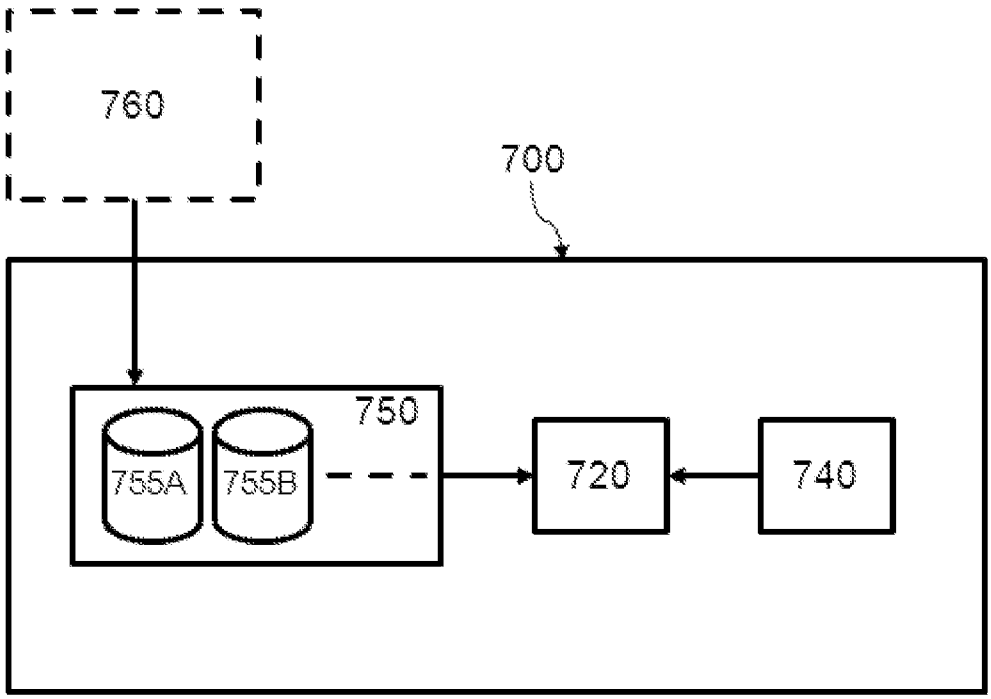


Fig. 7

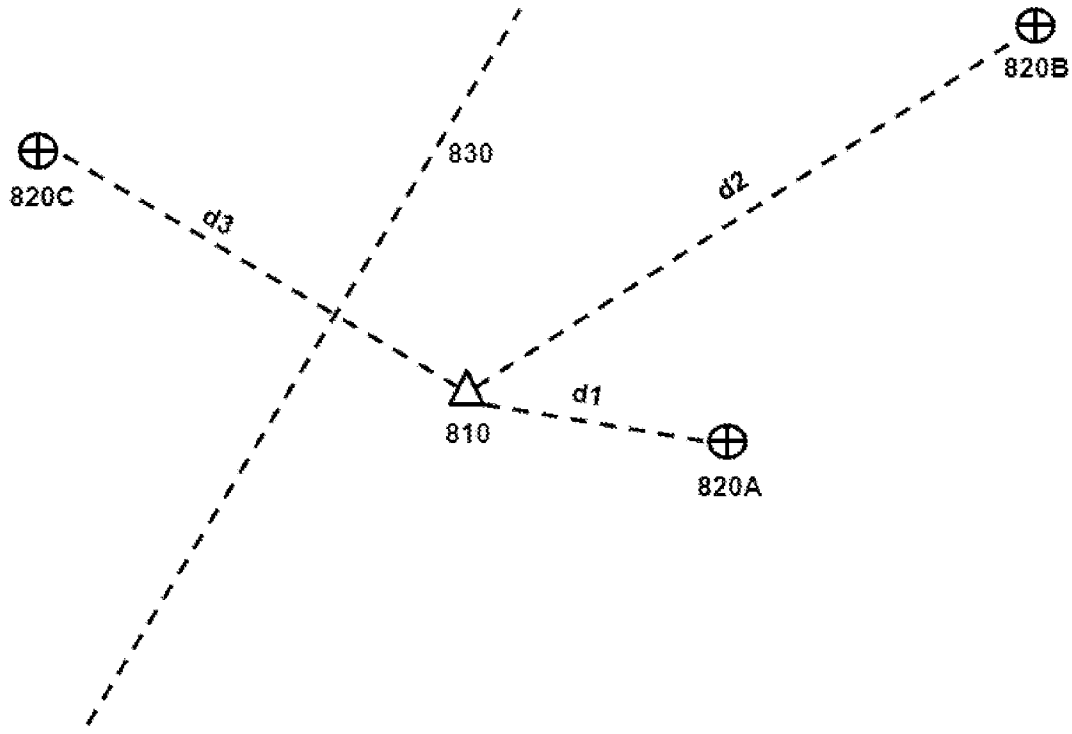


Fig. 8

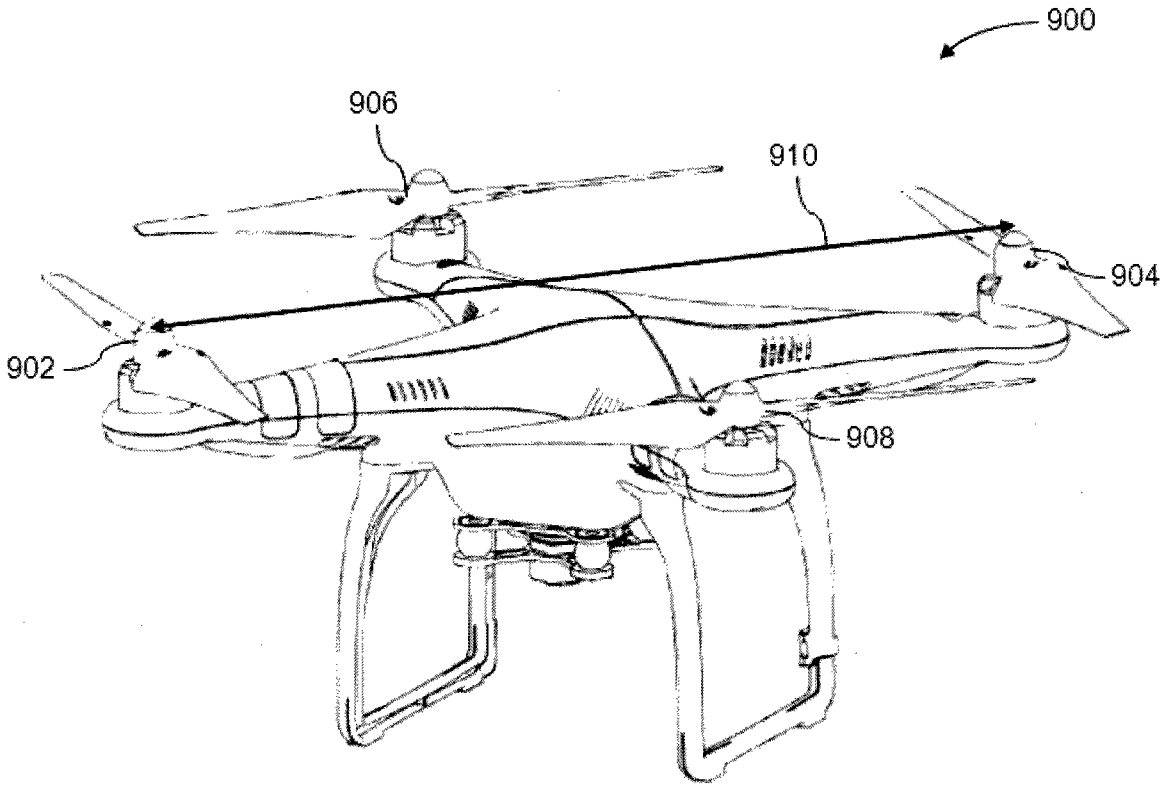

900
906
910
904
902
908

Fig. 9

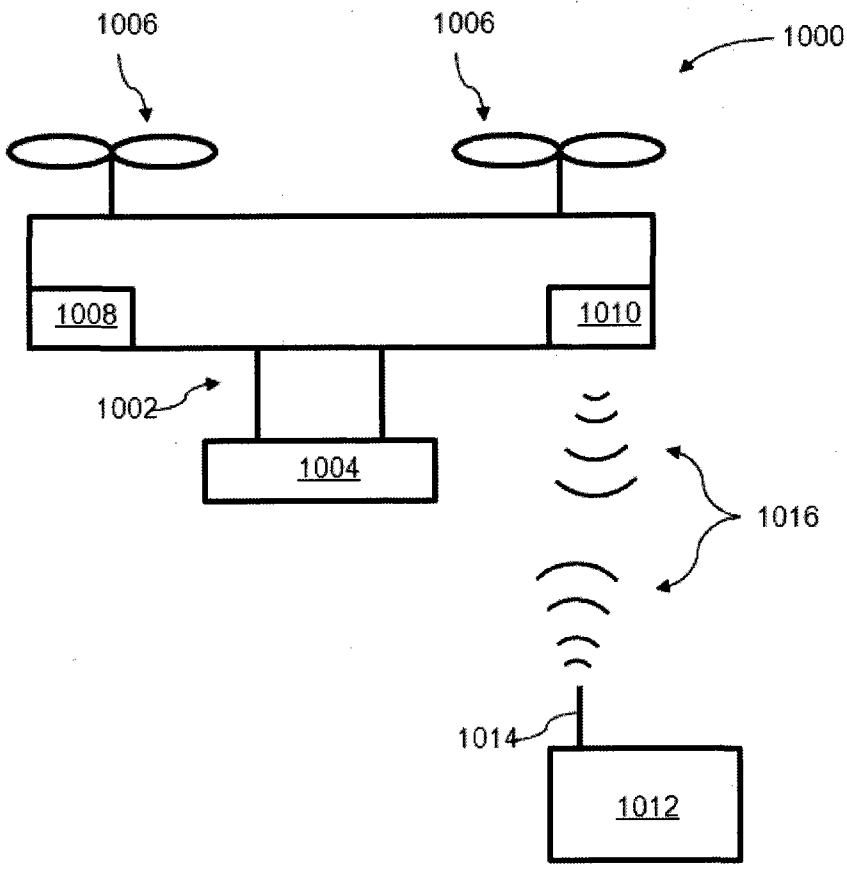

1006
1006
1000
1008
1010
1002
1004
1016
1014
1012

Fig. 10

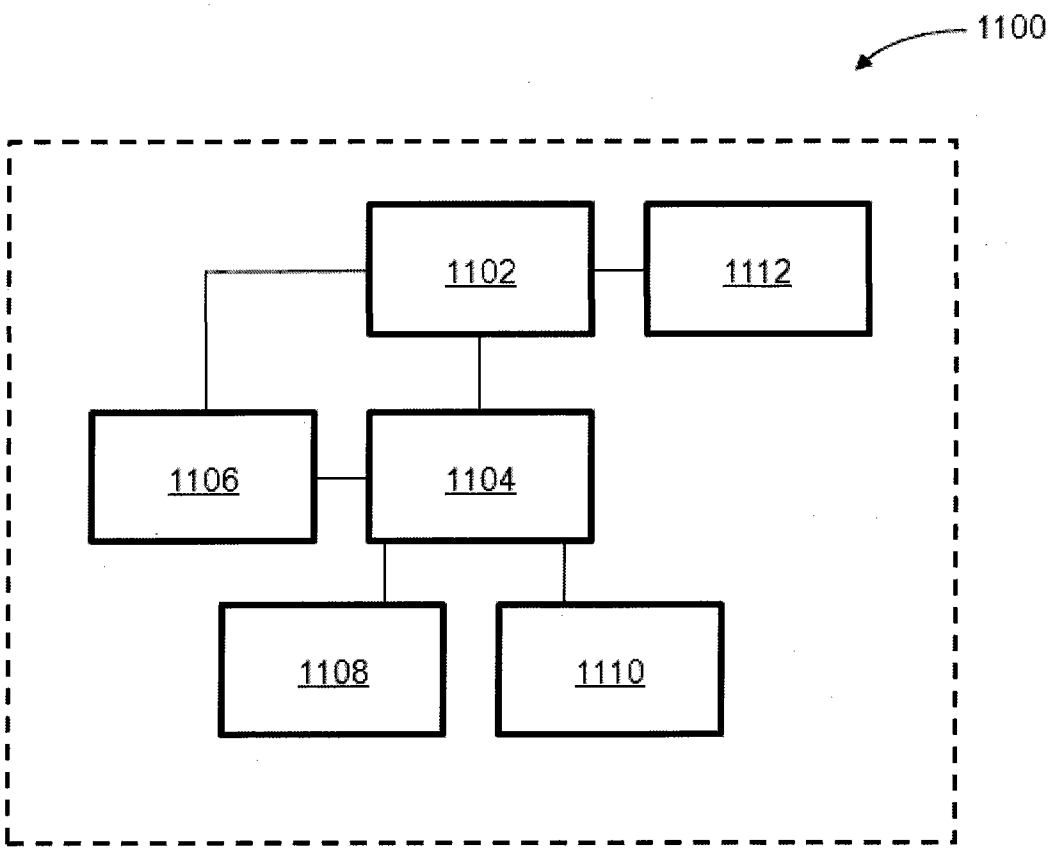


Fig. 11

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2014/073143

A. CLASSIFICATION OF SUBJECT MATTER

G08G 5/00 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G08G5/-; G05D1/-; G01C21/-; G01C23/-

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI,EPODOC,CNKI,CNPAT,TWTXT,TWABS: UAV, UNMANNED AERIAL VEHICLE, GPS, GLOBAL POSITION SYSTEM, LAND+ ,FALL+ ,GRAND+, DISTANCE,THRESHOLD?, AIRPORT?, TERMINAL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/0143482 A1 (HONEYWELL INTERNATIONAL INC.) 07 June 2012 (2012-06-07) description, paragraphs [0015]-[0086], and figures 1, 2, 4 and 5	16-30
Y	US 2012/0143482 A1 (HONEYWELL INTERNATIONAL INC.) 07 June 2012 (2012-06-07) description, paragraphs [0015]-[0086], and figures 1, 2, 4 and 5	1-15
Y	CN 103226356 A (GUANGDONG UNIVERSITY OF TECHNOLOGY) 31 July 2013 (2013-07-31) description, paragraphs [0030]-[0044], and figures 1 and 5	1-15
A	CN 101598557 A (BEIJING UNIVERSITY OF AERONAUTICS AND ASTRONAUTICS) 09 December 2009 (2009-12-09) the whole document	1-30
A	CN 101504287 A (ZHEJIANG UNIVERSITY) 12 August 2009 (2009-08-12) the whole document	1-30

☑ Further documents are listed in the continuation of Box C. ☑ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
22 November 2014	**10 December 2014**

Name and mailing address of the ISA/CN	Authorized officer
STATE INTELLECTUAL PROPERTY OFFICE OF THE P.R.CHINA(ISA/CN) **6,Xitucheng Rd., Jimen Bridge, Haidian District, Beijing 100088 China**	**LI,Xiugai**
Facsimile No. **(86-10)62019451**	Telephone No. **(86-10)82245660**

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2674723 A2 (HONEYWELL INTERNATIONAL INC.) 18 December 2013 (2013-12-18) the whole document	1-30
A	GB 2476149 A (SELEX COMMUNICATIONS S.P.A.) 15 June 2011 (2011-06-15) the whole document	1-30

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2014/073143

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2012/0143482	A1	07 June 2012	Non	e		
CN	103226356	A	31 July 2013	Non	e		
CN	101598557	A	09 December 2009	CN	101598557	B	23 May 2012
CN	101504287	A	12 August 2009	CN	101504287	B	05 January 2011
EP	2674723	A2	18 December 2013	US	2014249738	A1	04 September 2014
				EP	2674723	A3	16 April 2014
GB	2476149	A	15 June 2011	FR	2953601	A1	10 June 2011
				GB	2476149	B	16 July 2014
				FR	2953601	B1	17 August 2012
				GB	2476149	A8	17 April 2013
				IT	1397290	B	04 January 2013