



US 20090266751A1

(19) **United States**

(12) **Patent Application Publication**  
**Straka et al.**

(10) **Pub. No.: US 2009/0266751 A1**

(43) **Pub. Date: Oct. 29, 2009**

(54) **DOSING ENGINE AND CARTRIDGE APPARATUS FOR LIQUID DISPENSING AND METHOD**

(60) Provisional application No. 60/515,721, filed on Oct. 29, 2003.

**Publication Classification**

(75) Inventors: **Michael R. Straka**, Middletown, CA (US); **Carl H. Poppe**, Sebastopol, CA (US); **Carl M. Servin**, Rohnert Park, CA (US); **Caba Calic**, Reno, NV (US)

(51) **Int. Cl.**  
**B01J 49/00** (2006.01)  
**C02F 1/00** (2006.01)  
(52) **U.S. Cl.** ..... **210/96.1; 210/167.11**  
(57) **ABSTRACT**

Correspondence Address:  
**Beyer Law Group LLP**  
**P.O. BOX 1687**  
**Cupertino, CA 95015-1687 (US)**

A liquid dispensing system is provided for automated dispensing of a plurality of liquid reagents into a recreational body of water. The liquid dispensing system includes a cartridge apparatus housing a plurality of liquid reagent containers, each containing a respective liquid reagent. A docking assembly is provided having a dock manifold device, and is releasably coupled to the cartridge apparatus between a first condition and a second condition. In a first condition, the cartridge apparatus can be removably coupled to the docking assembly, while in the second condition, the cartridge apparatus is lockably mounted to the docking assembly in a manner permitting fluid communication from the respective reagent container to respective fluid passages of the manifold device. The dispensing system further includes a dosing engine having a valve manifold device to selectively dispense the liquid reagents into the recreational body of water through a dispensing port.


(73) Assignee: **IDEX HEALTH & SCIENCE LLC**, Northbrook, IL (US)


(21) Appl. No.: **12/463,573**

(22) Filed: **May 11, 2009**


**Related U.S. Application Data**

(63) Continuation of application No. 10/977,325, filed on Oct. 29, 2004, now Pat. No. 7,544,289.

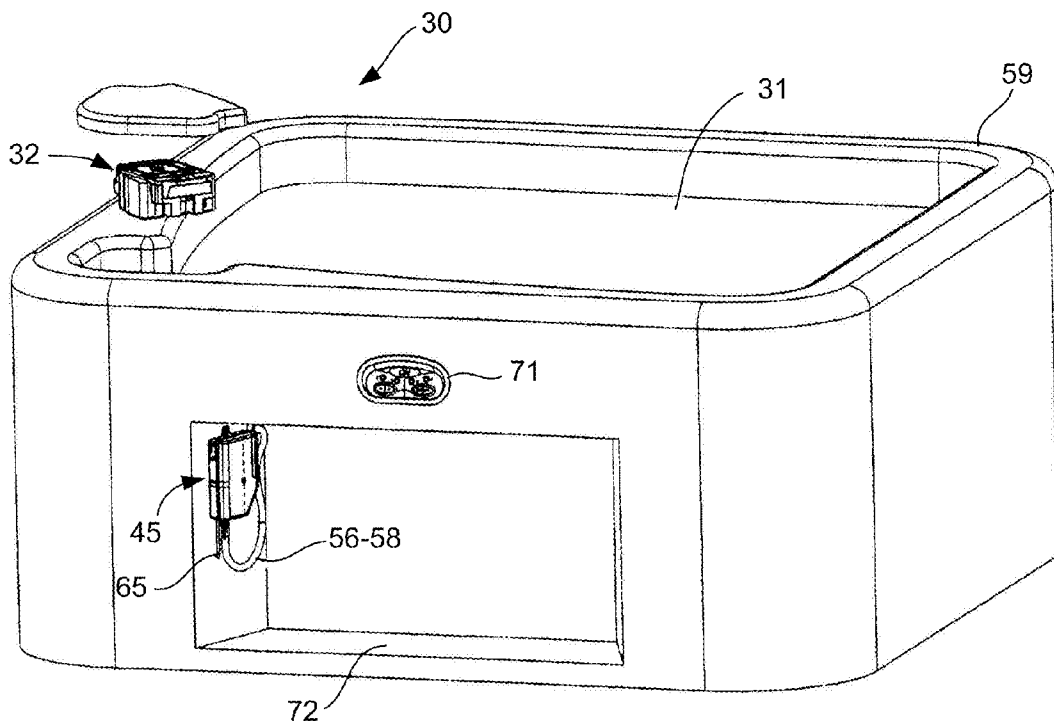


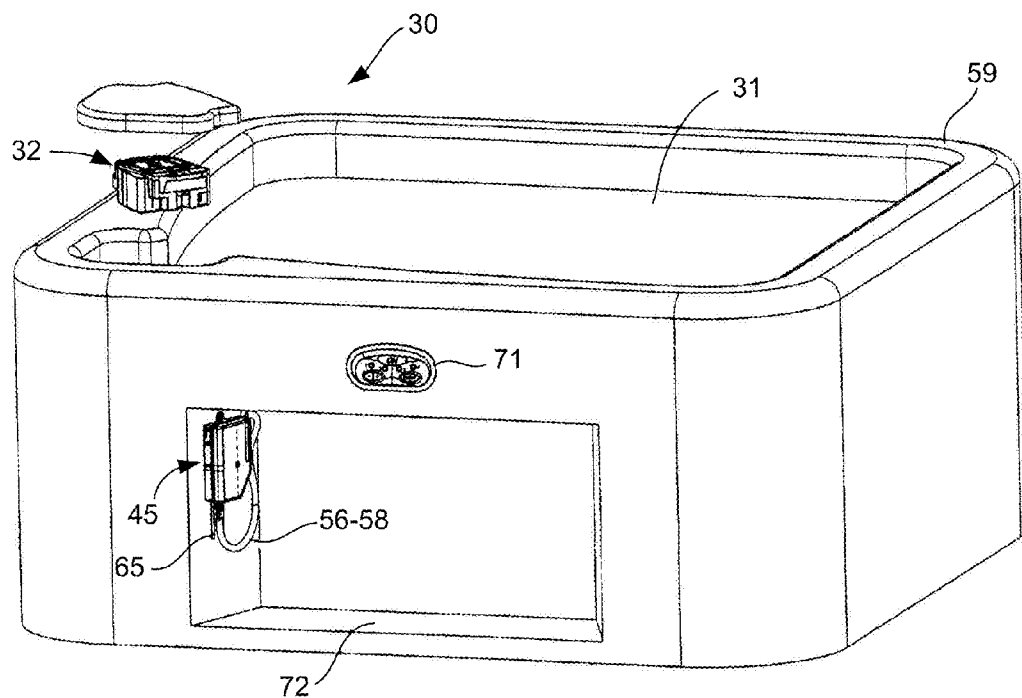


**FIG. 1**

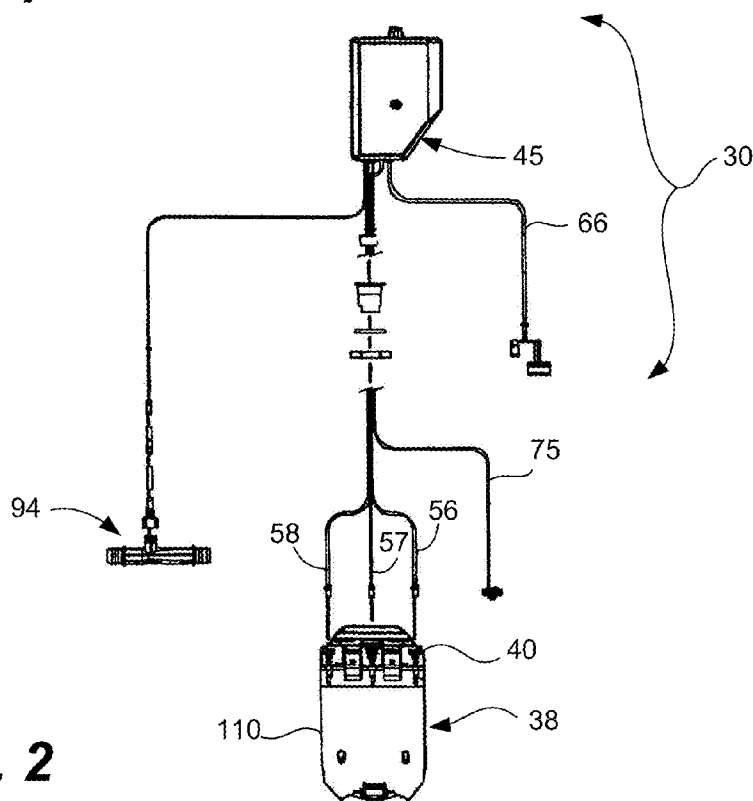


**FIG. 2**

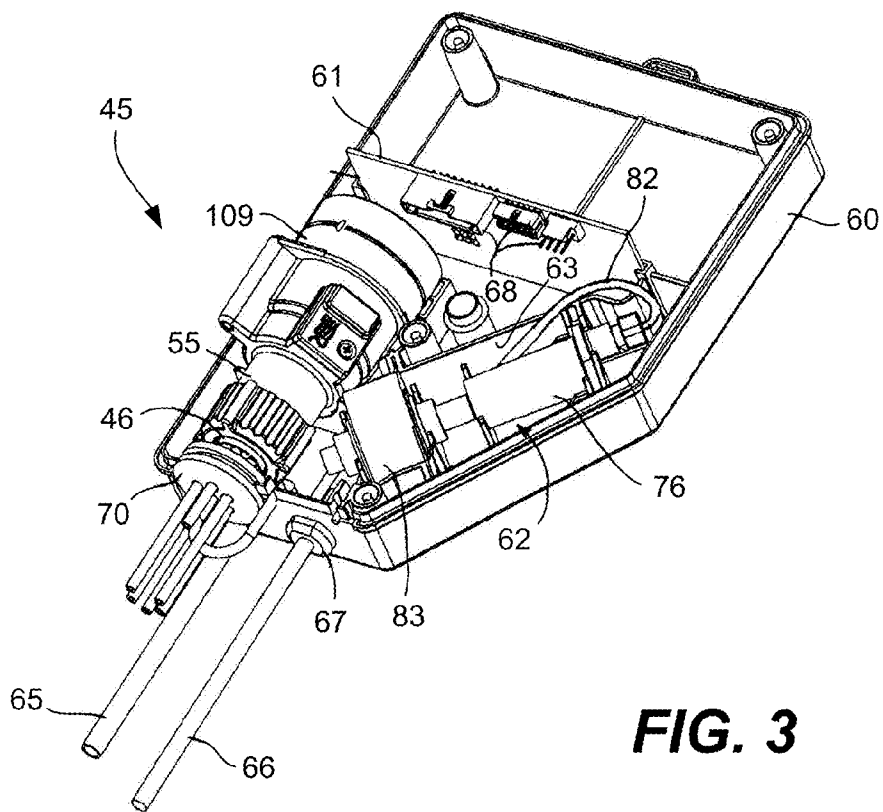


**FIG. 3**

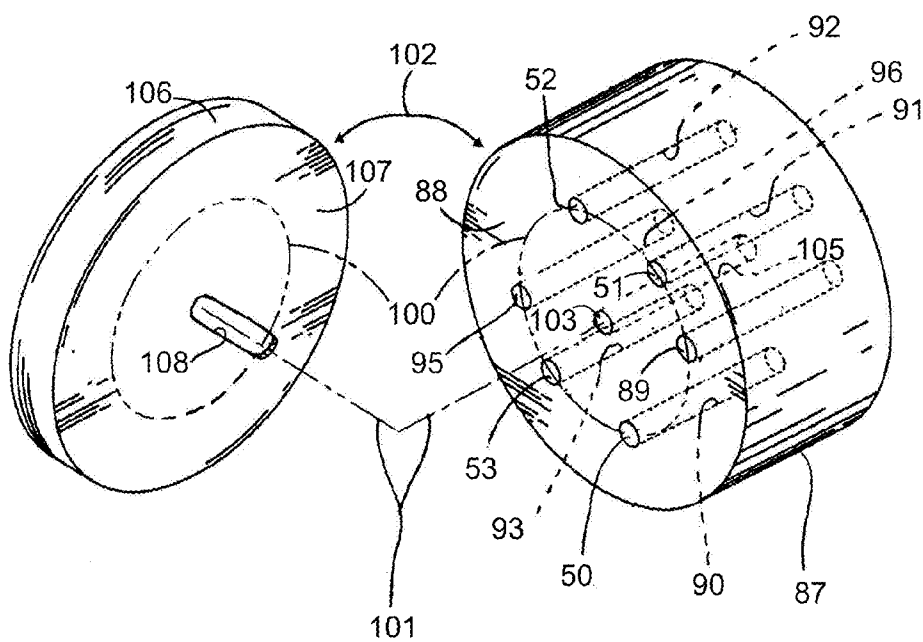

**FIG. 7**

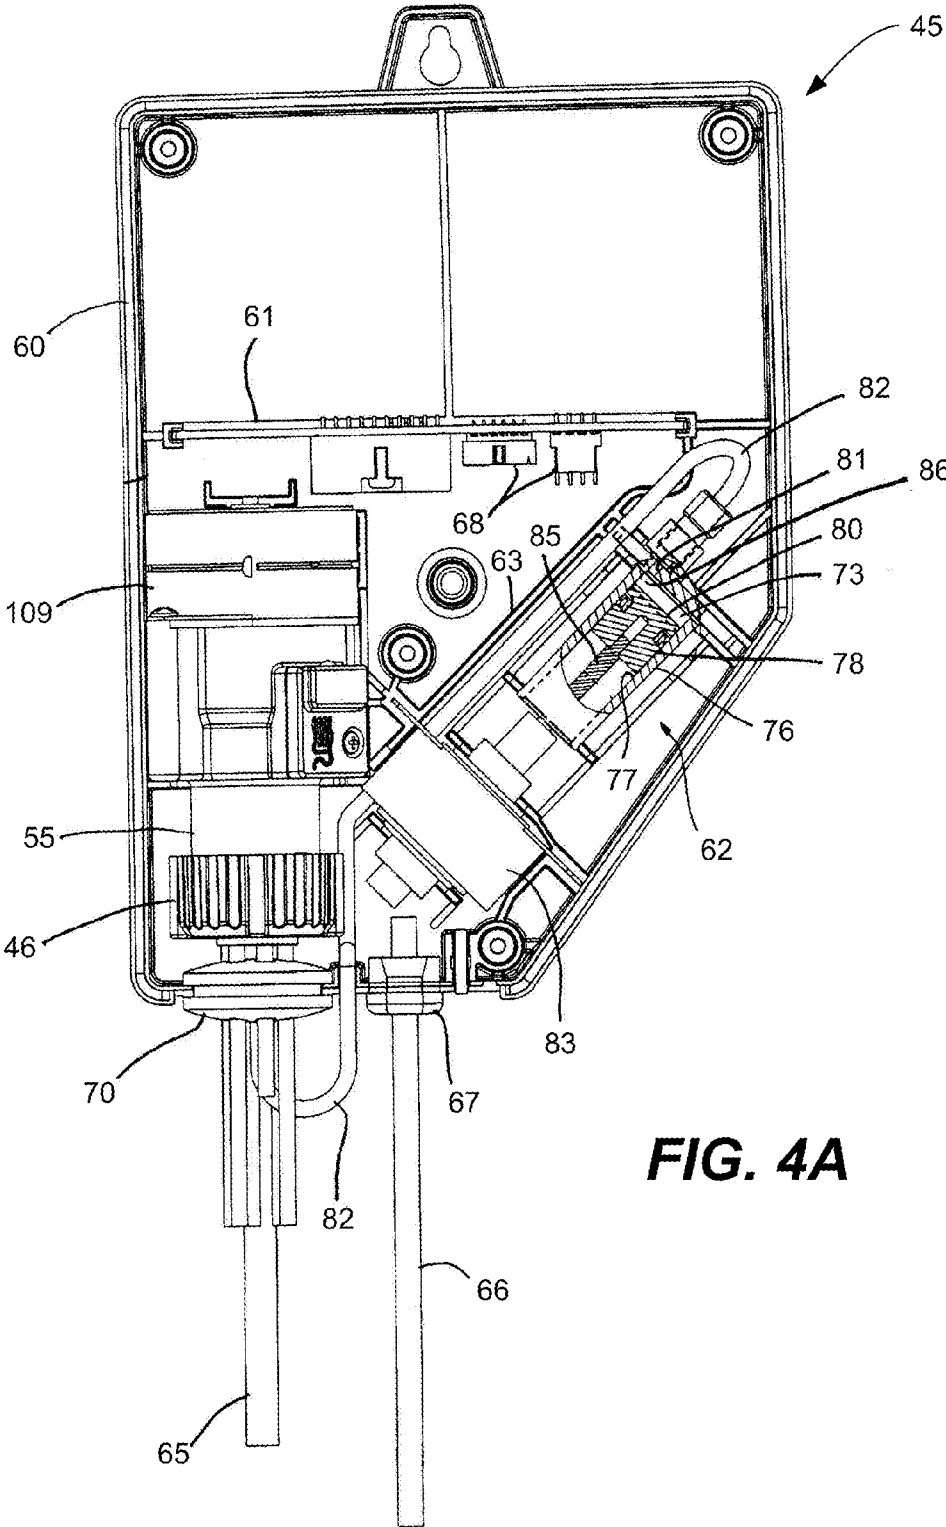

**FIG. 4A**

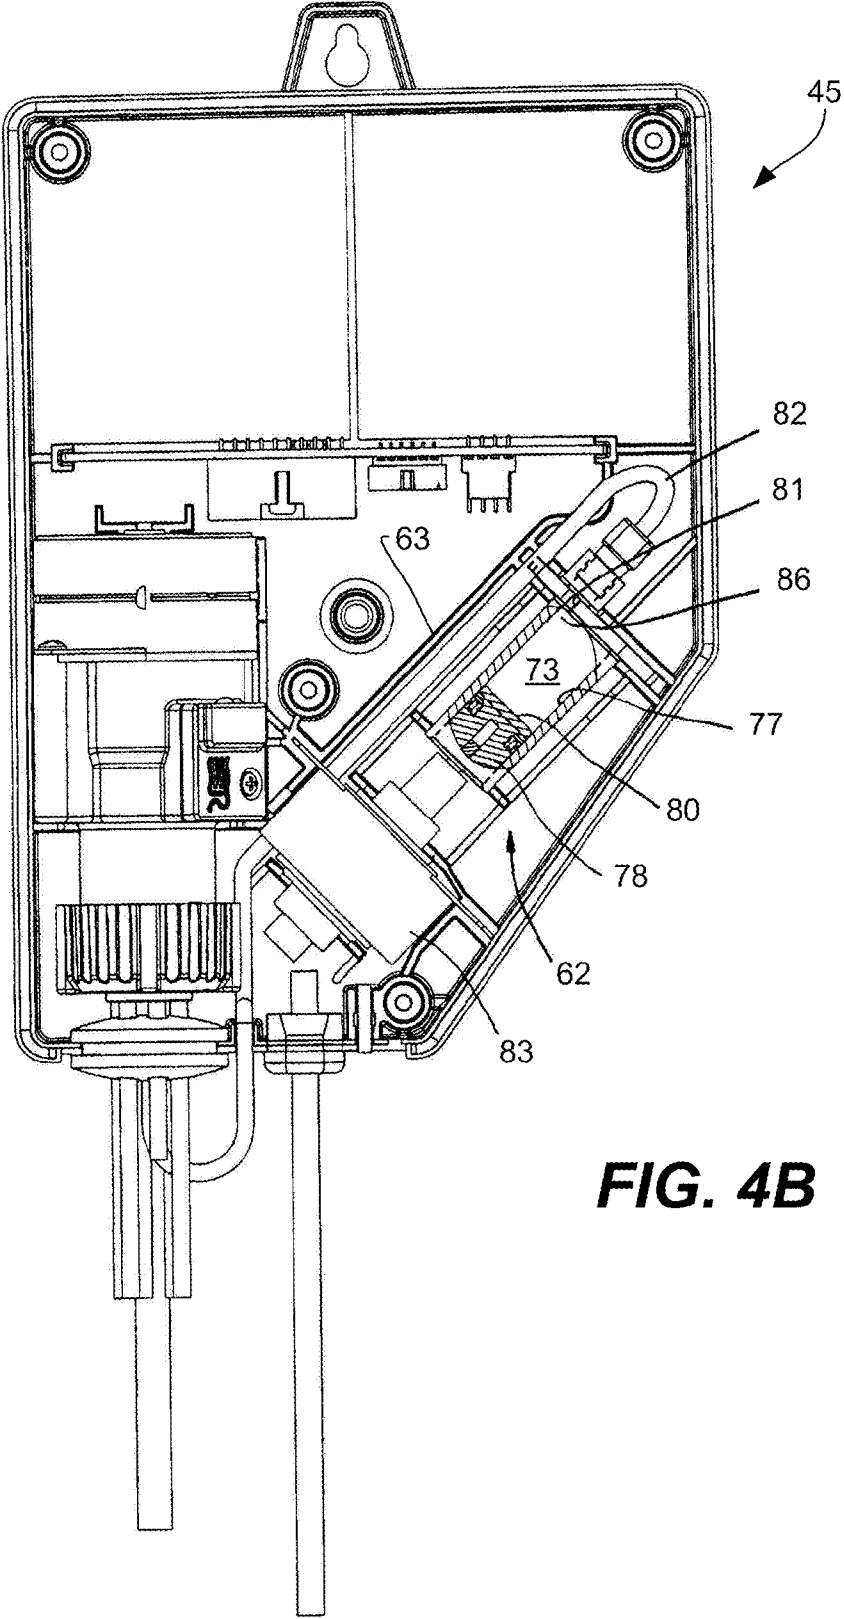

**FIG. 4B**

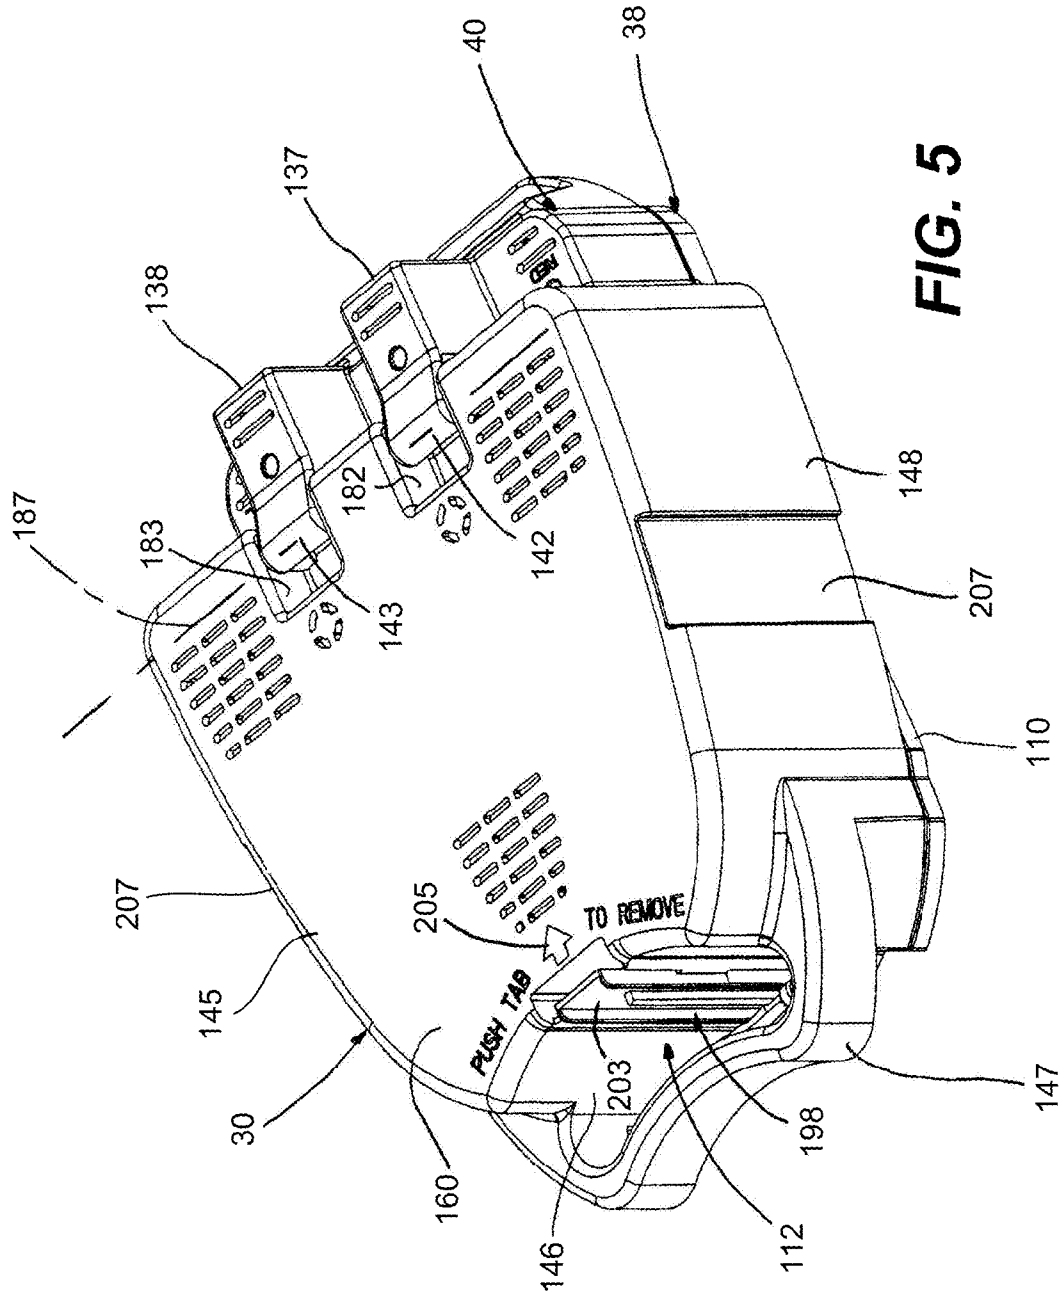


FIG. 5



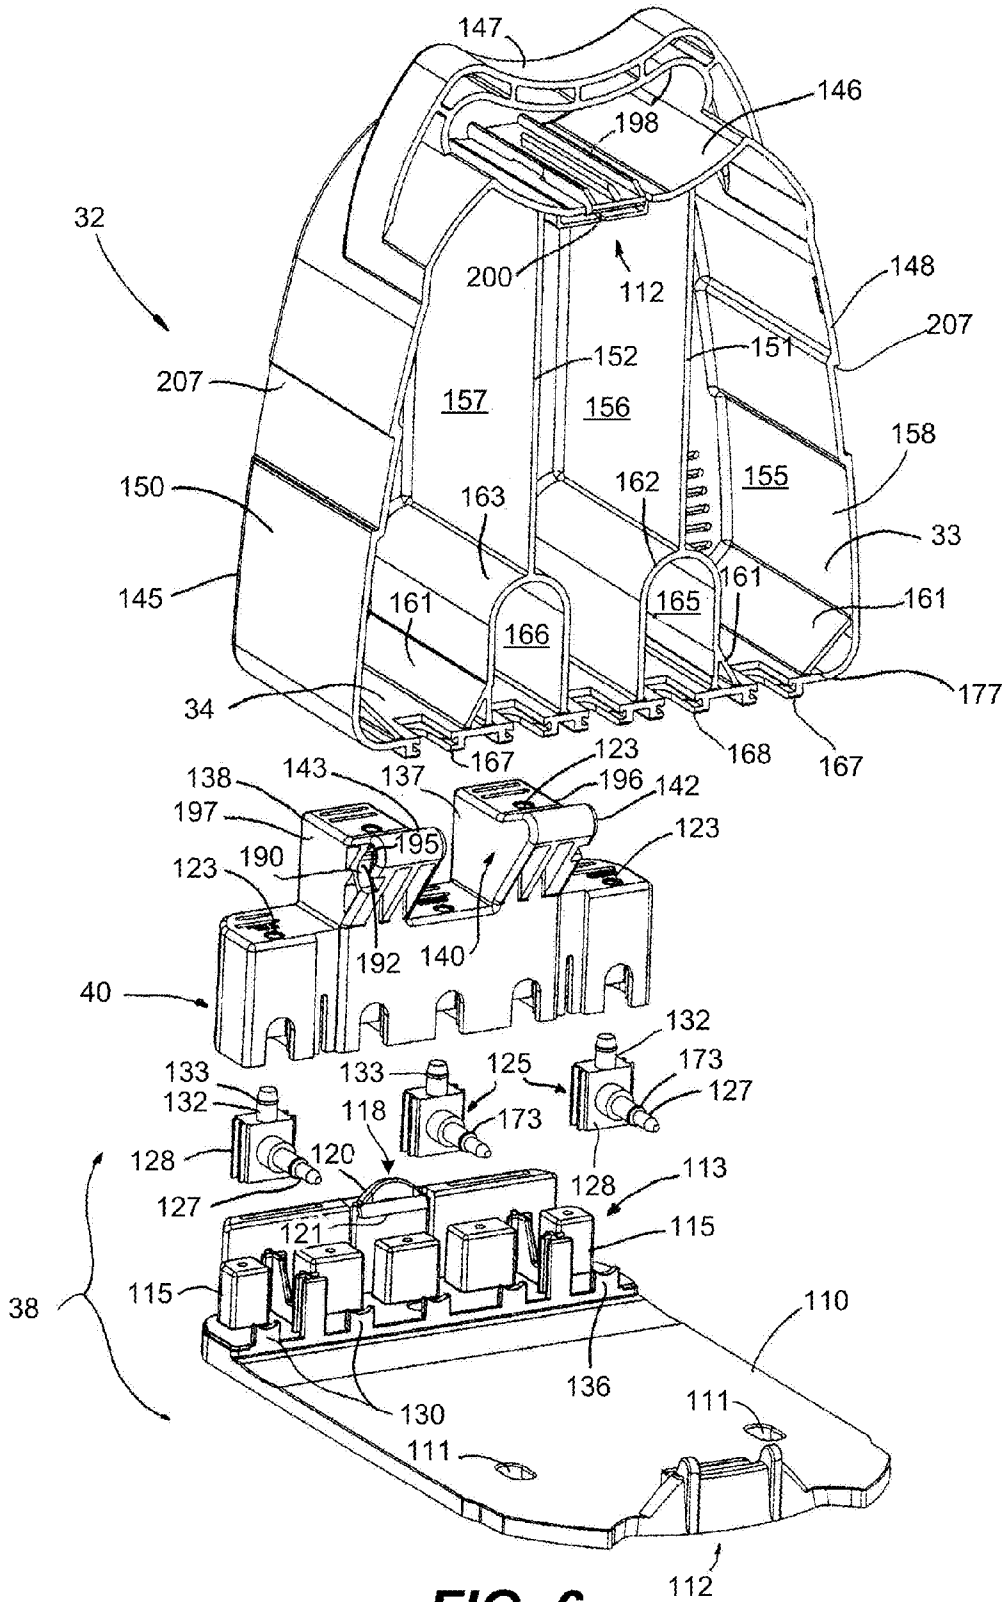


FIG. 6




**FIG. 8A**

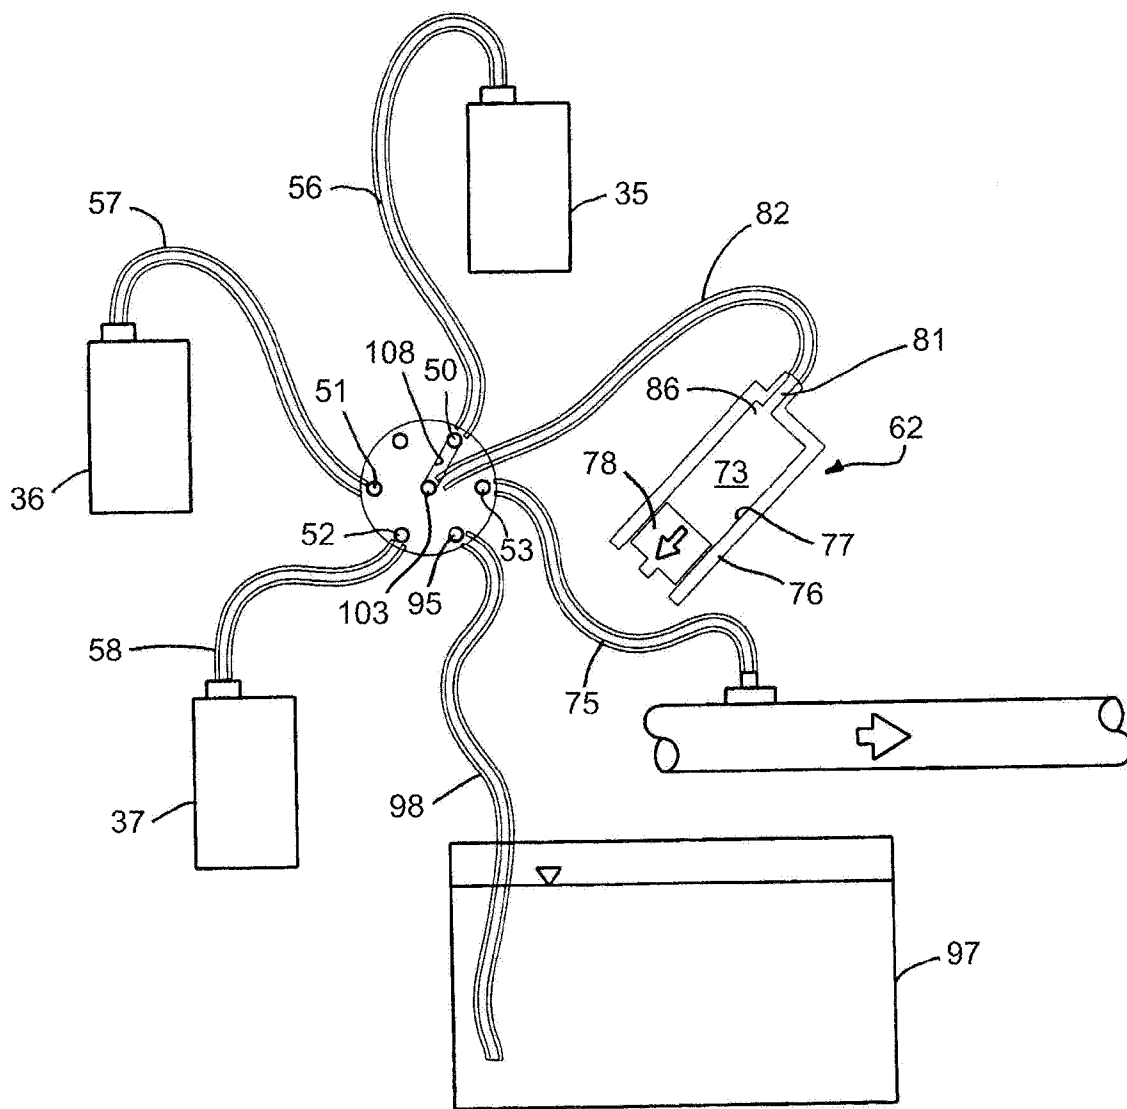

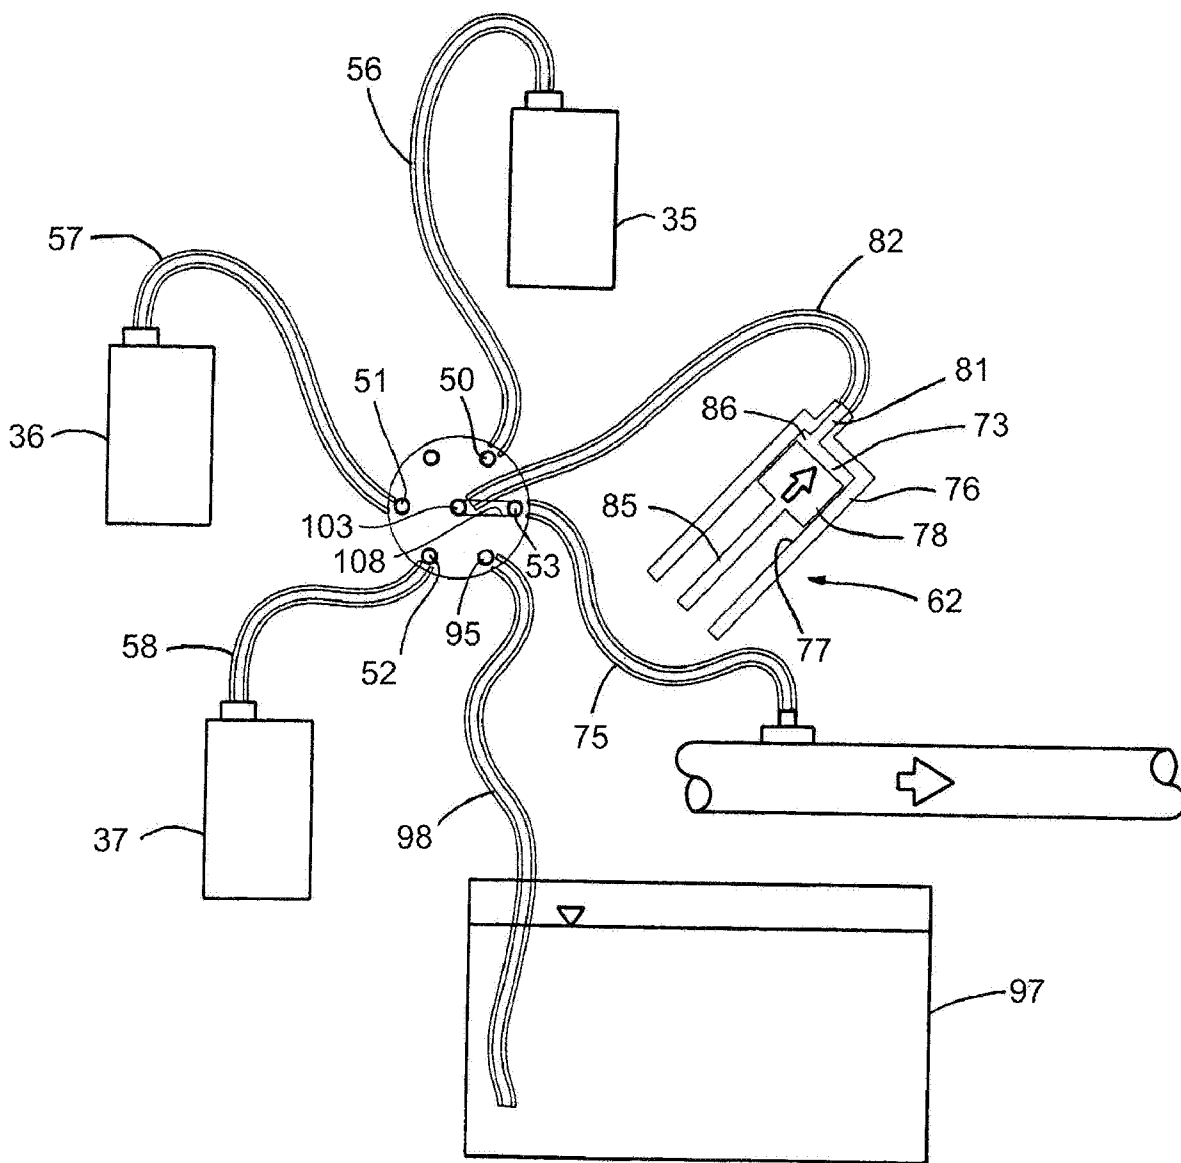


**FIG. 8B**

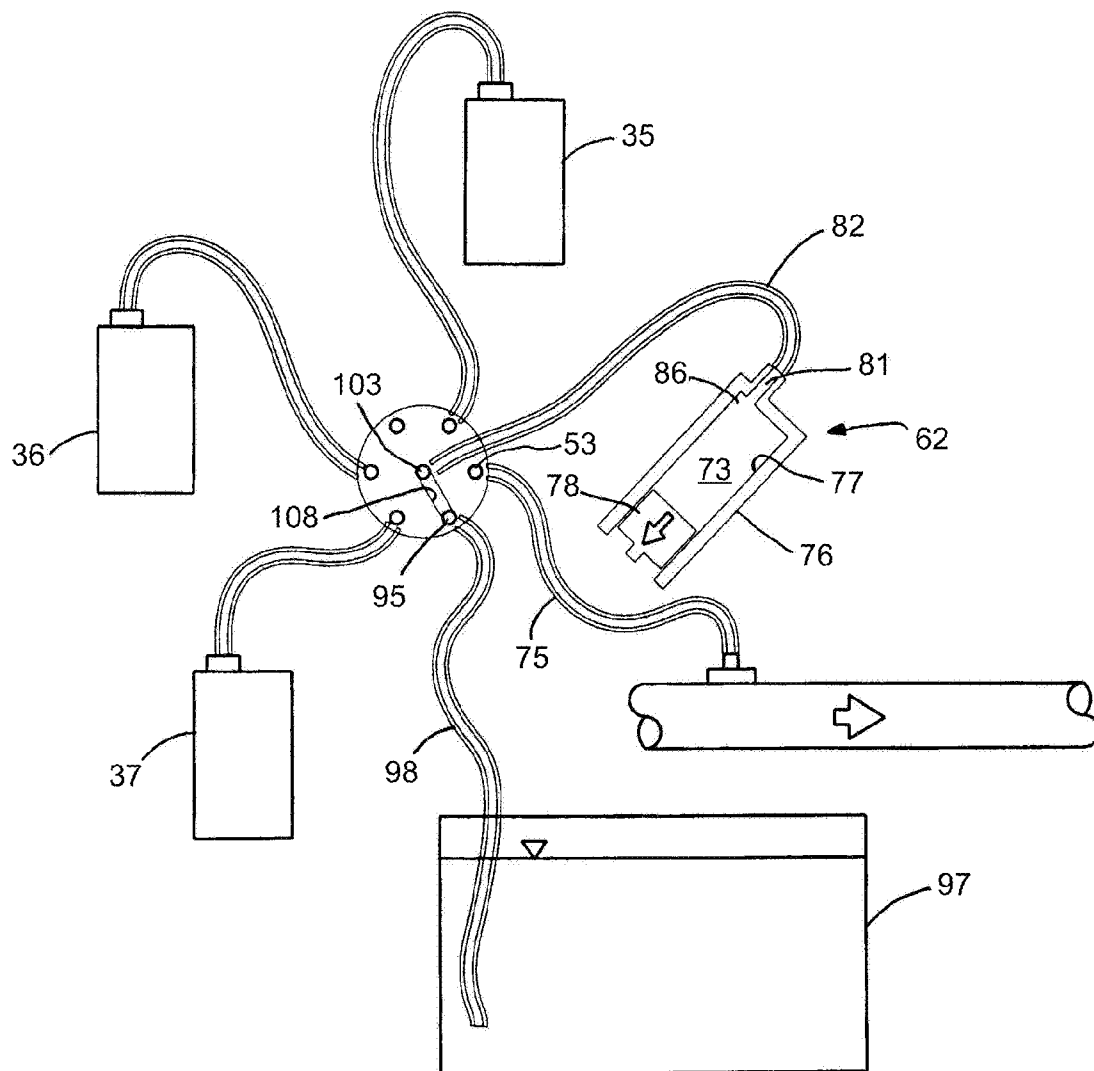


**FIG. 8C**




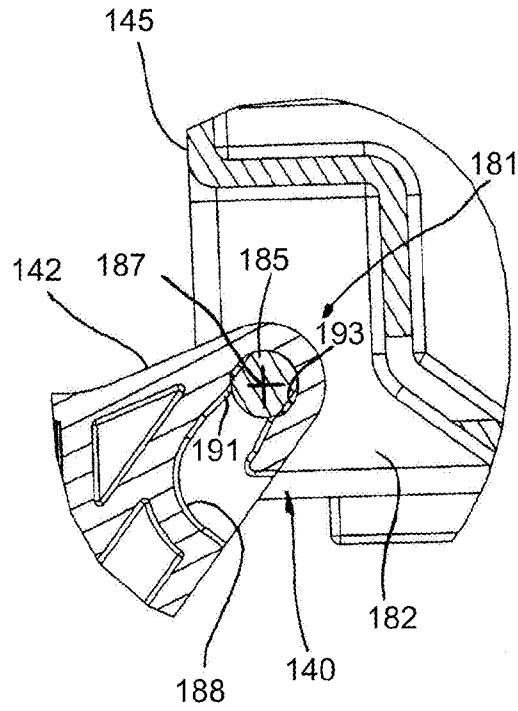

**FIG. 12**

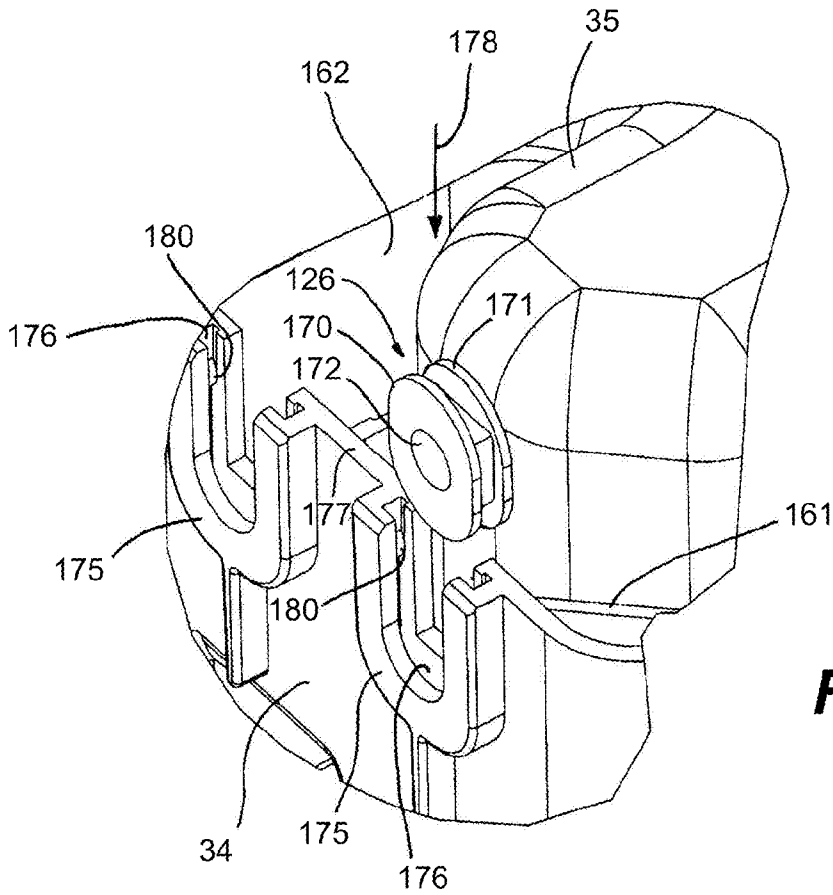


**FIG. 10**

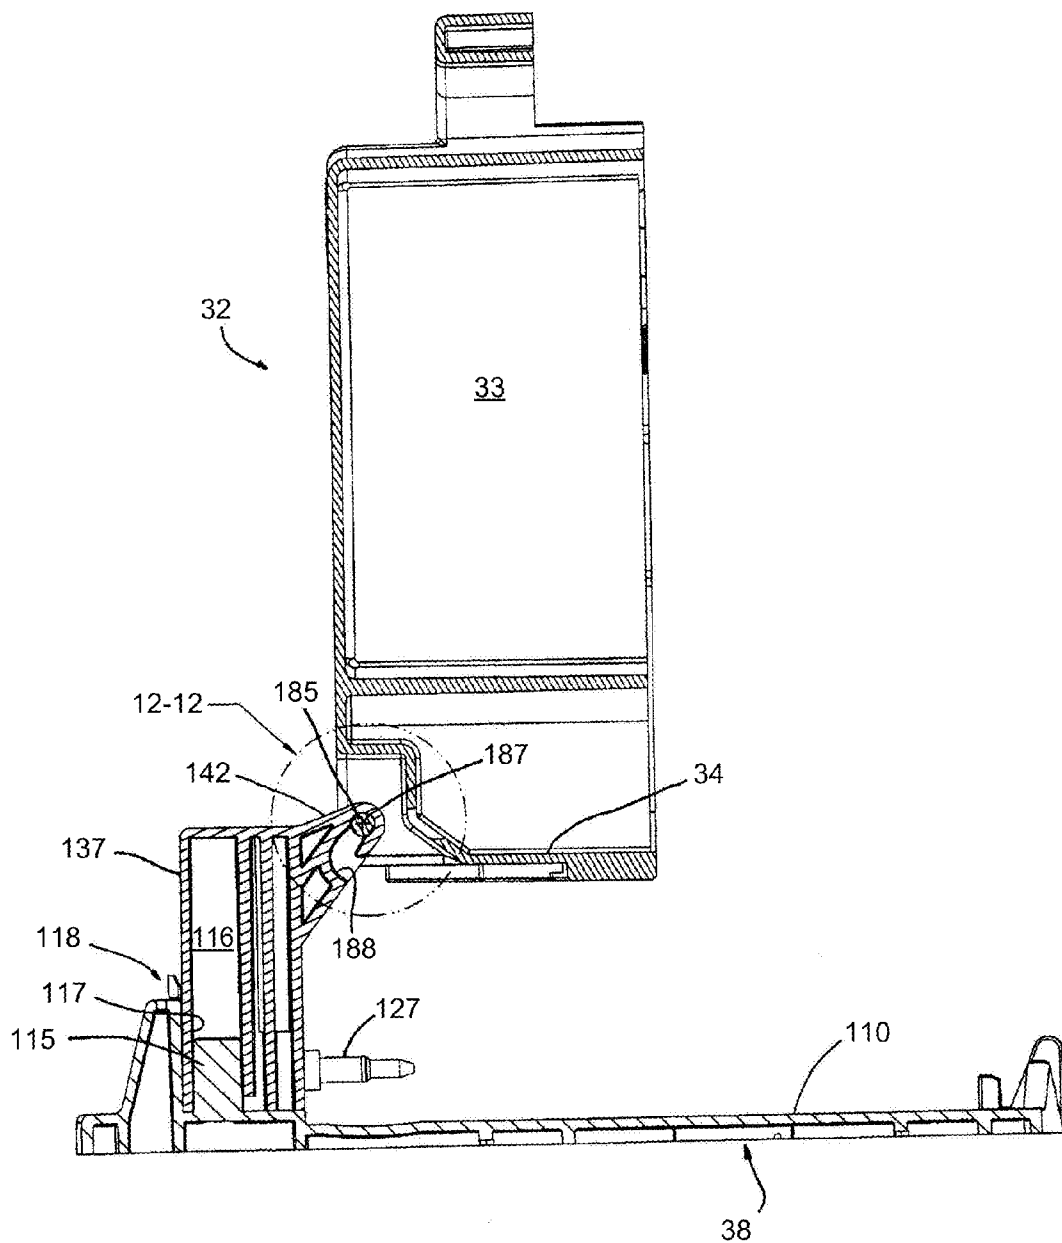

**FIG. 11A**




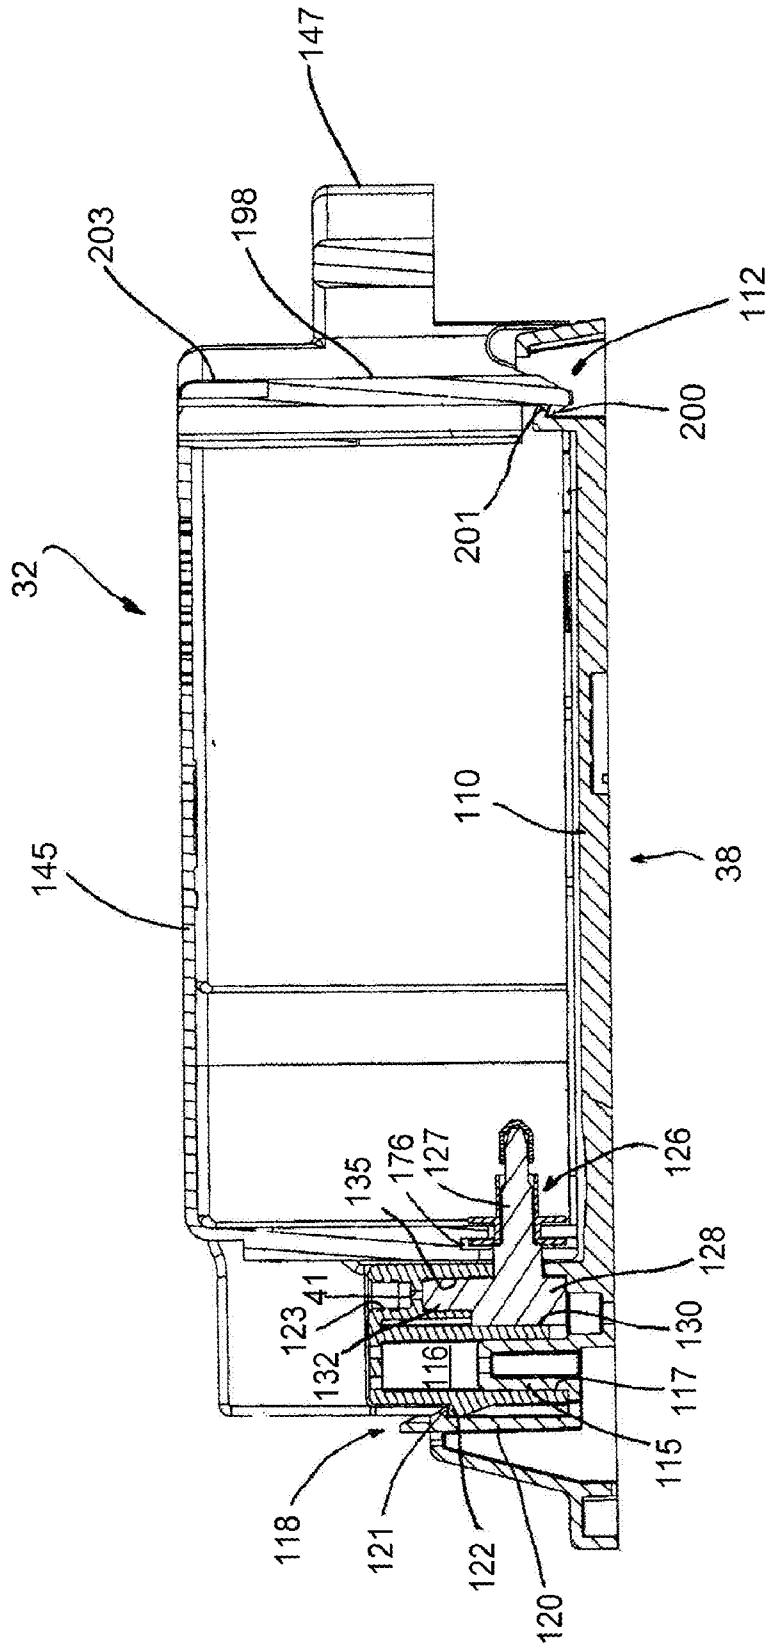


**FIG. 11C**






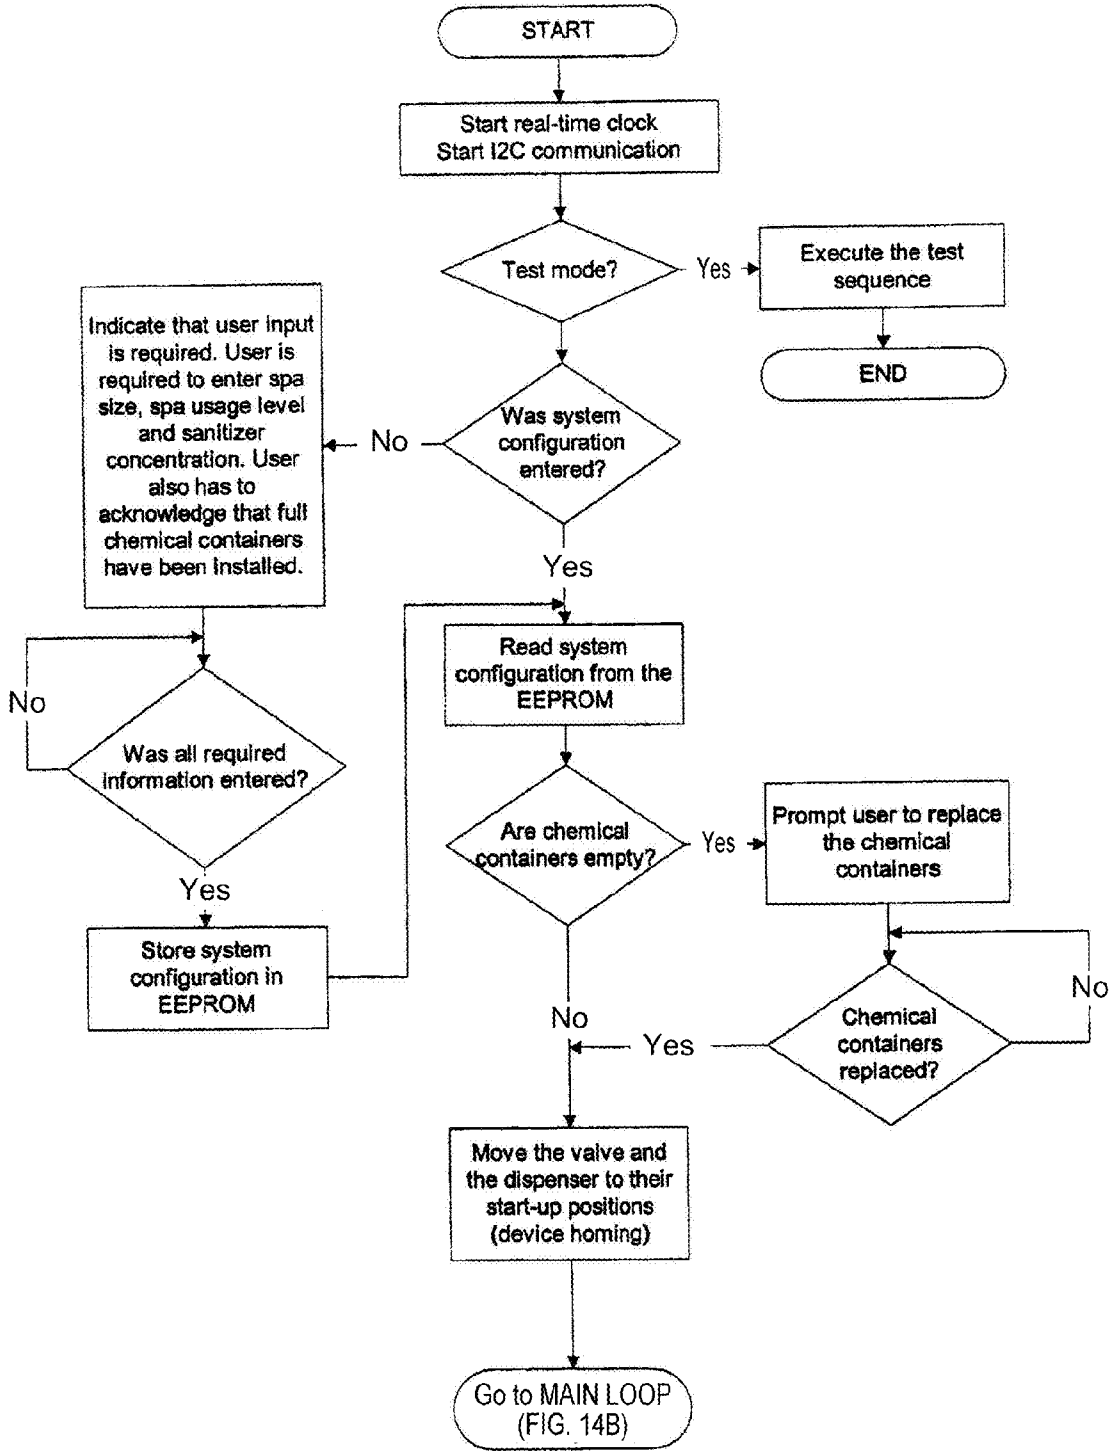


**FIG. 14A**

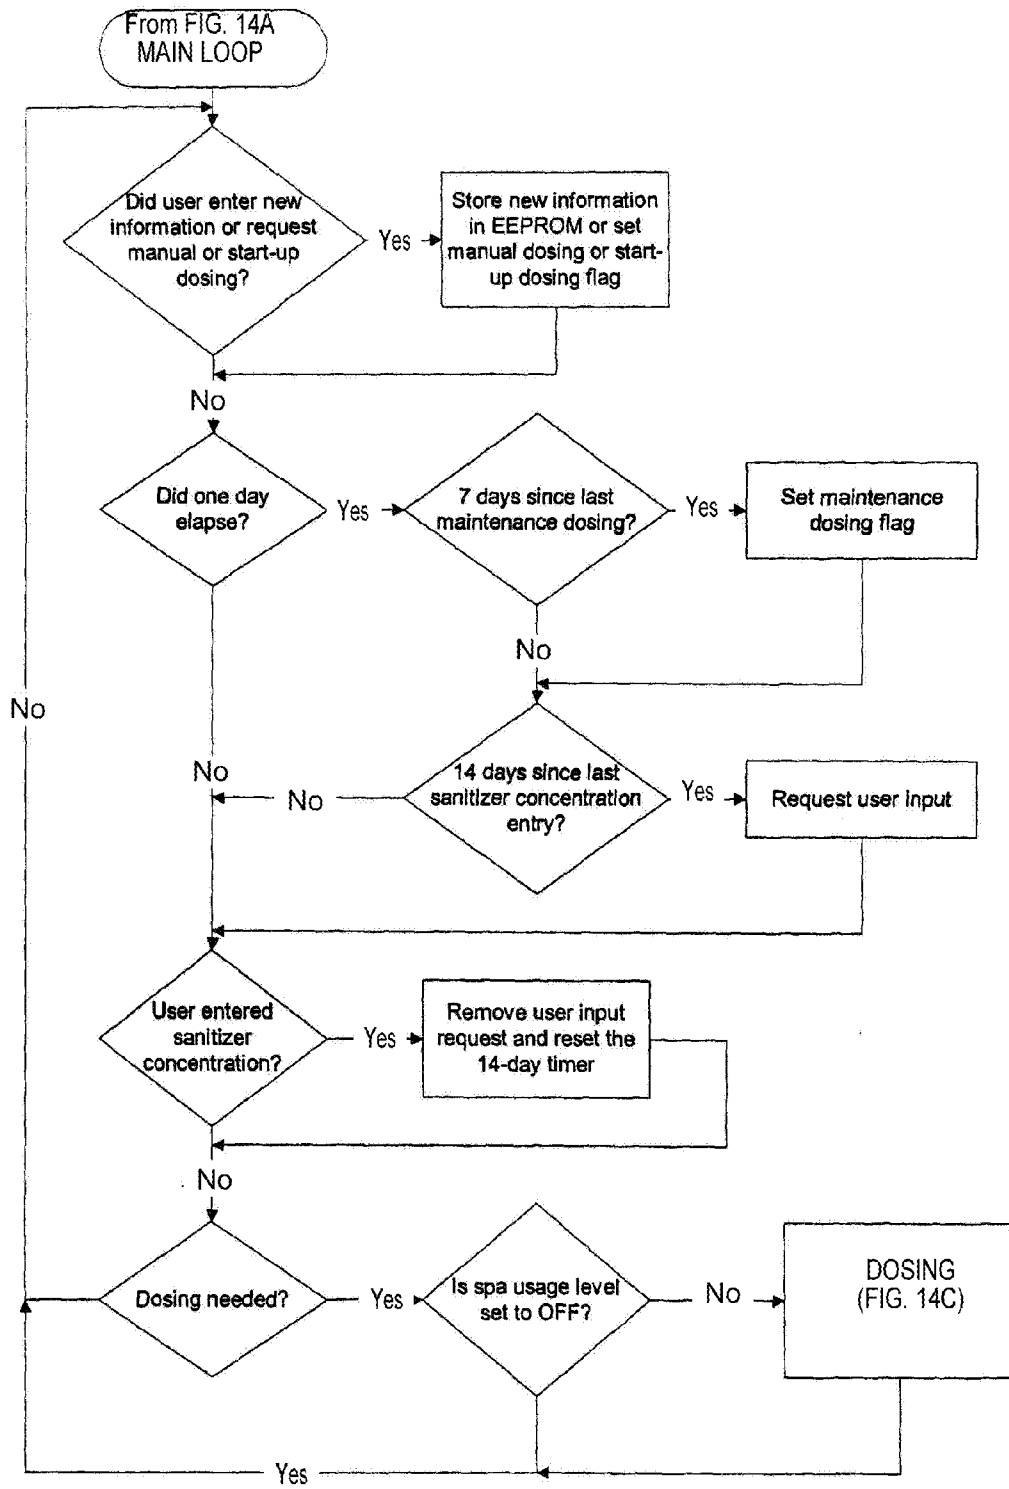

**FIG. 14B**

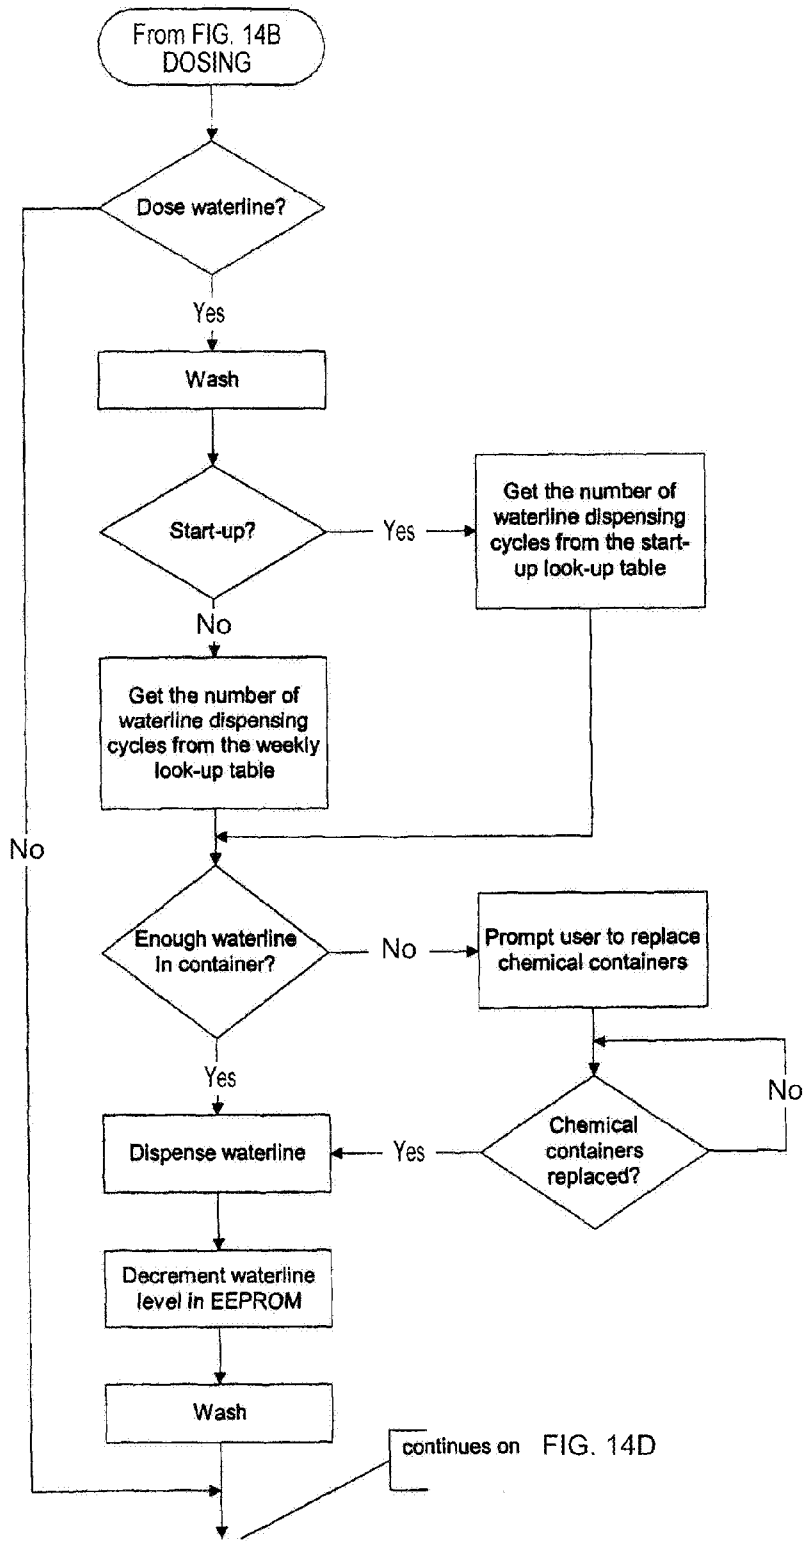

**FIG. 14C**

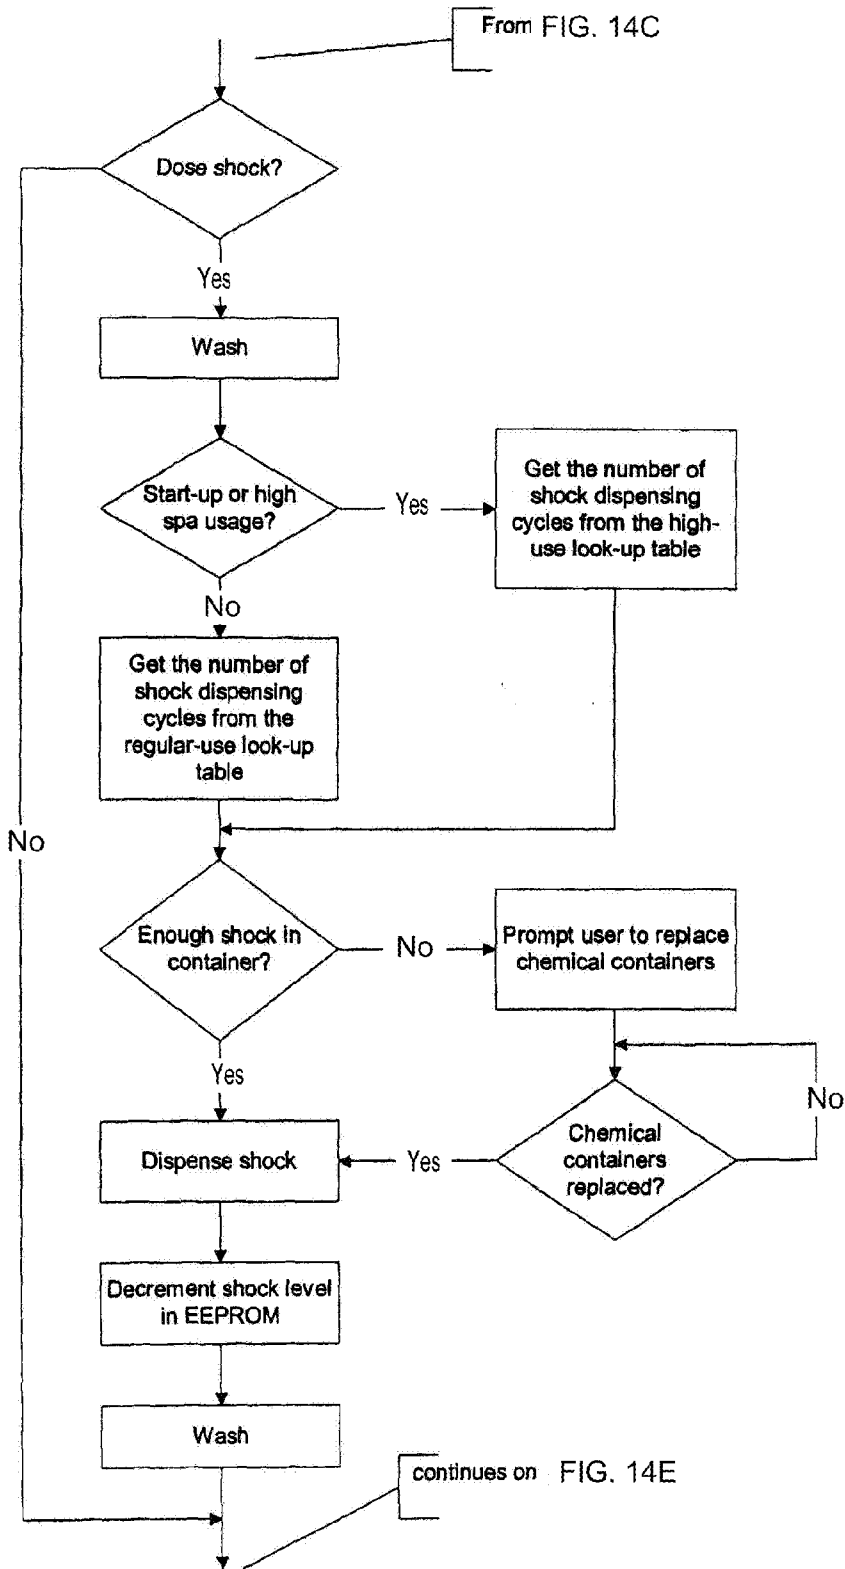

**FIG. 14D**


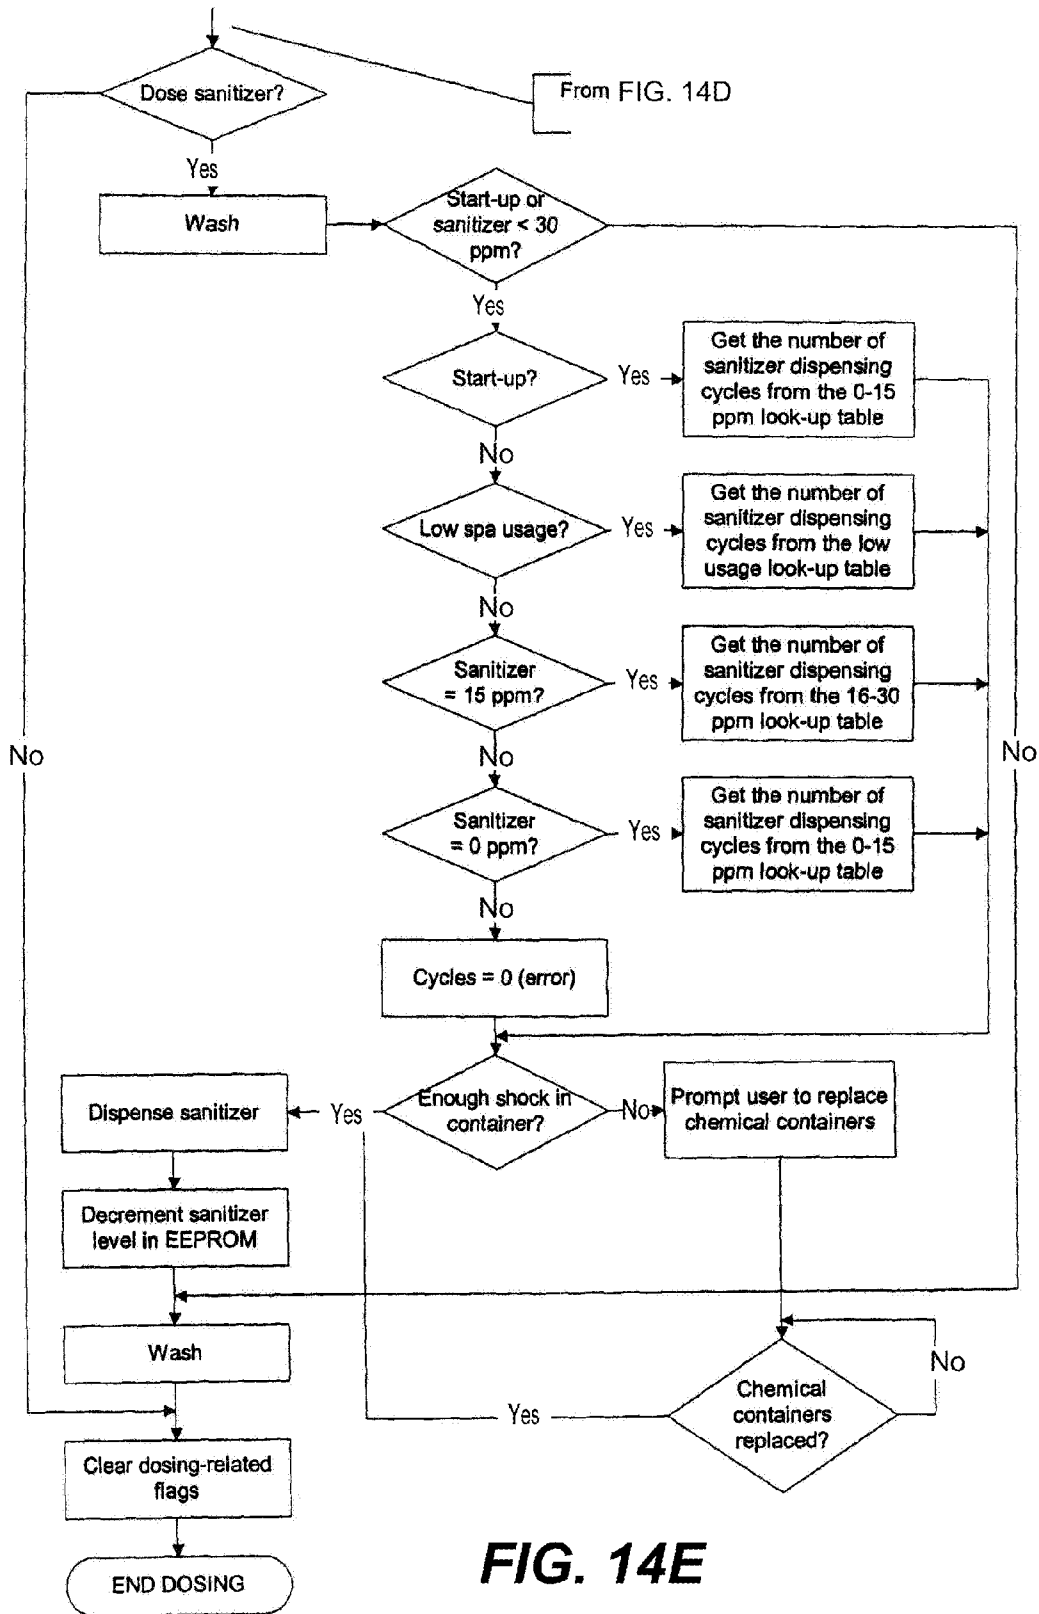


FIG. 14E

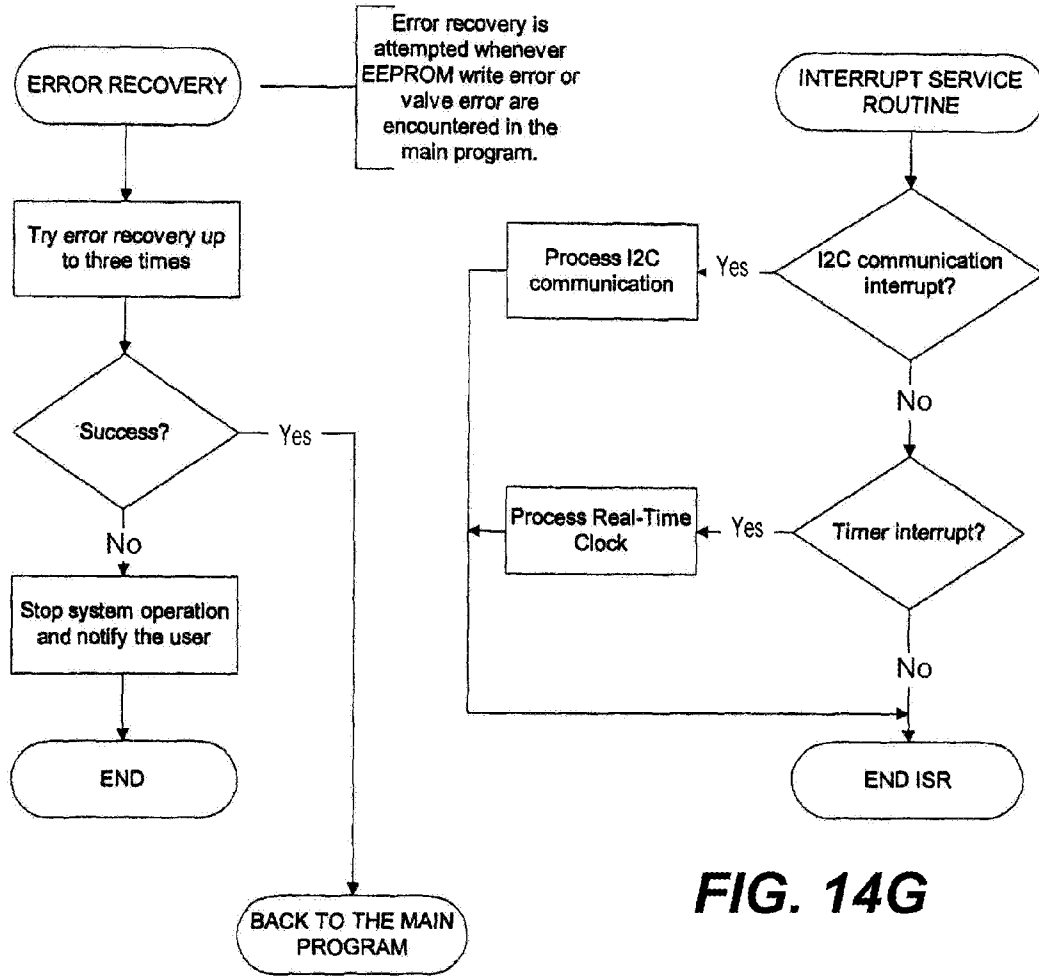

**FIG. 14F**

**FIG. 14G**

**DOSING ENGINE AND CARTRIDGE  
APPARATUS FOR LIQUID DISPENSING AND  
METHOD**

RELATED APPLICATION DATA

[0001] This application is a continuation of U.S. application Ser. No. 10/977,325, (Attorney Docket No. RDYNP006), naming Straka et al., and filed Oct. 29, 2004, and entitled DOSING ENGINE AND CARTRIDGE APPARATUS FOR LIQUID DISPENSING AND METHOD, which claims priority under 35 U.S.C. §119 to U.S. Provisional Application Ser. No. 60/515,721 (Attorney Docket No. RDYNP006P), naming Servin et al. inventors, and filed Oct. 29, 2003, and entitled DOSING ENGINE ASSEMBLY FOR A RECREATIONAL BODY OF WATER, the entirety of which is incorporated herein by reference in its entirety for all purposes.

TECHNICAL FIELD

[0002] The present invention relates to liquid dispensers, and more particularly, relates to automated liquid dispensers of reagents for recreational bodies of water.

BACKGROUND ART

[0003] Manual dispensing of a specific quantity of liquid or solid chemical into a body of water is common in industrial and residential applications. Adding laundry detergent to a clothes washer or anti-streaking wetting agent to the dishwasher are only two everyday residential examples. Consumers of appliances such as these are always searching for features that save them time and increase performance. Frequently, the feature of greatest value to the time strapped consumer is automation of the dispensing activity. Automation is highly valued by consumers since, in the examples cited above, it eliminates the need for messy manual volumetric measuring but more importantly, it removes the possibility that chemical dispensing was forgotten prior to initiating the activity.

[0004] The hot tub or pool is another example of an application where chemicals are routinely dispensed into a body of water, typically manually. In the case of a hot tub, water chemistry is critical for maintaining water sanitation and ultimately, water safety. Currently consumers are asked to regularly (at least bi-weekly) measure the condition of the water and then manually dispense an appropriate amount of a water treatment chemical or chemicals into the water. While some consumers are willing or able to accomplish this task religiously, it is well known that many residential tubs are not maintained appropriately. *Mycobacteria: Health Advisory*, United States Environmental Protection Agency, Office of Science and Technology, EPA-822-B-01-007 (August 1999). In some cases this can result in serious water quality conditions that can expose users to infectious bacteria such as mycobacteria (Id.). The main reasons these tubs are poorly maintained is consumer forgetfulness to address the water every two weeks and/or mistakes in dosing.

[0005] Given that a hot (100° F.-104° F.) body of water is significantly more susceptible to microbiological contamination, having a system that maintains superior water quality via automated water chemical dispensing into hot tubs would be a very high-value consumer product.

[0006] Further, due to the importance of proper recreational water maintenance, many pool and spa treatment systems

have been developed in the past. For example, U.S. Pat. No. 4,992,156 discloses a pool purifier based on electrolytic production of chlorine. A bromine-generating system for portable spas is described in U.S. Pat. No. 6,238,555. It also uses an electrolytic cell for electrochemical bromine production, but employs an amperometric sensor for accurate determination of bromine levels in spa water. The sensor output is then used to control the power supply, and in turn, the electrolytic cell, in order to maintain bromine levels in spa water within preset limits.

[0007] Although the system is effective in producing and maintaining bromine levels in portable spas, its' operation is based on adding salts to spa water, which can lead to corrosion of metallic spa components (heaters, pumps etc.). Bromine degrades upon exposure to sunlight and is not odor-free. Also, some people's skin is too sensitive to halogens, while others find presence of salts in water objectionable.

[0008] Accordingly, there is a need for liquid dispensing systems that accomplish the task of dispensing the proper dose of water treatment chemical(s) into a pool or hot tub, thereby eliminating the errors inherent in manual additions but at least equally important, and eliminating the possibility that dosing was not accomplished at the recommended interval.

DISCLOSURE OF INVENTION

[0009] The present invention provides a liquid dispensing system for automated dispensing of a plurality of liquid reagents into a recreational body of water. The liquid dispensing system includes a cartridge apparatus defining a cavity, and a cartridge front wall. A plurality of liquid reagent containers are included, each containing a respective liquid reagent and each being disposed in the cavity in a manner permitting access to each respective liquid reagent through the front wall. A docking assembly is provided having a dock manifold device, and is releasably coupled to the cartridge apparatus between a first condition and a second condition. In a first condition, the cartridge apparatus can be removably coupled to the docking assembly, while in the second condition, the cartridge apparatus is lockably mounted to the docking assembly in a manner permitting fluid communication through the cartridge front wall from the respective reagent container to respective fluid passages of the manifold device. The dispensing system further includes a dosing engine having a valve manifold device that includes a plurality of intake ports and a dispensing port. The intake ports are fluidly coupled to the respective dock manifold fluid passages, via connection tubes, and the dispensing port is configured to deliver the liquid reagents to the body of water. The dosing engine further includes a valve assembly fluidly coupled to the valve manifold device to manipulate the flow distribution between the respective intake ports and the dispensing port. In this manner, the respective liquid reagents can then be selectively dispensed to the recreational body of water through the dispensing port.

[0010] Accordingly, a set of liquid reagents necessary to maintain recreational bodies of water (e.g., spas, pools, etc.) in a sanitary condition, can be automatically dispensed in the proper amounts and at the proper intervals. Due to the simplistic design, the cartridge apparatus, that contains liquid reagent containers, can be mounted for delivery of the reagents into the body of water, while the dosing engine can be remotely positioned in a safe location.

**[0011]** In one specific embodiment, the valve manifold of the dosing engine includes a stator element defining a first inlet passage fluidly coupled to one of the reagent reservoirs. The stator element includes a first inlet port of the plurality of inlet ports that terminates at a stator face lying in an interface plane. The stator element further includes a second inlet passage fluidly coupled to the dispensing port that also terminates at the stator face. The stator element also includes a third inlet passage having one portion fluidly coupled to the pump device and another portion fluidly coupled to a drive port. The valve assembly including a rotor element that defines a rotor face oriented in the interface plane in opposed relationship to and contacting the stator face in a fluid-tight manner. The rotor element defines a channel that is rotatably movable about a rotational axis, relative to the stator face, for rotational movement of the rotor face between at least a discrete first aspirate and dispense position. In first aspirate position, the channel fluidly couples the first inlet port and the drive port, while in the dispense position, the channel fluidly couples the dispensing port and the drive port.

**[0012]** In another embodiment, the dosing engine includes a fluid containment reservoir, having a discrete volume, in fluid communication with the drive port and the pump device for containment of liquid reagent therein. In the first aspirate position, a discrete volume of liquid reagent from the one reagent reservoir can be aspirated, via a pump device, through the first intake port, the drive port and into the containment reservoir. In the dispense position, the discrete volume of liquid reagent contained in the containment reservoir can be dispensed therefrom, via the pump device, through the drive port and out of the dispensing port.

**[0013]** In still another configuration, the stator element further includes a wash passage having one portion configured to fluidly couple to a wash reservoir, and another portion fluidly coupled to a wash port that terminates at the stator face. The rotor element is further rotatably movable to at least a discrete wash position. In this orientation, the channel fluidly couples the wash port and the drive port. This enables the pump device to aspirate wash fluid through the wash port, the drive port and into the containment reservoir.

**[0014]** The dosing engine, in one embodiment, includes a pump device that has a pump barrel defining a cavity. A reciprocating piston is disposed in the cavity, and cooperates to define a substantial portion of the fluid containment reservoir. The pump barrel is preferably angled during operation thereof in a manner creating an apex portion in the cavity. The pump barrel contains an offset pump port extending into the apex portion to facilitate purging thereof.

**[0015]** Another aspect of the present invention provides a liquid dispensing system for automated dispensing of a plurality of reagents into a recreational body of water. The system includes a plurality of reagent reservoirs each containing a liquid reagent, and a valve manifold device having a plurality of intake ports. Each reagent reservoir is fluidly coupled to a respective intake port. A dispensing port, in contrast, is in fluid communication with the recreational body of water. A valve assembly is movable between a plurality of discrete positions between the intake ports and the dispensing port for selective dispensing of the liquid reagents through the dispensing port and to the recreational body of water.

**[0016]** In still another aspect of the present invention, a liquid dispensing system is provided for dispensing of a plurality of liquid reagents, each of which is contained in a separate respective reagent container. The dispensing system

includes a docking assembly having a manifold device that is configured to distribute liquids therethrough. The docking assembly further includes a mounting structure and a plurality of dock connectors in fluid communication with the manifold device. A cartridge apparatus includes a body member defining a front wall, and a central cavity therein. The cartridge apparatus further includes a first dividing wall separating the central cavity into a first compartment and an adjacent second compartment. The first and second compartments are each sized and dimensioned for receipt and support of a respective reagent container therein. The cartridge apparatus further includes a first and second connector support that is coupled to the front wall for communication with the respective first and second compartment. The first and second connector supports are each formed and dimensioned for sliding engagement with a respective collared connector therebetween to enable receipt and support of the respective reagent container in the respective first and second compartment. Further the first and second connector supports cooperate with the respective collared connector to provide a predetermined amount of sliding longitudinal movement therebetween. The dispensing system further includes a mounting device coupled to the cartridge apparatus, and configured to cooperate with the docking assembly mounting structure for movement of the cartridge apparatus between a first condition and a second condition. In the second condition, the cartridge apparatus is removably mounted to the docking assembly. In accordance with this aspect of the present invention, during movement of the cartridge apparatus from the first condition to the second condition, the respective collared connectors of the reagent containers, slideably mounted to the respective first and second connector support, are aligned and engaged with the respective dock connector of the docking assembly for fluid-tight mating therebetween.

**[0017]** In one specific embodiment, the mounting device and the mounting structure cooperate for hinged movement of the cartridge apparatus relative the manifold device. Thus, during movement between the first condition and the second condition, an engagement between the respective collared connectors of the associated reagent container and the respective dock connectors is a curvilinear motion. The mounting device includes a hinge pin, while the mounting structure includes a hinge slot formed and dimensioned for sliding receipt of the hinge pin. In a locking position, the mounting device is releasably locked to the mounting structure, and enables the hinged movement of the cartridge apparatus about a rotational axis of the hinge pin between the first condition and the second condition.

**[0018]** In still another aspect of the present invention, a transportable reagent cartridge apparatus is provided including a body member defining a central cavity therein, and having a front wall. A first dividing wall is included that separates the central cavity into a first compartment and an adjacent second compartment. Each compartment is sized and dimensioned for receipt and support of a respective reagent container therein. A first and second connector support is also included that is coupled to the front wall for communication with the respective first and second compartment. Further, each connector support is formed and dimensioned for sliding engagement with a respective collared connector therebetween to enable receipt and support of the respective reagent container in the respective first and second compartment. The connector supports further cooperate with the respective collared connector to provide a predetermined



amount of sliding longitudinal movement therebetween. The cartridge device further includes a mounting device coupled to the body member, and is configured to cooperate with the docking assembly mounting structure between a first condition and a second condition. During movement of the cartridge apparatus from the first condition to the second condition, the second condition of which the cartridge apparatus is removably mounting to the docking assembly, the respective collared connectors, slideably mounted to the respective connector supports, are aligned and engaged with the respective dock connector for fluid-tight mating therebetween.

[0019] In one specific embodiment, each connector support includes a U-shaped groove extending downwardly from a lower edge portion of the front wall, and formed for sliding receipt of the respective collared connector therein. Each connector support includes a first tang and an opposed second tang extending into a respective groove thereof. The first and second tangs cooperate with the respective collar connectors to retain the collar connector in the respective groove.

[0020] In another configuration, the first dividing wall further cooperates with the body member to define pocket compartment proximate to the front wall. This pocket compartment is formed and dimensioned for receipt of a respective reagent container therein. The pocket portion of the first dividing wall is Y-shaped proximate to and cooperating with the front wall to form a portion of the pocket compartment.

[0021] In still another specific embodiment, the cartridge apparatus includes a strap device mounted to the body member, and extending over the cavity opening in a manner retaining respective reagent containers in the respective first and second compartments during transportation. To facilitate alignment and retention of the strap device, the body member includes at least one strap alignment groove along an exterior wall thereof that is formed and dimensioned for aligned receipt of the strap device.

#### BRIEF DESCRIPTION OF THE DRAWING

[0022] The assembly of the present invention has other objects and features of advantage which will be more readily apparent from the following description of the best mode of carrying out the invention and the appended claims, when taken in conjunction with the accompanying drawing, in which:

[0023] FIG. 1 is an exploded top perspective view of a spa assembly incorporating a liquid dispensing system designed in accordance with the present invention.

[0024] FIG. 2 is a schematic diagram of the liquid dispensing system of FIG. 1.

[0025] FIG. 3 is an enlarged top perspective view of a dosing engine of the liquid dispensing system of FIGS. 1 and 2, with a top cover of a housing thereof removed.

[0026] FIGS. 4A and 4B is a series of enlarged side elevation views, partially broken away, of the dosing engine of FIG. 3, illustrating movement of a pump device between an extended and retracted position.

[0027] FIG. 5 is an enlarged top perspective view of a reagent cartridge apparatus and docking assembly of the liquid dispensing system of FIGS. 1 and 2, in a closed second condition

[0028] FIG. 6 is an exploded, enlarged, top perspective view of the assembly of FIG. 5, in an opened first condition.

[0029] FIG. 7 is an exploded, enlarged, top perspective view of a stator element and a rotor element of a valve assembly of the dosing engine of FIG. 3.

[0030] FIGS. 8A-8C is a series of schematic diagrams illustrating partial operation of the liquid dispensing system of FIGS. 1 and 2.

[0031] FIG. 9 is an exploded, enlarged bottom perspective view of a cartridge apparatus of FIGS. 5 and 6, illustrating mounting of one of a plurality of reagent containers therein.

[0032] FIG. 10 is an exploded, enlarged bottom perspective view of the cartridge apparatus, taken along the line of the circle 10-10 of FIG. 9.

[0033] FIGS. 11A-11C is a series of enlarged side elevation views, in cross-section, of the cartridge apparatus and docking assembly of FIG. 5, and illustrating movement of the cartridge apparatus between the opened first condition and the closed second condition.

[0034] FIG. 12 is an enlarged side elevation view, in cross-section, of a mounting structure of the cartridge apparatus, taken along the line of the circle 12-12 of FIG. 11A.

[0035] FIG. 13 is an enlarged bottom perspective view of an alternative embodiment transportable cartridge apparatus.

[0036] FIGS. 14A-14G is a series of flow diagrams illustrating the operational method of the liquid dispensing system of FIGS. 1 and 2 constructed in accordance with the present invention.

#### BEST MODE OF CARRYING OUT THE INVENTION

[0037] While the present invention will be described with reference to a few specific embodiments, the description is illustrative of the invention and is not to be construed as limiting the invention. Various modifications to the present invention can be made to the preferred embodiments by those skilled in the art without departing from the true spirit and scope of the invention as defined by the appended claims. It will be noted here that for a better understanding, like components are designated by like reference numerals throughout the various figures.

[0038] Referring now generally to FIGS. 1-8, a liquid dispensing system, generally designated 30, is provided for automated dispensing of a plurality of liquid reagents into a recreational body of water 31. The dispensing system 30 includes a cartridge apparatus (FIGS. 5-6), generally designated 32, defining a cavity 33, and a cartridge front wall 34. The system further includes a plurality of liquid reagent containers (e.g., 35-37) containing a respective liquid reagent. Each reagent container 35-37 is disposed in the cavity 32 in a manner permitting access to each respective liquid reagent through the front wall 34. A docking assembly, generally designated 38, includes a dock manifold device 40, and is configured to releasably couple to the cartridge apparatus 32 between a first condition (FIG. 11A) and a second condition (FIG. 11C). In the second condition, the cartridge apparatus 32 is movably mounted to the docking assembly 38 in a manner permitting fluid communication, through the cartridge front wall 34, from the respective reagent container 35-37 to respective fluid passages (e.g., passage 41 of which is only shown) of the manifold device 40. The dispensing system 30 further includes a dosing engine (FIGS. 3-4B), generally designated 45, having a valve manifold device 46. The valve manifold device includes a plurality of intake ports (e.g., 50-52) fluidly coupled to the respective dock manifold fluid passages 41, and a dispensing port 53 to deliver the liquid reagents to the body of water. The dosing engine 45 further includes a valve assembly 55 fluidly coupled to the valve manifold device 46 to manipulate the flow distribution

between the respective intake ports 50-52 and the dispensing port 53 for selective dispensing of the respective liquid reagents through the dispensing port and to the recreational body of water.

[0039] As best viewed in FIGS. 1 and 2, an automated liquid reagent delivery system 30 is disclosed providing a plurality of liquid reagent containers 35-37 disposed in a carrying cartridge apparatus 32 that can be removably mounted to the docking assembly 38. The docking assembly 38 is fluidly coupled to the dosing engine 45, via connection tubes 56-58, configured to automate the selection, amount and frequency of the liquid reagent dispensing into a recreational body of water such as a pool or a spa 59. Pools and spas, for example, have a set regimen liquid reagents necessary to maintain the water in a sanitary condition. For example, waterline, liquid oxidizer sanitizer and/or pH adjustment chemicals are typically required.

[0040] Moreover, the multi-liquid dispensing system of the present invention is particularly suitable for dispensing multiple liquid reagents of different viscosities. Typically, dispensing liquids of different viscosity is problematic in that it creates a high level of force against the pump resulting in excess deflection with a corresponding decrease in pump efficiency. The dispensing system of the present invention, however, is capable of handling different viscosity liquids since it has been specifically designed with the maximum viscosities anticipated.

[0041] Referring now to FIGS. 3-4B, the dosing engine 45 will be described in greater detail. Briefly, the dosing engine 45 is essentially the motor of the system that enables the fluid distribution, the control systems, and the aspiration and dispensing source. The dosing engine 45 includes a compartmentalized housing 60 preferably enclosing the components to shelter the same from moisture and casual access. The hollow housing is preferably provided by a molded polymer material such as plastic, but can be composed of other materials as well

[0042] More specifically, the components include a control circuit board 61, a pump device 62, a valve assembly 55 and a liquid valve manifold device 46. The control circuit board 61 is positioned near the top of the housing 60, when in operation, in an effort to reduce moisture contact. Further, an isolation wall 63 is positioned between the control circuit board 61 and the mechanical fluid handling components (i.e., the valve assembly 55 and the pump device 62) to provide the primary isolation from potential moisture contact, shorting and corrosion.

[0043] At the lowermost position, a drainage device 65 is provided that enables drainage from the compartment should the fluid handling components leak. A power and control cord 66 also enters into the compartment through a grommet 67 at the bottom of the housing 60, which connects, to sockets 68, the connections of which are not illustrated. Another grommet 70 on the other bottom side of the housing 60 is provided that enables access of the connection tubes 56-58 from the dock manifold device 40 to the valve manifold device 46.

[0044] As best viewed in FIG. 1, a user interface 71 mounted to the spa 59, for instance, is coupled to the dosing engine 45 through the power and control cord 66 for control and operation thereof. Briefly, while the dosing engine 45 can be mounted virtually anywhere, it is preferred to positioned the engine in a safe location to reduce unauthorized access

and environmental exposure. Hence, one preferred location would be to simply mount the unit within the confines of cabinetry 72 or the like.

[0045] As mentioned above and as shown in FIG. 3-4B, the mechanical fluid handling components of the dosing engine 45 includes the valve manifold device 46 and the valve assembly 55. These components collaborate to manipulate the fluid distribution together with the pump device 62. Briefly, as will be described in greater detail, in an aspiration mode (FIG. 8A), the liquid reagents can be aspirated from a selected reagent reservoir (i.e., the reagent container 35-37) into a containment reservoir 73 for storage thereof. Moreover, in a dispensing mode (FIG. 8B), the stored reagent in the containment reservoir 73 is dispensed through a dispensing port 53 of the valve manifold device 46. To deliver the reagent, a dispensing tube 75 fluidly communicates with the body of water 31.

[0046] Each reagent container 35-37 is fluidly coupled the dosing engine 45 through the discrete connection tubes 56-58, one for each reagent container 35-37. More particularly, each connection tube 56-58 preferably extends from the dock manifold device 40 of the cartridge apparatus 32 to the valve manifold device 46 of the dosing engine. While these connection tubes are illustrated as continuous, intermediate interconnections are preferably included (not shown) to facilitate installation. These connection tubes are preferably flexible to facilitate installation, are material selected to be compatible with the liquid reagents dispensed so as not to adversely react with any of them. Typical of such tube materials include TEFLON and polyethylene, PEEK and polypropylene.

[0047] In accordance with the present invention, the delivery of liquid reagents should be relatively precise, both in volume and frequency. This assures a proper sanitation level. To facilitate such relatively precise volumetric delivery, a rotary-style switching valve and syringe-style pump are employed to accurately manipulate and dispense the liquid reagent.

[0048] The pump device 62, as illustrated in FIGS. 4A and 4B, includes a pump barrel 76 defining an interior cavity 77 and a pump piston 78 therein. Both the interior cavity 77 and the peripheral surface of the pump piston 78 are preferably cylindrical-shaped, and reciprocate between a fully extended position (in FIG. 4A, the pump piston 78 is shown nearly fully extended) and a fully retracted position (FIG. 4B). The circular end surface 80 of the pump piston 78 and the interior cavity 77 cooperate to define a variable volumetric fluid containment reservoir 73. This storage space contains the aspirated liquid reagent therein, in a precise volume that will be dispensed through the dispensing port 53 and into the body of water, as will be discussed.

[0049] To aspirate the liquid reagent (or any liquid) into the containment reservoir 73 of the pump barrel 76, the pump piston 78 is retracted from the extended position (FIG. 4A) toward a retracted position (FIG. 4B). A vacuum is generated that draws the liquid reagents through a pump port 81 in the pump barrel 76 via pump tube 82.

[0050] By accurately controlling the displacement of the pump piston 78, the volume of the liquid aspirated or dispensed from the containment reservoir 73 can be accurately controlled. To Such precise linear control is performed by a linear stepper motor 83 that is coupled to a rod 85 of the pump piston 78. This stepper motor 83 is preferably designed to

“home” into position without a position sensor (no feedback) using a mechanical stop on a motor shaft thereof.

**[0051]** One example of these type pumps is that provided by Rheodyne Model No. MLPP777-111, which offer precise liquid delivery in the range of about 0.010 cc to about 1.0 cc. It will be appreciated, of course, that since a syringe-style pump is applied, the diameter of the piston and the length of the stroke may be selected to dictate volume of liquids contained and delivered.

**[0052]** In accordance with one aspect of the present invention, the pump barrel **76** is angled upwardly in the housing to facilitate purging of any trapped bubbles contained within the containment reservoir during operation. As best viewed in FIG. 4A, by angling the pump barrel **76** (preferably about 45°), an apex portion **86** in the cavity **77** is created where any bubbles will flow to facilitate purging, and thus maintain the dispensing efficiency of the pump device. Access to the apex portion **86** is provided through the pump port **81**, which is offset from a central longitudinal axis of the pump barrel **76**. Accordingly, any trapped bubbles are easily discharged from the barrel interior cavity **77** through the offset pump port.

**[0053]** As above indicated, the valve manifold device **46** and the valve assembly **55** are preferably provided by a rotary-style valve. In this specific embodiment, the manifold device **46** includes a stator element **87** having a substantially planar stator face **88** (FIG. 7). Extending through the stator element **87** is a plurality of intake passages **90-92** that terminate at respective intake ports **50-52** at the stator face **88**. Each reagent intake port **50-52** and associated intake passage **90-92** are coupled to a corresponding reagent container **35-37**, via the connection tube **56-58** and dock manifold device. This will be described in greater detail below in reference to FIG. 8A.

**[0054]** The stator element **87** further includes a dispensing port **53** at the stator face **88** along with a corresponding dispensing passage **93** that extends through the stator element. As mentioned, the dispensing passage **93** is preferably connected to dispensing tube **75**, which delivers the liquid reagent into the body of water **31**. It will be appreciated that more or less intake ports can be provided along the stator face. For instance, more than three liquid reagent intake ports **50-52** may be provided should it be necessary to dispense a fourth (or more) liquid reagent. By way of another example, a port **89** may be provided to dispense other materials such as ozone distribution **94**, as shown in FIGS. 2 and 7.

**[0055]** In accordance with still another aspect of the present invention, the stator element **87** also defines a wash port **95** positioned at the stator face **88** and a corresponding wash passage **96** that extends through the stator element. The wash passage **96** is fluidly coupled to a wash reservoir **97** of wash fluid, the use of which will be discussed below in reference to FIG. 8C. To fluidly couple the wash passage **96** to the wash reservoir **97**, flexible tube **98** is employed.

**[0056]** FIG. 7 best illustrates that each of the reagent intake port **50-52**, the dispensing port **53** and the wash port **95** are contained within an imaginary circle **100** placed about a rotational axis **101** of a rotor-stator interface plane **102**. Moreover, these ports are equally spaced apart from one another. At the center of the rotation axis **101** is a fluid drive port **103** having a central passage **105** extending through the stator element **87**. The central passage **105** and the drive port **103** are fluidly coupled to the pump barrel **76** via the pump tube **82**. As

will be described below, this fluid connection permits fluid aspiration to and dispensing from the containment reservoir of the pump barrel.

**[0057]** The valve assembly **55** further includes a rotor element **106** that defines a substantially planar rotor face **107** oriented in an interface Plane **102** that also contains the stator face **88** of the stator element. These two surfaces are in opposed relation to one another, and form a fluid-tight seal when in operation. Inset within the rotor face **107** of the rotor element **106** is a channel **108** that extends radially from the rotational axis **101** to the imaginary circle **100**. This channel **108** provides a communication bridge from the drive port **103** to one of the intake ports **50-52**, the dispensing port **53** or the wash port **95**, depending upon its discrete rotational orientation.

**[0058]** The rotor face **107** of the rotor element is preferably composed of thermoplastic material such as UHMWPE. In contrast, the stator face **88** of the stator element is preferably composed of a more rigid material such as Kel-F (PCTFE). Applying a sufficient compression force between the rotor element **106** and the stator element **87**, a fluid-tight seal is formed at the interface plane **102**. Hence, using a stepped motor **109** (FIG. 3), the rotor element **106** is rotated discretely about the rotational axis **101**. The rotor channel **108** fluidly bridges the pump device **62** to one of the reagent containers **35-37**, the body of water **31** or the wash reservoir **97**.

**[0059]** Typical of such rotary-style switching valve assemblies is the TITANEX® valve, Model No. MLP777-206 by Rheodyne, LLC of Rohnert Park, Calif. It will be appreciated that other rotor-style valves may be employed. Moreover, to perform the same fluid distribution functionality, other dock manifold/valve configurations can be employed such as two-way or three-way switching valves.

**[0060]** Referring now to FIGS. 8A-8C, partial operation of the liquid dispensing system will be described in greater detail. To aspirate one of the liquid reagents (in this example, reagent container **35**) into the containment reservoir **73** of the pump barrel **76**, the rotor channel **108** is radially oriented to fluidly bridge the pump device **62** to the corresponding intake port **50**.

**[0061]** As the pump piston **78** is retracted from the extended position (FIG. 4A) to the retracted position (FIGS. 4B and 8A), the volumetric capacity of the containment reservoir **73** is increased, creating suction to draw the liquid reagent. Depending upon the desired volume of liquid reagent to be dispensed, the pump piston **78** can be accurately actuated.

**[0062]** Turning now to FIG. 8B, the rotor element **106** is discretely rotated about the rotational axis **101** to fluidly bridge the pump device **62** to the dispensing port **53**. The pump piston **78**, thus, can be actuated for movement from the retracted position (FIG. 8A) toward the extended position (e.g., FIG. 8B). In this orientation, the contained liquid reagent can be dispensed from the containment reservoir, through the drive port **103** and dispensing port **53** (via channel **108**), and on to the recreational body of water **31** (via dispensing tube **75**).

**[0063]** Although dedicated intake ports **50-52** are utilized for each liquid reagent during aspiration, once past the intake ports, the path to the pump device and out through the dispensing port is common. Cross-contamination of the pump components, accordingly, can be problematic. To address this issue, the stator element **87** includes a wash port **95** fluidly coupled to a wash reservoir that can be bridged, via the rotor channel **108**, to the containment reservoir **73**.

[0064] At a discrete wash position, as shown in FIG. 8C, the rotor element 106 is positioned to bridge the wash reservoir 97 to the pump device 62. More particularly, the ends of the rotor channel 108 are rotated into fluid communication between drive port 103 and the wash port 95. As described above, the pump piston 78 is operated to draw the wash fluid into the containment reservoir 73 for washing thereof. As also described above in reference to FIG. 8B, the wash fluid can be discarded from the containment reservoir 73 through the dispensing port 53. Repeating this wash sequence, the containment reservoir 73 can be adequately cleaned.

[0065] Turning to FIGS. 5, 6, and 9-11C, the cartridge apparatus 32 and docking assembly 38 are now described in greater detail. As best shown in FIG. 6, the docking assembly 38 includes a base member 110 upon which the cartridge apparatus 32 mounts and releasably locks. The base member 110 is preferably plate-like, and is configured to mount the entire assembly proximate to the spa or body of water for use and operation thereof. Such mounting may be performed through conventional screws (not shown) and screw receptacles 111, or through an adhesive backing.

[0066] Briefly, at one end of the base member 110, a cartridge latch assembly 112 cooperates with the cartridge apparatus to releasably lock the same to the docking assembly 38. This cartridge latch assembly 112 will be described in greater detail below. On an opposite end of the base member 110 is an upstanding support structure 113 upon which the dock manifold device 40 is removably mounted. The layout of the support structure 113 is a custom keyed geometry that enables slideable mounting of the dock manifold device 40 thereto for proper location and orientation without the use of fasteners. This is primarily provided by an array of upstanding alignment posts 115 that are formed and dimensioned for sliding receipt in a corresponding array of post receiving slots 116 at a bottom of the dock manifold device 40 (FIG. 11). As shown, each alignment post 115 is slightly tapered inwardly such that as the dock manifold device 40 is press-fit downwardly onto the support structure 113, the alignment posts are increasingly friction fit against the interior walls 117 that define the respective post receiving slots 116.

[0067] A manifold latch assembly 118 is provided between the dock manifold device 40 and the support structure 113. FIGS. 11B and 11C best illustrate that the latch assembly 118 includes a resilient latch lever 120 upstanding from the support structure 113. As the dock manifold device 40 is pushed down upon the alignment posts 115, a retention tang 121 of the resilient latch lever 120 contacts a ramped shoulder 122 of the dock manifold device 40. Upon further movement, the retention tang 121 extends past a ledge portion of the ramped shoulder 122 to secure the manifold device in place. Hence, through manual operation of the resilient latch lever 120, the dock manifold device 40 can be selectively unlocked from the base member 110 which is beneficial to replace parts and/or to add or subtract connector components and tubes as required or needed.

[0068] In accordance with the present invention, the function of the dock manifold device 40 is to fluidly couple the reagent containers 35-37 to the valve manifold device 46 of the dosing engine 45, via connection tubes 56-58. To provide such fluid communication, the dock manifold device 40 includes a plurality of dock manifold fluid passages 41 extending through the manifold. While only passage 41 is shown, each passage is generally identical corresponds to a respective connection tube 56-58 and a respective reagent

container 35-37. An upper end of each fluid passage includes a corresponding manifold connector port 123 configured to receive a fluid connector (not shown) of a respective connection tube 56-58. Preferably, the connector ports 123 are threaded for receipt of a threaded ¼-28 style fluid connector. It will be appreciated, however, that virtually any type of fluid connector can be employed for fluid coupling of the connection tubes 56-58 to the manifold. Moreover, it will be understood that while five connector ports 123 are illustrated (only three of which are shown in use), the manifold can be configured to accommodate any number of fluid passages.

[0069] At an opposite end, the manifold fluid passages are configured to fluidly couple respective to the dock connectors 125 mounted to the dock manifold device 40. Briefly, as will be described in greater detail below, these dock connectors 125 releasably mate with corresponding collared connectors 126 mounted to the cartridge apparatus 32, when the cartridge apparatus is mounted to the docking assembly 38. In the preferred arrangement, these dock connectors are male-type connectors having associated pin portions 127 that extend outward from the dock manifold device 40 in a direction substantially parallel to the plate-like base member 110 (FIGS. 6 and 11).

[0070] In this manner, dock connectors 125 are preferably 90° angled connectors that include a corresponding connector base portion 128 adapted to be press-fit into connector receiving slots 130 (only one of which is shown in FIGS. 11B and 11C). Upstanding from each connector base portion 128 is a corresponding nozzle portion 132 with an O-ring seal 133. When the dock connectors 125 are press-fit mounted to the dock manifold device 40, the corresponding O-rings 133 engage respective interior receiving walls 135 (again, only one of which is shown in FIGS. 11B and 11C) of the receiving slots 130. This forms a fluid-tight seal with the corresponding nozzle portions 132 and with the respective fluid passage 41.

[0071] To further promote vertical load bearing support to the pin portions 127 of the dock connectors 125 when the cartridge apparatus 32 is mounted to the docking assembly 38, the support structure includes a plurality of neck supports 136 each upstanding from the base member 110, and corresponding to a dock connector 125. As shown in FIGS. 6 and 11, when the dock manifold device 40 is press-fit mounted to the support structure 113, the necks of the pin portions 127 are seated against the neck supports 136 to promote the aforementioned vertical support. The necessity for such a vertical load bearing support will be apparent when describing the engagement of the dock connectors 125 with the corresponding collared connectors 126 of the cartridge apparatus 32.

[0072] The dock manifold device 40 further includes two spaced-apart towers 137, 138 upon which the cartridge apparatus is movably mounted. More specifically, these upstanding towers 137, 138 include the respective mounting structure 140 which are contained and supported by respective cantilevered mounting posts 142, 143 extending outwardly over the base member 110. As will be described in more detail below, these cantilevered mounting posts 142, 143 function to movably mount the cartridge apparatus 32 to the docking assembly 38 along a curvilinear path that effectively engages the dock connectors 125 to the corresponding collared connectors 126.

[0073] Referring back to FIGS. 5 and 6, the cartridge apparatus 32 will now be described. The cartridge apparatus preferably includes a body member 145 that defines a central cavity 33 therein. At one end of the body member 145 is a

generally planar front wall **34**, while at an opposite end is a rear wall **146** that supports a handle member **147**. A pair of opposed sidewalls **148, 150** extend between the rear wall **146** and front wall **34** for support thereof. The body member further includes a first and second dividing wall **151, 152** separating the central cavity **33** into a first compartment **155**, an adjacent second compartment **156** and an adjacent third compartment **157**. Each compartment **155-157** is sized and dimensioned for receipt and support of a respective reagent container **35-37** therein.

[0074] In one configuration, the body member **145** of the cartridge apparatus **32** is generally a rectangular shell-shaped structure having a bottom opening **158** into the cavity **33**. The body member **145**, as well as the docking assembly components are both preferably composed of a light-weight, relatively high-strength material having good load bearing, yet resilient properties. Due to the complex form and shapes of the assemblies, however, a moldable material is more cost effective and is very much preferred. Typical of such materials include thermoplastic, ABS, etc.

[0075] Each dividing wall **151, 152** is preferably planar, and is oriented upright when the cartridge apparatus **32** is lying in the orientation of FIG. 9. Moreover, the dividing walls are preferably integrally formed with the interior walls defining the cavity **33**, and extend fully from the rear wall **146** of the body member **145** to the front wall **34** thereof. Further, the dividing walls extend all the way to a top wall **160** of the body member **145**, effectively separating the adjacent first, second and third compartments **155-157** from one another. This is beneficial in that it adds structural rigidity and isolates one compartment from another.

[0076] As best viewed in FIG. 6, the dividing walls **151, 152** also extend in a direction substantially perpendicular to the front wall **34** and the rear wall. Together with the webbed support walls **161**, this configuration provides ample load bearing support to the front wall **34** that is necessary when cartridge apparatus **32** is mounted to the docking assembly **38**. As will be described, during engagement of the dock connectors **125** and the corresponding collared connectors **126**, over fifty (50) lbs of force may be sustained against the front wall. Hence, the front wall **34** must be sufficiently reinforced to resist material fatigue and potential material fracture or significant deflection during the make or break of the connectors.

[0077] It will be appreciated that while two primary dividing walls **151, 152** are described and shown, more dividing walls could be added that define more than three primary compartments. In fact, as shown in FIGS. 6 and 9, each dividing wall **151, 152** is Y-shaped at a pocket portion **162, 163** thereof. Each pocket portion **162, 163** is oriented at one end of the respective dividing wall **151, 152**, and that intersects the front wall **34** to form a respective pocket compartment **165, 166**. As shown, a first pocket compartment **165** is formed and positioned between the first compartment **155** and the second compartment **156**, while a second pocket compartment **166** is formed and positioned between the second compartment **156** and the third compartment **157**. Each pocket compartment **165, 166** is significantly smaller in volume than the primary compartments **155-157**. However, in a similar manner, these pocket compartments are formed and dimensioned for receipt of a respective reagent container (not shown) therein for liquid dispensing.

[0078] As best illustrated in FIGS. 9 and 10, each primary compartment **155-157** and each pocket compartment **165,**

**166** includes a corresponding primary connector support **167** and pocket connector support **168**, respectively, coupled to the front wall **34** for communication with the respective pocket compartment **165, 166** and the primary compartment **155-157**, respectively. Briefly, it will be appreciated that while the primary connector support **167** and the pocket connector supports **168** are illustrated, only the primary connector supports and the associated reagent containers **35-37**, etc. will be detailed for the ease of description and clarification.

[0079] Accordingly, each connector support **167** is formed and dimensioned for sliding engagement with a respective collared connector **126** of the respective reagent container therebetween. FIGS. 10, 11B and 11C illustrate that each connector support **167** cooperates with the respective collared connector **126** to provide a predetermined tolerance or longitudinal sliding displacement therebetween to aid engagement with the respective dock connector **125**.

[0080] The collared connectors **126**, only one of which will be described in detail, each include an outer collar portion **170** and an adjacent inner collar portion **171** surrounding a respective receiving receptacle **172** of the connector. These substantially parallel, oval-shaped collars are preferably composed of semi-flexible thermoplastic material, and are removably press-fit into mounting engagement with a respective connector support **167** (FIG. 10).

[0081] Briefly, these conventional female collared connectors **126** and the mating male dock connectors **125** are typically referred to as multiple make and break style fluid connectors, and are often applied to food product packaging. The receiving receptacle **172** of the collared connector **126** is formed and dimensioned for sliding receipt of the corresponding pin portion **127** of the dock connector **125**.

[0082] To promote fluid sealing, as shown in FIGS. 6 and 11A, the pin portions include O-rings **173**. During insertion of the tapered pin portion **127** into the corresponding receptacle **172**, the corresponding O-ring **173** engages the interior walls defining the receiving receptacles to form a fluid tight seal therebetween. Typical of these male dock connectors **125** are those provided by IPNUSA of Peachtree City, Ga. Model No. SPS-4. Similarly, the mating female collared connectors **126** are also those provided by IPNUSA Model No. SPS-4F. It will be appreciated, however, that other IPNUSA style multiple make and break fluid connectors can be utilized.

[0083] Referring back to FIGS. 9 and 10, each connector support **167** includes a U-shaped load bearing support **175** that cooperates with the front wall **34** to define a U-shaped groove **176** therebetween. The U-shaped grooves **176** extend downwardly from a lower edge portion **177** of the front wall **34**, and are formed for sliding receipt of the respective outer collar portion **170** of a respective collared connector **126** therein, in the direction of arrow **178**. Similarly, the respective inner collar portion **171** is retained against the interior side of the front wall for additional support.

[0084] To retain the collared connector **126** in the groove **176**, the connector support **167** includes a pair of opposed retention tangs **180** (only one of which can be seen) extending into a respective groove **176** thereof. As the reagent container **35** is positioned in the respective primary compartment **155**, and the outer collar portion **170** is inserted into the respective groove **176**, the peripheral sides of the collar will friction contact the retention tangs **180**. Manually applying a sufficient force, in the direction of arrow **178**, the friction force between the opposed retention tangs **180** and the outer collar portion **170** can be overcome to force the collared connector

**126** past the retention tangs **180** and into a socket of the U-shaped groove **176**. Conversely, to remove the retained collared connectors, a force applied in a direction opposite that of arrow **178** must similarly overcome the opposed frictional forces for removal from the connector support.

**[0085]** The collared connectors **126** are each mounted, in a fluid-tight manner, to one end of the corresponding reagent container **35-37**. Each container **35-37** is formed and dimensioned for placement into a respective primary compartment **155-157** (FIG. 9). Hence, in some specific embodiments, the containers may be provided by a collapsible, flexible-type plastic bag that are capable of semi-conforming to the shape of the respective compartment in which it is contained. For example, the application of thin plastic bags are typically more cost effective, and need not be vented as the plastic bag will collapse as the liquid reagent is drawn from the bag.

**[0086]** In another specific embodiment, the reagent containers **35-37** may more rigid and custom pre-shaped for positioning in the respective primary compartments **155-157** (as shown in FIGS. 9 and 13, for instance). Such custom preformed containers may facilitate volume maximization of the containers in the respective compartment. They may also be more protective, if desired, since the rigidity and wall thickness can be increased.

**[0087]** To moveably mount the cartridge apparatus **32** to the docking assembly **38**, the cartridge apparatus includes a mounting device **181** that cooperates with the dock mounting structure **140**. FIGS. 5, 9 and 11 illustrate that the cartridge mounting device **181** is integrally formed with the body member **145**. More specifically, the cartridge mounting device **181** is configured to cooperate with the mounting posts **142, 143** of the docking assembly **38** for movement between a first condition (FIG. 11A) and a second condition (FIGS. 5 and 11C). Briefly, in the first condition, the cartridge mounting device **181** and the dock mounting structure **140** cooperate to enable coupling of the cartridge apparatus **32** to the docking assembly **38**. In contrast, during movement of the cartridge apparatus **32** from the first condition to the second condition (FIGS. 11B and 11C), the respective collared connectors **126** of the reagent containers **35-37** are aligned and engaged with the respective dock connectors **125** of the docking assembly **38** for fluid-tight mating therebetween.

**[0088]** The mounting device **181** of the cartridge apparatus is preferably positioned at an outer upper portion of the cartridge apparatus. More preferably, the mounting device **181** includes a pair of spaced-apart post receptacles **182, 183** formed for receipt of the triangular-shaped cantilevered mounting posts **142, 143** of the docking assembly **38** therein (FIGS. 5, 9 and 11A). These receptacles **182, 183** are positioned proximate an intersecting edge between the front wall **34** and the top wall **160** of the body member **145**.

**[0089]** The cartridge mounting device **181** further includes a pair of opposed hinge pins **185, 186** (FIGS. 9, 11A and 12) extending transversely across the post receptacles **182, 183**. These pins **185, 186** are preferably longitudinally aligned along a common rotational axis **187** that is oriented substantially at and parallel to the intersecting edge. These hinge pins **185, 186** cooperate with the tapered L-shaped slots **188, 190** (FIGS. 6, 11A and 12) formed in the opposed outer walls **196, 197** of the cantilevered mounting posts **142, 143** to enable hinged movement about the rotational axis **187** between the first condition and the second condition. Each L-shaped slot **188, 190** tapers inwardly towards a neck portion (only neck portion **191** of slot **188** of which is shown) which then termi-

nates at an end socket **193** formed and dimensioned to receive and retain the hinge pin **185** there in for rotation about the rotational axis **187**.

**[0090]** To mount the cartridge apparatus **32** to the docking assembly **38**, the pair of cantilevered mounting posts **142, 143** are aligned with and place into the corresponding post receptacles **182, 183**, in a manner aligning and sliding the cartridge hinge pins **185, 186** into the corresponding L-shaped slots **188, 190** of the mounting posts. As best viewed in FIG. 12, the transverse cross-sectional dimension of the hinge pin **185** (as well as hinge pin **186**) is eccentric-shaped. Hence, in the orientation of the first condition shown in FIGS. 11A and 12, the eccentric-shaped hinge pin **185** permits passage through the neck portion **191, 192** and into the end socket **193, 195** of the L-shaped slot **188**. Upon movement of the cartridge apparatus toward the second condition, the hinge pins **185, 186** are locked into their corresponding sockets. Conversely, to remove the eccentric hinge pins **185, 186** from the end sockets **193, 195**, the cartridge apparatus **32** must be returned to the first condition to push the pins past the corresponding neck portions.

**[0091]** In accordance with the present invention, the dock mounting structure **140** and the cartridge mounting device **181** cooperate such that during movement of the cartridge apparatus from the first condition to the second condition, the respective collared connectors **126** of the reagent containers **35-37** are aligned and engaged with the respective dock connectors **125** of the docking assembly for fluid-tight mating therebetween. As will be apparent, such mating engagement is permitted in part to the predetermined tolerance or longitudinal displacement of the collared connector **126** in the respective socket of the U-shaped groove **176**.

**[0092]** As the cartridge apparatus **32** is moved from the first condition (FIG. 11A) toward the second condition (i.e., from FIG. 11B to FIG. 11C), the pin portions **127** of the respective male dock connectors **125** are automatically aligned and inserted through the mating receiving receptacles **172** of the female collared connectors **126** until seated for fluid communication with the respective reagent containers **35-37** at the second condition. However, the movement of the cartridge apparatus **32** relative the docking assembly from the first condition to the second condition is rotational about rotational axis **187**. Hence, the actual inter-engagement between the collared connectors **126** and the dock connectors **125** is along a curvilinear path. This is problematic since the selected mating connectors are generally designed for conventional linear engagement along the respective longitudinal axes of the pin portions **127** and respective receiving receptacles **172** thereof.

**[0093]** By allowing collared connectors **126** to longitudinally displace a predetermined tolerance in the respective sockets of the U-shaped grooves **176**, in the directions of arrow **178** in FIG. 11B, the pin portions **127** of the dock connectors can be sufficiently aligned with the receiving receptacles **172** of the collared connectors **126** as the cartridge apparatus **32** is urged toward the second condition (FIG. 11C). Preferably, this predetermined tolerance is in the range of about 0.030 inches to about 0.050 inches.

**[0094]** As mentioned, to collectively engage the fluid connectors, up to about fifty (50) lbs. may be required in some instances. Using the handle member **147** of the cartridge apparatus **32**, positioned at the rear wall **146**, sufficient leverage can be generated to facilitate manual engagement (and disengagement) of the fluid connectors force for most per-

sons. Also located along the rear wall 146 is a latch lever 198 of the cartridge latch assembly 112, above-mentioned. As shown in FIGS. 5, 11B and 11C, the latch assembly 112 cooperates between the cartridge body member 145 and the dock base member 110 to releasably lock the cartridge apparatus 32 to the docking assembly 38.

[0095] The latch lever 198 is cantilever mounted at a central portion thereof to the rear wall of the body member 145. At a bottom portion of the latch lever 198 is a latch tang 200 that engages a corresponding lip portion 201 in a latch receiving slot 202 of the base member 110. When the cartridge apparatus 32 is moved to the second condition of FIG. 11C, the resilient latch tang 200 engages the corresponding lip portion 201 to releasably lock the cartridge apparatus in place.

[0096] At a top of the latch lever 198 is a manually lever portion 203 that operates the lower latch tang 200. By manually pressing the lever portion 203 in the direction of arrow 205 in FIG. 5, the latch tang 200 can be moved past the lip portion 201 to release the latch lever from the locked position.

[0097] In another aspect of the present invention, as shown in FIG. 13, the cartridge apparatus 32 can be distributed with one or more reagent containers 35-37 already preinstalled in the primary compartments 155-157. In this specific embodiment, the cartridge apparatus 32 is then ready for easy mounting to the docking assembly 38, and connection to the liquid dispensing system through the dock manifold.

[0098] To secure the reagent containers 35-37 in the cartridge apparatus 32 for transport, a strap device 206 may be provided that extends across the opening 158 into the interior cavity 33. Preferably, this strap device 206 extends transverse to the first and second dividing walls 151, 152, and across the compartments 155-157. The strap device may be composed of any flexible heat shrink material. Typical of such flexible materials include polyethylene.

[0099] To further secure and retain the strap device 206 in place, the exterior portions of the body member 145 may include an alignment groove 207 or the like. These alignment grooves 207 are preferably positioned on opposing sidewalls 148, 150 of the body member 145, and are formed and dimensioned for receipt of the strap device therein. When the strap device is tightened about the cavity opening 158 the alignment grooves 207 will prevent slippage about the body member 145.

[0100] In still another aspect of the present invention, the general operation of the liquid dispensing system 30 of the present invention is disclosed. Referring to the self-explanatory operation flow diagrams of FIGS. 14A-14G, FIG. 14A illustrates the start-up procedure. Upon power-up, the control circuit board 61 establishes communication with the user interface 71 through the power and control cord 66. System configuration is then retrieved from an internal non-volatile memory device, or in the absence of that information, the user is instructed to enter it. If the cartridge 32 is empty, the user is instructed to replace it with a new one. The control circuit board 61 will next position the pump device 62 and the valve assembly 55 to their start-up positions.

[0101] FIG. 14B illustrates the main operational loop of the dosing engine 45. Dosing of liquid reagents can be a result of a user request or an automatic, timed schedule. Upon encountering either a user request or an indication from an internal timer, the dosing engine 45 will dispense the liquid reagents from the cartridge 32 into the spa 59 using a dosing schedule stored in the internal non-volatile memory of the control circuit board 61. Another internal timer is used to track the frequency of the user inputting the concentration of liquid reagents in the spa 59. If the predetermined period of time has passed without user input, the user is instructed to perform the measurement of liquid reagent levels in spa 59, and to enter the values using user interface 71.

[0102] Dispensing algorithms for different types of liquid reagents are also stored in the internal non-volatile memory of the control circuit board 61, and are illustrated in FIGS. 14C, 14D, and 14E. FIG. 14F depicts the procedure used when a system error is encountered, while FIG. 14G illustrates the operation of the control circuit board 61 interrupt system for accomplishing communication and timing tasks.

[0103] Those skilled in art will appreciate that other possible modes of system operation can accomplish the essentially same liquid dispensing tasks. Moreover, although only a few embodiments of the present inventions have been described in detail, it should be understood that the present inventions might be embodied in many other specific forms without departing from the spirit or scope of the inventions.

What is claimed is:

1. A liquid dispensing system for automated dispensing of a plurality of liquid reagents into a recreational body of water, said system comprising:

- a cartridge apparatus defining a cavity, and a cartridge front wall;
- a plurality of liquid reagent containers containing a respective liquid reagent, each said reagent container being disposed in said cavity in a manner permitting access to each respective liquid reagent through the front wall;
- a docking assembly having a dock manifold device, and releasably coupled to the cartridge apparatus between a first condition and a second condition, removably mounting the cartridge apparatus to the docking assembly in a manner permitting fluid communication through the cartridge front wall from the respective reagent container to respective fluid passages of the manifold device;
- a dosing engine having a valve manifold device having a plurality of intake ports coupled to the respective dock manifold fluid passages, and a dispensing port to deliver the liquid reagents to the body of water, said dosing engine further including a valve assembly fluidly coupled to the valve manifold device to manipulate the flow distribution between the respective intake ports and the dispensing port for selective dispensing of the respective liquid reagents through the dispensing port and to the recreational body of water.

\* \* \* \* \*