



(51) International Patent Classification:

A24F 47/00 (2020.01)

(21) International Application Number:

PCT/EP2019/074492

(22) International Filing Date:

13 September 2019 (13.09.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1814987.2 14 September 2018 (14.09.2018) GB

1814980.7 14 September 2018 (14.09.2018) GB

(71) Applicant: **NERUDIA LIMITED** [GB/GB]; Wellington House, Physics Road, Speke, Liverpool Merseyside L24 9HP (GB).

(72) Inventors: **LOMAS, Pete**; C/O NERUDIA LIMITED, Wellington House, Physics Road, Speke, Liverpool Merseyside L24 9HP (GB). **LORD, Chris**; C/O NERUDIA LIMITED, Wellington House, Physics Road, Speke, Liverpool Merseyside L24 9HP (GB).

(74) Agent: **MEWBURN ELLIS LLP**; City Tower, 40 Basinghall Street, London Greater London EC2V 5DE (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

(54) Title: CONSUMABLE

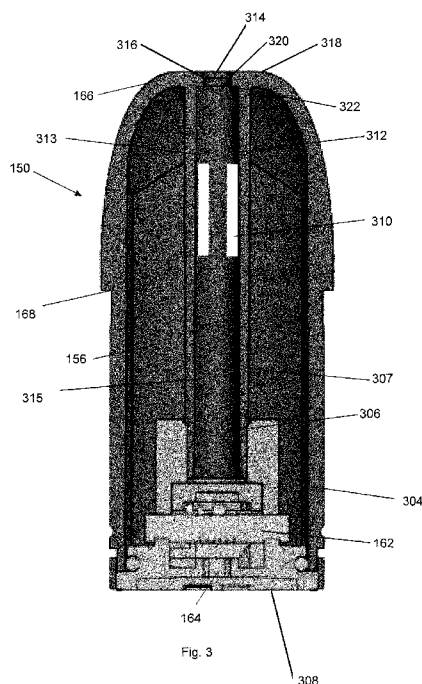

(57) Abstract: The present disclosure relates to a consumable for a smoking substitute device, the consumable comprising: a tank (156) for storing an e-liquid; and at least one wall (304, 307) forming a part of the consumable, wherein the consumable is formed by injection moulding, and the at least one wall (304, 307) tapers along a demoulding direction of the at least one wall (304, 307). The disclosure also relates to a consumable for a smoking substitute device, the consumable comprising: a tank (156) for storing an e-liquid; an outlet (306), wherein the outlet (306) is configured to provide fluid communication between the tank (156) and a mouthpiece aperture (314), so that the mouthpiece aperture (314) receives an aerosol vapour formed from the e-liquid in use, wherein the outlet (306) has an internal width which decreases in a downstream direction.



Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

CONSUMABLE

Field of the Invention

5 The present invention relates to a consumable for a smoking substitute device, a smoking substitute device, a method of manufacturing a consumable for a smoking substitute device and a manufacturing assembly and particularly, although not exclusively, to consumable in which a tank and a mouthpiece which are integrally formed.

Background

10 The smoking of tobacco is generally considered to expose a smoker to potentially harmful substances. It is generally thought that a significant amount of the potentially harmful substances are generated through the heat caused by the burning and/or combustion of the tobacco and the constituents of the burnt tobacco in the tobacco smoke itself.

15 Combustion of organic material such as tobacco is known to produce tar and other potentially harmful by-products. There have been proposed various smoking substitute devices in order to avoid the smoking of tobacco.

Such smoking substitute devices can form part of nicotine replacement therapies aimed at people who wish to stop smoking and overcome a dependence on nicotine.

20 Smoking substitute devices, which may also be known as electronic nicotine delivery systems, may comprise electronic systems that permit a user to simulate the act of smoking by producing an aerosol, also referred to as a "vapour", which is drawn into the lungs through the mouth (inhaled) and then exhaled. The inhaled aerosol typically bears nicotine and/or flavourings without, or with fewer of, the odour and health risks associated with traditional smoking.

25 In general, smoking substitute devices are intended to provide a substitute for the rituals of smoking, whilst providing the user with a similar experience and satisfaction to those experienced with traditional smoking and tobacco products.

30 The popularity and use of smoking substitute devices has grown rapidly in the past few years. Although originally marketed as an aid to assist habitual smokers wishing to quit tobacco smoking, consumers are increasingly viewing smoking substitute devices as desirable lifestyle accessories. Some smoking substitute devices are designed to resemble a traditional cigarette and are cylindrical in form with a mouthpiece at one end. Other smoking substitute devices do not generally resemble a cigarette (for example, the smoking substitute device may have a generally box-like form).

35 There are a number of different categories of smoking substitute devices, each utilising a different smoking substitute approach. A smoking substitute approach corresponds to the manner in which the substitute system operates for a user.

One approach for a smoking substitute device is the so-called "vaping" approach, in which a vaporisable liquid, typically referred to (and referred to herein) as "e-liquid", is heated by a heating device to produce an aerosol vapour which is inhaled by a user. An e-liquid typically includes a base liquid as well as nicotine and/or flavourings. The resulting vapour therefore typically contains nicotine and/or flavourings.

5 The base liquid may include propylene glycol and/or vegetable glycerin.

A typical vaping smoking substitute device includes a mouthpiece, a power source (typically a battery), a tank or liquid reservoir for containing e-liquid, as well as a heating device. In use, electrical energy is supplied from the power source to the heating device, which heats the e-liquid to produce an aerosol (or "vapour") which is inhaled by a user through the mouthpiece.

10 Vaping smoking substitute devices can be configured in a variety of ways. For example, there are "closed system" vaping smoking substitute devices which typically have a sealed tank and heating element which is pre-filled with e liquid and is not intended to be refilled by an end user. One subset of closed system vaping smoking substitute devices include a main body which includes the power source, wherein the main body is configured to be physically and electrically coupled to a consumable including the tank and
15 the heating element. In this way, when the tank of a consumable has been emptied, the main body can be reused by connecting it to a new consumable. Another subset of closed system vaping smoking substitute devices are completely disposable, and intended for one-use only.

There are also "open system" vaping smoking substitute devices which typically have a tank that is configured to be refilled by a user, so the device can be used multiple times.

20 An example vaping smoking substitute device is the myblu™ e-cigarette. The myblu™ e cigarette is a closed system device which includes a main body and a consumable. The main body and consumable are physically and electrically coupled together by pushing the consumable into the main body. The main body includes a rechargeable battery. The consumable includes a mouthpiece, a sealed tank which contains e-liquid, as well as a heating device, which for this device is a heating filament coiled around a
25 portion of a wick which is partially immersed in the e-liquid. The device is activated when a microprocessor on board the main body detects a user inhaling through the mouthpiece. When the device is activated, electrical energy is supplied from the power source to the heating device, which heats e-liquid from the tank to produce a vapour which is inhaled by a user through the mouthpiece.

Another example vaping smoking substitute device is the blu PRO™ e-cigarette. The blu PRO™ e
30 cigarette is an open system device which includes a main body, a (refillable) tank, and a mouthpiece. The main body and tank are physically and electrically coupled together by screwing one to the other. The mouthpiece and refillable tank are physically coupled together by screwing one into the other, and detaching the mouthpiece from the refillable tank allows the tank to be refilled with e-liquid. The device is activated by a button on the main body. When the device is activated, electrical energy is supplied from
35 the power source to a heating device, which heats e-liquid from the tank to produce a vapour which is inhaled by a user through the mouthpiece.

Another approach for a smoking substitute device is the so-called "heat not burn" ("HNB") approach in which tobacco (rather than e-liquid) is heated or warmed to release vapour. The tobacco may be leaf

tobacco or reconstituted tobacco. The vapour may contain nicotine and/or flavourings. In the HNB approach the intention is that the tobacco is heated but not burned, i.e. does not undergo combustion.

A typical HNB smoking substitute device may include a main body and a consumable. The consumable may include the tobacco material. The main body and consumable may be configured to be physically coupled together. In use, heat may be imparted to the tobacco material by a heating device that is typically located in the main body, wherein airflow through the tobacco material causes moisture in the tobacco material to be released as vapour. A vapour may be formed from a carrier in the tobacco material (this carrier may for example include propylene glycol and/or vegetable glycerin) and additionally volatile compounds released from the tobacco. The released vapour may be entrained in the airflow drawn through the tobacco.

As the vapour passes through the smoking substitute device (entrained in the airflow) from an inlet to a mouthpiece (outlet), the vapour cools and condenses to form an aerosol (also referred to as a vapour) for inhalation by the user. The aerosol will normally contain the volatile compounds.

In HNB smoking substitute devices, heating as opposed to burning the tobacco material is believed to cause fewer, or smaller quantities, of the more harmful compounds ordinarily produced during smoking. Consequently, the HNB approach may reduce the odour and/or health risks that can arise through the burning, combustion and pyrolytic degradation of tobacco.

An example of the HNB approach is the IQOS® smoking substitute device from Philip Morris Ltd. The IQOS® smoking substitute device uses a consumable, including reconstituted tobacco located in a wrapper. The consumable includes a holder incorporating a mouthpiece. The consumable may be inserted into a main body that includes a heating device. The heating device has a thermally conductive heating knife which penetrates the reconstituted tobacco of the consumable, when the consumable is inserted into the heating device. Activation of the heating device heats the heating element (in this case a heating knife), which, in turn, heats the tobacco in the consumable. The heating of the tobacco causes it to release nicotine vapour and flavourings which may be drawn through the mouthpiece by the user through inhalation.

A second example of the HNB approach is the device known as "Glo"® from British American Tobacco p.l.c. Glo® comprises a relatively thin consumable. The consumable includes leaf tobacco which is heated by a heating device located in a main body. When the consumable is placed in the main body, the tobacco is surrounded by a heating element of the heating device. Activation of the heating device heats the heating element, which, in turn, heats the tobacco in the consumable. The heating of the tobacco causes it to release nicotine vapour and flavourings which may be drawn through the consumable by the user through inhalation. The tobacco, when heated by the heating device, is configured to produce vapour when heated rather than when burned (as in a smoking apparatus, e.g. a cigarette). The tobacco may contain high levels of aerosol formers (carrier), such as vegetable glycerine ("VG") or propylene glycol ("PG").

In prior art smoking substitute devices, some of the unvaporised e-liquid passes through the wick and to the mouthpiece. This may result in unvaporised e-liquid passing into the user's mouth, which may be

unpleasant for the user. Further leakage occurs due to leakage paths present between the components of the consumable. Additionally, it is desirable to provide consumables which are easier and cheaper to manufacture.

The present invention has been devised in light of the above considerations.

5

Summary of the Invention

At its most general, the present invention relates to a consumable for a smoking substitute device comprising a tapering wall which forms a part of the consumable.

10 According to a first aspect of the present invention, there is provided there is provided a consumable for a smoking substitute device, the consumable comprising: a tank for storing an e-liquid; and at least one wall forming a part of the consumable, wherein the consumable is formed by injection moulding, and the at least one wall tapers along a demoulding direction of the at least one wall.

Forming a part of the consumable from a tapering wall in this way is advantageous, as it means that the consumable may be removed more easily and reliably from a mould during an injection moulding
15 process.

Optionally, the at least one wall comprises a tank wall.

Advantageously, the consumable comprises an outlet, the outlet configured to provide fluid communication between the tank and a mouthpiece aperture (so that the mouthpiece aperture receives an aerosol vapour formed from e-liquid in use), wherein the at least one wall comprises an outlet wall.

20 Conveniently, the outlet defines an airway, the outlet/airway having an internal width which decreases in a downstream direction (due to the decreasing of the thickness of the wall of the outlet along the demoulding direction).

In some embodiments, both the tank wall and the outlet wall taper (decrease in width) in the demoulding direction.

25 Optionally, the consumable comprises a filter for filtering unvaporised liquid from the aerosol vapour, wherein the filter is located within the outlet.

Advantageously, the thickness of the wall decreases due to a surface of the wall being angled at a draft angle. Advantageous draft angles are described below.

30 According to a second aspect, there is provided a consumable for a smoking substitute device, the consumable comprising: a tank for storing an e-liquid; an outlet, wherein the outlet is configured to provide fluid communication between the tank and a mouthpiece aperture, so that the mouthpiece aperture receives an aerosol vapour formed from the e-liquid in use, wherein the outlet has an internal width which decreases in a downstream direction.

Having an outlet with internal width decreasing in this way is advantageous, as it means that the air flow velocity in the upstream portion of the outlet is reduced, which reduces the amount of unvapourised e-liquid entrained in the air flow.

5 Optionally, the outlet comprises an outlet wall, wherein a thickness of the outlet wall tapers/decreases in an upstream direction to cause the internal width of the outlet to decrease in the downstream direction.

Advantageously, the consumable is formed by injection moulding. The thickness of the wall may decrease due to a surface of the wall being angled at a draft angle. Advantageous draft angles are defined below.

10 Advantageously, the internal width of the outlet decreases at a substantially constant rate in the downstream direction.

Conveniently, a difference between an internal width at the downstream end of the outlet and an internal width at the upstream end of the outlet is greater than 0.10 mm or greater than 1.5 mm.

Conveniently, the difference between the internal width at the downstream end of the outlet and the internal width at the upstream end of the outlet is not more than 0.30 mm.

15 In some embodiments, the outlet may be integrally formed with a tank wall. The tank wall may taper (i.e. decrease in thickness) in the opposite direction (i.e. upstream) as the reduction in internal width of the outlet i.e. it may taper in the same direction as the outlet wall tapers.

In either of the first or second aspects, advantageously, the consumable comprises a heating device for vaporising the e-liquid to form the aerosol vapour.

20 Conveniently, the consumable of the first or second aspect comprises a mouthpiece, the mouthpiece comprising the mouthpiece aperture, wherein the mouthpiece aperture is in fluid communication with the tank, so that the mouthpiece aperture receives an aerosol vapour formed from the e-liquid in use.

25 The mouthpiece aperture may be provided in an axial end surface of the mouthpiece i.e. in an end surface extending in a plane perpendicular to the longitudinal axis of the consumable. The mouthpiece aperture may be provided in the end surface of the mouthpiece aligned with the longitudinal axis of the consumable.

Optionally, the outlet provides fluid communication between the heating device and the mouthpiece aperture.

30 In either of the first or second aspect, conveniently, the draft angle is at least 0.5 degrees, e.g. at least 1.0 degrees or at least 1.5 degrees such as at least 2.0 degrees or at least 2.5 degrees, for example at least 3.0 degrees or at least 3.5 degrees.

Conveniently, the draft angle is not more than 3.5 degrees, e.g. not more than 3.0 degrees or not more than 2.5 degrees such as not more than 2.0 degrees or not more than 1.5 degrees, for example, not more than 1.0 degrees or not more than 0.5 degrees.

35

It should be noted that references herein to “downstream” are intended to refer to a direction towards the mouthpiece (with “upstream” referring to a direction away from the mouthpiece).

According to a third aspect of the present invention, there is provided a smoking substitute device comprising a consumable as described above according to the first or second aspect.

5 According to a fourth aspect of the present invention, there is provided a method of manufacturing a consumable for a smoking substitute device, the method comprising injection moulding: a tank for storing an e-liquid; and at least one wall forming a part of the consumable, wherein the injection moulding comprises removing a first mould along a demoulding direction of the at least one wall, wherein the at least one wall tapers along the demoulding direction.

10 The at least one wall may be as described above for the first aspect.

According to a fifth aspect of the present invention, a manufacturing assembly comprising a first mould and a second mould, the first mould and second mould configured to brought together to form a cavity, wherein the cavity has a shape such that when material is injected into the cavity, the material forms a consumable as described above for the first or second aspect.

15 The invention includes the combination of the aspects and preferred features described except where such a combination is clearly impermissible or expressly avoided.

Summary of the Figures

20 So that the invention may be understood, and so that further aspects and features thereof may be appreciated, embodiments illustrating the principles of the invention will now be discussed in further detail with reference to the accompanying figures, in which:

Figure 1(a) is a side view of a smoking substitute device;

Figure 1(b) is a side view of main body of the smoking substitute device;

Figure 1(c) is a side view of consumable of the smoking substitute device;

25 **Figure 2(a)** is a schematic drawing of the main body;

Figure 2(b) is a schematic drawing of the consumable;

Figure 3 is a cross-sectional view of the consumable; and

Figure 4 is a cross-sectional view of a manufacturing assembly.

30 ***Detailed Description of the Invention***

Aspects and embodiments of the present invention will now be discussed with reference to the accompanying figures. Further aspects and embodiments will be apparent to those skilled in the art. All documents mentioned in this text are incorporated herein by reference.

Figure 1(a) shows a smoking substitute device 110. In this example, the smoking substitute device 110 includes a main body 120 and a consumable 150. The consumable 150 may alternatively be referred to as a “pod”. The consumable may also be referred to as a cartridge or cartomizer.

In this example, the smoking substitute device 110 is a closed system vaping device, wherein the consumable 150 includes a sealed tank or liquid reservoir 156 and is intended for one-use only.

Figure 1(a) shows the smoking substitute device 110 with the main body 120 physically coupled to the consumable 150.

Figure 1(b) shows the main body 120 of the smoking substitute device 110 without the consumable 150.

Figure 1(c) shows the consumable 150 of the smoking substitute device 110 without the main body 120.

The main body 120 and the consumable 150 are configured to be physically coupled together, in this example by pushing the consumable 150 into an aperture in a top end 122 of the main body 120, such that there is an interference fit between the main body 120 and the consumable 150. In other examples, the main body 120 and the consumable could be physically coupled together by screwing one onto the other, or through a bayonet fitting, for example. An optional light 126, e.g. an LED, located behind a small translucent cover, is located a bottom end 124 of the main body 120. The light 126 may be configured to illuminate when the smoking substitute device 110 is activated.

The consumable 150 includes a mouthpiece (not shown in Fig. 1(a)-(c)) at a top end 152 of the consumable 150, as well as one or more air inlets (not shown) so that air can be drawn into the smoking substitute device 110 when a user inhales through the mouthpiece. At a bottom end 154 of the consumable 150, there is located a tank 156 that contains e-liquid. The tank 156 may be a translucent body, for example.

The tank 156 preferably includes a window 158, so that the amount of e-liquid in the tank 156 can be visually assessed. The main body 120 includes a slot 128 so that the window 158 of the consumable 150 can be seen whilst the rest of the tank 156 is obscured from view when the consumable 150 is inserted into the aperture in the top end 122 of the main body 120.

The tank 156 may be referred to as a “clearomizer” if it includes a window 158, or a “cartomizer” if it does not.

The consumable 150 may identify itself to the main body 120, via an electrical interface, RFID chip, or barcode.

Figure 2(a) is a schematic drawing of the main body 120 of the smoking substitute device 110.

Figure 2(b) is a schematic drawing of the consumable 150 of the smoking substitute device 110.

As shown in Figure 2(a), the main body 120 includes a power source 128, a control unit 130, a memory 132, a wireless interface 134, an electrical interface 136, and, optionally, one or more additional components 138.

The power source 128 is preferably a battery, more preferably a rechargeable battery.

The control unit 130 may include a microprocessor, for example.

The memory 132 is preferably includes non-volatile memory. The memory may include instructions which, when implemented, cause the control unit 130 to perform certain tasks or steps of a method.

5 The wireless interface 134 is preferably configured to communicate wirelessly with another device, for example a mobile device, e.g. via Bluetooth®. To this end, the wireless interface 134 could include a Bluetooth® antenna. Other wireless communication interfaces, e.g. WiFi®, are also possible. The wireless interface 134 may also be configured to communicate wirelessly with a remote server.

10 The electrical interface 136 of the main body 120 may include one or more electrical contacts. The electrical interface 136 may be located in, and preferably at the bottom of, the aperture in the top end 122 of the main body 120. When the main body 120 is physically coupled to the consumable 150, the electrical interface 136 may be configured to pass electrical power from the power source 128 to (e.g. a heating device of) the consumable 150 when the smoking substitute device 110 is activated, e.g. via the electrical interface 160 of the consumable 150 (discussed below). The electrical interface may be configured to receive power from a charging station, when the main body 120 is not physically coupled to the consumable 150 and is instead coupled to the charging station. The electrical interface 136 may also be used to identify the consumable 150 from a list of known consumables. For example, the consumable may be a particular flavour and/or have a certain concentration of nicotine. This can be identified to the control unit 130 of the main body 120 when the consumable is connected to the main body. Additionally, or alternatively, there may be a separate communication interface provided in the main body 120 and a corresponding communication interface in the consumable 150 such that, when connected, the consumable can identify itself to the main body 120.

The additional components 138 of the main body 120 may comprise the optional light 126 discussed above.

25 The additional components 138 of the main body 120 may, if the power source 128 is a rechargeable battery, comprise a charging port configured to receive power from the charging station. This may be located at the bottom end 124 of the main body 120. Alternatively, the electrical interface 136 discussed above is configured to act as a charging port configured to receive power from the charging station such that a separate charging port is not required.

30 The additional components 138 of the main body 120 may, if the power source 128 is a rechargeable battery, include a battery charging control circuit, for controlling the charging of the rechargeable battery. However, a battery charging control circuit could equally be located in the charging station (if present).

35 The additional components 138 of the main body 120 may include an airflow sensor for detecting airflow in the smoking substitute device 110, e.g. caused by a user inhaling through a mouthpiece 166 (discussed below) of the smoking substitute device 110. The smoking substitute device 110 may be configured to be activated when airflow is detected by the airflow sensor. This optional sensor could alternatively be included in the consumable 150 (though this is less preferred where the consumable 150 is intended to be disposed of after use, as in this example). The airflow sensor can be used to determine,

for example, how heavily a user draws on the mouthpiece or how many times a user draws on the mouthpiece in a particular time period.

The additional components 138 of the main body 120 may include an actuator, e.g. a button. The smoking substitute device 110 may be configured to be activated when the actuator is actuated. This provides an alternative to the airflow sensor noted, as a mechanism for activating the smoking substitute device 110.

As shown in Figure 2(b), the consumable 150 includes the tank 156, an electrical interface 160, a heating device 162, one or more air inlets 164, a mouthpiece 166, and, optionally, one or more additional components 168.

The electrical interface 160 of the consumable 150 may include one or more electrical contacts. The electrical interface 136 of the main body 120 and an electrical interface 160 of the consumable 150 are preferably configured to contact each other and thereby electrically couple the main body 120 to the consumable 150 when the bottom end 154 of the consumable 150 is inserted into the top end of the main body 122 (as shown in Fig. 1a) to physically couple the consumable 150 to the main body 120. In this way, electrical energy (e.g. in the form of an electrical current) is able to be supplied from the power source 128 in the main body 120 to the heating device 162 in the consumable 150.

The heating device 162 is preferably configured to heat e-liquid contained in the tank 156, e.g. using electrical energy supplied from the power source 128, in order to vaporise the e-liquid. In one example, the heating device 162 includes a heating filament and a wick, wherein a first portion of the wick extends into the tank 156 in order to draw e-liquid out from the tank 156, and wherein the heating filament coils around a second portion of the wick located outside the tank 156. In this example, the heating filament is configured to heat up e-liquid drawn out of the tank 156 by the wick to produce an aerosol vapour.

The one or more air inlets 164 are preferably configured to allow air to be drawn into the smoking substitute device 110, when a user inhales through the mouthpiece 166. When the consumable 150 is physically coupled to the main body 120, the air inlet 164 receives air which flows from the top end 122 of the main body 120, between the main body 120 and the bottom end 154 of the consumable 150.

In use, a user activates the smoking substitute device 110, e.g. through actuating an actuator included in the main body 120 or by inhaling through the mouthpiece 166 as described above. Upon activation, the control unit 130 may supply electrical energy from the power source 128 to the heating device 162 (via electrical interfaces 136, 166), which may cause the heating device 162 to heat e-liquid drawn from the tank 156 to produce a vapour which is inhaled by a user through the mouthpiece 166.

As an example of one of the one or more additional components 168, an interface for obtaining an identifier of the consumable may be provided. As discussed above, this interface may be, for example, an RFID reader, a barcode or QR code reader, or an electronic interface which is able to identify the consumable to the main body. The consumable may, therefore include any one or more of an RFID chip, a barcode or QR code, or memory within which is an identifier and which can be interrogated via the electronic interface in the main body.

Of course, a skilled reader would readily appreciate that the smoking substitute device 110 shown in Figs. 1 and 2 shows just one example implementation of a smoking substitute device, and that other forms of smoking substitute device could be used.

As another example, an entirely disposable (one use) smoking substitute device could be used as the smoking substitute device.

Fig. 3 shows a cross-sectional view of a consumable 150. The consumable comprises a tank 156 for storing e-liquid, a mouthpiece 166 and an outlet 306, which in this example is a chimney or tube. The tank 156 surrounds the outlet 306, with the outlet extending through a central portion of the tank 156. The outlet 306 has a substantially circular cross-section.

The tank 156 is provided by an outer casing of the consumable 150. The outer casing of the consumable 150 comprises a tank wall 304. The tank wall 304 extends completely around the outlet 306 to define the tank 156 in the form of an annulus between the outlet 306 and the tank wall 304. The tank wall 304 extends from the bottom of the consumable up to the mouthpiece 166. Where the tank wall 304 meets the mouthpiece 166, the mouthpiece 166 has a larger outer width than the tank 156, which means that there is a lip 168 around the bottom of the mouthpiece 166.

The tank wall 304 tapers, which means that it has a thickness which decreases. The thickness of the tank wall 304 decreases along a first demoulding direction, as defined below with respect to Fig. 4. The first demoulding direction is a downward direction in Fig. 3, which is a direction away from the mouthpiece 166. This means that, aside from a small number of indents (for example, to provide physical connection between the consumable 150 and the main body 120), the thickness of the tank wall 304 generally decreases with increasing distance along the first demoulding direction.

The thickness of the tank wall 304 decreases due to internal surfaces of the tank wall 304 being angled to the first demoulding direction at a first tank draft angle. Additionally, the thickness of the tank wall 304 decreases due to external surfaces of the tank wall 304 being angled to the first demoulding direction at a second tank draft angle.

The first tank draft angle is preferably at least 0.5 degrees, preferably at least 1.0 degrees, preferably at least 1.5 degrees, preferably at least 2.0 degrees, preferably at least 2.5 degrees, preferably at least 3.0 degrees, preferably at least 3.5 degrees.

The second tank draft angle is preferably at least 0.5 degrees, preferably at least 1.0 degrees, preferably at least 1.5 degrees, preferably at least 2.0 degrees, preferably at least 2.5 degrees, preferably at least 3.0 degrees, preferably at least 3.5 degrees.

The first tank draft angle is preferably not more than 3.5 degrees, preferably not more than 3.0 degrees, preferably not more than 2.5 degrees, preferably not more than 2.0 degrees, preferably not more than 1.5 degrees, preferably not more than 1.0 degrees, preferably not more than 0.5 degrees.

The second tank draft angle is preferably not more than 3.5 degrees, preferably not more than 3.0 degrees, preferably not more than 2.5 degrees, preferably not more than 2.0 degrees, preferably not more than 1.5 degrees, preferably not more than 1.0 degrees, preferably not more than 0.5 degrees.

It will be appreciated that the first tank draft angle and the second tank draft angle need not be the same as each other, and may be selected independently according to the above draft angles. In fact, one of the first tank draft angle and the second tank draft angle may be substantially 0 degrees, while the other may vary as described above.

5 Similarly, the outlet 306 comprises an outlet wall 307. The outlet wall 307 extends fully around the circular cross-section of the outlet 306 to provide the outlet 306. The outlet wall 307 tapers, which means that it has a thickness which decreases. The thickness of the outlet wall 307 decreases along the first demoulding direction, as defined below with respect to Fig. 4. As before, the first demoulding direction is a downward direction in Fig. 3, which is a direction away from the mouthpiece 166. This means that the
10 thickness of the outlet wall 307 generally decreases along the first demoulding direction. The thickness of the outlet wall 307 decreases due to an inner surface of the outlet wall 307 being angled to the first demoulding direction at a first outlet draft angle. Additionally, the thickness of the outlet wall 307 decreases due to an external surface of the outlet wall 307 being angled to the first demoulding direction at a second outlet draft angle.

15 The first outlet draft angle is preferably at least 0.5 degrees, preferably at least 1.0 degrees, preferably at least 1.5 degrees, preferably at least 2.0 degrees, preferably at least 2.5 degrees, preferably at least 3.0 degrees, preferably at least 3.5 degrees.

The second outlet draft angle is preferably at least 0.5 degrees, preferably at least 1.0 degrees, preferably at least 1.5 degrees, preferably at least 2.0 degrees, preferably at least 2.5 degrees, preferably
20 at least 3.0, preferably at least 3.5.

The first outlet draft angle is preferably not more than 3.5 degrees, preferably not more than 3.0 degrees, preferably not more than 2.5 degrees, preferably not more than 2.0 degrees, preferably not more than 1.5 degrees, preferably not more than 1.0 degrees, preferably not more than 0.5 degrees.

The second outlet draft angle is preferably not more than 3.5 degrees, preferably not more than 3.0
25 degrees, preferably not more than 2.5 degrees, preferably not more than 2.0 degrees, preferably not more than 1.5 degrees, preferably not more than 1.0 degrees, preferably not more than 0.5 degrees.

It will be appreciated that the first outlet draft angle and the second outlet draft angle need not be the same as each other, and may be selected independently according to the above draft angles. In fact, one of the first outlet draft angle and the second outlet draft angle may be substantially 0 degrees, while the
30 other may vary as described above.

Similarly, the outlet draft angles and tank draft angles may be selected independently from each other according to the above draft angles.

The outlet 306 has an internal width (i.e. a width/diameter of a passage through the outlet 306) which generally decreases in a downstream direction (i.e. downstream with respect to the fluid flow when a user
35 inhales, which is an upward direction in Fig. 3). The downstream direction is a direction towards the mouthpiece 166 and, in this example, is an opposite direction to the first demoulding direction. This decrease in width occurs due to the second outlet draft angle described above.

- A difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is more than 0.10 mm. More specifically, the difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is more than 0.12 mm. More specifically, the difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is more than 0.14 mm. More specifically, the difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is more than 0.16 mm. More specifically, the difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is more than 0.18 mm.
- 10 The difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is not more than 0.30 mm. More specifically, the difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is not more than 0.28 mm. More specifically, the difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is not more than 0.26 mm. More specifically, the difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is not more than 0.24 mm. More specifically, the difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is not more than 0.22 mm.
- 20 More specifically, the difference between the internal width at the downstream end of the outlet 306 and the internal width at the upstream end of the outlet 306 is substantially 0.20 mm. The outlet 306 is substantially 30 mm long. In other examples, the outlet 306 may have a length less than 30 mm.
- The airway has an internal width less than 5.0 mm at an upstream end of the outlet 306. More specifically, the airway has an internal width less than 4.5 mm at the upstream end of the outlet 306. More specifically, the airway has an internal width less than 4.2 mm at the upstream end of the outlet 306. More specifically, the airway has an internal width less than 4.0 mm at the upstream end of the outlet 306. More specifically, the airway has an internal width less than 3.8 mm at the upstream end of the outlet 306.
- 25 The airway has an internal width greater than 2.0 mm at the upstream end of the outlet 306. More specifically, the airway has an internal width greater than 2.5 mm at the upstream end of the outlet 306. More specifically, the airway has an internal width greater than 3.0 mm at the upstream end of the outlet 306. More specifically, the airway has an internal width greater than 3.2 mm at the upstream end of the outlet 306. More specifically, the airway has an internal width greater than 3.4 mm at the upstream end of the outlet 306.
- 30 More specifically, the airway has an internal width of substantially 3.6 mm at the upstream end of the outlet 306.
- 35 The airway has an internal width less than 4.8 mm at a downstream end of the outlet 306. More specifically, the airway has an internal width less than 4.3 mm at the downstream end of the outlet 306. More specifically, the airway has an internal width less than 4.0 mm at the downstream end of the outlet 306. More specifically, the airway has an internal width less than 3.8 mm at the downstream end of the

outlet 306. More specifically, the airway has an internal width less than 3.6 mm at the downstream end of the outlet 306.

The airway has an internal width greater than 1.8 mm at the downstream end of the outlet 306. More specifically, the airway has an internal width greater than 2.3 mm at the upstream end of the outlet 306.

5 More specifically, the airway has an internal width greater than 2.8 mm at the downstream end of the outlet 306. More specifically, the airway has an internal width greater than 3.0 mm at the downstream end of the outlet 306. More specifically, the airway has an internal width greater than 3.2 mm at the downstream end of the outlet 306.

10 More specifically, the airway has an internal width of substantially 3.4 mm at a downstream end of the outlet 306.

The mouthpiece 166 comprises a mouthpiece aperture 314. The outlet 306 fluidly connects the heating device 162 to the mouthpiece 166, and, more specifically, the outlet 306 fluidly connects the heating device 162 to the mouthpiece aperture 314.

15 The mouthpiece aperture 314 has a radially inwardly directed inner surface 316. The inner surface 316 of the mouthpiece aperture 314 joins an outer surface 318 of the mouthpiece 166 (i.e. a surface which the user inserts into their mouth in use) at an outer edge 320 of the mouthpiece aperture 314. The outer edge 320 surrounds the mouthpiece aperture 314.

20 At the outer edge 320, the angle between the inner surface 316 of the mouthpiece aperture 314 and the outer surface 318 of the mouthpiece 166 (i.e. the "mouthpiece angle") is less than 90 degrees. In the present example, this is due to the outer edge 320 being rounded to define a substantially smooth curve. For the purposes of this disclosure, the rounded portion is considered to be part of the inner surface 316. In this case, where the outer edge 320 is rounded, the mouthpiece angle is substantially 0 degrees. The smooth curve extends between the outer surface 318 and a lower portion of the inner surface 316, the lower portion extending in a substantially downward direction in Fig. 3 (i.e. normal to the outer surface 318 at the outer edge 320 and parallel to the direction of fluid flow in the outlet 306).

25 In the present example, the curve followed by the rounded portion is substantially an arc of a circle. The radius of the rounded portion is preferably less than 1.0mm. More specifically, the radius of the rounded portion is less than 0.8. More specifically, the radius of the rounded portion is less than 0.6 mm.

30 The radius of the rounded portion is greater than 0.2 mm. More specifically, the radius of the rounded portion is greater than 0.4 mm.

However, in other examples, the radius of the rounded portion is less than 0.4 mm, and may be less than 0.2 mm. However, the rounded portion need not follow such a curve, and could be any substantially smooth curve.

35 In other examples, the outer edge 320 is not rounded, and is instead chamfered or bevelled, such that the inner surface 316 comprises an angled portion, which extends at constant angle from the outer edge 320. Such a portion may extend the full depth of the mouthpiece aperture 314 (i.e. up to an inner edge 322, where the mouthpiece aperture 314 meets an inner surface of the mouthpiece 166), or may extend only

part of the depth of the mouthpiece aperture 314, up to a lower portion extending in the substantially downward direction as described above.

The mouthpiece angle is preferably less than 75 degrees, preferably less than 60 degrees, preferably less than 45 degrees, preferably less than 30 degrees, preferably less than 15 degrees, preferably substantially 0 degrees.

In other examples, the inner surface 316 may comprise a combination of rounded portions and angled portions, and may include several angled portions angled at different angles.

Within the tank 156 there is a heating device 162, which in this example is a coil and wick assembly. The heating device 162 comprises an outer shell with one or more apertures. These apertures are filled with a wick material, so that e-liquid may only ingress the heating device 162 from the tank 156 via capillary action. The wick material passes through or proximal to a coil, which is connected to one or more electrical contacts.

The consumable 150 further comprises a tank seal 308, which seals a bottom portion of the tank 156 beneath the heating device 162. The tank seal 308 is connected to the heating device 162, and the tank seal 308 comprises an air inlet 164, such that air flow is permitted from outside the tank through the air inlet 164 to the heating device 162.

The tank 156, the outlet 306 and the mouthpiece 166 are integrally formed with each other. The tank 156, the outlet 306 and the mouthpiece 166 make up a single component formed from a continuous piece of material. The tank 156, the outlet 306 and the mouthpiece 166 are formed in an injection moulding process as described below with respect to Fig. 4. The tank 156, the outlet 306 and the mouthpiece 166 are made of a thermoplastic material. More specifically, the tank 156, the outlet 306 and the mouthpiece 166 are made of polypropylene.

The outlet 306 comprises a filter 310 located within the outlet 306. The filter 310 is tubular with an annular cross-section, and an outer surface of the filter 310 is in contact with an inner surface of the outlet 306.

The outlet 306 comprises a void 312, and the filter 310 does not extend into the void 312. The void 312 is a portion of the outlet 306 in which no filter is present.

The void 312 comprises a downstream void portion 313 downstream of the filter 310. The downstream portion is located above the filter 310 and below the mouthpiece aperture 314 in Fig. 3. In other examples, the filter 310 extends to the mouthpiece aperture 314. The void 312 further comprises an upstream void portion 315 upstream of the filter 310. The void 312 occupies preferably at least 5% of a total length of the outlet 306, preferably at least 10% of the total length of the outlet 306, preferably at least 15% of the total length of the outlet 306, preferably at least 20% of the total length of the outlet 306, preferably at least 25% of the total length of the outlet 306.

The void 312 occupies preferably not more than 30% of a total length of the outlet 306, preferably not more than 25% of the total length of the outlet 306, preferably not more than 20% of the total length of the outlet 306, preferably not more than 15% of the total length of the outlet 306, preferably not more than

10% of the total length of the outlet 306. In this example, the filter 310 has a length of substantially 25 mm.

The outlet 306 comprises a retainer (not shown) which retains the filter 310 in position in the outlet 306. The retainer comprises a rib, which extends inwardly from an inner surface of the outlet to retain the filter
5 in position in the outlet by an interference fit.

The filter 310 is made from a fabric, which may be cotton or another fibre. The filter may be formed of a mesh. The filter permits flow of vaporised e-liquid through the filter 310, but prevents flow of unvaporised e-liquid through the filter 310. This reduces leakage of unvaporised e-liquid into the user's mouth. The filter 310 may be a gas-permeable and liquid-impermeable membrane.

10 In use, when the consumable 150 is connected to the main body 120, the user inserts the mouthpiece 166 into their mouth. The user inhales through the mouthpiece aperture 314, which draws air through the air inlet 164 and into the heating device 162.

At the same time, an electrical current is provided to the one or more contacts, which causes heating of the coil, and consequent vaporisation of the e-liquid within the wick material. The air flow passes through
15 the coil and wick assembly, drawing with it vaporised e-liquid to form the aerosol vapour. The aerosol vapour flows up the outlet 306, before exiting the consumable 150 via mouthpiece aperture 314. The e-liquid only enters the coil and wick assembly via the one or more apertures and then, only via the wick.

As the aerosol vapour flows through the outlet 306, it passes the filter 310, which filters unvaporised e-liquid out of the aerosol vapour. The void 312 provides a portion of the outlet 306 for condensation
20 settling. The void 312 provides an unobstructed portion of the inner surface of the outlet 306 at which unvaporised e-liquid which remains in the aerosol vapour downstream of the filter 314 can condense and flow down the inner surface of the outlet 306 into the filter 314. This further reduces leakage of unvaporised e-liquid into the user's mouth.

Fig. 4 shows a drawing of a manufacturing assembly 400 which is used to manufacture the consumable
25 150. The manufacturing assembly 400 comprises a first mould 402 and a second mould 404.

The first mould 402 has a shape which complements that of a first end (a lower end in Fig. 3) of the integrally formed tank 156, mouthpiece 166 and outlet 306. The first mould 402 therefore has a shape which matches the inner surfaces of the tank 156, and the inner and outer surfaces of the outlet 306.

The second mould 404 has a shape which complements that of a second end (an upper end in Fig. 4) of
30 the integrally formed tank 156, mouthpiece 166 and outlet 306. The second mould 404 therefore has a shape which matches the outer surface 318 of the mouthpiece 166 and the inner surface 316 of the mouthpiece aperture 314.

When the first mould 402 and the second mould 404 are brought together, they define a closed cavity which has the shape of the tank 156, the mouthpiece 166 and the outlet 306.

35 To manufacture the tank 156, the mouthpiece 166 and the outlet 306, heated material is injected into the cavity between the first mould 402 and the second mould 404. At this point, the first mould 402 and the

second mould 404 meet at a boundary between external surfaces of the mouthpiece 166 and the tank 156.

The material is subsequently cooled, and the first mould 402 and the second mould 404 are separated, with the first mould 402 travelling in the first demoulding direction 406 (i.e. away from the second mould 404) and the second mould 404 travelling in a second demoulding direction 408 (i.e. away from the first mould 402 and opposite to the first demoulding direction 406). For a particular component, a demoulding direction is a direction along which a mould which contacts that component is removed during an injection moulding process.

The filter 310 is then inserted into the outlet 306, and the heating device 162, tank seal 308 and any additional components are inserted into the tank 156. The filter 310 is pushed into the outlet 306 through the upstream end of the outlet 306. Since the filter 310 is shorter than the outlet 306, the outlet 306 comprises the void 312.

In some examples (particularly where the void comprises the downstream void portion 313), the filter 310 is pushed into the outlet 306 using an insertion tool (not shown), with the insertion tool sized so that the filter 310 is inserted such that the filter 310 does not extend to the downstream end of the outlet 306, thereby providing the downstream void portion 313. In other examples, the filter 310 is pushed fully up to the mouthpiece aperture 314, with the filter 310 abutting against the mouthpiece aperture 314, which is narrower than the outlet 306.

The features disclosed in the foregoing description, or in the following claims, or in the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for obtaining the disclosed results, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

While the invention has been described in conjunction with the exemplary embodiments described above, many equivalent modifications and variations will be apparent to those skilled in the art when given this disclosure. Accordingly, the exemplary embodiments of the invention set forth above are considered to be illustrative and not limiting. Various changes to the described embodiments may be made without departing from the spirit and scope of the invention.

For the avoidance of any doubt, any theoretical explanations provided herein are provided for the purposes of improving the understanding of a reader. The inventors do not wish to be bound by any of these theoretical explanations.

Any section headings used herein are for organizational purposes only and are not to be construed as limiting the subject matter described.

Throughout this specification, including the claims which follow, unless the context requires otherwise, the words "have", "comprise", and "include", and variations such as "having", "comprises", "comprising", and "including" will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

It must be noted that, as used in the specification and the appended claims, the singular forms “a,” “an,” and “the” include plural referents unless the context clearly dictates otherwise. Ranges may be expressed herein as from “about” one particular value, and/or to “about” another particular value. When such a range is expressed, another embodiment includes from the one particular value and/or to the other particular value. Similarly, when values are expressed as approximations, by the use of the antecedent “about,” it will be understood that the particular value forms another embodiment. The term “about” in relation to a numerical value is optional and means, for example, +/- 10%.

The words "preferred" and "preferably" are used herein refer to embodiments of the invention that may provide certain benefits under some circumstances. It is to be appreciated, however, that other embodiments may also be preferred under the same or different circumstances. The recitation of one or more preferred embodiments therefore does not mean or imply that other embodiments are not useful, and is not intended to exclude other embodiments from the scope of the disclosure, or from the scope of the claims.

Claims:

1. A consumable for a smoking substitute device, the consumable comprising:
a tank for storing an e-liquid; and
5 at least one wall forming a part of the consumable,
wherein the consumable is formed by injection moulding, and the at least one wall tapers along a demoulding direction of the at least one wall.
2. A consumable according to claim 1, wherein the at least one wall comprises a tank wall.
10
3. A consumable according to either claim 1 or claim 2, wherein the consumable comprises an outlet, the outlet configured to provide fluid communication between the tank and a mouthpiece aperture, wherein the at least one wall comprises an outlet wall.
- 15 4. A consumable according to claim 3, wherein the outlet defines an airway, the airway having a width which decreases in a downstream direction due to the decreasing of the thickness of the wall of the outlet.
5. A consumable for a smoking substitute device, the consumable comprising: a tank for storing an e-liquid; an outlet, wherein the outlet is configured to provide fluid communication between the tank and
20 a mouthpiece aperture, so that the mouthpiece aperture receives an aerosol vapour formed from the e-liquid in use, wherein the outlet has an internal width which decreases in a downstream direction.
6. A consumable according to claim 5 wherein the outlet comprises an outlet wall, and wherein a thickness of the outlet wall tapers/decreases in an upstream direction to cause the internal width of the outlet to decrease in the downstream direction.
- 25 7. A consumable according to claim 5 or 6 wherein the internal width of the outlet decreases at a substantially constant rate in the downstream direction.
8. A consumable according to any one of claims 5 to 7 wherein a difference between an internal width at the downstream end of the outlet and an internal width at the upstream end of the outlet is greater than 0.10 mm.
- 30 9. A consumable according to any one of claims 5 to 8 wherein the outlet is integrally formed with a tank wall which tapers in an upstream direction.
10. A consumable according to any one of claims 3 to 9 wherein the consumable comprises a filter for filtering unvaporised liquid from the aerosol vapour, wherein the filter is located within the outlet.
35
11. A consumable according to any one of claims 1 to 4 or 9 to 10, wherein the thickness of the wall decreases due to a surface of the wall being angled at a draft angle.
12. A consumable according to claim 11, wherein the draft angle is at least 1.5 degrees.

13. A consumable according to either claim 11 or claim 12, wherein the draft angle is not more than 2.5 degrees.
- 5 14. A consumable according to any one of the preceding claims and further comprising a heating device for vaporising the e-liquid to form the aerosol vapour.
15. A consumable according to any one of the preceding claims and further comprising a mouthpiece, the mouthpiece comprising the mouthpiece aperture, wherein the mouthpiece aperture is in fluid
10 communication with the tank, so that the mouthpiece aperture receives an aerosol vapour formed from the e-liquid in use.
16. A consumable according to claim 15 wherein the mouthpiece is formed in a lateral end surface of the consumable.
- 15 17. A smoking substitute device comprising a consumable according to any one the preceding claims.
18. A method of manufacturing a consumable for a smoking substitute device, the method comprising injection moulding:
20 a tank for storing an e-liquid; and
at least one wall forming a part of the consumable,
wherein the injection moulding comprises removing a first mould along a demoulding direction of the at least one wall, wherein the at least one wall tapers along the demoulding direction.
- 25 19. A manufacturing assembly comprising a first mould and a second mould, the first mould and second mould configured to brought together to form a cavity, wherein the cavity has a shape such that when material is injected into the cavity, the material forms a consumable according to any one of claims 1-16.

30

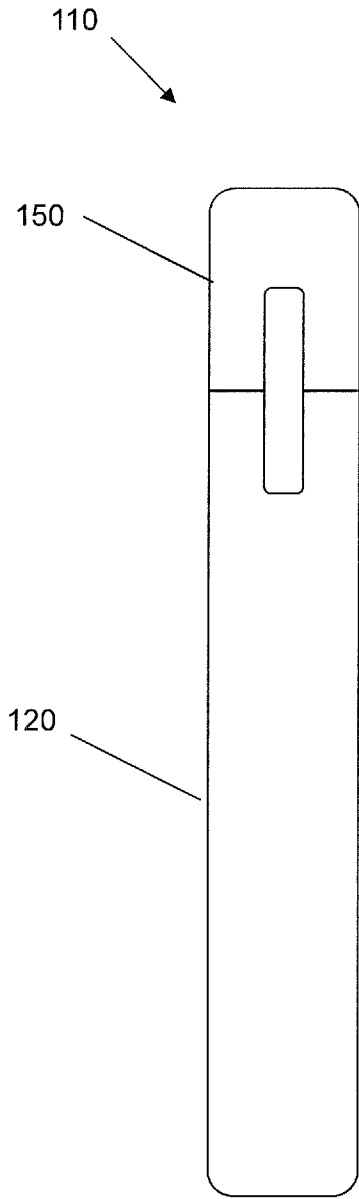


Fig. 1(a)

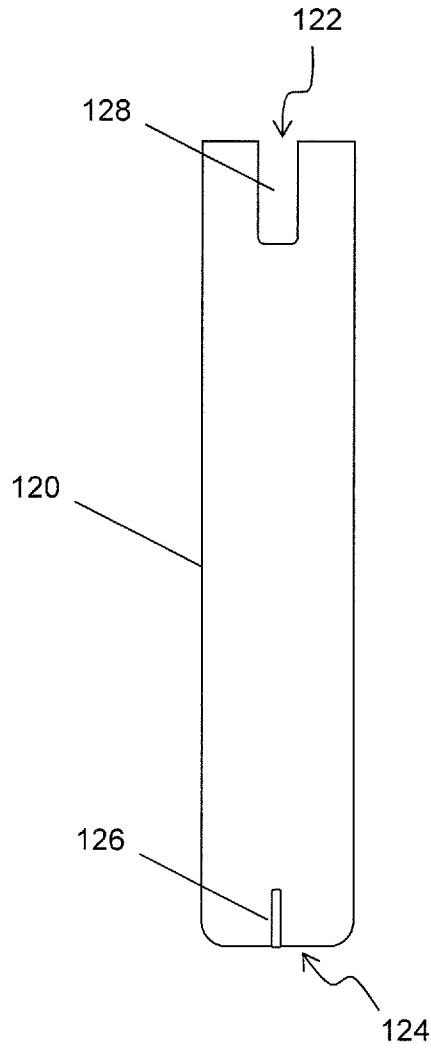


Fig. 1(b)

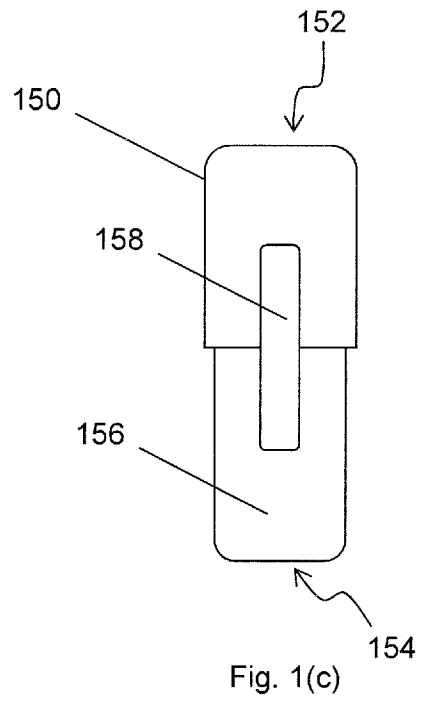


Fig. 1(c)

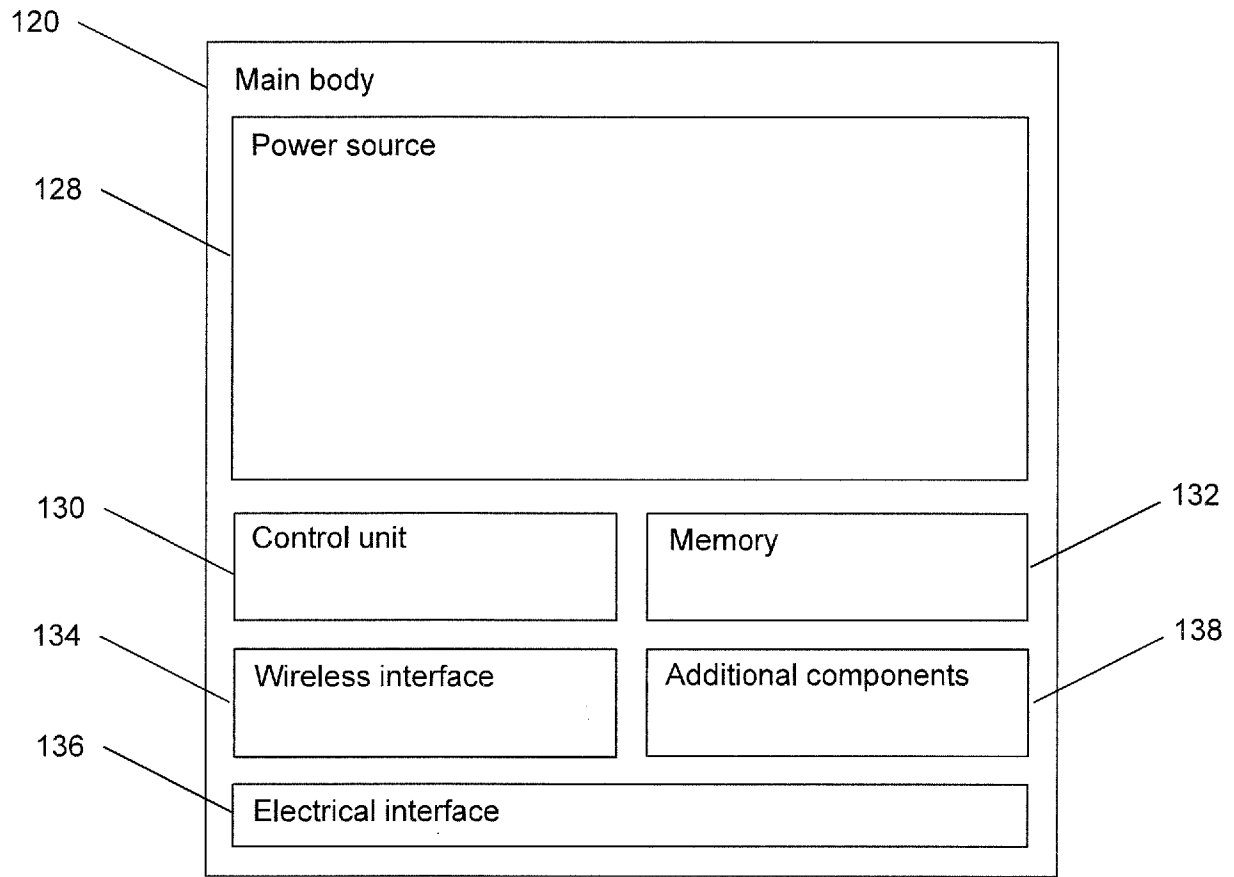


Fig. 2(a)

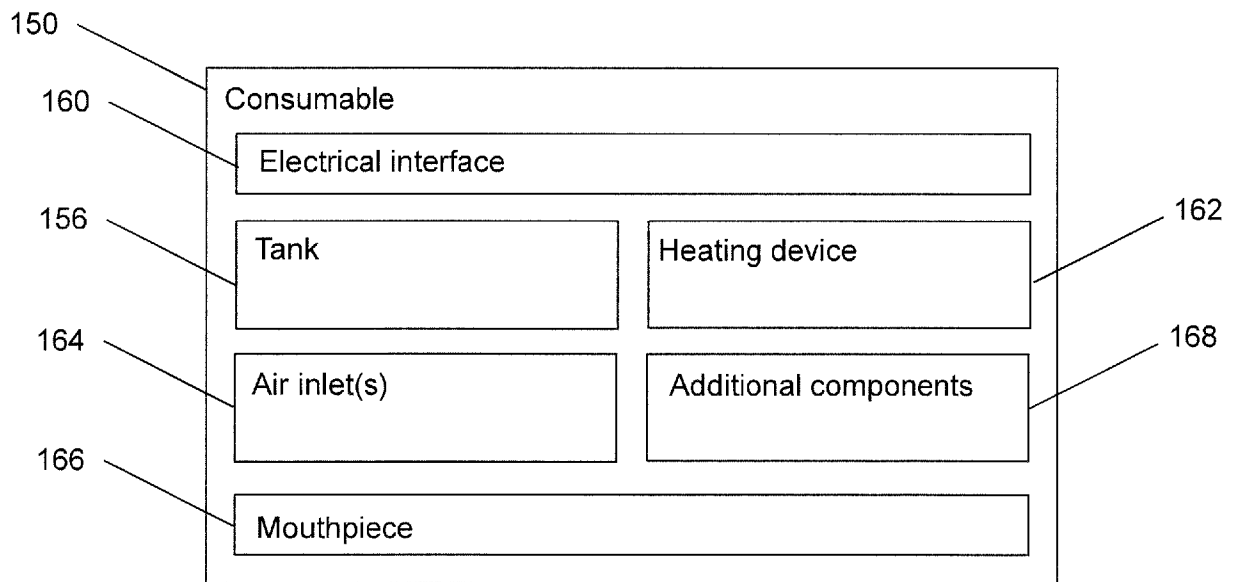


Fig. 2(b)

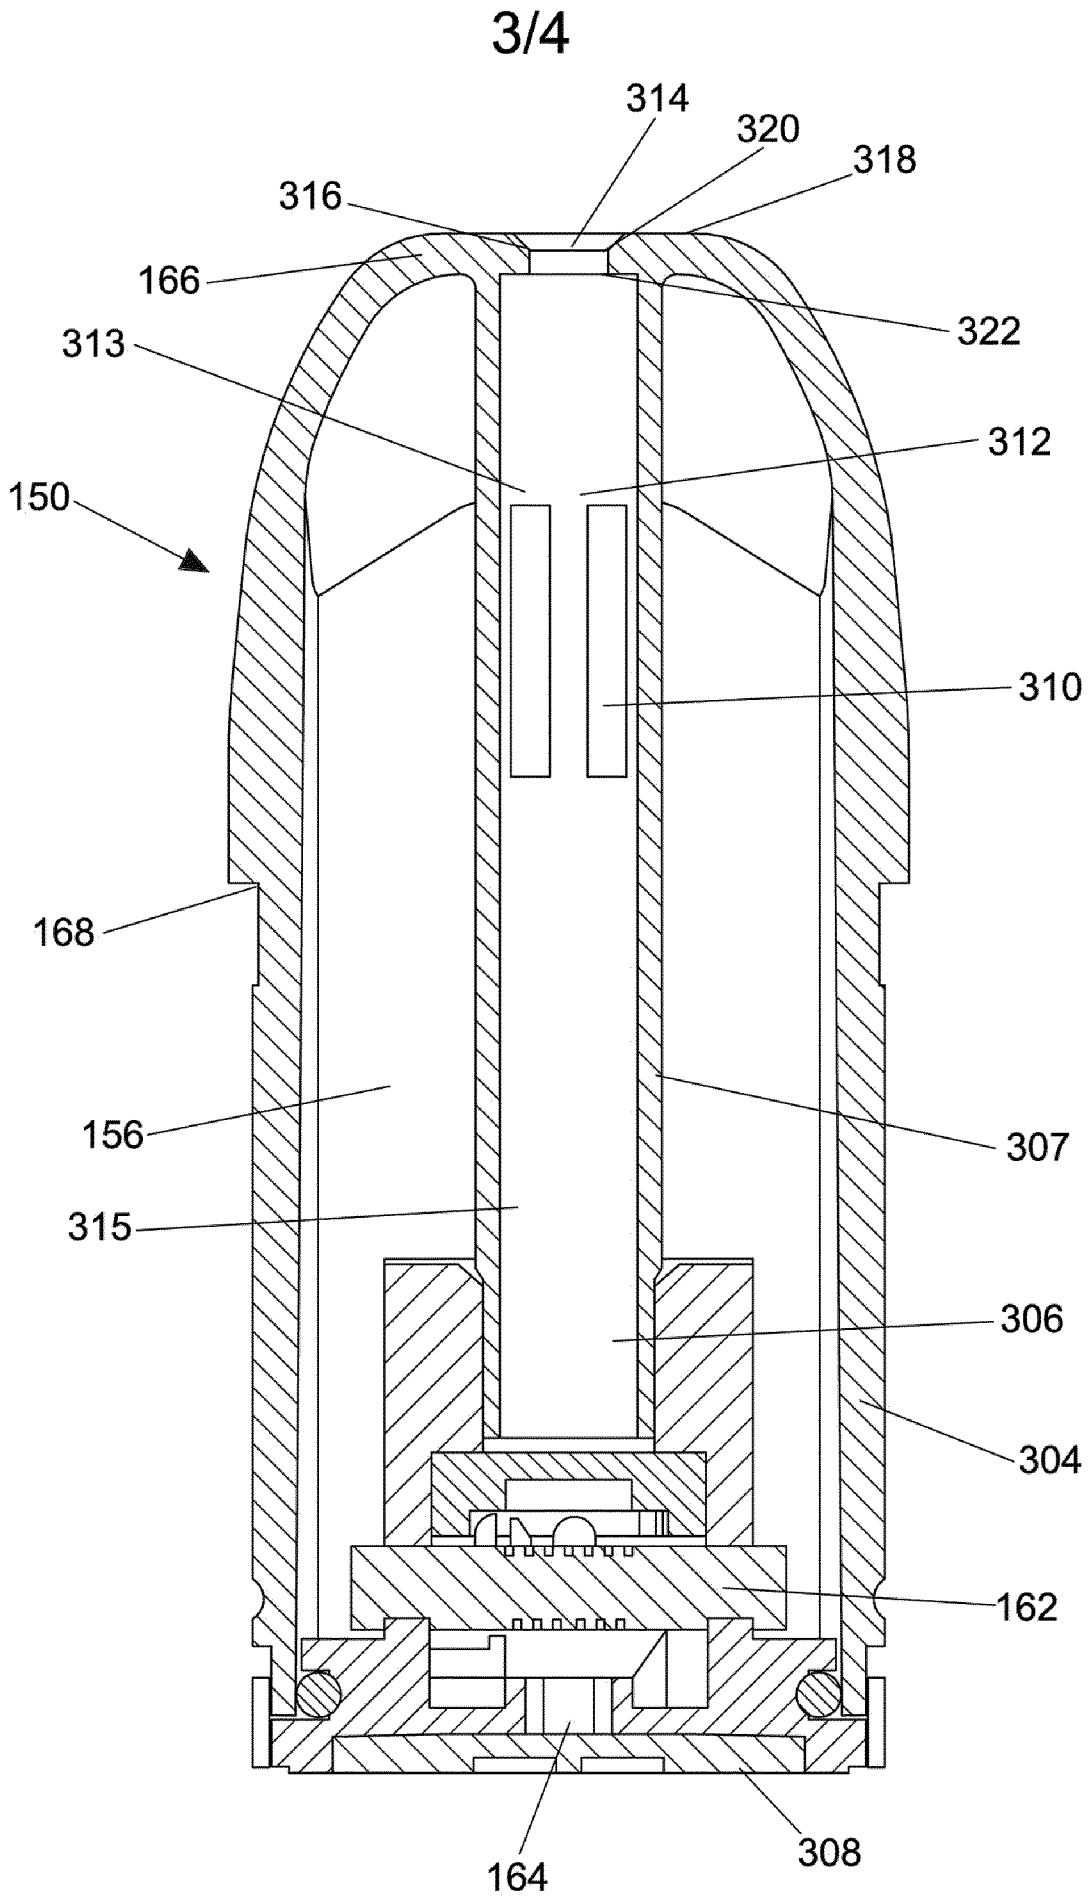


Fig. 3

SUBSTITUTE SHEET (RULE 26)

4/4

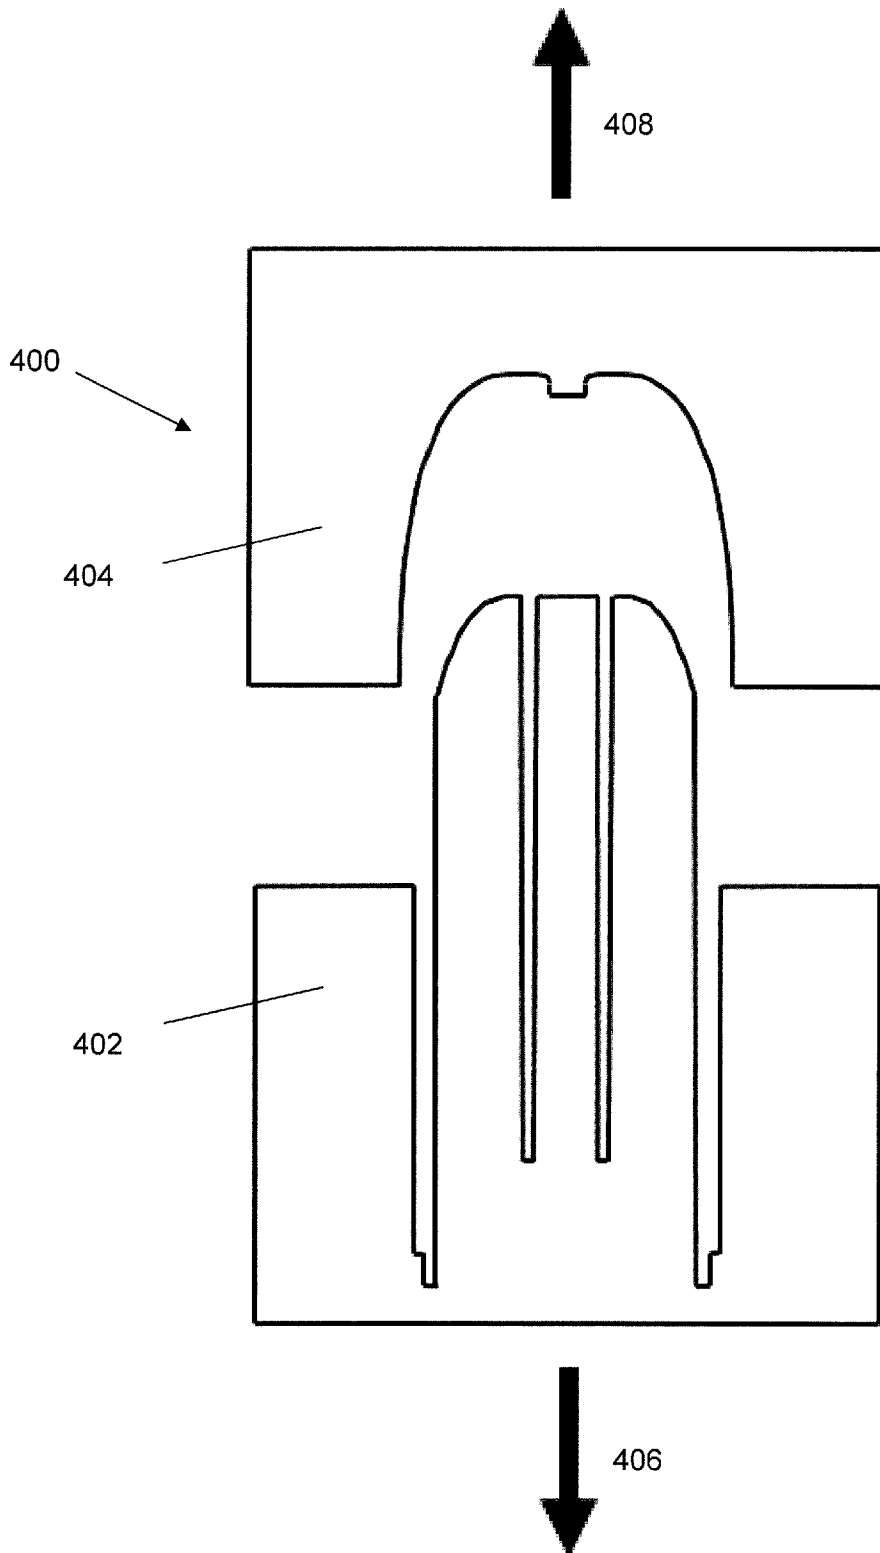


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/074492

A. CLASSIFICATION OF SUBJECT MATTER
INV. A24F47/00
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
A24D A24F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 104 366 698 A (SHENZHEN SMOORE TECHNOLOGY LTD) 25 February 2015 (2015-02-25)	1-4, 11-19
Y	figures 1-9 paragraphs [0020], [0042] - [0054] claim 7	10
X	----- WO 2016/126544 A1 (VAPOR BAR) 11 August 2016 (2016-08-11)	1,18
Y	figures 2, 7	10
X	----- WO 2015/117704 A1 (PHILIP MORRIS PRODUCTS SA) 13 August 2015 (2015-08-13)	1,3,4, 14-18
	figures 1a-d page 21, line 4 page 23, line 21 - line 25 page 25, line 10 - line 14 ----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 22 November 2019	Date of mailing of the international search report 13/02/2020
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Mier Abascal, Ana

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/074492

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 885 986 A1 (FONTEM VENTURES B V) 24 June 2015 (2015-06-24) paragraphs [0021] - [0025] figure 1 -----	1,14-18
A	EP 2 835 061 A1 (JAPAN TOBACCO INC) 11 February 2015 (2015-02-11) figures 1-4 paragraphs [0027], [0031] -----	1-4, 10-19
A	CN 206 062 138 U (O-NET AUTOMATION TECH LTD) 5 April 2017 (2017-04-05) figures 1, 2, 9 paragraphs [0093] - [0102] -----	1-4, 10-19

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2019/074492

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-4, 18, 19(completely); 10-17(partially)

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-4, 18, 19(completely); 10-17(partially)

Claim 1 refers to a consumable for a smoking substitute device,
the consumable comprising a tank for storing an e-liquid;
and
at least one wall forming a part of the consumable,
wherein the consumable is formed by injection moulding,
and the at least one wall tapers along a demoulding
direction of the at least one wall.

2. claims: 5-9(completely); 10-17(partially)

Claim 5 refers to a consumable for a smoking substitute device,
the consumable comprising a tank for storing an e-liquid;
an outlet, wherein the outlet is configured to provide fluid
communication between the tank and a mouthpiece aperture, so
that the mouthpiece aperture receives an aerosol vapour
formed from the e-liquid in use,
wherein the outlet has an internal width which decreases in
a downstream direction.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/074492

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 104366698	A	25-02-2015	NONE
WO 2016126544	A1	11-08-2016	US 2016227837 A1 WO 2016126544 A1
WO 2015117704	A1	13-08-2015	AR 099323 A1 AU 2014381788 A1 CA 2937980 A1 CN 105939625 A DK 3104724 T3 EP 3104724 A1 ES 2721256 T3 HU E043666 T2 IL 246571 A JP 2017506509 A KR 20160119777 A LT 3104724 T PH 12016501317 A1 PL 3104724 T3 PT 3104724 T RU 2016136343 A RU 2019118674 A SG 11201605890Y A SI 3104724 T1 TR 201904305 T4 TW 201534229 A TW 201534230 A TW 201534231 A US 2016345630 A1 WO 2015117704 A1 ZA 201604481 B
EP 2885986	A1	24-06-2015	CN 106170216 A EP 2885986 A1 ES 2587537 T3 HK 1205649 A1 PL 2885986 T3 US 2017020194 A1 WO 2015090490 A1
EP 2835061	A1	11-02-2015	CN 104379006 A EA 201492083 A1 EP 2835061 A1 JP 5815855 B2 JP WO2013172186 A1 KR 20150003247 A TW 201400041 A WO 2013172186 A1
CN 206062138	U	05-04-2017	NONE