

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/100191 A1

(51) International Patent Classification⁷: **H01F 1/44**,
A61F 2/64, C10M 171/00

(21) International Application Number:
PCT/US2003/037848

(22) International Filing Date:
26 November 2003 (26.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/467,722 2 May 2003 (02.05.2003) US
10/722,313 25 November 2003 (25.11.2003) US

(71) Applicant (for all designated States except US): **ÖSSUR ENGINEERING, INC** [US/US]; 910 Burstein Drive, Albion, MI 49224 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HSU, Henry** [US/US]; 170 Las Flores, Aliso Viejo, CA 92656 (US). **BISBEE III, Charles, R.** [US/US]; 25466 Pacific Hills Drive, Mission Viejo, CA 92692 (US). **PALMER, Michael Lars** [US/US]; 6 Edgartown St., Ladera Ranch, CA 92694 (US). **LUKASIEWICZ, Ronald, J.** [US/US];

6730 Lonicera St., Carlsbad, CA 92009 (US). **LINDSAY, Michael, W.** [US/US]; 25591 Chimera Drive, Mission Viejo, CA 92692 (US). **PRINCE, Stephen, W.** [US/US]; 23342 Castle Rock, Mission Viejo, CA 92692 (US).


(74) Agent: **DELANEY, Karoline, A.**; KNOBBE, MARTENS, OLSON & BEAR, LLP, 2040 Main Street, 14th Floor, Irvine, CA 92614 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MAGNETORHEOLOGICAL FLUID COMPOSITIONS AND PROSTHETIC KNEES UTILIZING SAME

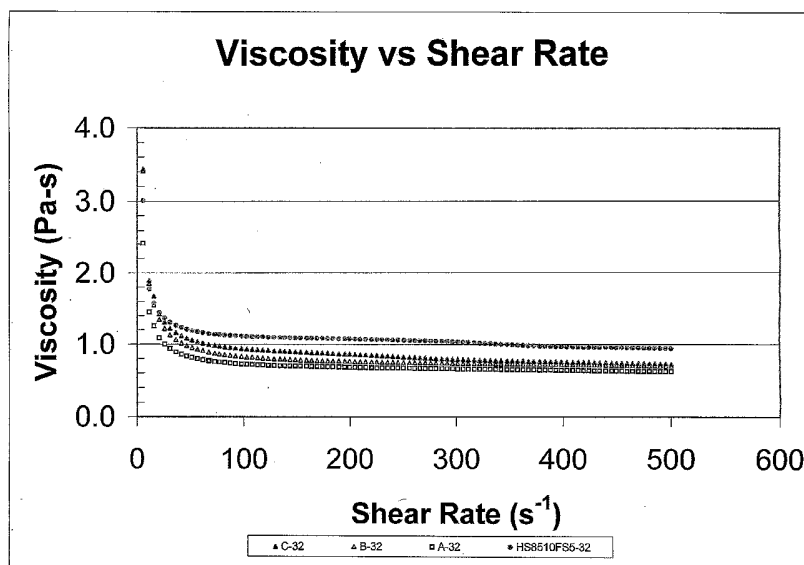

(57) Abstract: The present invention relates in one embodiment to magnetorheological fluids utilized in prosthetic joints in general and, in particular, to magnetorheological fluids utilized in controllable braking systems for prosthetic knee joints. Preferred magnetorheological fluids of the present invention comprises polarizable iron particles, a carrier fluid, and optionally an additive. Preferred additives include, but are not limited to functionalized carrier fluids as well as derivatized fluoropolymers. Preferred carrier fluids include, but are not limited, to perfluorinated polyethers.



Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

MAGNETORHEOLOGICAL FLUID COMPOSITIONS AND PROSTHETIC KNEES UTILIZING SAME

Background of the Invention

5 Field of the Invention

The present invention relates in one embodiment to magnetorheological fluids utilized in prosthetic joints in general and, in particular, to magnetorheological fluids utilized in controllable braking systems for prosthetic knee joints.

Description of the Related Art

10 Three types of variable-torque brakes have been employed in prosthetic knees in the past: (i) dry friction brakes where one material surface rubs against another surface with variable force; (ii) viscous torque brakes using hydraulic fluid squeezed through a variable sized orifice or flow restriction plate; and (iii) magnetorheological (MR) brakes or dampers where MR fluid (containing small iron particles suspended in the fluid) is squeezed through
15 a fixed orifice or flow restriction plate, with viscosity of the fluid being varied in response to an applied magnetic field. Each of these technologies, as conventionally practiced in the field of prosthetics, can pose certain disadvantages.

 Though dry friction brakes can generally provide a substantial torque range for their size, undesirably, they are often difficult to control. After extended use, the frictional pads
20 tend to wear, thereby changing the frictional characteristics of the brake and the torque response for a given commanded torque. Disadvantageously, this can cause unreliable damping performance, and hence adversely affect the gait of the amputee and also cause discomfort to the amputee. Consequently, dry friction brakes may need frequent servicing and/or replacement which undesirably adds to the cost.

25 Under high loading conditions, viscous torque brakes are susceptible to leakage of hydraulic fluid and possibly other damage due to excessive pressure build-up. Disadvantageously, this can result in an irreversible state, since once the brake unit is overloaded it cannot return to normal. Therefore, such a viscous torque brake for a prosthetic joint is prone to catastrophic failure, and hence can be unreliable and detrimental
30 to the safety of an amputee.

 In certain MR brakes and dampers, the interaction of the MR fluid with the device causes increased pressure, seal deterioration, or a combination of the two. Another possible

cause of these adverse effects is decomposition of the MR fluid. Once the seals fail or the MR fluid decomposes, the prosthetic knee is no longer suitable for use.

Summary of the Invention

In accordance with preferred embodiments, there is provided a magnetorheological fluid (MR fluid) comprising polarizable particles, a carrier fluid, and optionally an additive. In one embodiment, the polarizable particles comprise iron particles ranging in size from about 0.1 to about 100 microns, preferably from about 0.2 to about 50 microns, from about 0.4 to about 10 microns, or from about 0.5 to about 9 microns, but also including about 0.3, 0.6, 0.7, 0.8, 0.9, 1, 2, 3, 4, 5, 6, 7, 8, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 25, 30, 40, 60, 70, 80, and 90 microns, and ranges encompassing such sizes. In certain embodiments, iron particles comprise from about 1 to about 60 % (v/v) of the total MR fluid volume, preferably from about 10 to about 50% (v/v), from about 20 to about 40% (v/v), but also including about 5, 15, 25, 30, 35, 45, and 55 % (v/v) and ranges encompassing such percentages.

Suitable candidates for carrier fluids include, but are not limited to, silicone, hydrocarbon, esters, ethers, fluorinated esters, fluorinated ethers, mineral oil, unsaturated hydrocarbons, and water based fluids. In one embodiment, a preferred carrier fluid comprises an aliphatic hydrocarbon. In another embodiment, a preferred carrier fluid comprises a perfluorinated polyether ("PFPE").

In one embodiment, a preferred additive comprises a functionalized fluoropolymer, including, but not limited to, a parafluoropropene and oxygen polymerized amide derivative. In another embodiment, a preferred additive comprises a functionalized carrier fluid. Suitable candidates for monofunctionalized PFPE carrier fluid derivatives include, but are not limited to silane, phosphate, hydroxyl, carboxylic acid, alcohol and amine functions. Suitable candidates for difunctional PFPE carrier fluid derivatives include, but are not limited to, dihydroxyl, ethoxy ether, isocyanate, aromatic, ester and alcohol functions. In one embodiment, a preferred functionalized PFPE carrier fluid comprises a poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group. In one embodiment, the additive comprises from about 0.1 to about 20 % (v/v) of the carrier fluid, preferably from about 1 to about 15 % (v/v), or from about 2 to about 10 % (v/v), but also including about 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5,

8, 8.5, 9, 9.5, 11, 12, 13, 14, 16, 17, 18, and 19 % (v/v) and ranges encompassing such percentages.

In one embodiment, a preferred MR fluid comprises about 28% (v/v) particles, and about 72% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group additive and about 95% (v/v) PFPE oil carrier fluid. In another embodiment, a preferred MR fluid comprises about 32% (v/v) particles, and about 68% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group additive and about 95% (v/v) PFPE oil carrier fluid. In another embodiment, a preferred MR fluid comprises about 28% (v/v) particles and about 72% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) parafluoropropene and oxygen polymerized amide derivative additive and about 95% (v/v) PFPE oil carrier fluid. In another embodiment, a preferred MR fluid comprises about 32% (v/v) particles and about 68% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) parafluoropropene and oxygen polymerized amide derivative additive and about 95% (v/v) PFPE oil carrier fluid. In embodiments containing PFPE oil, the PFPE oil may comprise substantially all one PFPE oil or a mixture of one or more PFPE oils.

In one embodiment, an MR fluid is specifically designed for use in a shear mode device. For such a device, mechanically hard particles are desired. The carrier fluid also desirably experiences a less dramatic viscosity change over temperature changes as compared to other fluids. This may be measured in terms of a viscosity index (test method ASTM D-2270) with preferred carrier fluids having higher viscosity indices. In one embodiment, preferred carrier fluids have viscosity indices preferably ranging from about 100 to about 340 based on kinematic viscosity at 104 and 212°F, from about 120 to about 320, from about 140 to about 300, but also including 160, 180, 200, 220, 240, 255, 260, 280, and ranges encompassing these amounts. One embodiment that accomplishes this includes a carrier fluid comprising one or more PFPE oils. For example, a preferred PFPE fluid, UNIFLOR™ 8510 has a viscosity index of 255. Without wishing to be bound by any theory, it is believed that preferred PFPE oils of certain embodiments demonstrate desirable viscosity indices due to their narrow distribution of molecular weights. Also, the MR fluid

desirably does not produce a significant amount of vapor in a sealed chamber so as to interfere with the function of the device. In one embodiment, a fluid component comprising PFPE oil carrier fluid and a functionalized fluoropolymer additive provides this property. Without wishing to be bound by any theory, it is believed that preferred PFPE
5 oils of certain embodiments are less volatile, i.e. lower vapor pressures than other oils, because they have much higher molecular weights, e.g. about 2,000 to about 15,000, and therefore do not produce a significant amount of vapor.

In addition, a shear mode device should provide sufficient torque, for example torque production in one embodiment may be about 0.1 to about 200 Newton-meters, more
10 preferably about 0.3 to about 150 Newton-meters, even more preferably about 0.5 to about 100 Newton-meters, but also including about 0.8, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 20, 30, 40, 50, and 75 Newton-meters. In one embodiment, maintaining a sufficient ratio of particles, such as iron particles, to MR fluid provides for this. In one embodiment, a suitable ratio is achieved when the iron particles comprise from about 1 to about 60 % (v/v) of the total MR
15 fluid volume, preferably from about 10 to about 50% (v/v), more preferably from about 20 to about 40% (v/v), but also including about 5, 15, 25, 30, 35, 45, and 55 % (v/v) and ranges encompassing these percentages.

In accordance with preferred embodiments, there is provided a MR fluid comprising polarizable particles, a carrier fluid, and optionally an additive for use in a prosthetic knee,
20 for example, a knee as described in U.S. Patent Publication 2001/0029400A1. In one embodiment, the prosthetic knee comprises at least two adjacent surfaces adapted for shear movement relative to one another wherein the MR fluid is contained between said adjacent surfaces. In one embodiment, the MR fluid used in combination with the knee comprises PFPE oil carrier fluid and particles, such as polarizable particles described above. In one
25 embodiment, the polarizable particles comprise iron particles ranging in size from about 0.1 to about 100 microns, preferably from about 0.2 to about 50 microns, more preferably from about 0.4 to about 10 microns, even more preferably from about 0.5 to about 9 microns, but also including about 0.3, 0.6, 0.7, 0.8, 0.9, 1, 2, 3, 4, 5, 6, 7, 8, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 25, 30, 40, 60, 70, 80, and 90 microns, and ranges encompassing these sizes. In
30 certain embodiments, iron particles comprise from about 1 to about 60 % (v/v) of the total MR fluid volume, preferably from about 10 to about 50% (v/v), more preferably from about

20 to about 40% (v/v), but also including about 5, 15, 25, 30, 35, 45, and 55 % (v/v) and ranges encompassing such percentages.

In another embodiment, the MR fluid used in combination with a prosthetic knee optionally includes an additive. In one embodiment, a preferred additive comprises a functionalized fluoropolymer, more preferably a parafluoropropene and oxygen
5 polymerized amide derivative. In another embodiment, a preferred additive comprises a functionalized carrier fluid. Suitable candidates for monofunctionalized PFPE carrier fluid derivatives include, but are not limited to silane, phosphate, hydroxyl, carboxylic acid, alcohol and amine functions. Suitable candidates for difunctional PFPE carrier fluid
10 derivatives include, but are not limited to, dihydroxyl, ethoxy ether, isocyanate, aromatic, ester and alcohol functions. In one embodiment, a preferred functionalized PFPE oil comprises a poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group. In one embodiment, the additive comprises from about 0.1 to about 20 % (v/v) of the carrier fluid, preferably from about 1 to about 15 % (v/v) ,
15 more preferably from about 2 to about 10 % (v/v), but also including about 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 11, 12, 13, 14, 16, 17, 18, and 19 % (v/v), and ranges encompassing these amounts.

In another embodiment, the passage or cavity of the knee that holds the MR fluid contains a volume of about 1 to about 10 ml, preferably from about 2 to about 9 ml, more
20 preferably from about 3 to about 8 ml, but also including about 4, 5, 6, and 7 ml, and ranges encompassing these volumes. In one embodiment, the MR fluid fills the cavity to about 70% of its capacity, but ranges from about 50 to about 100% as well about 55, 60, 65, 75, 80, 85, 90 and 90% and ranges encompassing these amounts are also acceptable.

In another embodiment, the MR fluid used in combination with a prosthetic knee in shear mode in one embodiment utilizes a MR fluid that is operable over a temperature
25 range from about 10 to about 115° F, but also including about 20, 30, 40, 50, 60, 70, 80, 90, 100, and 110° F. Operability in one embodiment depends on viscosity, wherein the carrier fluid desirably has a viscosity at 104° F of about 10 to about 100 cSt (centistokes), more preferably about 30 to about 80 cSt, even more preferably about 50 to about 70 cSt, but also
30 including about 10, 20, 25, 35, 40, 45, 55, 60, 65, 75, 85, 90, and 95 cSt.

Desirably, operation of a prosthetic knee in shear mode in one embodiment preferably utilizes a carrier fluid with a pour point preferably ranging from about -70°C to

about -40°C , from about -65°C to about -45°C , but also including about -50°C , -55°C , and -60°C , and ranges encompassing these temperatures. In another embodiment, operation of a prosthetic knee in shear mode preferably utilizes a carrier fluid with a percent volatility at 121°C preferably ranging from about 0.01% to about 20%, from about 5 0.02% to about 15%, from 0.03% to about 12%, but also including about 0.05%, 0.08%, 0.1%, 0.2%, 0.3%, 0.4%, 0.5%, 0.7%, 0.9%, 1%, 3%, 5%, 7%, 9%, 17%, and ranges encompassing these percentages.

In one embodiment, a preferred MR fluid used in combination with a prosthetic knee in shear mode comprises about 28% (v/v) particles, and about 72 % (v/v) fluid component wherein said fluid component comprises about 5% (v/v) 10 poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group additive and about 95% (v/v) PFPE oil carrier fluid. In another embodiment, a preferred MR fluid used in combination with a prosthetic knee in shear mode comprises about 32% (v/v) particles, and about 68% (v/v) fluid component wherein 15 said fluid component comprises about 5% (v/v) poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group additive and about 95% (v/v) PFPE oil carrier fluid. In another embodiment, a preferred MR fluid used in combination with a prosthetic knee in shear mode comprises about 28% (v/v) particles, and about 72 % (v/v) fluid component wherein said fluid component comprises about 5% (v/v) 20 parafluoropropene and oxygen polymerized amide derivative additive and about 95% (v/v) PFPE oil carrier fluid. In another embodiment, a preferred MR fluid comprises about 32% (v/v) particles and about 68% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) parafluoropropene and oxygen polymerized amide derivative additive and about 95% (v/v) PFPE oil carrier fluid. In embodiments containing PFPE oil, 25 the PFPE oil may comprise substantially all one PFPE oil or a mixture of one or more PFPE oils.

All of these embodiments are intended to be within the scope of the invention herein disclosed. These and other embodiments of the present invention will become readily apparent to those skilled in the art from the following detailed description of the 30 preferred embodiments having reference to the attached figures, the invention not being limited to any particular preferred embodiment(s) disclosed.

Brief Description of the Drawings

Figures 1 and 2 depict one embodiment of a prosthetic knee suitable for use in preferred embodiments. Figures 1 and 2 correspond to Figures 4 and 5, respectively, of U.S. Patent Publication 2001/0029400A1 (Application No. 09/767,367), filed January 22, 2001, entitled "ELECTRONICALLY CONTROLLED PROSTHETIC KNEE," the entire disclosure of which is hereby incorporated by reference herein. More specifically, the description of the drawings and the item numbers depicted in the drawings are described in detail in the above referenced patent publication.

Figures 3-5 illustrate dynamic viscosity curves for various carrier oils and MR fluid samples.

Figure 6 illustrates a comparison of the viscosities of various carrier oils and MR fluids.

Detailed Description of the Preferred Embodiments


Disclosed herein are magnetorheological fluids (MR fluids) suitable for use in magnetorheological knee brakes or actuators. More particularly, the disclosed MR fluids may be applicable to prosthetic knee joints which operate in shear mode, for example, where the MR fluid is provided between adjacent surfaces, such as between parallel plates or in the annular space between inner and outer cylinders. Certain embodiments of a magnetorheological knee brake or actuator that may employ the MR fluids as described herein are described in U.S. Patent Publication 2001/0029400A1 (Application No. 09/767,367), filed January 22, 2001, entitled "ELECTRONICALLY CONTROLLED PROSTHETIC KNEE," the entire disclosure of which is hereby incorporated by reference herein. Figures 1 and 2, corresponding to Figures 4 and 5 of U.S. Patent Publication 2001/0029400A1, also depict one embodiment of a magnetorheological knee brake or actuator that may employ the MR fluids as described herein. Certain embodiments of a control scheme and system for magnetorheological knee brakes or actuators are described in copending U.S. Patent Publication 2002/0052663A1 (Application No. 09/823,931), filed March 29, 2001, entitled "SPEED-ADAPTIVE AND PATIENT-ADAPTIVE PROSTHETIC KNEE," the entire disclosure of which is hereby incorporated by reference herein. It will be appreciated, however, that the MR fluids as described herein may have applicability to other devices which utilize MR fluids, including but not limited to, other devices operating in a shear mode.

In one embodiment, the magnetorheological fluid preferably comprises a plurality of iron, ferrous or magnetic particles suspended in fluid. These suspended particles form torque producing chains in response to an applied magnetic field. Thus, the magnetorheological (MR) fluid undergoes a rheology or viscosity change or variation, which is dependent on the magnitude of the applied magnetic field. In turn, this variation in the bulk fluid viscosity determines the magnitude of the shearing force/stress or torque generated, and hence the level of damping or braking provided by the prosthetic knee or other device. Typically, the bulk viscosity of the MR fluid increases with increasing strength of the applied field. By controlling the magnitude of this magnetic field, the rotary motion of an artificial limb is rapidly and precisely adjusted and/or controlled, for example, to control the flexion and extension during swing and stance phases to provide a more natural and safe ambulation for the amputee. Preferably the MR fluid has one or more of the following properties: a high magnetic flux capacity and low magnetic remanence and low viscosity while having a large magnetic field induced shearing stress so that, advantageously, a prosthetic knee in one embodiment, provides a wide dynamic torque range.

In one embodiment, the MR fluid preferably comprises a carrier fluid with polarizable ferrous or iron particles. As used herein, the term carrier fluid is a broad term used in its ordinary sense and includes embodiments wherein the specific carrier fluids described below are the primary component and embodiments wherein the carrier fluid comprises these specific fluids as well as additives described below. In addition, embodiments wherein the additives described below are the primary carrier fluid are also contemplated. In one embodiment, such as when used between rotor-stator surfaces of US 2001/0029400A1, these particles have a size on the order of a micron or a few microns. Ideally the MR fluid exhibits shear rate thinning behavior where MR fluid viscosity decreases with increasing shear rate. This advantageously minimizes the viscous torque due to shearing of the MR fluid between each rotor-stator pair under zero-field conditions (that is, when the electromagnet is not energized), and hence allows for a larger operating torque range. Further, in one embodiment MR fluids used in combination with a prosthetic knee desirably exhibit low off-state viscosity and therefore low off-state torque as torque is proportional to MR fluid viscosity. The viscosity of preferred MR fluids in certain embodiments may be altered by one or more of the following: increasing or decreasing the

particle loading, including an additive, changing the carrier fluid, or mixing two or more carrier fluids.

Suitable candidates for carrier fluids include, but are not limited to, silicone, hydrocarbon, esters, ethers, fluorinated esters, fluorinated ethers, mineral oil unsaturated hydrocarbons, and water based fluids. In one embodiment, the carrier fluid comprises substantially all one fluid. In another embodiment, the carrier fluid is a mixture of one or more carrier fluids. In one embodiment, the carrier fluid preferably comprises an aliphatic hydrocarbon. In another embodiment the carrier fluid preferably comprises a perfluorinated polyether (PFPE), also known as perfluoropolyether, perfluoroalkylether or perfluoropolyalkylether, fluid. In certain embodiments, a preferred PFPE oil comprises fluorine end capped branched homopolymers of hexafluoropropylene epoxide with the following chemical structure:




Where $n = 10 - 60$

In another embodiment, a preferred PFPE oil comprises a branched PFPE containing pendent trifluoromethyl groups, $(-\text{CF}_3)$, with the following structure:




Where $n = 5 - 65$

In another embodiment, a preferred PFPE oil comprises a linear PFPE with the following structure:



Where the ratio of $z:p$ is between about 0.5:1 and 2:1, and $z + p$ is between about 40 and about 180. In another embodiment, a preferred PFPE oil comprises a linear PFPE with the following structure:



Where $n = 10-50$

In another embodiment, a preferred PFPE oil comprises perfluoropropylpolyether. As presently contemplated preferred perfluorinated polyethers may be purchased from Nye Lubricants (Fairhaven, MA, USA) and include, but are not limited to, UNIFLOR™ 8510, UNIFLOR™ 8130, UNIFLOR™ 8140, UNIFLOR™ 8730 and UNIFLOR™ 8970. Suitable perfluorinated polyethers may also be purchased from E.I. du Pont de Nemours and Company, (Wilmington, DE, USA) and include, but are not limited to, Krytox® GPL-103, Krytox® L-65 oil, Krytox® XP 1A4 oil, Krytox® L-100, Krytox® 1525, Krytox® 1525S, and Krytox® 1531.

Other ingredients can be optionally added to the carrier fluids of preferred embodiments to enhance the performance properties of preferred carrier fluids. In some embodiments, preferred additives include, but are not limited to, functionalized carrier fluids. In embodiments comprising perfluorinated polyethers, desirable additives can also include, but are not limited to, functionalized PFPE oils as well as derivatized fluoropolymers. Suitable candidates for monofunctionalized PFPE derivatives include, but are not limited to silane, phosphate, hydroxyl, carboxylic acid, alcohol and amine functions. Suitable candidates for difunctional PFPE derivatives include, but are not limited to, dihydroxyl, ethoxy ether, isocyanate, aromatic, ester and alcohol functions. More specifically, in one embodiment comprising perfluorinated polyethers, a preferred functionalized PFPE oil comprises a poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group. As presently contemplated preferred functionalized PFPE oils are Krytox® 157 FSL and Krytox® 157 FSM available from E.I. du Pont de Nemours and Company, (Wilmington, DE, USA). In another embodiment, a preferred fluoropolymer comprises a parafluoropropene and oxygen polymerized amide derivative. As presently contemplated a preferred parafluoropropene and oxygen polymerized amide derivative additive is FOMBLIN DA 306 available from Solvay Solexis (Thorofare, NJ, USA).

Suitable candidates for polarizable ferrous or iron particles include, but are not limited to, particles ranging in size from about 0.1 to about 100 microns, preferably from about 0.2 to about 50 microns, more preferably from about 0.4 to about 10 microns, even more preferably from about 0.5 to about 9 microns, but also including about 0.3, 0.6, 0.7, 0.8, 0.9, 1, 2, 3, 4, 5, 6, 7, 8, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 25, 30, 40, 60, 70, 80,

and 90 microns, and ranges encompassing these sizes. In certain embodiments, preferred particles are mechanically hard. As presently contemplated preferred iron particles are available from BASF AG (Ludwigshafen, Germany) and include, but are not limited to, BASF Carbonyl Iron Powder OM, BASF Carbonyl Iron Powder HQ, BASF Carbonyl Iron Powder HS, BASF Carbonyl Iron Powder EW, BASF Carbonyl Iron Powder HS-I, and BASF Carbonyl Iron Powder HL-I. Other suitable iron particles may also be purchased from ISP Corporation (Wayne, NJ, USA). Other suitable ferrous or iron particles well known to those of skill in the art may also be used. In related embodiments, particles comprising magnetic or ferromagnetic materials other than iron may be used alone or in combination with iron-based particles.

In accordance with a preferred embodiment, the MR fluid composition comprises polarizable iron particles, PFPE carrier fluid, and an additive. In one embodiment, the iron particles comprise from about 1 to about 60 % (v/v) of the total MR fluid volume, preferably from about 10 to about 50% (v/v), more preferably from about 20 to about 40% (v/v), but also including about 5, 15, 25, 30, 35, 45, and 55 % (v/v) and ranges encompassing such percentages. To determine the weight of particles required to achieve the proper %(v/v), the required volume is multiplied by the density of the particles. In one embodiment, the additive comprises from about 0.1 to about 20 % (v/v) of the carrier fluid, preferably from about 1 to about 15 % (v/v), more preferably from about 2 to about 10 % (v/v), but also including about 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 11, 12, 13, 14, 16, 17, 18, and 19 % (v/v) and ranges encompassing such percentages. For example, in one embodiment a preferred MR fluid comprises about 28% (v/v) iron particles and about 72% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) a parafluoropropene and oxygen polymerized amide derivative additive and about 95% (v/v) PFPE carrier fluid. In another embodiment, a preferred MR fluid comprises about 32% (v/v) particles and about 68% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) parafluoropropene and oxygen polymerized amide derivative additive and about 95% (v/v) PFPE oil carrier fluid. In another embodiment, a preferred MR fluid comprises about 28% (v/v) particles, and about 72 % (v/v) fluid component wherein said fluid component comprises about 5% (v/v) poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group additive and about 95% (v/v) PFPE oil carrier fluid. In another

embodiment, a preferred MR fluid comprises about 32% (v/v) particles, and about 68% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group additive and about 95% (v/v) PFPE oil carrier fluid. In
5 embodiments containing PFPE oil, the PFPE oil may comprise substantially all one PFPE oil or a mixture of one or more PFPE oils.

The MR fluid ingredients may be combined in any order and mixed by any suitable means including, but not limited to, stirring, agitation, sonification or blending. In accordance with a preferred embodiment, additives are first mixed with carrier fluids and
10 stirred. Carrier fluid is added to the iron particles and the ingredients are stirred. The particles are then dispersed using sonification. The resulting MR fluid is then heated. A detailed example is provided below in the example section.

When the MR fluids as described herein are used in combination with a prosthetic knee, for example, a knee as described in U.S. Patent Publication 2001/0029400A1, certain
15 characteristics of the fluid as well as the knee may be desired. In one embodiment, such as shown in FIGS. 4 and 5 of U.S. 2001/0029400A1, a knee may contain a cavity or passage for holding MR fluid between a plurality of rotors and stators. The number of rotors and stators in certain embodiments may be increased or reduced in order to alter the off-state or low-end torque properties of the MR fluid used in combination with the knee. In one
20 embodiment, the number of rotors and stators preferably range from about 50 to about 90, preferably from about 55 to about 70, but also including about 57, 59, 61, 63, 65, 67, and ranges encompassing these amounts. The knee cavity may contain a volume of about 1 to about 10 ml, preferably from about 2 to about 9 ml, more preferably from about 3 to about 8 ml, but also including about 4, 5, 6, and 7 ml. In one embodiment, the MR fluid fills the
25 cavity to about 70 % of its total volume, but may range from about 50 to about 100% as well about 55, 60, 65, 75, 80, 85, 90 and 90%. The MR fluid advantageously demonstrates one or more of the following: relatively low volatility, stable viscosity, thermal stability, and a stable composition. In addition, in certain embodiments it is desirable that the cavity or passage containing the MR fluid does not exhibit undesirable pressure levels. Without
30 wishing to be bound by any theory, it is believed that an unsuitable fluid may release gases or volatilize causing pressure within the prosthetic knee to increase to an undesirable level. If the pressure is too high, the integrity of the prosthetic knee seals can be compromised. In

certain embodiments it is desirable that a prosthetic knee utilizing a MR fluid produces torque of about 0.1 to about 200 Newton-meters, more preferably about 0.3 to about 150 Newton-meters, even more preferably about 0.5 to about 100 Newton-meters, but also including about 0.8, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 20, 30, 40, 50, and 75 Newton-meters.

5 Desirably, operation of a prosthetic knee in shear mode in one embodiment utilizes a MR fluid that is operable over a temperature range from about 10 to about 115°F, but also including about 20, 30, 40, 50, 60, 70, 80, 90, 100, and 110° F. Operability in one embodiment depends on viscosity, wherein the carrier fluid desirably has a viscosity at 104°F (40°C) of about 10 to about 100 cSt, more preferably viscosity of about 30 to about 10 80 cSt, even more preferably viscosity of about 50 to about 70 cSt, but also including about 10, 20, 25, 35, 40, 45, 55, 60, 65, 75, 85, 90, and 95 cSt. The viscosity of preferred MR fluids in certain embodiments may be altered by one or more of the following: increasing or decreasing the particle loading, including an additive, changing the carrier oil, or mixing two or more carrier oils.

15 In one embodiment, an MR fluid is specifically designed for use in a shear mode device. For such a device, mechanically hard particles are desired. The carrier fluid also desirably experiences a less dramatic viscosity change over temperature changes as compared to other fluids. This may be measured in terms of a viscosity indices (test method ASTM D-2270) with preferred carrier fluids having higher viscosity indices. In 20 one embodiment, preferred carrier fluids have viscosity indices preferably ranging from about 100 to about 340 based on kinematic viscosity at 104 and 212°F, from about 120 to about 320, from about 140 to about 300, but also including 160, 180, 200, 220, 240, 255, 260, 280, and ranges encompassing these amounts. One embodiment that accomplishes this includes a carrier fluid comprising one or more PFPE oils. For example, a preferred 25 PFPE fluid, UNIFLOR™ 8510 has a viscosity index of 255. Without wishing to be bound by any theory, it is believed that preferred PFPE oils of certain embodiments demonstrate desirable viscosity indices due to their narrow distribution of molecular weights. Also, the MR fluid desirably does not produce a significant amount of vapor in a sealed chamber so as to interfere with the function of the device. In one embodiment, a fluid component 30 comprising PFPE oil carrier fluid and a fluoropolymer additive provides this property. Without wishing to be bound by any theory, it is believed that preferred PFPE oils of certain embodiments are less volatile, i.e. lower vapor pressures than other oils, because

they have much higher molecular weights, e.g. about 2,000 to about 15,000, and therefore do not produce a significant amount of vapor.

Desirably, operation of a prosthetic knee in shear mode in one embodiment preferably utilizes a carrier fluid with a pour point (test method ASTM D-97) preferably ranging from about -70°C to about -40°C , from about -65°C to about -45°C , but also including about -50°C , -55°C , -60°C , and ranges encompassing these temperatures. ASTM D-97 method defines "pour point" as the lowest temperature at which movement of an oil is observed. In another embodiment, operation of a prosthetic knee in shear mode preferably utilizes a carrier fluid with a percent volatility at 121°C (test method ASTM D-972) preferably ranging from about 0.01% to about 20%, from about 0.02% to about 15%, from about 0.03% to about 12%, but also including about 0.05%, 0.08%, 0.1%, 0.2%, 0.3%, 0.4%, 0.5%, 0.7%, 0.9%, 1%, 3%, 5%, 7%, 9%, 17%, and ranges encompassing these percentages.

More specifically, when used in combination with a prosthetic knee as previously disclosed, desirable MR fluids for use in certain embodiments comprise a carrier fluid and polarizable particles. More specifically, in one embodiment used in combination with a prosthetic knee, the MR fluid comprises one or more PFPE oil carrier fluids and polarizable particles. In one embodiment, the iron particles comprise from about 1 to about 60 % (v/v) of the total MR fluid volume, preferably from about 10 to about 50% (v/v), more preferably from about 20 to about 40% (v/v), but also including about 5, 15, 25, 30, 35, 45, and 55 % (v/v), and ranges encompassing these percentages.

In another embodiment, the MR fluid used in combination with a prosthetic knee may optionally comprise an additive. Suitable additives include, but are not limited to, functionalized carrier fluids as well as fluoropolymers. In one embodiment, the iron particles comprise from about 1 to about 60 % (v/v) of the total MR fluid volume, preferably from about 10 to about 50% (v/v), more preferably from about 20 to about 40% (v/v), but also including about 5, 15, 25, 30, 35, 45, and 55 % (v/v), and ranges encompassing these amounts. In one embodiment, the additive comprises from about 0.1 to about 20 % (v/v) of the carrier fluid, preferably from about 1 to about 15 % (v/v), more preferably from about 2 to about 10 % (v/v), but also including 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 11, 12, 13, 14, 16, 17, 18, and 19 % (v/v). For example, in one embodiment a preferred MR fluid used in combination with a prosthetic knee in shear mode

comprises about 32% (v/v) particles and about 68% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) a parafluoropropene and oxygen polymerized amide derivative additive and about 95% (v/v) perfluorinated polyether carrier fluid. In another embodiment a preferred MR fluid used in combination with a prosthetic knee in shear mode comprises about 28% (v/v) particles and about 72% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) a parafluoropropene and oxygen polymerized amide derivative additive and about 95% (v/v) perfluorinated polyether carrier fluid. In another embodiment, a preferred MR fluid used in combination with a prosthetic knee in shear mode comprises about 32% (v/v) particles, and about 68% (v/v) fluid component wherein said fluid component comprises about 5% (v/v) poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group additive and about 95% (v/v) PFPE oil carrier fluid. In another embodiment, a preferred MR fluid used in combination with a prosthetic knee in shear mode comprises about 28% (v/v) particles, and about 72 % (v/v) fluid component wherein said fluid component comprises about 5% (v/v) poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group additive and about 95% (v/v) PFPE oil carrier fluid. In embodiments containing PFPE oil, the PFPE oil may comprise substantially all one PFPE oil or a mixture of one or more PFPE oils.

The ingredients may be combined in any order and mixed by any suitable means including, but not limited to, stirring, agitation, blending or sonification. In accordance with a preferred embodiment, the MR fluid is prepared as described above. Prior to loading into the prosthetic knee, the MR fluid is stirred under vacuum using a high speed stirrer to remove any dissolved gases. In a preferred embodiment, the MR fluid is heated to about 90 to about 160°F, more preferably to about 100 to about 150°F, even more preferably to about 110 to about 130°F, but also including about 95, 105, 115, 120, 122, 125, 135, 140, 145, and 155°F, under vacuum prior to loading into the prosthetic knee.

In another preferred embodiment, the MR fluid is heated at ambient pressure prior to being placed under vacuum. While under vacuum, agitation or stirring of the MR fluid is preferred but not required. After the MR fluid is released from the vacuum, the MR fluid is loaded into the prosthetic knee. The loading of the prosthetic knee involves adding the MR fluid to the knee and then placing the knee under vacuum. While under vacuum the knee is optionally agitated. To reduce the vacuum pressure, an inert gas is added into the vacuum

chamber. Once, the vacuum is fully released, the prosthetic knee is removed and closed. The vacuum fill process should be carefully monitored as exiting air may blow enough MR fluid out of the funnel to require fluid volume replenishment.

Examples

5 Example 1 – MR Fluid Preparation

To prepare the MR fluid, the additives were mixed with the carrier fluids and stirred. Carrier fluid was added to the iron particles and the ingredients were stirred. A Branson Digital Sonifier, Model 450, was used to disperse the iron particles in the carrier fluid. The MR fluid was then placed on the sonifier table, with the probe adjusted so that
10 the majority of the probe was immersed in the MR fluid without touching the bottom of the mixture jar. The MR fluid was then sonicated for 1.5 minutes at 50% intensity while the sonifier table rotated. The MR fluid was checked periodically to ensure that the mixture did not become too hot. A fan was used to cool the MR fluid. Once the cycle was complete, the jar was rotated to wash down any particles that were adhered to the walls of
15 the jar. The sonification step was then repeated two more times. Once complete, the MR fluid was removed from the sonifier and a final stir of the MR Fluid was performed to ensure that there were no clumps in the MR fluid. The MR fluid was then placed in an oven for two hours at 50° C (122° F).

Example 2 – Prosthetic Knee MR Fluid Loading

20 After the MR fluid was prepared, it was stirred to break up any small agglomerates. The MR fluid was then placed under the vacuum chamber stirrer and the bell jar was placed over the fluid and stirrer. The stirrer was turned on and vacuum was applied at 29.4" Hg for 30 minutes to extract residual air. The fluid was stirred until no bubbles appeared. The stirrer and vacuum were then turned off and the pressure was slowly increased. The
25 container was then removed from the vacuum chamber.

A measured volume of MR fluid was then transferred into a funnel inserted into the prosthetic knee actuator. The knee was placed in the vacuum chamber and the chamber was sealed with a bell jar. Vacuum was slowly drawn to 28" Hg. The knee was periodically agitated during this procedure.

30 The vacuum chamber was slowly filled with nitrogen gas to remove the vacuum. Vacuum was slowly released at about 2" Hg per 10 seconds. The knee was agitated to help force the fluid into the knee. Nitrogen was disconnected from the vacuum chamber when

the gage read zero. The vacuum chamber was then unsealed and the knee was removed. The funnel was then removed from the knee. Care was taken so as to avoid tipping the knee during this process, which would have resulted in a release of the nitrogen head. The knee was closed by inserting the appropriate set screw with a torque of about 2.5 Nm
5 applied to the screw.

Example 3 – MR Fluid Settling Tests

Settling tests were conducted for thirteen different MR fluids. The rate of settling varied significantly and was found to be a function of iron particle size, the use of additives,
10 and the viscosity of the fluids.

Procedure for Settling Tests

MR fluids were formulated by adding carrier oil, with or without an additive, to a jar containing a weighed aliquot of carbonyl iron particles. For formulations containing an additive, the additive was blended with the carrier oil prior to mixing with the iron
15 particles. The components were mixed by hand for several minutes and then the iron particles were dispersed using high frequency ultrasonic energy supplied by a Branson Digital Sonifier, Model 450. The fluids were subjected to 2 – 3 cycles of ultrasonic energy, each cycle having a duration of 1.5 minutes and power amplitude of approximately 50%. The fluids were then mixed again by hand to insure complete dispersion of the iron
20 particles. Fluids were not degassed prior to starting the settling tests.

Approximately 8 mL of each of the well-mixed MR fluids were transferred to 10 mL graduated cylinders. The cylinders were closed by placing a ground glass stopper into the neck of each cylinder.

The initial volume of MR fluid was recorded and the volume of settled material was
25 read and recorded at regular intervals for a period of twenty-one days. The fraction of settling was defined as the volume of carrier oil, which separated from the MR fluid and floated on the top of the MR fluid divided by the initial fluid volume.

Table 1 – MR Fluids Tested

MR Fluid	BASF Particle Type	Particle Loading (% (v/v) of total MR fluid)	Fluid Component (% (v/v) of total MR fluid)	Carrier Fluid (% (v/v) of total fluid component)	Dupont 157 FSL Additive (% (v/v) of total fluid component)
HQ81FS-28	HQ	28%	72%	95% Nye 8130	5%
HQ85FSL-28	HQ	28%	72%	95% Nye 8510	5%
HS67FS5-32	HS	32%	68%	63.7% Nye 8510; 31.3% Dupont GPL-103	5%
HS8510FSL-25	HS	25%	75%	95% Nye 8510	5%
HS8510FSL-28H	HS	28%	72%	95% Nye 8510	5%
HS85FS10-28	HS	28%	72%	90% Nye 8510	10%
HS85FS10-32	HS	32%	68%	90% Nye 8510	10%
HS85FS1-32	HS	32%	68%	99% Nye 8510	1%
HS85FS5-32	HS	32%	68%	95% Nye 8510	5%
OM8510-25	OM	25%	75%	100% Nye 8510	None
OM85-25-1	OM	25%	75%	99% Nye 8510	1%
OMPF-25	OM	25%	75%	100% Nye 8130	None
OMPFA-25	OM	25%	75%	95% Nye 8130	5%

HQ Particle Size Ranges from about 0.5 – 2.0 μ

HS Particle Size Ranges from about 1.5 – 3.5 μ

5 OM Particle Size Ranges from about 2 - 9 μ

Results

In general the largest iron particles, OM grade, settled the fastest, especially when the viscosity of the fluid was reduced by including the Dupont 157 FSL additive in the formulation. However, the settling curves for the larger OM grade particles were initially steep and then leveled off after 10 to 14 days. Settling rates for the smaller iron particles, HS and HQ grade, were nearly linear over the twenty-one day test period.

Overall, MR fluids with lower settling rates demonstrated longer life and greater durability during subsequent bench testing in prosthetic knees. MR fluids with high settling rates produced hard caked settled iron particles. These fluids performed poorly in subsequent bench testing in prosthetic knees. MR fluids with low settling rates produce soft settled iron particles. These fluids generally performed well in subsequent prosthetic knee bench tests.

Example 4 – Viscosity and Shear Rate Testing

Dynamic viscosity of three mixed carrier oils and six MR fluids made from the mixed carrier oils were measured as a function of shear rate. Viscosity measurements were performed at ambient temperature (22°C) using a Rheometric Scientific (TA Instruments)

RFS-II rheometer with a parallel plate sample cell. All samples were run in duplicate with approximately 1cc of sample. Five of the samples were rerun in duplicate on a second day due to incomplete mixing of the first samples.

Samples of mixed carrier fluids as well as MR fluids containing mixed carrier fluids were tested. The samples and viscosity measurements were as follows:

Table 2

Sample Name	Fluid Component %((v/v))	BASF HS particles %((v/v))	Viscosity (cP) at 100 s ⁻¹
A	100 ¹	0%	115
B	100 ²	0%	121
C	100 ³	0%	145
A-32	68 ¹	32%	681
A-40	60 ¹	40%	1371
B-32	68 ²	32%	780
B-40	60 ²	40%	1651
C-32	68 ³	32%	917
C-40	60 ³	40%	1725

¹Fluid component consisting of 47.5% (v/v) Nye 8510 carrier fluid, 47.5% (v/v) Dupont GPL-103 carrier fluid; 5% (v/v) Dupont 157-FSL additive.

²Fluid component consisting of 63.7% (v/v) Nye 8510 carrier fluid, 31.3% (v/v) Dupont GPL-103 carrier fluid; 5% (v/v) Dupont 157-FSL additive.

³Fluid component consisting of 71.3% (v/v) Nye 8510 carrier fluid, 23.7% (v/v) Dupont GPL-103 carrier fluid; 5% (v/v) Dupont 157-FSL additive.

The dynamic viscosity curves which were measured at ambient temperature (22°C), for the samples above are illustrated in Figures 3, 4, and 5. Figure 3 represents the viscosity, η , versus shear rate curves for the three mixed carrier oils, A-C, and a sample of 100% ((v/v)) Nye 8510 oil. All of the mixed carrier oils had a lower viscosity than Nye 8510. The typical viscosity specification value for Nye 8510 oil is 65cSt at 40°C, while the Dupont GPL-103 oil had a viscosity of 30cSt at 40°C.

Figure 4 represents the viscosity, η , versus shear rate curves for the three mixed carrier oil MR fluids containing 32% ((v/v)) of HS iron particles and a MR fluid which contains 100% Nye 8510 carrier oil and 32% ((v/v)) of HS iron. Viscosities of the mixed carrier oil MR fluids were less than the MR fluid containing only Nye 8510. This data demonstrated that it was possible to reduce the viscosity of a MR fluid by decreasing the viscosity of the carrier oil. Viscosity of the mixed carrier oil MR fluids was lowered in proportion to the amount of GPL-103, which was added to the carrier oil. The three mixed MR fluids exhibited Non-Newtonian behavior as the viscosity of these fluids changed

continually with shear rate. The viscosity of these fluids was approximately six times that of the corresponding carrier oil at a shear rate of 100 s^{-1} .

Figure 5 represents the viscosity, η , versus shear rate curves for the three mixed carrier oil MR fluids which contain 40% ((v/v)) of HS iron particles. The viscosities of these fluids were considerably larger than the viscosities of the MR fluids, which contained 32% ((v/v)) iron. Viscosity of the mixed carrier oil MR fluids containing 40% ((v/v)) iron was lower for the fluids with higher amounts of GPL-103, however, the viscosity curve for B-40 was higher than expected. This apparent anomaly was mostly likely caused by incomplete mixing of the viscous 40% ((v/v)) iron MR fluids prior to the viscosity measurements. The three MR fluids exhibited Non-Newtonian behavior as the viscosity of these fluids changed continually with shear rate. The viscosity of these fluids was approximately twelve times that of the corresponding carrier oil at a shear rate of 100 s^{-1} .

Figure 6 summarizes the comparison of the viscosities of the three mixed carrier oils to Nye 8510 and the viscosities of the six mixed carrier oil MR fluids to that of a MR fluid containing only Nye 8510. Nye 8510 had a viscosity of 240 cP at 100 s^{-1} , while the three mixed carrier oils were well below 200 cP. The MR fluid which contained only Nye 8510 and 32% ((v/v)) iron, namely HS8510FS5-32, has a viscosity of 1,100 cP at 100 s^{-1} , while the MR fluids containing mixed carrier oils and 32% ((v/v)) iron had viscosities of 680, 780 and 917 cP at 100 s^{-1} respectively, for the fluids which contain 50, 67 and 75 % ((v/v)) of Nye 8510. Viscosity of the MR fluids containing 32% ((v/v)) iron increased with increasing amounts of the more viscous Nye 8510. Viscosity of the MR fluids containing 40% ((v/v)) iron also increased with increasing amounts of Nye 8510.

Results indicated that the three carrier oils exhibited near Newtonian behavior, while the six MR fluids all exhibited Non-Newtonian behavior. Viscosity of the MR fluids were shown to be a function of both iron loading and carrier oil viscosity. For MR fluids with 32% ((v/v)) iron loading the viscosity was approximately six times that of the corresponding carrier fluid. For MR fluids with 40% ((v/v)) iron loading the viscosity was about twelve times that of the corresponding carrier fluid. All of the MR fluids exhibited thinning i.e. a reduction in viscosity as a function of shear rate, especially at low shear rates.

Example 5 – Prosthetic Knee Testing

Numerous prosthetics knees operating in shear mode were filled with various MR fluids and tested for fluid performance, low-end torque, cavity pressure, and overall durability of the knee. Testing was performed to simulate use of the knee by an amputee.

5 The knees were tested using a custom made test bench in conjunction with LabVIEW data acquisition software (National Instruments). The test machine rotated the prosthetic knees at a rate of 32,000 cycles per day in order to simulate accelerated knee usage. Prosthetic knees of varying configurations were used with numerous MR fluid compositions. The goal was to achieve three million cycles without knee failure. Due to limited equipment,
10 testing of several knees was cut short in order to test other fluids and/or knee configurations. The following table illustrates some of the testing.

Table 3

Fluid Name	Fluid Composition*	Fluid Performance	Duration of Test
OMPF-25	75% fluid component ¹ ; 25% BASF OM particles.	Unit ran smoothly, off state torque at end of test was 0.7 N-m. Applied field torque at end was 49 N-m.	2.2 million cycles
HS8510FSL-28	72% fluid component ² ; 28% BASF HS particles.	Unit ran well, off state torque at end of test was 0.8 N-m. Applied field torque at end was 33 N-m.	1.2 million cycles
HQ8510FSL-28	72% fluid component ² ; 28% BASF HQ particles.	Unit ran well, off state torque at 2.2 million cycles was 0.8 N-m. Applied field torque at 2.2 million cycles was 43 N-m.	2.4 million cycles
HS8510FSL-25	75% fluid component ² ; 25% BASF HS particles.	Unit ran well, off state torque at 800,000 cycles was 0.6 N-m. Applied field torque at 800,000 cycles was 40 N-m.	862,000 cycles
HS67FSL-32	68% fluid component ³ ; 32% BASF HS particles.	Two units, A1 and A2, produce improved initial applied field torque 47 – 50 N-m. Initial off state torque was in the range of 0.6 - 0.8 N-m. A1 at 433K was at 44 N-m. A2 at 290K was at 47 N-m.	A1 - 433K cycles. A2 - 290K cycles.

*All percentages are % (v/v).

¹ Fluid component consisting of 100% Nye 8130 carrier fluid.

15 ² Fluid component consisting of 95% Nye 8510 carrier fluid and 5% Dupont 157-FSL additive.

³ Fluid component consisting of 63.7% Nye 8510 carrier fluid, 31.3% Dupont GPL-103 carrier fluid, and 5% Dupont 157-FSL additive.

The various methods and techniques described above provide a number of ways to
20 carry out the invention. Of course, it is to be understood that not necessarily all objectives or advantages described may be achieved in accordance with any particular embodiment

described herein. Thus, for example, those skilled in the art will recognize that the composition may be made and the methods may be performed in a manner that achieves or optimizes one advantage or group of advantages as taught herein without necessarily achieving other objectives or advantages as may be taught or suggested herein.

5 Furthermore, the skilled artisan will recognize the interchangeability of various features from different embodiments. Similarly, the various features and steps discussed above, as well as other known equivalents for each such feature or step, can be mixed and matched by one of ordinary skill in this art to perform methods in accordance with principles described herein.

10 Although the invention has been disclosed in the context of certain embodiments and examples, it will be understood by those skilled in the art that the invention extends beyond the specifically disclosed embodiments to other alternative embodiments and/or uses and obvious modifications and equivalents thereof. Accordingly, the invention is not intended to be limited by the specific disclosures of preferred embodiments herein, but
15 instead by reference to claims attached hereto.

WHAT IS CLAIMED IS:

1. A magnetorheological fluid comprising iron particles and a fluid component, wherein the fluid component comprises a carrier fluid and an additive; wherein the additive comprises a parafluoropropene and oxygen
5 polymerized amide derivative and/or a functionalized perfluorinated polyether fluid.
2. The magnetorheological fluid of claim 1 wherein the iron particles range in size from about 0.2 to about 50 microns.
3. The magnetorheological fluid of claim 2 wherein the iron particles range in size from about 0.4 to about 10 microns.
- 10 4. The magnetorheological fluid of claim 3 wherein the iron particles range in size from about 0.5 to about 9 microns.
5. The magnetorheological fluid of claim 1 wherein the iron particles comprise about 1 to about 60% (v/v) of the total magnetorheological fluid volume.
6. The magnetorheological fluid of claim 5 wherein the iron particles comprise
15 about 10 to about 50% (v/v) of the total magnetorheological fluid volume.
7. The magnetorheological fluid of claim 6 wherein the iron particles comprise more preferably from about 20 to about 40% (v/v) of the total magnetorheological fluid volume.
8. The magnetorheological fluid of claim 1 wherein the carrier fluid is selected
20 from the group consisting of silicone, hydrocarbon, esters, ethers, fluorinated esters, fluorinated ethers, mineral oil, unsaturated hydrocarbons, and combinations thereof.
9. The magnetorheological fluid of claim 8 wherein the carrier fluid comprises one or more perfluorinated polyethers.
10. The magnetorheological fluid of claim 1 wherein the additive comprises a
25 parafluoropropene and oxygen polymerized amide derivative.
11. The magnetorheological fluid of claim 1 wherein the additive comprises a functionalized perfluorinated polyether fluid.
12. The magnetorheological fluid of claim 11 wherein the functionalized perfluorinated polyether fluid additive comprises one or more functional groups selected
30 from the group consisting of silane, phosphate, hydroxyl, carboxylic acid, amine dihydroxyl, ethoxy ether, isocyanate, aromatic, ester and alcohol functions.

13. The magnetorheological fluid of claim 11 wherein the functionalized perfluorinated polyether fluid additive comprises a poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group.

14. The magnetorheological fluid of claim 1 wherein the additive comprises
5 from about 0.1 to about 20% (v/v) of the fluid component.

15. The magnetorheological fluid of claim 14 wherein the additive comprises from about 1 to about 15% (v/v) of the fluid component.

16. The magnetorheological fluid of claim 15 wherein the additive comprises from about 2 to about 10 % (v/v) of the fluid component.

10 17. The magnetorheological fluid of claim 1 comprising:
about 28% (v/v) iron particles; and
about 72% (v/v) fluid component;
wherein said fluid component comprises about 5% (v/v) additive and about
95% (v/v) perfluorinated polyether carrier fluid.

15 18. The magnetorheological fluid of claim 17 wherein the additive comprises poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group.

19. The magnetorheological fluid of claim 17 wherein the additive comprises a parafluoropropene and oxygen polymerized amide derivative.

20 20. A magnetorheological fluid comprising iron particles and a fluid component used in combination with a prosthetic knee;
wherein the fluid component comprises a carrier fluid and an additive;
wherein the additive comprises a parafluoropropene and oxygen
polymerized amide derivative and/or a functionalized perfluorinated polyether fluid.

25 21. The magnetorheological fluid of claim 20 wherein the prosthetic knee operates in shear mode.

22. The magnetorheological fluid of claim 20 wherein the iron particles range in size from about 0.2 to about 50 microns.

23. The magnetorheological fluid of claim 21 wherein the iron particles range in
30 size from about 0.4 to about 10 microns.

24. The magnetorheological fluid of claim 22 wherein the iron particles range in from about 0.5 to about 9 microns.

25. The magnetorheological fluid of claim 20 wherein the iron particles comprise about 1 to about 60% (v/v) of the total magnetorheological fluid volume.

26. The magnetorheological fluid of claim 25 wherein the iron particles comprise about 10 to about 50% (v/v) of the total magnetorheological fluid volume.

5 27. The magnetorheological fluid of claim 26 wherein the iron particles comprise more preferably from about 20 to about 40% (v/v) of the total magnetorheological fluid volume.

28. The magnetorheological fluid of claim 20 wherein the carrier fluid is selected from the group consisting of silicone, hydrocarbon, esters, ethers, fluorinated
10 esters, fluorinated ethers, mineral oil, unsaturated hydrocarbons, and combinations thereof.

29. The magnetorheological fluid of claim 28 wherein the carrier fluid comprises one or more perfluorinated polyethers.

30. The magnetorheological fluid of claim 20 wherein the additive comprises a parafluoropropene and oxygen polymerized amide derivative.

15 31. The magnetorheological fluid of claim 20 wherein the additive comprises a functionalized perfluorinated polyether.

32. The magnetorheological fluid of claim 31 wherein the functionalized perfluorinated polyether fluid additive comprises one or more functional groups selected from the group consisting of silane, phosphate, hydroxyl, carboxylic acid, amine
20 dihydroxyl, ethoxy ether, isocyanate, aromatic, ester and alcohol functions.

33. The magnetorheological fluid of claim 32 wherein the functionalized perfluorinated polyether fluid additive comprises a poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group.

34. The magnetorheological fluid of claim 20 wherein the additive comprises
25 from about 0.1 to about 20% (v/v) of the fluid component.

35. The magnetorheological fluid of claim 34 wherein the additive comprises from about 1 to about 15% (v/v) of the fluid component.

36. The magnetorheological fluid of claim 35 wherein the additive comprises from about 2 to about 10% (v/v) of the fluid component.

30 37. The magnetorheological fluid of claim 20 comprising:
 about 28% (v/v) iron particles; and
 about 72% (v/v) fluid component;

wherein said fluid component comprises about 5% (v/v) poly(hexafluoropropylene epoxide) with a carboxylic acid located on the terminal fluoromethylene group additive and about 95% (v/v) perfluorinated polyether carrier fluid.

- 5 38. The magnetorheological fluid of claim 20 comprising:
 about 28% (v/v) iron particles; and
 about 72% (v/v) fluid component;

 wherein said fluid component comprises about 5% (v/v) parafluoropropene
 and oxygen polymerized amide derivative additive and about 95% (v/v)
10 perfluorinated polyether carrier fluid.

 39. The magnetorheological fluid of claim 20 wherein the magnetorheological
fluid is operable over a temperature range from about 10 to about 115° F.

 40. The magnetorheological fluid of claim 20 wherein the carrier fluid has a
viscosity at 104° F of about 10 to about 100 cSt.

15 41. The magnetorheological fluid of claim 40 wherein the carrier fluid has a
viscosity at 104° F of about 30 to about 80 cSt.

 42. The magnetorheological fluid of claim 41 wherein the carrier fluid has a
viscosity at 104° F of about 50 to about 70 cSt.

 43. The magnetorheological fluid of claim 20 wherein the carrier fluid has a
20 viscosity index from about 100 to about 340 based on kinematic viscosity at 104 and 212°F.

 44. The magnetorheological fluid of claim 43 wherein the carrier fluid has a
viscosity index from about 120 to about 320 based on kinematic viscosity at 104 and 212°F.

 45. The magnetorheological fluid of claim 20 wherein the carrier fluid has a
pour point ranging from about -70°C to about -40°C.

25 46. The magnetorheological fluid of claim 20 wherein the carrier fluid has a
percent volatility at 121°C ranging from about 0.01% to about 20%.

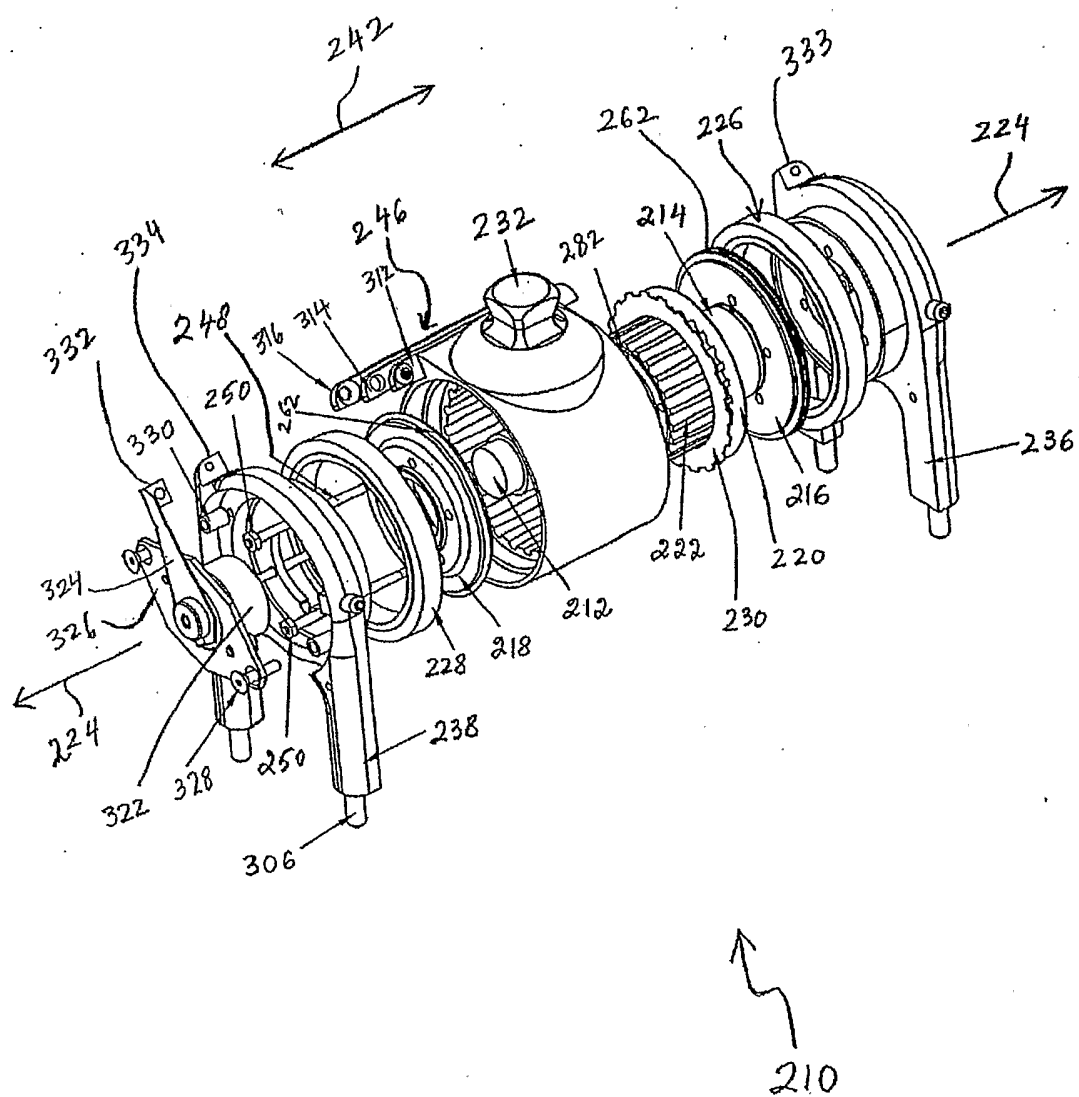


FIGURE 1

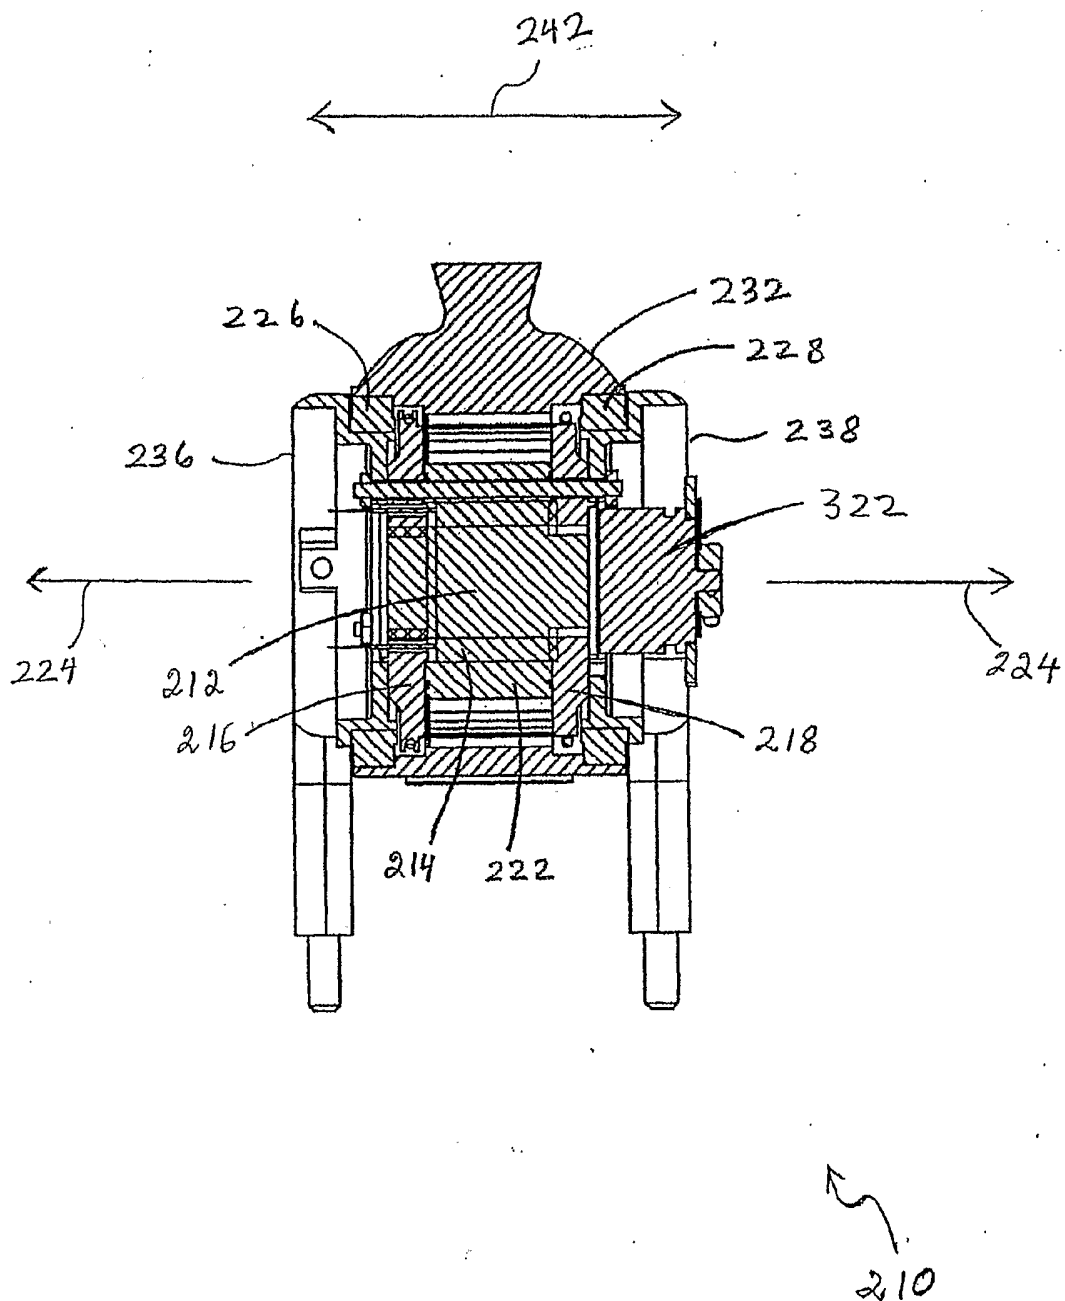


FIGURE 2

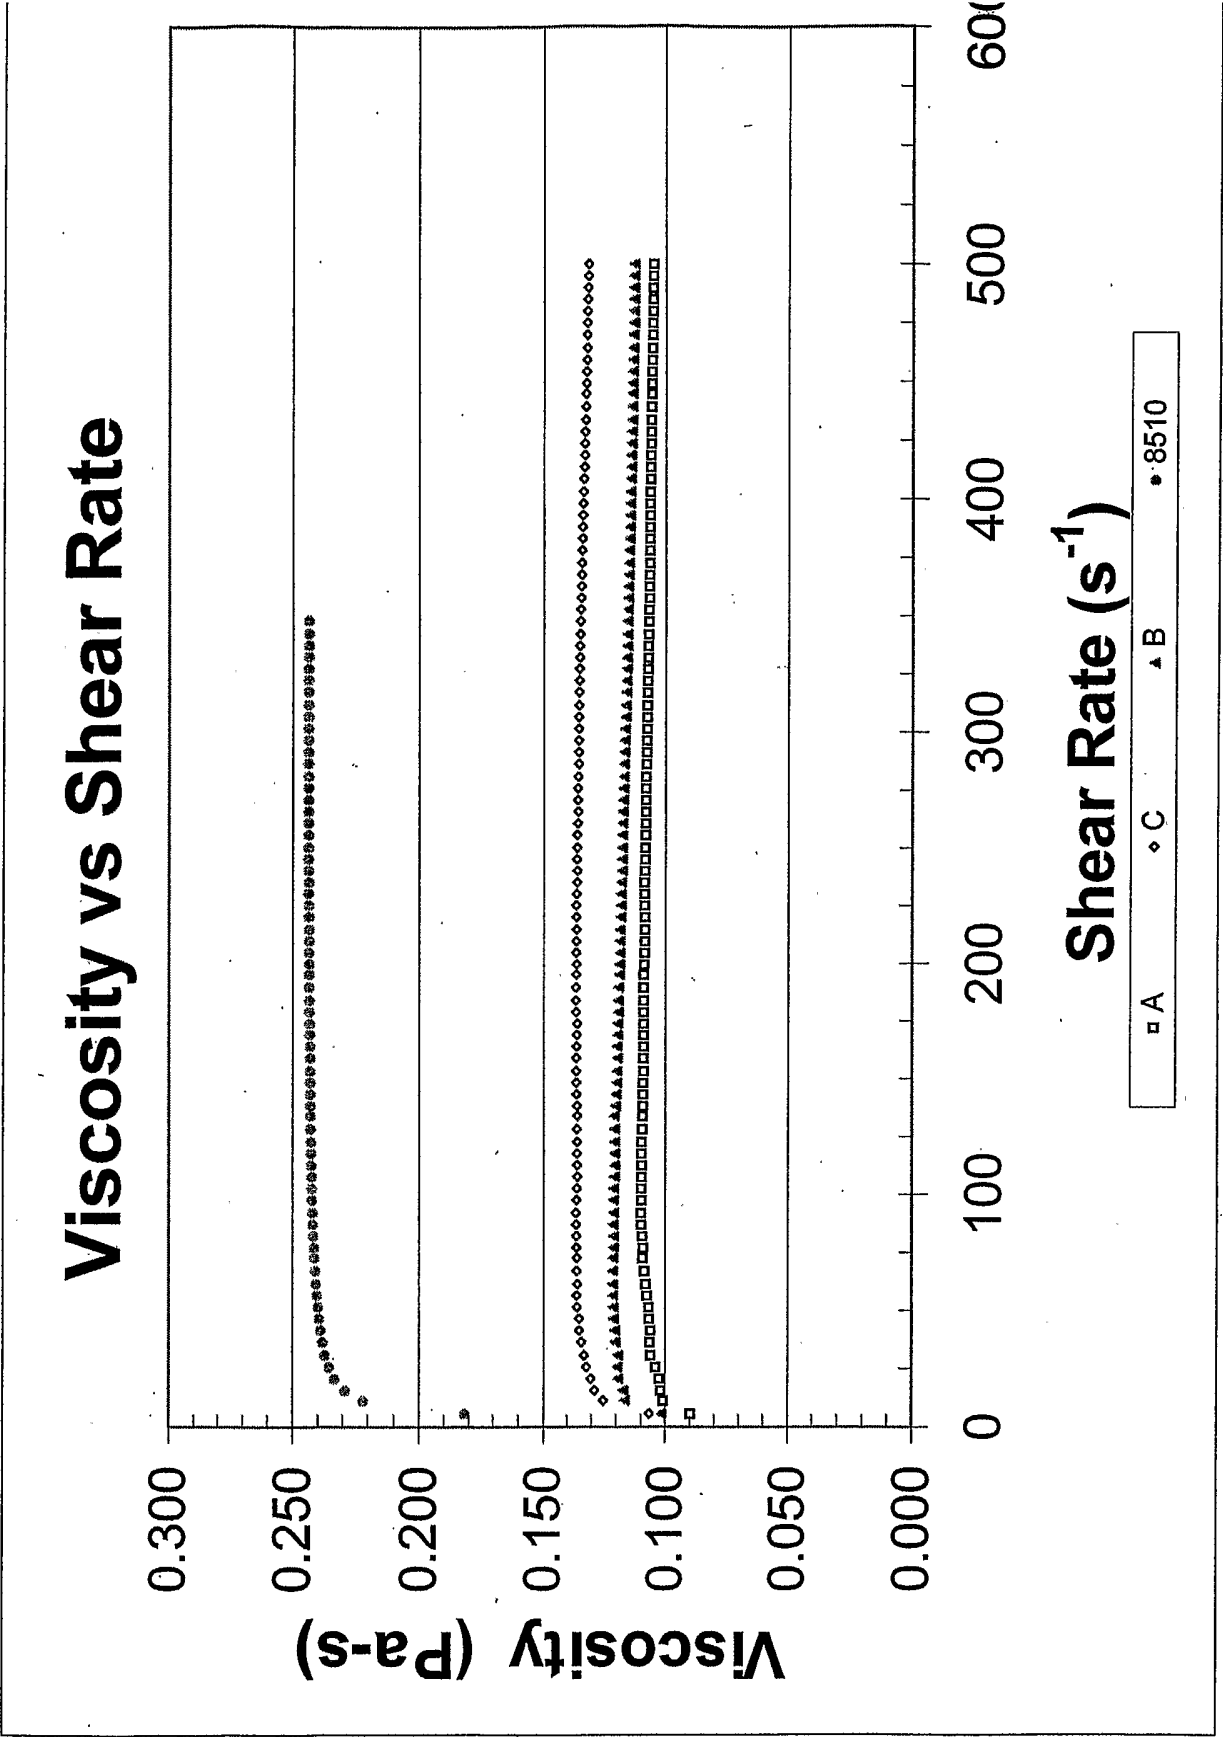


FIGURE 3

Viscosity vs Shear Rate

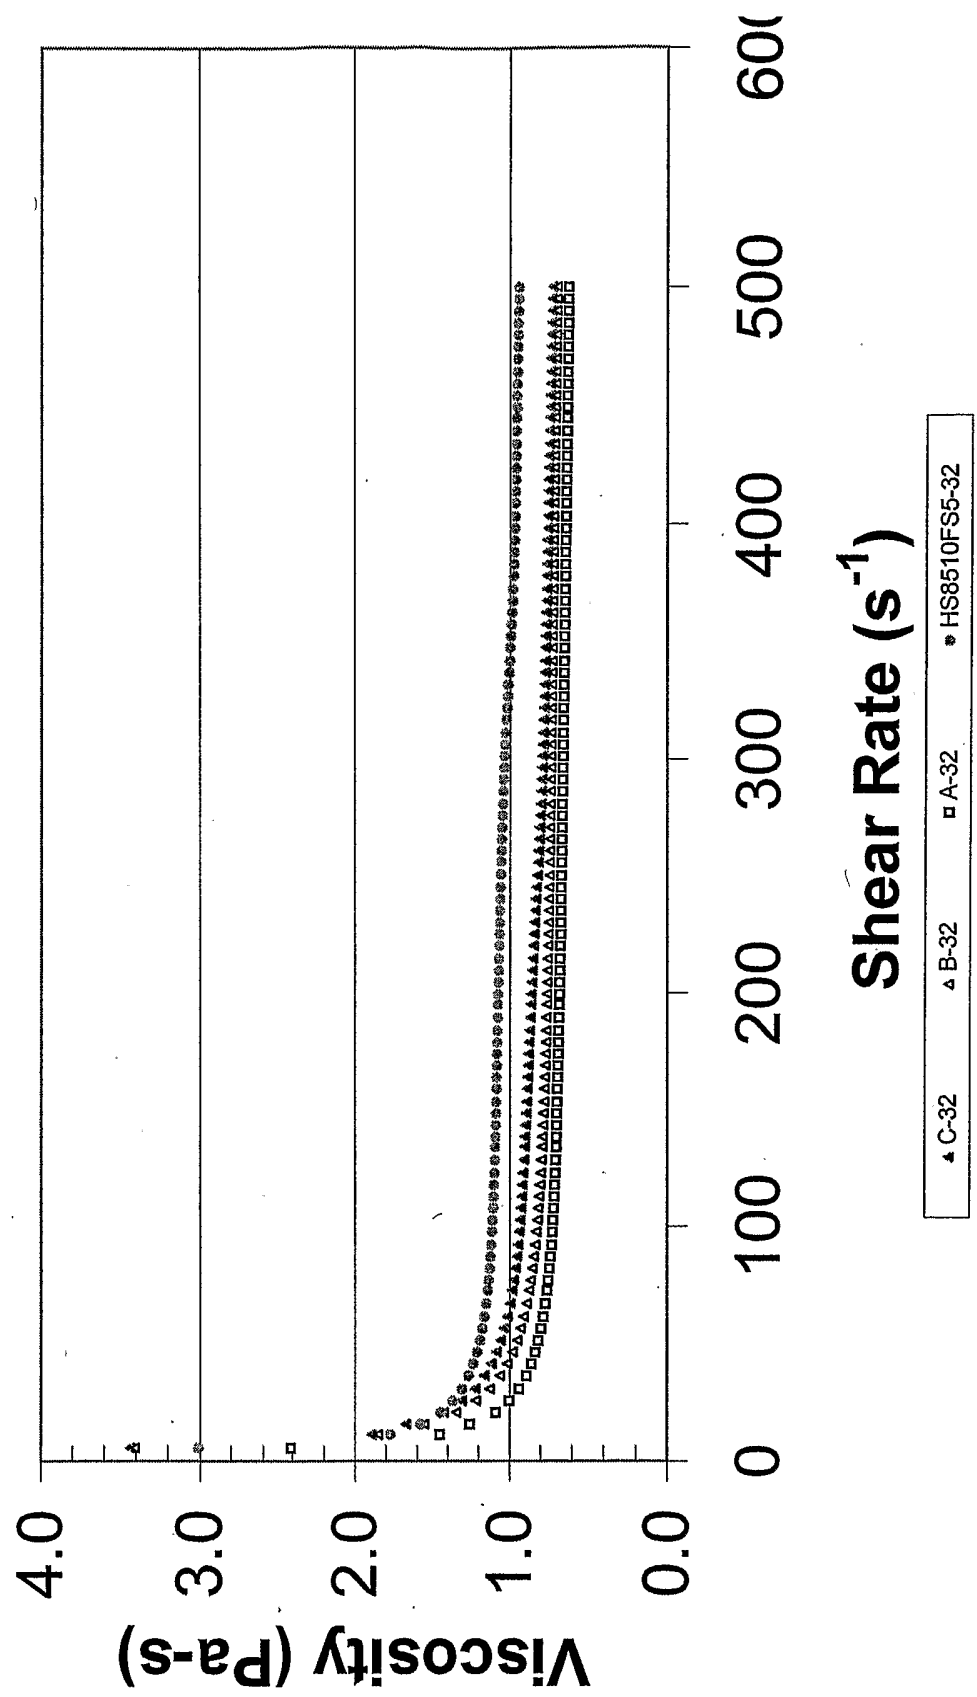


FIGURE 4

Viscosity vs Shear Rate

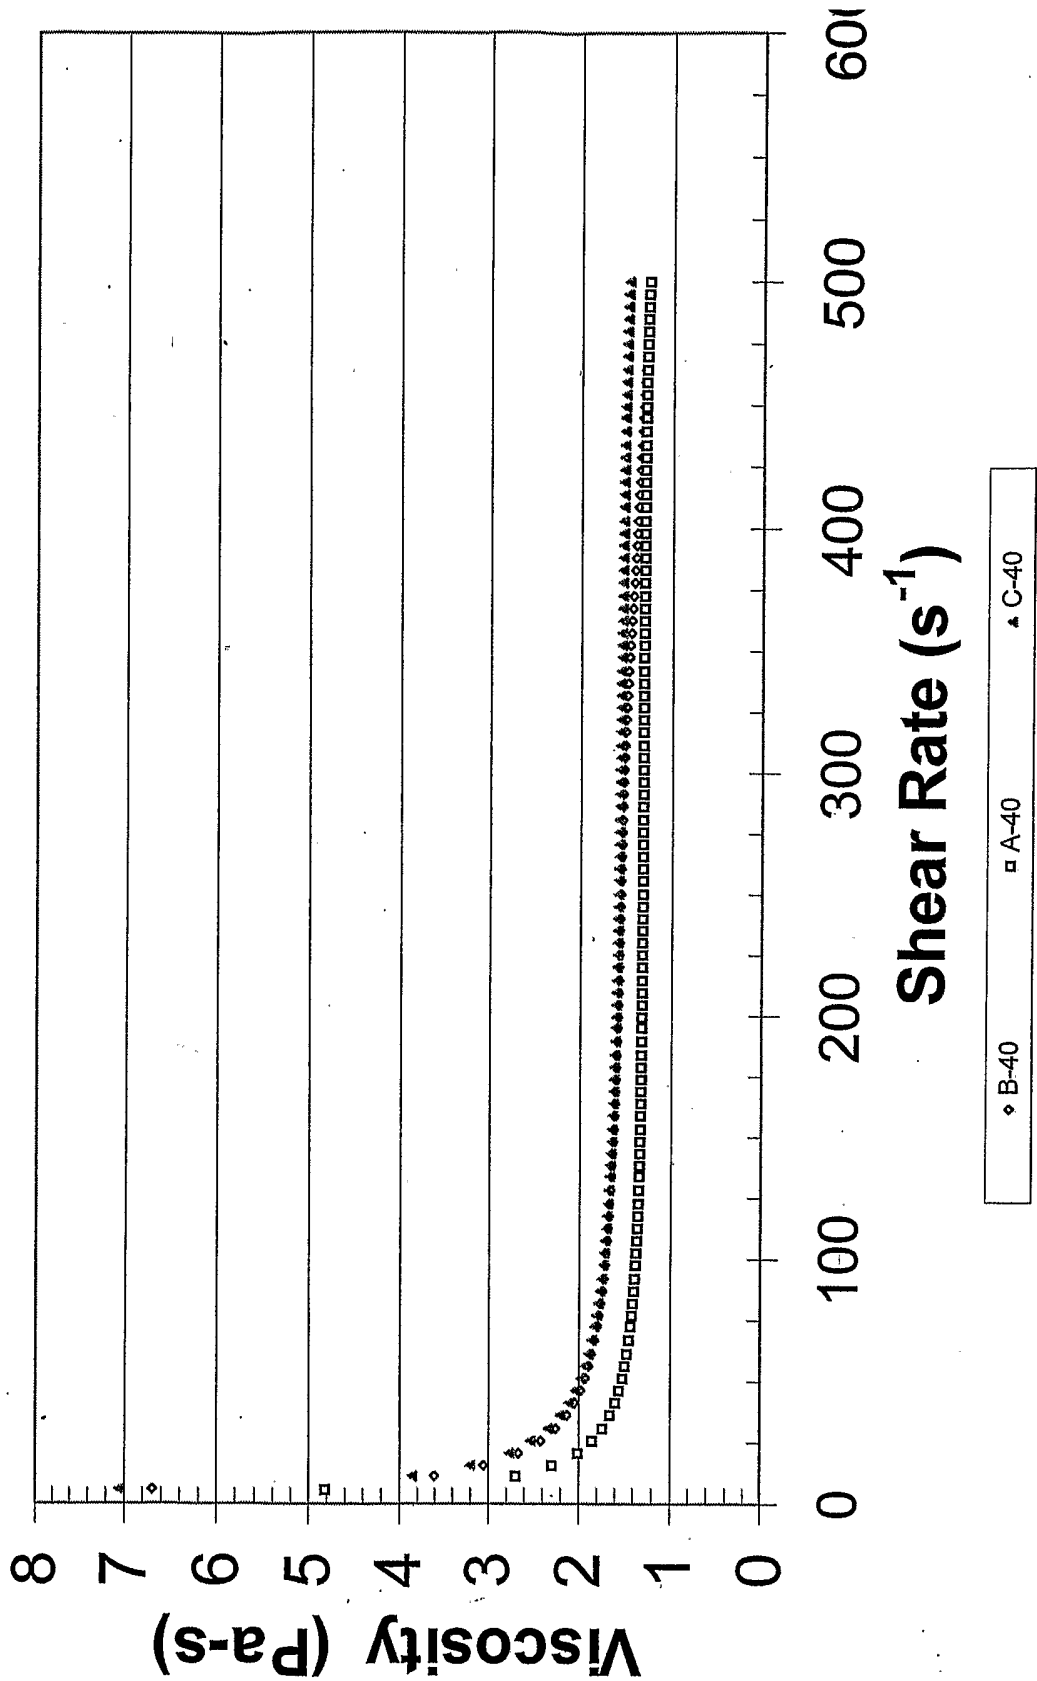
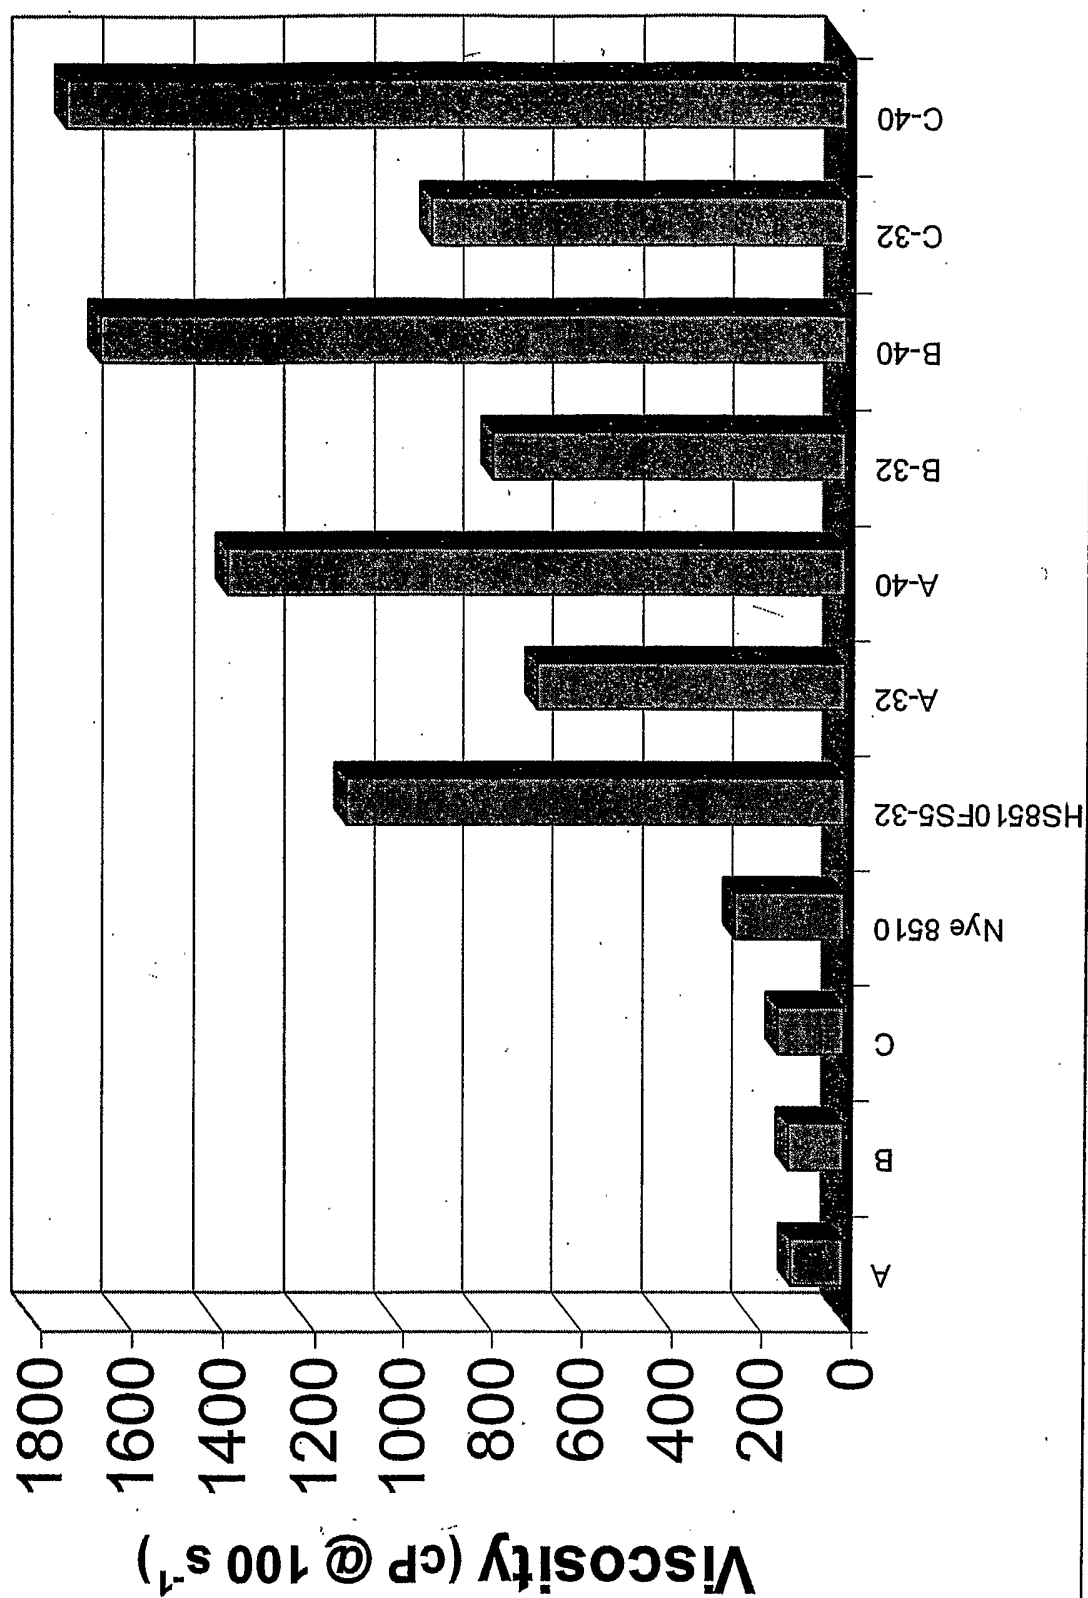


FIGURE 5

Viscosity of Base Oils and MR Fluids

**FIGURE 6**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/37848

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01F1/44 A61F2/64 C10M171/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01F A61F C10M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 5 599 474 A (DUCLOS THEODORE G ET AL) 4 February 1997 (1997-02-04) claims 1,5,10,12,14,16-22 column 6, line 64 -column 7, line 14 column 8, line 40 --- -/--	1-10, 14-16, 20, 22-30, 34-36, 39 11,13, 17-19, 31,33, 37,38, 40-44

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

23 April 2004

Date of mailing of the international search report

03/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Stichauer, L

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/37848

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 203 717 B1 (NGO VAN TRANG ET AL) 20 March 2001 (2001-03-20)	1-4, 8, 9, 20, 22-24, 28, 29
A	claims 1-3, 9 column 2, line 5 - line 8 column 3, line 8 - line 33 ---	10, 11, 17, 19, 30, 31, 38
X	WO 94/10692 A (LORD CORP) 11 May 1994 (1994-05-11)	1-10, 20, 22-30, 39
A	claims 1, 3-5, 9, 10, 12-14, 21 page 8, line 3 - line 28 page 10, line 22 - line 24 page 13, line 29 - line 30 -----	11, 13, 17-19, 31, 33, 37, 38, 40-44

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/37848

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 5599474	A	04-02-1997	CA	2147990 A1		11-05-1994
			CN	1088019 A		15-06-1994
			EP	0672293 A1		20-09-1995
			JP	8502780 T		26-03-1996
			JP	3323500 B2		09-09-2002
			RU	2106710 C1		10-03-1998
			WO	9410692 A1		11-05-1994
US 6203717	B1	20-03-2001	DE	60008533 D1		01-04-2004
			EP	1196929 A1		17-04-2002
			WO	0103150 A1		11-01-2001
WO 9410692	A	11-05-1994	CA	2147990 A1		11-05-1994
			CN	1088019 A		15-06-1994
			EP	0672293 A1		20-09-1995
			JP	8502780 T		26-03-1996
			JP	3323500 B2		09-09-2002
			RU	2106710 C1		10-03-1998
			WO	9410692 A1		11-05-1994
			US	5599474 A		04-02-1997