

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
24 December 2008 (24.12.2008)

PCT

(10) International Publication Number  
WO 2008/156519 A1

## (51) International Patent Classification:

D21H 21/54 (2006.01)

## (21) International Application Number:

PCT/US2008/005038

## (22) International Filing Date: 18 April 2008 (18.04.2008)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

60/936,155 18 June 2007 (18.06.2007) US

(71) Applicant (for all designated States except US): DOW GLOBAL TECHNOLOGIES, INC [US/US]; Washington Street, 1790 Building, Midland, MI 48674 (US).

## (72) Inventors; and

(75) Inventors/Applicants (for US only): KELLY, John, P. [US/US]; 1212 Bayberry Lane, Midland, MI 48642 (US). POLLOCK, Mark, J. [US/US]; 2512 Swede Avenue, Midland, MI 48642 (US). DUNHILL, Holly, L. [US/US]; 4428 Meadow Creek Court, Saginaw, MI 48603 (US). TSAVALAS, John, G. [US/US]; 24 Withers Way, Hockessin, DE 19707 (US). GALLOWAY, James, G.

[US/US]; 3195 Bullock Creek Dr., Midland, MI 48640 (US). CHAPUT, Alan, B., Jr. [US/US]; 5609 Woodview Pass, Midland, MI 48642 (US). DELLINGER, Timothy, M. [US/US]; 3320 N. Sturgeon Rd., Midland, MI 48642 (US). ROPER, John, A., III [US/US]; 2805 Georgetown, Midland, MI 48642 (US). WELSCH, Greg, W. [US/US]; 5700 Tiffany Lane, Midland, MI 48642 (US).

(74) Agents: HUEBSCH, Joseph, C. et al.; 1221 Nicollet Avenue, Suite 500, Minneapolis, MN 55403 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

*[Continued on next page]*

## (54) Title: PAPER COATING COMPOSITIONS, COATED PAPERS, AND METHODS

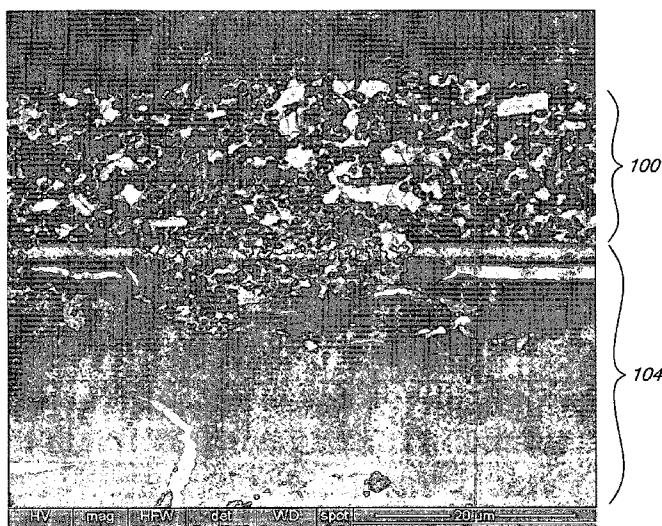


Fig. 1A

(57) **Abstract:** Embodiments of the present disclosure include paper coating compositions, coated paper and/or paperboard, and methods of forming coated paper and/or paperboard with the paper coating compositions. The embodiments of the paper coating compositions contain high levels of hollow polymeric pigment relative to other pigments used in the paper coating composition (e.g., inorganic pigments). The paper coating compositions can provide the coated paper and/or paperboard with a wide variety of desirable features (e.g., high gloss, good smoothness, improved stiffness), while minimizing compaction (i.e., permanent deformation) of the underlying base paper.

WO 2008/156519 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

## PAPER COATING COMPOSITIONS, COATED PAPERS, AND METHODS

This application claims priority in part from U.S. Provisional Application Serial No. 60/936,155 filed June 18, 2007, the entire content of which is incorporated 5 herein by reference.

### FIELD OF THE DISCLOSURE

[001] The disclosure relates to paper coating compositions, coated papers, and methods for forming coated papers.

10

### BACKGROUND

[002] The appearance of printed text and/or images on paper can be affected by the presence of a coating on the paper. The coating can contain a mixture of clay, pigment, and binder. When ink is applied to an uncoated paper it is absorbed by the 15 paper. When ink is applied to coated paper it sits on the coating. This attribute allows ink printed on coated paper to retain a crisp edge. As a result, coated paper generally produces sharper, brighter images and has better reflectivity than uncoated paper.

[003] In producing a coated paper, the coating is first applied over a base paper, and 20 then the coated base paper is consolidated in a calendering operation to make it more suitable for printing. Calendering affects the surface, as well as the whole paper structure, of a coated paper in many ways. For example, it reduces the roughness of the paper. Coated paper roughness depends particularly on the deformation of the fiber network during calendering. A decrease in roughness is often accompanied by 25 an increase in gloss. Paper gloss, which is a surface related paper property, depends mainly on the deformation of the coating layer structure in calendering.

[004] Calendering also affects the structure and characteristics of the base paper. For example, calendering can lead to the loss of opacity, a decrease in stiffness, and a reduction in strength of the base paper. This is especially true when the coated paper 30 has been harshly calendered.

[005] The coating may be finished in the calendering process to a high gloss, a gloss, a dull, or a matte (not glossy) finish. Other slight variations on these finish categories are possible. Coated paper is also categorized into grades by its brightness and gloss

level. The grades can include premium coated paper (the brightest and highest quality grade of coated papers), coated #1, coated #2, coated #3, coated #4, coated #5, coated board, coated laser paper, coated C1S (coated 1-side), coated reply card, and coated SCA (Super Calendered Type A).

5 [006] Improvements in producing the different grades of coated paper and the coating compositions used to form the coated paper continue to be a desire in the art.

## SUMMARY

[007] The present disclosure provides embodiments of paper coating compositions,

10 coated paper and/or paperboard, and methods of forming coated paper and/or paperboard with the paper coating compositions. As discussed herein, embodiments of the paper coating compositions contain high levels of hollow polymeric pigment relative to levels of hollow polymeric pigment used in conventional paper coating compositions. The paper coating compositions can provide the coated paper and/or 15 paperboard with a wide variety of desirable features (e.g., high gloss, good smoothness, improved stiffness), while minimizing compaction (i.e., permanent deformation) of the underlying base paper. As a result, embodiments of the present disclosure can provide coated papers and/or paperboards with improved stiffness and bulk factor values that are not otherwise possible with the level of gloss and 20 smoothness being achieved in the present disclosure.

[008] As used herein, "paper and/or paperboard" refers to a base paper of an amalgamation of fibers that can include, at least in part, vegetable and/or wood fibers, such as cellulose, hemicelluloses, lignin, and/or synthetic fibers. As appreciated, other components can be included in the base paper composition of the paper and/or

25 paperboard. The paper and/or paperboard, as used herein, differ in their thickness, strength, and/or weight, but are both intended to be modified by the embodiments of the paper coating compositions and methods provided herein to form the coated paper and/or paperboard. For improved readability, the phrase "paper and/or paperboard" is replaced herein with the term "paper", with the recognition that "paper" encompasses 30 both paper and/or paperboard unless such a construction is clearly not intended as will be clear from the context in which this term is used.

[009] Embodiments of the present disclosure include a coated paper having a base paper and a coating formed from the paper coating composition of the present

disclosure. The paper coating composition of the present disclosure is applied over at least one of a first and/or a second major surface of the base paper. The coating formed from the paper coating composition of the present disclosure can be used as a base coat, a top coat, and/or one or more intermediate coats between a base coat and a top coat of a coated paper.

[010] For the various embodiments, the paper coating composition includes a binder and a high level of hollow polymeric pigment relative to other pigments used in the coating composition (e.g., inorganic pigments). For example, a high level of hollow polymeric pigment used in the paper coating composition can be in a range of about 5 25 parts to about 65 parts of the hollow polymeric pigment per 100 weight parts total 10 pigment. As used herein, the term "parts" refers to parts on a dry basis, and, as is well known in the art, parts are based on 100 parts of pigment.

[011] For the purposes of the present disclosure, the term "dry" means in the 15 substantial absence of liquids and the term "dry basis" refers to the weight of a dry material. For example, the solids content of the pigment is expressed as a dry weight, meaning that it is the weight of materials remaining after essentially all volatile materials have been removed.

[012] For the various embodiments, the high level of hollow polymeric pigment can have a variety of forms. For example, the hollow polymeric pigment can be discrete 20 individual particles of pigment. In an alternative embodiment, the high level of hollow polymeric pigment can be formed as a cluster of a plurality of the discrete hollow polymeric pigments. As used herein, a "cluster" refers to a structure formed by a plurality of the discrete hollow polymeric pigments in which two or more of the hollow polymeric pigments are joined together. For the various embodiments, the 25 hollow polymeric pigments can have a volume median diameter, measured by hydrodynamic chromatography, of greater than about 1 micron. In addition, in some embodiments, the paper coating composition can include two hollow polymeric pigments having volume median diameters, measured by hydrodynamic chromatography, that have a difference of at least twenty-five percent.

[013] The base paper with its coating formed from the paper coating composition 30 can then be calendered to provide a smoothness of the coating of less than 1.65 PPS-H5 (Parker PrintSurf 5). For the various embodiments, coated paper having this

smoothness can be produced with the thermal rolls of the calender operating with substantially no heat added to the calendering device.

[014] As used herein, "substantially no heat added to the calendering device" refers to an operating temperature in which substantially no additional heat is added to the 5 calendering device beyond heat generated during the calendering process and/or heat added to the calendering device to maintain a constant operating temperature. As such, in some instances, "substantially no heat added to the calendering device" can be about 20 °C to about 65 °C, depending on the calendering process. Surprisingly, the smoothness of less than 1.65 PPS-H5 is achieved at this calender operating 10 temperature while minimally compacting (i.e., permanently deforming), if at all, the base paper of the coated paper.

[015] In addition to the smoothness discussed herein, the coated paper can also have a high gloss. As used herein, a "high gloss" includes a TAPPI gloss value of 65 or greater as determined at a 75° angle of reflectance.

15 [016] As used herein, "a," "an," "the," "at least one," and "one or more" are used interchangeably. The terms "comprises" and variations thereof do not have a limiting meaning where these terms appear in the description and claims. Thus, for example, a reactant mixture that comprises "a" binder can be interpreted to mean that the binder includes "one or more" binders.

20 [017] The term "and/or" means one or all of the listed elements.

[018] Also herein, the recitations of numerical ranges by endpoints include all numbers subsumed within that range (e.g., 1 to 5 includes 1, 1.5, 2, 2.75, 3, 3.80, 4, 5, etc.).

25 [019] The above summary of the present disclosure is not intended to describe each disclosed embodiment or every implementation of the present disclosure. The description that follows more particularly exemplifies illustrative embodiments. In several places throughout the application, guidance is provided through lists of examples, which examples can be used in various combinations. In each instance, the recited list serves only as a representative group and should not be interpreted as an 30 exclusive list.

### **BRIEF DESCRIPTION OF THE FIGURES**

[020] Figures 1A-1D are Scanning Electron Microscope (SEM) images of a coating of the paper coating composition according to one embodiment of the present disclosure on a precoated base paper. Figures 1A and 1B are images (taken at 5 different magnifications) of the coated paper in an uncalendered state. Figures 1C and 1D are images (taken at different magnifications) of the coated paper in a calendered state (140 kN/m at 65.6°C).

### **DETAILED DESCRIPTION**

10 [021] The present disclosure provides embodiments of paper coating compositions, coated paper, and methods of forming coated paper with coatings formed from the paper coating compositions. As discussed herein, the use of the high levels of hollow polymeric pigment relative to other pigments (e.g., inorganic pigments) allows for the paper coating composition to preferentially undergo permanent deformation relative 15 to the base paper during a calendering process.

15 [022] The coating compositions of the present disclosure can provide the coated paper with a wide variety of desirable features (e.g., high gloss, good smoothness), while minimizing compaction (i.e., permanent deformation) of the underlying base paper. Since the base paper can undergo minimal, if any, compaction during the 20 calendering process, the base paper can retain its original stiffness and bulk properties from before the calendering process while being provided with a coating that imparts a gloss of 65 or greater (TAPPI gloss value at a 75° angle of reflectance) and a smoothness of less than 1.65 PPS-H5 (Parker PrintSurf 5). In addition, the paper coating composition produces little to no calendering buildup while producing a 25 coated paper that is not prone to mottling or burnishing, and also has an acceptable print strength and acceptable ink setting performance.

25 [023] In addition, the features of the coated paper (e.g., high gloss, good smoothness) can be achieved at low calendering temperatures, including processes where substantially no heat is added to the calendering device. Operating at this low 30 calendering temperature also results in little to no calendering buildup while producing a coated paper that is not prone to mottling or burnishing, and also results in an acceptable print strength and acceptable ink setting performance.

[024] According to the various embodiments of the present disclosure, the coating composition can contain a binder and a high level of hollow polymeric pigment relative to levels of hollow polymeric pigment used in conventional paper coating compositions. For example, the high level of hollow polymeric pigment can range 5 from about 25 parts to about 65 parts of the hollow polymeric pigment per 100 weight parts total pigment, with the remainder of the 100 parts of pigment being other pigments. In additional embodiments, the amount of hollow polymeric pigment used in the paper coating composition can be in a range of about 30 parts to about 50 parts 10 per 100 weight parts total pigment. In various embodiments, the amount of hollow polymeric pigment used in the paper coating composition can range from about 35 parts to about 45 parts per 100 weight parts total pigment with the remainder of the 100 parts of pigment being other pigments.

[025] As discussed herein, the use of the high level of hollow polymeric pigments in paper coating compositions of the present disclosure can improve the smoothness of a 15 paper coated with such paper coating compositions, as compared to paper coated with coating compositions without the high level of hollow polymeric pigments. For example, World Patent Application WO99/63157 to Amick (hereinafter "WO99/63157") describes the use of a high level of hollow polymeric pigments in a 20 paper coating composition, however, in the examples included in WO99/63157, each sample of paper coated with compositions including high levels of hollow polymeric pigments show a Parker Print smoothness value greater than the control. Specifically, the samples included in WO99/63157 prepared using coating compositions having high levels of hollow polymeric pigment all have a Parker Print smoothness value 25 greater than 1.79 PP-H5, while the controls have Parker Print smoothness values of about 1 PP-H5. In other words, the smoothness of the coated paper worsened when a high level of hollow polymeric pigments is included in the coating composition. As one skilled in the art will appreciate, an increase in a smoothness value is actually a decrease in smoothness of the coated paper.

[026] Similarly, it is recognized in the prior art that including high levels of hollow 30 polymeric pigments in coating compositions has an adverse effect on the smoothness of the resulting coated paper. However, this recognition is premised on experiments where the level of hollow polymeric pigments in the coating composition is incrementally increased starting from a low level of hollow polymeric pigment (e.g.,

about 10 parts per 100 parts total pigment). When coated paper smoothness is measured from such incrementally increasing levels of hollow polymeric pigment coating compositions, the smoothness values show an increase in value. Due to the upward trend of the smoothness value, those skilled in the art have extrapolated the data to provide that as the level of hollow polymeric pigment included in the coating composition is increased, smoothness will experience a further increase.

[027] However, embodiments of the present disclosure show that the smoothness value has a significant decrease when the level of hollow polymeric pigment reaches the high level of hollow polymeric pigment, as defined herein as about 25 parts to about 60 parts of the hollow polymeric pigment per 100 weight parts total pigment, with the remainder of the 100 parts of pigment being other pigments. In such embodiments, when the coating composition includes the high level of hollow polymeric pigments, the smoothness value of the coated paper produced therefrom actually improves. In fact, embodiments of the present disclosure provide coated paper having smoothness values better than the control, and less than 1.65 PP-H5.

[028] A variety of hollow polymeric pigments are suitable for the coating composition of the present disclosure. For example, suitable hollow polymeric pigments can include, but are not limited to, those produced through an acid core process and/or those produced through an ester core process.

[029] Examples of hollow polymeric pigments produced using an acid core process can be found in U.S. Patent No. 4,468,498 to Kowalski, which is incorporated herein by reference in its entirety. Examples of hollow polymeric pigments produced using an ester core process can be found in U.S. Patent Nos. 5,157,084 to Lee and 5,521,253 to Lee, both of which are incorporated herein by reference in their entirety.

[030] Suitable hollow polymeric pigments are available in a range of particle sizes and void volumes. The average particle size typically ranges from about 0.35 to about 3.0 microns. As used herein, "average particle size" refers to the volume median diameter measured by hydrodynamic chromatography.

[031] The void volume of the hollow polymeric pigments can range from about 15 percent to about 60 percent. Preferred hollow sphere plastic pigments have an average particle size of about 0.8 to 1.2 microns and a void volume of about 40 percent to 55 percent. Suitable hollow polymeric pigment include HS 3000NA hollow polymeric pigment, HS 3020NA hollow polymeric pigment, UCARHIDE

4001, and/or UCARHIDE 98, all of which are commercially available from The Dow Chemical Company, or Rhopaque HP 1055, Ropaque Ultra E, and/or Ropaque OP-96 available from the Rohm & Haas Company (Philadelphia, PA).

[032] Mixtures of the hollow polymeric pigments can also be employed in the 5 coating composition. Such compositions can be considered polymodal systems, where "polymodal" refers to a coating composition including hollow polymeric pigments with at least two different dimensional qualities, e.g., volume median diameters, measured by hydrodynamic chromatography. The coating compositions can be bimodal, with two different sized hollow polymeric pigments. Coating 10 compositions with more than two different sized hollow polymeric pigments, however, are also possible.

[033] In embodiments of the present disclosure, blending two different sized hollow polymeric pigments can produce a coating with enhanced coating properties including smoothness, gloss, opacity, porosity, and combinations thereof. In addition, the use of 15 different sized hollow polymeric pigments can be used to enhance a particular property, while not adversely affecting other coating properties. Similarly, different sized hollow polymeric pigments can be combined in different ratios, applied at different coat weights, and calendered at different pressures to obtain a coating composition that produces a coating with particular properties for a particular 20 purpose.

[034] In some embodiments, the paper coating composition can include a binder, a first hollow polymeric pigment having individual particles with a first dimensional quantity and a second hollow polymeric pigment having individual particles with a second dimensional quantity based on the first dimensional quantity of the first 25 hollow polymeric pigment. In various embodiments, the second dimensional quantity can be at least twenty-five percent smaller than the first dimensional quantity of the first hollow polymeric pigment. In addition, in various embodiments, the second dimensional quantity can be at least fifty percent smaller than the first dimensional quantity of the first hollow polymeric pigment.

30 [035] In some embodiments, the first and second dimensional quantities of the first and second hollow polymeric pigments can be volume median diameters, measured by hydrodynamic chromatography. As such, the first hollow polymeric pigment can have a volume median diameter of a first predetermined value, and the second hollow

polymeric pigment can have a volume median diameter of a second predetermined value that is at least twenty-five percent smaller than the first predetermined value of the first hollow polymeric pigment. In various embodiments, the second predetermined value of the volume median diameter of the second hollow polymeric pigment can be at least fifty percent smaller than the first predetermined value of the first hollow polymeric pigment. Additionally, in some embodiments, the volume median diameter of the first and second hollow polymeric pigments can be in a range from about 300 nanometers to about 1,100 nanometers.

[036] In some embodiments, it does not always follow that incorporating more of, for example, the second hollow polymeric pigment with lower gloss and smoothness, will result in a coating composition that has properties that are a direct average of the two systems. Rather, in some embodiments, the properties are not enhanced in a linear manner and may even improve over both systems. For example, the gloss and smoothness for a system with 19 weight percent of a second hollow polymeric

15 pigment can result in a coating composition that forms a coated paper that is glossier and smoother than a coated paper formed with a coating composition with either the first or second hollow polymeric pigment alone.

[037] As discussed herein, in some embodiments, the use of two different sized hollow polymeric pigments can be used to tailor the coating composition to have certain properties. For example, if it is desirable to produce a coating with a smoothness and gloss within a certain range, in some embodiments, the use of two different sized pigments can be used to create a coating composition to produce the coating.

[038] In addition, the use of two different sized pigments can be used to obtain certain properties of a coating while using different processing conditions, for example, lower calendering temperatures and pressures, which can help to decrease the effect that higher temperatures and pressures can have on paper's stiffness. In addition, in embodiments where the goal is to produce a coating with the same properties while reducing the cost, the use of blends can reduce the amount of hollow polymeric pigments used in the coating composition and/or reduce the coat weight down while obtaining equivalent coating properties, decreasing the cost of the coating process.

[039] Also, as one skilled in the art will appreciate, the blend of the hollow polymeric pigments can depend on the inorganic pigments included in the coating composition. As such, in some embodiments, to obtain a coating with the desired properties, different ratios of blends of hollow polymeric pigments may be blended with varying inorganic pigments.

[040] Not wishing to be bound by theory, the use of two different sized hollow polymeric pigments can result in enhanced coating properties while using low calendering temperatures and pressures as a result of increased packing efficiencies related to using a smaller polymeric pigment with a larger polymeric pigment. As one can appreciate, the smaller polymeric pigments can shift around and in between the spaces of the larger polymeric pigments, filling in spaces between the larger polymeric pigments. In such instances, a ratio of the first hollow polymeric pigment to the second hollow polymeric pigment in the coating composition can be determined that allows for the packing of the polymeric pigments to achieve a series of contiguous hollow polymeric pigments that extends through a thickness of the coating. Such an arrangement can cause the coating to be more compressible/collapsible, causing the paper to be less permanently deformed during the calendering process, increasing the stiffness of the paper.

[041] For example, in some embodiments at least 50 percent of the total hollow pigment can be deformed relative to a non-deformed hollow polymeric pigment of the coating. Additionally, the base paper of the coated paper can have a thickness that remains unchanged relative an original thickness of the base paper prior to receiving the coating. In some embodiments, the base paper of the coated paper can have a thickness that changes no more than about 10 percent relative to an original thickness of the base paper prior to receiving the coating.

[042] In some embodiments, the paper coating composition can include the second hollow polymeric pigment in about 5 parts to about 40 parts per 100 weight parts total hollow polymeric pigment of the coating composition. In various embodiments, the paper coating composition can include the second hollow polymeric pigment in about 15 parts to about 30 parts per 100 weight parts total hollow polymeric pigment of the coating composition. In addition, the first and second hollow polymeric pigments can provide less than about 30 parts per 100 weight parts of pigment of the paper coating composition. Additionally, the first and second hollow polymeric pigments can

provide from about 20 parts to about 30 parts per 100 weight parts of pigment of the paper coating composition.

[043] For the various embodiments, the high level of hollow polymeric pigment can have a variety of forms. For example, the hollow polymeric pigment can be discrete individual particles of pigment. In an alternative embodiment, the high level of hollow polymeric pigment can be formed as a cluster having a plurality of discrete hollow polymeric pigments joined together. As used herein, a "cluster" refers to a structure formed by a plurality of discrete hollow polymeric pigments in which two or more of the hollow polymeric pigments are joined together. As used herein, "joined together" refers to chemically bonding the two or more discrete hollow polymeric pigments to form the clusters. In one embodiment, the clusters of the hollow polymeric pigment include 2 or more of the discrete hollow polymeric pigments. In another embodiment, the clusters include 2 to 20 hollow polymeric pigments that have been joined together. In yet another embodiment, the clusters can have a variety of shapes including, but not limited to, symmetrical (e.g., spherical) to asymmetrical (e.g., conical, grape cluster like, raspberry like, and/or bar) shapes. Mixtures of the different shapes of the clusters can also be employed in the coating composition of the present disclosure.

[044] A variety of processes for joining two or more of the hollow polymeric pigments into clusters are possible. For example, the process for joining two or more of the hollow polymeric pigments can include a controlled agglomeration with either a salt or with a cationic surfactant. Examples of joining two or more of polymeric pigments can be found in EP Publication No. EP1784537 A0 to Tsavalas et al., which is incorporated herein by reference in its entirety. Other agglomeration techniques are also possible.

[045] Suitable agglomerating agents include, for example: cationic surfactants such as cetyl pyridinium chloride, quaternary ammonium salts, and ethoxylated quaternary ammonium salts; positively or negatively or amphotERICALLY charged polyelectrolytes such as cationic starch, cationic polyacrylamide, polyethyleneimine (PEI), polyacrylamide-co-acrylic acid, poly(diallyldimethylammonium chloride), (PDADMAC), and the like; neutral water-soluble polymers such as, for example, polyethylene oxide (PEO), and partially hydrolyzed polyvinyl acetate; and

agglomerating salts such as, for example, calcium chloride, zinc chloride, aluminum chloride, and ammonium sulfate.

[046] A colloidally stabilized particle to which the hollow polymeric pigments adhere can also be a suitable agglomerating agent. Examples of such agglomerating agents include cetyl pyridinium chloride and poly(diallyldimethylammonium chloride). Mixtures of agglomerating agents can also be employed. The agglomerating agent is employed in an amount sufficient to form an agglomeration of the hollow polymeric pigments with a weight average cross-sectional dimension of greater than about 1 micron. The amount of agglomerating agent advantageously is sufficient to convert at least about 30 weight percent of the solids of the hollow polymeric pigment to clusters. In additional embodiments, the agglomerating agent can be sufficient to convert at least about 50 weight percent, at least about 75 weight percent and/or at least about 90 weight percent of the solids of the hollow polymeric pigment to clusters. For the various embodiments, from about 0.01 to about 1.0 grams of agglomerating agent is employed per gram of solids of the hollow polymeric pigment. In an additional embodiment, from about 0.03 to about 0.5 grams of agglomerating agent can be employed per gram of solids of the hollow polymeric pigment.

[047] In addition, clusters of the joined hollow polymeric pigment can be formed through a shearing process in which a slurry of hollow polymeric pigment is sprayed through a nozzle. U.S. Patent No. 6,013,594, entitled "Spray Dried Polymer for Catalyst Support" and incorporated herein by reference in its entirety, provides an approach to making agglomerated latex particles using a shearing process.

[048] For the various embodiments, the resulting clusters of the hollow polymeric pigments can have a weight average cross-sectional dimension of greater than about 1 micron. In one embodiment, the clusters of the hollow polymeric pigments can have a weight average cross-sectional dimension of about 2 to about 15 microns. For the various embodiments, the amount of hollow polymeric pigment used in the paper coating composition can be in the ranges as provided herein. In addition, embodiments of the paper coating composition can include at least 50 percent by weight of the hollow polymeric pigment in the cluster form.

[049] For the various embodiments, the binder for the paper coating composition is selected from the group consisting of a synthetic latex, a starch or other natural binder such as a protein (e.g., soy, casein, albumin), polyvinyl alcohol, carboxymethyl

cellulose, hydroxymethyl cellulose, polyvinyl alcohols, polyacrylate salt, and mixtures thereof. In one embodiment, the binder employed in the paper coating formulation is a synthetic latex. Specifically, the synthetic latex can be selected from the group of a polymerized form of styrene, butadiene, acrylonitrile, butyl acrylate,

5      methyl methacrylate, styrene-butadiene, styrene-butadiene-acrylonitrile, styrene-acrylic, styrene-butadiene-acrylic, vinyl acetate, and mixtures thereof. Additional examples of monomers that can be used in the preparation of synthetic latex include mixtures of ethylene and vinyl acetate, and esters of acrylic acid and/or methacrylic acid.

10     [050] In addition, the binders of the present disclosure can be carboxylated. For example, the synthetic latex binders provided herein can be carboxylated, i.e. copolymerized with a carboxylic acid.

[051] For the various embodiments, the binder of the paper coating composition can be an aqueous dispersion of a polymer. As appreciated, the aqueous portion of the 15 binder is, for the most part, evaporated during the manufacture of the coated paper, as discussed herein. In one embodiment, the synthetic latex binder is an example of such an aqueous dispersion of a polymer. In addition, the synthetic latex can have a monomodal or polymodal, e.g. bimodal, particle size distribution. Mixtures of binders can also be used in the paper coating composition.

20     [052] The mean particle size of the binder in the coating composition is generally about 450 to about 5000 angstroms. Coating compositions with binders having relatively smaller particle size typically exhibit improved coating strength because smaller particles provide a greater surface area per unit weight with which to bind the other coating components.

25     [053] A wide variety of commercially available binders are available. Examples of suitable latex binders include: CP 615NA, CP 638NA, DL 920, DL 966, PROSTAR 5401, and CP 692NA, manufactured by The Dow Chemical Company; GenFlo 557 and GenFlo 576, manufactured by Omnova Solutions Inc.; and Acronal S 504 and Acronal S 728, manufactured by BASF Corporation. A suitable starch binder can 30 include Penford Gum PG290 (Penford Products Co., Cedar Rapids IA).

[054] For the purposes of the disclosure, the binder can be selected and the amount used can be sufficient to ensure that the binder has sufficient adhesive properties and coating strength for use in the manufacture of the coated paper. For the various

embodiments, the amount of binder in the paper coating composition should provide adequate coating strength to resist picking. Surprisingly, the percentage of binder needed for the paper coating composition can be less than about 10 percent by weight of the paper coating composition. For example, a suitable percentage for the binder 5 can include, but is not limited to, a range between about 6 percent and about 10 percent by weight of the paper coating composition. In one embodiment, the percentage of binder that can be used in the paper coating composition can be about 5 percent to about 7 percent by weight of the coating composition.

[055] As discussed herein, the paper coating composition can include additional 10 pigments beyond the hollow polymeric pigments to attain the 100 weight parts total pigment. For the paper coating compositions that include the discrete individual hollow polymeric pigment (i.e., the non-clustered hollow polymeric pigment) the additional pigment can be an inorganic pigment. Examples of the inorganic pigment can include kaolin clay, talc, calcined clay, structured clay, ground calcium carbonate, 15 precipitated calcium carbonate, titanium dioxide, aluminum trihydrate, satin white, silica, zinc oxide, barium sulfate, and mixtures thereof. Calcium carbonate is a particularly preferred inorganic pigment.

[056] In some embodiments, the additional pigment added to the composition to attain 20 100 weight parts total pigment can be an inorganic pigment and/or a solid polymeric pigment. As used herein, solid polymeric pigments include those polymeric pigments that have no more than about a 5 percent void volume. Examples of suitable solid polymeric pigments include, but are not limited to, Plastic Pigment 722, Plastic Pigment 730, or Plastic Pigment 756 available from The Dow Chemical Company.

[057] Additionally, in various embodiments where the paper coating composition 25 includes the discrete individual hollow polymeric pigments (i.e., the non-clustered hollow polymeric pigment), the additional pigments added to the composition to attain 100 weight parts total pigment can be substantially free of solid polymeric pigments.

[058] The particle size distribution of the inorganic pigment used in the coating 30 compositions of the present disclosure also can have an influence on the gloss of the coated paper formed with such coating compositions. For example, when calcium carbonate pigments having a relatively coarse particle size distribution (e.g.,

HYDROCARB 60, Omya, Inc, Proctor Vermont, USA) are used with the paper coating composition it is found to provide better gloss and smoothness values for the coated paper as compared to the use of calcium carbonate pigments having a relatively fine particle size distribution (e.g., HYDROCARB 90, Omya, Inc, Proctor

5 Vermont, USA).

[059] In some embodiments, the particles can have a coarse particle size distribution where the particles have a particle size distribution in which less than about 65 percent of the inorganic pigment is less than about 2 microns in diameter (as specified by the manufacturer). For example, HYDROCARB 60 has a median particle 10 diameter of about 1.4 microns (as specified by the manufacturer). As appreciated, coarse particle size distributions having values other than 65 percent (e.g., 70 percent, 75 percent, 80 percent etc.) of the inorganic pigment being less than about 2 microns in diameter (as discussed above) are also possible for providing improved gloss and 15 smoothness relative to inorganic pigments having a relatively fine particle size distribution.

[060] Coating compositions including fine particle size distributions of calcium carbonate pigments also gave good results for gloss and smoothness.

[061] As used herein, "fine particle size distribution" refers to particles having a particle size distribution in which about 90 percent of the inorganic pigment is less 20 than about 2 microns in diameter (as specified by the manufacturer). For example, HYDROCARB 90 has a median particle diameter of about 0.65 microns (as specified by the manufacturer).

[062] Typically, fine particle size distributions of inorganic pigments are expected to provide coatings with higher gloss and better smoothness as compared to coarse 25 particle size distributions of inorganic pigments. However, when high levels of hollow polymeric pigment are used in the coating compositions of the present disclosure, it has been found that the normally lower glossing coarse particle size distributions of inorganic pigments, such as HYDROCARB 60, can now obtain higher gloss for the coated paper than can be attained with conventional high glossing 30 fine particle size distributions of inorganic pigments, such as HYDROCARB 90, with the other factors and components of the coating composition being the same.

[063] While not wishing to be bound by theory, the use of the coarse particle size distributions of inorganic pigment appear to provide for better gloss and smoothness

as compared to the fine particle size distributions of inorganic pigment because the coarse particle size distributions of inorganic pigment allow for better packing of the hollow polymeric pigments. Since the coarse particle size distributions of inorganic pigment have fewer particles per unit volume (given a certain volume ratio of the

5 coarse inorganic pigment and the hollow polymeric pigment), there is more space for the hollow polymeric pigment to become continuous in the coating composition. This then leads to the improvements in packing and compressibility of the hollow polymeric pigments in the paper coating composition, as discussed herein.

[064] In an alternative embodiment, when clusters of the hollow polymeric pigment,

10 as discussed herein, are used in the paper coating composition, the composition also includes both the inorganic pigment and the binder, as discussed herein. In addition, the paper coating composition having the clusters of the hollow polymeric pigment can also include additional polymer pigments in the form of discrete individual particles of pigment, as opposed to the clusters of hollow polymeric pigment. These 15 discrete individual particles of polymeric pigment are solid polymeric pigment and/or hollow polymeric pigment. Examples of suitable hollow polymer pigments include those discussed herein. Examples of suitable solid polymeric pigments include, but are not limited to, Plastic Pigment 722, Plastic Pigment 730, or Plastic Pigment 756 available from The Dow Chemical Company.

20 [065] For the paper coating composition including the clusters of the hollow polymeric pigment, the clusters of the hollow polymeric pigment can compose at least about 25 parts to about 65 parts per 100 parts pigment; the inorganic pigment can compose from about 35 parts to about 75 parts per 100 parts pigment; the binder can compose from about 6 parts to about 25 parts per 100 parts pigment; and the 25 additional polymeric pigment can compose from about 0 parts to about 25 parts per 100 parts pigment, all of which are based on 100 weight parts total pigment. In an additional embodiment, the clusters of the hollow polymeric pigment used in the paper coating composition can compose from about 30 parts to about 50 parts per 100 parts pigment; the inorganic pigment can compose from about 55 parts to about 65 parts per 100 parts pigment; the binder can compose from about 6 parts to about 25 parts per 100 parts pigment; and the additional polymeric pigment can compose from about 0 parts to about 25 parts per 100 parts pigment, all of which are based on 100 weight parts total pigment.

[066] If desired, conventional additives can also be incorporated into the embodiments of the paper coating compositions in order to modify the properties thereof. Examples of these additives include conventional thickeners, dispersants, dyes and/or colorants, preservatives, biocides, anti-foaming agents, optical brighteners, wet strength agents, lubricants, water retention agents, crosslinking agents, surfactants, and pH control agents, and mixtures thereof. The use of other additives in the paper coating composition is also possible. Practitioners skilled in the art are aware of how to select the appropriate additional additives to achieve the desired final product attributes.

5 [067] The rheology of the paper coating composition can vary widely as is known in the art, depending on the result desired. The paper coating composition solids content advantageously is at least about 25 percent to about 65 percent, and in one embodiment is from about 30 to about 50 percent.

10 [068] For the embodiments of the present disclosure, the paper coating composition is applied over at least one of a first and/or a second major surface of a base paper before a calendering process. The base paper can be a dried amalgamation of fibers that can include, at least in part, vegetable and/or wood fibers, such as cellulose, hemicelluloses, lignin, and/or synthetic fibers. As appreciated, other components can be included in the base paper composition of the paper and/or paperboard.

15 [069] The paper coating composition can be applied to the base paper using a number of different coating techniques. Examples of these techniques include rod, grooved rod, curtain coating, stiff blade, applicator roll, fountain, jet, short dwell, slotted die, bent blade, bevel blade, air knife, bar, gravure, size press (conventional or metering), spray application techniques, wet stack, and/or application during the

20 calendering process. Other coating techniques are also possible.

25 [070] In one embodiment, one or more layers of the paper coating composition are applied on at least one side of the base paper using a rod and/or a stiff blade coating technique. In one embodiment, the total dried coat weight applied per side is about 0.5 to about 20 g/m<sup>2</sup>, and in an additional embodiment about 4 to about 10 g/m<sup>2</sup>. In one embodiment, the coating can be applied to both sides of the base paper to ensure that the printed images on both sides of the printing sheet are of comparable quality. In one embodiment, the paper coating composition can be applied as a single layer to the base paper.

[071] The layer(s) of the paper coating composition is then dried. Drying of the paper coating composition can be accomplished by convection, conduction, radiation, and/or combinations thereof.

[072] In addition, the coated paper can also include a base coat between the base paper and the coating of the present disclosure. As used herein, a "base coat" refers to a pigmented or unpigmented base coat that can lay under the paper coating composition of the present disclosure and can include a binder. When the base coat is pigmented, the pigment can be selected from the group consisting of kaolin, talc, calcined clay, structured clay, ground calcium carbonate, precipitated calcium carbonate, titanium dioxide, aluminum trihydrate, satin white, hollow polymeric pigment, solid polymeric pigment, silica, zinc oxide, barium sulfate, and mixtures thereof. The pigment component of the base coat can have a monodisperse or polydisperse particle size distribution.

[073] The base coat layer is applied to the base paper prior to the application of the paper coating composition. The base coat layer is applied in a similar manner as the paper coating composition as described herein, and may be applied in one or more layers.

[074] The base paper with its coating of the paper coating composition can then be calendered. As used herein, "calendered" refers to a wide range of different operations in which multiple rolls are used to process the coated paper through one or more nips. Examples of such on or off machine calendering processes can include, but are not limited to, single-nip calendering, hot/soft calendering, multi-nip calendering, extended nip calendering, and super calendering processes. The rolls of the calender can be made of a variety of materials. For example, the rolls can be formed of metal (e.g., steel), have a polymeric covering, and/or a cotton covering, where the different rolls can each having different diameters and optional coverings.

[075] As appreciated, the effect of calendering processes on the coated paper properties depends on the temperature of the roll surfaces, the running speed, the elastic properties of the rolls and the linear load between the rolls, among others. In one embodiment, the linear load range of the calendering process can range from about 35 to about 525 kN/m, and the operating roll temperature can range from about 20°C to about 300 °C. In an additional embodiment, the operating roll temperature

can be from about 90 °C to about 150 °C (i.e., where no heat is added to the rolls of the calendering process).

[076] For the various embodiments, calendering the layer of the paper coating composition on the base paper can provide a smoothness of the coating of less than

5 1.65 PPS-H5 (Parker PrintSurf 5). In addition, the coated paper can further display a TAPPI gloss value of 65 or greater as determined at a 75° angle of reflectance. For the various embodiments, coated paper having this smoothness and high gloss can be produced with the thermal rolls of the calender operating with substantially no heat added to the calendering process. Surprisingly, this level of smoothness and gloss is  
10 achieved at this calender operating temperature while minimally compacting (i.e., permanent deforming), if at all, the base paper of the coated paper.

[077] For the various embodiments, the combination of high gloss, good smoothness, improved stiffness, and bulk for the coated paper is achieved due to the compressible nature of the paper coating composition of the present disclosure

15 relative to the base paper. The high level, or parts, of the hollow polymeric pigment allows for the paper coating composition to be highly compressible relative to the base paper onto which it is coated.

[078] While not wishing to be bound by theory, it is believed that at least one reason for the highly compressible nature of the paper coating composition is that the

20 compression of the hollow polymeric pigment is largely uninhibited by relatively large amounts of a hard incompressible pigments (e.g., calcium carbonate). So, during a calendering process the paper coating composition can be permanently deformed while minimally altering the original thickness (Z-direction) of the base paper (i.e., little or no compaction). As used herein, the term "Z-direction" refers to a  
25 thickness dimension (i.e., the smallest of the three dimensions) of a portion for the coated paper being measured (e.g., the thickness of the base paper).

[079] This allows the compressive forces of the calendering process to permanently deform the coating formed from the coating composition while allowing a plastic response (e.g., an elastic response where compression occurs without compaction and

30 deformation is not permanent) from the base paper. So, during a calendering process the coating formed from the paper coating composition can undergo permanent deformation, while the base paper undergoes minimal, if any, compaction (i.e., permanent deformation) during the calendering process. As a result, the strength

properties of the base paper can be essentially retained while still achieving the desired paper surface properties (e.g., gloss and smoothness) from the calendering process.

[080] Because the coating formed from the paper coating composition is so highly

5 compressible relative to the base paper, there is a greater flexibility in the operating conditions of the calendering process (e.g., the nip pressure, calender operating temperature, type of calender, calendering speed, roll hardness) in achieving the desired coated paper features (e.g., smoothness, stiffness factor, bulk factor, gloss, etc.). In addition, these desired coated paper features can be achieved while

10 producing a coated paper that should not be prone to mottle or burnishing and that displays acceptable print strength and acceptable ink setting performance.

[081] It has been found that passing the coated paper through the calendering

process compresses the coating formed from the paper coating composition so as to reduce a coating thickness on the base paper by at least 20 percent relative the original 15 coating thickness. Surprisingly, the reduction in coating thickness is uniform across the Z-direction of the coating composition. That is, this level of compression (i.e., at least 20 percent) can be found regardless of location through the Z-direction of the coating composition. At least one reason for this uniform compression can be due to the hollow polymeric pigment of the coating composition being deformed regardless 20 of their level, or position, in the coating structure.

[082] In addition, it has been found that at least 50 percent of the hollow polymeric pigment is deformed in reducing the coating thickness at least 20 percent during the calendering process. That is, at least 50 percent of the hollow polymeric pigment is deformed during the calendering process relative their non-deformed state prior to

25 calendering process. As there is uniform compression through the thickness of the coating, thus at least 50 percent deformation of the hollow polymeric pigment occurs uniformly (e.g., evenly distributed) through the Z-dimension of the coating. As used herein, "deformed" refers to altering the original shape of the hollow polymeric pigment (i.e., their shape prior to calendering) due to the calendering process.

30 [083] As discussed herein, the compression of the coating formed from the paper coating composition on the base paper can be achieved while minimally altering the original thickness (Z-direction) of the base paper (i.e., little or no compaction). For example, the calendering process changes the coating thickness as discussed herein,

while the thickness of the base paper of the coated paper changes no more than about 10 percent relative to its original thickness prior to receiving the coating. It is also possible that the calendering process, while changing the coating thickness as discussed herein, leaves the thickness of the base paper of the coated paper essentially

5 unchanged relative an original thickness of the base paper prior to receiving the coating (i.e., maintaining the original thickness of the base paper).

[084] Figures 1A-1D provide scanning electron microscope (SEM) images that illustrate the uniform compressibility of coatings formed from the paper coating composition of the present disclosure. The thickness of the coatings and the base

10 paper were obtained from SEM pictures using IMAGEJ software. Figures 1A and 1B provide images (taken at different magnifications) of a coating formed from the paper coating composition according to one embodiment of the present disclosure on a precoated base paper in an uncalendered state. As shown, the paper coating composition 100 is coated on a base paper 104.

15 [085] Upon calendering with a Beloit Wheeler Model 753 Laboratory Calender by passing the sheet through three nips with a calender pressure of 140 kN/m and a temperature of 66 °C, the hollow polymeric pigment of the coating composition has been uniformly deformed throughout the thickness of the calendered paper coating composition. As illustrated in the images of Figures 1C and 1D (taken at different

20 magnifications), the thickness of the paper coating composition has been uniformly reduced by at least 20 percent relative the original coating thickness, with at least 50 percent of the hollow polymeric pigment being deformed during the calendering process. In addition, the original thickness (Z-direction) of the base paper 104 has experienced little or no compaction.

25 [086] Portions of the calendered coating formed from the coating composition illustrates areas around the inorganic pigment (i.e., the irregularly shaped white portions of the image) where the hollow polymeric pigments have experienced less deformation as compared to other areas of the paper coating composition. This is most likely due to the hard inorganic pigment shielding the hollow polymeric pigment

30 from the compressive force of the calendering process.

[087] In addition to the smoothness and high gloss produced in the calendering process, the coated paper can also display a stiffness factor of at least about 0.5 Gurley/((PPS-S10)(g/m<sup>2</sup>)). Further, it has been found that there is an at least 25

percent improvement in stiffness of the coated paper of the present disclosure relative to a control. As used herein, a stiffness factor relates to paper stiffness and is calculated from a composite stiffness value of the coated paper divided by the product of the smoothness of the coating and the base paper basis weight. As used herein, the 5 composite stiffness value is determined from the machine direction stiffness and the cross machine direction stiffness of the coated paper according to the formula:

$$\text{Composite Stiffness} = \frac{\text{Machine Direction Stiffness} + \text{Cross Machine Direction Stiffness}}{2}$$

[088] As used herein, the machine direction is the direction in a plane of a paper 10 sheet or web corresponding to the direction of the flow of the stock in the paper machine. Fibers tend to be oriented mainly in the machine direction. Cross Machine direction is the direction in the plane of the paper sheet or web at right angles to the machine direction.

[089] The coated paper also has a bulk factor of at least about 1 mm/(g/m<sup>2</sup>) which 15 can be expressed as a function of its total weight as follows:

$$\frac{\text{Caliper of Coated Paper (mm)}}{\text{Base Weight of Coated Paper (g/m}^2)}$$

[090] As used herein, "bulk factor" is an indication of a calendering intensity 20 parameter and is discussed in U.S. Patent 6,254,725, which is incorporated herein by reference in its entirety. For the various embodiments, the basis weight can be expressed as grams per square meter of paper.

[091] The coated paper of the present disclosure can be used in a variety of print 25 applications. These print applications can include, but are not limited to, high quality products like magazines, fliers, catalogs, books, and packaging, which are often printed in multicolor (e.g., 4-color) printing processes where low roughness and uniform surface structure are important for print result. In addition, the coating papers of the present disclosure allow for not only improved printing surfaces, but also maintain their stiffness relative to their pre-calendered condition. So, the coated papers of the present disclosure can simultaneously maintain good print surfaces while maintaining base paper stiffness, two characteristics that have been 30 diametrically opposed to each other in the state of the art until now.

[092] Embodiments of the present disclosure are illustrated by the following examples. It is to be understood that the particular examples, materials, amounts, and procedures are to be interpreted broadly in accordance with the scope and spirit of the invention as set forth herein.

5

## EXAMPLES

The following examples are given to illustrate, but not limit, the scope of this disclosure. Unless otherwise indicated, all parts and percentages are by weight.

Unless otherwise specified, all instruments and chemicals used are commercially available.

10

### Test Methods

#### Volume Median Diameter

15 The volume median diameter of a hollow polymeric pigment was measured by hydrodynamic chromatography. The method of determining the volume median diameter using hydrodynamic chromatography is presented in "Development and application of an integrated, high-speed, computerized hydrodynamic chromatograph", Journal of Colloid and Interface Science, Vol. 89, Issue I, September 20 1982, Pgs. 94-106, Gerald R. McGowan and Martin A. Langhorst.

#### SEM images of cross-sectioned paper

A square specimen of paper was cut from a sample sheet of paper. The square was approximately 15.9 mm on each side and was cut in a region that is away from areas where coating artifacts may be present such as along the uncoated edge of the paper. The square was mounted in an S-shaped Struers Multiclip (Cold Mounting Accessories Brochure; item 40300027) which can hold up to five specimens in one clip.

25 The specimen was stained by exposing it to osmium vapor overnight. The specimen (mounted in the clip) was placed in a one-liter airtight container along with approximately 0.5 gram of osmium tetroxide crystals. The osmium in the vapor reacts with residual double-bonds present in materials like butadiene, resulting in an

effective stain that is useful for identifying these regions in experiments that are sensitive to atomic mass, such as electron microscopy.

The stained specimen and clip were place inside a 3.175 cm Struers Epoform mounting cup and vacuum-embedded in epoxy then allowed to cure for 5 approximately twenty-four hours. Once cured, the mount was metallographically polished with a series of successively-finer abrasives on Streuers Rotopol-V and Buehler Vibromat 2 polishers.

The polished surface was coated with approximately 30 angstroms of a conductive coating (either carbon or chrome) before imaging in the FEI Nova 10 NanoSEM 600 scanning electron microscope (SEM). Images were collected using the backscatter detector where image contrast is based on atomic number so that materials with high atomic number scatter electrons more than low atomic number. This allows differentiation of inorganic fillers (clay, carbonates) from organics and from the osmium-stained regions. The electron beam was run at 10keV accelerating 15 potential with a 3nm spot size. Images were collected at varying resolution, depending on the subject being imaged and stored as TIFF images (tagged image file format) for further workup.

The images were processed with the ImageJ software, a public domain 20 program written at the U.S. National Institutes of Health. The coating was isolated for analysis by thresholding the relatively bright coating and converting the thresholded pixels to “black” and the remaining pixels to white. Errors in the thresholding were manually corrected with image editing tools so that the binary representation of the coating was faithful to the image of the true coating.

25 Dry Pick

Picking is defined as the lifting of a coating, film or fibers from the surface of the base paper during printing. When a print wheel makes contact with a paper sample to deposit the ink, then subsequent negative forces are exerted on the paper as the inked print wheel is removed from the paper surface. The dry pick strength of the 30 coated paper was measured with a method that consists of printing a strip of the coated paper in a print tester at an accelerating rate. The accelerated speed of the print wheel and the tack rating of the ink were adjusted to determine the strength of the coated paper sample at specific printing conditions. If the combination of print wheel

speed and ink tack is great enough, then resulting negative forces create picking, which may appear as: white areas on the surfaces of the print wheel and coated paper sample, blisters and textured areas on the surface of the coated paper sample, delamination (surface layer removal) of the coated paper sample, or tearing (complete strength failure) of the base paper sample.

5 The coating strength was then evaluated by measuring the distance between: the initial inking position, and the initial picking position on the coated paper sample, which was tested at a specific print speed, using a specific tack rated ink. Dry picks for the coated paper samples were measured with an IGT Printability Tester model 10 A1C2-5, using a 15 $\mu$ m Westvaco Wheel, Westvaco Applicator Rod and IGT Tack Rated Black Printing Inks.

### Caliper

15 The thickness of paper, or the "caliper" as it is sometimes called, is a fundamental property of paper and is often specified when paper is manufactured and sold. As used herein, the "caliper" refers to the perpendicular distance between the two primary surfaces (i.e., the thickness) of the paper or paperboard under specified conditions. In the United States the customary unit of thickness is called the "point", which is a thousandth of an inch. However, the caliper can also be defined in 20 millimeters (mm).

A TMI Model 49-70 Micrometers (Testing Machines, Inc., Ronkonkoma, NY) was used for measuring the caliper of the paper samples provided in the Examples section. The instrument consists of a heavy, solid frame which supports the unit and houses the thickness measurement transducer and associated circuitry. The 25 instrument meets specifications of TAPPI T411. Caliper readings are taken according to TAPPI T411.

### Gloss

30 Paper gloss was measured using a Technidyne Glossmeter model T 480A at an incident angle of 75°. Gloss was measured by measuring multiple sites on a coated paper sample to generate a composite reading of 2 measurements at each of 5 positions in a straight line across each coated paper sample (i.e. far left, left of center,

center, right of center, far right). Gloss number reported is an average of the 10 readings.

#### Coat Weight Measurement

5 Coat weights were determined by subtracting the mass of a coated paper sample from an uncoated paper sample after the coated paper sample had been dried in a Hot Air oven for 10 minutes at 130 – 140 °C. Specimen samples were cut from 12 sheets with a 100 cm<sup>2</sup> cutting die for the base paper and for each coating run. Coat weight number reported is an average of 12 samples.

10

#### Stiffness

Stiffness was tested with a Gurley Stiffness tester according to the Instructions for Gurley Stiffness Tester No. 4171. Each test was replicated a total of 6 times.

15 Smoothness

All smoothness testing was done using the print surface apparatus as described in TAPPI test method T-555. Testing was done both with the 0.5 and 1.0 kg loading on 10 or more sheets per sample of the coated paper after conditioning the coated paper in an atmosphere of 50% ± 2.0% RH and 23° ± 1.0°C for 24h, and testing the 20 paper in the same atmosphere. Smoothness number reported is an average of 10 measurements.

#### Formulations

The following materials were used in the coatings formulations:

25 Carbonate (A): dry calcium carbonate with particle size of 60% < 2 microns in water (Hydrocarb 60 available from Omya, Inc, Proctor Vermont, USA).

Carbonate (B): dry calcium carbonate with particle size of 90% < 2 microns in water (Hydrocarb 90 available from Omya, Inc, Proctor Vermont, USA).

30 Hollow Polymeric Pigment (A): HS 3020 available from The Dow Chemical Company, Midland Michigan, USA, 26% solids in water.

Hollow Polymeric Pigment (B): UCARHIDE 4001 available from The Dow Chemical Company, Midland Michigan, USA, 30.5% solids in water.

Hollow Polymeric Pigment (C): UCARHIDE 98 available from The Dow Chemical Company, Midland, Michigan, USA, 37% solids in water.

Latex (A): carboxylated styrene butadiene latex (CP 615NA available from The Dow Chemical Company, Midland Michigan, USA), 50% solids in water.

5 Latex (B): carboxylated styrene butadiene latex (CP 692NA available from The Dow Chemical Company, Midland Michigan, USA), 50% solids in water.

Latex (C): carboxylated styrene butadiene latex (CP 638NA available from The Dow Chemical Company, Midland Michigan, USA), 50% solids in water.

10 Latex (D): carboxylated styrene butadiene latex (PB 6840 available from The Dow Chemical Company, Midland Michigan, USA), 49% solids in water.

Latex (E): carboxylated styrene acrylate latex (RAP 800NA available from The Dow Chemical Company, Midland Michigan, USA), 50% in water.

Latex (F): carboxylated styrene butadiene latex (XU31398 available from The Dow Chemical Company, Midland Michigan, USA).

15 Clay (A): US No. 1 dry kaolin clay (Hydrofine available from J.M. Huber Company, Macon Georgia, USA).

Clay (B): US No. 1 dry kaolin clay with particle size of 90 % < 2 microns in water (Hydrafine 90 available from J.M. Huber Co., Macon Georgia, USA).

20 Clay (C): dry calcined clay (Ansilex 93 available from Engelhard Company, Sandersville Georgia, USA).

TiO<sub>2</sub>: titanium dioxide – Rutile (Ti-PURE RPS Vantage Slurry (68-71% solid) available from DuPont Company, Wilmington Delaware).

Starch: ethylated corn starch (Penford Gum PG290 available from Penford Products Co, Cedar Rapids IA).

25 The above ingredients were mixed sequentially in amounts given in Tables 1 to 5 to obtain the coating formulations used to coat the base paper sheets. The pH of the coating formulations is adjusted to 8.5 by adding NaOH solution (10 weight percent) after all ingredients are mixed. Water is added as needed to adjust the solids content of the formulations and the coating formulations are filtered through a 100 micron, polyamide filter before use.

Base Paper

Paper composed of fibers, with or without fillers and other additives, that make the resulting product suitable for a specified end use can be used as the base paper or paperboard for the embodiments of the present disclosure. Base paper is typically classified according to the type of pulp used to manufacture the paper and basis weight. The following materials were used as base paper in the examples:

5 Base Paper A: 38 pound light weight uncoated grade base paper available from SAPPI Fine Papers, Muskegon MI.

10 Base Paper B: base paper for 80 lb. text available from Appleton Coated, Combined Locks WI.

Base Paper C: base paper for 100 lb. text available from Appleton Coated, Combined Locks WI.

Base Paper D: base paper for 100 lb. cover available from Appleton Coated, Combined Locks WI.

15 Base Paper E: SBS 14pt paperboard available from Potlatch Corporation, Lewiston ID.

Base Paper F: StoraEnso 38 pound light weight coated grade base paper available from NewPage Corporation, Miamisburg OH.

20

Coating Procedure

A Laboratory scale coater ("Lab Coater", manufactured by Enz Technick, AG) is used to apply coating formulation to paper. All samples are coated to the desired coat weight using the blade metering application with a bent blade assembly. The 25 coating is dried through a combination of IR dryers and an air flotation dryer to avoid blocking. Alternatively, the coating formulations are applied to the paper with a pilot scale coater ("Pilot Coater"). The Pilot Coater apparatus is either a BELOIT - Short Dwell Head or a BELOIT - Pre-Metered Size Press with a rod for metering coat weight. The coating is dried through a combination of IR dryers and air flotation 30 dryers.

Calendering

Coated paper samples are calendered using a Beloit Wheeler Model 753 Laboratory Calender ("Lab Calender"). Each sheet is passed, coated side against steel, between the two rolls. Calender pressure and temperature are set according the 5 conditions listed in Tables 1-5. Each sheet is calendered through a total of 3 nips. Pilot coater prepared samples are calendered on a VALMET - Super Calender according to conditions listed in Tables 1- 5.

## EXAMPLE 1

10

Table 1

	Control 1	Sample 1
Formulation	75 parts Clay A per 100 weight parts total pigment 15 parts Clay C per 100 weight parts total pigment 10 parts TiO <sub>2</sub> per 100 weight parts total pigment 8 parts Starch 7 parts Latex (B)	45 parts Hollow Polymeric Pigment (A) per 100 weight parts total pigment 55 parts Clay A per 100 weight parts total pigment 8 Parts Starch 7 Parts Latex (A)
Solids Content (%)	56.7	41.2
Coater	Pilot Coater with Metered Size Press	Pilot Coater with Metered Size Press
Coat weight, (g/m <sup>2</sup> )	8.6	4.7
Calendering Conditions	140 kN/m, 65.6 °C	105 kN/m, 65.6 °C
Calender	Super Calender	Super Calender
Sheet Gloss	50.1	87.5
Smoothness (PPS-S10)	1.58	1.11
Gurley MD Stiffness (Gurley units)	18.9	23.2
IGT Dry Pick Strength (ft/min)	234	356
Paper	Base Paper A	Base Paper A

Control 1 and Sample 1 compare one embodiment of the coating composition of the disclosure to a conventional formulation used in lightweight coated paper. As shown in Table 1, Sample 1 has a coat weight of 4.7 g/m<sup>2</sup>, while the Control has a 15 coat weight of 8.6 g/m<sup>2</sup>. However, even though the coat weight is approximately half that for Sample 1, the paper coated with the coating composition of Sample 1 provides higher stiffness as compared to the Control. In addition, at lower calendering pressure, the embodiment of the coating composition of Sample 1 provides better pick strength, higher gloss, and improved smoothness as compared to 20 Control 1.

Table 2

	Control 2	Sample 2
Formulation	50 parts Clay (A) per 100 weight parts total pigment 50 parts Carbonate (B) per 100 weight parts total pigment 15 parts Latex (C)	45 parts Hollow Polymeric Pigment (A) per 100 weight parts total pigment 55 parts Carbonate (A) per 100 weight parts total pigment 12 parts Latex (C)
Solids Content (%)	63.0	43.0
Coater	Lab Coater	Lab Coater
Coat weight, (g/m <sup>2</sup> )	13.6	9
Calendering conditions	140 kN/m, 65.6 °C	140 kN/m, 65.6 °C
Calender	Lab Calender	Lab Calender
Sheet Gloss	65.8	89.8
Smoothness (PPS-H5)	1.93	1.32
Smoothness (PPS-S10)	1.02	0.44
Paper	Base Paper B	Base Paper B

Control 2 and Sample 2 compare one embodiment of the coating composition of the disclosure to a control formulation at the same calendering temperature. The

5 paper formed from the Sample 2 coating composition results in improved gloss and smoothness over Control 2 when the calendering conditions are constant.

Table 3

	Control 3	Sample 4
Formulation	50 parts Clay (A) per 100 weight parts total pigment 50 parts Carbonate (B) per 100 weight parts total pigment 15 parts Latex (A)	45 parts Hollow Polymeric Pigment (A) per 100 weight parts total pigment 55 parts Carbonate (A) per 100 weight parts total pigment 5 parts Latex (A)
Coater	Lab Coater	Lab Coater
Coat weight, (g/m <sup>2</sup> )	12.6	9
Calendering conditions	140 kN/m, 65.6 °C	140 kN/m, 65.6 °C
Calender	Lab Calender	Lab Calender
Gloss	78.6	101.8
Smoothness (PPS-H5)	1.01	0.43
Smoothness (PPS-S10)	0.88	0.38
Stiffness (Gurley units)	46.2	44.8
Paper	Base Paper C	Base Paper C

10 Control 3 and Sample 4 compare a conventional coating formulation to one embodiment of the coating composition of the disclosure for a coated free paper

application. Sample 4 shows the ability simultaneously obtain a high gloss and smoothness while maintaining high stiffness values for the coated paper.

Table 4

Formulation	Sample 5		Sample 6
	45 parts Hollow Polymeric Pigment (A) per 100 weight parts total pigment 55 parts Carbonate B per 100 weight parts total pigment 10 parts Latex (A)		(A) per 100 weight parts total pigment 55 parts Carbonate A per 100 weight parts total pigment 10 parts Latex (A)
Coater	Lab Coater		Lab Coater
Coat weight, (g/m <sup>2</sup> )	8.7		8.9
Calendering conditions	105 kN/m, 48.9 °C		105 kN/m, 48.9 °C
Calender	Lab Calender		Lab Calender
Gloss	89.8		92.5
Smoothness (PPS-H5)	1.74		1.59
Smoothness (PPS-S10)	1.33		1.23
Stiffness, (average Gurley unit)	285		259
IGT, mm to pick Paper	123		135
	Base Paper D		Base Paper D

5

Samples 5 and 6 show the unexpected results for paper coated with formulation containing Carbonate A which resulted in better gloss, smoothness, and pick strength than paper coated with a formulation containing Carbonate B.

10

## EXAMPLE 2

Table 5 shows the results for paper coated with a range of formulations and calendered under a range of conditions. For Base Paper (E), the Pilot Coater and the Super Calender are used, for Base Paper (A), the Lab Coater and Lab Calender are used to prepare the coated paper samples.

15

Table 5

Base Paper	Coat Wt. g/m <sup>2</sup>	Formulation Type	Calendering Conditions (pressure, temperature)	Com- posite Stiffness (Gurley Units)	Smooth -ness (PPS- S10)	Basis Wt. (g/m <sup>2</sup> )	Stiff- ness Factor
E	3.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Latex D	175 Kn/m 26.7 °C	4078.45	0.82	245.7	20.342

E	3.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Latex D	376.3 kN/m 26.7 °C	3247.3	1.02	245.7	12.945
E	3.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Latex D	376.3 kN/m 65.6 °C	3286.2	0.90	245.7	14.861
E	3.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Latex D	175 kN/m 101.7 °C	3854.6	0.90	245.7	17.393
E	3.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Latex D	376.3 kN/m 101.7 °C	3069.55	1.11	245.7	11.286
E	3.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Latex D	175 kN/m 121.1 °C	3850.9	0.93	245.7	16.817
E	3.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Latex D	376.3 kN/m 121.1 °C	2897.4	0.95	245.7	12.466
A	4.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Starch, 7 parts Latex A	35 kN/m 148.9 °C	19.4	0.65	41.0	0.728
A	4.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Starch, 7 parts Latex A	105 kN/m 148.9 °C	20.9	0.54	41.0	0.944
A	4.7	45 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Starch, 7 parts Latex A	140 kN/m 148.9 °C	21.8	0.54	41.0	0.985
A	4.1	35 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Starch, 7 parts Latex A	35 kN/m 148.9 °C	21	0.86	41.0	0.596
A	4.1	35 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Starch, 7 parts Latex A	105 kN/m 148.9 °C	21.9	0.62	41.0	0.862
A	4.1	35 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Starch, 7 parts Latex A	140 kN/m 148.9 °C	20	0.59	41.0	0.827
A	4.4	25 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Starch, 7 parts Latex A	105 kN/m 148.9 °C	14.5	0.61	41.0	0.580

A	4.4	25 Parts Hollow Polymeric Pigment A, 55 parts Carbonate A, 8 parts Starch, 7 parts Latex A	140 Kn/m 148.9 °C	17.4	0.58	41.0	0.732
A	8.6	Control Coating 75 parts Clay A, 15 parts Clay C, 10 parts TiO <sub>2</sub> , 8 Starch, 7 Latex B	140 Kn/m 65.6 °C	18.9	1.58	44.0	0.272

As can be seen from Table 5, the stiffness factor is improved when formulations containing greater than 25 parts hollow pigment per 100 weight parts total pigment are used to produce the coated paper samples. In addition, each sample 5 prepared has an improved smoothness value as compared to the Control coating.

### EXAMPLE 3

Table 6 shows smoothness values for paper coated with a range of 10 formulations where the level of hollow polymeric particles is increased. The formulations are coated onto Base Paper B, using the Lab Coater and Lab Calendar at 200 pounds per lineal inch (PLI) and 150 °F (65.55 °C).

Table 6

Formulation Type	Smooth-ness (PPS-S10)	Coat Weight, GSM
25 Parts Hollow Polymeric Pigment A 75 parts clay A, 7 parts Latex A 8 parts starch, 56.7% solids	1.45	4.4
35 Parts Hollow Polymeric Pigment A 65 parts Clay A, 7 parts A, 8 parts starch, 56.7 % solids	1.55	4.1
45 Parts Hollow Polymeric Pigment A 55 parts Clay A, 7 parts Latex A, 8 parts starch, 56.7 % solids	1.21	4.7

15 As can be seen from Table 6, the smoothness value of the paper coated with coating compositions including hollow polymeric pigments appears to show a trend of increasing, or getting less smooth, as the level of hollow polymeric pigments in the compositions is increased. However, once the level of hollow polymeric pigments is increased past 35 parts by weight based on total weight of the composition, the 20 smoothness value decreases. In other words, the paper coated with the coating composition has better smoothness once the level of hollow polymeric pigments is increased past 35 parts by weight, based on total weight of the composition.

## EXAMPLE 4

Example 4 compares coating compositions containing two different sized hollow polymeric pigment particles in Samples 12-15 to a conventional formulation used in light weight coated paper, designated as Control 5. This study involves incorporating different levels of a second, smaller polymeric pigment with a first, larger polymeric pigment. In this Example, each sample is prepared and tested at three different calendering pressures. Therefore, Control 5 has a measured value of a property (e.g., gloss) at calendering pressures of 200 PLI, 600 PLI, and 1000 PLI.

Further, the coating compositions including two different sized hollow polymeric pigments particles are separated into groups where the ratio of larger polymeric pigment to smaller polymeric pigment is 25/75, 50/50, and 75/25. Each sample is also then calendered at three different pressures. Table 7 presents the formulations and testing conditions of the samples. Table 8 presents the sheet gloss and smoothness values obtained for each Sample.

Table 7

	Control 5	Sample 12	Sample 13	Sample 14	Sample 15
Formulation	50 parts Clay (A) per 100 weight parts total pigment	45 parts Hollow Polymeric Pigment (A) per 100 weight parts total pigment	33.75 parts Hollow Polymeric Pigment (A) per 100 weight parts total pigment	22.5 parts Hollow Polymeric Pigment (A) per 100 weight parts total pigment	11.25 parts Hollow Polymeric Pigment (A) per 100 weight parts total pigment
	50 parts Carbonate (B) per 100 weight parts total pigment	55 parts Carbonate (A) per 100 weight parts total pigment	11.25 parts Hollow Polymeric Pigment (B) per 100 weight parts total pigment	22.5 parts Hollow Polymeric Pigment (B) per 100 weight parts total pigment	33.75 parts Hollow Polymeric Pigment (B) per 100 weight parts total pigment
	15 parts Latex (C)	12 parts Latex (C)	Carbonate (A) per 100 weight parts total pigment	Carbonate (A) per 100 weight parts total pigment	Carbonate (A) per 100 weight parts total pigment
Calendering Conditions (3 nips)	150 °F	150 °F	150 °F	150 °F	150 °F
Coat weights (lb/3300 sq. ft.):	12.43	5.98	6.01	6.29	6.27

Calender Coating Solids (%)	Lab 65	Lab 37	Lab 37	Lab 37	Lab 37
Paper	Base Paper F				

Table 8

Pounds per Lineal Inch (PLI)		Control 5	Sample 12	Sample 13	Sample 14	Sample 15
Sheet Gloss (75°)	200	48.28	85.39	84.37	82.23	79.89
	600	58.34	90.12	91.05	90.03	89.65
	1000	62.71	91.39	93.46	92.38	91.74
Smoothness (PPS-S10)	200	1.81	0.84	0.74	0.69	0.79
	600	1.43	0.56	0.63	0.60	0.59
	1000	1.24	0.55	0.52	0.51	0.5

5 As shown in Table 8, the addition of two different sized hollow polymeric particles to the coating composition can enhance desired properties of the coating. For example, the roughness can decrease while the gloss can increase. However, the addition of two different sized hollow polymeric particles to the coating composition does not result in a linear increase or decrease in properties when a second, smaller sized hollow polymeric pigment  
10 particle is added in increasing amounts. For example, at a calendering pressure of 600, the roughness changes from 0.56 for the 100/0 composition to 0.63 for the 50/50 composition and finally to 0.60 for the 75/25 composition.

#### EXAMPLE 5

15 In Example 5, Samples 16 and 17 compare coating compositions using two hollow polymeric pigment systems (major hollow polymeric pigment at 33.75 parts, minor hollow polymeric pigment at 11.25 parts per 100 parts total pigment) where there is a particle size difference between the major and minor hollow polymeric pigments. The coating is done using the Lab Coater, and calendered using the Lab Calender. Table 9 shows the  
20 compositions and preparation of the samples, as well as the smoothness and gloss results for the final coated paper samples.

Table 9

Coating Description	Sample 16	Sample 17
Formulation Pigments (all based on 100 parts total pigment)	33.75 parts Hollow Polymeric Pigment (A), 11.25 parts Hollow Polymeric Pigment (B), 10 parts Carbonate (A), 45 parts clay (B)	33.75 parts Hollow Polymeric Pigment (C), 11.25 parts Hollow Polymeric Pigment (B), 10 parts Carbonate (A), 45 parts clay (B)
Particle Size of Major Hollow Polymeric Pigment	Hollow Polymeric Pigment (A) Particle Size	Hollow Polymeric Particle (C) Particle Size
Formulation Binders (all based on 100 parts total pigment)	3 parts starch (A), 3 parts latex (E), 6.5 parts latex (F)	3 parts starch (A), 3 parts latex (E), 6.5 parts latex (F)
Coating Solids	36%	36%
Paper	Base paper A	Base paper A
Coat weight, (g/m <sup>2</sup> )	3.5	3.5
Calender	Lab Calender	Lab Calender
Calendering Conditions	140 kN/m, 65.6 °C (600 PLI, 150 F)	140 kN/m, 65.6 °C (600 PLI, 150 F)
Smoothness (PPS10)	1.39	1.47
Sheet Gloss	84.5	69.3

As can be seen from Table 9, a change in the particle size of the major hollow polymeric pigment component, Hollow Polymeric Pigments (A) and (C), respectively,

5 achieves the unexpected result of an equivalent smoothness with a 15 point lower gloss. In addition, this result is achieved using the same formulation and calendering conditions.

Claims

What is claimed is:

1. A coated paper or paperboard, comprising:
  - a base paper having a first major surface and a second major surface opposite the first major surface;
  - a coating over at least one of the first and second major surfaces formed from a coating formulation having:
    - a binder; and
    - from about 25 parts to about 65 parts of a hollow polymeric pigment per 100 weight parts total pigment, with the remainder of the 100 parts of pigment being other pigments; and
    - a smoothness of the coating of less than 1.65 PPS-H5.
2. The coated paper or paperboard of claim 1, where the coated paper or paperboard has a stiffness factor of at least about  $0.5 \text{ Gurley}/((\text{PPS-S10})(\text{g}/\text{m}^2))$  calculated from a composite stiffness divided by a multiplied product of the smoothness of the coating and a basis weight of the base paper.
3. The coated paper or paperboard of claim 1, where the coated paper or paperboard has a bulk factor of at least about  $1 \text{ mm}/(\text{g}/\text{m}^2)$ .
4. The coated paper or paperboard of claim 1, where the hollow polymeric pigment has an amount in a range of about 30 parts to about 50 parts per 100 weight parts total pigment.
5. The coated paper or paperboard of claim 1, where at least 50 percent of the hollow polymeric pigment is deformed relative to a non-deformed hollow polymeric pigment of the coating.
6. The coated paper or paperboard of claim 5, where the base paper of the coated paper has a thickness that remains substantially unchanged relative to an original thickness of the base paper prior to receiving the coating.

7. The coated paper or paperboard of claim 5, where the base paper of the coated paper has a thickness that changed no more than about 10 percent relative to an original thickness of the base paper prior to receiving the coating.
8. The coated paper or paperboard of claim 1, where the hollow polymeric pigment of the coating forms clusters of a plurality of discrete hollow polymeric pigments, each of the clusters having a volume median diameter, measured by hydrodynamic chromatography, greater than about 1 micron.
9. The coated paper or paperboard of claim 1, further including a base coat between the base paper and the coating.
10. A method of producing a coated paper or paperboard, comprising:  
coating at least one side of a base paper with a coating composition, where the coating composition includes:  
a binder; and  
from about 25 parts to about 65 parts of a hollow polymeric pigment per 100 weight parts total pigment, with the remainder of the 100 parts of pigment being other pigments; and  
calendering the coating composition on the base paper to produce a smoothness of the coating on the base paper of less than 1.65 PPS-H5.
11. The method of claim 10, where coating the base paper produces a coating thickness on the base paper, and passing the coating composition on the base paper through the calendering device includes compressing the coating composition to reduce the coating thickness by at least 20 percent.
12. The method of claim 11, where compressing the coating composition includes uniformly compressing the coating composition throughout the coating thickness.
13. The method of claim 11, where the base paper has an original thickness before processing the coating composition on the base paper, where passing the coating

composition on the base paper through the calendering device includes compressing the original thickness of the base paper no more than about 10 percent relative the original thickness.

14. The method of claim 11, where the base paper has an original thickness before processing the coating composition on the base paper, where passing the coating composition on the base paper through the calendering device includes maintaining the original thickness of the base paper.

15. The method of claim 10, where processing the coating composition on the base paper includes deforming at least 50 percent of the hollow polymeric pigment.

16. The method of claim 10, where coating at least one side of the base paper with the coating composition includes applying a single layer of the coating composition at a coating weight of about 0.5 to about 20 grams per square meter.

17. The method of claim 10, where calendering the coating composition on the base paper produces a stiffness factor of at least about 0.5 Gurley/((PPS-S10)(g/m<sup>2</sup>)).

18. The method of claim 10, where calendering the coating composition on the base paper produces a bulk factor of at least about 1 mm/(g/m<sup>2</sup>).

19. A paper coating composition, comprising:  
a binder;  
a first hollow polymeric pigment having a volume median diameter measured by hydrodynamic chromatography of a first predetermined value; and  
a second hollow polymeric pigment having a volume median diameter measured by hydrodynamic chromatography of a second predetermined value that is at least twenty-five percent smaller than the first predetermined value.

20. The paper coating composition of claim 19, where the paper coating composition includes about 9 parts to about 30 parts per 100 weight parts total hollow polymeric pigment of the second hollow polymeric pigment.

21. The paper coating composition of claim 19, where the volume median diameter of the second hollow polymeric pigment is at least 50 percent smaller than the volume median diameter of the first hollow polymeric pigment.
22. The paper coating composition of claim 19, where the volume median diameters of the first hollow polymeric pigment and the second hollow polymeric pigment are in a range from about 300 nanometers to about 1,100 nanometers.
23. The paper coating composition of claim 19, where the first hollow polymeric pigment and the second hollow polymeric pigment provide from about 20 parts to about 30 percent weight hollow particles.
24. The paper coating composition of claim 23, where the first hollow polymeric pigment and the second hollow polymeric pigment can achieve a series of contiguous hollow polymeric pigments that extend through a thickness of a coating formed with the coating composition.
25. The paper coating composition of claim 19, where the first hollow polymeric pigment has a void volume of about 40 to about 60 percent.
26. A paper or paperboard having a coating formed from the paper coating composition of claim 19.
27. A coated paper or paperboard, comprising:
  - a base paper having a first major surface and a second major surface opposite the first major surface;
  - a coating over at least one of the first and second major surfaces formed from a coating formulation having:
    - a binder;
    - a first hollow polymeric pigment having a volume median diameter measured by hydrodynamic chromatography of a first predetermined value;
    - and

a second hollow polymeric pigment having the volume median diameter measured by hydrodynamic chromatography of a second predetermined value that is at least twenty-five percent smaller than the first predetermined value.

28. The coated paper or paperboard of claim 27, where the coating over at least one of the first and second major surfaces includes less than about 30 parts per 100 weight parts of total solids of the paper coating composition of the first hollow polymeric pigment and the second hollow polymeric pigment.
29. The coated paper or paperboard of claim 27, where the coating over at least one of the first and second major surfaces has a smoothness of less than about 1.65 PPS-H5.
30. The coated paper or paperboard of claim 27, where the coating contains the second hollow polymeric pigment in about 15 parts to about 30 parts per 100 weight parts total hollow pigment.
31. The coated paper or paperboard of claim 30, where at least 50 percent of the total hollow pigment is deformed relative to a non-deformed hollow polymeric pigment of the coating.
32. The coated paper or paperboard of claim 31, where the base paper of the coated paper has a thickness that remains substantially unchanged relative an original thickness of the base paper prior to receiving the coating.
33. The coated paper or paperboard of claim 31, where the base paper of the coated paper has a thickness that changed no more than about 10 percent relative an original thickness of the base paper prior to receiving the coating.
34. A method of forming a paper coating composition, comprising:  
selecting a first hollow polymeric pigment having individual particles with a first dimensional quantity;

selecting a second hollow polymeric pigment having individual particles with a second dimensional quantity based on the first dimensional quantity of the first hollow polymeric pigment;

blending the first hollow polymeric pigment and the second hollow polymeric pigment; and

blending a binder with the first hollow polymeric pigment and the second hollow polymeric pigment.

35. The method of claim 34, where selecting a second hollow polymeric pigment includes selecting the second hollow polymeric pigment having individual particles with the second dimensional quantity that is at least twenty-five percent smaller than the first dimensional quantity of the first hollow polymeric pigment.

36. The method of claim 34, where selecting a second hollow polymeric pigment includes selecting the second hollow polymeric pigment having individual particles with the second dimensional quantity that is at least fifty percent smaller than the first dimensional quantity of the first hollow polymeric pigment.

37. The method of claim 34, where blending the first hollow polymeric pigment and the second hollow polymeric pigment includes blending the second hollow polymeric pigment at about 15 parts to about 30 parts per 100 weight parts total hollow polymeric pigment of the paper coating composition.

38. The method of claim 34, that includes adjusting a characteristic of a coating formed with the paper coating composition based on the selection of the second hollow polymeric pigment, where the characteristic of the coating is selected from the group of smoothness, gloss, opacity, porosity, and combinations thereof.

39. The method of claim 34, where blending the first hollow polymeric pigment and the second hollow polymeric pigment provide less than about 30 parts per 100 weight parts of pigments of the paper coating composition.

40. The method of claim 34, including determining a ratio of the first hollow polymeric pigment to the second hollow polymeric pigment in the coating composition that allows for a packing of the particles that can achieve a series of contiguous hollow particles that extend through a thickness of the coating.

41. The method of claim 34, where selecting a first hollow polymeric pigment achieves a predetermined smoothness and gloss of a coating formed with the paper coating composition; and

selecting a second hollow polymeric pigment modifies an opacity of the coating formed with the paper coating composition, while maintaining the smoothness and gloss of the coating.

42. A coated paper or paperboard, comprising:

a base paper having a first major surface and a second major surface opposite the first major surface;

a coating over at least one of the first and second major surfaces formed from a coating formulation having:

a binder; and

from about 25 parts to about 65 parts of a hollow polymeric pigment per 100 weight parts total pigment, with the remainder of the 100 parts of pigment being other pigments; and

a smoothness of the coating of less than 1.2 PPS-H10.

43. The coated paper or paperboard of claim 42, where the hollow polymeric pigment has an amount in a range of about 30 parts to about 50 parts per 100 weight parts total pigment.

44. The coated paper or paperboard of claim 42, where at least 50 percent of the hollow polymeric pigment is deformed relative to a non-deformed hollow polymeric pigment of the coating.

45. The coated paper or paperboard of claim 44, where the base paper of the coated paper has a thickness that remains substantially unchanged relative to an original thickness of the base paper prior to receiving the coating.

46. The coated paper or paperboard of claim 44, where the base paper of the coated paper has a thickness that changed no more than about 10 percent relative to an original thickness of the base paper prior to receiving the coating.

1/4

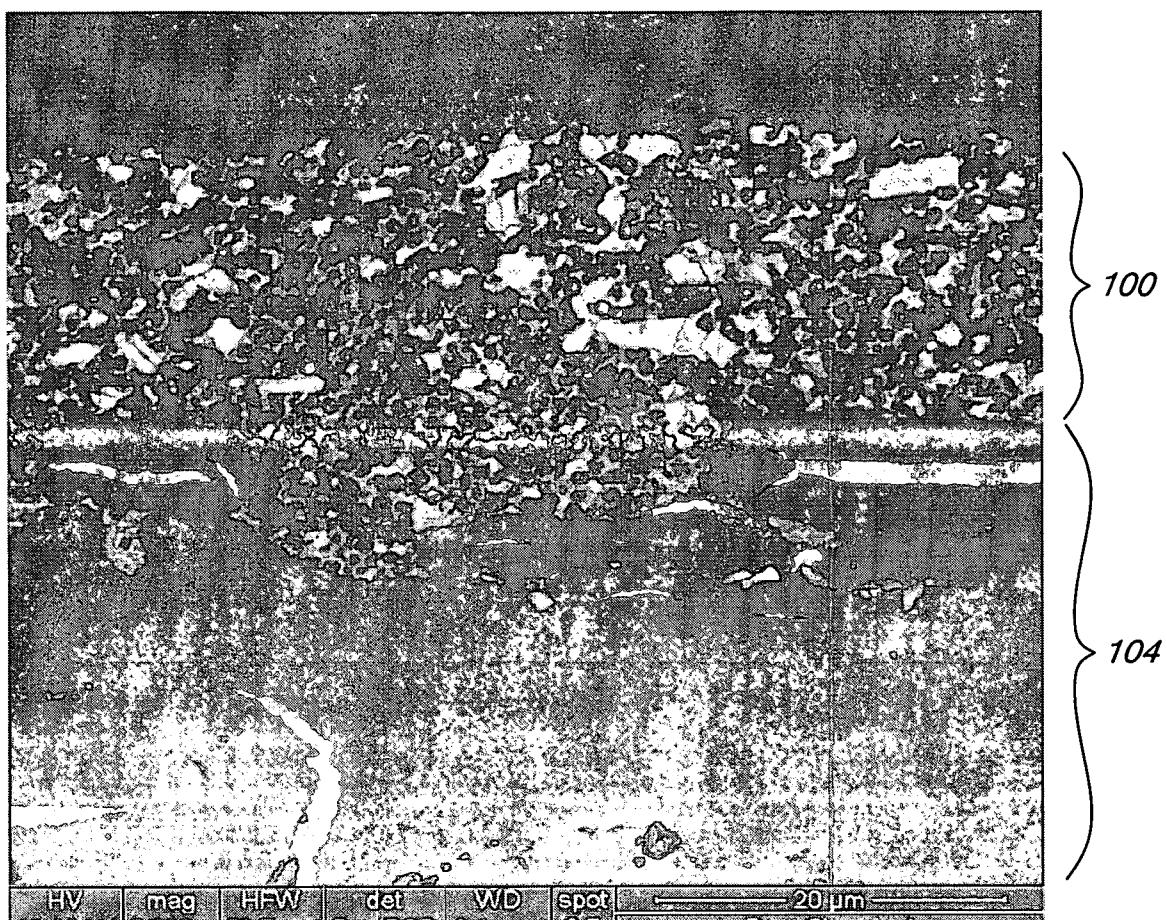


Fig. 1A

2/4



*Fig. 1B*

3/4

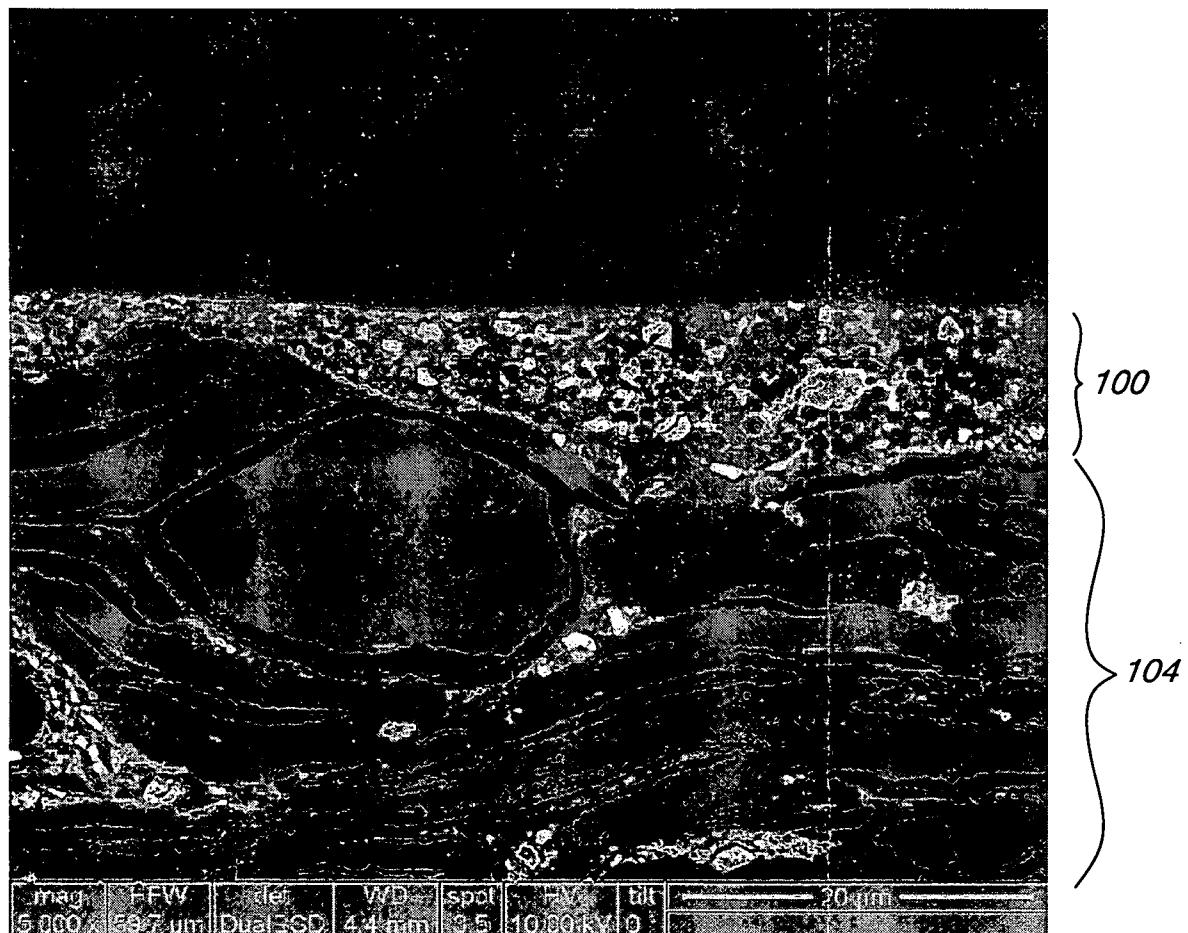


Fig. 1C

4/4



*Fig. 1D*

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2008/005038

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. D21H21/54

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 630 289 A (ROHM & HAAS [US]) 1 March 2006 (2006-03-01) claims 1-12; examples 2-7	1-5,10, 42
X	US 6 531 183 B1 (CASON DAVID B [US] ET AL) 11 March 2003 (2003-03-11) paragraph [0037]; claims 1-13; example 2	1-5,10, 42
X	US 5 342 649 A (SAROKIN STEVEN D [US]) 30 August 1994 (1994-08-30) claims 1-11	1-5,10, 27,34,42
X	WO 03/002330 A (ARJO WIGGINS FINE PAPERS LTD [GB]; WATSON MARK VICTOR [GB]; SINCLAIR P) 9 January 2003 (2003-01-09) claims 1,6,9,20,25	1,10,42
		-/-

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*& document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

29 September 2008

07/10/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Karlsson, Lennart

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2008/005038

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 139 961 A (BLANKENSHIP ROBERT MITCHELL [US] ET AL) 31 October 2000 (2000-10-31) claims 1-6; example 6 -----	1,10,42
X	EP 1 197 503 A (ROHM & HAAS [US]) 17 April 2002 (2002-04-17) paragraphs [0058] - [0062]; claims 1-4 -----	1,10,42
A	EP 1 602 783 A (ROHM & HAAS [US]) 7 December 2005 (2005-12-07) the whole document -----	1-46

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No  
PCT/US2008/005038

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP 1630289	A 01-03-2006	CN JP	1740441 A 2006063509 A	01-03-2006 09-03-2006
US 6531183	B1 11-03-2003	NONE		
US 5342649	A 30-08-1994	NONE		
WO 03002330	A 09-01-2003	CA CN EP JP US ZA	2451557 A1 1525908 A 1406755 A1 2004533922 T 2007116943 A1 200309897 A	09-01-2003 01-09-2004 14-04-2004 11-11-2004 24-05-2007 17-01-2005
US 6139961	A 31-10-2000	NONE		
EP 1197503	A 17-04-2002	BR CN JP	0104527 A 1347926 A 2002194011 A	21-05-2002 08-05-2002 10-07-2002
EP 1602783	A 07-12-2005	NONE		