



US011185124B2

(12) **United States Patent**  
**Lemons**

(10) **Patent No.:** **US 11,185,124 B2**

(45) **Date of Patent:** **Nov. 30, 2021**

(54) **CHANNELED SHOE SOLE SYSTEM**

(56) **References Cited**

(71) Applicant: **Nicholas Lemons**, Brooklyn, NY (US)

U.S. PATENT DOCUMENTS

(72) Inventor: **Nicholas Lemons**, Brooklyn, NY (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

2,495,984	A *	1/1950	Roy	.....	A43B 5/08	36/15
3,455,037	A *	7/1969	Vlas	.....	A43B 3/126	36/11.5
5,184,378	A	2/1993	Batra	.....		
6,052,921	A	4/2000	Oreck	.....		
6,128,834	A *	10/2000	Vecchiola	.....	A43B 3/101	36/11.5
6,286,233	B1 *	9/2001	Gaither	.....	A43C 1/00	36/50.1
6,499,234	B2 *	12/2002	Manzi	.....	A43B 3/122	36/100
7,287,342	B2 *	10/2007	Keen	.....	A43B 3/22	36/50.1
7,343,701	B2 *	3/2008	Pare	.....	A43C 1/06	36/50.1
7,703,220	B2 *	4/2010	Aveni	.....	A43B 1/04	36/45
8,844,167	B2 *	9/2014	Greene	.....	A43B 13/125	36/45
8,881,430	B2 *	11/2014	Seamarks	.....	D04B 1/22	36/45
9,049,902	B2 *	6/2015	Baker	.....	A43C 11/1493	
9,220,318	B2 *	12/2015	James	.....	A43C 11/002	
9,545,128	B2 *	1/2017	Podhajny	.....	A43B 1/04	
2004/0181972	A1 *	9/2004	Csorba	.....	A43C 11/14	36/50.1

(21) Appl. No.: **17/067,665**

(22) Filed: **Oct. 10, 2020**

(65) **Prior Publication Data**

US 2021/0059350 A1 Mar. 4, 2021

**Related U.S. Application Data**

(63) Continuation of application No. 16/926,081, filed on Jul. 10, 2020, which is a continuation of application No. PCT/US2020/039320, filed on Jun. 24, 2020.

(60) Provisional application No. 62/838,166, filed on Apr. 24, 2019.

(51) **Int. Cl.**

*A43B 13/14* (2006.01)  
*A43C 5/00* (2006.01)  
*A43C 1/00* (2006.01)

(52) **U.S. Cl.**

CPC ..... *A43B 13/14* (2013.01); *A43C 1/006* (2013.01); *A43C 5/00* (2013.01)

(58) **Field of Classification Search**

CPC ..... A43C 1/00  
See application file for complete search history.

(Continued)

*Primary Examiner* — Jila M Mohandesi


(74) *Attorney, Agent, or Firm* — Charles Runyan; Runyan Law

(57)

**ABSTRACT**

Shoe soles with channels for receiving shoelaces or other tightening devices. The channels penetrate through the sole crossing the lateral direction (long length of the foot). Variation of the lacing pattern provides for many different aesthetic or functional arrangements. Some versions have tubes in or on the walls of the upper of the shoe. These can shield the laces from view, abrasion, etc.

**16 Claims, 8 Drawing Sheets**

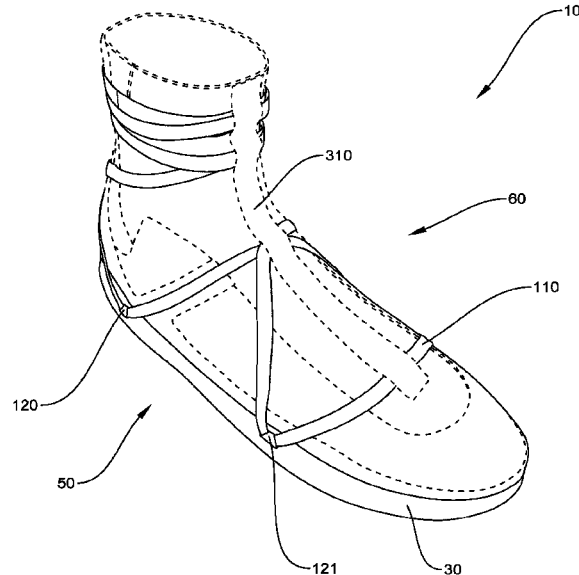

(56)

**References Cited**

U.S. PATENT DOCUMENTS

2004/0226190 A1 11/2004 Elkington et al.  
2005/0055844 A1 3/2005 Yu

\* cited by examiner

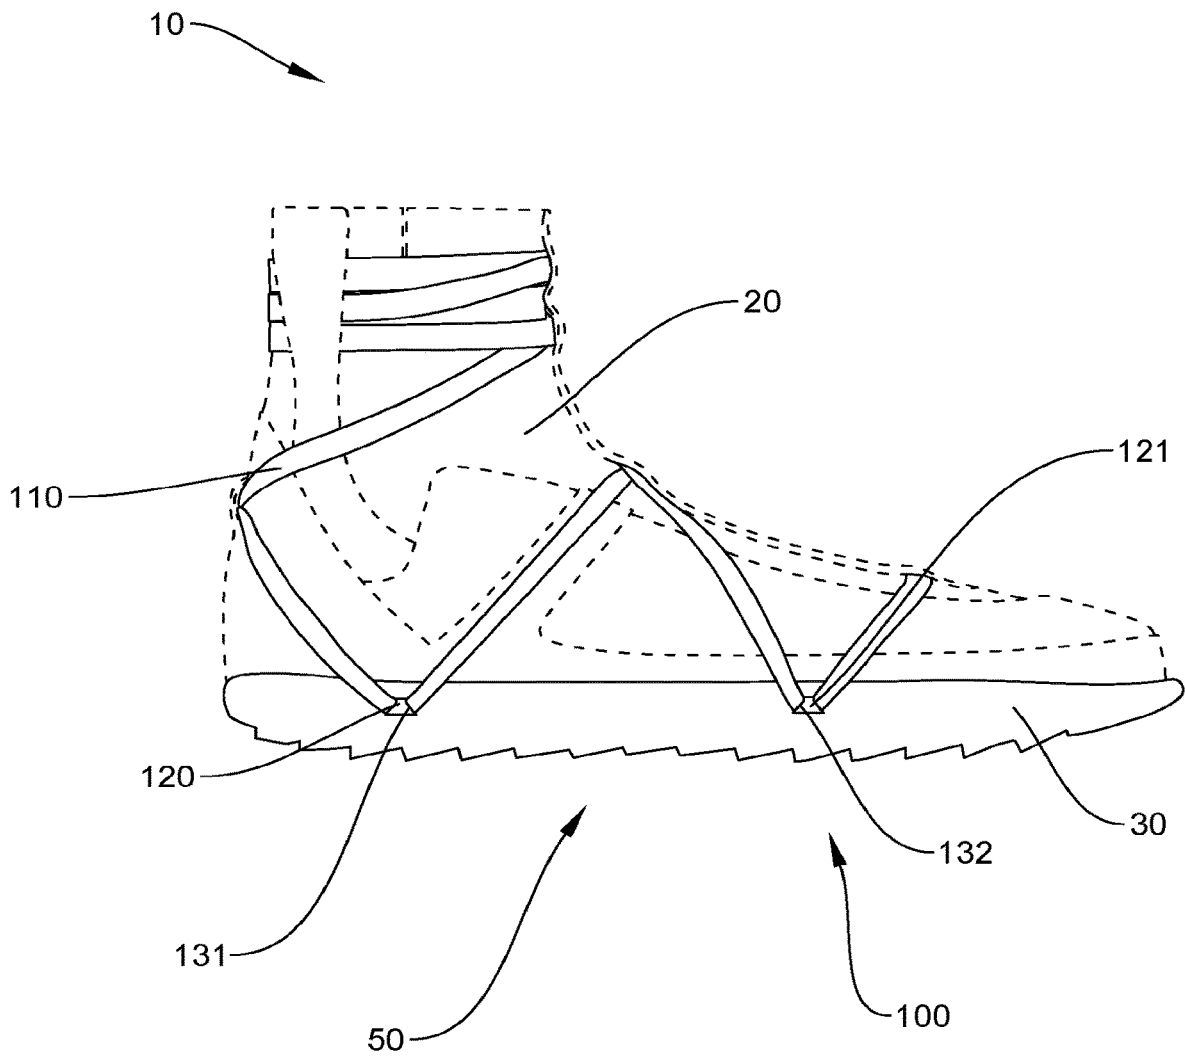


FIG. 1



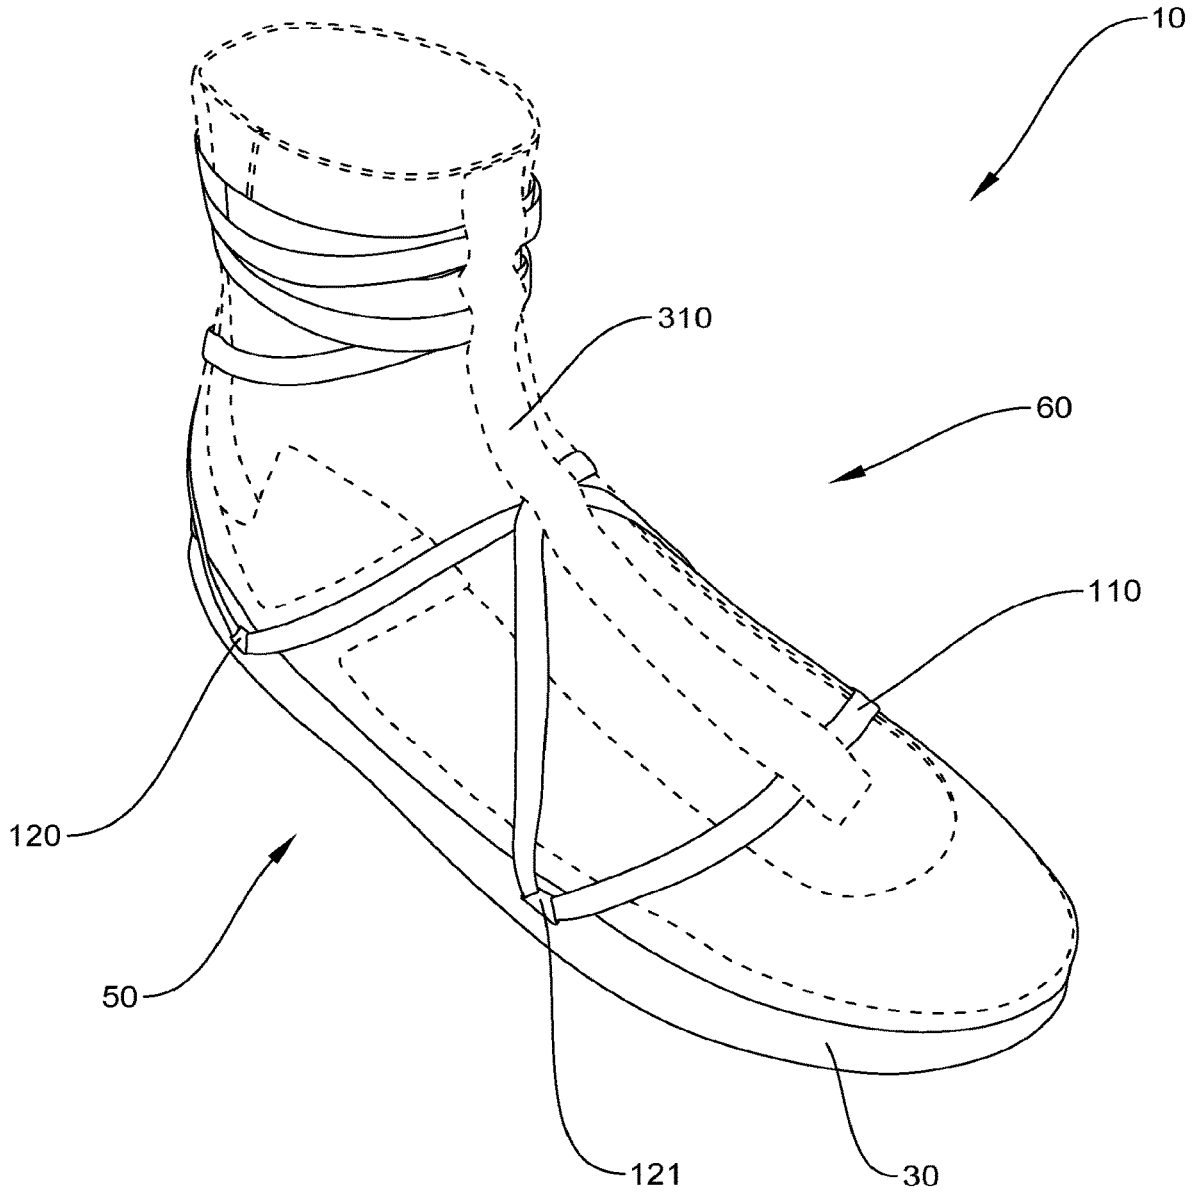


FIG. 3

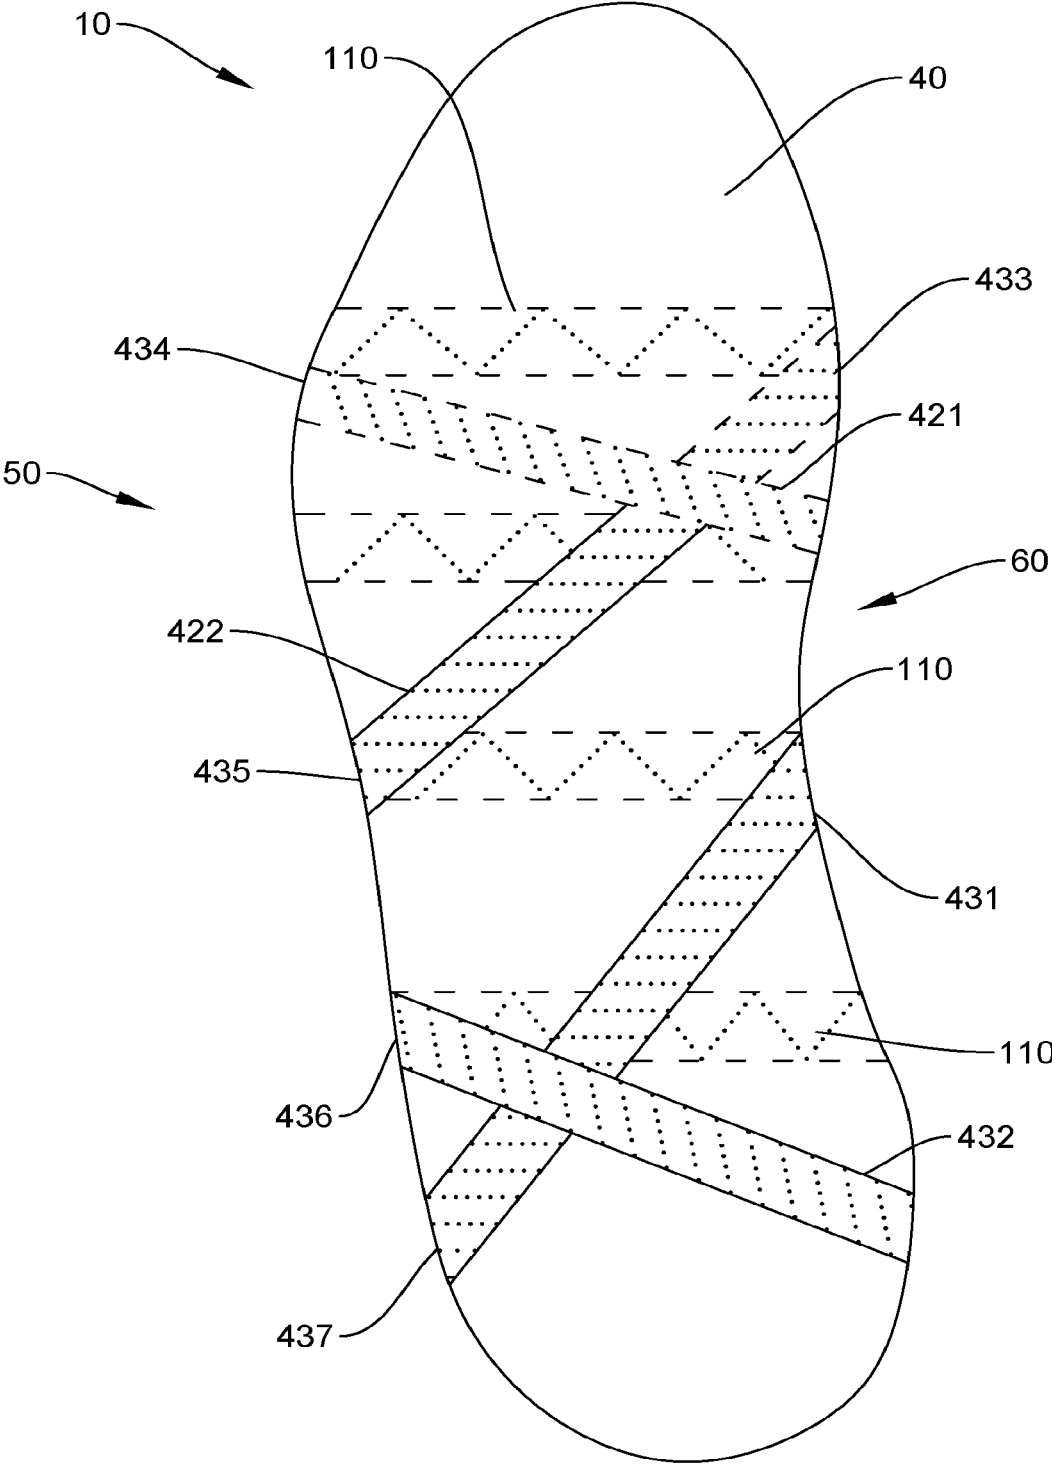


FIG. 4

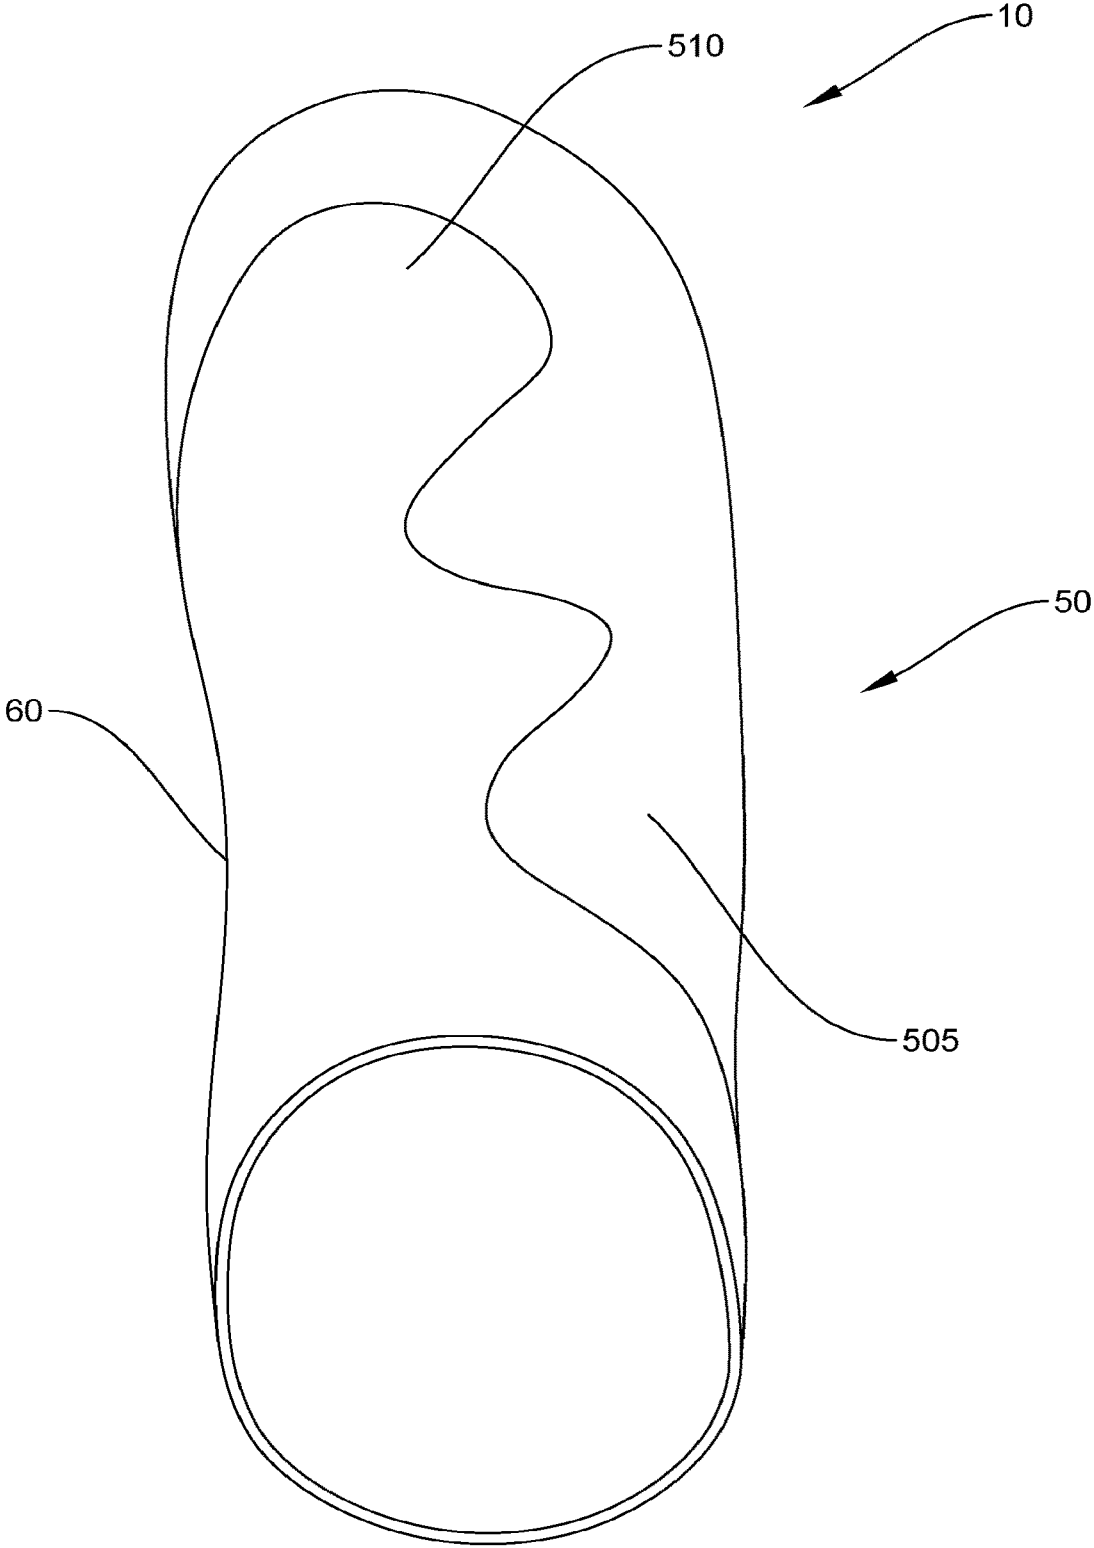


FIG. 5

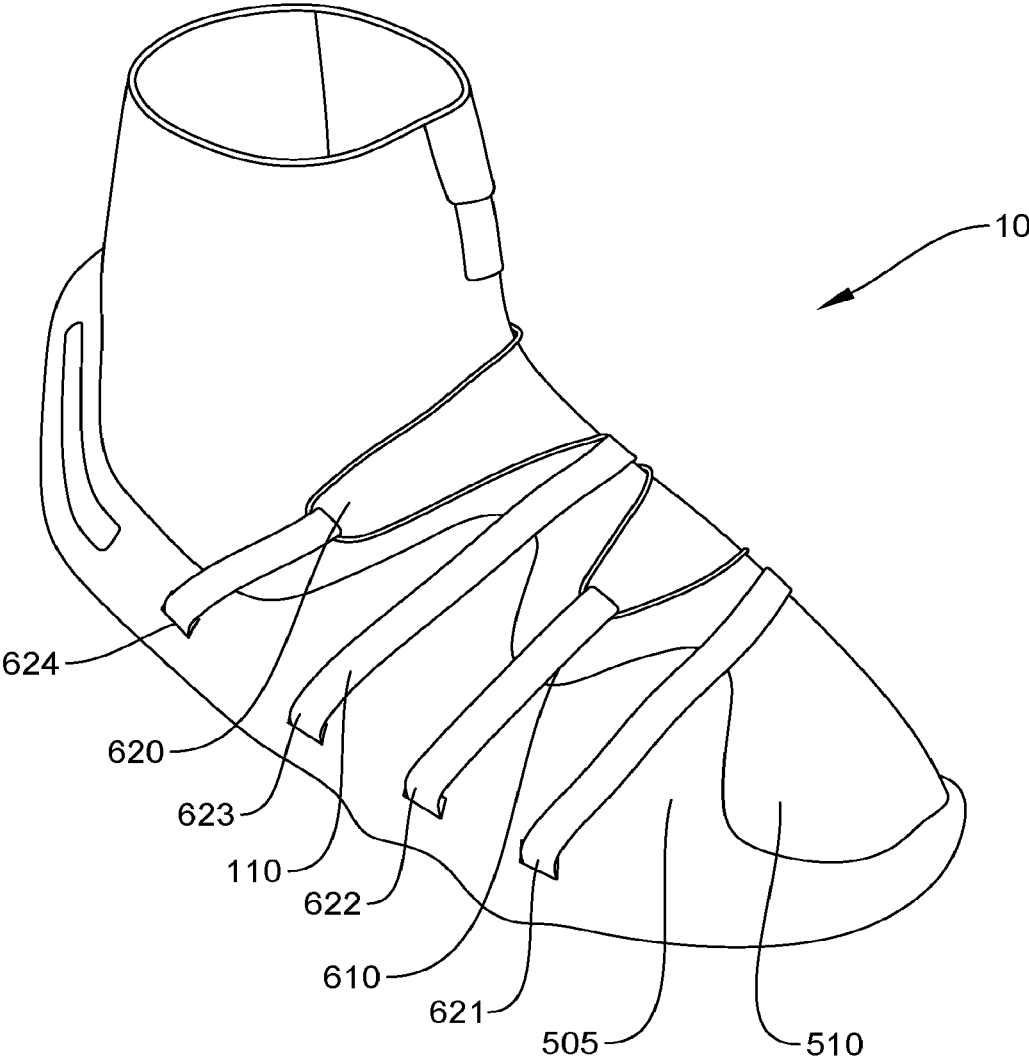


FIG. 6

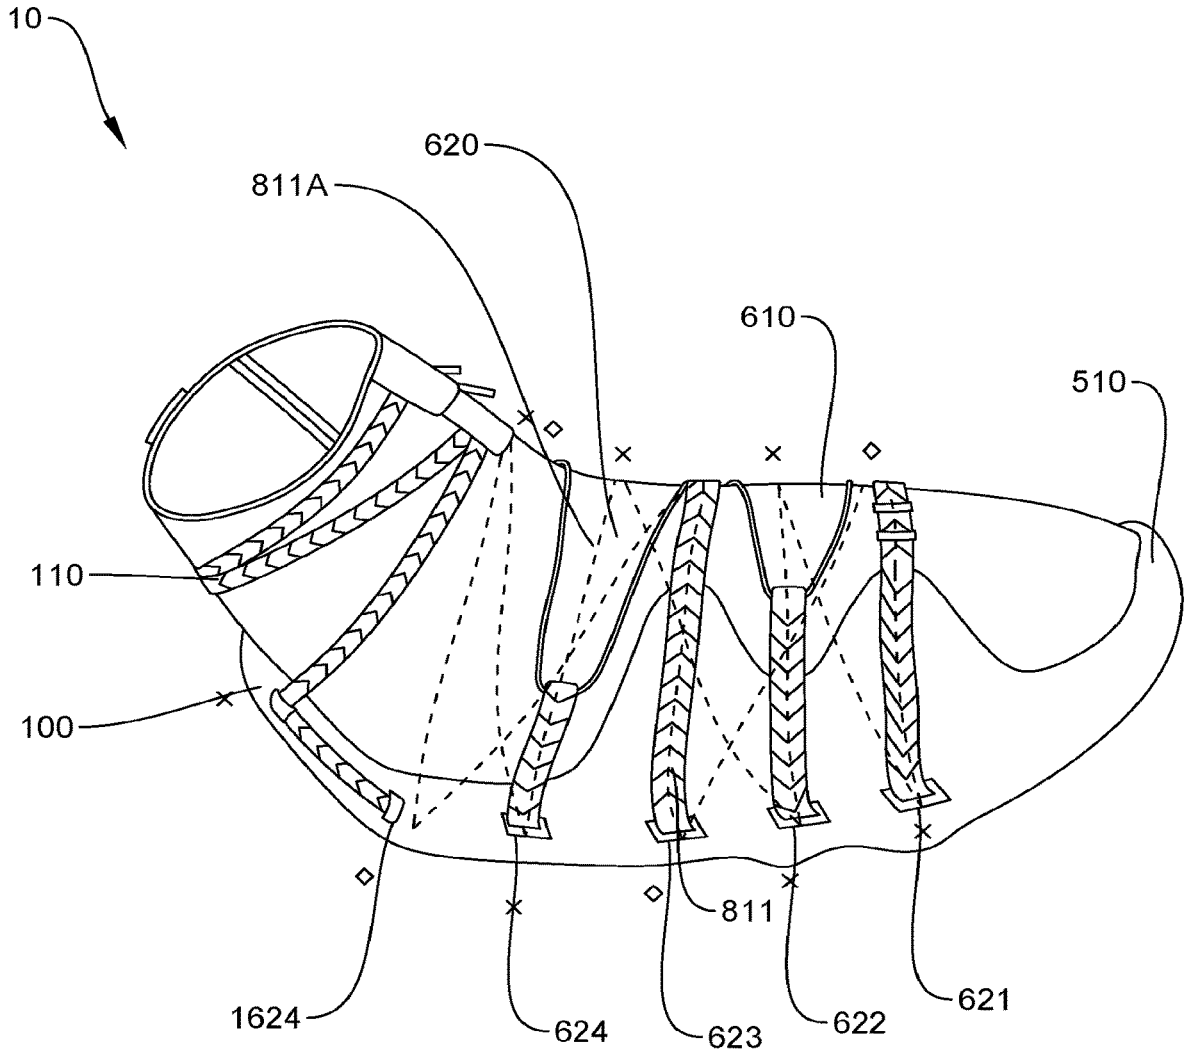


FIG. 7

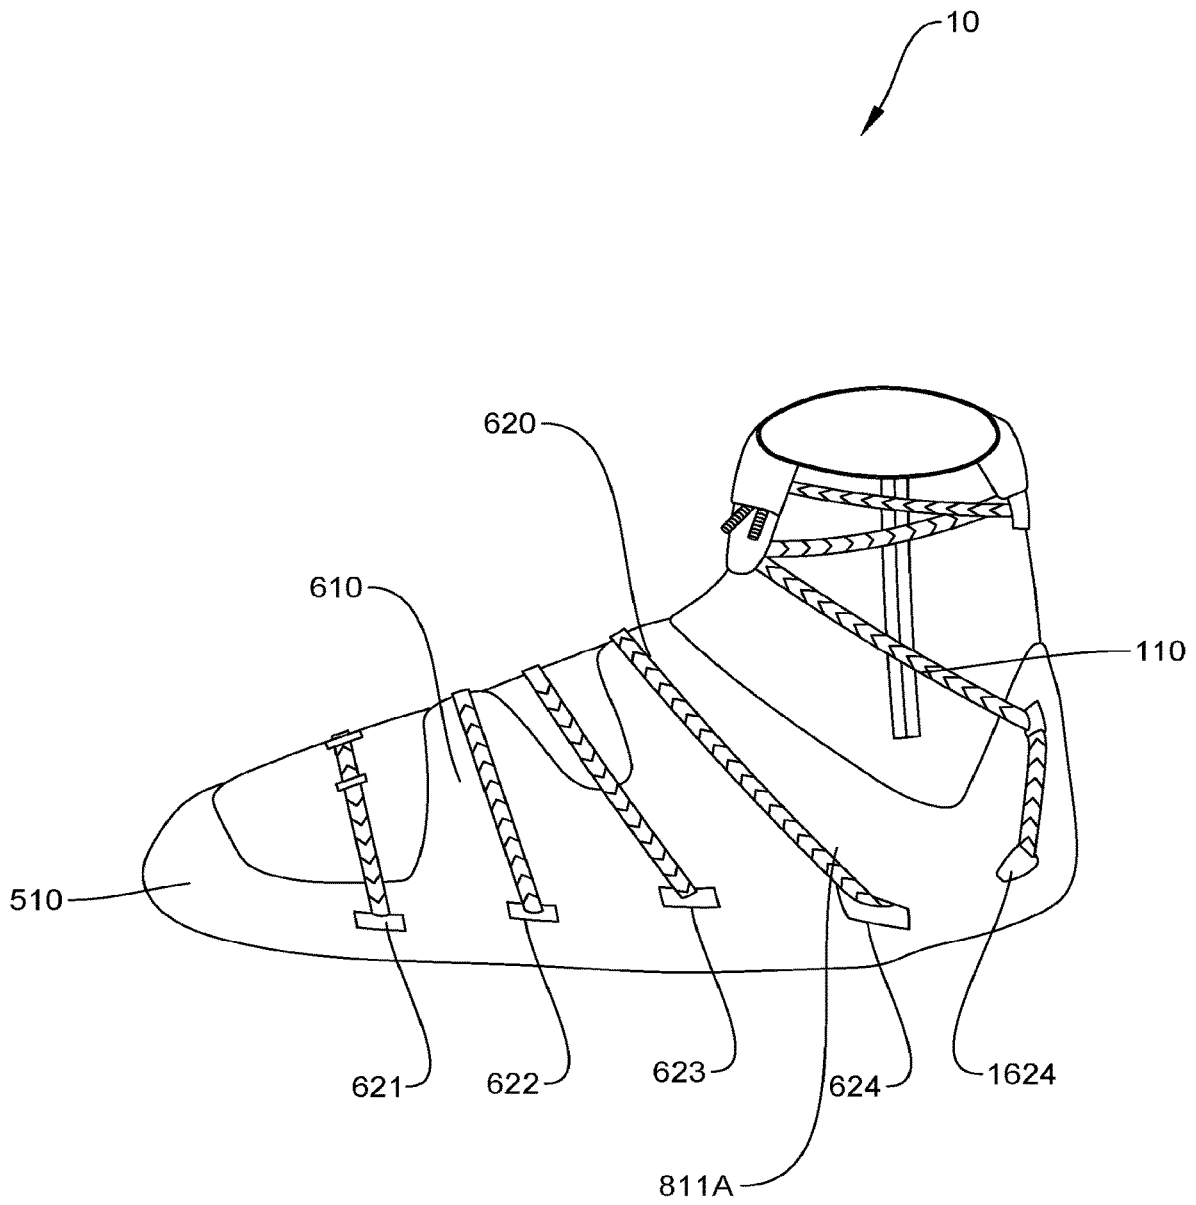


FIG. 8

**CHANNELED SHOE SOLE SYSTEM****CROSS-REFERENCE TO RELATED APPLICATIONS**

This application is a Continuation of U.S. patent application Ser. No. 16/926,081, filed on Jul. 10, 2020, pending, which is a Continuation of PCT/US20/39320, filed on Jun. 24, 2020, pending, which is related to and claims priority to U.S. Provisional Patent Application No. 62/838,166 filed 24 Apr. 2019 (priority restored), which is incorporated by reference.

**BACKGROUND**

The following includes information that may be useful in understanding the present disclosure. It is not an admission that any of the information provided herein is prior art nor material to the presently described or claimed inventions, nor that any publication or document that is specifically or implicitly referenced is prior art.

A shoe is an item of footwear intended to protect and comfort a user while the wearer is doing various activities. Shoes, such as boots and sneakers, have shoelaces that are commonly used to secure the shoes on the foot of the wearer. They typically have a pair of strings or cords, one for each shoe, finished off at both ends with stiff sections, known as aglets. Each shoelace typically passes through a series of holes, eyelets, loops, or hooks on either side of the shoe. Loosening the lacing allows the shoe to open wide enough for the foot to be inserted or removed. Tightening the lacing and tying off the ends secures the foot within the shoe.

Typically, shoelaces only pass over each side of the shoe around the tongue portion on the front side of the shoe. Typical lacing can cause discomfort to the wearer, especially when the shoes are worn for extended periods. Additionally, traditional shoe lacing methods can be uninteresting in appearance and style. A suitable solution is desired.

Various attempts have been made to solve problems found in shoe lacing art. Among these are found in U.S. Pat. Nos. 6,052,921; 6,286,233; 5,184,378; and Publication Nos. 2005/0055844; and 2004/0226190. This art is representative of shoe lacing systems.

U.S. Pat. No. 6,052,921 relates to a shoe having an ergonomic shoe lace design. The laces pass through tubes on the tongue portion of the shoe and extend down to the sole of the shoe on either side of the shoe where they pass through tubes on or near the perimeter of the sole. The laces crisscross the foot in this manner to secure the foot from up and down motion in the shoe. Optionally the lace may continue to be wrapped around the heel of the foot through ankle tubes and heel tubes to secure the foot from toe to heel movement in the shoe. This is particularly of advantage for shoes used in sporting activities. In this manner the upper of the shoe is not pulled together on either side of the tongue as in conventional shoes, thus avoiding stresses in the upper that tend to put pressure on and rub against the user's foot. Thus, the shoe is comfortably and securely held to the user's foot.

U.S. Pat. No. 6,286,233 has an internal lacing system for footwear wherein a plurality of lace guides having rotatable rollers are secured and strategically positioned throughout a shoe to facilitate securing the foot within the shoe. More specifically, an elongated lace having a first end and a second end is internally channeled through each of the lace guides and over the respective rollers, wherein the second end of the elongated lace exits the internal of the shoe at the

upper portion of the shoe proximal to the shoe opening. The first end of the elongated lace is secured within the shoe proximal to the toe area of the shoe. To tighten the shoe, a user simply pulls on the exposed second end of the lace thereby allowing the lace to roll along each respective roller positioned within each lace guide. Additionally, because the first end of the lace is fixed, the pulling on the second end of the lace will result in a reciprocating force about each lace guide thus securely tightening the shoe around the user's foot.

U.S. Pat. No. 5,184,378 relates to a lacing system for shoes employing a plurality of strips, wherein the lower ends of the strips are rigidly attached to the lower portion of the shoe and the upper portion of the strips have a lacing ring fixed thereto. The upper ends of the strips are slideably retained by loops on the upper of the shoe, and the middle portion of the strips are unattached to the quarter of the shoe. The strips transfer the lacing force evenly along the quarter to mold the quarter of shoe evenly to the wearer's feet.

None of the above inventions and patents, taken either singly or in combination, describes the devices disclosed below. Thus, a need exists for a reliable, ergonomic shoe lacing system, and to avoid the problems mentioned above.

**TECHNICAL FIELD**

The present invention generally relates to the field of shoes and athletic shoes and, more specifically, relates to structures and methods to better secure shoes to a user's foot. It also relates to ergonomic shoe lacing.

**SUMMARY**

Given these disadvantages inherent in the known shoe art, the present disclosure provides a novel shoe having channels through the soles for receiving laces or shoestrings. One general aspect includes a shoe with a sole having a channel extending through the sole and shoestrings extending through the sole channel. Other embodiments of this aspect include corresponding various other shoes.

Implementations may include one or more of the following features. The shoe may include two or three or more channels extending through the sole. One or more channels pass from the medial side to the lateral side, or one or more channels pass from the lateral side to the medial side. The shoestrings extend over the shoe, which in some embodiments, may include a shoestring catch. In some embodiments, a plurality of channels receives the shoestrings. Sometimes the shoestrings extend around a user's ankle. An upper cover can cover the upper and serve as a place to attach shoestrings. In some embodiments, the place to attach shoestrings includes shoestring mounts or eyelets. The laces or shoestring may be covered by a shoestring strip extending over the laces or shoestrings. The upper cover may include shoestring mounts or eyelets and may include a shoestring strip extending over the laces. The shoe is an athletic shoe. A method may include providing the shoe and tightening the shoe to a user's foot. The tightening step may further include extending the laces through the channels and securing the laces with a shoestring catch.

A channeled shoe sole system includes a sole, at least one shoestring, and one or more channels for receiving the shoestring. The system may be configured for shoes having an upper-body portion. The channel runs through the sole of the shoe from one side to the other. The channel does not run through the upper-body portion. The channel may run through the sole directly across from one side to the other

side, or it may run at an angle through the sole to provide a different angle for the shoestring to thread through it. In one embodiment, the channels may cross one another as a crisscross angle. There can be numerous channels on the sole of the shoe. The channels enable the shoestring to thread through them and cross over the upper-body portion in many ways, styles, and functional methods.

For purposes of summarizing the invention, certain aspects, advantages, and novel features of the invention have been described. Not necessarily all such advantages may be achieved by any one particular embodiment of the invention. Thus, the invention may be embodied or carried out in a manner that achieves or optimizes one advantage or group of advantages without necessarily achieving other advantages. The features of the invention that are believed to be novel are particularly pointed out and distinctly claimed in this specification. These and other features, aspects, and advantages of the present devices are disclosed along with the following drawings and detailed description.

### BRIEF DESCRIPTION OF THE DRAWINGS

The figures that accompany the written portion of this specification illustrate variations and methods of use for the present devices.

FIG. 1 is a lateral side view of a shoe according to the current disclosure.

FIG. 2 is a medial side view of the shoe of FIG. 1.

FIG. 3 is a perspective view of a version of the shoe of FIG. 1.

FIG. 4 is a bottom plan view of a shoe sole according to this disclosure.

FIG. 5 is an upper plan view of another shoe according to this disclosure.

FIG. 6 is a perspective view of an alternative version of the shoe according to this disclosure.

FIG. 7 is a front right-side view of an alternative version of the shoe according to this disclosure.

FIG. 8 is a left-side view of an alternative version of the shoe according to this disclosure.

The various embodiments of the present invention are described with the appended drawings.

### DETAILED DESCRIPTION

The terminology is used for describing particular example embodiments only and is not intended to be limiting. As used, the singular forms “a”, “an”, and “the” may be intended to include the plural forms as well, unless the context indicates otherwise. The terms “comprises”, “comprising”, “including”, and “having”, are inclusive and therefore specify the presence of stated features, integers, steps, operations, elements, or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, or groups of these. The order of method steps, processes, and operations do not necessarily require performance in the disclosed or illustrated order unless specifically identified as an order of performance. It is also to be understood that additional or alternative steps may be employed,

When an element or layer is referred to as being “on”, “engaged to”, “connected to” or “coupled to” another element or layer, it may be directly on, engaged, connected or coupled to the other element or layer, or intervening elements or layers may be present. In contrast, when an element is referred to as being “directly on”, “directly engaged to”, “directly connected to” or “directly coupled to” another

element or layer, there may be no intervening elements or layers present. Other words used to describe the relationship between elements should be interpreted in a like fashion (e.g., “between” versus “directly between”, “adjacent” versus “directly adjacent”, etc.).

Although the terms first, second, third, etc. may be used to describe various elements, components, regions, layers, or sections, these elements, components, regions, layers, or sections should not be limited by these terms. These terms may be only used to distinguish one element, component, region, layer, or section from another region, layer, or section. Terms such as “first”, “second”, and other numerical terms do not imply a sequence or order unless indicated by the context. Thus, a first element, component, region, layer, or section discussed below could be termed a second element, component, region, layer, or section without departing from this disclosure.

Spatially relative terms, such as “inner”, “outer”, “beneath”, “below”, “lower”, “above”, “upper” and the like, may be used for ease of description to describe one element or feature’s relationship to another element or feature as illustrated in the figures. Spatially relative terms may be intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as “below” or “beneath” other elements or features would then be oriented “above” the other elements or features. Thus, the example term “below” can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors interpreted accordingly.

The description of the embodiments has been provided for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention. Individual elements or features of a particular embodiment are generally not limited to that particular embodiment but, where applicable, are interchangeable and can be used in a selected embodiment, even if not explicitly shown or described. The same may also be varied in many ways. Such variations are not a departure from the invention, and all such modifications are included within the invention’s scope.

Channel. The channel runs through the sole **100** of the shoe from one side to the other. In some embodiments, it does not run through the upper-body of the shoe. The channel can be a round channel or a square channel or a triangle channel or any other shape channel. It can have a metal shroud running inside of the channel or a wood channel or any other material making up the channel. The channel can be as wide as the channel needs to be for allowing wider or numerous shoestrings running through the channel. The channel may run through the sole **100** directly across from one side to the other, or it may run at an angle through the sole **100** to provide a different angle for the shoestring **110**. The channel may cross one another as a criss-cross angle. There can be numerous channels **120**, **121**, **421**, and **423** in the sole **100**. They can be from one channel to as many channels as the maker wishes. The shoestrings to run through the channels **120**, **121**, **421**, and **423** and run across the top of the shoe in various ways, styles, and functional methods. In some versions, the channel is surrounded or entirely surrounded by sole **100** material except at openings into the channel on the sides of the sole

Sole. The sole **100** can be any kind of material from rubber to leather to plastic to foam to cork and to any other kind of material that would be appropriate to the sole **100** of a shoe as the maker wishes. The sole **100** may be made

stronger at any size to allow the shoestrings **110** to run through the channel without harming durability. The sole **100** can run up higher on the back or front or side of the shoe to allow more channels **120**, **121**, **421**, and **423**.

Shoestrings. Shoestrings **110** or laces are as typical for laced shoes. The shoestrings **110** run through the channel in the sole. They can run through the channel as many times as necessary to achieve a particular style, look, or functionality. Depending on the desired locale or functionality, the shoestrings **110** can wrap around the top through, under, or over any straps, channels, eyelets, or other shoe components.

The channeled shoe sole **100** is a unique concept in the shoe industry. It allows for a unique style and functionality with sports shoes, dress shoes, walking shoes, men's shoes, and women's shoes and any other kind of shoe style that the maker wishes.

The present invention is directed to a channeled shoe sole system. In one embodiment of the present invention, the channeled shoe sole system may include a sole, at least one shoestring, and one or more channels **120**, **121**, **421**, and **423** for receiving the shoestring. The system may be configured for shoes having an upper-body portion (e.g., tongue, vamp, heel, etc.). The channel may have an inlet opening and an outlet opening such that the shoestring can be threaded therethrough from one side of the channel to the other. There can be numerous channels **120**, **121**, **421**, and **423** on the sole **100**. The channel may enable the shoestrings **110** to thread through them and run across the upper-body portion in many ways, styles, and functional methods.

FIG. 1 shows a channeled shoe sole system that includes the sole, the shoestrings **110**, and the channels **120**, **121**, **421**, and **423**. As illustrated, the channels **120**, **121**, **421**, and **423** may pass through the sole **100** from one side to the other. The channels **120**, **121**, **421**, and **423** do not run through the upper-body portion (as indicated by the broken lines) like traditional lacing methods. The channel may run through the sole **100** directly across from one side to the other side, or it may run at an angle through the sole **100** to provide a different shoestring direction. In some embodiment, the channels **120**, **121**, **421**, and **423** may cross one another at a criss-cross angle.

The channel may be round, square, triangle, or any other shape. It can have a metal shroud lining inside of the channel. However, wood or any other suitable (preferably rigid) material may be considered. The channel may be wide enough to allow wider or multiple shoestrings **110** to thread through one or more of the channels **120**, **121**, **421**, and **423**. Depending upon the embodiment, shoe **10** comprises one, two, three, four, or five, or more channels **120**, **121**, **421**, and **423** in sole **100**.

FIG. 1 depicts a lateral side view of shoe **10**, as disclosed in this document. Shoe **10** has upper **20** and lateral side **50** shown in FIG. 1. Sole **100** is shown with back channel **120** and front channel **121**. Each of these channels has openings on both sides of shoe **10**. FIG. 1 shows lateral opening **131** to back channel **120** and lateral opening **132** two front channels **121**.

In some embodiments, shoe **10** can be any type of footwear or shoe that is typically secured to the user's foot with shoestrings **110** or shoestrings **110** or that could be secured to the user's foot with laces or ribbon- or rope-like materials. Throughout this disclosure, laces and shoestring may be used interchangeably. FIG. 1 shows an athletic style of shoe **10**.

Shoelaces, shoestrings, or laces **110** are shown in FIG. 1, in some instances passing over the shoe, and in some

instances passing through back channel **120** or front channel **121**, and in some cases passing around ankle portion **21** of shoe **10**.

FIG. 2 shows a left side view of the channeled shoe sole system. The sole **100** may be any kind of material, including rubber, leather, plastic, foam, cork, and other suitable material. The sole **100** may be strengthened to offset the weakening possibly caused by the channels **120**, **121**, **421**, and **423**. The sole **100** can extend up higher on the back, front, or side of the shoe **10** to allow placement of more channels **120**, **121**, **421**, and **423**.

FIG. 2 shows medial side **60** of shoe **10**. Again, shoe **10** has sole **100** and upper **20**. The figures show medial opening **134** of back channel **120** and medial opening **133** of front channel **121**. The figures further disclose an example of the lacing of shoestrings **110**. Additionally, FIG. 2 depicts shoestring catch **230**, which can be any component that allows shoestrings **110** to be tied or secured or otherwise held together as is typical for laced shoes. In some embodiments, the laces are held together by merely tying a bow.

FIG. 3 shows a perspective view of the channeled shoe sole system. The shoestring passes through the channel and may thread through it as many times as the wearer desires to lend a particular style, look, or functionality. Further, the shoestrings **110** can run through the channel allowing the shoestrings **110** to be wrapped around the upper-body portion through, under, and over any straps, loops, eyelets, or anything else constructed into the upper-body portion so that the shoestrings **110** have a particular look or functionality. As illustrated, the shoestrings **110** thread through sections like the heel, the ankle, and the tongue of the shoe, creating a novel appearance. Additionally, such a shoe lacing method may increase comfort for the wearer by providing a more secure fastening means around the upper-body portion.

FIG. 3 is an upper perspective view of shoe **10**, indicating medial side **60** and lateral side **50**. FIG. 3 additionally depicts laces strip **310**, which can be situated as desired on upper **20** to cover shoestrings **110** or to otherwise secure shoestrings **110**.

FIG. 4 depicts a bottom plan view of sole **100** of shoe **10**. Surface **101** of sole **100** points upward, in this view. In addition to back channel **120** and front channel **121**, this FIG. depicts third channel **421** and fourth channel **423**. As shown, channels **120**, **121**, **421**, and **423** do not extend perpendicular to the long axis of the shoe in all embodiments. Some embodiments exist where channels **120**, **121**, **421**, and **423** are skew to a longitudinal axis of shoe **10**, and in other embodiments, channels **120**, **121**, **421**, and **423** are substantially perpendicular to the longitudinal axis of the shoe. Comparing FIG. 3 to FIG. 4 shows that channels **120**, **121**, **421**, and **423** are situated above surface **101** of sole **100**. In FIG. 4, channels **120**, **121**, **421**, and **423** are represented with dotted lines arranged across the object in a striped fashion. Shoestrings **110** are not shown passing through channels **120**, **121**, **421**, and **423**. But they are depicted with a dotted zigzag line in FIG. 4. Shoestrings **110** in FIG. 4 pass over the top of shoe **10** in some embodiments. FIG. 4 illustrates just one variation of channel and shoestring directions for shoes of this disclosure.

FIG. 5 depicts a top view of shoe **10**, indicating lateral side **50** and medial side **60**. This figure also illustrates upper cover **510**. Upper cover **510** extends partially or entirely over upper **20**. Its use is better seen in FIG. 6, where shoe **10** has upper cover **510**. Upper cover **510** has front shoestring attachment **610** and rear shoestring attachment **620**. This version of shoe **10** has two attachments on upper cover

**510**, but other embodiments exist having different numbers of shoestring attachment **610**.

Shoe **10** in FIG. **6** has four channels indicated by lateral opening to channel A, **621**, lateral opening to channel B, **622**, lateral opening to channel C, **623**, and lateral opening to channel D, **624**. In this figure, laces **110** are shown passing from shoestring attachment **610** on upper cover **510** through the openings to the channels. For instance, front shoestring attachment **610** secures shoestring **110** to upper cover **510**, and shoestring **110** extends from front shoestring attachment **610** into lateral channel opening **622**. Likewise, rear shoestring attachment **620** attaches shoestring **110** to upper cover **510** and extends from upper cover **510** into lateral opening **624**.

FIG. **7** shows medial side **60** of shoe **10**. Again, shoe **10** has sole **100** and upper **20**. The figures show medial opening **134** of back channel **120** and medial opening **133** of front channel **121**. The figure further discloses an example of the lacing of shoestrings **110**. Additionally, FIG. **8** depicts shoestring catch **230**, which can be any component that allows shoestrings **110** to be tied or secured or otherwise held together as is typical for laced shoes. In some embodiments, the laces are held together by merely tying a bow.

In this depiction, the shoestring passes through the channel and may thread through it as many times as the wearer desires to lend a particular style, look, or functionality. Further, the shoestrings can run through the channel allowing the shoestrings to be wrapped around the upper-body portion through, under, and over any straps, loops, eyelets, or anything else constructed into the upper-body portion so that the shoestrings have a particular look or functionality. As illustrated, the shoestrings thread through sections like the heel, the ankle, and the tongue of the shoe, creating a novel appearance. Additionally, such a shoe lacing method may increase comfort for the wearer by providing a more secure fastening means around the upper-body portion.

Shoe **10**, in FIG. **7**, has five channels through the sole **100** indicated by lateral opening to channel A, **621**, lateral opening to channel B, **622**, lateral opening to channel C, **623**, and lateral opening to channel D, **624**, and channel E, **1624**. In this figure, laces **110** are shown passing from shoestring attachment **610** on upper cover **510** through the openings to the channels. For instance, front shoestring attachment **610** secures shoestring **110** to upper cover **510**, and shoestring **110** extends from front shoestring attachment **610** into lateral channel opening **622**. Likewise, rear shoestring attachment **620** attaches shoestring **110** to upper cover **510** and extends from upper cover **510** into lateral opening **624**.

Shoestring tube **811** serves as a passage for shoestring **110** as it extends over shoe upper **20**. Thus shoestring **110** passes through sole **100** and over upper **20**, but in some versions, those having shoestring tube **811**, shoestring **110** is not exposed along its entire length. Shoestring tube **811** can stretch from a channel on one side of the upper, over upper **20**, to a channel on the other side of upper **20**. In some versions, tube **811** contains shoestring **110** the entire distance across upper **20**. In other versions, tube **811** starts and stops along the path as desired for functional or aesthetic reason.

In use, a user takes shoe **10** and wears it as is typical with shoes. The user then laces the shoes or tightens the already laced shoes in any of a large number of different configurations enabled by having channels **120**, **121**, **421**, and **423** through sole **100**. Some of these arrangements have purely aesthetic value, some have purely functional value in that they allow the shoes to be secured in a different way than is

sometimes typical in shoes, and some have both functionally and ecstastic value. For instance, in some sports, participants may prefer their shoes tightly secured to their foot but maintain a very loose ankle portion **21** of shoe **10**. Having a variety of channels **120**, **121**, **421**, and **423** allows the user to place shoestrings **110** through the channel and increase the tightness of the shoe at that specific point rather than being forced to use regular eyelets.

The exact specifications, materials used, and method of use of the channeled shoe sole system may vary upon manufacturing.

The embodiments of the invention described herein are exemplary, and numerous modifications, variations, and rearrangements can be readily envisioned to achieve substantially equivalent results, all of which are intended to be embraced within the spirit and scope of the invention.

The steps described in the method can be carried out in many different orders according to user preference.

What is claimed is:

1. A shoe comprising
  - a sole with a channel extending through the sole
  - a first shoestring extending through the sole channel,
  - a second shoestring,
  - a cover for a shoe upper comprising shoestring mounts or eyelets,
  - and
  - a lengthwise shoestring strip extending over the shoestrings,
  - wherein
  - the shoestring
  - extends over the shoe;
  - extends through a plurality of the channels;
  - and
  - sits in a tube under the surface of the upper, over the surface, or in a wall of the upper.
2. The shoe of claim 1 comprising two or more channels extending through the sole.
3. The shoe of claim 2 comprising three or more channels extending through the sole.
4. The shoe of claim 3, wherein the sole has a lateral side and a medial side, and the channel passes from the medial side to the lateral side, or the channel passes from the lateral side to the medial side.
5. The shoe of claim 1, wherein the shoestring extends through a plurality of the channels.
6. The shoe of claim 5, wherein a first portion of the upper extends around an ankle of a user.
7. The shoe of claim 6 wherein the shoestring sits in a tube under the surface of the first portion, over the surface of the first portion, or in the wall of the first portion.
8. The shoe of claim 7 further comprising an upper cover.
9. The shoe of claim 8 wherein the shoestring sits in a tube under a surface of the upper cover, over the surface, or in a wall of the upper cover.
10. The shoe of claim 9, wherein the shoe is an athletic shoe.
11. The shoe of claim 2, wherein the shoe is an athletic shoe.
12. The shoe of claim 2, wherein the shoestring extends through a plurality of the channels.
13. The shoe of claim 1, wherein the shoe is an athletic shoe.
14. A method comprising
  - providing
  - a shoe comprising
    - a sole with a channel extending through the sole,
    - a first shoestring extending through the sole channel,

a second shoestring,  
a cover for a shoe upper comprising shoestring  
mounts or eyelets,  
and  
a lengthwise shoestring strip extending over the 5  
shoestrings,  
wherein the shoestring extends over the shoe;  
extends through a plurality of the channels; and  
sits in a tube under the surface of the upper, over  
the surface, or in a wall of the upper 10

and  
tightening the shoe to a user's foot.

**15.** The method of claim **14**, wherein the tightening step  
comprises  
moving the shoestring through the channels, 15  
and  
securing the shoestring by tying the shoestring or securing  
the shoestring with a shoestring catch.

**16.** The shoe of claim **4**, wherein over the shoe means  
from the medial to the lateral side or from the lateral to the 20  
medial side.

\* \* \* \* \*