





Published:

— *with international search report (Art. 21(3))*

A support bracket

FIELD OF THE INVENTION AND BACKGROUND ART

- 5 The present invention relates to a support bracket for supporting insulating rods inside an insulator tube of a hollow core insulator according to the preamble of claim 1.

10 High voltage power circuit breakers today are generally grouped into two classes: live tank and dead tank designs. A dead tank circuit interrupter generally is one in which the interrupting unit, with its separating contacts, is disposed within an electrically grounded metal tank which then is disposed on or at physical ground level. A live tank design, on the other hand, has its
15 interrupting unit, with its separating contacts, disposed in an insulating tube which then is supported upon an insulating column.

20 The interrupting unit of a live tank circuit breaker usually consists of an insulating rod which is disposed in the insulator tube of the live tank circuit breaker and configured to be movable in a direction parallel to the longitudinal direction of the insulator tube. Also, the insulating rod needs to be centered inside the insulator tube, and/or supported to avoid buckling,
25 which usually is accomplished by having the insulator tube provided with support brackets fixed to its inside surface. The support brackets in question are usually ring-shaped and their outer circular surfaces have to be attached to the inside surface of the insulator tube, and their inside surface configured to
30 support the insulating rod. Earlier a support bracket for the above-mentioned purpose consisted of a solid ring which was fixed to the inside of the insulator tube by means of an adhesive joint.

35 SUMMARY OF THE INVENTION

The object of the present invention is to provide a new support bracket for supporting insulating rods inside an insulator tube of a hollow core insulator.

5 This object is according to the invention obtained by providing a support bracket having the features defined in claim 1, wherein the support bracket comprises a cylindrical ring, preferably a circular cylindrical ring, with an outer surface for abutting against the inner surface of an insulator tube, an inner surface
10 for supporting an insulating rod and two opposing end sides, here denominated first and second end sides, the support bracket being configured to be inserted into an insulator tube of a hollow core insulator so that the cylinder axis of the cylindrical ring essentially coincide with the central longitudinal axis of said
15 insulator tube, wherein the support bracket comprises an expansion assembly having means configured to be actuated so as to expand the cylindrical ring in at least one radial direction when the support bracket has been inserted in an insulator tube of a hollow core insulator.

20 In this description and the subsequent claims, the expression "cylindrical ring" is referring to a ring which essentially has a cylindrical shape, however, the shape of the ring can also differ slightly or significantly from the shape of a cylinder, e.g. the ring
25 can have its outer and/or inner surface shaped as a hyperboloid or the outer and/or the inner surface can have irregular recesses or protrusions.

The hollow core insulator can for instance be the supporting
30 insulator of a live tank circuit breaker, and the inner surface and the outer surface of the cylindrical ring can of course be surfaces of two separate parts which are jointed to constitute the cylindrical ring.

35 Accordingly, by expanding the cylindrical ring of the support bracket inside the insulator tube the support bracket will be

fixed to the inside of said insulator tube by a mechanical joint instead of an adhesive joint relying on adhesive bonding, as was the case before. An adhesive joint is very difficult to apply inside an insulator tube since the adhesive tends to stick to other parts of the inside surface of the tube than those intended. On the contrary, the support bracket according to the invention is during mounting inserted into the insulator tube and thereafter the cylindrical ring is expanded by actuation of said means of the expansion assembly. The mechanical joint relies on radial stress and friction between the outer surface of the cylindrical ring and the inner surface of the insulator tube and no adhesive is necessary for the mounting of the support bracket to the inside of the insulator tube.

According to one embodiment of the invention said means is accessible for actuation from the first end side of the cylindrical ring. The means to be actuated so as to expand the cylindrical ring can thereby easily be accessible while the support bracket is inserted in the insulator tube, which would not be the case if for instance said means were actuated from a radial direction of the cylindrical ring.

According to another embodiment of the invention the expansion assembly comprises a radial slit which opens the cylindrical ring, and said means of the expansion assembly is configured to be actuated so as to expand the cylindrical ring by expanding the width of the radial slit. The cylindrical ring of the support bracket can be manufactured with a larger manufacturing tolerance than would be the case with a support bracket consisting of a solid ring. Such a solid ring would need to have an outer diameter which perfectly fits into the insulator tube for achieving a firm fixation of the ring to the inner surface of the insulator tube. When the cylindrical ring of the support bracket according to the invention is manufactured it is sufficient if the support bracket has an outer dimension which allows it to be inserted into the insulator tube, since the fixation of the support

bracket is achieved by widening the radial slit, and thereby expanding the cylindrical ring. Also the pressure by which the support bracket according to the invention is fixed against the inner surface of the insulator tube can be adjusted. The support
5 bracket can also easily be replaced if it is damaged inside the insulator tube by a reverse operation of the expansion assembly.

According to another embodiment of the invention the means of
10 the expansion assembly comprises a member movable in the radial slit in a direction parallel to the cylinder axis of the cylindrical ring and having surfaces cooperating with surfaces defining said radial slit so as to expand the width of said radial slit. The member can be moved into the radial slit and thereby
15 expand the width of the same, hence expanding the cylindrical ring to an extent so as to fix the support bracket to the inside surface of the insulator tube.

According to another embodiment of the invention the cylindrical
20 ring has on the first end side members engageable by a tool for compressing the ring. The notches can be engaged with a tool, such as pliers, for compressing the cylindrical ring about the radial slit. In this way it is possible to insert the support bracket without damaging the fragile inner surface of the insulator tube.
25 Also, the cylindrical ring can be inserted into the insulator tube even if the cylindrical ring in its un-compressed phase have an outer diameter which is larger than the inner diameter of the insulator tube, since the compression about the radial slit decreases said outer diameter. Of course pliers or such used for
30 said compression have to be provided with handles or the like which are of a sufficient length for allowing them to be operated from the end of the insulator tube.

According to another embodiment of the invention the cylindrical
35 ring has on the first end side two notches, adjacent to and on each side of the radial slit. The notches can be engaged with a

tool, such as pliers, for compressing the cylindrical ring about the radial slit. In this way it is possible to insert the support bracket without damaging the fragile inner surface of the insulator tube. Also, the cylindrical ring can be inserted into the
5 insulator tube even if the cylindrical ring in its un-compressed phase have an outer diameter which is larger than the inner diameter of the insulator tube, since the compression about the radial slit decreases said outer diameter. Of course pliers or such used for said compression have to be provided with
10 handles or the like which are of a sufficient length for allowing them to be operated from the end of the insulator tube.

According to another embodiment of the invention said member and/or radial slit has a cross-section dimension changing in the
15 direction parallel to the cylinder axis so as to expand the cylindrical ring upon movement of said member in said radial slit in the direction parallel to the cylinder axis. The member and/or the radial slit can thus have the shape of for instance a wedge or a distorted wedge. Thus, movement of the member in said
20 direction in the radial slit expands the same, whereby the cylindrical ring can be expanded to an extent so as to fix the support bracket to the inside surface of the insulator tube.

According to another embodiment of the invention said member
25 comprises a cone or a wedge configured for expanding the cylindrical ring by moving in said radial slit in the direction parallel to the cylinder axis. A cone or a wedge can penetrate the radial slit and upon movement of the cone or wedge in the direction parallel to the cylinder axis the radial slit expands,
30 whereby the cylindrical ring can be expanded to an extent so as to fix the support bracket to the inside surface of the insulator tube.

According to another embodiment of the invention the radial slit
35 is wider on one of the end sides than it is on the other end side so as to form a wedge-shaped radial slit, wherein said member

is configured to move in the wedge-shaped radial slit and thereby expand the cylindrical ring by widening the wedge-shaped radial slit. The member can penetrate the radial slit and upon movement in the member in the direction parallel to the cylinder axis the radial slit expands, due to its wedge-shaped form, whereby the cylindrical ring can be expanded to an extent so as to fix the support bracket to the inside surface of the insulator tube.

10 According to another embodiment of the invention:

- the expansion assembly comprises a bore in the cylindrical ring, parallel to the cylinder axis, from the first end side,
- the radial slit cuts through the bore,
- 15 ▪ the width of the radial slit is broader on the second end side than on the first end side and the width of the radial slit from the second end side is tapering inwardly towards the bore so as to form a wedge-shaped slit from the second end side,
- 20 ▪ the member comprises a bolt and a wedge, which wedge has a threaded through-hole configured for receiving the bolt by means of screwing, and
- the wedge is configured to be received in the mating wedge-shaped slit from the second end side and the bolt is configured to be inserted into the bore from the first end side, wherein the bolt is partially screwed into the wedge whereby the slit is expanded.

The bolt is secured in the bore of the cylindrical ring by from the second end side being screwed into the threaded through-hole of the wedge. When the bolt is screwed into the wedge, the wedge is moved in a direction parallel to the cylinder axis, towards the first end side of the cylindrical ring. The wedge is thereby penetrating into the wedge-shaped radial slit, whereby the width of the radial slit is expanded. Thus, the cylindrical ring

can be expanded to an extent so as to fix the support bracket to the inside surface of the insulator tube.

According to another embodiment of the invention:

- 5 ▪ the expansion assembly comprises a bore in the cylindrical ring, parallel to the cylinder axis, from the second end side,
- the radial slit cuts through the bore,
- 10 ▪ the width of the radial slit is broader on the first end side than on the second end side and the width of the radial slit from the first end side is tapering inwardly towards the bore so as to form a wedge-shaped slit from the first end side,
- the member comprises a bolt, a nut and a wedge, which wedge has a through-hole, the nut being configured to receiving the bolt via the through-hole of the wedge by means of screwing,
- 15 ▪ the wedge is configured to be received in the mating wedge-shaped slit from the first end side and the bolt is configured to be inserted through the through-hole in the wedge and further through the bore, wherein the bolt is partially screwed into the nut on the second end side of the cylindrical ring.
- 20
- 25 The bolt is secured in the bore of the cylindrical ring by being screwed from the second end side into the nut. The wedge is also received in the wedge-shaped radial slit and secured therein between the bolt head and the edges of the bore. When the bolt is screwed into the nut the wedge is moved, by being
- 30 pushed by the head of the bolt, in a direction parallel to the cylinder axis, towards the second end side of the cylindrical ring. The wedge is thereby penetrating into the wedge-shaped radial slit, whereby the width of the radial slit is expanded. Thus, the cylindrical ring can be expanded to an extent so as to fix the
- 35 support bracket to the inside surface of the insulator tube.

According to another embodiment of the invention:

- 5 ▪ the expansion assembly comprises a cone-shaped hole in the cylindrical ring, tapering from the second end side to the first end side, wherein the centre line of the cone-shaped hole is parallel to the cylinder axis of the cylindrical ring,
- 10 ▪ the radial slit cuts through the cone-shaped hole,
- the member comprises a bolt and a cone, which cone has a threaded through-hole configured for receiving the bolt by means of screwing, and
- 15 ▪ the cone is configured to be received in the mating cone-shaped hole from the second side and the bolt is configured to be inserted into the cone-shaped hole from the first end side, with the head of the bolt abutting against the edges surrounding the hole, wherein the bolt is partially screwed into the cone whereby the slit is expanded.

20 The bolt is secured in the hole of the cylindrical ring by being screwed from the second end side into the threaded through-hole of the cone. When the bolt is screwed into the cone the cone is moved in a direction parallel to the cylinder axis, towards the first end side of the cylindrical ring. The cone is thereby penetrating into the cone-shaped hole, whereby the

25 width of the radial slit is expanded. Thus, the cylindrical ring can be expanded to an extent so as to fix the support bracket to the inside surface of the insulator tube.

According to another embodiment of the invention:

- 30 ▪ the expansion assembly comprises a cone-shaped hole in the cylindrical ring, tapering from the first end side to the second end side, wherein the centre line of the cone-shaped hole is parallel to the cylinder axis of the cylindrical ring,
- 35 ▪ the radial slit cuts through the cone-shaped hole,

- the member comprises a bolt, a nut and a cone, which cone has a through-hole, the nut being configured to receiving the bolt via the through-hole of the cone by means of screwing,
- 5 ▪ the cone is configured to be received in the mating cone-shaped hole from the first end side and the bolt is configured to be inserted through the through-hole in the cone and further through the cone-shaped hole, wherein the bolt is partially screwed into the nut
- 10 on the second end side of the cylindrical ring.

The bolt is secured in the hole of the cylindrical ring by being screwed from the second end side into the nut. The cone is also received in the cone-shaped hole and secured therein between
15 the bolt head and the hole. When the bolt is screwed into the nut the cone is moved, by being pushed by the head of the bolt, in a direction parallel to the cylinder axis, towards the second end side of the cylindrical ring. The cone is thereby penetrating into the cone-shaped hole, whereby the width of the radial slit is
20 expanded. Thus, the cylindrical ring can be expanded to an extent so as to fix the support bracket to the inside surface of the insulator tube.

Other advantages and advantageous features of the invention
25 will appear from the dependent claims and the subsequent description.

BRIEF DESCRIPTION OF THE DRAWINGS

30 With reference to that appended drawings, below follows a specific description of embodiments of the invention cited as examples.

In the drawing:
35

- Fig 1 shows a support bracket supporting an insulating rod inside an insulator tube,
- 5 Fig 2 shows a support bracket according to a first embodiment of the invention,
- Fig 3 shows another support bracket according to a second embodiment of the invention,
- 10 Fig 4 shows another support bracket according to a third embodiment of the invention,
- Fig 5 shows another support bracket according to a fourth embodiment of the invention,
- 15 Fig 6 shows another support bracket according to a fifth embodiment of the invention,
- Fig 7 shows another support bracket according to a sixth embodiment of the invention,
- 20 Fig 8 shows another support bracket according to a seventh embodiment of the invention, and
- 25 Fig 9 shows another support bracket according to the invention.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

30

Explained herein are support brackets according to embodiments of the invention. The invention may, however, be embodied in many different forms and should not be construed as being limited to the exemplary embodiments set forth herein;
35 rather, these embodiments are provided so that this disclosure

will be thorough and complete, and will fully convey the concept of the invention to those skilled in the art.

Fig 1 shows a support bracket 1 supporting an insulating rod 2
5 inside an insulator tube 3 of a hollow core insulator, for instance the supporting insulator of a live tank circuit breaker. The support bracket 1 comprises a cylindrical ring 4 with an outer surface 5 for abutting against the inner surface 6 of the insulator tube 3, an inner surface 7 for supporting the insulating rod 2 and
10 two opposing end sides, here denominated first 8a and second 8b end sides. The support bracket 1 is configured to be inserted into the insulator tube 3 of the hollow core insulator so that the cylinder axis 9 of the cylindrical ring 4 essentially coincide with the central longitudinal axis of said insulator tube 3.

15 The support bracket 1 comprises an expansion assembly having means configured to be actuated so as to expand the cylindrical ring 4 in at least one radial direction when the support bracket 1 has been inserted in an insulator tube 3 of a hollow core
20 insulator. The expansion assembly can be any expansion assembly configured for expanding the cylindrical ring 4, and in Figs 2-5 it is shown very schematically different embodiments of expansion means of the support bracket 1 according to the invention. The expansion assemblies shown in Figs 2-5
25 comprises a radial slit 10a-d which opens the cylindrical ring 4, and means of the expansion assembly is configured to be actuated so as to expand the cylindrical ring 4 by expanding the width of the radial slit 10a-d. The means of the expansion assembly comprises a member 11a-d movable in the radial slit
30 10a-d in a direction parallel to the cylinder axis 9 of the cylindrical ring 4 and having surfaces 12 cooperating with surfaces 13 defining said radial slit 10a-d so as to expand the width of said radial slit 10. Said member 11a-d and/or radial slit 10a-d has a cross-section dimension changing in the direction
35 parallel to the cylinder axis 9 so as to expand the cylindrical ring 4 upon movement of said member 11a-d in said radial slit 10a-d

in the direction parallel to the cylinder axis 9. Different embodiments of the member 11a-d and the radial slit 10a-d are shown in Figs 2-5.

5 In Fig 2 the expansion assembly is embodied with a slit 10a which is wider on one of the end sides 8b than it is on the other end side 8a so as to form a wedge-shaped radial slit 10a. The member 11a is configured to move in the wedge-shaped radial slit 10a. When the surfaces 12 of the member 11a come into en-
10 gagement with the surfaces 13 defining said radial slit 10a and the member 11a continues to move in said direction the surfaces 13 defining said radial slit 10a gradually become separated and the cylindrical ring 4 is thereby expanded.

15 In Fig 3 the expansion assembly is embodied with a member 11b in the form of a wedge configured for expanding the cylindrical ring 4 by moving in the radial slit 10b in the direction parallel to the cylinder axis 9. The wedge-shaped member 11b is configured to move in the radial slit 10b. When the surfaces 12
20 of the member 11b come into engagement with the surfaces 13 defining said radial slit 10b and the member 11b continues to move in said direction the surfaces 13 defining said radial slit 10b gradually become separated and the cylindrical ring 4 is thereby expanded.

25 In Fig 4 the expansion assembly comprises a cone-shaped hole in the radial slit 10c of the cylindrical ring 4, tapering from the second end side 8b to the first end side 8a. The centre line of the cone-shaped hole is parallel to the cylinder axis 9 of the
30 cylindrical ring 4. The member 11c is here in the form of a circular cylinder and is configured to move in the cone-shaped hole of the radial slit 10c. When the surfaces 12 of the member 11c come into engagement with the surfaces 13 defining said hole and the member 11c continues to move in said direction the
35 surfaces 13 defining said hole gradually become separated,

which separates the radial slit 10c, and the cylindrical ring 4 is thereby expanded.

5 In Fig 5 the expansion assembly is embodied with a member 11d in the form of a cone configured for expanding the cylindrical ring 4 by moving in a hole divided by the radial slit 10d in the direction parallel to the cylinder axis 9. The cone-shaped member 11d is configured to move in the hole of the radial slit 10d. When the surfaces 12 of the member 11d come into
10 engagement with the surfaces 13 defining said hole of the radial slit 10d and the member 11d continues to move in said direction the surfaces 13 defining said hole of the radial slit 10d gradually become separated and the cylindrical ring 4 is thereby expanded.

15

In Fig 6 it is shown a support bracket 1 according to the invention, wherein the expansion assembly comprises a bore 14 in the cylindrical ring 4, parallel to the cylinder axis 9, from the first end side 8a. The radial slit 10e cuts through the bore 14 and the
20 width of the radial slit 10e is broader on the second end side 8b than on the first end side 8a and the width of the radial slit 10e from the second end side 8b is tapering inwardly towards the bore 14 so as to form a wedge-shaped slit from the second end side 8b. The member, movable in the radial slit in a direction
25 parallel to the cylinder axis 9 of the cylindrical ring 4, comprises a bolt 15 and a wedge 18, which wedge 18 has a threaded through-hole 16a configured for receiving the bolt 15 by means of screwing. The wedge 18 is configured to be received in the mating wedge-shaped slit 10e from the second end side 8b and
30 the bolt 15 is configured to be inserted into the bore 14 from the first end side 8a. The bolt 15 is partially screwed into the wedge 18 whereby the wedge 18 is pushing the surfaces of wedge-shaped slit apart, which expands the slit 10e. The cylindrical ring 4 has on the first end side 8a two notches 17, adjacent to
35 and on each side of the radial slit 10e. The notches 17 can be engaged with a tool, such as pliers, for compressing the

cylindrical ring 4 about the radial slit 10e. In this way it is possible to insert the support bracket 1 without damaging the fragile inner surface of the insulator tube.

5 In Fig 7 it is shown a support bracket 1 according to the invention, wherein the expansion assembly comprises a bore 14 in the cylindrical ring 4, parallel to the cylinder axis 9, from the second end side 8b. The radial slit 10f cuts through the bore 14 and the width of the radial slit 10f is broader on the first end
10 side 8a than on the second end side 8b and the width of the radial slit 10f from the first end side is 8a tapering inwardly towards the bore 14 so as to form a wedge-shaped slit from the first end side 8a. The member comprises a bolt 15, a nut 19 and a wedge 18, which wedge 18 has a through-hole 16b. The nut
15 19 is configured to receive the bolt 15 via the through-hole 16b of the wedge 18 by means of screwing. The wedge 18 is configured to be received in the mating wedge-shaped slit from the first side 8a and the bolt 15 is configured to be inserted through the through-hole 16b in the wedge 18 and further through the
20 bore 14, wherein the bolt 15 is partially screwed into the nut 19 on the second side 8b of the cylindrical ring 4.

In Fig 8 it is shown a support bracket 1 according to the invention, wherein the expansion assembly comprises a cone-shaped
25 hole 20 in the cylindrical ring 4, tapering from the second end side 8b to the first end side 8a. The centre line of the cone-shaped hole 20 is parallel to the cylinder axis 9 of the cylindrical ring 4 and the radial slit 10g cuts through the cone-shaped hole 20. The member comprises a bolt 15 and a cone 21, which cone
30 21 has a threaded through-hole 16a configured for receiving the bolt 15 by means of screwing. The cone 21 is configured to be received in the mating cone-shaped hole 20 from the second end side 8b and the bolt 15 is configured to be inserted into the cone-shaped hole 20 from the first end 8a side, with the head of
35 the bolt 15 abutting against the edges surrounding the hole on the first end side 8a. The bolt 15 is partially screwed into the

- cone 21 whereby the radial slit 10g is widened and the cylindrical ring 4 expanded. The cylindrical ring 4 has on the first end side 8a two notches 17, adjacent to and on each side of the radial slit 10g. The notches 17 can be engaged with a tool, such as pliers, for compressing the cylindrical ring 4 about the radial slit 10g. In this way it is possible to insert the support bracket 1 without damaging the fragile inner surface of the insulator tube.
- 10 In Fig 9 it is shown a support bracket 1 according to the invention, wherein the expansion assembly comprises a cone-shaped hole 20 in the cylindrical ring 4, tapering from the first end side 8a to the second end side 8b. The centre line of the cone-shaped hole 20 is parallel to the cylinder axis 9 of the cylindrical ring 4 and the radial slit 10h cuts through the cone-shaped hole 20. The member comprises a bolt 15, a nut 19 and a cone 21, which cone 21 has a through-hole 16b. The nut 19 is configured to receiving the bolt 15 via the through-hole 16b of the cone 21 by means of screwing. The cone 21 is configured to be received in the mating cone-shaped hole 20 from the first end side 8a and the bolt 15 is configured to be inserted through the through-hole 16b in the cone 21 and further through the cone-shaped hole 20. The bolt 15 is partially screwed into the nut 19 on the second end side 8b of the cylindrical ring 4.
- 25 The invention is of course not in any way limited to the embodiments described above. On the contrary, several possibilities to modifications thereof should be apparent to a person skilled in the art without departing from the basic idea of the invention as defined in the appended claims.

Claims

1. A support bracket (1) for supporting insulating rods (2) inside an insulator tube (3) of a hollow core insulator, the support bracket (1) comprising a cylindrical ring (4) with an outer surface (5) for abutting against the inner surface (6) of an insulator tube (3), an inner surface (7) for supporting an insulating rod (2) and two opposing end sides, here denominated first (8a) and second (8b) end sides, the support bracket (1) being configured to be inserted into an insulator tube (3) of a hollow core insulator so that the cylinder axis (9) of the cylindrical ring (4) essentially coincide with the central longitudinal axis of said insulator tube (3), **characterized in** that the support bracket (1) comprises an expansion assembly having means configured to be actuated so as to expand the cylindrical ring (4) in at least one radial direction when the support bracket (1) has been inserted in an insulator tube (3) of a hollow core insulator.
2. A support bracket (1) according to claim 1, **characterized in** that said means is accessible for actuation from the first end side (8a) of the cylindrical ring (4).
3. A support bracket (1) according to claim 1 or 2, **characterized in** that the expansion assembly comprises a radial slit (10a-h) which opens the cylindrical ring (4), and that said means of the expansion assembly is configured to be actuated so as to expand the cylindrical ring (4) by expanding the width of the radial slit (10a-h).
4. A support bracket (1) according to claim 3, **characterized in** that the means of the expansion assembly comprises a member (11a-d) movable in the radial slit (10a-h) in a direction parallel to the cylinder axis (9) of the cylindrical ring (4) and having surfaces (12) cooperating with surfaces

(13) defining said radial slit (10a-h) so as to expand the width of said radial slit (10a-h).

5. A support bracket (1) according to any claim 3 or 4,
5 **characterized in** that the cylindrical ring (4) on the first end side (8a) has members engageable by a tool for compressing the ring.
6. A support bracket (1) according to any of claims 3-5, **characterized in** that the cylindrical ring (4) on the first end
10 side (8a) has two notches (17), adjacent to and on each side of the radial slit (10a-h).
7. A support bracket (1) according to any of claims 4-6, **characterized in** that said member (11a-d) and/or radial slit
15 (10a-h) has a cross-section dimension changing in the direction parallel to the cylinder axis (9) so as to expand the cylindrical ring (4) upon movement of said member (11a-d) in said radial slit (10a-h) in the direction parallel to the
20 cylinder axis (9).
8. A support bracket (1) according to claim 7, **characterized in** that said member (11a-d) comprises a cone (21) or a
25 wedge (18) configured for expanding the cylindrical ring (4) by moving in said radial slit (10a-h) in the direction parallel to the cylinder axis (9).
9. A support bracket (1) according to claims 7 or 8, **characterized in** that the radial slit (10a-h) is wider on one
30 of the end sides than it is on the other end side so as to form a wedge-shaped radial slit (10a, 10e, 10f), wherein said member (11a-d) is configured to move in the wedge-shaped radial slit (10a, 10e, 10f) and thereby expand the cylindrical ring (4) by widening the wedge-shaped radial
35 slit (10a, 10e, 10f).

10. A support bracket (1) according to any of claims 3-9, **characterized in** that:
- the expansion assembly comprises a bore (14) in the cylindrical ring (4), parallel to the cylinder axis (9), from the first end side (8a),
 - the radial slit (10e) cuts through the bore (14),
 - the width of the radial slit (10e) is broader on the second end side (8b) than on the first end side (8a) and the width of the radial slit (10e) from the second end side (8b) is tapering inwardly towards the bore (14) so as to form a wedge-shaped radial slit (10e) from the second end side (8b),
 - the member comprises a bolt (15) and a wedge (18), which wedge (18) has a threaded through-hole (16a) configured for receiving the bolt (15) by means of screwing, and
 - the wedge (18) is configured to be received in the mating wedge-shaped radial slit (10e) from the second end side (8b) and the bolt (15) is configured to be inserted into the bore (14) from the first end side (8a), wherein the bolt (15) is partially screwed into the wedge (18) whereby the radial slit (10e) is expanded.
11. A support bracket (1) according to any of claims 3-9, **characterized in** that:
- the expansion assembly comprises a bore (14) in the cylindrical ring (4), parallel to the cylinder axis (9), from the second end side (8b),
 - the radial slit (10f) cuts through the bore (14),
 - the width of the radial slit (10f) is broader on the first end side (8a) than on the second end side (8b) and the width of the radial slit (10f) from the first end side (8a) is tapering inwardly towards the bore (14) so as to form a wedge-shaped radial slit (10f) from the first end side (8a),

- 5 ▪ the member comprises a bolt (15), a nut (19) and a wedge (18), which wedge (18) has a through-hole (16b), the nut (19) being configured to receiving the bolt (15) via the through-hole (16b) of the wedge (18) by means of screwing,
- 10 ▪ the wedge (18) is configured to be received in the mating wedge-shaped radial slit (10f) from the first end side (8a) and the bolt (15) is configured to be inserted through the through-hole (16b) in the wedge (18) and further through the bore (14), wherein the bolt (15) is partially screwed into the nut (19) on the second end side (8b) of the cylindrical ring (4).
- 15 12. A support bracket (1) according to any of claims 3-8, **characterized in** that:
 - 20 ▪ the expansion assembly comprises a cone-shaped hole (20) in the cylindrical ring (4), tapering from the second end side (8b) to the first end side (8a), wherein the centre line of the cone-shaped hole (20) is parallel to the cylinder axis (9) of the cylindrical ring (4),
 - 25 ▪ the radial slit (10g) cuts through the cone-shaped hole (20),
 - 30 ▪ the member comprises a bolt (15) and a cone (21), which cone (21) has a threaded through-hole (16a) configured for receiving the bolt (15) by means of screwing, and
 - 35 ▪ the cone (21) is configured to be received in the mating cone-shaped hole (20) from the second end side (8b) and the bolt (15) is configured to be inserted into the cone-shaped hole (20) from the first end side (8a), with the head of the bolt (15) abutting against the edges surrounding the cone-shaped hole (20) from the first end side (8a), wherein the bolt (15) is partially screwed into the cone (21) whereby the radial slit (10g) is expanded.

13. A support bracket (1) according to any of claims 3-8, **characterized in** that:

- 5 ▪ the expansion assembly comprises a cone-shaped hole (20) in the cylindrical ring (4), tapering from the first end side (8a) to the second end side (8b), wherein the centre line of the cone-shaped hole (20) is parallel to the cylinder axis (9) of the cylindrical ring (4),
- 10 ▪ the radial slit (10h) cuts through the cone-shaped hole (20),
- the member comprises a bolt (15), a nut (19) and a cone (21), which cone (21) has a through-hole (16b), the nut (19) being configured to receiving the bolt
- 15 (15) via the through-hole (16b) of the cone (21) by means of screwing,
- the cone (21) is configured to be received in the mating cone-shaped hole (20) from the first end side (8a) and the bolt (15) is configured to be inserted through
- 20 the through-hole (16b) in the cone (21) and further through the cone-shaped hole (20), wherein the bolt (15) is partially screwed into the nut (19) on the second end side (8b) of the cylindrical ring (4) whereby the radial slit (10h) is expanded.

25

14. Use of a support bracket (1) according to any 1-13 for supporting insulating rods (2) inside an insulator tube (3) of a hollow core insulator.

30

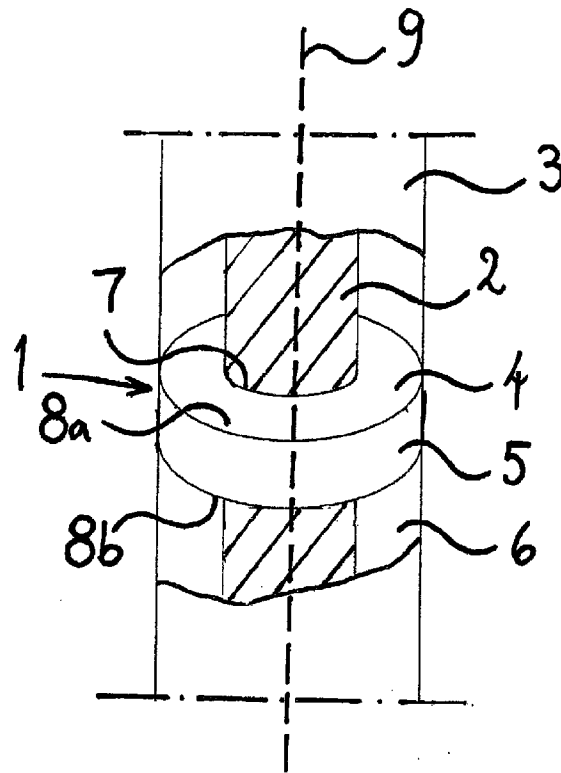


Fig 1

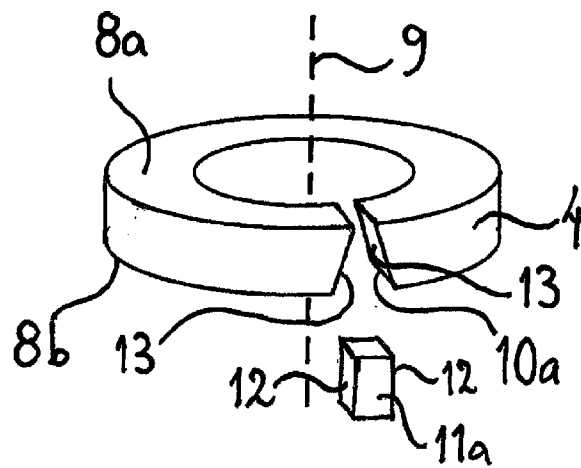


Fig 2

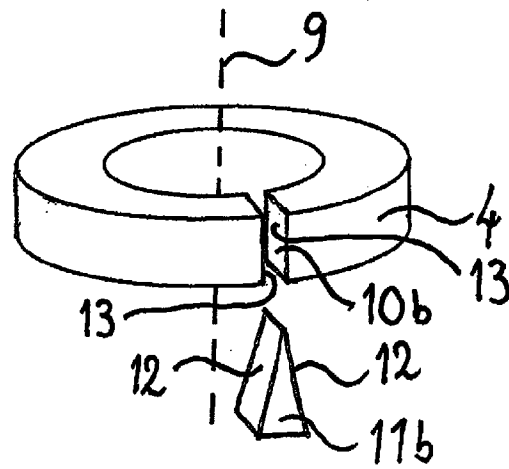


Fig 3

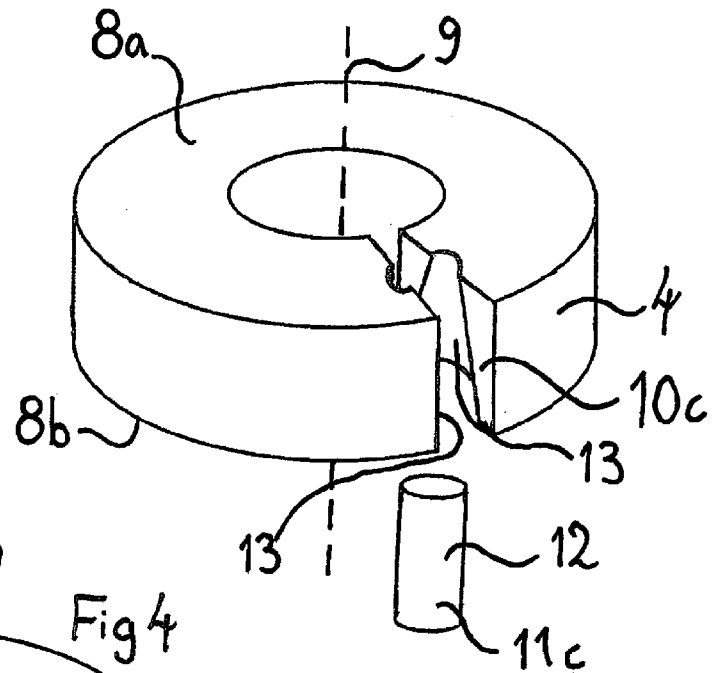


Fig 4





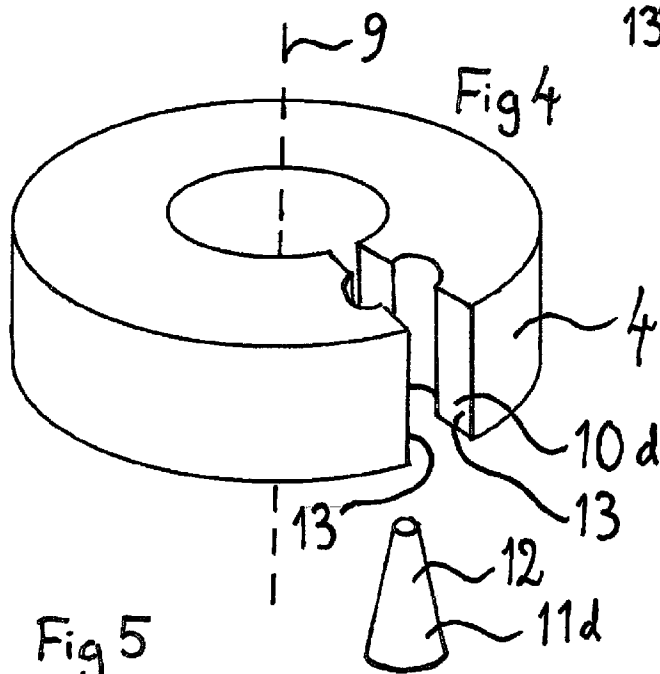


Fig 5

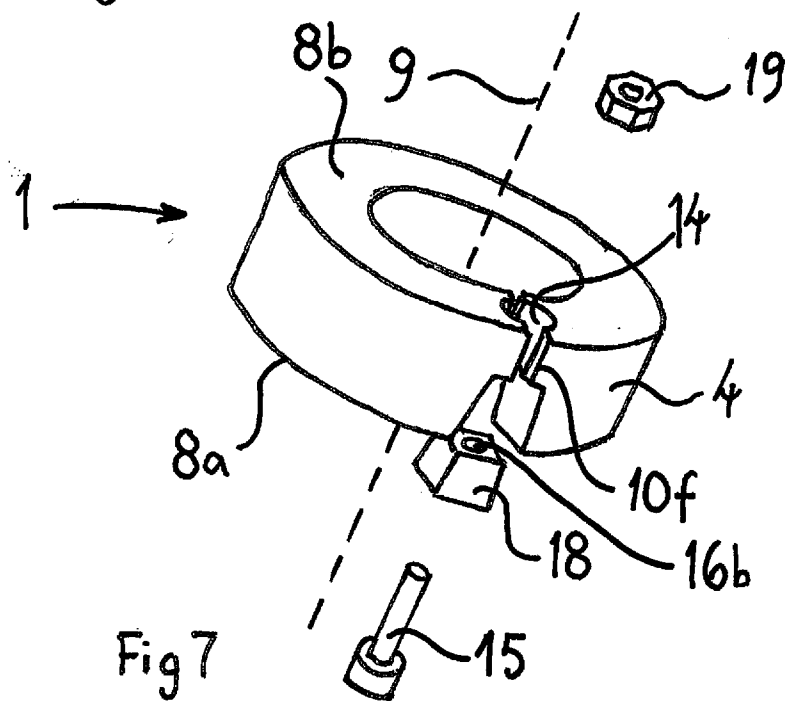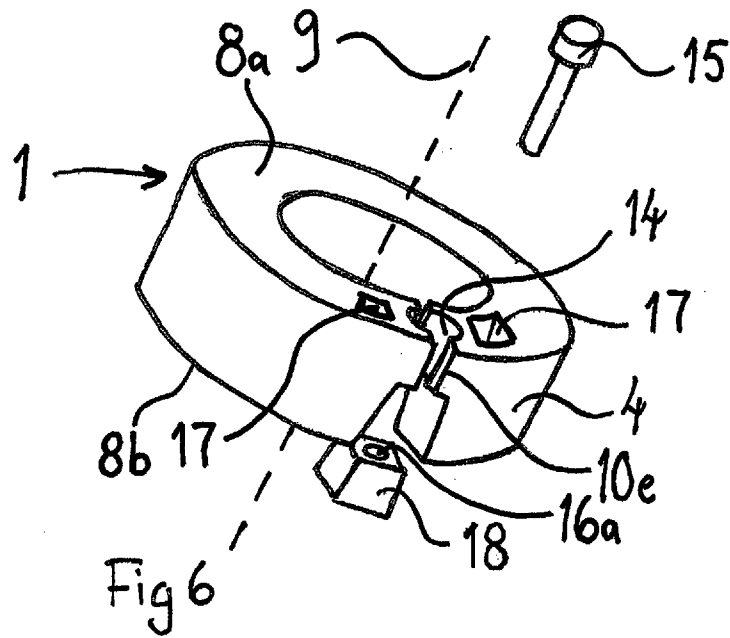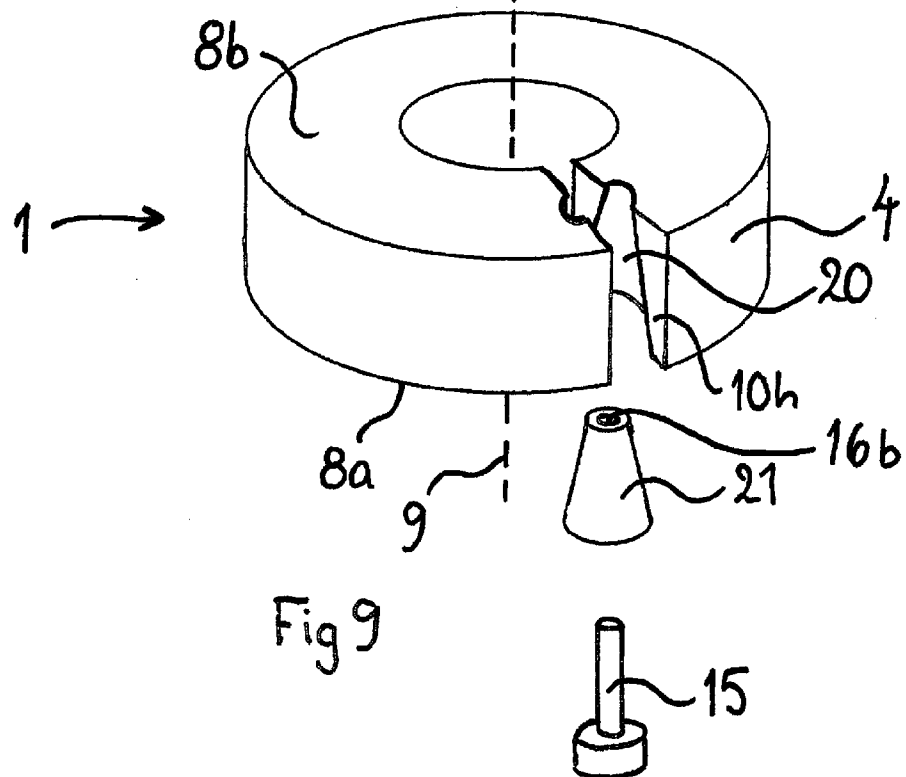

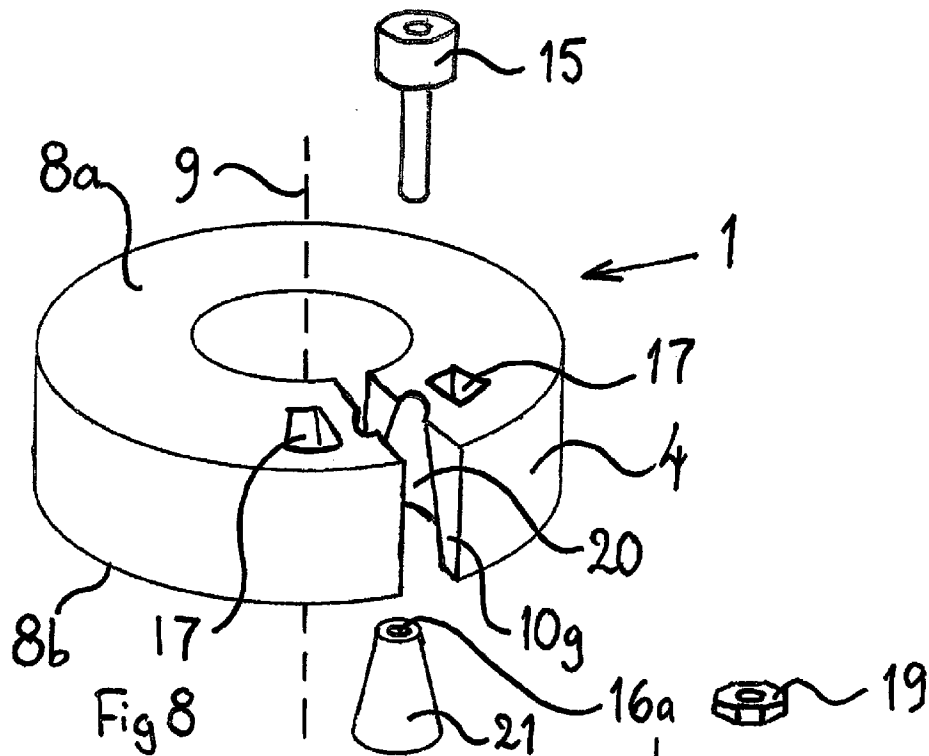

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/055472

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01H33/42

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01H F16L F16C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 26 54 753 A1 (LICENTIA GMBH LICENTIA GMBH [DE]) 8 June 1978 (1978-06-08) the whole document	1-14
A	US 4 250 927 A (NEWBURG ARTHUR G) 17 February 1981 (1981-02-17) the whole document	1-14
A	EP 0 141 708 A (MERLIN GERIN [FR]) 15 May 1985 (1985-05-15) the whole document	1-14

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 May 2010

Date of mailing of the international search report

27/05/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ruppert, Christopher

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/055472

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 2654753	A1	08-06-1978	NONE	
US 4250927	A	17-02-1981	NONE	
EP 0141708	A	15-05-1985	DE 3465825 D1 FR 2553927 A1 US 4562321 A	08-10-1987 26-04-1985 31-12-1985