



- (51) **International Patent Classification:**
H04B 5/00 (2006.01) *H04L 29/08* (2006.01)
- (21) **International Application Number:**
PCT/US2018/047694
- (22) **International Filing Date:**
23 August 2018 (23.08.2018)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
15/697,126 06 September 2017 (06.09.2017) US
- (71) **Applicant:** SONY INTERACTIVE ENTERTAINMENT LLC [US/US]; 2207 Bridgepointe Parkway, San Mateo, California 94404 (US).
- (72) **Inventor:** CALABRESE, Thomas; 2207 Bridgepointe Parkway, San Mateo, California 94404 (US).
- (74) **Agent:** HANKS, Mackenzie et al.; Carr & Ferrell LLP, 120 Constitution Drive, Menlo Park, California 94025 (US).

KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

(54) **Title:** SMART TAGS WITH MULTIPLE INTERACTIONS

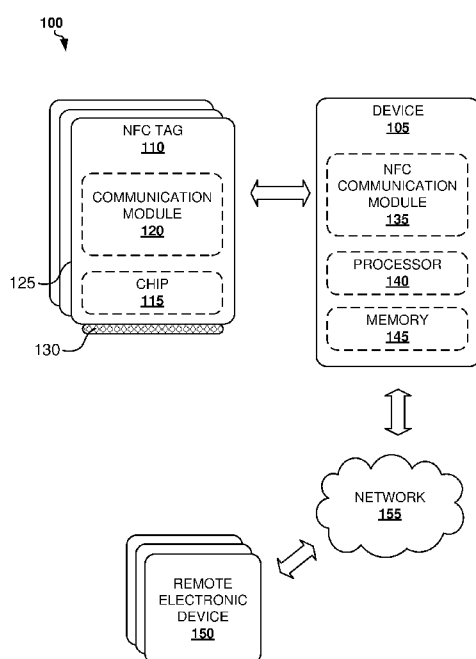


FIG. 1

(57) **Abstract:** A method for Near Field Communication (NFC) based interactions can be implemented by a device when it is placed near an NFC tag and receives an electromagnetic signal associated with the NFC tag. The device retrieves the identifier of the NFC tag from the electromagnetic signal and, based on the identifier, the device can generate a first command. Furthermore, the device can identify a qualifying event, such as a predetermined orientation of the device. The device then generates a second command in response to the identification of the qualifying event. Each of the first and second command can cause a change in settings of the device, switching an operating mode of the device, activating/deactivating an application, enabling/disabling a feature of an application, and sending an instruction to a remote electronic device.



SMART TAGS WITH MULTIPLE INTERACTIONS

BACKGROUND

Technical Field

[0001] This disclosure generally relates to interactions of Near Field Communication (NFC) tags with devices (e.g., mobile devices). More particularly, this disclosure relates to devices and method for NFC-based interactions that involve generating one or more commands by the devices based on detecting one or more NFC tags by the devices and determining one or more qualifying events by the devices.

Description of Related Art

[0002] The use of NFC tags, such as those that interact with smartphones, have become common in many aspects of human life as they enhance the functionality of a device (e.g., a mobile device). For example, NFC tags can be used to gain access to a building, grant an entitlement, direct a user to a website, make a payment, open an application, etc. An NFC tag is typically write protected and includes unique information that determines the action performed when a mobile device or reader interacts with the tag. Devices will typically read an NFC tag once and perform one action, limiting the functionality of the NFC tag. In addition, NFC chips are being built into an increasing number of devices and can also be implanted into individuals. Thus, improvements to interactions with NFC tags and NFC chips are needed.

SUMMARY

[0003] This section is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description section. This summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter. The following concepts and aspect of the disclosure are designed to solve at least some drawbacks known in the art. The discussion of devices include mobile devices, and the discussion of applications include mobile applications.

[0004] In one embodiment of this disclosure, there is provided a method for NFC-based interactions. The method can comprise receiving, by a device, an electromagnetic signal of a NFC tag when the device is within a first predetermined distance from the NFC tag, retrieving, by the device, an identifier of the NFC tag from the electromagnetic signal of the NFC tag, and, based on the identifier, generating, by the device, a first command, wherein the first command is configured to cause performing one or more of the following: change at least one setting of the device, switch at least one of operating modes of the device, activate at least one application, deactivate at least one application, enable at least one feature of at least one application, disable at least one feature of at least one application, and send a first instruction to at least remote electronic device.

[0005] The method can further include identifying, by the device, a qualifying event before or after the first command is generated, and, based on the identification of the qualifying event, generating, by the device, a second command, wherein the second command is generated after the first command, and wherein the second command is configured to cause performing one or more of the following: change at least one of the settings of the device, switch at

least one of the operating modes of the device, activate at least one of the applications, deactivate at least one of the applications, enable at least one feature of at least one of the applications, disable at least one feature of at least one of the applications, and send a second instruction to at least one of the remote electronic devices.

[0006] In certain embodiments, the method may further comprise suppressing, by the device, the generation or use of the first command when the qualifying event is identified. In some embodiments, the identification of the qualifying event includes determining, by the device, that the device is located within the first predetermined distance from the NFC tag for a predetermined period. In other embodiments, the identification of the qualifying event can include determining, by the device, that the device is orientated substantially upside down such that a display of the device is substantially parallel to the ground and faces the ground.

[0007] In yet other embodiments, the identification of the qualifying event can include determining, by the device, that the device is locked. In yet other embodiments, the identification of the qualifying event can include determining, by the device, that the device is unlocked. In yet other embodiments, the identification of the qualifying event can include determining, by the device, that the device is located within a second predetermined distance from a predetermined geographical location associated with the identifier of the NFC tag.

[0008] In certain embodiments, the method may further comprise providing, by the device, a first notification to a user when the first command is generated or to be generated by the device. In certain embodiments, the method may further comprise providing, by the device, a second notification to the user

when the second command is generated or about to be generated by the device. Moreover, in some embodiments, the first notification is a vibrational notification generated by the device, and the second notification is a doubled vibrational notification generated by the device.

[0009] In another aspect of this disclosure, there is provided a device. The device comprises an NFC communication module configured to wirelessly communicate with one or more NFC tags, a processor, and a memory storing processor-executable codes. The processor can be configured to implement the following operations upon executing the processor-executable codes stored by the memory: cause reading of an electromagnetic signal of one of the NFC tags when the device is within a first predetermined distance from the NFC tag, cause retrieving an identifier of the NFC tag from the electromagnetic signal of the NFC tag, based on the identifier, cause generating a first command, wherein the first command is configured to cause performing one or more of the following: change at least one setting of the device, switch at least one of operating modes of the device, activate at least one of applications, deactivate at least one of the applications, enable at least one feature of at least one of the applications, disable at least one feature of at least one of the applications, and send a first instruction to at least one of remote electronic devices; cause identifying a qualifying event before or after the first command is generated; and, based on the identification of the qualifying event, cause generating a second command, wherein the second command is generated after the first command, and wherein the second command is configured to cause performing one or more of the following: change at least one of the settings of the device, switch at least one of the operating modes of the device, activate at least one of the applications, deactivate at least one of the applications, enable at least one

feature of at least one of the applications, disable at least one feature of at least one of the applications, and send a second instruction to at least one of the remote electronic devices.

[0010] In other embodiments, an NFC chip can be on the person, as an adhesive or wearable device. An NFC chip can be implanted within a person. An NFC tag can also be used to control certain actions within a video game, depending on the location of a controller relative to the user with the NFC tag, as well as on the manner in which the controller is being handled by the user.

[0011] In another embodiment, the implanted or wearable NFC chip can be used as an authentication device for a laptop, a device, a door lock, or a portable lock such as one for a bicycle or locker, in combination with a series of interactions that can be used to enforce dual factor authentication.

[0012] In yet another aspect of the disclosure, there is provided a non-transitory processor-readable medium having instructions stored thereon, which when executed by one or more processors, cause the one or more processors to implement the above-outlined method for NFC-based interaction.

[0013] Additional objects, advantages, and novel features of the examples will be set forth in part in the description, which follows, and in part will become apparent to those skilled in the art upon examination of the following description and the accompanying drawings or may be learned by production or operation of the examples. The objects and advantages of the concepts may be realized and attained by means of the methodologies, instrumentalities and combinations particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] Embodiments are illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar elements.

[0015] FIG. 1 shows a block diagram illustrating a system for providing NFC-based interactions.

[0016] FIG. 2 is a process flow diagram showing a method for NFC-based interactions.

[0017] FIG. 3 shows an example computer system that can be used to implement at least some operations of a method for NFC-based interactions.

[0018] Corresponding reference characters indicate corresponding components throughout the several views of the drawings. Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of various embodiments of the present disclosure. In addition, common but well-understood elements that are useful or necessary in a commercially feasible embodiment are often not depicted in order to facilitate a less obstructed view of these various embodiments of the present disclosure.

DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS

[0019] The present disclosure generally relates to systems and methods for providing or improving interaction with a device based on NFC tags. NFC tags can be also referred to as “smart tags” or Radio-Frequency Identification (RFID) tags, and the like. NFC tags can be implemented as stickers, key fobs, or in any other similar manner so that they can be fixed, mounted, connected, or otherwise coupled to certain items indoors or outdoors. For example, NFC stickers can be placed near a bed, on a kitchen table, door, inside vehicle, and the like. A device includes mobile devices, and an application includes mobile applications.

[0020] To interact with NFC tags, a user can use a device, such as a smartphone, which has a NFC communication module configured to wirelessly communicate with one or more NFC tags when the device is in a vicinity of NFC tags (e.g., at a distance less than about 2 inches). Each NFC tag can be uniquely identified as it bears a unique identifier. When the device reads an electromagnetic signal generated by the NFC tag, the device can detect or retrieve the unique identifier of the NFC tag. Furthermore, as a response to the identification of the unique identifier of the NFC tag, the device can perform pre-programmed operations associated with the unique identifier. The pre-programmed operations can cause a change in settings of the device, cause switching between operating modes of the device, cause activating/deactivating of an application, cause enabling/disabling a feature of the application, or cause sending an instruction to a remote electronic device. For example, placing the device in a vicinity of one of the NFC tags coupled to a couch, could activate a remote control application on the device to enable a remote control application to control a television (TV) device by the user. In another example, placing the device close to another NFC tag attached to a refrigerator can activate a tracking

feature of the device or application to track amount of water that the user drinks.

[0021] Each NFC tag includes a passively emitting device not requiring electrical power as it emits signals in response to a wireless signal received from the device. In some example embodiments, the longest side of the NFC tag can be, optionally, of about one inch or less. NFC tags can be of different colors such as white, black, red, blue, green, yellow, metallic, transparent, and so forth. Furthermore, each tag can include a chip and a communication module having a coil or an antenna. The chip can be configured to cause the communication module to emit a certain electromagnetic signal bearing a unique identifier of an NFC tag, for example, as a response to a received signal from a device. Each NFC tag can include an adhesive layer so that it can be used as a sticker. Moreover, users can secure NFC tags with magnets, pins, or clips so that they can be easily transportable from one location to another.

[0022] The device can be programmed before it can interact with NFC tags. To these ends, after placing the NFC tag at a desired location, the user can open a certain application and place the device near the NFC tag. The user would need to pre-program and indicate what actions or operations the device is to perform upon sensing the electromagnetic signal bearing the unique identifier of the NFC tag. For example, the user can set up IFTTT commands to be executed upon sensing the electromagnetic signal bearing the unique identifier of the NFC tag. The user can also set up the device such that the presence of the NFC tag would open and perform actions by one or more specific applications of the device. Moreover, two or more actions can be available for every NFC tag. For example, a first action can initiate with a tap or placement of the device in a vicinity of an NFC tag. The device can send a notification such as a vibrational notification when the first action is successfully initiated or

completed or about to be initiated.

[0023] Furthermore, upon detection of certain qualifying event, a second action can be initiated by the device. For instance, if the user holds the device over the NFC tag after the first notification for a predetermined period, the first action can be suppressed and the second action can be initiated instead of the first action. In this case, the device can notify the user with a second notification such as a double vibration. Confirmations (vibrations or audible beeps) can be enabled or disabled for each NFC tag individually. After the NFC tag is registered with the user's device, the user can move the NFC tag and/or set it to perform other operations without the need to re-register the NFC tag with the device. In some embodiments, the users can also initiate actions directly on the application for all of their registered NFC tags.

[0024] The following describes some example scenarios of using NFC tags to cause implementations of certain predetermined actions by a device. In one example, an NFC tag can be added to a magnet to be placed on a refrigerator. When a user taps a device on the NFC tag, it causes a fitness tracking application or nutrition tracking application to add up a cup of water to a user's account. However, if the user holds the device near the NFC tag for a predetermined period, the device causes the opening of a food tracking form of the nutritional application instead of adding a cup of water. In another example, an NFC tag can be added to a pin to be placed on a shirt of a user such that when the user places his mobile device close to the NFC tag, it causes the opening of a favorite mobile game or another application.

[0025] In an alternative embodiment, when the NFC tag is placed on a couch, the device can open a remote control application if the device comes into close contact with the NFC tag. In yet additional example, a NFC tag can be

glued to a clip. The clip can be attached to food packaging such as a snack box. When the user taps the mobile device over the NFC tag, the device can automatically record the number of snacks the user eats. If the NFC tag is placed inside a car, the application can automatically cause opening a garage door when the device comes into a close proximity of the NFC tag.

[0026] According to some embodiments, there can be some additional ways to interact with NFC tags, which can cause implementation of one or more actions upon detecting NFC tags by a device and upon identifying one of a plurality of qualifying events. The qualifying events can be as follows: a device taps a NFC tag (e.g., a brief touch of the NFC tag by the device), an orientation of the device (e.g., upside down), a state of the device (e.g., locked or unlocked), a period of holding the device close to the NFC tag, a geographical location of the device (e.g., it can be determined if the device is close to a predetermined location or item).

[0027] The following detailed description of embodiments includes references to the accompanying drawings, which form a part of the detailed description. Approaches described in this section are not prior art to the claims and are not admitted to be prior art by inclusion in this section. Reference throughout this specification to “one embodiment,” “an embodiment,” “some embodiments,” “some implementations” or similar language means that a particular feature, structure, or characteristic described in connection with an example implementation is included in at least one embodiment of the present disclosure. Thus, appearances of the phrases “in one embodiment,” “in an embodiment,” “in some embodiments,” and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

[0028] Furthermore, the described features, structures, or characteristics of

embodiments may be combined in any suitable manner in one or more implementations. In the following description, numerous specific details are provided, such as examples of programming, software modules, user selections, network transactions, hardware modules, hardware circuits, hardware chips, etc., to provide a thorough understanding of embodiments. One skilled in the relevant art will recognize, however, that the embodiments can be practiced without one or more of the specific details, or with other methods, components, materials, and so forth. In other instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of the disclosure.

[0029] Aspects of the embodiments of this disclosure will now be presented with reference to accompanying drawings which show blocks, components, circuits, steps, operations, processes, algorithms, and the like, collectively referred to as “elements” for simplicity. These elements may be implemented using electronic hardware, computer software, or any combination thereof. Whether such elements are implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system. By way of example, an element, or any portion of an element, or any combination of elements may be implemented with a “processing system” that includes one or more processors. Examples of processors include microprocessors, microcontrollers, Central Processing Units (CPUs), digital signal processors (DSPs), field programmable gate arrays (FPGAs), programmable logic devices (PLDs), state machines, gated logic, discrete hardware circuits, and other suitable hardware configured to perform various functions described throughout this disclosure. One or more processors in the processing system may execute software, firmware, or middleware (collectively

referred to as “software”). The term “software” shall be construed broadly to mean processor-executable instructions, instruction sets, code segments, program code, programs, subprograms, software components, applications, software applications, software packages, routines, subroutines, objects, executables, threads of execution, procedures, functions, and the like, whether referred to as software, firmware, middleware, microcode, hardware description language, or otherwise.

[0030] Accordingly, in one or more embodiments, the functions described herein may be implemented in hardware, software, or any combination thereof. If implemented in software, the functions may be stored on or encoded as one or more instructions or code on a non-transitory computer-readable medium. Computer-readable media includes computer storage media. Storage media may be any available media that can be accessed by a computer. By way of example, and not limitation, such computer-readable media can comprise a random-access memory (RAM), a read-only memory (ROM), an electrically erasable programmable ROM (EEPROM), compact disk ROM (CD-ROM) or other optical disk storage, magnetic disk storage, solid state memory, or any other data storage devices, combinations of the aforementioned types of computer-readable media, or any other medium that can be used to store computer executable code in the form of instructions or data structures that can be accessed by a computer.

[0031] For purposes of this patent document, the terms “or” and “and” shall mean “and/or” unless stated otherwise or clearly intended otherwise by the context of their use. The term “a” shall mean “one or more” unless stated otherwise or where the use of “one or more” is clearly inappropriate. The terms “comprise,” “comprising,” “include,” and “including” are interchangeable and not intended to be limiting. For example, the term “including” shall be

interpreted to mean “including, but not limited to.”

[0032] The term “mobile device” shall be construed to mean any electronic device configured to process digital data and wirelessly communicate with one or more NFC tags using NFC or similar technology. By way of example, and not limitation, some examples of mobile devices include a user device, cellular phone, user equipment, terminal, mobile phone, smart phone, Internet phone, tablet computer, laptop computer, personal digital assistant, music player, multimedia player, gaming device, game console, and so forth.

[0033] The term “remote electronic device” shall be construed to mean any electronic device configured to implement one or more actions based on instructions or commands generated by a mobile device. By way of example, and not limitation, some examples of remote electronic devices include a computing device, navigation system, television (TV) device, set-top box, multimedia system, multimedia player, display, speaker, network device, modem, network router, network hub, home gateway, broadband gateway, network appliance, access gateway, networking switch, entertainment system, infotainment system, in-vehicle computer, home appliance (e.g., a dish washing machine, refrigerator, oven, etc.), “smart” appliance, electronically operated door, access control system, security system, programmable electrical socket, programmable electrical switch, dimmer, intercom, telephone, fax machine, server, web service, online service, electrical elements of “smart” home, Internet-of-Things devices, and the like.

[0034] The term “NFC tag” shall be construed to mean an electronic apparatus configured to actively or passively emit an electromagnetic signal bearing a unique identifier of NFC tag and, optionally, other information. Passive NFC tags are powered by and read at short ranges via magnetic fields so

that they emit electromagnetic waves conveying certain information. In other words, the passive NFC tag, when powered, emits an electromagnetic signal. The passive NFC tag can be powered by electromagnetic field generated by a mobile device. Active NFC tags are powered by a local power source, such as a battery, and repeatedly emit an electromagnetic signal bearing a unique identifier of NFC tag and, optionally, other information. Some examples of NFC tags can include, but not limited to, RFID tags, RFID labels, transponders, Wi-Fi emitter tags, Bluetooth emitter tags, Wi-Fi beacons, Bluetooth beacons, and so forth.

[0035] Referring now to the drawings, example embodiments are described. The drawings are schematic illustrations of idealized example embodiments. Thus, the example embodiments discussed herein should not be construed as limited to the particular illustrations presented herein, rather these example embodiments can include deviations and differ from the illustrations presented herein.

[0036] FIG. 1 shows a block diagram illustrating a system 100 for providing NFC-based interactions according to one example embodiment. System 100 includes a device 105, such as a smart phone, which can interact with one or more NFC tags 110. Each NFC tag 110 can include at least a chip 115, such as a microcontroller, microprocessor, circuit, logic, and the like. Each NFC tag 110 can also include a communication module 120 including, for example, an antenna or coil. The NFC tag 110 may also not include the communication module 120. If the NFC tag 110 does contain the communication module 120, the communication module 120 can be configured to receive a first electromagnetic signal originated from device 105 (e.g., a signal to power NFC tag 110 and request a response). Communication module 120 can be also configured to transmit or emit a second electromagnetic signal for further reception by device

105. The second electromagnetic signal can be generated as a response to the first electromagnetic signal. The second electromagnetic signal can include a unique identifier of NFC tag 110 and, optionally, other information such as predetermined commands, instructions, location information, and so forth. The elements of NFC tag 110, including chip 115 and communication module 120, can be arranged in a housing or substrate 125. Substrate 125 can be rigid or flexible. Each of NFC tags 110 can be also equipped with an adhesive layer 130 attached to an external side of housing or substrate 125. NFC tags 110 can be of any desired color and shape. For example, NFC tags 110 can be implemented as stickers or key fobs. NFC tags 110 can be placed, mounted, fixed, glued, attached, pinned, or otherwise connected to various items indoors or outdoors. For example, NFC tags 110 can be attached to apparel, furniture, vehicle, computer, building elements, and so forth.

[0037] Device 105 includes at least a NFC communication module 135, a processor 140, and a memory 145 for storing processor-executable instructions. Other elements of device 105 shall be evident from FIG. 3 and its respective description which follows. NFC communication module 135 is configured to communicate with NFC tag 110 for, at least, receiving the second electromagnetic signal. Communication between NFC communication module 135 and NFC tag 110 can be successful only when NFC tag 110 is within a predetermined distance from NFC communication module 135, such as, less than ten inches, preferably less than two inches. NFC communication module 135 can also generate the first electromagnetic signal and emit it for further receipt by NFC tags 110. Upon receipt of the second electromagnetic signal by device 105, the second electromagnetic signal can be processed by processor 140 to retrieve the unique identifier of NFC tag 110. Further, processor 140 can execute processor-

executable instructions stored in memory 145 to cause implementation of one or more predetermined or preprogrammed actions associated with the unique identifier as a response to receipt of the second electromagnetic signal.

[0038] Processor 140 can also identify one or more identifying events, such as a period of presence of device 105 near a particular NFC tag 110, determination of a current geographical location of device 105, determination of a current orientation of device 105, determination of a current status of device 105 (e.g., if it is locked or unlocked), and so forth. The determination of geographical location of device 105 can be implemented with the help of a Global Positioning System (GPS) module or another common device for determining a geographical location, which can be installed in device 105. The determination of current orientation of device 105 can be determined with the help of inertial sensors, gyroscopes, or motion sensors, which can be installed in device 105. Determination of a period indicating how long device 105 is located near a particular NFC tag 110 can be executed with the help of a clock, which can be installed in device 105.

[0039] As indicated above, device 105 can execute one or more actions as response to detection of NFC tag 105 or detection of one of qualifying event. Some examples of these “actions” include, but not limited to, causation of changing a setting of the device, causation of switching an operating mode of the device, causation of activating/deactivating the application, causation of enabling/disabling a feature of the application, and the like. In some embodiments, an action can be a causation of sending a predetermined instruction to one of more remote electronic device 150. The instruction can be sent via a communications network 155. Communications network 155 can refer to any wired, wireless, or optical networks including, for example, the Internet,

intranet, local area network (LAN), Personal Area Network (PAN), Wide Area Network (WAN), Virtual Private Network (VPN), cellular phone networks (e.g., packet switching communications network, circuit switching communications network), Bluetooth radio, Ethernet network, an IEEE 802.11-based radio frequency network, IP communications network, or any other data communication network utilizing physical layers, link layer capability, or network layer to carry data packets, or any combinations of the above-listed data networks.

[0040] FIG. 2 is a process flow diagram showing a method 200 for NFC-based interaction according to an example embodiment. Method 200 may be performed by processing logic that may comprise hardware (e.g., decision-making logic, dedicated logic, programmable logic, application-specific integrated circuit (ASIC)), software (such as software run on a general-purpose computer system or a dedicated machine), or a combination of both. In one example embodiment, the processing logic refers to one or more elements of device 105 of FIG. 1. Below recited operations of method 200 may be implemented in an order different than described and shown in the figure. Moreover, method 200 may have additional operations not shown herein, but which can be evident for those skilled in the art from the present disclosure. Method 200 may also have fewer operations than outlined below and shown in FIG. 2.

[0041] At operation 205, device 105 receives an electromagnetic signal of NFC tag 110 when device 105 is within a first predetermined distance from the NFC tag (e.g., less than two inches). The electromagnetic signal of NFC tag 110 can be received in response to another electromagnetic signal generated by device 105.

[0042] At operation 210, device 105 retrieves an identifier of NFC tag 110 from the electromagnetic signal received at operation 205. The identifier can uniquely identify NFC tag 110. Device 105 can include one or more settings associated with the identifier of NFC tag 110.

[0043] At operation 215, device 105 generates a first command based on the identifier. The first command is configured to cause performing one or more of the following: change at least one setting of device 105, switch at least one of operating modes of device 105, activate at least one of the applications of device 105, deactivate at least one of the applications of device 105, enable at least one feature of at least one of the applications of device 105, disable at least one feature of at least one of the applications of device 105, and send a first instruction to at least one of remote electronic devices 150. Further, at operation 215, device 105 can generate a first notification (such as an audio alert, displayable message, or vibration alert) and deliver it to the user prior to or after the generation of first command.

[0044] At operation 220, device 105 identifies a qualifying event before or after the first command is generated. In some embodiments, the identification of the qualifying event can include determining, by device 105, that device 105 is located within the first predetermined distance from NFC tag 110 for a predetermined period (e.g., 1, 2, 3, 4, 5 or more seconds). In some embodiments, the identification of the qualifying event can include determining, by device 105, that device 105 is orientated substantially upside down such that a display of device 105 is substantially parallel to and faces the ground. In some embodiments, the identification of the qualifying event can include determining, by device 105, that device 105 is locked. In some embodiments, the identification of the qualifying event can include determining, by device 105, that device 105

unlocked. In some embodiments, the identification of the qualifying event can include determining, by device 105, that device 105 is located within a second predetermined distance (e.g., less than 5 feet) from a predetermined geographical location associated with the identifier of NFC tag 110. This predetermined geographical location associated with the identifier can be, for example, a garage door, piece of furniture, a particular room or office in a building, outdoor location, vehicle, and so forth.

[0045] At operation 225, device 105 generates a second command based on the identification of the qualifying event. In one embodiment, the second command is generated after the first command is generated. In another embodiment, the second command is generated and the first command is suppressed upon identification of the qualifying event. The second command can be configured to cause performing one or more of the following: change at least one setting of device 105, switch at least one of operating modes of device 105, activate at least one of the applications of device 105, deactivate at least one of the applications of device 105, enable at least one feature of at least one of the applications of device 105, disable at least one feature of at least one of the applications of device 105, authenticate the identity of an individual, enable at least one or more additional immersive interactions with the at least one application, and send a second instruction to at least one of remote electronic devices 150. Further, at operation 225, device 105 can generate a second notification (such as an audio alert, displayable message, or a double vibration notification) and deliver it to the user prior to or after the generation of second command.

[0046] FIG. 3 is a high-level block diagram illustrating a computing device 300 suitable for implementing the methods described herein. In particular,

computing device 300 may be used for implementing the methods for NFC-based interaction as described above. Computing device 300 may include, be, or be an integral part of one or more of a variety of types of devices, such as a mobile device, among others. In some embodiments, computing device 300 can be regarded as an instance of device 105.

[0047] As shown in FIG. 3, computing device 300 includes one or more processors 310, memory 320, one or more mass storage devices 330, one or more output devices 350, one or more input devices 360, one or more network interfaces 370, one or more optional peripheral devices 380, and a communication bus 390 for operatively interconnecting the above-listed elements. Processors 310 can be configured to implement functionality and/or process instructions for execution within computing device 300. For example, processors 310 may process instructions stored in memory 320 or instructions stored on storage devices 330. Such instructions may include components of an operating system or software applications.

[0048] Memory 320, according to one example, is configured to store information within computing device 300 during operation. For example, memory 320 can store settings or pre-programmed commands associated with one or more NFC tags 110. Memory 320, in some example embodiments, may refer to a non-transitory computer-readable storage medium or a computer-readable storage device. In some examples, memory 320 is a temporary memory, meaning that a primary purpose of memory 320 may not be long-term storage. Memory 320 may also refer to a volatile memory, meaning that memory 320 does not maintain stored contents when memory 320 is not receiving power. Examples of volatile memories include RAM, dynamic random access memories (DRAM), static random access memories (SRAM), and other forms of volatile

memories known in the art. In some examples, memory 320 is used to store program instructions for execution by processors 310. Memory 320, in one example, is used by software applications or mobile applications. Generally, software or mobile applications refer to software applications suitable for implementing at least some operations of the methods as described herein.

[0049] Mass storage devices 330 can also include one or more transitory or non-transitory computer-readable storage media or computer-readable storage devices. For example, memory 330 can store instructions for processor 310, settings or pre-programmed commands associated with one or more NFC tags 110. In some embodiments, mass storage devices 330 may be configured to store greater amounts of information than memory 320. Mass storage devices 330 may be also configured for long-term storage of information. In some examples, mass storage devices 330 include non-volatile storage elements. Examples of such non-volatile storage elements include magnetic hard discs, optical discs, solid-state discs, flash memories, forms of electrically programmable memories (EPROM) or electrically erasable and programmable memories, and other forms of non-volatile memories known in the art.

[0050] Computing device 300 may also include one or more optional input devices 360. Input devices 360 may be configured to receive input from a user through tactile, audio, video, or biometric channels. Examples of input devices 360 may include a keyboard, keypad, mouse, trackball, touchscreen, touchpad, microphone, video camera, image sensor, fingerprint sensor, or any other device capable of detecting an input from a user or other source, and relaying the input to computing device 300 or components thereof.

[0051] Optional output devices 350 may be configured to provide output to a user through visual or auditory channels. Output devices 350 may include a

video graphics adapter card, display, such as liquid crystal display (LCD) monitor, light emitting diode (LED) monitor, or organic LED monitor, sound card, speaker, lighting device, projector, or any other device capable of generating output that may be intelligible to a user. Output devices 350 may also include a touchscreen, presence-sensitive display, or other input/output capable displays known in the art.

[0052] Computing device 300 can also include network interface 370. Network interface 370 can be utilized to communicate with external devices via one or more communications networks such as communications network 155 or any other wired, wireless, or optical networks. Network interface 370 may be a network interface card, such as an Ethernet card, an optical transceiver, a radio frequency transceiver, or any other type of device that can send and receive information. Network interface 370 can also include a NFC communication module 135 for communicating, sensing, or receiving data from NFC tags 110.

[0053] An operating system of computing device 300 may control one or more functionalities of computing device 300 or components thereof. For example, the operating system may interact with the software or mobile applications and may facilitate one or more interactions between the software/mobile applications and processors 310, memory 320, storage devices 330, input devices 360, output devices 350, and network interface 370. The operating system may interact with or be otherwise coupled to software applications or components thereof. In some embodiments, software or mobile applications may be included in the operating system.

[0054] Thus, methods and systems for NFC-based interactions have been described. Although embodiments have been described with reference to specific example embodiments, it will be evident that various modifications and

changes can be made to these example embodiments without departing from the broader spirit and scope of the present application. Accordingly, the specification and drawings are to be regarded in an illustrative rather than a restrictive sense.

CLAIMS

What is claimed is:

1. A method for Near Field Communication (NFC) based interaction, the method comprising:

receiving, by a device, an electromagnetic signal of a NFC tag when the device is within a first predetermined distance from the NFC tag;

retrieving, by the device, an identifier of the NFC tag from the electromagnetic signal of the NFC tag;

based on the identifier, generating, by the device, a first command, wherein the first command is configured to cause performing one or more of the following: change at least one setting of the device, switch at least one of operating modes of the device, activate at least one of applications, deactivate at least one of the applications, enable at least one feature of at least one of the applications, disable at least one feature of at least one of the applications, and send a first instruction to at least one of remote electronic devices;

identifying, by the device, a qualifying event before or after the first command is generated; and

based on the identification of the qualifying event, generating, by the device, a second command, wherein the second command is generated after the first command is generated, and wherein the second command is configured to cause performing one or more of the following: change at least one of the settings of the device, switch at least one of the operating modes of the device, activate at least one of the applications, deactivate at least one of the applications, enable at least one feature of at least one of the applications, disable at least one feature of at least one of the applications, and send a second instruction to at least one of the remote electronic devices.

2. The method of claim 1, further comprising suppressing, by the device, the generation or use of the first command when the qualifying event is identified.
3. The method of claim 1, wherein the identifying of the qualifying event includes determining, by the device, that the device is located within the first predetermined distance from the NFC tag for a predetermined period.
4. The method of claim 1, wherein the identifying of the qualifying event includes determining, by the device, that the device is orientated substantially

upside down such that a display of the device is substantially parallel to a ground and faces the ground.

5. The method of claim 1, wherein the identifying of the qualifying event includes determining, by the device, that the device is locked.
6. The method of claim 1, wherein the identifying of the qualifying event includes determining, by the device, that the device is unlocked.
7. The method of claim 1, wherein the identifying of the qualifying event includes determining, by the device, that the device is located within a second predetermined distance from a predetermined geographical location associated with the identifier of the NFC tag.
8. The method of claim 1, further comprising providing, by the device, a first notification to a user when the first command is generated or to be generated by the device.

9. The method of claim 8, further comprising providing, by the device, a second notification to the user when the second command is generated or to be generated by the device.
10. The method of claim 9, wherein the first notification is a vibrational notification generated by the device, and the second notification is a doubled vibrational notification generated by the device.
11. A device, comprising:
- a NFC communication module configured to wirelessly communicate with one or more NFC tags;
 - a processor; and
 - a memory storing processor-executable codes, wherein the processor is configured to implement the following operations upon executing the processor-executable codes stored by the memory:
 - cause reading an electromagnetic signal of one of the NFC tags when the device is within a first predetermined distance from the NFC tag;

cause retrieving an identifier of the NFC tag from the electromagnetic signal of the NFC tag;

based on the identifier, cause generating a first command, wherein the first command is configured to cause performing one or more of the following: change at least one setting of the device, switch at least one of operating modes of the device, activate at least one of applications, deactivate at least one of the applications, enable at least one feature of at least one of the applications, disable at least one feature of at least one of the applications, and send a first instruction to at least one of remote electronic devices;

cause identifying a qualifying event before or after the first command is generated; and

based on the identification of the qualifying event, cause generating a second command, wherein the second command is generated after the first command is generated, and wherein the second command is configured to cause performing one or more of the following: change at least one of the settings of the device, switch at least one of the operating modes of the device, activate at least one of the applications, deactivate at least one of the applications, enable at least one feature of at least one of

the applications, disable at least one feature of at least one of the applications, and send a second instruction to at least one of the remote electronic devices.

12. The device of claim 11, wherein the qualifying event is identified when it is determined that the device is located within the first predetermined distance from the NFC tag for a predetermined period.

13. The device of claim 11, wherein the qualifying event is identified when it is determined that the device is orientated substantially upside down such that a display of the device is substantially parallel to a ground and faces the ground.

14. The device of claim 11, wherein the qualifying event is identified when it is determined that the device is locked.

15. The device of claim 11, wherein the qualifying event is identified when it is determined that the device is unlocked.

16. The device of claim 11, wherein the qualifying event is identified when it is determined that the device is located within a second predetermined distance from a predetermined geographical location associated with the identifier of the NFC tag.

17. The device of claim 11, wherein the processor is further configured to implement the following operations upon executing the processor-executable codes stored by the memory: cause providing a first notification to a user when the first command is generated or to be generated by the device.

18. The device of claim 17, wherein the processor is further configured to implement the following operations upon executing the processor-executable codes stored by the memory: cause providing a second notification to the user when the second command is generated or to be generated by the device.

19. The device of claim 18, wherein the first notification is a vibrational notification generated by the device, and the second notification is a doubled vibrational notification generated by the device.

20. A non-transitory processor-readable medium having instructions stored thereon, which when executed by one or more processors, cause the one or more processors to implement a method for NFC based interaction, the method comprising:

receiving, by a device, an electromagnetic signal of a NFC tag when the device is within a first predetermined distance from the NFC tag;

retrieving, by the device, an identifier of the NFC tag from the electromagnetic signal of the NFC tag;

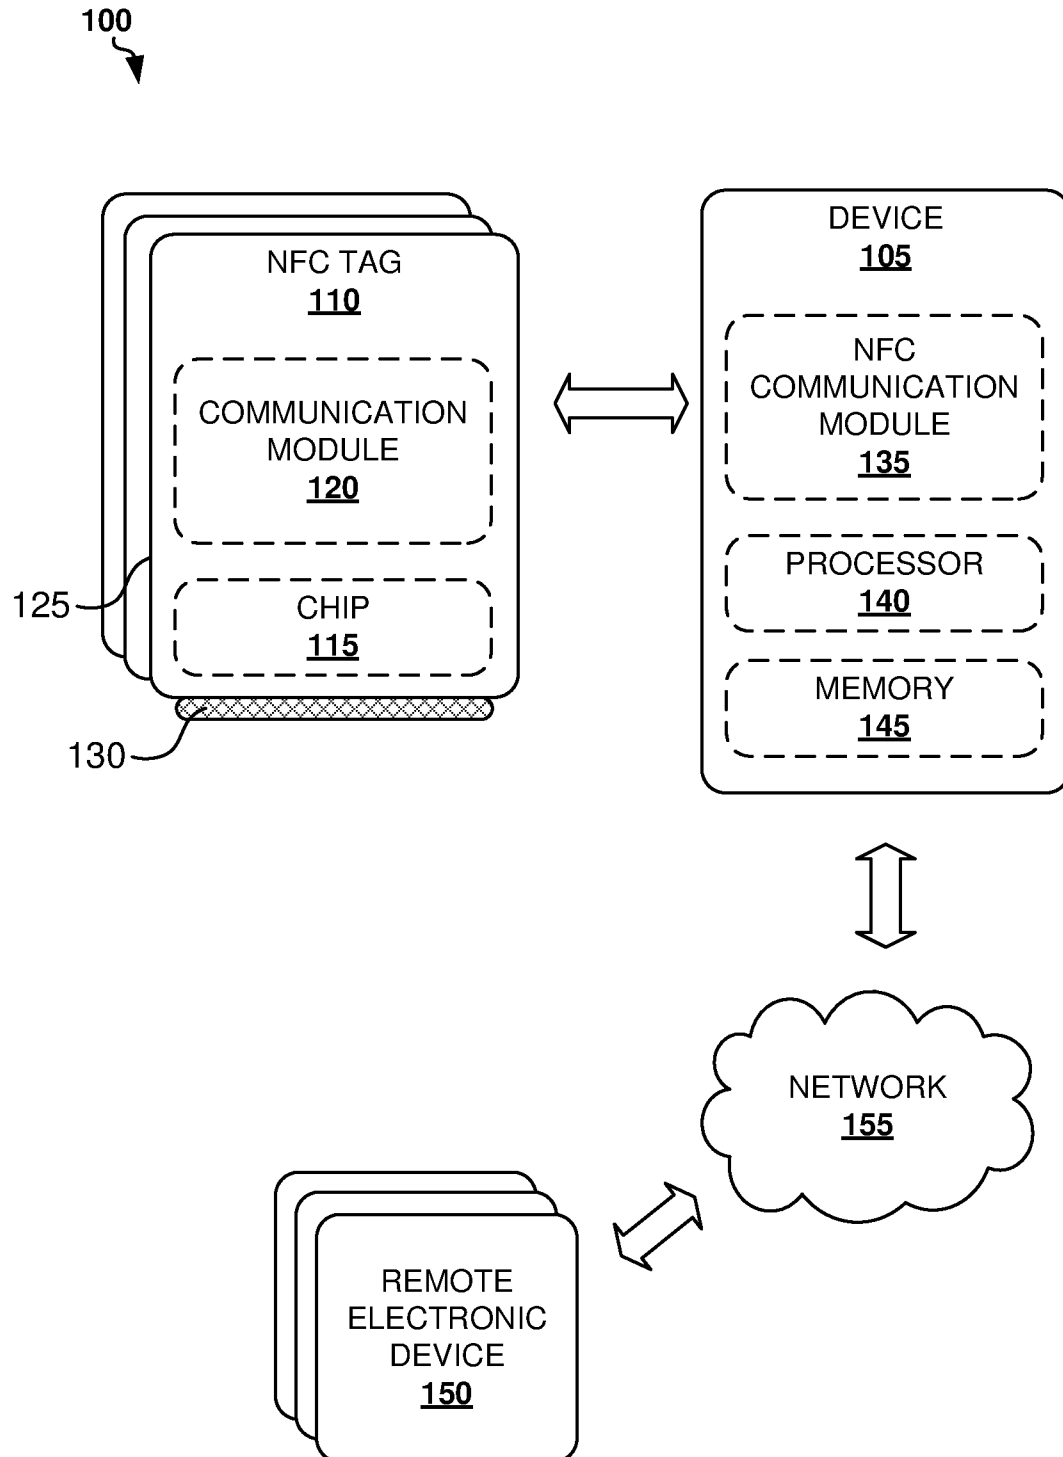
based on the identifier, generating, by the device, a first command, wherein the first command is configured to cause performing one or more of the following: change at least one setting of the device, switch at least one of operating modes of the device, activate at least one of applications, deactivate at least one of the applications, enable at least one feature of at least one of the applications, disable at least one feature of at least one of the applications, and send a first instruction to at least one of remote electronic devices;

identifying, by the device, a qualifying event before or after the first command is generated; and

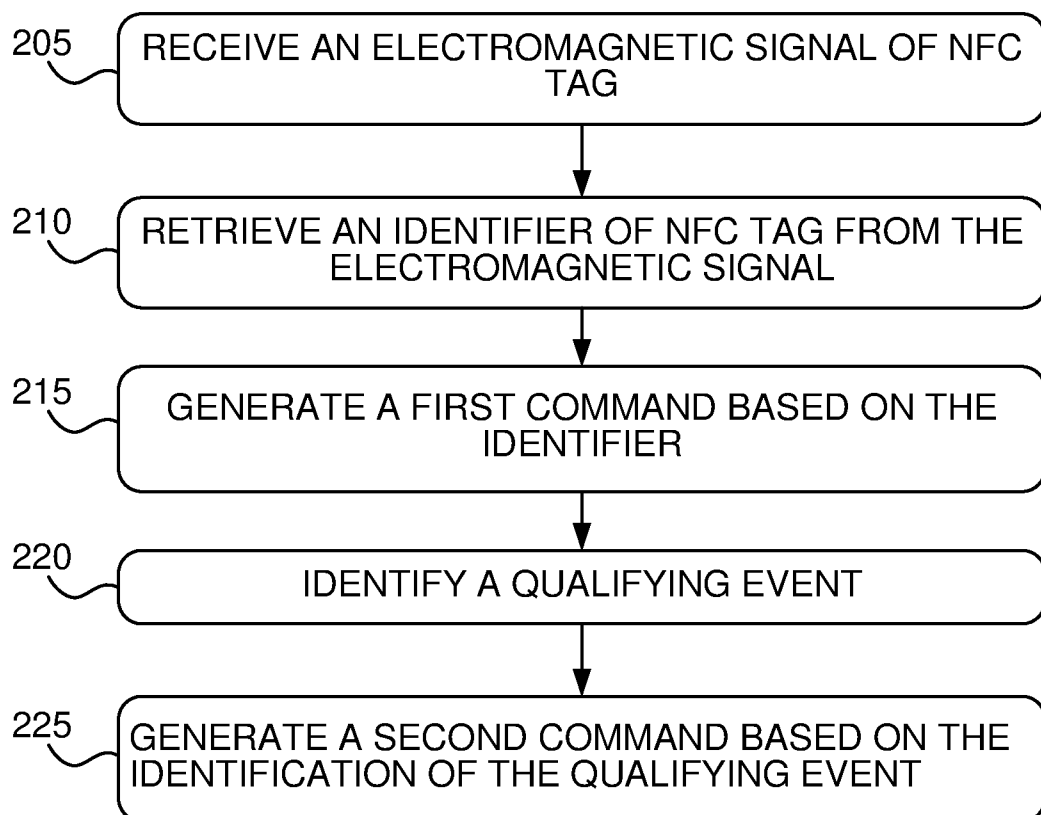
based on the identification of the qualifying event, generating, by the device, a second command, wherein the second command is generated after the

first command is generated, and wherein the second command is configured to cause performing one or more of the following: change at least one of the settings of the device, switch at least one of the operating modes of the device, activate at least one of the applications, deactivate at least one of the applications, enable at least one feature of at least one of the applications, disable at least one feature of at least one of the applications, and send a second instruction to at least one of the remote electronic devices.

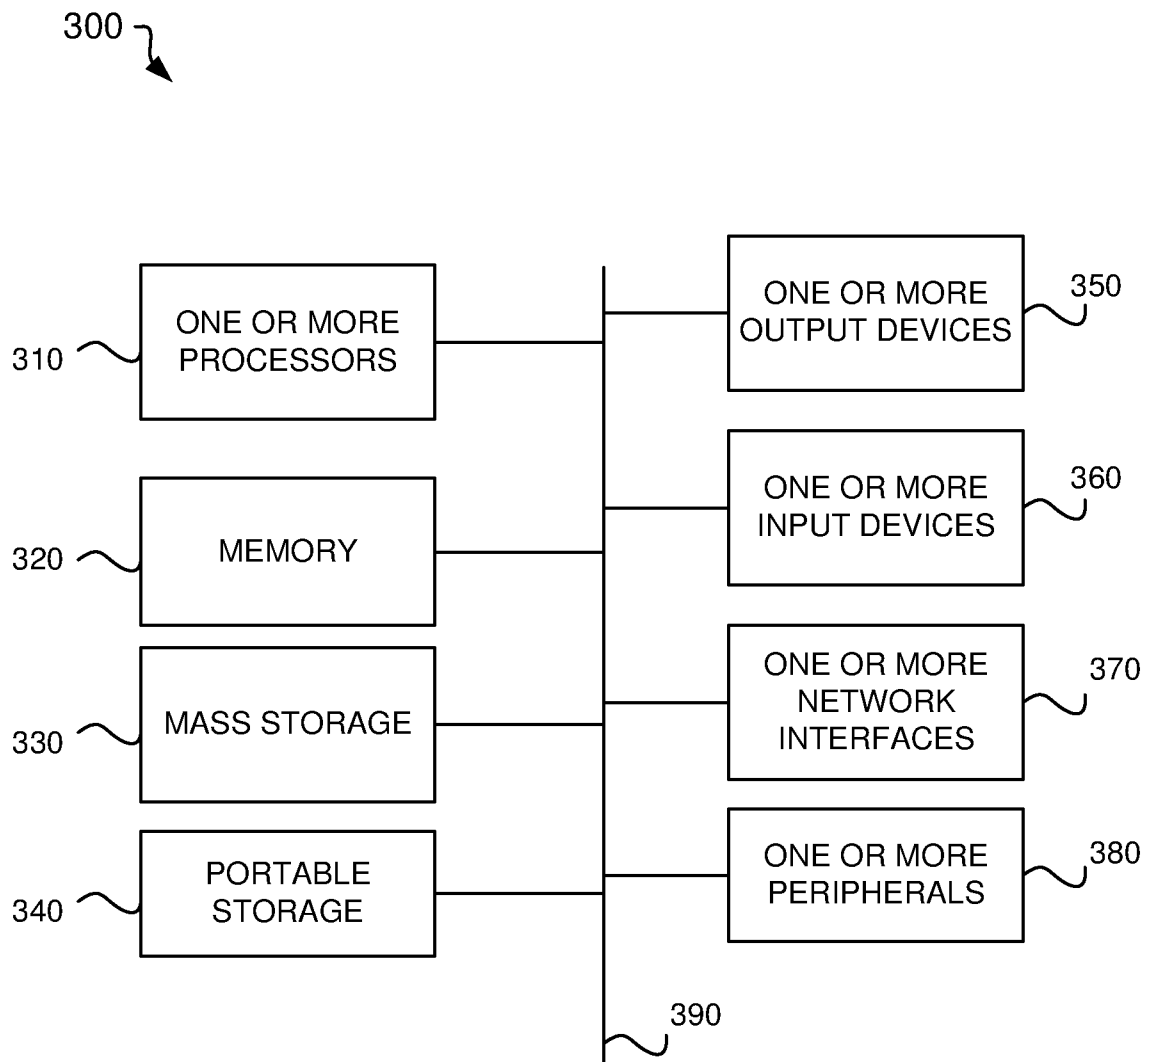
1/3

**FIG. 1**

2/3

200**FIG. 2**

3/3

**FIG. 3**

INTERNATIONAL SEARCH REPORT		International application No. PCT/US18/47694
A. CLASSIFICATION OF SUBJECT MATTER IPC: H04B 5/00(2006.01);H04L 29/08(2006.01) CPC: G06K 19/0723 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) CPC : Please See Continuation Sheet Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Please See Continuation Sheet		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2015/0304804 A1 (LOTITO) 22 October 2015 (22.10.2015), entire document.	1, 4, 11, 13 and 20 ----- 3, 5-7, 12 and 14-16
Y --- A	US 2014/0329613 A1 (SAVARESE et al.) 06 November 2014 (06.11.2014), entire document.	3 and 12 ----- 2, 8-10 and 17-19
Y --- A	US 2015/0347738 A1 (ULRICH et al.) 03 December 2015 (03.12.2015), entire document.	5, 6, 14 and 15 ----- 2, 8-10 and 17-19
☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
*	Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
"A"	document defining the general state of the art which is not considered to be of particular relevance	
"E"	earlier application or patent published on or after the international filing date	
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	
"O"	document referring to an oral disclosure, use, exhibition or other means	
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 19 September 2018 (19.09.2018)		Date of mailing of the international search report 21 SEP 2018
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US Commissioner for Patents P.O. Box 1450 Alexandria, Virginia 22313-1450 Facsimile No. (571) 273-8300		Authorized officer Harry C. Kim Telephone No. (571) 272-4300

INTERNATIONAL SEARCH REPORT		International application No. PCT/US18/47694
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y --- A	US 2007/0037605 A1 (LOGAN) 15 February 2007 (15.02.2007), entire document.	7 and 16 ----- 2, 8-10 and 17-19

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US18/47694

Continuation of B. FIELDS SEARCHED Item 1:

G06K 19/0723; H04B 5/0062; H04B 5/0031; H04B 5/0025; H04B 5/0068; H04W 4/008; H04W 4/023; H04W 4/02; H04W 4/025; H04W 4/026

Continuation of B. FIELDS SEARCHED Item 3:

EAST: US-PGPUB; USPAT; USOCR; FPRS; EPO; JPO; DERWENT; IBM_TDB

Search Terms: PROXIMITY, NFC, RFID, BLUETOOTH, WIFI, TAG, BEACON, LABEL, UNIQUE, ID, IDENTIFIER, ACTION, COMMAND, suppress\$3, notification, notif\$4, operation, predetermined, predefined, pre-determin\$3, pre-defin\$3, time, period, duration, interval, length, timing, distance, geographical, INITIAT\$3, BASED, SERVICE, furniture, room, location, associated, gps, terminat\$3, stop\$4, cancel\$4, first, orientation, gyroscope, disabl\$3, detection, gesture, movement, trigger, condition, range, vibrat\$5, confirming, confirmed, confirm, execut\$3, executed, generated, successful\$2, double, twice, qualifying, event