


Jan. 6, 1953

T. M. JABLON
BEAD CHAIN TYPE ARTICLE, OR KEY HOLDER, AND
DISPLAY MEANS THEREFOR
Filed Jan. 26, 1949

2,624,457

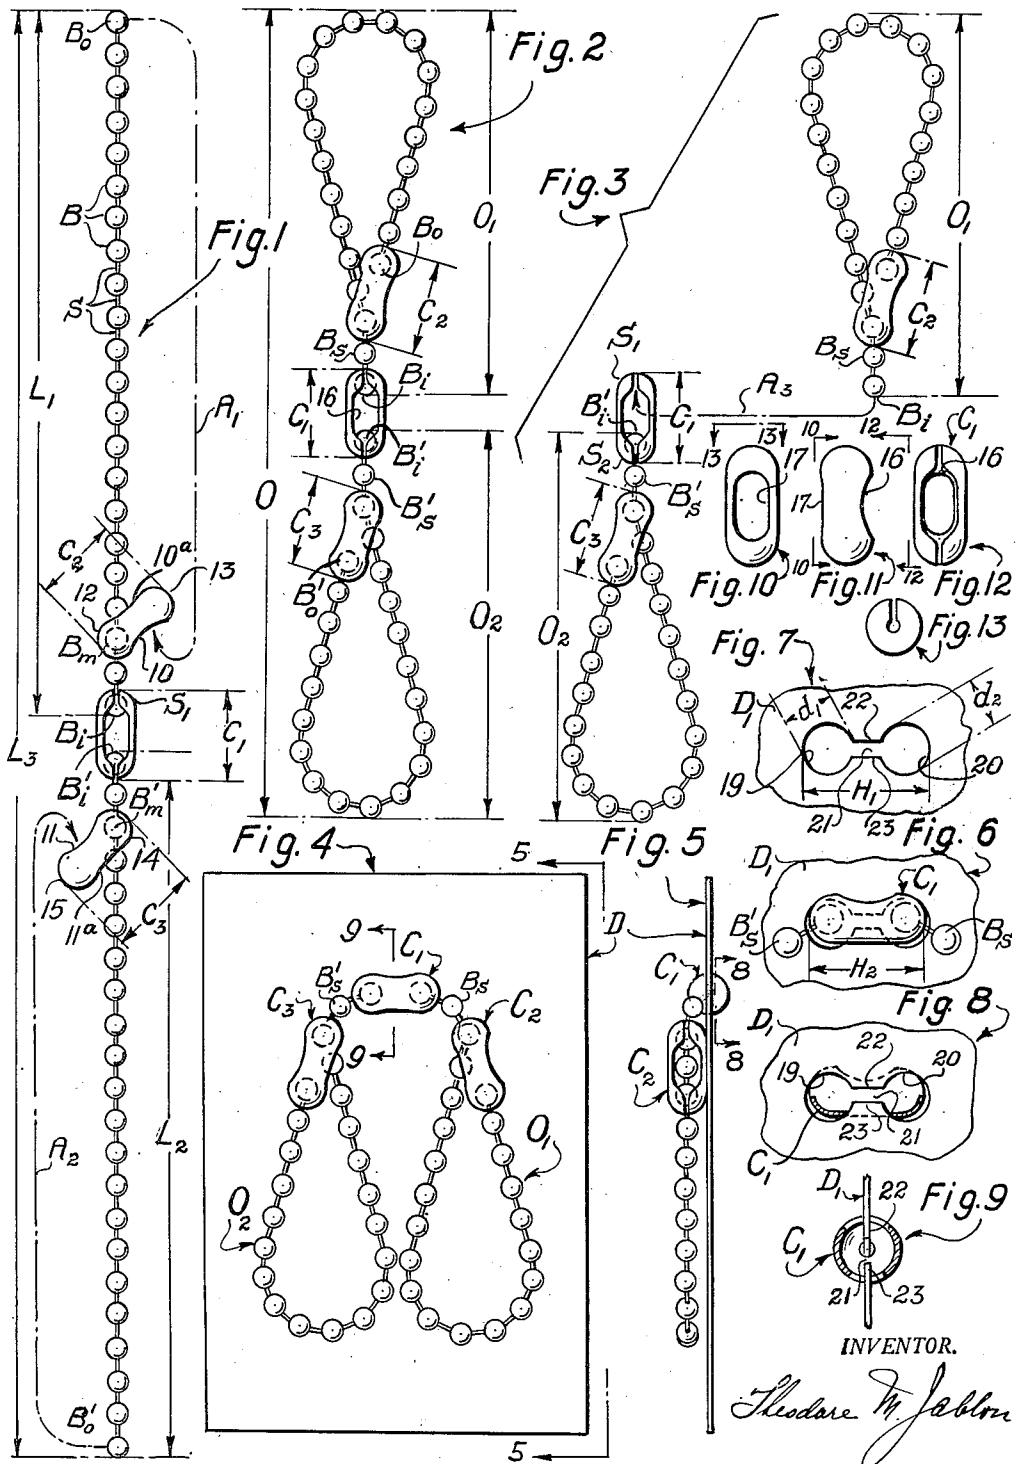

UNITED STATES PATENT OFFICE

2,624,457

BEAD CHAIN TYPE ARTICLE OR KEY
HOLDER AND DISPLAY MEANS THERE-
FOR

Theodore M. Jablon, New York, N. Y.

Application January 26, 1949, Serial No. 72,947

3 Claims. (Cl. 206—79)

1

This invention relates to bead chain type articles employing two-socketed bead chain couplings, and also to the combination of such an article with a display means or display card. More particularized, this relates to bead chain type key holders or key chains attachable to or mounted upon a display card.

It is among the objects to provide such a combination of a bead chain type article, for example a key chain or key holder with a display card, which is simple and easy to handle and manipulate, which is attractive in appearance, in which combination the article is securely and compactly held by the card yet without the use of staples and stapling machines, and where the article is readily attachable to and detachable from the card.

These objects are attained by providing a special interlocking relationship between the card and the bead chain coupling or coupling shell; in this instance, the two-socketed coupling has a main lateral opening as well as an auxiliary opening opposite the main opening, and the thus shaped shell is insertable into a specially shaped cutout in the card, such that the shell is held by the card in a manner whereby it is longitudinally bisected by the plane of the card.

That is to say, the card is provided with an elongated substantially dumb-bell-shaped cutout having an intermediate constricted portion defined by a pair of tongue portions, and the coupling shell is held in and by the cutout with each of the end portions or socket portions of the shell lodging in a respective end portion of the cutout, and the tongue portions of the cutout extending into the main opening and into the auxiliary opening respectively of the shell so that the constricted portion of the cutout is disposed within the hollow of the coupling shell.

More particularly, a bead chain type article proposed by this invention is in the form of a key holder providing a pair of interconnected key holding loops whereby groups of keys can be kept separate by the respective loops, which loops can be individually opened and closed. This double-loop or duplex-loop key holder has intermediate coupling means which allow detaching of one loop from the other and recombining them at will. In this way, one or more special keys can be held by one loop separate from others held by the other loop, without necessitating the opening of a loop itself in order to remove a key or keys.

Another object is to devise a double-loop or twin-loop key holder comprising a pair of chain

2

loops detachable from each other, which is simple, compact, easy to manipulate, and inexpensive to produce.

5 A further object is to produce a double-loop key holder which is attractive in appearance and which is so constituted that it lends itself to an attractive combination with and attachment to a display card, that is an attachment of the key holder to the card in a manner whereby they are not only simple to combine with each other securely, but whereby the key holder when attached to the card presents thereon an attractive display pattern.

15 These objects are attained by providing a pair of chain loops each of which when closed presents a free chain end portion, together with coupling means for disconnectably interconnecting the two free end portions and by which coupling means the key holder is attachable to a display card.

20 According to one feature two lengths of bead chain are interconnected by a coupling, and each length of chain in turn is formed to constitute a loop by means of a coupling whereby the outer end of each length or loop is connectible to an intermediate bead near the other or inner end of that length of bead chain.

25 Thus there are provided in this assembly three couplings or coupling members in a row, the middle one serving as interconnection of the two loops, while each of the two outer ones serves as an independent closure means for each loop.

30 More specifically the double-loop key holder comprises three two-socketed bead chain coupling members or shells in a row, each coupling member having a lateral main or entrance opening and opposite to it a lateral extra opening. The middle or interconnecting coupling in this combination is utilized to implement the attachment of the key holder to a display card, in that a receiving opening in the card is so shaped and contoured that it provides a pair of contour portions which enter respective openings of the middle coupling member, and which retain the coupling member upon the card in a position whereby the plane of the card bisects the member longitudinally.

35 That is to say, there is provided a horizontally extending receiving opening in the display card, which opening has an intermediate constriction providing a pair of projections or tongues or contour portions which extend towards each other and engage in the respective openings of the coupling, namely the main entrance opening and the extra opening.

40 45 50 Thus in one embodiment the arrangement in

the combination of the key holder with the card is such that the two chain loops depend or extend downwardly one from each end of the horizontally disposed coupling shell.

In the drawings:

Fig. 1 shows the double-loop key holder with the loops open, as represented by two lengths of bead chain combined with three coupling shells.

Fig. 2 shows the double-loop key holder with the loops closed.

Fig. 3 shows the double-loop key holder with the loops closed but with one loop detached from the other.

Fig. 4 shows the double-loop key holder as combined with and attached to a display card.

Fig. 5 is a side view taken on line 5—5 of Fig. 4.

Fig. 6 is an enlarged detail view of the intermediate coupling shell as mounted upon the card shown in Fig. 4.

Fig. 7 shows an embodiment of the configuration or contour shape of the receiving opening in the card, for the mounting of the intermediate coupling shell.

Fig. 8 is a detail longitudinal sectional view of the intermediate coupling shell taken on line 8—8 of Fig. 5.

Fig. 9 is a detail cross-sectional view of the intermediate coupling shell taken on line 9—9 of Fig. 4.

Figures 10, 11, 12 are views of a coupling shell for bead chain as herein employed; Fig. 11 showing a side view; Fig. 10 a side view taken on line 10—10 of Fig. 11; Fig. 12 a side view taken on line 12—12 of Fig. 11.

Figure 13 is an end view of the coupling shell taken on 13—13 of Figure 10.

The component portions of the double-loop key holder (see Fig. 1) comprise a pair of lengths of bead chain designated as L_1 and L_2 respectively, a coupling shell C_1 interconnecting the lengths L_1 and L_2 , and a pair of closure coupling shells C_2 and C_3 . The shell C_2 is attached to the length L_1 and the shell C_3 to the length L_2 in such a manner that their lateral main entrance openings 10 and 11 respectively face towards the intermediate coupling shell C_1 while their lateral extra openings 10^a and 11^a respectively face away from the coupling C_1 and towards the respective outer ends of the lengths L_1 and L_2 . Bead chain as such is well known and consists of hollow beads B interconnected by stems S about which they can swivel.

A suitable intermediate bead of each of the chain lengths L_1 and L_2 may be selected for attachment thereto of the coupling shells C_2 and C_3 . In the present example, referring to the length L_1 , a bead B_m being the third from the inner end of the length L_1 is shown to have the coupling C_2 attached thereto, that is the bead B_m lodging in the inner end socket 12 of the coupling member while its outer end socket 13 is adapted to receive and hold the outer end bead B_o of the length L_1 as is indicated by a dot-and-dash arrow A1. The inner end bead of the chain length L_1 is designated as B_i and is shown to be lodging in and held by one socket S_1 of the intermediate coupling shell C_1 .

Similarly, the coupling shell C_3 is shown to be held by an intermediate bead B'_m of the chain length L_2 , the bead lodging in the inner end socket 14 of shell C_3 , while the inner end bead B'_i of chain length L_2 is held by the socket S_2 of coupling shell C_1 . The outer end bead B'_o of the chain length L_2 is adapted to enter and to be held by the outer end socket 15 of coupling shell C_3 as

is indicated by a dot-and-dash line arrow A2. The total longitudinally extended length of the two interconnected chain portions L_1 and L_2 is designated as L_3 .

5 The coupling shell C_1 like the coupling shells C_2 and C_3 has a lateral main entrance opening 16 and opposite to it an extra lateral opening 17 (see detail views of Figures 10, 11, and 12).

According to Fig. 2 the lengths L_1 and L_2 are 10 shown to have been formed into chain loops O_1 and O_2 respectively by inserting and anchoring the outer end beads B_o and B'_o in the outer sockets 13 and 15 respectively of the respective 15 coupling shells C_2 and C_3 . Thus there is provided articulation as well as swivel connection between the middle coupling C_1 and the outer 20 couplings C_2 and C_3 by interposed beads B_s and B'_s . The total length of the assembly of Fig. 2 is designated as O . The loops O_1 and O_2 can be 25 detached from one another as exemplified in Fig. 3, and can be re-combined by re-inserting bead B_i in end socket S_1 of coupling C_1 as is indicated by dot-and-dash line arrow A3.

Figures 4 to 9 show the combination of the 25 double loop key holder of Fig. 2 with a display card D as well as the manner of their interconnection. The feature of this combination is that the middle coupling shell C_1 is held horizontally in and by a specially shaped receiving opening 30 of the card. In the embodiment shown the loops O_1 and O_2 with their couplings C_2 and C_3 depend as a pair from the respective ends of the middle coupling. The lower ends of the loops may be fastened to the card as by wire staples or the like.

The manner of connecting the middle coupling C_1 with the card is illustrated in the detail views of Figures 6, 7, 8, 9, showing a portion D_1 of the card D provided with a specially shaped opening. This opening has a horizontally extending length H_1 sufficient and adapted to receive the length H_2 of the coupling member C_1 horizontally disposed. The opening in the present embodiment comprises a pair of round areas 19 and 20 also designated by their diameters d_1 and d_2 , and a horizontally interconnecting area 21. Thus there is formed a horizontally extending receiving opening having an intermediate constriction as represented by a pair of protrusions or tongue portions 22 and 23, which portions extend towards each other. The middle coupling member C_1 is insertable into the opening in such a manner that the protrusions 22 and 23 catch in respective openings 16 and 17 of the coupling which is retained on and by the card which so to speak bisects the coupling longitudinally as is illustrated in Fig. 9.

What I claim is:

1. In combination a bead chain type article comprising a two-socketed bead chain coupling shell having a main lateral opening and an auxiliary lateral opening opposite said main opening, and a card provided with an elongated substantially dumb-bell-shaped cutout having an intermediate constricted portion defined by a pair of tongue portions, said shell being held in said cutout while being longitudinally bisected by the plane of the card, with the end portions of said shell each lodging in a respective end portion of said cutout, and the tongue portions extending into the main opening and into the auxiliary opening respectively so that said constricted portion is disposed within the hollow of the coupling shell.

2. In combination a double loop key-holder comprising two lengths of bead chain, a two-

socketed intermediate coupling shell having a main lateral opening and an auxiliary lateral opening opposite the main opening and interconnecting the inner end beads of said lengths of bead chain, a pair of two-socketed outer coupling shells having said intermediate shell disposed end-to-end between them, each said outer shell having a lateral main opening and a lateral auxiliary opening opposite the main opening, each said length forming a loop closed by its outer shell, the loop-forming portion of said length extending through said shell by way of said auxiliary opening in such a manner that an intermediate bead near the inner end bead lodges in the inner end socket of the shell, while the outer end bead of said length lodges in the outer socket of the shell; and a card provided with a substantially dumb-bell-shaped cutout having an intermediate constricted portion defined by a pair of tongue portions of the card, said intermediate shell being held in said cutout and longitudinally bisected by the plane of the card, with the end portions of said shell each lodging in a respective end portion of the cutout, and the tongue

portions extending into the main opening and the auxiliary opening respectively so that said constricted portion is disposed within the hollow of the coupling shell.

3. The combination of a double loop key chain with a card according to claim 2, in which the three coupling shells are so assembled with the two lengths of bead chain that a single bead is interposed between the intermediate shell and each outer shell.

10 THEODORE M. JABLON.

REFERENCES CITED

The following references are of record in the 15 file of this patent:

UNITED STATES PATENTS

Number	Name	Date
526,523	Fisher -----	Sept. 25, 1894
1,157,917	Allen -----	Oct. 26, 1915
1,639,672	Schraysshuen -----	Aug. 23, 1927
1,692,649	Goodridge et al. -----	Nov. 20, 1928
1,720,472	Gagnon -----	July 9, 1929
1,734,032	Evans -----	Nov. 5, 1929