

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 November 2011 (24.11.2011)

PCT

(10) International Publication Number
WO 2011/143720 A1

- (51) **International Patent Classification:**
G06F 3/041 (2006.01)
- (21) **International Application Number:**
PCT/AU2011/000607
- (22) **International Filing Date:**
23 May 2011 (23.05.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/346,975 21 May 2010 (21.05.2010) US
- (71) **Applicant (for all designated States except US):** RPO
PTY LIMITED [AU/AU]; Innovations Building, 124
Eggleston Road, Acton, Australian Capital Territory 0200
(AU).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** KUKULJ, Dax [AU/
AU]; 6A Foveaux Street, Ainslie, Australian Capital Ter-
ritory 2602 (AU).
- (74) **Agent:** SHELSTON IP; Level 21, 60 Margaret Street,
Sydney, New South Wales 2000 (AU).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) **Title:** METHODS FOR INTERACTING WITH AN ON-SCREEN DOCUMENT

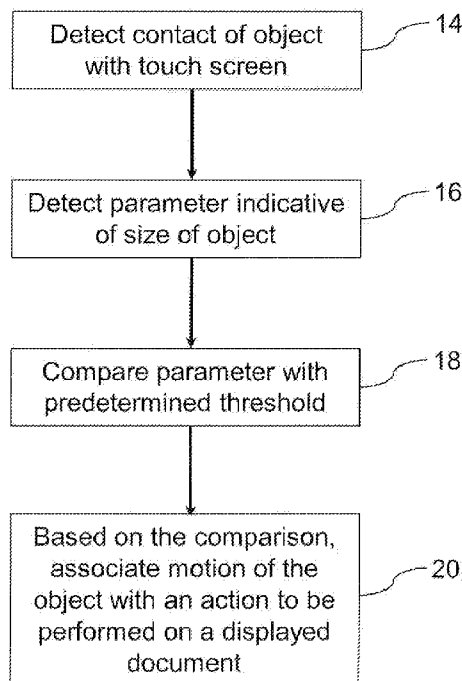


Fig 2

(57) **Abstract:** Methods and systems are provided for enabling a user to interact via touch input with a document displayed on an electronic device such as an electronic reader. The system determines a measure of the size or shape of a touch object, and accordingly associates input gestures with different actions. A user can therefore use finger touch input for page turns and stylus touch input for electronic inking operations, without having to toggle between modes. The associated actions can be modified with a second touch event, such as a thumb touch in a corner of the display area. Infrared touch systems are well suited to implementing the inventive methods in electronic readers because they do not require the presence of any high refractive index layers in front of the display.

WO 2011/143720 A1

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

METHODS FOR INTERACTING WITH AN ON-SCREEN DOCUMENT

FIELD OF THE INVENTION

The present invention relates to methods for interacting with an on-screen document. The invention has been developed primarily to enhance user interaction with a touch-enabled electronic reader, and will be described hereinafter with reference to this application. However it will be appreciated that the invention is not limited to this particular field of use.

RELATED APPLICATIONS

The present application claims priority from United States provisional patent application No 61/346975, the contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

Any discussion of the prior art throughout the specification should in no way be considered as an admission that such prior art is widely known or forms part of the common general knowledge in the field.

Electronic readers, also known as e-readers or e-books, are becoming an increasingly common alternative to traditional books and other publications. Electronic readers typically comprise a reflective display that presents to a viewer pages from a publication held in the memory of the electronic reader, but it will be appreciated that any type of transmissive or emissive display could be used. Known reflective displays include electrophoretic (or 'electronic ink'), MEMS and electrowetting technologies. Some electronic readers currently available have a touch screen interface that enables a user to turn pages with a finger swipe instead of pressing a physical button. However on current touch-equipped devices the touch screen is of a resistive or capacitive type, meaning that there is at least one conductive layer interposed between the display and a viewer. These conductive layers are typically composed of indium tin oxide (ITO), which has a refractive index of approximately 2.0, substantially different from that of the glass or plastic e-reader display (approximately 1.4 to 1.6). This refractive index differential causes glare, and furthermore the ITO films are only partially transparent, typically absorbing 20 to 30% of visible light; both these factors degrade the viewability of the display,

particularly since reflective displays are generally not backlit for reduced power consumption i.e. extended battery life. Some electronic readers use an inductive touch sensor (e.g. from Wacom Co, Ltd) located behind the display to avoid the use of overlays, however these sensors require the use of a special inductive pen and cannot readily detect finger touch.

Besides the page turn function, touch screen-equipped e-readers often provide a separate 'annotation' mode that the user can enter, for example to make notes on the e-book page. However the user then has to leave the annotation mode to return to the default page turn mode, so that a user may constantly have to switch between modes.

OBJECT OF THE INVENTION

It is an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative. It is an object of the invention in its preferred form to provide a touch screen electronic reader interface on which a user can both turn pages and make annotations without having to switch modes.

SUMMARY OF THE INVENTION

According to a first aspect of the invention there is provided a method for interpreting a user interaction with a document displayed on or by a device operatively associated with a touch screen, said method comprising the steps of:

- (a) detecting a contact of an object on said touch screen;
- (b) determining a parameter indicative of the size or shape of said object;
- (c) performing a comparison between said parameter and a predetermined threshold; and
- (d) utilising said comparison to associate motion of said object across said touch screen with an action to be performed on said document.

Preferably, the motion is associated with a translation action on the document when the parameter is greater than or equal to the threshold, or alternatively with an annotation action on the document when the parameter is less than the threshold.

The translation action is preferably a page turn when the motion is a substantially horizontal swipe.

The annotation action preferably comprises electronic inking on the document. Alternatively, the annotation comprises highlighting text in the document when a contact of a second object is detected in a predetermined portion of the touch screen. Preferably, the predetermined portion comprises areas proximate to the corners of the touch screen. In preferred forms of the invention, a parameter indicative of the size of the second object is required to be greater than or equal to the threshold.

In an alternative form of the invention, the motion is associated with an erasure action of annotation on the document when the parameter is greater than or equal to the threshold, and when a contact of a second object is detected in a predetermined portion of the touch screen. Preferably, the predetermined portion comprises areas proximate to one or more corners of the touch screen. In preferred forms of the invention, a parameter indicative of the size of the second object is required to be greater than or equal to the threshold.

The threshold is preferably chosen to distinguish between contact of a finger or thumb on the touch screen and contact of a stylus on the touch screen.

Preferably, the device is an electronic reader. More preferably, the touch screen does not include any layers in front of the display surface of the electronic reader with refractive index substantially different from the refractive index of the front layer of the display. In preferred forms of the invention the touch screen is an infrared touch screen.

According to a second aspect of the invention there is provided a method for facilitating user interaction with a document using a touch-sensitive device, said method comprising the steps of:

- (a) determining size or shape of a touch object in contact with said touch-sensitive device;

- (b) providing a series of protocols associated with a respective series of values or ranges of values of said size or shape of said touch object to manipulate said document; and
- (c) initiating at least one of said respective protocols upon motion of said touch object relative to said device.

According to a third aspect of the invention there is provided a touch-sensitive device comprising:

- a display;
- a touch screen operatively associated with said display;
- a detector for detecting contact of an object on said touch screen and for tracking motion of said object across said touch screen;
- a processor for determining a parameter indicative of the size or shape of said object and for performing a comparison between said parameter and a predetermined threshold; and
- a controller for utilising said comparison to associate motion of said object across said touch screen with an action to be performed on a document displayed on or by said display.

Preferably, the display is a reflective display integrated with the touch screen. More preferably, the touch screen does not include any layers in front of the display surface of the reflective display with refractive index substantially different from the refractive index of the front layer of the display. The touch screen is preferably an infrared touch screen.

According to a fourth aspect of the invention there is provided an article of manufacture comprising a computer usable medium having a computer readable program code configured to conduct the method of the first or second aspects of the invention, or to operate the touch-sensitive device of the third aspect of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Fig 1 shows a plan view of a touch-enabled electronic reader;

Fig 2 shows a flow chart of a method according to one embodiment of the invention;

Fig 3 illustrates a page turn gesture;

Fig 4 illustrates various annotation actions that can be performed on a displayed page of a text document;

Fig 5 illustrates an annotation action that can be performed on a displayed drawing;

Fig 6 illustrates an annotation action modified by a second touch event;

Fig 7 illustrates a finger swipe action modified by a second touch event;

Fig 8 shows a plan view of an infrared touch screen suitable for use in a touch-equipped electronic reader;

Fig 9 illustrates in side view a light path through selected components of the infrared touch screen shown in Fig 8;

Figs 10A, 10B and 10C illustrate in side view various possible configurations for integrating the Fig 8 touch screen with a display;

Fig 11 shows a plan view of an optical touch screen;

Fig 12A shows the occurrence of a double touch ambiguity with an infrared touch screen;

Fig 12B shows the occurrence of a double touch ambiguity with an optical touch screen;

Fig 13 shows how two simultaneous but differently-sized touch objects can appear to the controller of an infrared touch screen;

Fig 14 shows how the controller of an infrared touch screen can use knowledge of an expected touch location to resolve a double touch ambiguity; and

Figs 15, 16A and 16B show schematics of apparatus suitable for performing the inventive methods.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

Figure 1 shows in plan view an electronic reader **2** with a touch-enabled display area **4** (i.e. a touch screen) that can sense contact of an object **6**, determine a parameter **8** indicative of the size or shape of the object, and track motion **10** of the object across the touch screen. In the example shown in Figure 1 the parameter is a size-related parameter in the form of a measure of a width of the object, but alternatively the parameter may be in the form of a measure of the area of the object, or it may be a shape-related parameter such as a ratio of width measures in two axes. Those skilled

in the art will appreciate that with some types of touch screen (e.g. infrared or surface acoustic wave) it is convenient to measure a width of a touch object based on the number of energy paths occluded, while with other types of touch screen (e.g. projected capacitive or in-cell optical) it is convenient to measure an area of a touch object based on the number of nodes with which the object interacts. An important aspect of the present invention is that the size- or shape-related parameter is used to aid interpretation of the object's motion **10**, so as to associate that motion with an action to be performed on a document **12** displayed on the electronic reader. This concept can also be expressed in terms of facilitating user interaction with a document by initiating, based on size or shape of a touch object, one or more of a number of protocols for manipulating a document displayed on the electronic reader. The document may for example be a page of a publication stored in the memory of the electronic reader, such as an electronic book, newspaper or magazine. For the purposes of this specification the term 'document' also includes pictures, photographs, images, videos or anything that can be shown on the device display.

Once a size- or shape-related parameter of a touch object has been determined, the touch screen controller classifies the touch object by comparing the parameter with a predetermined threshold. In preferred embodiments the parameter is size-related. If a size-related parameter is greater than or equal to the threshold, the touch screen controller considers the touch object to be a finger or thumb, and if it is less than the threshold the controller considers the touch object to be a stylus. In embodiments where the size-related parameter is a width measure, the predetermined threshold may conveniently be in the range of 2 to 5 mm, while in embodiments where the parameter is an area measure the threshold may conveniently be in the range of 4 to 25 mm². In certain embodiments the predetermined threshold is user-definable, for example to allow for differently sized fingers (e.g. adult or child). In certain embodiments the device presents a set-up or configuration mode that allows a user to calibrate the size of their pointing finger.

In other embodiments the parameter is shape-related, and may for example be used to distinguish types of touch objects by comparing a metric of the symmetry of their touch profiles to a threshold value. For instance the parameter may be indicative of whether the contact is from the distal tip or ventral pad of the finger, since the distal

tip is expected to have a more elliptical contact area. The symmetry metric and the threshold value may for example be based on a ratio of width measures determined in two axes, or on the ratio of major and minor axes of an ellipse fitted to an area measure. Hereinafter the invention will be described in terms of a size-related parameter.

Figure 2 shows a flow chart of a method according to an embodiment of the invention. In a first step **14** the touch screen detects contact of an object with the touch screen. We note that in most situations this contact will involve physical contact between the object and the surface of the touch screen. However some types of touch screen (e.g. infrared or in-cell optical) can also detect an object in close proximity to the touch screen surface, and for the purposes of this specification the term ‘contact’ encompasses both actual and near touch events. In a second step **16** a processor determines a parameter indicative of the size of the object, and in a third step **18** the processor performs a comparison between this size-related parameter and a predetermined threshold. Then in a fourth step **20** a controller utilises the comparison to associate motion of the object across the touch screen with an action to be performed on a document displayed on the electronic reader.

In a preferred embodiment the motion is associated with a translation action on the document if the comparison shows that the size-related parameter is greater than or equal to the threshold, and with an annotation action if the size-related parameter is less than the threshold. In one embodiment the translation action is a page turn when the motion is a substantially horizontal swipe. As shown in Figure 3 this enables a viewer to use a horizontal finger swipe **22** to turn to the next page or the previous page of a multi-page document such as an e-book. In certain embodiments the particular association between the direction of the finger swipe and the direction of the resulting page turn can be a user-selectable feature. For example some users may prefer to associate a left swipe with turning to the next page and a right swipe with turning to the previous page, simulating the action of turning a paper page. Other users may prefer the reverse association, thinking of a right swipe as ‘go forward’ and a left swipe as ‘go back’. Several other translation actions are possible. For example a short upwards or downwards swipe may be associated with turning to the beginning or end of a current e-book chapter, while a long upwards or downwards swipe may be

associated with turning to the first or last page of an e-book. In one example embodiment the device controller will consider an upwards or downwards swipe to be 'short' if its extent is less than a quarter of the vertical extent of the displayed page, and 'long' if its extent is greater than or equal to that quantity. In other embodiments the short/long criterion is user-definable.

In other embodiments, applicable to situations where the document being displayed has only one page, motion of an 'above threshold' object is associated with a translation action on the entire document. For example this may be used to move the document to another part of the display area if the displayed document is smaller than the display area (e.g. a photograph). Alternatively if the document is larger than the display area (e.g. an engineering drawing), the motion may be used to move the document so that a different portion is displayed.

Turning now to annotation actions, i.e. actions associated with motion of an object with size-related parameter less than the threshold, in preferred embodiments the annotation action comprises an 'electronic inking' operation such as drawing or writing on the displayed page of a document. As shown in Figure 4, an electronic inking operation may for example be underlining **24** or circling **26** of portions of text **28** or writing notes **30** in the page margin. Alternatively, as shown in Figure 5, the electronic inking operation may be a correction or alteration of a drawing **32**.

In certain embodiments of the invention the annotations are automatically saved to memory. In some embodiments the user is provided with an 'erase all' action that erases all annotations made on the displayed page. Preferably the 'erase all' action is effected with a predefined gesture on the touch screen, such as a double tap. In certain embodiments this gesture can be performed anywhere on the touch area, while in other embodiments it has to be performed in a predetermined (and optionally user-definable) portion of the touch area, such as the lower right corner. In certain embodiments the device controller will only execute the 'erase all' action if the gesture is performed with a 'below size threshold' object, e.g. a stylus, while in other embodiments the device controller will only execute the 'erase all' action if the gesture is performed with an 'above size threshold' object, e.g. a finger. In yet other

embodiments the 'erase all' action will be executed irrespective of the size of the object performing the appropriate gesture.

In other embodiments of the invention the annotations have to be actively saved, preferably with a predefined gesture on the touch screen such as a double tap as described above.

In preferred embodiments of the invention the number of available actions is expanded by the detection of a second touch event. For example motion of an object across the touch screen can be interpreted differently if a second touch event is performed on a predetermined portion of the touch area, such as the lower left or right corner or the left or right edge. This second touch event could be conveniently performed with the thumb of the hand holding the electronic reader, while the user uses their writing hand to interact with a displayed document. A right-handed user could naturally place their left thumb in the lower left corner or near the left edge of the touch area, and vice-versa for a left-handed user. In an embodiment shown in Figure 6, a second touch event **34** modifies an annotation action such that motion of a 'below threshold' touch object highlights portions of text **36** instead of writing on the page as shown in Figure 4. In an embodiment shown in Figure 7, a second touch event **34** causes motion of an 'above threshold' object, such as a finger swipe **38**, to be interpreted as an erase gesture that erases an existing annotation **40**.

In preferred embodiments the second touch only modifies the interpretation of the primary object motion if the second touch is performed with an object with size parameter greater than or equal to the predetermined threshold.

In preferred embodiments the second touch event is required to be present during the primary object contact and motion events. It will be appreciated that this requires the touch screen to be able to detect and correctly determine the location of two simultaneous touch objects. If however the touch screen is of a type with no multi-touch capability, e.g. resistive touch, then the interpretation of an object motion could be modified by the detection of a second touch event occurring before contact of the primary object.

We turn now to the description of one specific touch system that can be used to implement the above-described methods. Figure 8 shows in plan view an infrared touch screen **42** disclosed and described in detail in published US patent application No US 2008/0278460 A1 entitled ‘Transmissive body’ and incorporated herein by reference. Light **44**, preferably in the near infrared region of the spectrum, from a pair of optical sources **46** such as LEDs is launched into a planar transmissive element **48** such as a glass sheet, within which it diverges in the in-plane direction until it encounters a pair of collimation/redirection elements **50** (such as parabolic turning mirrors) that collimate and redirect the light to produce two sheets of light **52** that propagate in front of the planar transmissive element. The light path through a transmissive element **48** and a collimation/redirection element **50** is shown in side view in Figure 9. The light sheets are then collected by arrays of integrated optical waveguides **54** with associated in-plane lenses **56** and guided to one or more multi-element detectors **58** such as a digital camera chip or a line camera. It will be appreciated that an object **60** on or near the surface of the planar transmissive element will block or attenuate portions of the light sheets in each axis, allowing the object to be located and tracked by a device controller **62** that interrogates the detector(s). Generally the optical sources **46** will also be controlled by the device controller. Figure 8 also shows a processor **64** operatively associated with the device controller, for processing the data obtained from the detector(s) using appropriate computer readable program code stored on a computer usable medium. This processing includes determining a size- or shape-related parameter of a touch object and performing a comparison between the parameter and a predetermined threshold.

For simplicity Figure 8 only shows a few waveguides per axis, but in actual touch screens the in-plane lenses will generally be close-packed. The size of a touch object in each axis is determined from the number of lenses/waveguides that receive a diminished amount of light, and a touch screen with close-packed lenses on a 1 mm pitch for example is readily able to distinguish a stylus touch (with a dimension or size-related parameter of order 1 mm) from a finger touch (with a dimension or size-related parameter of order 10 mm).

It will be appreciated that the touch-sensitive area of the touch screen **42** corresponds more or less to the area of the planar transmissive element **48**. Consequently when

the touch screen is incorporated into an electronic device such as an electronic reader **2** as shown in Figure 1, the display area **4** will overlies the planar transmissive element (or a subset thereof) with the other touch screen components housed within the device casing. In certain embodiments the planar transmissive element **48** is located in front of the device display **66** as shown in side view in Figure 10A. In other embodiments the planar transmissive element is located behind the device display as shown in Figure 10B, with the collimation/redirection elements **50** being in an 'extended' form to fold the light path **53** around the display. In these two embodiments the planar transmissive element can be direct bonded or laminated to the display to minimise the number of air interfaces, reducing reflection losses. In yet other embodiments the cover layer **68** of the device display **66** serves as the planar transmissive element **48**, as shown in Figure 10C. It is important to note that in all of these embodiments the electronic device is provided with touch sensing functionality without introducing any high refractive index layers in front of the display. For superior screen viewability the embodiments shown in Figures 10B and 10C are preferred because there are no additional layers whatsoever in front of the display. However excellent screen viewability is also possible with the Figure 10A embodiment provided the material of the planar transmissive element **48** is chosen to be highly transparent and index matched to the front layer of the display, which is not a demanding requirement.

The particular touch screen **42** illustrated in Figure 8 is an example of a category of touch screens commonly known in the art as 'infrared' touch screens that detect a touch object via interruptions in two crossing (and usually perpendicular) fields of light. Several other forms of infrared touch screen will be known to those skilled in the art, including one described in US Patent No 5,914,709 with optical waveguide arrays on both the 'transmit' and 'receive' sides as well as conventional 'discrete component' infrared touch screens described in US Patent No 3,478,220 for example. In general, infrared touch screens will be suitable for implementing the methods of the present invention provided they have sufficient spatial resolution to distinguish a stylus touch from a finger touch.

Another type of touch screen suitable for implementing the methods of the present invention is the 'optical' touch screen, described for example in US Patent No 6,943,779. As shown in plan view in Figure 11, an 'optical' touch screen **70** typically

comprises a pair of optical units **72** in adjacent corners of a rectangular input area **74** and a retro-reflective layer **76** along three edges of the input area. Each optical unit includes a light source for emitting a fan of light **78** across the input area and a multi-element detector (e.g. a line camera) where each detector element receives light reflected from a certain portion of the retro-reflective layer. A touch object **60** in the input area prevents light reaching one or more elements in each detector, and its location determined by triangulation. The size of the touch object can be inferred from the angles **79** subtended by the blocked light paths and the distances between the object and the optical units. It will be appreciated that optical touch screens and the various infrared touch screens described above can all be integrated with an e-reader without introducing any high index layers in front of the display.

Those skilled in the art will know that infrared and optical touch screens are both prone to a ‘double touch ambiguity’ in situations where two touch events occur simultaneously. As shown in Figure 12A for example, the controller of an infrared touch screen **42** may have difficulty in distinguishing the true locations of two touch objects **60** from the ‘phantom’ points **80**. The corresponding ambiguity for an ‘optical’ touch screen **70** is shown in Figure 12B. Fortunately however, there are several reasons why double touch ambiguity is unlikely to be a problem in the previously described embodiments where a second touch event modifies the interpretation of a gesture performed with a primary touch object. Firstly, referring back to Figures 6 and 7, it is highly likely that the second touch event **34**, e.g. a thumb touch in one corner, will occur before contact of the primary touch object, similar to the situation where a ‘shift’ key is pressed before an alphanumeric key to modify its interpretation. A double touch ambiguity does not occur if the device controller detects one touch event before the other touch event occurs. Secondly there may be a significant size differential between the two touch objects, especially if a thumb touch is used to modify the interpretation of a gesture performed with a stylus. As illustrated in Figure 13, if a large touch object and a small touch object are detected simultaneously, the device controller will typically be required to choose between a pair of approximately symmetrical touch points **82A**, **82B** and a pair of elongated touch points **84A**, **84B**. Since the touch signature of many objects (e.g. pens and fingers) will be approximately symmetrical (i.e. have a similar dimension in each axis), the device controller can be programmed to favour symmetrical touch points.

Thirdly, the device controller can make use of the fact that the second (modifying) touch event **34** is expected to occur in the lower left or right corner of the display **4**. As shown in Figure 14, this information can be used to eliminate the ‘phantom’ points **80**.

Many other ‘software’ methods, as well as hardware modifications, for mitigating the effects of double touch ambiguity and phantom points in infrared touch screens are known or under active development, including those disclosed in published PCT application No WO 2011/044640 A1; it will be easily recognised by those skilled in the art that these techniques may be used to enhance the operation of the present invention described herein.

The methods of the present invention are also applicable to situations where a document is displayed on a device remote from the touch screen, or projected by a device onto a screen. For example as shown in Figure 15 a user can interact with a document **12** shown on a separate display **86** (such as an electronic whiteboard) via touch input on a touch screen **4** operatively connected with the display by wire or wireless means **88**. Alternatively as shown in Figure 16A a user can interact with a document **12** projected onto a screen **90** by a projection device **92** via touch input on a touch screen portion **4** of the device; in yet another embodiment shown in Figure 16B the touch input can be provided to a touch screen **4** remote from and operatively coupled to the projection device **92** by wire or wireless means **88**. It will be appreciated that in the embodiments shown in Figures 15, 16A and 16B the touch screen **4** does not necessarily need to have a display function, and it is to be understood that the term ‘touch screen’ also encompasses this situation.

Although the invention has been described with reference to specific examples, it will be appreciated by those skilled in the art that the invention may be embodied in many other forms.

WE CLAIM:

1. A method for interpreting a user interaction with a document displayed on or by a device operatively associated with a touch screen, said method comprising the steps of:

(a) detecting a contact of an object on said touch screen;

(b) determining a parameter indicative of the size or shape of said object;

(c) performing a comparison between said parameter and a predetermined threshold; and

(d) utilising said comparison to associate motion of said object across said touch screen with an action to be performed on said document.

2. A method according to claim 1, wherein said motion is associated with a translation action on said document when said parameter is greater than or equal to said threshold.

3. A method according to claim 2, wherein said translation action is a page turn when said motion is a substantially horizontal swipe.

4. A method according to claim 1, wherein said motion is associated with an annotation action on said document when said parameter is less than said threshold.

5. A method according to claim 4, wherein said annotation action comprises electronic inking on said document.

6. A method according to claim 4, wherein said annotation comprises highlighting text in said document when a contact of a second object is detected in a predetermined portion of said touch screen.

7. A method according to claim 1, wherein said motion is associated with an erasure action of annotation on said document when said parameter is greater than or equal to said threshold, and when a contact of a second object is detected in a predetermined portion of said touch screen.

8. A method according to claim 6 or claim 7, wherein said predetermined portion comprises areas proximate to one or more corners of said touch screen.
9. A method according to any one of claims 6 to 8, wherein a parameter indicative of the size of said second object is required to be greater than or equal to said threshold.
10. A method according to any one of the previous claims, wherein said threshold is chosen to distinguish between contact of a finger or thumb on said touch screen and contact of a stylus on said touch screen.
11. A method according to any one of the previous claims, wherein said device is an electronic reader.
12. A method according to claim 11, wherein said touch screen does not include any layers in front of the display surface of said electronic reader with refractive index substantially different from the refractive index of the front layer of said display.
13. A method according to claim 12 wherein said touch screen is an infrared touch screen.
14. A method for facilitating user interaction with a document using a touch-sensitive device, said method comprising the steps of:
 - (a) determining size or shape of a touch object in contact with said touch-sensitive device;
 - (b) providing a series of protocols associated with a respective series of values or ranges of values of said size or shape of said touch object to manipulate said document; and
 - (c) initiating at least one of said respective protocols upon motion of said touch object relative to said device.
15. A touch-sensitive device comprising:
 - a display;
 - a touch screen operatively associated with said display;

a detector for detecting contact of an object on said touch screen and for tracking motion of said object across said touch screen;

a processor for determining a parameter indicative of the size or shape of said object and for performing a comparison between said parameter and a predetermined threshold; and

a controller for utilising said comparison to associate motion of said object across said touch screen with an action to be performed on a document displayed on or by said display.

16. A touch-sensitive device according to claim 15, wherein said display is a reflective display integrated with said touch screen.

17. A touch-sensitive device according to claim 16, wherein said touch screen does not include any layers in front of the display surface of said reflective display with refractive index substantially different from the refractive index of the front layer of said display.

18. A touch-sensitive device according to any one of claims 15 to 17, wherein said touch screen is an infrared touch screen.

19. An article of manufacture comprising a computer usable medium having a computer readable program code configured to conduct the method of any one of claims 1 to 13.

20. An article of manufacture comprising a computer usable medium having a computer readable program code configured to conduct the method of claim 14.

21. An article of manufacture comprising a computer usable medium having a computer readable program code configured to operate the system of any one of claims 15 to 18.

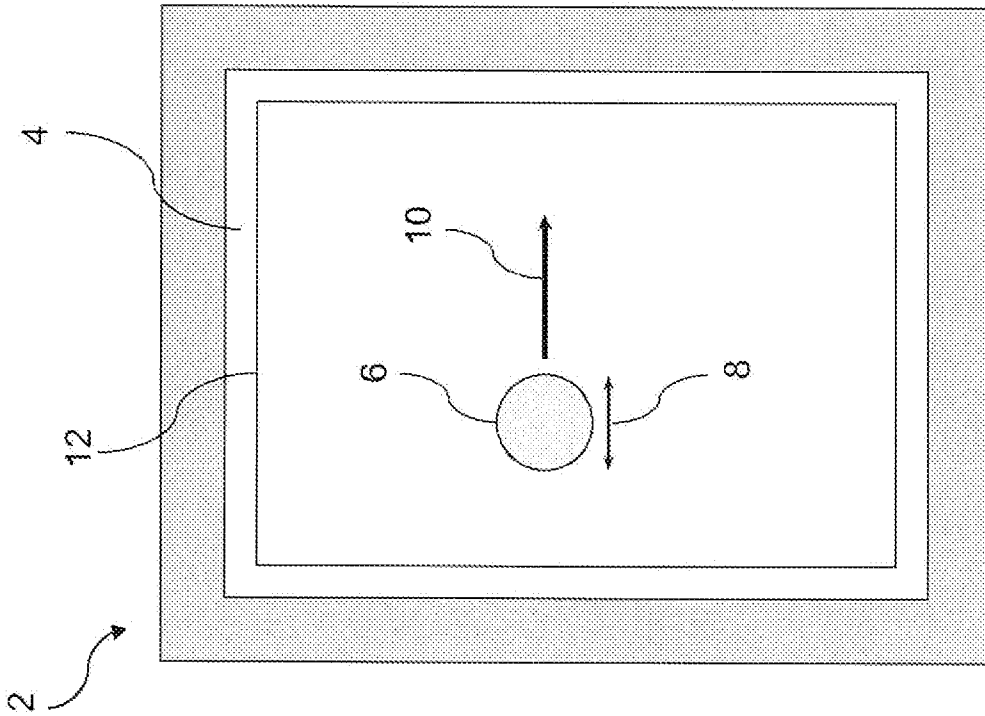


Fig 1

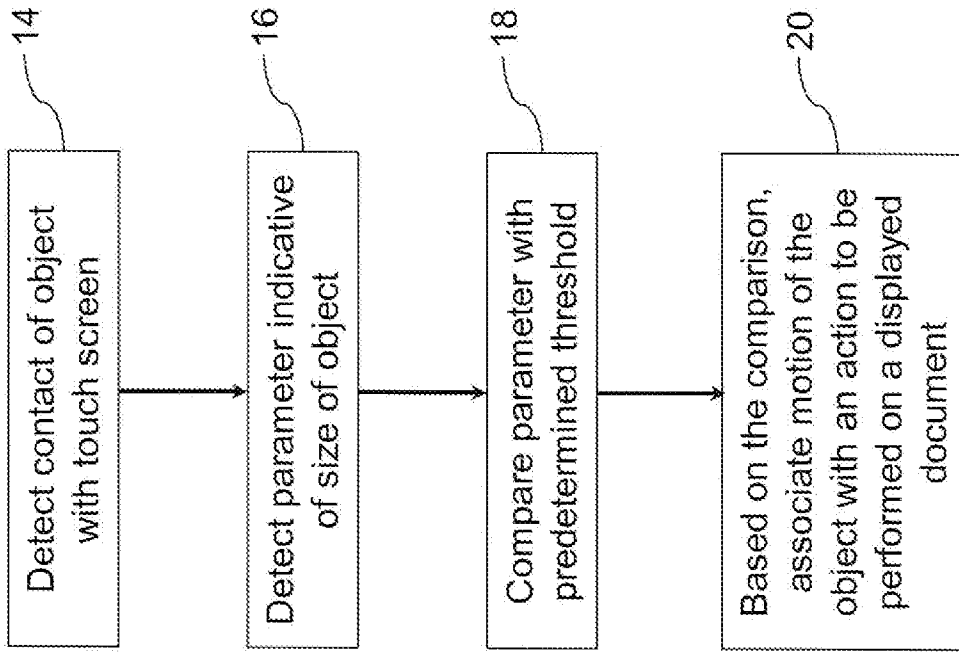


Fig 2

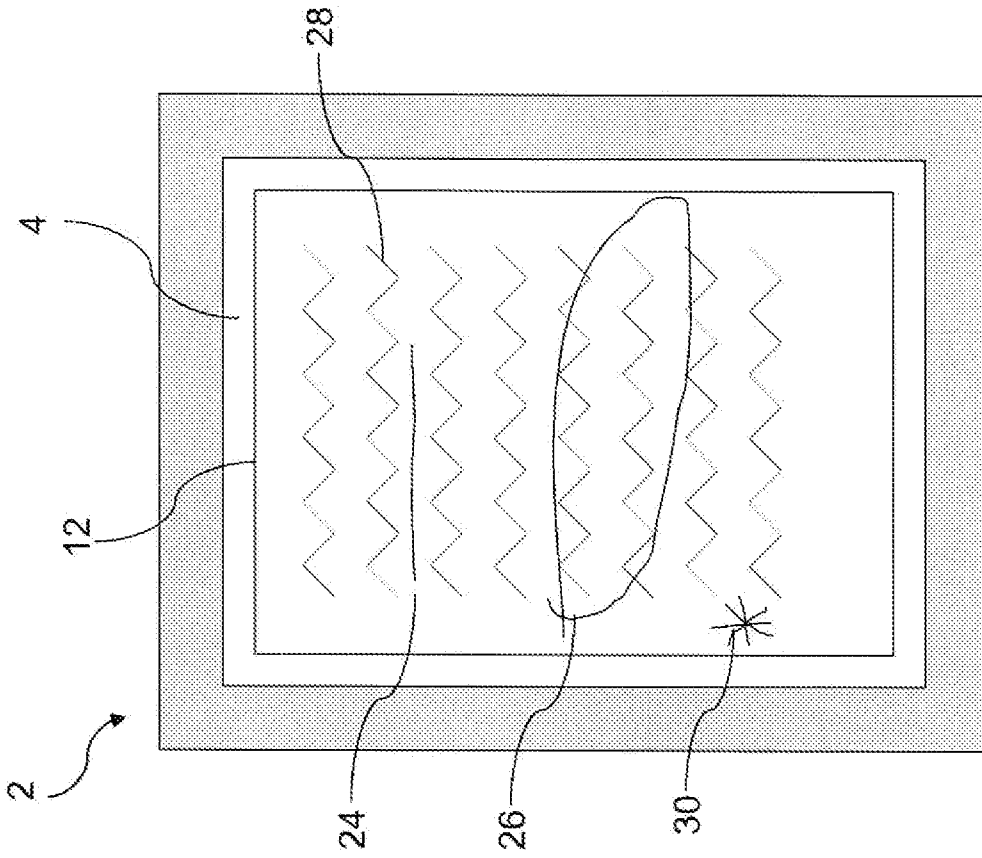


Fig 4

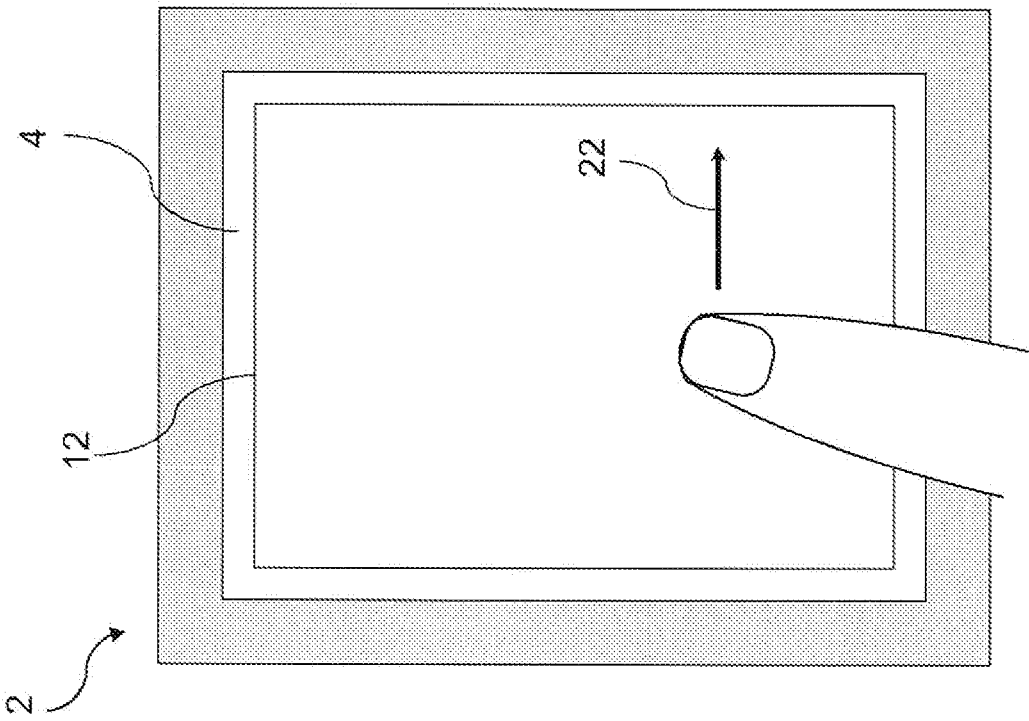


Fig 3

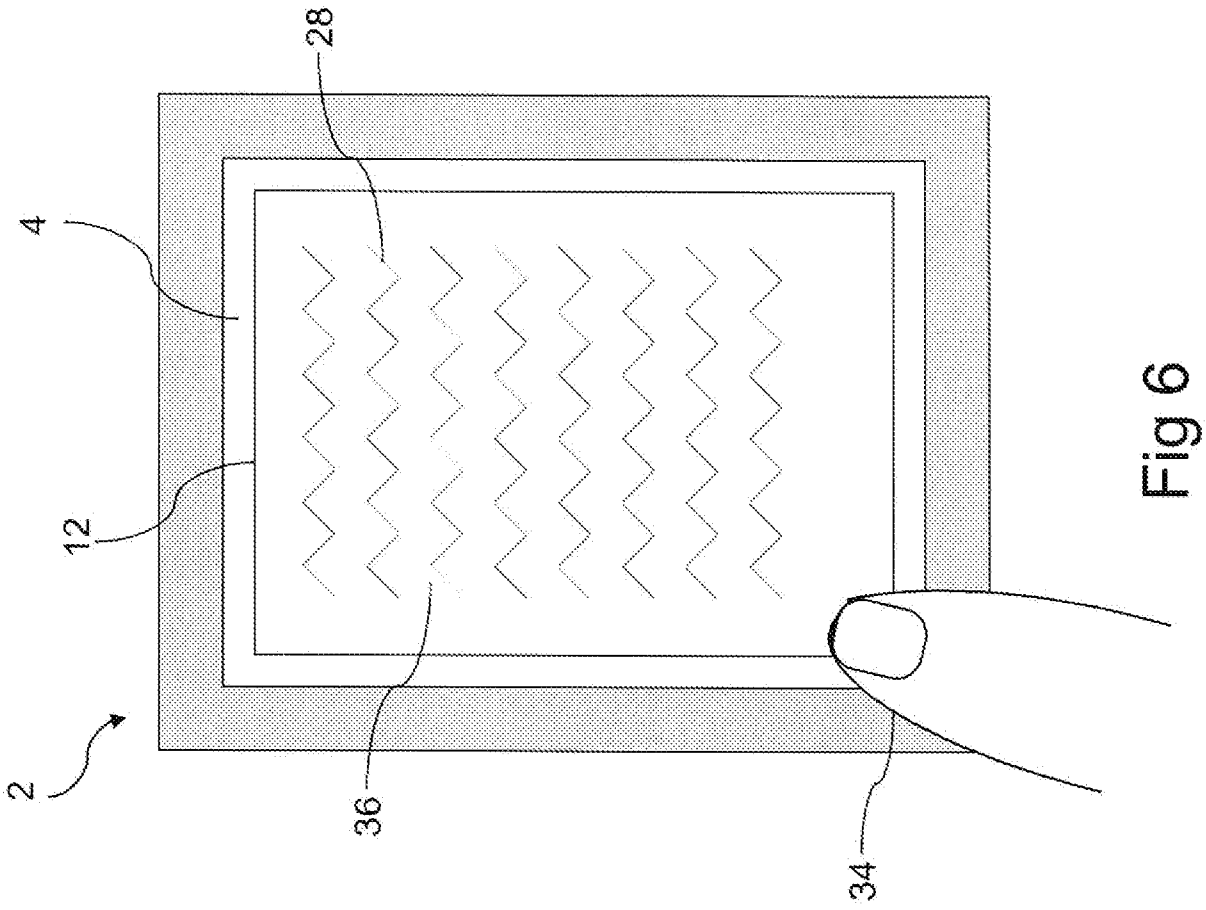


Fig 6

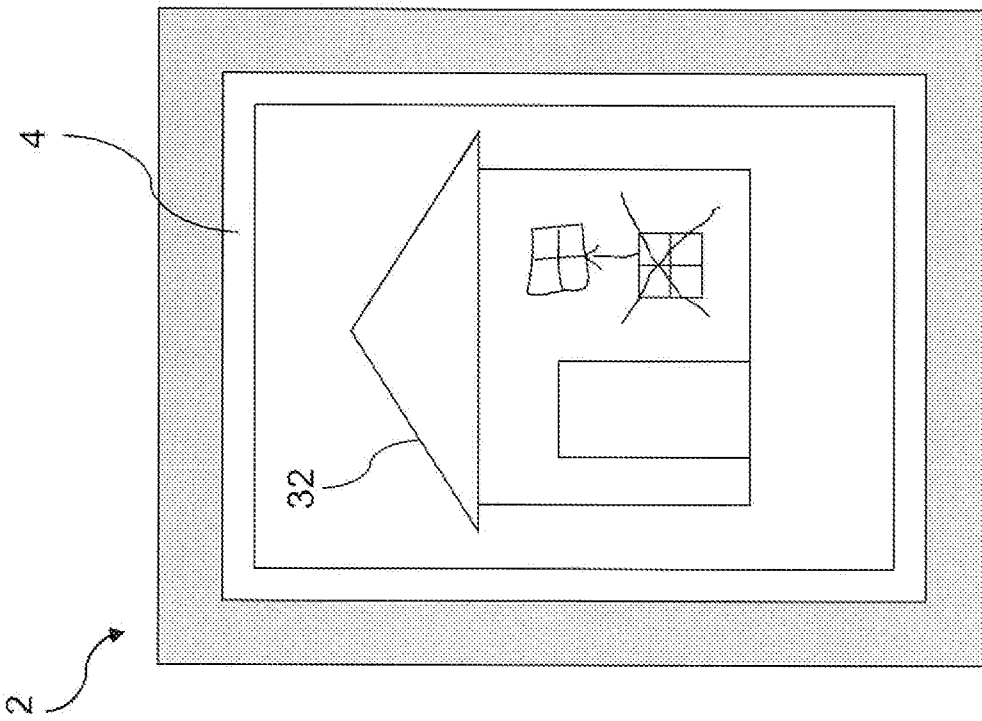


Fig 5

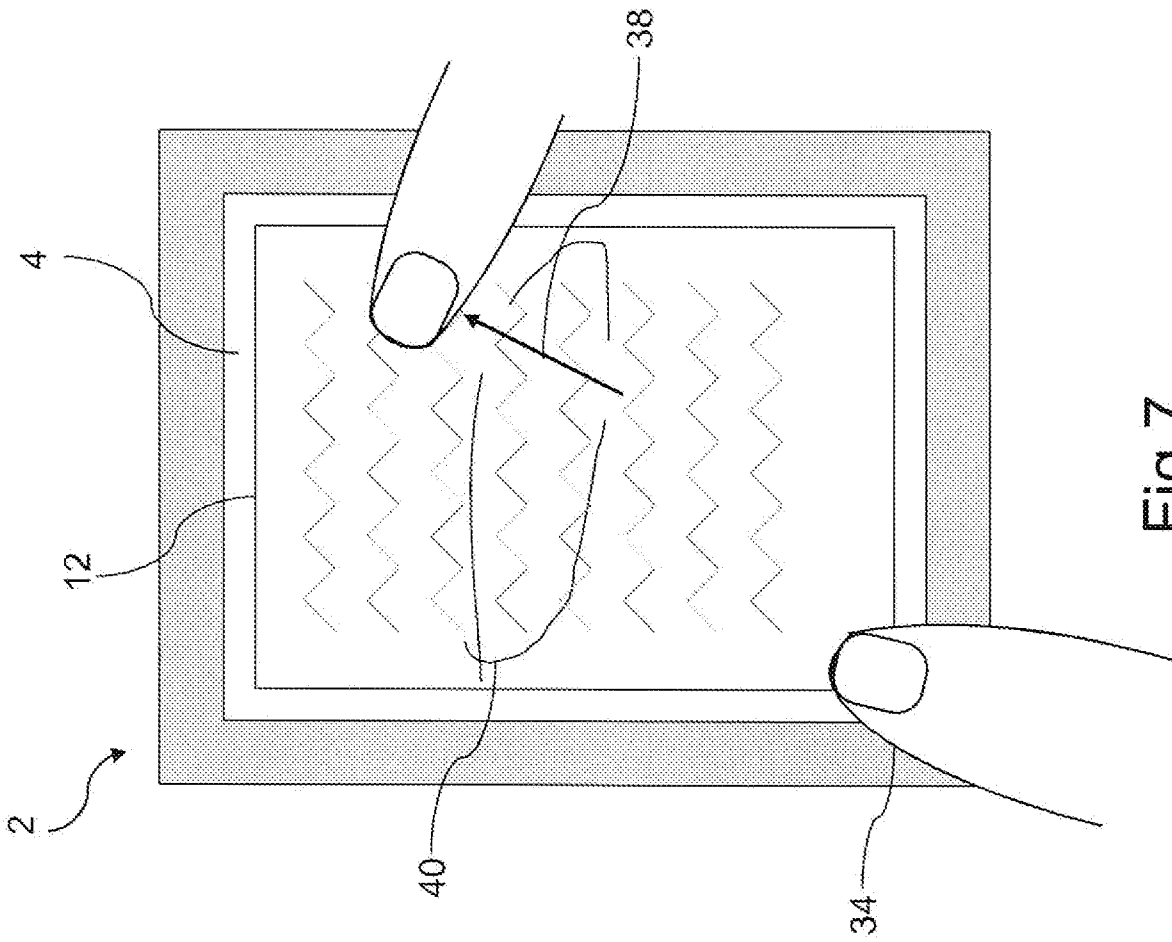
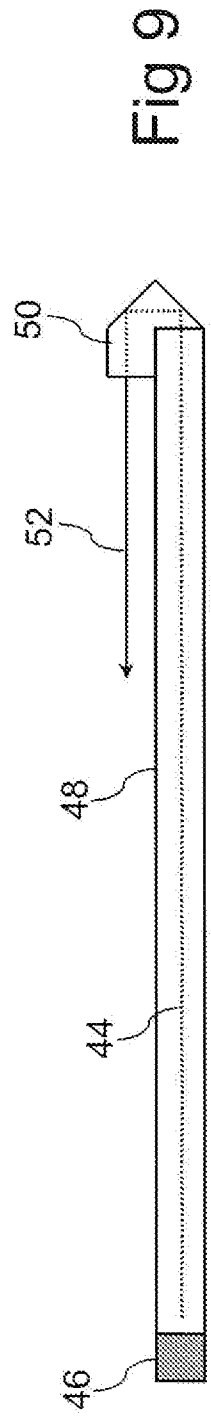
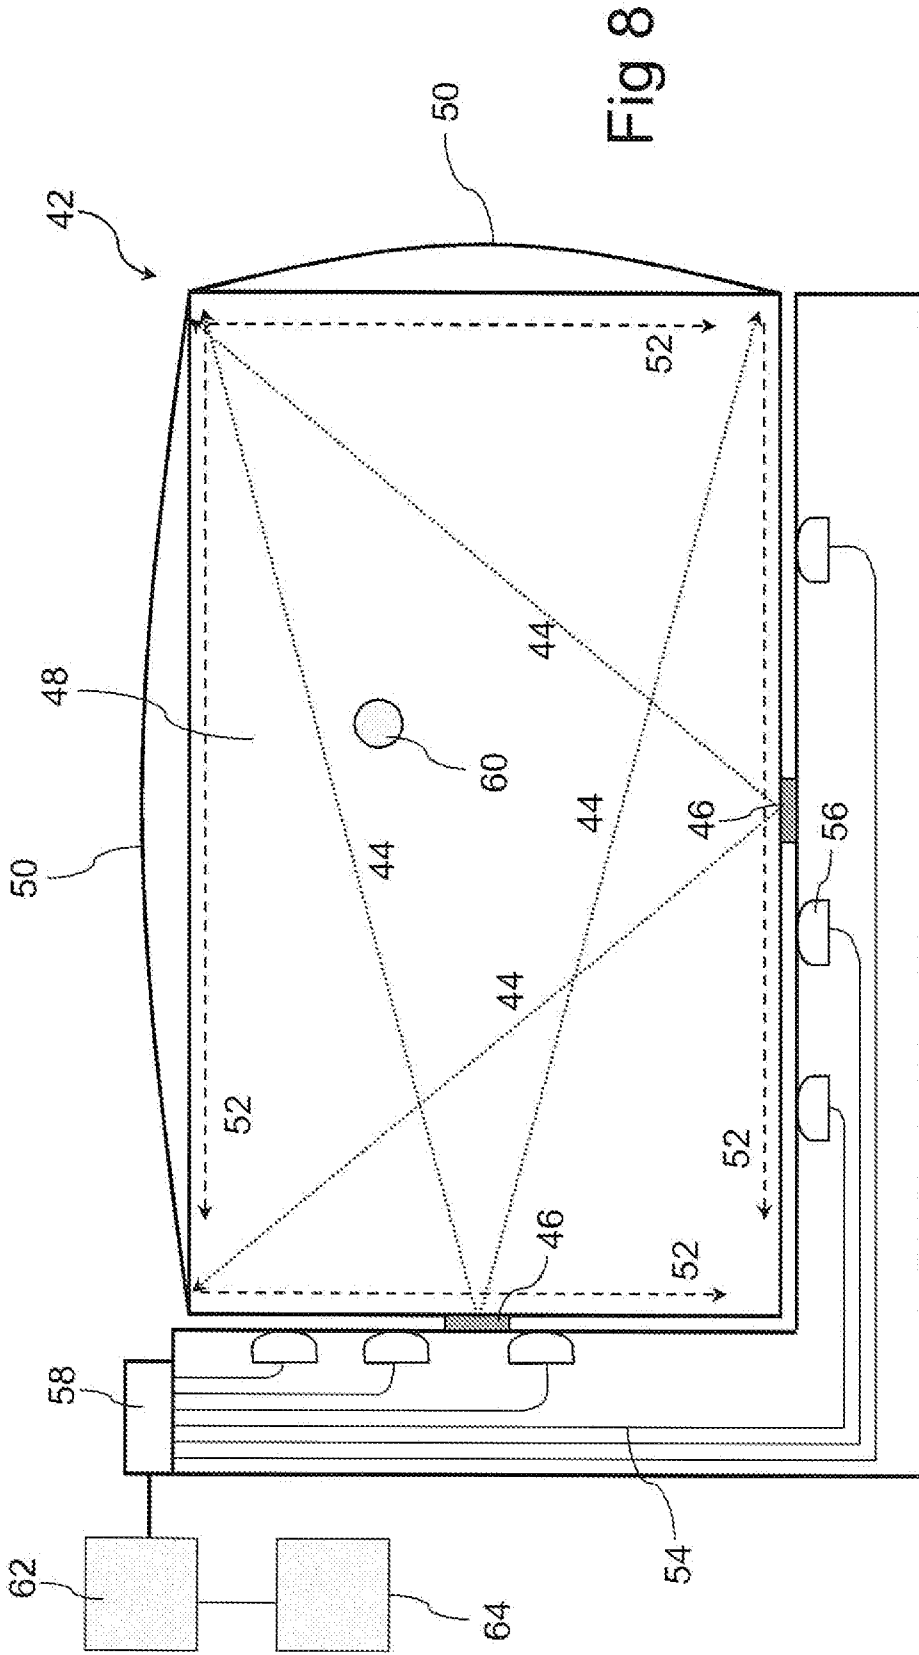


Fig 7



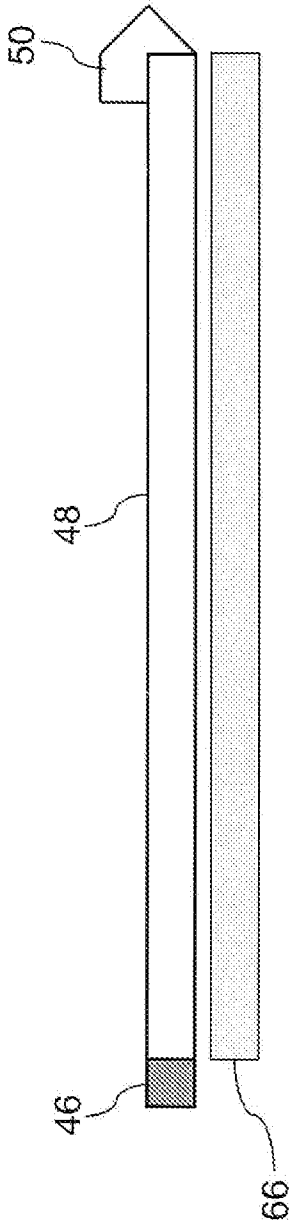


Fig 10A

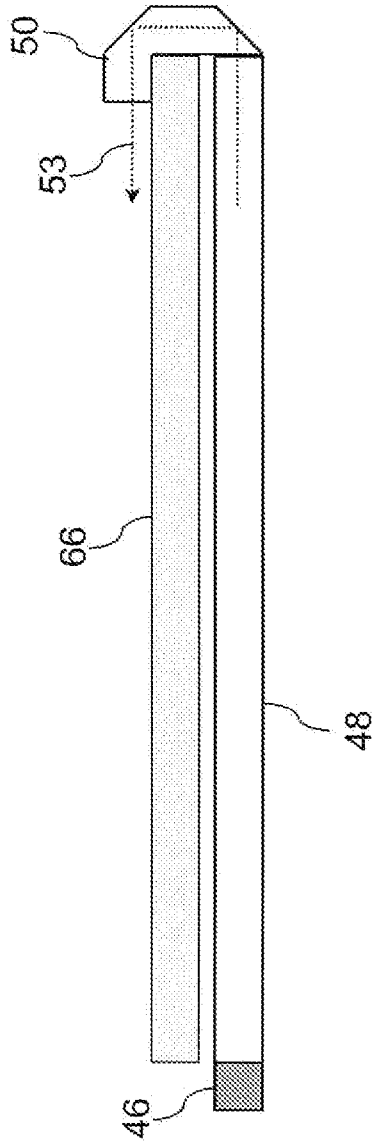


Fig 10B

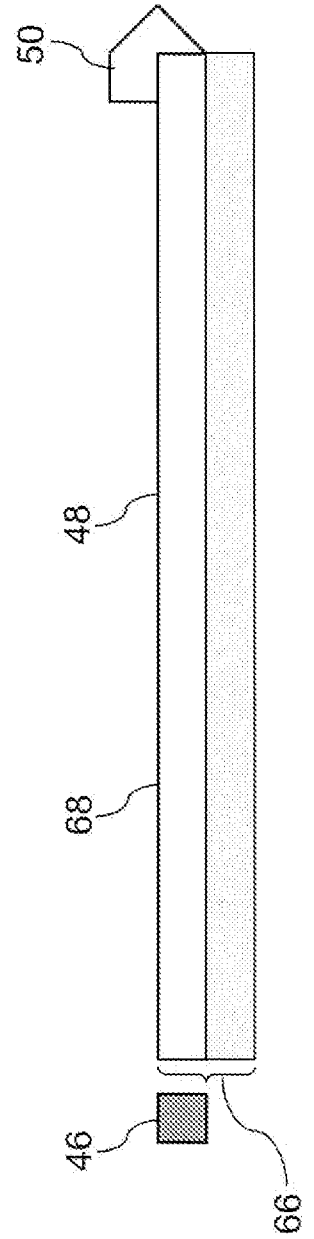


Fig 10C

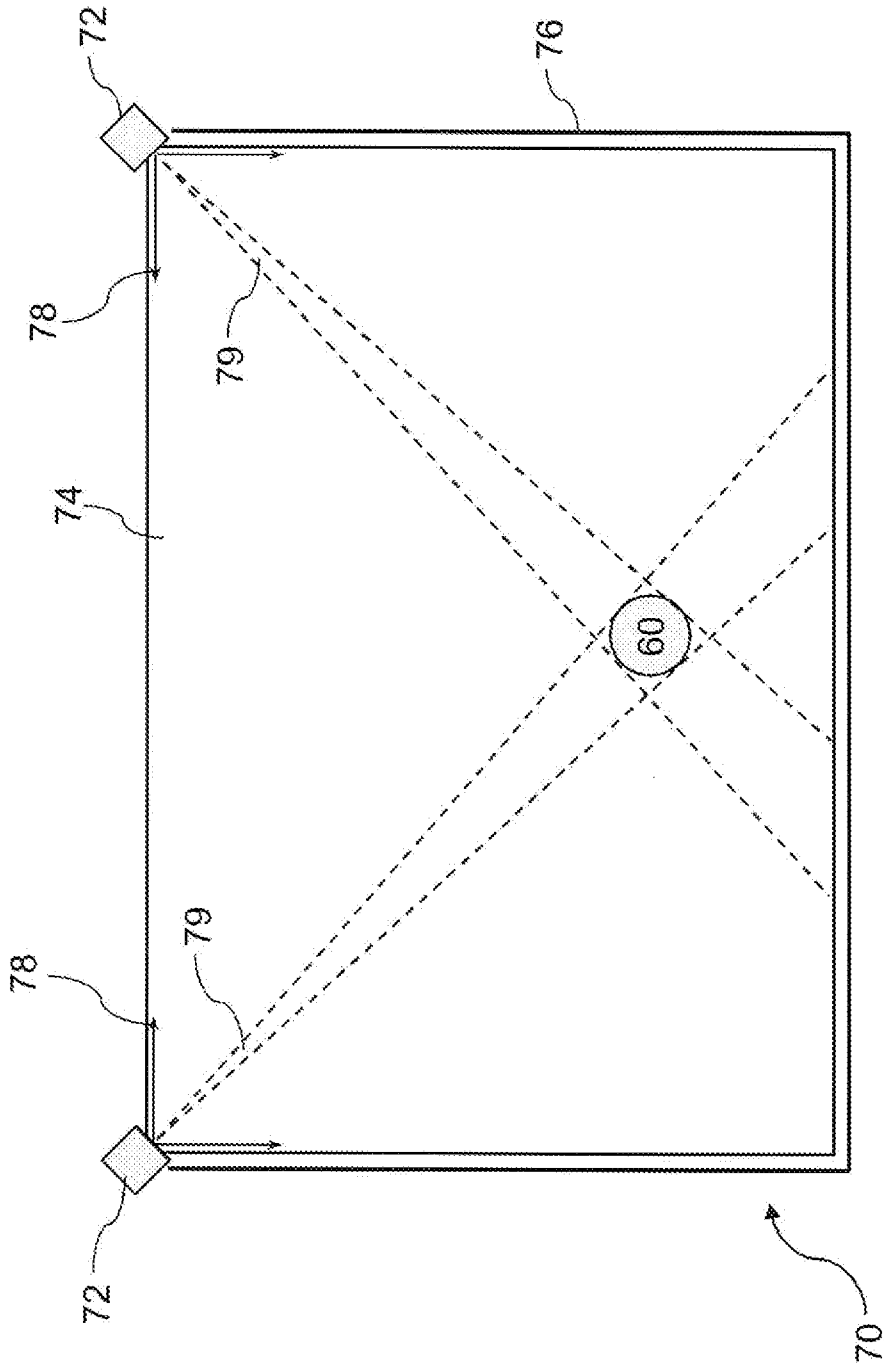


Fig 11

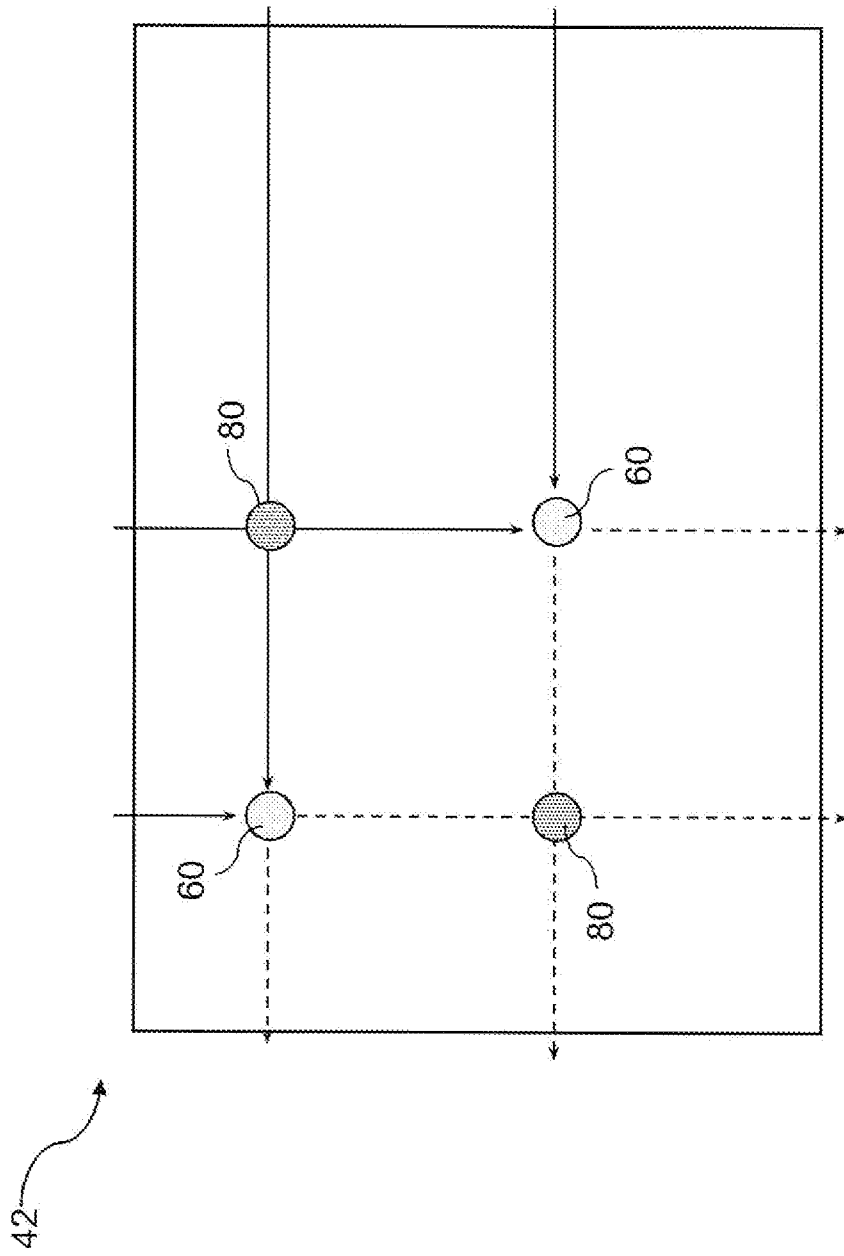


Fig 12A

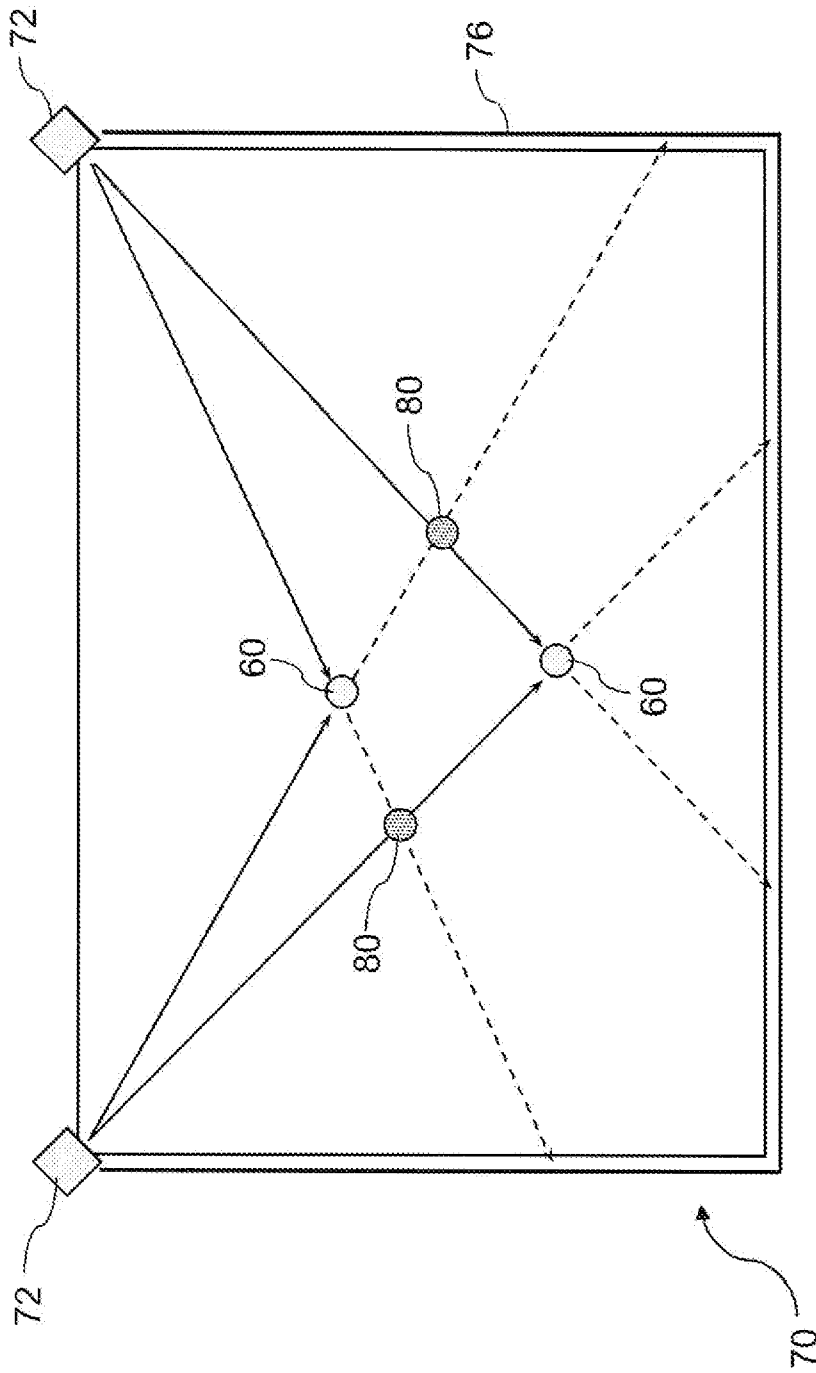


Fig 12B

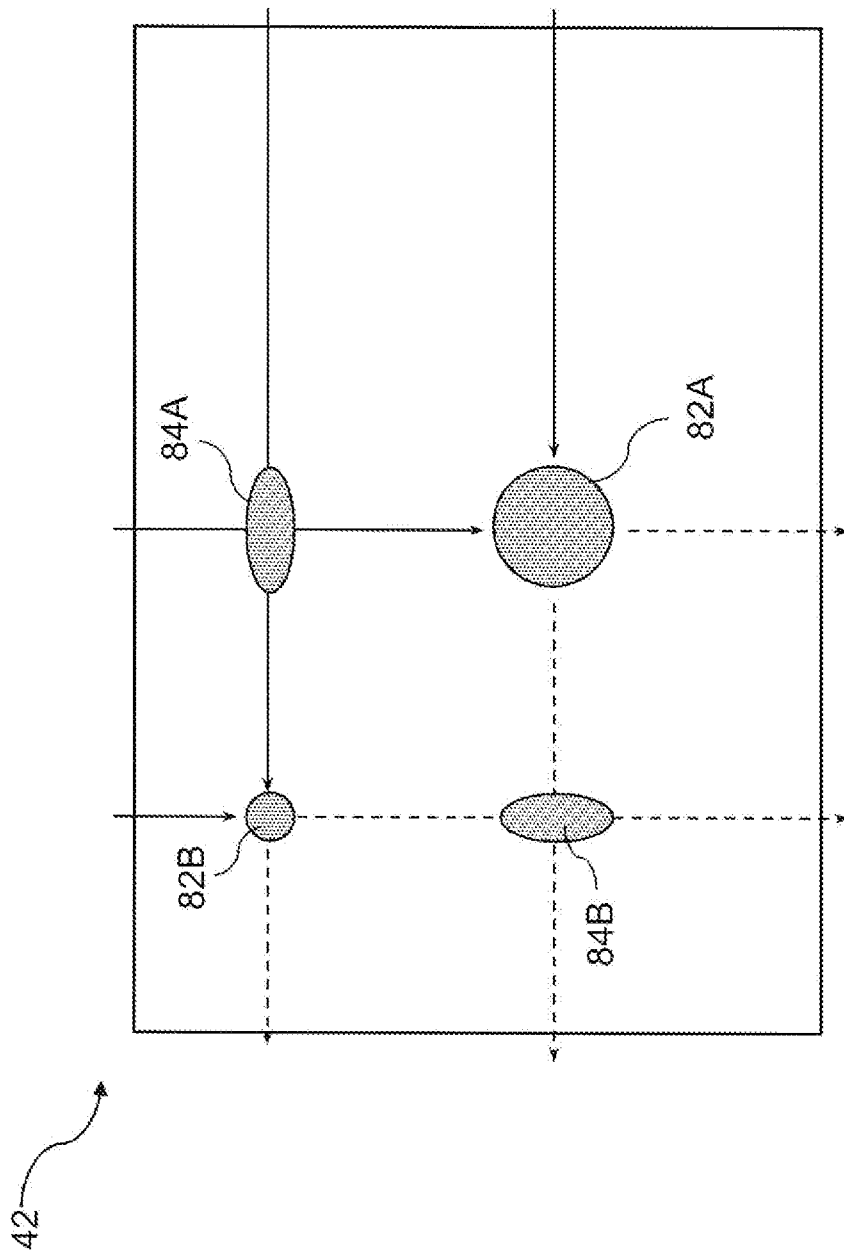


Fig 13

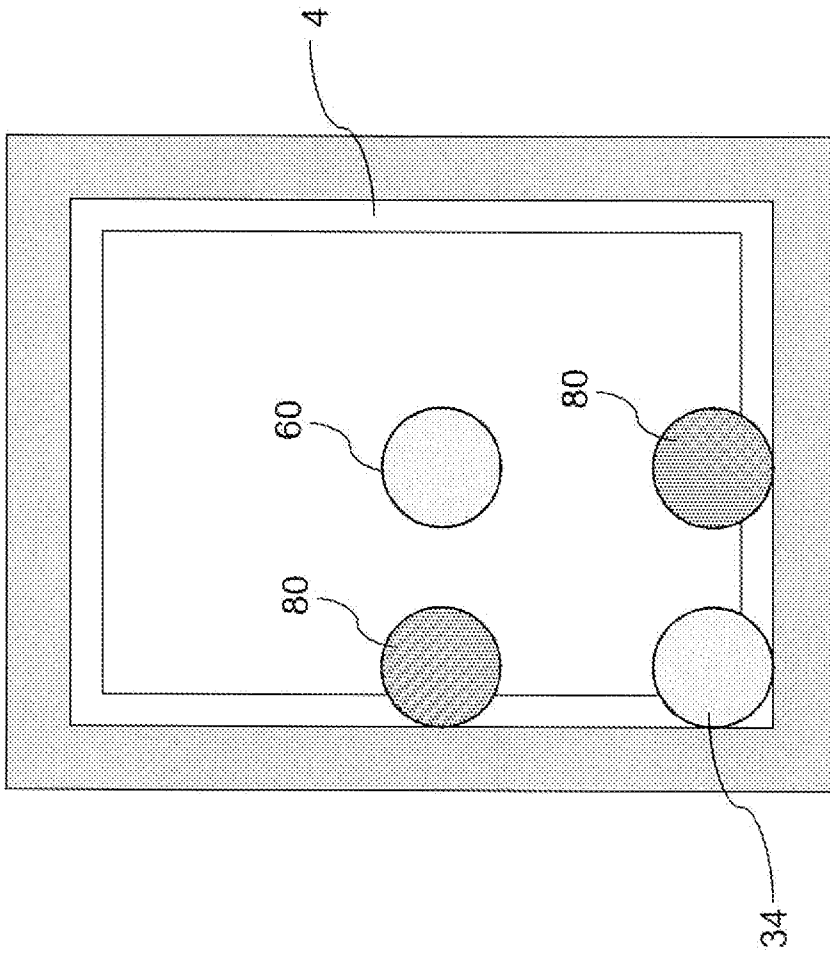


Fig 14

12/14

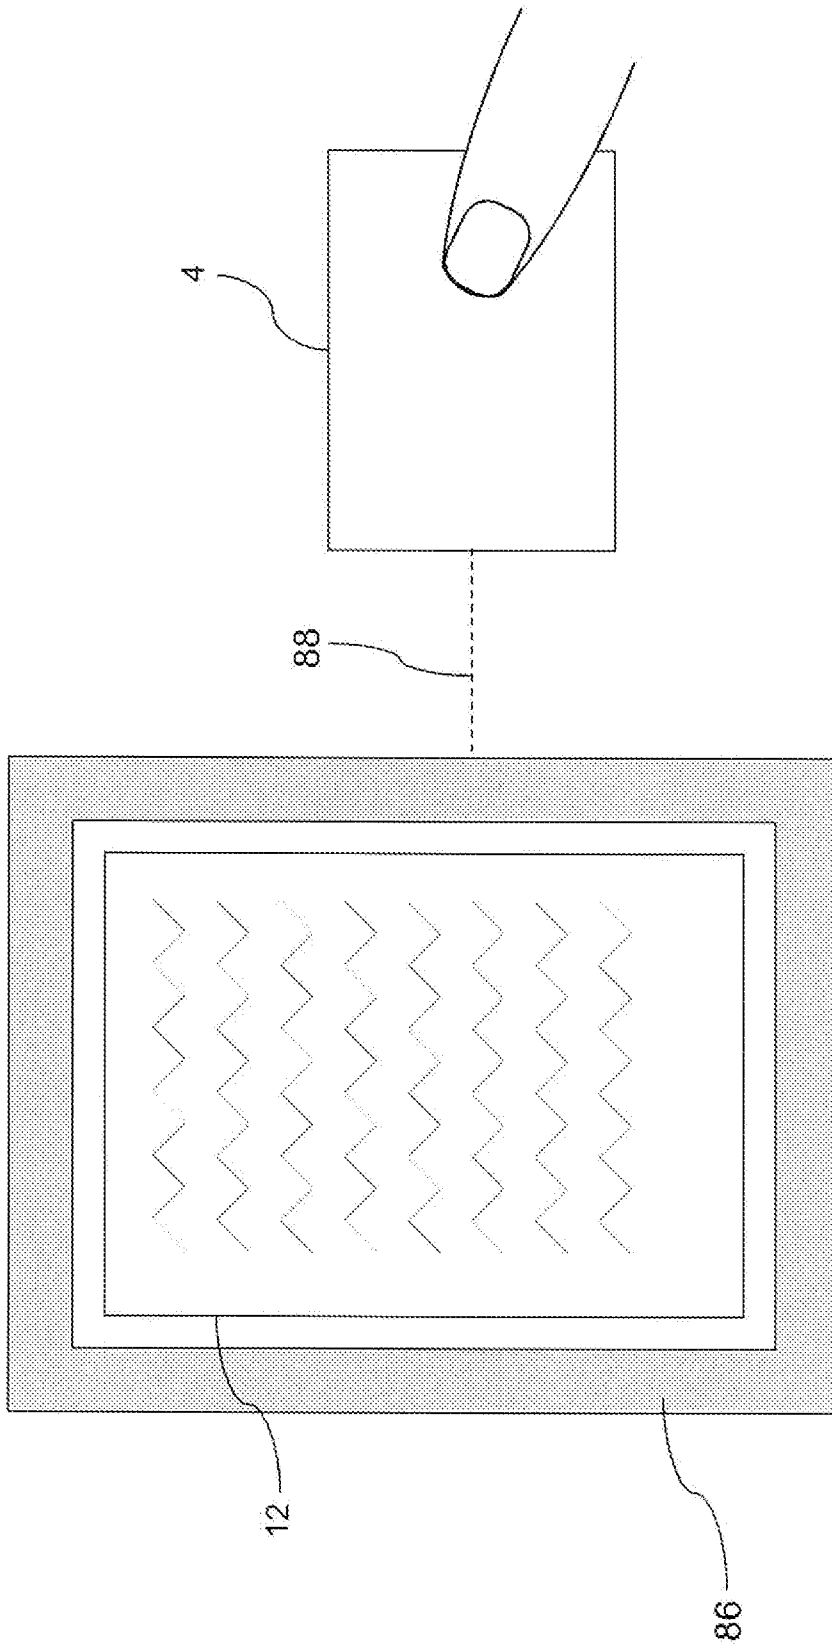


Fig 15

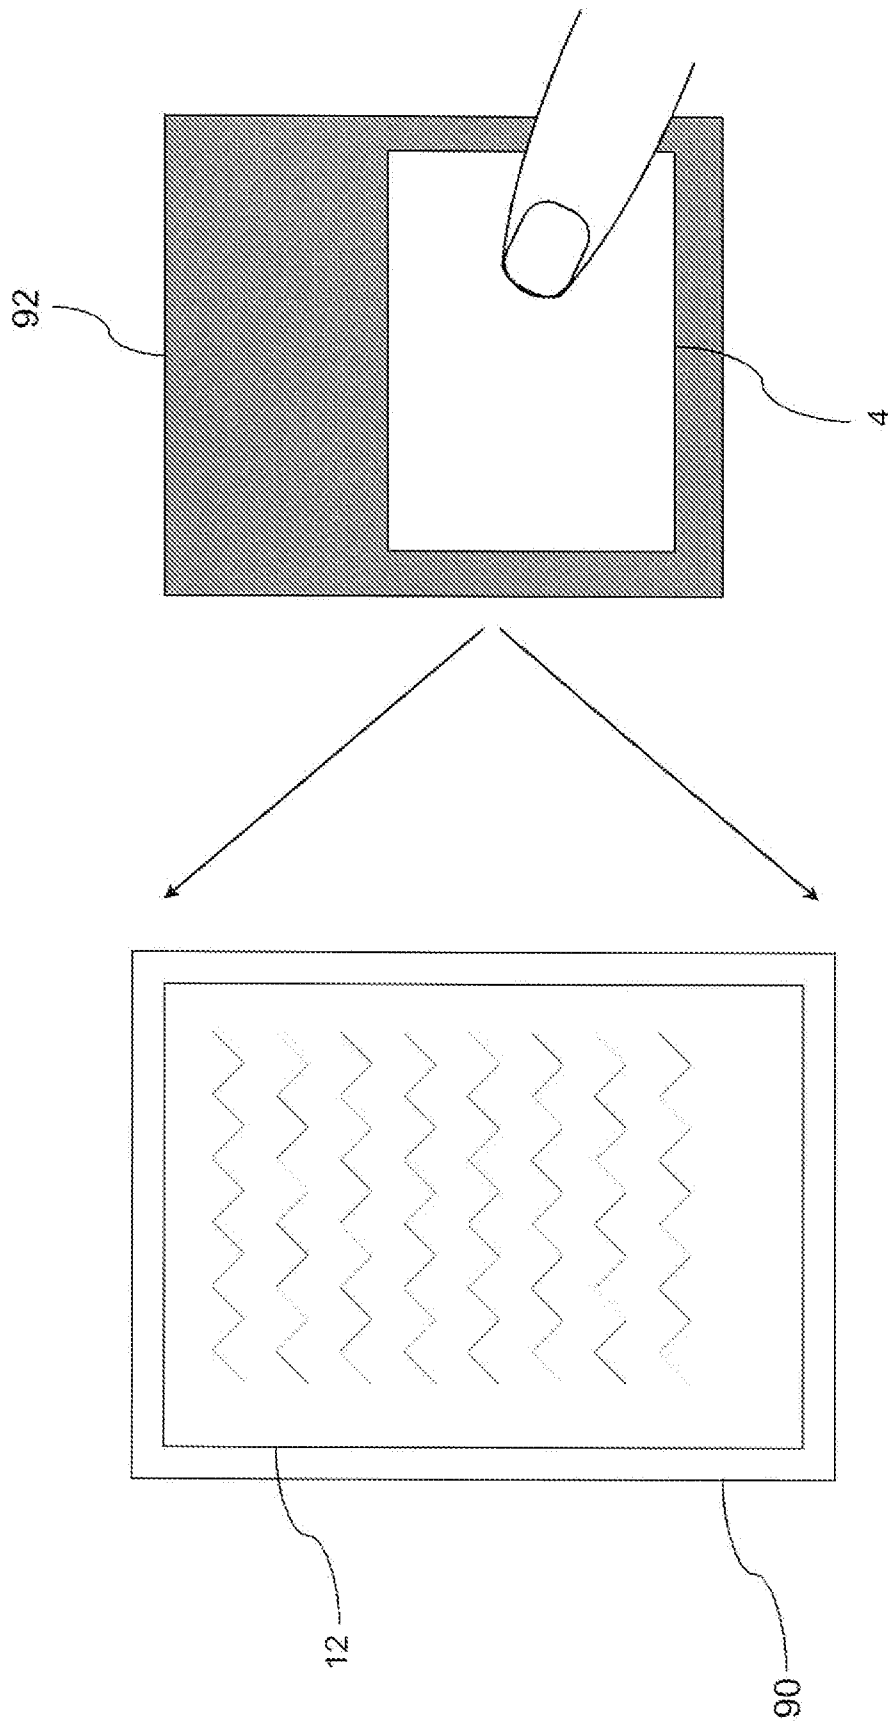


Fig 16A

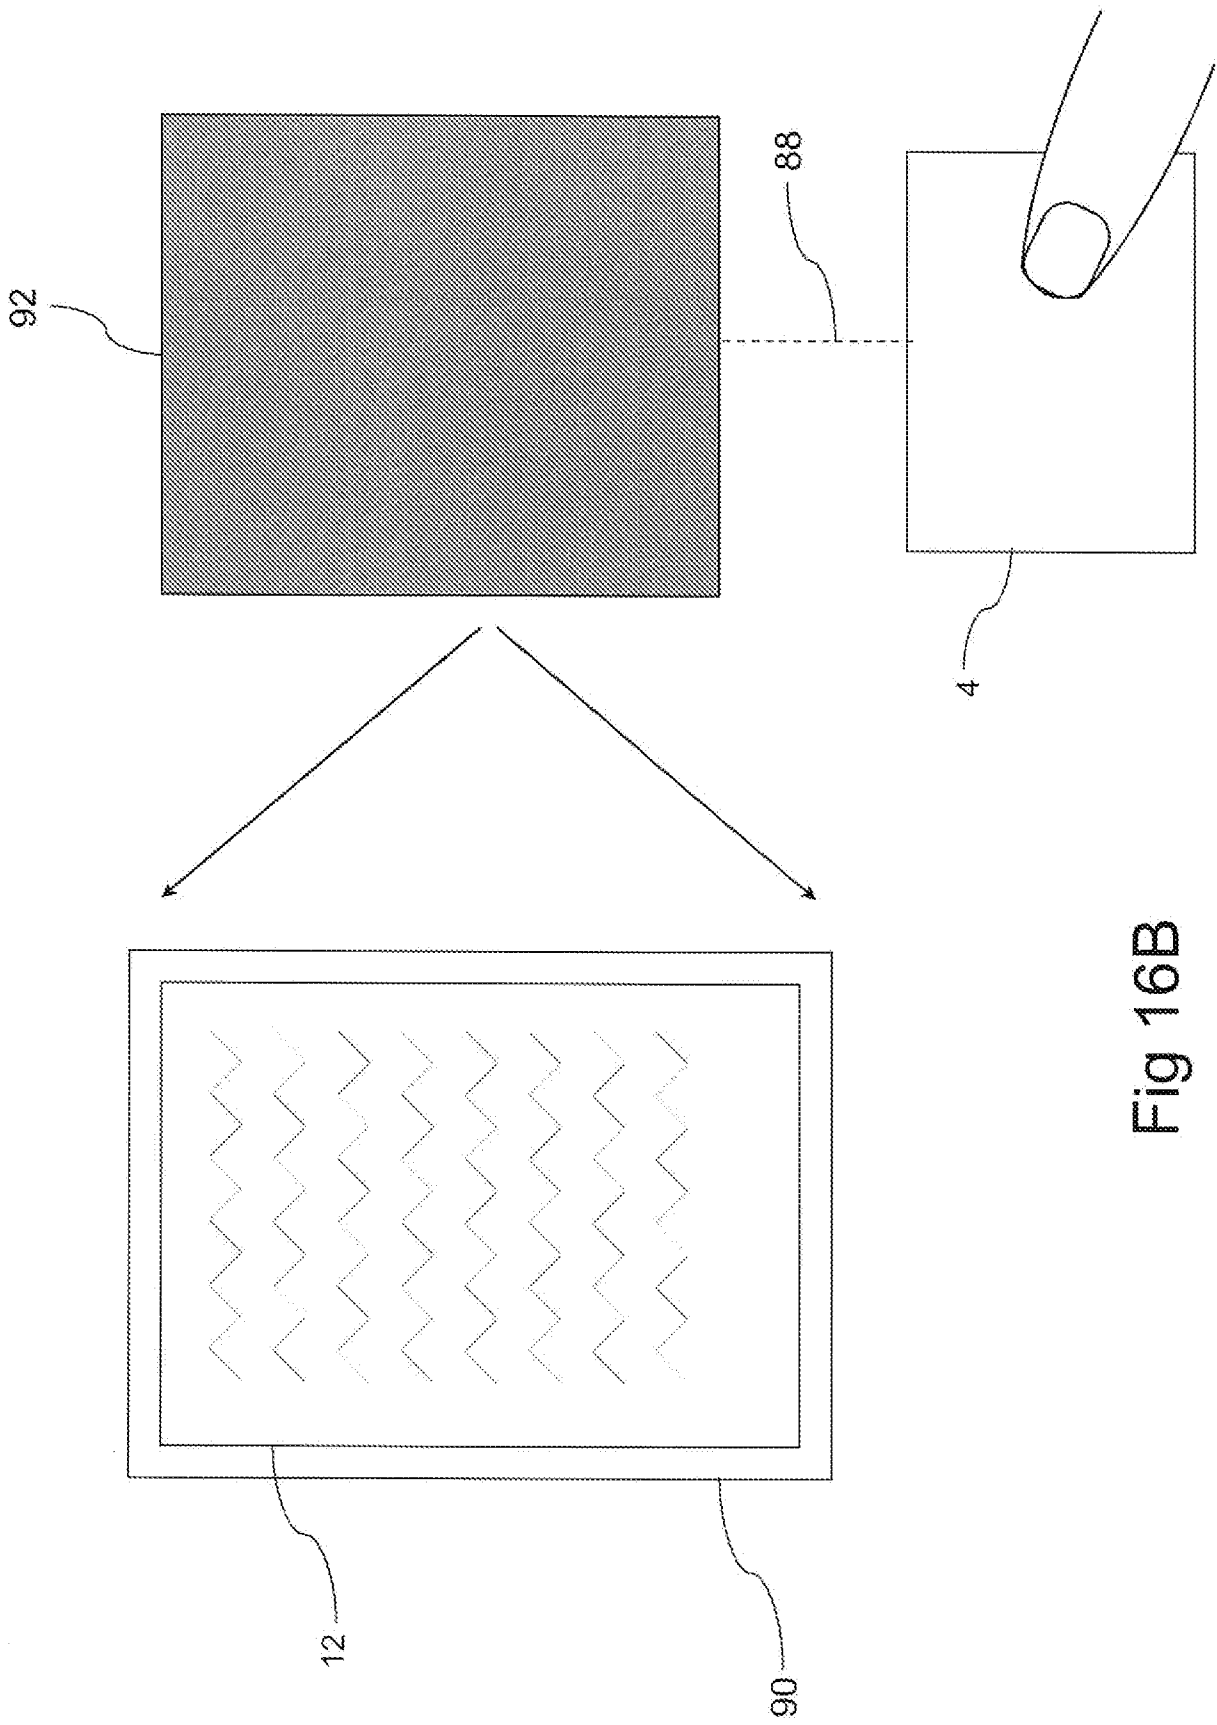


Fig 16B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2011/000607

A. CLASSIFICATION OF SUBJECT MATTER		
Int. Cl.		
G06F 3/041 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI, EPODOC, Google Patent, E-Sp@cae & keywords (touch screen, E-Book, threshold) & similar terms		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/0006958 A1 (POHJOLA et al.) 1 January 2009 (Para 0032, 0034)	1-2, 10, 14-15, 19-21
X	US 2009/0051661 A1 (KRAFT et al.) 26 February 2009 (Para 0030, 0039)	1-2, 10, 14-15, 19-21
X	US 6310610 B1 (BEATON et al.) 30 October 2001 (Abstract, Col 6-8)	1-5, 8-11, 14-15, 19-21
Y		6-7, 12-13, 16-18
Y	US 7103848 B2 (BARSNESS et al.) 5 September 2006 (Col 4 Lines 7-8)	6
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 01 August 2011		Date of mailing of the international search report 8 AUG 2011
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. +61 2 6283 7999		Authorized officer KANWAL PAHWA AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No : +61 2 6283 2644

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2011/000607

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2005/0273700 A1 (CHAMPION et al.) 8 December 2005 (Para 0029)	7
Y	US 2008/0259053 A1 (NEWTON) 23 October 2008 (Para 0007, 0009)	12-13, 16-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU2011/000607

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member					
US	2009006958	CN	101689094	KR	20100023914	WO	2009004525
US	2009051661	NONE					
US	6310610	WO	9928812				
US	7103848	US	2004201633	US	2006282797	US	7350704
		US	2006282778	US	7783986	US	2008141182
US	2005273700	NONE					
US	2008259053	EP	2135155	WO	2008128096		
<p>Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.</p> <p style="text-align: right;">END OF ANNEX</p>							