

(21) Application No: **1105221.4**  
(22) Date of Filing: **29.03.2011**  
(30) Priority Data:  
(31) **12771918** (32) **30.04.2010** (33) **US**

(51) INT CL:  
**H01J 49/04** (2006.01) **H01J 49/06** (2006.01)  
(56) Documents Cited:  
**WO 2008/055667 A** **US 6818889 A**  
**US 20090321655 A** **US 20040245458 A**  
**US 20040195503 A**

(71) Applicant(s):  
**Agilent Technologies Inc**  
**5301 Stevens Creek Boulevard, Santa Clara,**  
**CA 95051, United States of America**

(58) Field of Search:  
INT CL **H01J**  
Other: **ONLINE: EPODOC, WPI.**

(72) Inventor(s):  
**Michael Ugarov**

(74) Agent and/or Address for Service:  
**Agilent Technologies Deutschland GmbH**  
**Patentabteilung, Herrenberger Strasse 130,**  
**Böblingen 71034, Germany**

(54) Title of the Invention: **Input port for mass spectrometers that is adapted for use with ion sources that operate at atmospheric pressure**

Abstract Title: **Input port for mass spectrometers that is adapted for use with ion sources that operate at atmospheric pressure**

(57) A mass spectrometer and method for operating the same. The mass spectrometer 22 includes a vacuum chamber 21 and an input port 23 that receives ions to be analyzed in the mass spectrometer. The chamber 21 is adapted to operate at a first pressure less than atmospheric pressure, and includes a wall 24 that separates the chamber 21 from an environment outside 22 the chamber at a second pressure which is at atmospheric pressure. The input port 23 provides a pressure drop between the outside environment 22 at a second pressure and the chamber 21 at a first pressure. The input port 23 includes a plurality of channels 30, each channel having first and second electrodes (Fig. 4 31, 32) arranged on opposing surfaces of that channel (33) and having first and second ends. The first end of each channel is at a pressure equal to the second pressure and in fluid communication with the outside environment and the second end is at a first pressure inside the chamber which is less than the second pressure.

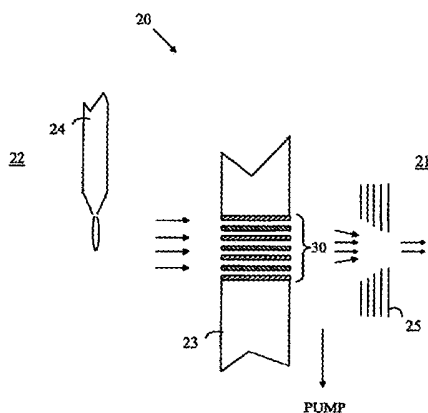


FIGURE 3

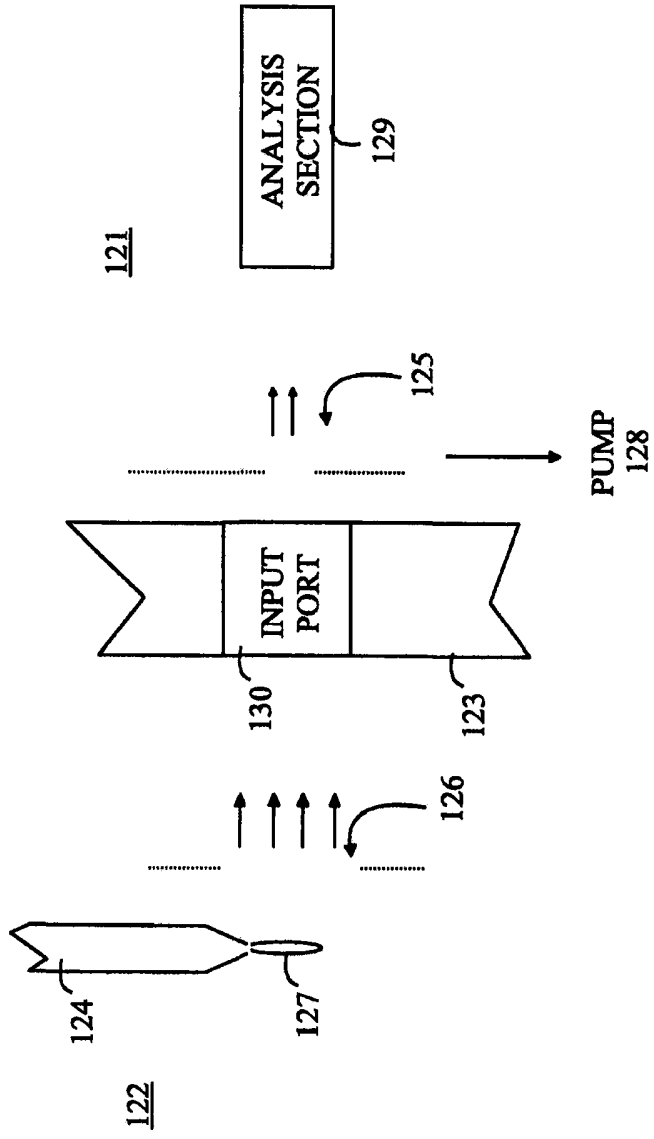


FIGURE 1

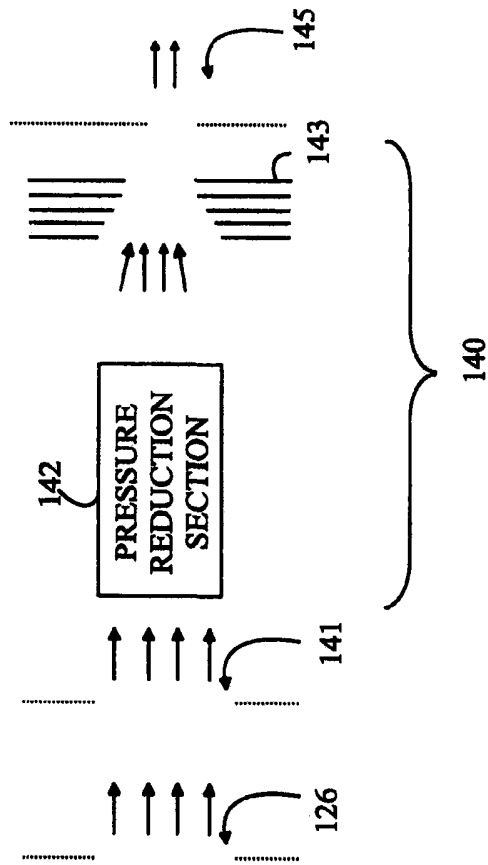


FIGURE 2

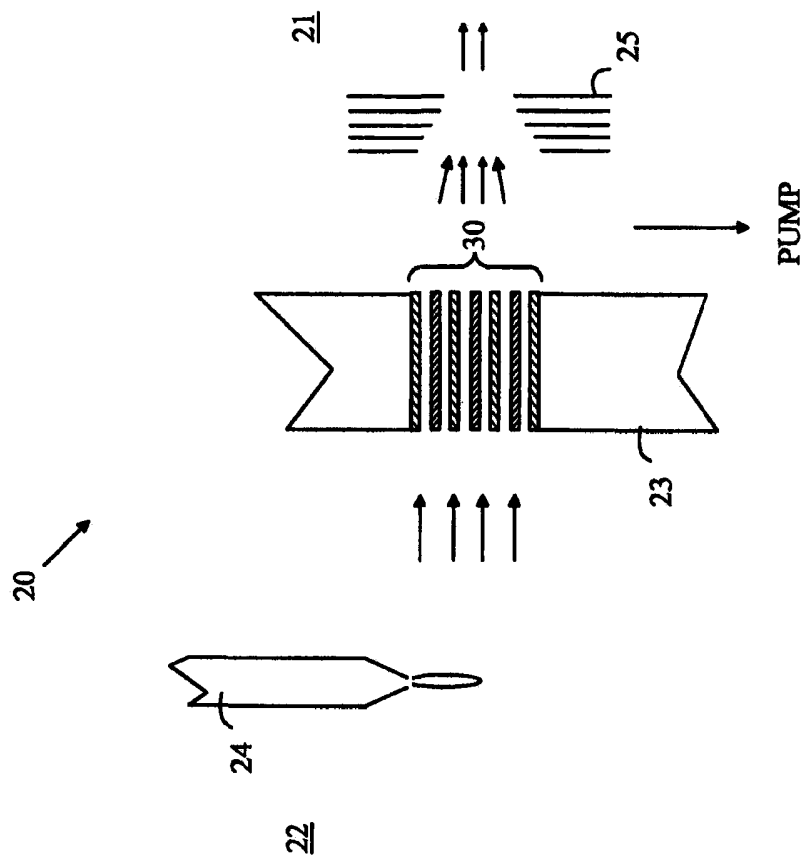


FIGURE 3

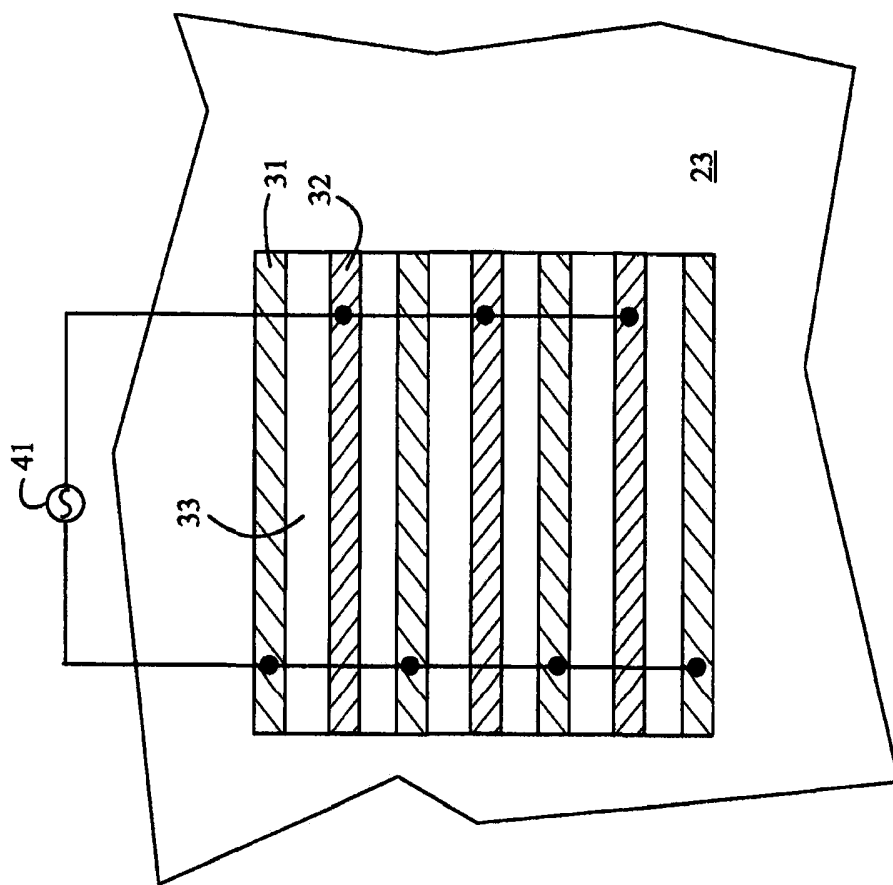


FIGURE 4

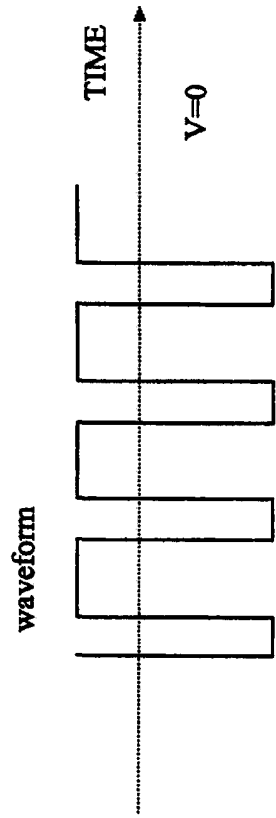


FIGURE 5

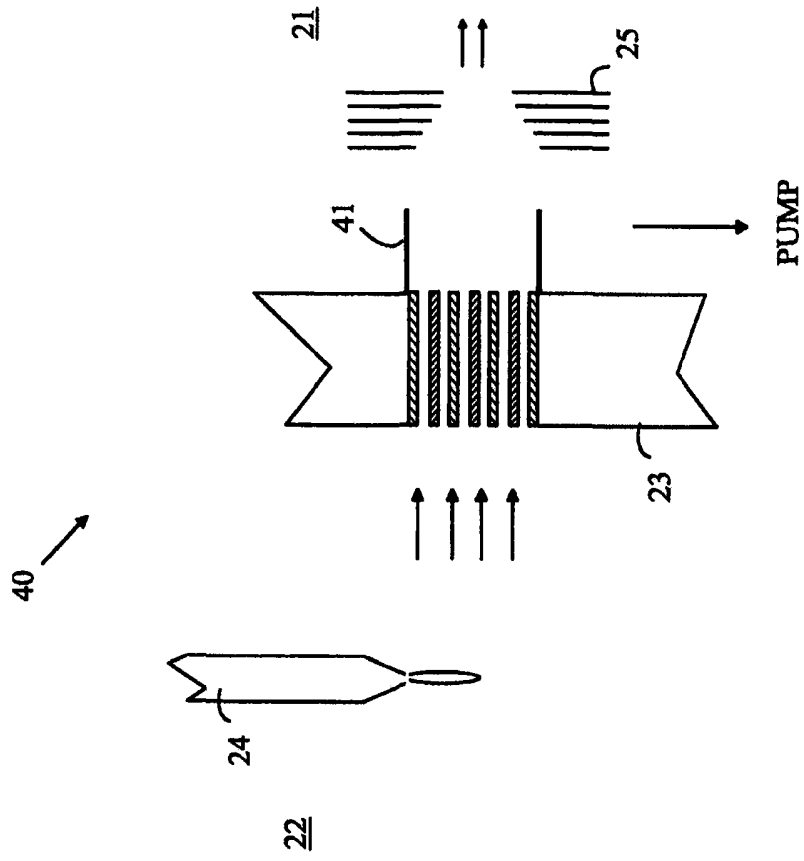


FIGURE 6

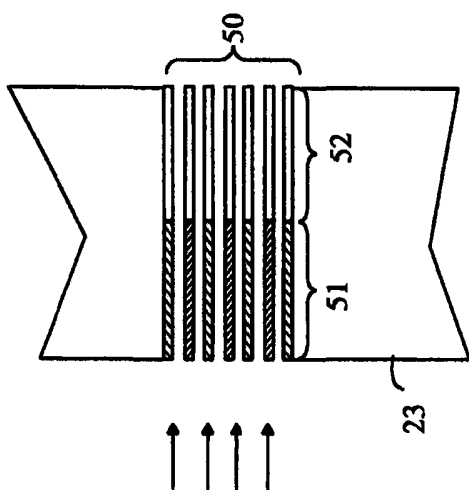


FIGURE 7A



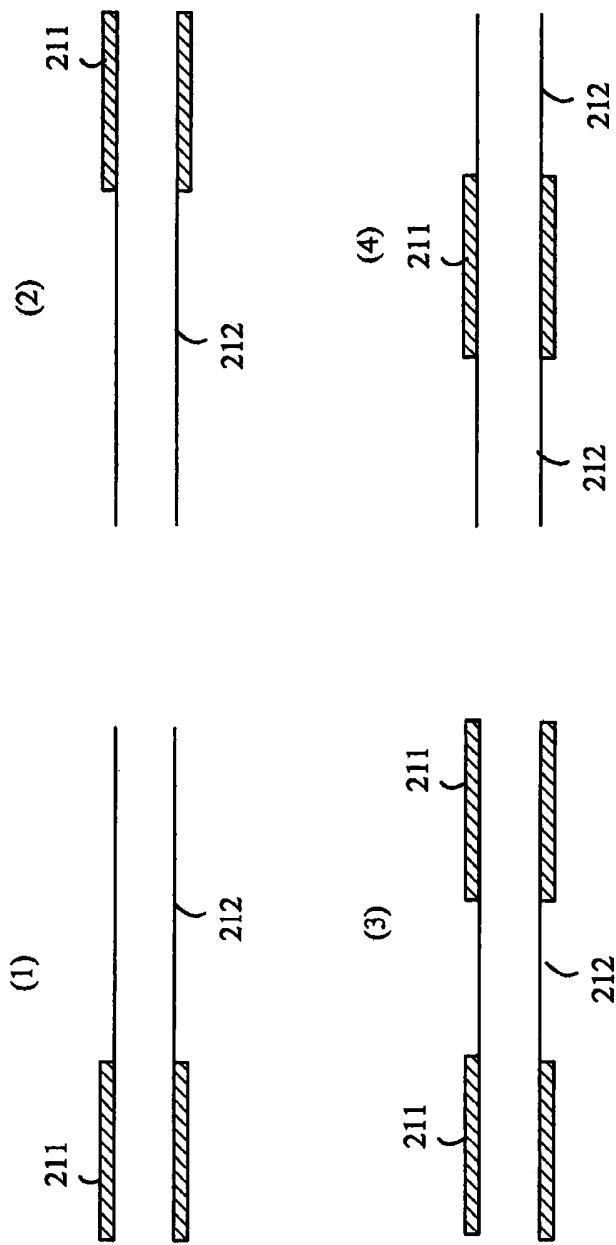


FIGURE 7B

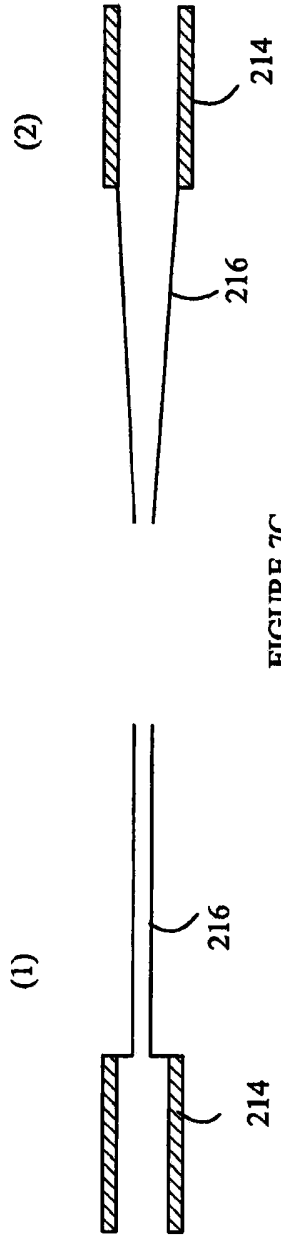


FIGURE 7C

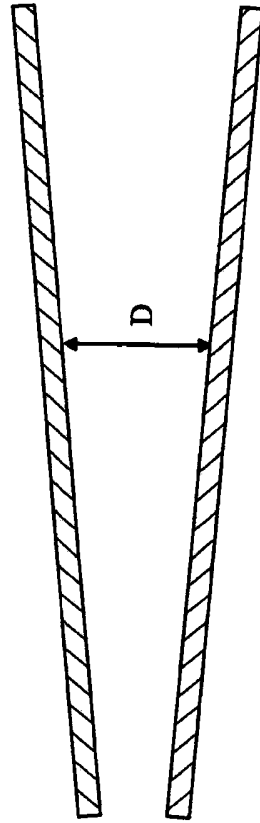


FIGURE 7D

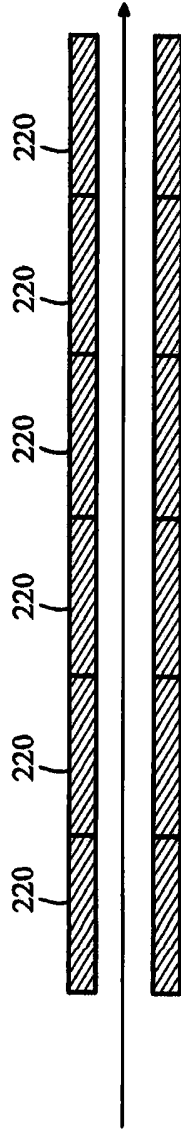


FIGURE 7E

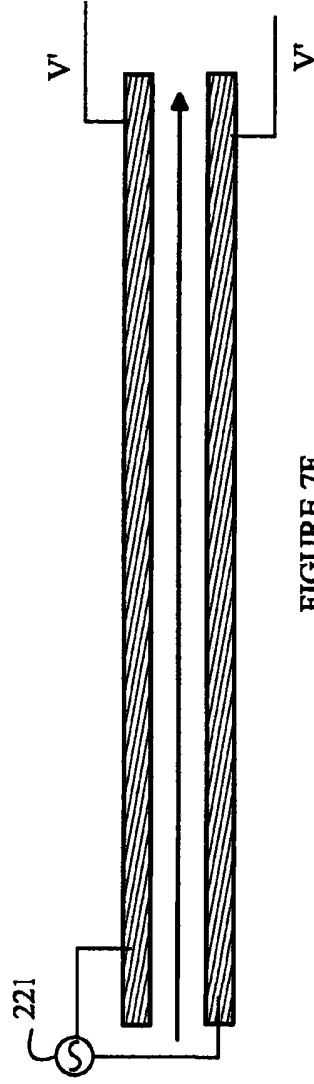


FIGURE 7F

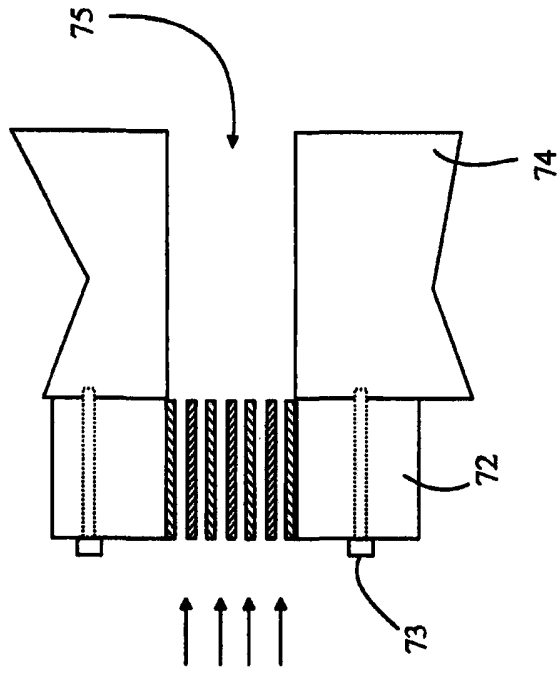


FIGURE 8

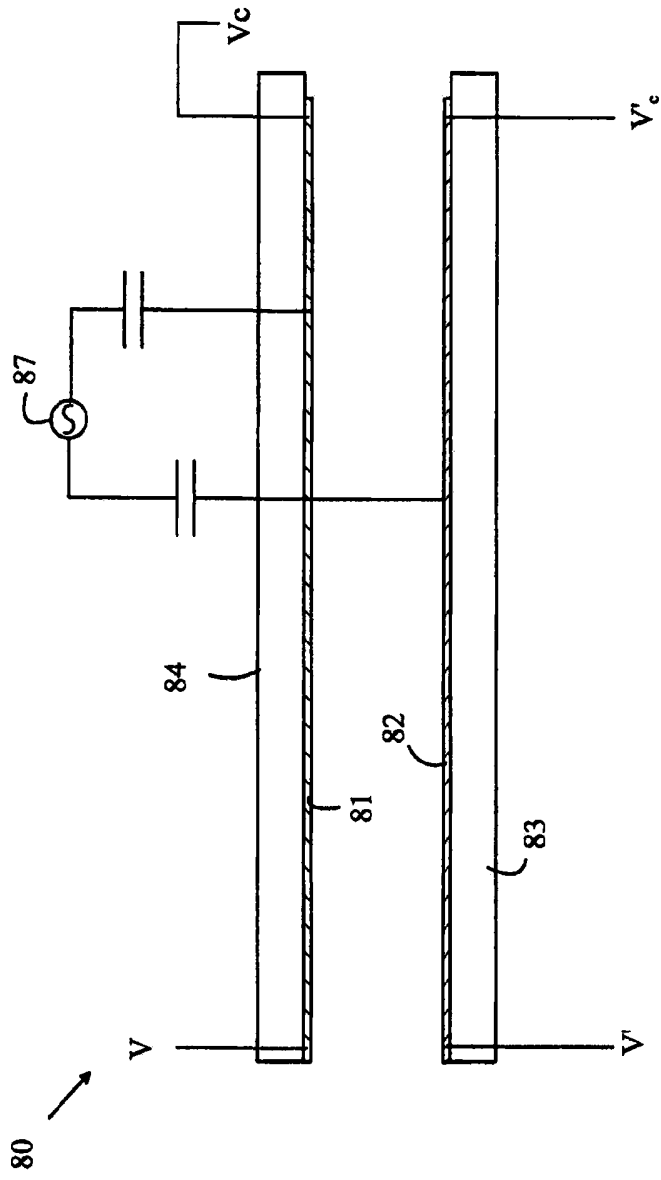


FIGURE 9

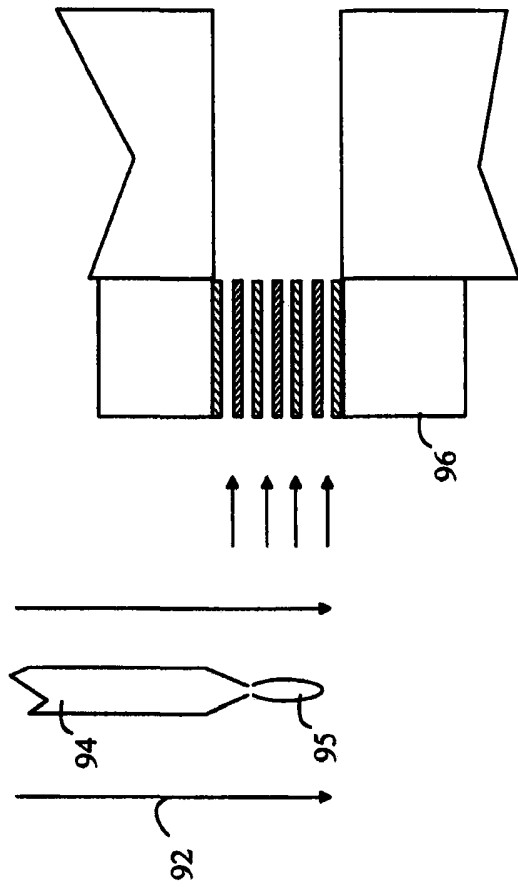


FIGURE 10

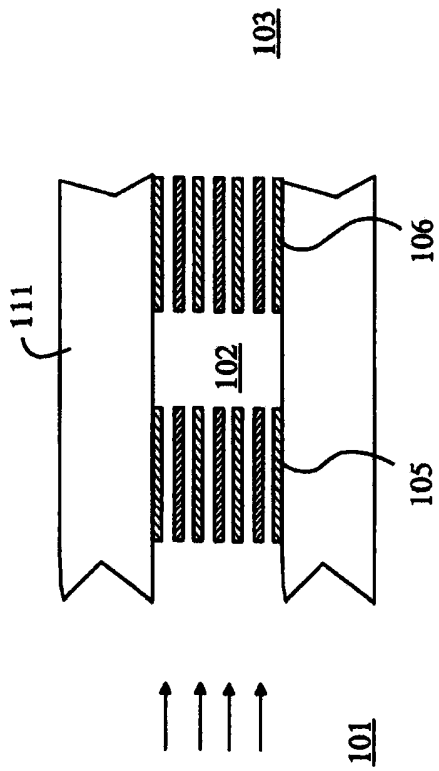


FIGURE 11

**Input Port for Mass Spectrometers that is Adapted for use with Ion Sources that Operate at Atmospheric Pressure**

[0001] Mass spectrometers separate ions based on the charge-to-mass ratio of the ions. A compound that is to be analyzed utilizing a mass spectrometer must first be ionized. The ionization process can also lead to the breakup of the compound into a number of ions whose relative abundances in the mass spectrometer spectrum are indicative of the type of compound. Ionization sources that operate at atmospheric pressure are useful in the analysis of many compounds of interest. However, such sources require some form of interface between the ion source and the vacuum of the mass spectrometer to preserve the vacuum within the mass spectrometer.

[0002] Typically, the interface is a capillary tube having one end that samples ions from the ion source and the other end in the mass spectrometer. The efficiency with which ions are moved from the ion source to the mass spectrometer through such a tube is low due to the size of the tube and losses in the tube. In addition, if the tube is constructed from a dielectric, ions that are absorbed onto the surface of the tube can create a space charge that hinders the transit of ions of the same charge through the tube.

[0003] Alternatively, a small orifice is used to limit the flow between the source and the mass spectrometer. In this case, the efficiency of ion collection is also low because the diameter of the orifice must be small to preserve the vacuum within the mass spectrometer.

[0004] Further, the sample of interest is often dissolved in a solvent that is vaporized in the ion source. The carrier solvent and gases used in the ion source to vaporize the solvent can result in unwanted ions that lead to undesirable background species in the mass spectrometer.

[0005] Embodiments of the present invention include a pressure interface that is configured for use in mass spectrometers or other instruments that operate at reduced pressure



but must receive ions that are generated at higher pressures. The pressure interface includes a plurality of channels that have electrodes on the walls thereof that allow the channels to be used for filtering the ions in addition to providing the interface between the two environments that are different pressures. When used to filter the ions, the electrodes are powered to provide an alternating electric field in the channels.

[0006] Preferred embodiments of the invention are described below, by way of example only, with reference to the accompanying drawings, in which:

[0007] Figure 1 illustrates an analysis system in which ions generated by ion source 124 operating at atmospheric pressures are analyzed by a mass spectrometer that operates at a highly reduced pressure;

[0008] Figure 2 illustrates an input port according to one embodiment of the present invention;

[0009] Figure 3 is a cross-sectional view of an analysis system that utilizes a pressure reduction section according to one embodiment of the present invention;

[0010] Figure 4 is an end view of input port 30;

[0011] Figure 5 illustrates one voltage pattern that can be used to separate the ions prior to the ions entering into the mass spectrometer;

[0012] Figure 6 is a cross-sectional view of another embodiment of a mass spectrometer according to the present invention;

[0013] Figures 7A-7F illustrate different forms of channel geometries that can be utilized in embodiments of the present invention;

[0014] Figure 8 is a cross-sectional view of a portion of a mass spectrometer wall 74 to which a channel plate 72 has been attached using fasteners 73;

[0015] Figure 9 illustrates one embodiment of a channel that can be utilized in the present invention;

[0016] Figure 10 illustrates the use of a spray ion source with the input port of an embodiment of the present invention; and

[0017] Figure 11 illustrates an input port according to another embodiment of the present invention.

[0018] The manner in which embodiments of the present invention provide advantages can be more easily understood with reference to Figure 1, which illustrates an analysis system in which ions generated by ion source 124 operating in a region 122 at atmospheric pressure are analyzed by a mass spectrometer 121 that operates at a reduced pressure. Ion source 124 is an electro-spray source in this example. A solvent containing the chemical species of interest is sprayed through a nozzle and generates an ion plume 127 in response to a potential difference between ion source 124 and the wall 123 of mass spectrometer 121. Ion source 124 can be characterized by an ion source output aperture 126 through which ions generated in plume 127 exit in a direction toward mass spectrometer 121. Mass spectrometer 121 is characterized by an input acceptance aperture 125 within the mass spectrometer that defines the area through which ions must enter the analysis section 129 of the mass spectrometer to be properly analyzed. An input port 130 in the mass spectrometer wall provides the interface between aperture 126, which is at atmospheric pressure and aperture 125, which is at a reduced pressure. One goal of an input port is to match the output of the ion source to the input of the mass spectrometer such that as high a fraction of the ions that exit the source output aperture are directed into the input acceptance aperture of the mass spectrometer. The amount of gas that leaks through input port 130 is preferably less than the maximum gas flow that can be removed by pump 128 without substantially altering the direction of the ions that are entering mass spectrometer 121.

[0019] Input port 130 preferably restricts the flow of gas to a value less than the maximum gas flow while interfacing aperture 126 to aperture 125. For many systems of interest, aperture 126 is significantly larger than aperture 125. Hence, either a significant fraction of the ions generated by ion source 124 must be discarded or input port 130 may provide a concentrating function such that the ions leaving aperture 126 are “funneled” into aperture 125. Ion concentrators that operate at atmospheric pressure present significant design problems. Hence, many prior schemes use a small aperture input port, such as a capillary tube, to sample the ions leaving aperture 126 and accept the resultant loss in efficiency. Refer now to Figure 2, which illustrates an input port according to one embodiment of the present invention. Input port 140 has a pressure reduction section 142 that is characterized by an input aperture 141 and an output

aperture 145. Input aperture 141 is chosen to have a size comparable to that of the output aperture 126 of the ion source. The output of pressure reduction section 142 is an ion beam having substantially the same size as that arriving through input aperture 141. The output beam from pressure reduction section 142 is in the low pressure environment inside the mass spectrometer, and hence, may be concentrated. The input beam is concentrated by electrodes 143 of the ion concentrating optics to a size that is substantially the same size as the input aperture to the mass spectrometer analysis section that is maintained at low pressure as discussed above.

[0020] The pressure at the input side of the port is substantially equal to the atmospheric pressure or lower, but preferably above 30 Torr. The output side of the port is at a pressure less than the pressure of input side, and preferably below 30 Torr.

[0021] Refer now to Figure 3, which is a cross-sectional view of an analysis system that utilizes a pressure reduction section according to one embodiment of the present invention. Analysis system 20 includes an ion source 24 and a mass spectrometer having an interior low-pressure chamber 21 that is separated from the outside environment 22 by a wall 23 in which input port 30 is located. Ions from an ion source 24 are swept into input port 30 by the pressure differential across wall 23. Chamber 21 is maintained at a reduced pressure by a vacuum pump that compensates for the gases input through input port 30. The dimensions of input port 30 are chosen such that the desired flow of gas through the channels of the port is achieved and the vacuum pump can maintain the desired pressure differential across wall 23 while not significantly interfering with the flow of ions into the analysis section of the mass spectrometer. In this embodiment, the mass spectrometer includes a set of electrodes 25 that concentrate the incoming ion beam.

[0022] Refer now to Figure 4, which is an end view of input port 30. Input port 30 includes a plurality of planar electrodes that are located inside rectangular channels through which the ions pass. Exemplary electrodes are shown at 31 and 32. A typical channel is shown at 33. The electrodes are connected to a power source 41 that controls the potential on the electrodes. The potential waveform can be AC, DC, or AC with a DC component as discussed below. Since

the electrodes are conductors that are tied to a potential source, the space charge accumulation problems created by capillary tubes that have dielectric walls are substantially reduced in this embodiment.

[0023] The electrodes can be tied to a fixed and/or time-varying electric potential source. When the time-varying potential source is utilized, the electrodes can be used to separate the ions prior to the entry of the ions into the mass spectrometer by utilizing voltage patterns analogous to those used in field asymmetric waveform ion mobility spectrometers. This type of separation is based on the observation that the drift speed of many ions of interest in an electric field is non-linear with respect to the field strength. This phenomenon can be used to separate ions having the same charge-to-mass ratio, and hence, can provide separation based on a different criterion than the mass spectrometer. The ions that pass through the electrode structure depend on the voltage pattern applied to the electrodes.

[0024] Refer to Figure 5, which illustrates one voltage pattern that can be used to separate the ions prior to the ions entering into the mass spectrometer. This pattern is provided between each pair of adjacent electrodes. The pattern is an alternating voltage, typically in the RF range, in which the duration of one polarity is longer than the other polarity. The amplitudes in both polarities are set unequal so that the average voltage is equal to zero. In practice, the AC signal can be capacitively coupled across each pair of electrodes.

[0025] If the mobility of ions were always proportional to the electric field, all ions would be subjected to zero average force from the field, and would travel through the channel while oscillating in transverse direction. In fact, due to the aforementioned nonlinearity, ions get deflected and may hit the walls of the channel. A DC bias is applied between the electrodes such that only ions with specific relationship between ion mobility and field strength are transmitted. The remaining ions are absorbed onto the electrode surfaces. A two-dimensional analysis can be provided by sweeping the bias through a predetermined range and analyzing each group of ions that enters into the mass spectrometer using the mass spectrometer to separate the ions based on charge-to-mass ratio.

[0026] If the ion separation based on high field ion mobility is not required for a specific analysis, the alternating RF voltage can be turned off, and the ions are simply travelling through the channels with the flow of gas. Fewer ions are therefore lost on the walls of the channels, and the highest sensitivity of the mass spectrometer based analysis can be achieved.

[0027] The above-described embodiments utilize an input port that is part of the wall of the vacuum containment vessel of the mass spectrometer. However, it should be noted that the port could be provided in a removable form such that different input ports can be utilized for different types of analysis and/or ion sources. The different input ports can vary in terms of the width, length, shape, number and density of the channels. These parameters affect the flow rate through the input port, and hence, provide a mechanism for matching the desired input flow into the mass spectrometer with the flow needed to efficiently provide ions from the ion source. By adjusting these parameters, the port can be optimized to provide a desired gas flow rate, ion collection area, and ion separation by high field ion mobility. In one embodiment of the invention, the channel width is chosen to be between 20  $\mu\text{m}$  and 600  $\mu\text{m}$  and the channel lengths are chosen to be between 0.3 mm and 100 mm. The total open cross-sectional area can be as large as 10  $\text{mm}^2$ .

[0028] It should be noted that field asymmetric waveform ion mobility separation electrodes are typically operated with both ends of the channels at a pressure that is close to atmospheric pressure. That is, the pressure gradient across the separation electrodes is small. In the above-described embodiments, the pressure gradient across the channel can be much greater since one end of the channel can be at atmospheric pressure while the other end is at the pressure of the vacuum chamber of the mass spectrometer. As a result, there can be a continuous variation of gas pressure, temperature and velocity along the length of the channel, which could adversely affect the resolution of the ion separation and the rate of transmission for ions with specific mobility values.

[0029] This is due to the fact that the high field ion mobility separation effects are dependent on the ratio between the electric field and the gas density ( $E/N$ ). If the pressure along the channel is changing significantly, the  $E/N$  ratio is changing as well and the AC field effect on the ion motion is changing. This can lead to instability in the trajectories of the ions that need to reach the mass spectrometer.

[0030] This potential problem can be mitigated by providing an arrangement in which the pressure drop experienced during the separation of the ions is only a fraction of the total pressure drop between the ion source and the interior of the mass spectrometer, or alternatively,  $E/N$  ratio is maintained substantially constant by adjusting the field strength  $E$  along the length of the channels.

[0031] One method for reducing the pressure gradient in the separation portion of the channels is to provide an extension of the input port within the mass spectrometer such that a portion of the pressure drop occurs within the extension, and hence, the portion of the pressure drop across the separation channels is reduced. Refer now to Figure 6, which is a cross-sectional view of another embodiment of a mass spectrometer according to the present invention. Mass spectrometer 40 differs from mass spectrometer 20 discussed above with reference to Figure 3 in that an extension 41 of the input port extends into the interior of the mass spectrometer. The pressure drop across the separation channels is reduced by the pressure drop between the end of the separation channels and the interior 21 of the mass spectrometer.

[0032] While the embodiment shown in Figure 6 provides some reduction of the pressure drop across the separation channels, the fraction of the pressure drop across the separation channels is still more than half of the total pressure drop, since the cross-sectional area of extension 41 is much greater than the sum of the cross-sectional areas of the separation channels. Refer now to Figure 7A, which illustrates another embodiment of an input port according to the present invention. Input port 50 differs from input port 30 discussed above in that the electrodes within the separation channels to which the RF potential is applied only extend over a portion of the length of the channels as shown at 51. The remainder of each channel, which is shown at 52,

is a drift channel that absorbs a portion of the pressure drop so that the pressure drop across portion 51 is significantly reduced.

[0033] Figure 7B illustrates a number combinations of sections of individual channels with and without active electrodes. The sections with the separation electrodes are labeled 211, and the drift regions are labeled 212. The channel arrangement shown at 7B(1) provides considerable pressure drop in section 212, which is nearest to the mass spectrometer. The channel arrangement at 7B(2), on the other hand, provides the significant pressure drop on the side of the ion source.

[0034] In fact, ion separation based on high field asymmetric waveform ion mobility spectrometry can have some advantages when operated at pressures less than atmospheric. In particular, higher value of the ratio  $E/N$  can be obtained without risking electrical breakdown inside the channels. The channel arrangement shown in Figure 7B(2) allows running the separation at such reduced pressure.

[0035] Refer now to Figure 7B(3), which illustrates a channel with two electrode sections. The pressure in two sections is different due to the additional pressure drop in the middle section. Two independent ion separations can therefore be performed in these two sections by adjusting the parameters of the time-varying electric fields in each section. The arrangement shown in Figure 7B(4) can be utilized to perform separations in the intermediate pressure ranges.

[0036] Specific pressure conditions in the ion mobility separating section of the channels can also be set by using sections of channels with varying cross sections, shapes and lengths. Longer sections with smaller cross sections will provide faster pressure drop due to smaller conductance. Refer now to Figure 7C, which illustrates examples of channel geometries with varying cross sections. Figure 7C(1) illustrates an arrangement in which the channel cross-section is reduced in the drift section 216 compared to the separation section 214. Figure 7C(2) illustrates an arrangement in which the drift region has a cross-section that varies continuously to avoid abrupt changes in the channel cross-section that could give rise to turbulent flow and/or ion

loss. It should be noted that the arrangements shown in Figures 7C(1) and 7C(2) can be combined to form channels that have sections that vary in cross-section between sections that have constant cross-sections with electrodes for ion separation.

[0037] Problems associated with a significant pressure drop across the ion separation section can be further reduced by utilizing an arrangement in which the electric field also decreases as a function of distance along the channel such that changes in the ratio of electric field strength to gas density are reduced as a function of distance along the channel. One method for accomplishing this is to vary the distance between the electrodes in the ion separation section as shown in Figure 7D. In this embodiment, the distance,  $D$ , between the electrodes increases as the ions move along the channel in the direction of the pressure and hence, the gas density decreases. As a result, the electric field also decreases along the channel. The rate of increase of  $D$  is chosen such that the ratio of the electric field to gas density is approximately constant.

[0038] Another method for reducing the changes in electric field strength to gas density is to divide the electrodes into sections that are operated at different voltages such that the voltage decreases as a function of distance along the channel. Such an arrangement is shown in Figure 7E, which illustrates one separation channel in which the electrodes are divided into sections 220 that are operated at different voltages. By adjusting the drive voltage amplitudes in the various sections, variations in field strength to gas density are reduced. The drive voltages along the channel can also be reduced as a function of distance along the channel by utilizing resistive electrodes and coupling the two ends of the channel electrodes to different voltage rails, as shown in Figure 7F. In this arrangement, the time-varying waveform from generator 221 is coupled to the beginning of the channel electrode, while the ends of the channel electrodes are held at fixed potentials such that the drive signal amplitude decreases along the channel.

[0039] The above-described embodiments of the present invention utilize a channel insert that resides in the wall of the mass spectrometer vacuum chamber. However, embodiments in which the channel plate is attached to the outside of the mass spectrometer wall can also be constructed. Refer now to Figure 8, which is a cross-sectional view of a portion of a mass



spectrometer wall 74 to which a channel plate 72 has been attached using fasteners 73. Wall 74 includes a passage 75 that can also provide the function of extension 41 discussed above with reference to Figure 6. This arrangement allows different channel plates to be utilized in the input port depending on the requirements of particular ion sources. In addition, the removable channel plate allows for easy replacement of the channel plate when the plate becomes fowled with material from the ion source over time.

[0040] The above-described embodiments utilize conducting electrodes inside the channels through which the ions move. The electrodes could be solid metal, semiconductor, or coatings on an insulating substrate. If coatings are utilized, the electrodes can be constructed of a resistive material that is deposited on the substrate. The coatings can extend to the openings in the channels or be confined to the interior regions of the channels. In one aspect of the invention, the electrodes in each channel are operated in a manner that provides a DC potential gradient along the channel while maintaining a DC offset between the electrodes when the electrodes are operated in the manner described above to provide separation of the ions.

[0041] Refer now to Figure 9, which illustrates one embodiment of a channel that can be utilized in the present invention. The electrode inside channel 80 is constructed by coating the insulating walls of the channel with a conductive medium. In the case shown in Figure 9, top wall 84 and bottom wall 82 are coated separately with resistive conductive layers 81 and 83, respectively. This allows the conductive coatings to be driven separately so that the channel can be used as a separation device as described above. When driven in the separation mode described above, source  $(V-V')$  is equal to  $(V_c-V'_c)$  with  $(V-V')$  equal to the offset voltage. An AC source 87 capacitively couples the alternating voltage to electrodes layers 81 and 83. In this configuration, there is a DC voltage gradient along the length while the average potential at each point along the channel differs by the offset voltage.

[0042] In one embodiment of the invention, the sign of the electric bias is chosen so that ions have to move with the gas flow against the action of the electric field. As a result, the entrance of the channel that is adjacent to the ion source can be maintained at high negative

potential (for positive ions), while the source remains at or near ground. This simplifies the design of the source. In addition, this arrangement reduces the risk of shocks to the operator, since the electrodes can be offset into the channel sufficiently to prevent the operator from touching the end of the electrodes.

[0043] In another embodiment of the invention, the walls of multiple channels are coated with the resistive material as described above and the ends of the channel electrodes are maintained at different potentials. The ends of the channels nearest the ion source are maintained at a potential that allows the ion source to be maintained at a potential that does not pose a hazard to a human operator while providing an electric field that attracts ions into the channels by the electrostatic forces and the gas flow. The other ends of the channels are maintained at a potential such that the ions must move out of the channel against the electric field forces using the gas flow to carry the ions into the mass spectrometer. This arrangement reduces the risk of electric shocks to personnel using embodiments of the present invention. Ideally, the ion source is maintained at a potential that is at or near ground.

[0044] An input port according to embodiments of the present invention can be utilized with an electric spray ion source. In such ion sources, the chemical species of interest is dissolved in a carrier liquid that is sprayed out of a nozzle. Droplets of the carrier liquid can pose problems for the input port if these droplets reach the input port. This problem can be substantially reduced by utilizing an ion source that provides a concentric current of heated gas around the ion plume. Refer now to Figure 10, which illustrates the use of a spray ion source with the input port of embodiments of the present invention. Ion source 94 provides an ion plume 95 by spraying a liquid in which the chemical species of interest is dissolved. Droplets of the solvent that are not immediately vaporized are vaporized by a heated gas sheath 92 that flows concentrically about ion source 94 and plume 95. Sheath 92 reduces the number of droplets that can reach input port 96, and hence, reduces problems associated with such droplets being taken into the channels in the input port.

[0045] The above-described embodiments utilize an input port having a single set of channels to provide flow matching, pressure control, and optionally, ion separation between the ion source and the interior of the mass spectrometer. However, embodiments that utilize multiple sets of channels can also be constructed. Refer now to Figure 11, which illustrates an input port according to another embodiment of the present invention. Input port 111 includes two channel plates 105 and 106 that are separated by a region 102. The channels can have the same geometry or different geometries.

[0046] For example, channel plate 106 could have a different number of channels and utilize different electrode spacings. The two sets of channels can also be operated at different RF voltages and frequencies. The pressure in region 102 is intermediate between the pressure in the ion source region 101 and that in the interior region 103 of the mass spectrometer. Hence, channel plate 106 can operate at a lower pressure drop than channel plate 105. The two channel plates can be operated using different waveforms and DC biases, and hence, independent separations/filtrations can be performed in tandem on the sample prior to the sample entering the mass spectrometer.

[0047] The above-described embodiments of the present invention operate between atmospheric pressure and the vacuum inside the mass spectrometer, which is typically less than 50 Torr. However, embodiments of the present invention can be utilized to provide a pressure interface between environments at other pressures. For example, the higher pressure environment can be partially evacuated or under pressure. For example, the higher pressure environment can be at or greater than 2, 1.5, 1.25, 1, 0.75, 0.5, 0.25, or 0.1 atmospheres, while the lower pressure environment can be at a pressure that differs from the high pressure environment by a pressure difference from 1 Torr to 2 atmospheres. In one embodiment of the present invention, the interface operates between a pressure that is greater than 50 Torr and less than 50, 30, 20, 10, 5 or 1 Torr within the mass spectrometer.

[0048] The above-described embodiments refer to a number of apertures through which ions pass. It should be noted that these apertures can be defined by a physical element such as a

hole in a solid structure or merely be regions of space that lack physical boundaries but through which the ions must pass to be processed in the described manner.

[0049] The above-described embodiments of the present invention have been provided to illustrate various aspects of the invention. However, it is to be understood that different features that are shown in different specific embodiments can be combined to provide other embodiments of the present invention. In addition, various modifications to embodiments of the present invention will become apparent from the foregoing description and accompanying drawings. Accordingly, the present invention is to be limited solely by the scope of the following claims.

[0050] The disclosures in United States patent application no. US 12/771,918, from which this application claims priority, and in the abstract accompanying this application, are incorporated herein by reference.

**CLAIMS**

1. A device comprising:

a chamber arranged to operate at a first pressure, said chamber comprising a wall that separates said chamber from an outside environment at a second pressure, said first pressure being less than said second pressure;

an input port that provides a pressure drop between said outside environment and said chamber when said chamber is at said first pressure, said input port comprising a plurality of channels, each channel having first and second electrodes arranged on opposing surfaces of that channel and having first and second ends, said first end being at said second pressure and in fluid communication with said outside environment and said second end being at said first pressure and being in fluid communication with said chamber; and

a drive circuit operable to apply a potential to said first and second electrodes in each of said channels.

2. The device of Claim 1 wherein said chamber comprises a mass spectrometer.

3. The device of Claim 1 or 2 wherein said first pressure is greater than 50 Torr and said second pressure is less than 50 Torr.

4. The device of Claim 2 or 3 when dependent on claim 2, wherein said mass spectrometer comprises a mass spectrometer input aperture within said chamber through which ions pass to be analyzed by said mass spectrometer and wherein said input port comprises a port input aperture that defines an area over which ions are collected by said input port and delivered toward said chamber, said port input aperture being greater than said mass spectrometer input aperture.

5. The device of any preceding Claim, wherein said drive circuit creates a time-varying electric field in each of said channels.

6. The device of Claim 5 wherein said time-varying electric field has an AC component and a constant component whose magnitude is set by an input from a user of said mass spectrometer.

7. The device of Claim 5 or 6 wherein said input port further comprises a drift region in which ions traveling therein are not subjected to said alternating electric field.

8. The device of Claim 7 wherein said drift region comprises a region in each of said channels in which ions traveling therein are not subjected to said alternating electric field.

9. The device of Claim 7 or 8 wherein said drift region comprises a pressure drop across said drift region greater than 10 percent of the difference between said first and second pressures.

10. The device of any of Claims 5 to 9, wherein said time-varying electric field has an amplitude that varies along said channels in a manner that depends on a density of gas in said channel as a function of position in said channel.

11. The device of Claim 2 or any of claims 3 to 10 when dependent on claim 2, wherein each of said electrodes comprises a first electrical connection at a first point on said electrode and a second electrical connection at a second point on said electrode, said first and second points being spaced apart, and wherein said mass spectrometer further comprises a power source connected to said first and second points, said power source creating a potential gradient between said first and second points.

12. The device of Claim 11 wherein said first point is proximate to said first end of said electrode and wherein said DC potential gradient is chosen such that ions are attracted to said first end of each electrode.

13. The device of any preceding Claim wherein said input port comprises an orifice in said chamber wall and a removable channel plate that attaches to said chamber wall, said channel plate comprises said channels.

14. The device of Claim 4 or any of claims 5 to 13 when dependent on claim 4, wherein said input port further comprises an ion concentrating section that receives ions from said channels and concentrates said ions into said mass spectrometer input aperture.

15. The device of Claim 2 or any of claims 3 to 14 when dependent on claim 2, further comprising an ion source that generates ions from a sample, said ion source outputting ions at said second pressure such that said ions are input to said input port.

16. The device of Claim 15 wherein said ion source is at a potential that does not pose a hazard to a human and wherein said first ends of said channels are at a potential that attracts ions of interest.

17. A method for analyzing a sample, said method comprising:

forming ions from said sample in an ion source; and

providing a mass spectrometer having an input port that receives some of said ions through an input port, said input port comprising a plurality of channels through which said ions pass, each channel having first and second electrodes arranged on opposing surfaces of that channel and having first and second ends, said first end being at a first pressure and said second end being at a second pressure where said second pressure is less than said first pressure, said input port being positioned to receive ions from said ion source.

18. The method of Claim 17 further comprising generating time-varying electric fields in said channels.


19. The method of Claim 18 wherein said time-varying electric fields include an AC component and constant component within said channels, said constant component having a magnitude set by an input from a user of said mass spectrometer.

20. The method of any of Claims 17 to 19 wherein each of said electrodes comprises a first electrical connection at a first point on said electrode and a second electrical connection at a second point on said electrode, said first and second points being spaced apart, and wherein said method further comprises creating a potential gradient between said first and second points.

21. A device substantially as described herein and with reference to each of the accompanying drawings.

22. A method substantially as described herein and with reference to each of the accompanying drawings.





**Application No:** GB1105221.4

**Examiner:** Mrs Carol Wheeler

**Claims searched:** All

**Date of search:** 29 July 2011

**Patents Act 1977: Search Report under Section 17**

**Documents considered to be relevant:**

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	1 2 & 17	US 2004/245458 A (SHEEHAN EDWARD) Abstract and figures 1, 2 & 3.
X	1, 2 & 17	US 6818889 A (SHEEHAN EDWARD) Abstract and figures 3, 4 & 5A.
A	-	US 2009/321655 A (THERMO FISHER SCIENT BREMEN) Abstract and figure 1.
A	-	WO 2008/055667 A (THERMO FISHER SCIENT BREMEN) Abstract and figures 6 & 7.
A	-	US 2004/195503 A (BRUKER DALTONIK) Abstract and figures 8 & 9.

**Categories:**

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

**Field of Search:**

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC<sup>X</sup>:

Worldwide search of patent documents classified in the following areas of the IPC

H01J

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI.

**International Classification:**

Subclass	Subgroup	Valid From
H01J	0049/04	01/01/2006
H01J	0049/06	01/01/2006