

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2015/057421 A1

(43) International Publication Date

23 April 2015 (23.04.2015)

WIPO | PCT

(51) International Patent Classification:

B01D 53/56 (2006.01) B01D 53/78 (2006.01)  
B01D 53/75 (2006.01)

(21) International Application Number:

PCT/US2014/059416

(22) International Filing Date:

7 October 2014 (07.10.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/998,248 15 October 2013 (15.10.2013) US

(71) Applicant: CANNON TECHNOLOGY, INC. [US/US];  
510 Constitution Boulevard, New Kensington, PA 15068  
(US).

(72) Inventor: SUCHAK, Naresh, J.; 245 Demarest Street,  
Glen Rock, NJ 07452 (US).

(74) Agent: ADAMS, John, M.; Price & Adams, P.C., 4135  
Brownsville Road, P.O. Box 98127, Pittsburgh, PA 15227  
(US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,  
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,  
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,  
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,  
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,  
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,  
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,  
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,  
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,  
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,  
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,  
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a  
patent (Rule 4.17(ii))

**Published:**

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR REMOVING CONTAMINANTS FROM EXHAUST GASES

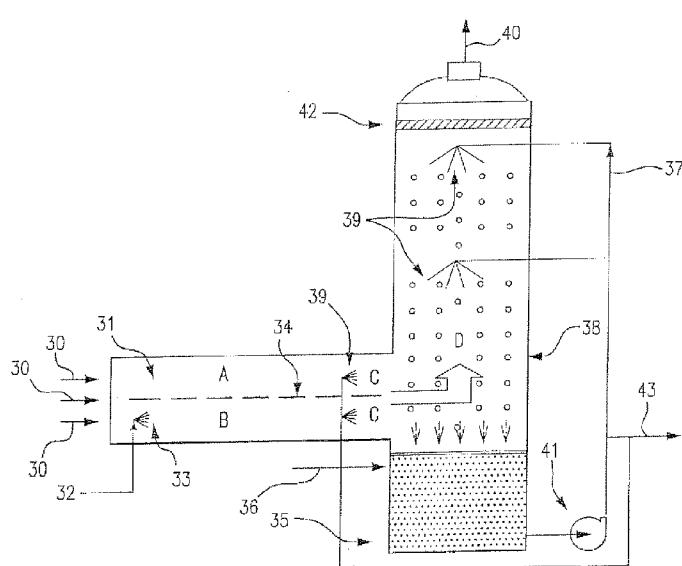


FIG. 4

(57) **Abstract:** In a method for removing a portion of contaminants, such as nitrogen oxides, from an exhaust gas stream of a combustion process, the exhaust gas stream is separated into two or more gas streams. At least one of the two or more gas streams is treated first by mixing with ozone. The treated gas stream is then fed to a scrubber where it is recombined with the untreated gas stream. Excess ozone present in the treated gas stream is consumed by oxidation of contaminants in the untreated gas stream before the combined gas stream is released to the atmosphere. The portion of the gas stream separated for mixing with ozone directly correlates to the amount of nitrogen oxides that are desired to be removed from the stream.

## TITLE

## METHOD AND APPARATUS FOR REMOVING CONTAMINANTS FROM EXHAUST GASES

[0001] The present application claims priority from U.S. Provisional Application No. 61/713,780 filed October 15, 2012.

### BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to method and apparatus for removing contaminants, such as nitrogen oxides, sulfur oxides, particulates, heavy metals and other acid gases, from gas streams arising from chemical, metallurgical, partial and full combustion processes, as for example, exhaust streams generated exhausts from engines or boilers on mobile sources such as sea going, naval or other vessels.

[0004] 2. Description of the Prior Art

[0005] The use of ozone for oxidizing nitrogen oxides is described in U.S. Patent Nos. 5,206,002; 6,162,409; 6,649,132; and 7,303,735. These chemistries and techniques are directed towards high levels of nitrogen oxides removal (around 90%) and require 1.5 moles of ozone per mole of nitrogen oxide present in the gas stream. Configuring these processes to operate at lower levels of nitrogen oxides removal causes both economic and process challenges.

[0006] Combustion and chemical processes generally result in gas streams containing contaminants that need cleanup before being exhausted to the atmosphere. Many industrial processes, power generating utilities, combustion sources, stationary and mobile sources such as engines, boilers, kilns and the like use solid fuels or low cost hydrocarbon fuels that contain sulfur, chlorine, nitrogen and metal compounds in hydrocarbons which result in exhaust gases that contain contaminants such as acid gases, particulate matter and heavy metals. To comply with stricter environmental rules mandated by legislation and a greater concern for the environment, combinations of scrubbing (wet or dry) and particulate capture devices such as electrostatic precipitators (ESP), wet ESP and bag house are increasingly preferred for emissions control of acid gas and particulate matters.

[0007] Nitrogen oxides found in most combustion exhaust streams are in the form of nitric oxide (NO), which is mostly insoluble in water and not very reactive. Nitric oxide is not removed by most wet or dry scrubber capture devices. Therefore, to control nitrogen oxides emissions, the two major options are to lower nitrogen oxides formation at the source by modifying combustion or secondly treating nitrogen oxides in the exhaust gas stream using post combustion techniques.

[0008] Primary techniques used for reducing nitrogen oxides formation by modifying combustion are low nitrogen oxides burner (LNB), flue gas recirculation (FGR), staged combustion and over fire air (OFA). In most applications these technologies are not adequate for removing nitrogen oxides from combustion gas streams and post combustion techniques, such as selective catalytic reduction (SCR) and selective non-catalytic reduction (SNCR), become necessary to achieve the desired nitrogen oxides reduction.

[0009] Both SCR and SNCR processes realize good results but also have limitations. Ozone based oxidation technologies have recently gained success as an alternative post combustion technique, especially when an application is not suitable for SCR. Ozone based processes as described in U.S. Patent Nos. 6,162,409, 5,206,002

and 7,303,735 provide multi-pollutant removal approaches and they have been implemented on flue gases that arise from gas and coal fire boilers removing multiple pollutants including nitrogen oxide, sulfur oxides, particulates, etc. Ozone based processes are also industrially practiced in lowering emissions in other applications such as metal pickling processes, fluidized catalytic cracker (FCC) regenerators, metal recovery furnaces and sulfuric acid manufacture.

[0010] Coal fired boilers with low nitrogen oxides burners and staged combustion often attain nitrogen oxides in 0.25 to 0.4 lb/MMBTU cost effectively whereas regulations require nitrogen oxides emissions in a range of 0.1 to 0.15 lb/MMGBTU i.e., post combustion technology that can cost effectively offer 40 to 70% reduction.

[0011] The methods disclosed in U.S. Patent Nos. 6,162,409, 5,206,002, 6,649,132 and 7,303,735 use chemistry of nitrogen oxides reaction with ozone by forming higher oxides of nitrogen, especially the pentavalent form or higher which are quite water soluble and readily removed by wet scrubbing. The stoichiometric amount of ozone required to convert one mole of NO<sub>x</sub>, in the form of NO, to the pentavalent form is about 1.5 moles of ozone and 0.5 moles if NO<sub>x</sub> is in the form of NO<sub>2</sub>.

[0012] Although these ozone based methods for removing nitrogen oxides from combustion streams are effective at achieving ultra low levels of nitrogen oxides emissions in the treated gas stream, there is need for an improved process for partial removal of nitrogen oxides that addresses the economic, regulatory and process challenges presented by emission controls.

## SUMMARY OF THE INVENTION

[0013] In accordance with the present invention there is provided a method for the partial removal of contaminants from a process gas stream that includes the step of separating a process gas stream into at least two process gas streams. Ozone is fed

into contact with at least one of the separated process gas streams to oxidize the contaminants in the gas stream. At least one of the process gas streams contacted by ozone is fed to a scrubber for removal of the oxidized contaminants from the gas stream.

[0014] Further in accordance with the present invention there is provided a method for the partial removal of contaminants from a process gas stream that includes the step of conditioning the process gas stream emitted from a combustion process. The process gas stream containing contaminants is separated into at least two process gas streams. Ozone is injected into at least one of the separated process gas streams to provide mixing of the ozone with the contaminants including nitrogen oxides in the separated process gas stream. The nitrogen oxides in the separated process gas stream are oxidized by mixing with ozone. The oxidized nitrogen oxides are captured in a capture device to remove the nitrogen oxides from the separated process gas stream. The separated process gas stream substantially free of nitrogen oxides is recombined with the remainder of the process gas stream containing contaminants.

[0015] Further in accordance with the present invention there is provided a method for the partial removal of contaminants from a process gas stream that includes the step of conditioning the process gas stream emitted from a combustion process. The process gas stream containing contaminants is divided into at least two process gas streams. Ozone is injected into a selected one of the process gas stream for mixing of the ozone with the contaminants including nitrogen oxides. The nitrogen oxides in the selected process gas stream are oxidized by ozone. The oxidized nitrogen oxides are removed by a capture device from the selected process gas stream. Then the selected process gas stream substantially free of nitrogen oxides is recombined with the remaining process gas stream containing contaminants.

[0016] Further the present invention is directed to apparatus for the partial removal of contaminants from a process gas stream that includes a duct for conveying the process gas stream containing nitrogen oxides from the exhaust of a combustion

process. The duct is partitioned into at least two zones for receiving the process gas stream containing contaminants to divide the process gas stream into at least two streams. A source of ozone is injected into a selected one of the two zones for mixing with the process gas stream. The ozone mixed with the process gas stream oxidizes the nitrogen oxides in the process gas stream in the selected zone.

[0017] Further the present invention is directed to apparatus for the partial removal of contaminants from a process gas stream that includes a duct and a scrubber or any process equipment conveying the process gas stream containing nitrogen oxides from the exhaust of a combustion or chemical process. The ozone is introduced in the process gas stream to selectively mix with a portion of the gas stream with or without physical partitioning to result into at least two process gas zones. One zone is significantly mixed with ozone and the other is not mixed with ozone. The ozone in a portion of the process gas stream oxidizes the nitrogen oxides in the process gas stream.

[0018] The contaminants contained in the process gas stream for treatment are selected from the group consisting of nitrogen oxides, sulfur oxides, acid gases, particulate matters and mercury. The nitrogen oxides treated are selected from the group consisting of nitric oxide and nitrogen dioxide. The process gas stream is an exhaust gas stream from an industrial process, typically from a source selected from the group consisting of fixed sources and mobile sources. The industrial process is selected from the group consisting of industrial boilers, power generation systems, chemical processing, kilns, furnaces and combustion processes.

[0019] The amount of contaminants removed is about the amount of ozone added to the at least one of the two or more process gas streams.

[0020] The scrubber is typically selected from the group consisting of dry, semi-dry and wet scrubbing equipment. The amount of ozone that is added to the at least one of the two or more separated gas stream in an amount of greater stoichiometry

than the amount of nitrogen oxides present therein.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0021] Figure 1 is a graph, illustrating nitrogen oxides removal versus molar ratio of ozone to nitrogen oxides.

[0022] Figure 2 is a graph, illustrating nitrogen oxides removal versus molar ratio of ozone to nitrogen oxides removed.

[0023] Figure 3 is a graph, illustrating nitrogen oxides removal versus molar ratio of ozone to nitrogen oxides removed.

[0024] Figure 4 is a system flow diagram of a process for the oxidation of nitrogen oxides in a partitioned duct.

[0025] Figure 5 is a system flow diagram of a process for nitrogen oxides removal in a multi-Venturi wet scrubbing apparatus.

[0026] Figure 6 is a system flow diagram of a process for nitrogen oxides removal in a dry scrubbing capture device.

[0027] Figure 7 is a system flow diagram of a process for nitrogen oxides removal in a partitioned horizontal spray scrubber.

[0028] Figure 8 is a system flow diagram of a process for nitrogen oxides removal by scrubbing a portion of a gas stream.


## DETAILED DESCRIPTION OF THE INVENTION

[0029] The present invention provides for the oxidation of nitrogen oxides and other contaminants by the addition of ozone to a separated portion of the process gas stream. The total process gas or flue gas stream is divided into at least two or more streams. The portion of the total process gas stream that is to be treated with ozone is determined based on the extent of nitrogen oxides removal desired. For purposes of illustration, to remove 60% of the nitrogen oxides from the process gas stream, approximately 60% of the gas stream may be mixed with ozone and treated by the methods of the invention.

[0030] Nitrogen oxides generated in combustion processes are mostly in the form of NO which has negligible solubility in water. By adding ozone to the exhaust gas stream, nitrogen oxides can be oxidized to higher forms. Solubility of nitrogen oxides increases with the degree of oxidation. Higher oxides such as  $\text{N}_2\text{O}_5$  and oxyacids are not only very soluble but also highly reactive and they can be removed in dry, semi-dry and wet scrubbing equipment along with other contaminants present in the exhaust gas stream so treated.

[0031] Although various methods as disclosed by the prior art are effective in achieving ultra low levels of nitrogen oxides emissions, when applied to removing only a portion of the nitrogen oxides present in the exhaust gas stream, they will generate appreciable amounts of  $\text{NO}_2$  which is not quantitatively removed in the capture device employed. It is well understood that only when nitrogen oxides are oxidized beyond  $\text{NO}_2$  to higher oxides such as  $\text{N}_2\text{O}_5$ , quantitative removal occurs in industrially used capture devices.

[0032] Nitrogen oxides oxidation to  $\text{N}_2\text{O}_5$  involves many reactions but for the sake of brevity, it can be simplified as follows:

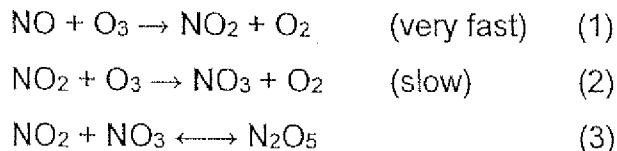

[0033] The reaction (1) is an order of magnitude faster when compared to reaction (2). By the time reaction (2) starts to occur, most of the NO is oxidized to form NO<sub>2</sub>. Therefore, reactions (1) and (2) are somewhat consecutive reactions.

[0034] Nitrogen dioxide (NO<sub>2</sub>) has relatively low solubility in water, so unless the reaction is brought forward to the formation of oxides higher than NO<sub>2</sub>, removal of nitrogen oxides in a wet scrubber remains very limited. On the other hand, N<sub>2</sub>O<sub>5</sub> is extremely soluble and with moisture present in the gas stream. As a result, N<sub>2</sub>O<sub>5</sub> forms HNO<sub>3</sub> which is soluble with water in all proportions. Therefore, any capture device, wet scrubber, wet ESP or any device with wet surfaces such as a condenser or coalescing device such as a mist eliminator will remove HNO<sub>3</sub> and N<sub>2</sub>O<sub>5</sub> quantitatively with or without any reagent present in the aqueous phase.

[0035] The highly oxidized forms HNO<sub>3</sub> and N<sub>2</sub>O<sub>5</sub> are also very reactive and are removed using most common reagents and adsorbents industrially used in dry and semi-dry scrubbing. N<sub>2</sub>O<sub>5</sub> and HNO<sub>3</sub> are also removed in fabric filter by adsorption on particulate matters in a capture device such as bag house.

[0036] The stoichiometric amount of ozone required to convert one mole of NO and NO<sub>2</sub> to pentavalent form namely N<sub>2</sub>O<sub>5</sub> and/or HNO<sub>3</sub> is about 1.5 and 0.5 moles respectively. In the majority of combustion processes, nitrogen oxides are predominantly in the form of NO. In fact by and large, most nitrogen oxides emitted from various types of sources is in the form NO.

[0037] Figure 1 depicts the removal of nitrogen oxides versus the ratio of moles

of ozone to moles of nitrogen oxides in the exhaust gas from a coal fired boiler. This figure, which appears in U.S. Pat. No 6,162,409, shows the overall stoichiometric ratio of 1.5 moles of ozone required per mole of nitrogen oxides for greater than 90% nitrogen oxides removal. This ozone requirement is per mole of nitrogen oxides present in the gas stream and not per mole of nitrogen oxides removed.

[0038] When only a partial amount of nitrogen oxides reduction is required, ozone required per mole of nitrogen oxides removed far exceeds 1.5. To remove 50% of nitrogen oxides (mostly as NO) a series of reactions must occur. When the ozone is added and thoroughly mixed in the gas stream, ozone first reacts with NO present in the nitrogen oxides to convert to NO<sub>2</sub>. Only after almost all of the NO is oxidized does NO<sub>2</sub> oxidation to N<sub>2</sub>O<sub>5</sub> begin.

[0039] To achieve 50% removal with two moles of nitrogen oxides present in the gas stream, one mole of nitrogen oxides need to be removed. For this 50% removal example, with two moles of nitrogen oxides in the form of NO, two moles of ozone are required to convert to two moles of NO<sub>2</sub> as per reaction (1) above. Since NO<sub>2</sub> is only partially soluble, in order to achieve 50% removal, one mole out of two moles of NO<sub>2</sub> must be converted to a pentavalent form. Therefore an additional 0.5 moles of ozone is required to convert one mole of NO<sub>2</sub> to a pentavalent form N<sub>2</sub>O<sub>5</sub>. Thus the total ozone requirement is 2.5 moles per mole of nitrogen oxides removed when the nitrogen oxides targeted removal is only 50%.

[0040] As disclosed in U.S. Pat. No. 6,162,409, the data used in Figure 1 is plotted in Figure 2 as nitrogen oxides removal versus ratio of mole of ozone consumed to moles of nitrogen oxides removed in the exhaust gas from a coal fired boiler. It is well illustrated that the moles of ozone required per mole of nitrogen oxides removed increases with the decrease in nitrogen oxides removal. For 50% nitrogen oxides removal, the molar ratio of ozone consumed to nitrogen oxides removed is closer to 2.5. In essence, the nitrogen oxides reaction with ozone and removal by a capture device was oversimplified in this example but detailed enough to show the limitation of

the prior art process. The partial removal of nitrogen oxides with these earlier processes has limitations which the present invention overcomes.

[0041] The merits of a nitrogen oxides removal process are evaluated with respect to many attributes of which there are four fundamental ones. First, what level of nitrogen oxides removal can the process achieve? Second, how affordable are the ownership costs in both capital and operating terms per ton of nitrogen oxides removed (cost effectiveness)? Third, are secondary emissions within acceptable limits? Fourth, how compatible is nitrogen oxides removal process with removal of other contaminants?

[0042] The limitations that the prior art processes fall short in measuring up to the second and third attributes. Ozone is a costly commodity. The amount of ozone required per unit of nitrogen oxides removal increases rapidly with reduction in nitrogen oxides removal requirement. Half a century ago, most countries in the world did not have mandatory requirement of reducing nitrogen oxides emissions. As air quality worsened due to increasing air emissions, governmental bodies put in place environmental regulations that mandated the gradual lowering of nitrogen oxides emissions. In the initial phase of implementation of these regulations, the nitrogen oxides reduction from fixed sources such as industrial boilers, power generation systems, combustion processes as well as mobile sources such as ships, barges, etc. are modest. The prior art processes use significantly greater amounts of ozone per unit of nitrogen oxides removed at low or modest nitrogen oxides reduction requirements, as it is depicted in Figure 2, and offer poor cost effectiveness thereby falling short with respect to the second attribute. The prior art processes are directed toward very high nitrogen oxides reduction requirements.

[0043] At low or modest nitrogen oxides reduction requirements, using methods disclosed in the prior art, the ozone treated gas stream also has significantly higher NO<sub>2</sub> content. Nitrogen dioxide is brown in color and increases the opacity of the exhaust. The large stationary sources, such as fossil fuel or biomass fired boilers or combustion

sources, have huge exhaust streams and are vulnerable to default on opacity specifications by not satisfying the third attribute above.

[0044] The rate at which nitrogen oxides and ozone react is dependent on the kinetic rate constant, as well as the concentration of nitrogen oxides and ozone. With a decrease in concentration, the rate of reaction also decreases. As described earlier in the 50% nitrogen oxides removal case, 2.5 moles of ozone is required per mole of nitrogen oxides removed. The reaction (1) above is very fast and consumes two moles of ozone leaving only 0.5 moles of ozone for the slower reaction (2). In order to achieve the required oxidation, either the exhaust gas stream processing vessel must be large enough to provide the necessary residence time between  $\text{NO}_2$  and ozone or excess ozone must be added, which may result in some residual ozone in the treated flue gas that is not consumed in the scrubbing process.

[0045] Partial nitrogen oxides removal, per the prior art processes, is achieved at sub-stoichiometric ratios of ozone and oxidized stream having a mixture of  $\text{N}_2\text{O}_5$  and  $\text{NO}_2$ . Scrubbing removes all  $\text{N}_2\text{O}_5$  and some  $\text{NO}_2$ . On scrubbing  $\text{N}_2\text{O}_5$  only nitrate is formed; whereas, scrubbing  $\text{NO}_2$  forms a mixture of nitrite and nitrate of alkali or alkaline earth metals. The presence of nitrite in the scrubber purge is undesired and poses challenges in handling and treating liquid streams in the effluent treatment plant.

[0046] When the flue gas also has sulfur oxides present in it,  $\text{SO}_2$  absorption produces sulphite in the scrubbing medium. Sulphite is an ozone scavenger and helps to eliminate excess ozone in wet scrubbing devices.  $\text{NO}_2$  also reacts with sulphite when it is present in large concentrations and depletes sulphite potentially creating conditions for ozone slip. In lime and limestone based reagents, large concentrations of  $\text{NO}_2$  also affect sulfur oxides removal adversely thus not satisfying the fourth attribute.

[0047] In accordance with present invention, the amount of the process gas stream to be treated for nitrogen oxides removal is about the same percentage as the

amount of nitrogen oxides removal. For example, if the operator wishes to remove 60% of the nitrogen oxides in a flue gas stream, then the operator will treat 60% of the total flue gas stream with ozone. The operator thereby separates the primary flue gas stream into two or more gas streams where at least one stream totals 60% of the total process gas stream by volume. An operator can conceivably treat two streams that total 60% of the total (30% and 30%) or three or more streams as long as the total percentage of treated streams is approximately equal to the percentage reduction in nitrogen oxides content for the entire process gas stream.




[0048] The portion of the gas stream that is oxidized with ozone proceeds along the reactions (1) to (3), as described above. The amount of ozone is based on the amount of nitrogen oxides in that portion of gas stream. A slight excess of stoichiometric requirement may be added to reduce the reaction time requirement. Nitrogen oxides in combustion flue gas streams are generally in the form of NO (divalent) and, therefore, stoichiometric requirement is 1.5 moles of ozone per mole of nitrogen oxides. However, when nitrogen oxides in the gas stream is from chemical or other sources and is a mixture of divalent (NO) and tetravalent (NO<sub>2</sub>) forms, the stoichiometric requirement is then 1.5 moles of ozone per mole of divalent form and 0.5 moles of ozone per mole of tetravalent form.

[0049] Prior to mixing ozone, all or a portion of the gas stream to be mixed may be scrubbed, pre-scrubbed, selectively pre-scrubbed, quenched or conditioned as required. With respect to temperature, the optimum condition for oxidations is 40°F to 225°F in the gas stream. Preferably, the gas stream may be droplet free or free from excessive mist of the aqueous medium, if sulfur oxides are also present in the flue gas stream. Ozone is not added to the balance of the gas stream.

[0050] The oxidized contaminants in the ozone treated portion of the stream are removed by contacting with a scrubbing medium in a wet or semi-dry or dry scrubber. The oxidized contaminants, especially nitrogen oxides, are highly soluble in water and very reactive and, therefore, may also be removed in the aqueous medium on

condensing or coalescing surfaces, such as heat exchangers or droplet separators. Alternatively, they may be captured in fabric filter (bag house), ESP (electrostatic precipitator), WESP (wet electrostatic precipitator), etc. Oxidized nitrogen oxides are converted to oxyacids, such as nitric acid and nitrous acid and salt.

[0051] The chemistry of this dissolution and stabilization of nitrogen oxides in the form of oxyacids and salts is described below.



[0052] For treating a portion of the process gas stream with ozone, the existing scrubber and APC (air pollution control) device may be modified simply by portioning the duct and/or scrubber while ensuring the oxidized portion of stream is contacted adequately with a scrubbing medium and contaminants are captured prior to unifying the portion of the stream with the balance of gas stream not treated with ozone.

[0053] When the ozone treated portion of the gas stream is reunited with the rest of the gas stream that is untreated, small amounts of excess ozone from the treated stream are instantaneously consumed in the recombined stream. An extremely fast oxidation reaction results, as stated in equation (1) above. Thus, the reunited stream ceases to have any residual ozone. Also, due to excess ozone present in the treated stream, almost all of the nitrogen oxides are oxidized to their pentavalent form and captured quantitatively in the capture device with insignificant amounts of leftover  $\text{NO}_2$ .

[0054] The present invention also provides the capability of an ozone free stack when high nitrogen oxides removal is desired. For example, for 90% nitrogen oxides removal, 10% of the untreated stream is mixed with 90% treated stream and residual ozone from the 90% treated stream is destroyed by the untreated nitrogen oxides present in the 10% gas stream.

[0055] The present invention provides a method and apparatus for the removal of contaminants such as nitrogen oxides in a relatively safe manner that does not cause secondary emissions and requires less ozone. Further, the present invention allows for the implementation of nitrogen oxides reduction in phases to match regulations that mandate a drop in nitrogen oxides emissions over time. Phase 1 might mandate a 30 to 35% nitrogen oxides reduction, while phase 2 mandates 60 to 65% reduction, and phase 3 requiring a 90 to 95% reduction. With the methods of the present invention, these mandated reductions are reached in a cost effective manner.

[0056] The processes of the present invention lower NO<sub>2</sub> emissions in the treated gas stream being exhausted to the atmosphere and the opacity of the plume irrespective of nitrogen oxides reduction required. In this manner residual ozone in the treated gas stream is eliminated and consequently ozone slip is inhibited. Ozone usage is optimized when partial nitrogen oxides reduction is performed. The present invention significantly lowers residence time requirement for effective nitrogen oxides oxidation without compromising efficiency and without causing ozone slip. Improved scrubber chemistry results, and consequently sulfur oxides removal efficiency is retained by inhibiting sulfite destruction in the scrubbing medium by NO<sub>2</sub>. Thus, the methods of the present invention provide cost effective treatment when a gradual or stage wise implementation of nitrogen oxides abatement is performed.

[0057] As illustrated in Figure 3, unit ozone consumption per mole of nitrogen oxides removed remains almost identical. The consumption of ozone is 35% less in lowering 55% of the nitrogen oxides content compared with the prior art processes described above under identical conditions.

[0058] In addition to savings in the amount of ozone consumed, the present invention creates a dry exhaust stack, when a portion of the gas stream is not scrubbed and was thereby not saturated with water vapor. This eliminates any residual ozone and contains very low NO<sub>2</sub> content in the remaining nitrogen oxides. Since most of the

nitrogen oxides absorbed is  $\text{N}_2\text{O}_5$ , only nitrate is formed in the scrubbing medium.

[0059] Referring now to Figure 4, there is schematically illustrated a vertical flue gas scrubber for the oxidation of nitrogen oxides in a partitioned duct. An untreated gas stream 30 is conveyed through duct 31 to a wet spray scrubber 38. In accordance with the present invention, the duct 31 is partitioned to treat a portion of the gas stream 30. Partition 34 divides duct 31 into two equal zones, A and B. Ozone from duct 32 is emitted from nozzle 33 for mixing with the gas stream in Zone B. Contaminants, including nitrogen oxides, are completely oxidized in the Zone B prior to contact with aqueous medium sprays from nozzles 39 connected to header spray assembly 37 in Zone C. Oxidized contaminants from Zone B, such as  $\text{N}_2\text{O}_5$  and  $\text{HNO}_3$ , are readily captured in aqueous sprays in Zone C. The gas stream exiting from both Zones C is remixed in the bottom section of the scrubber 38. If required, the residence time requirement can be compensated for by using a slight excess of ozone. If the volume of the duct (Zones A and B) is insufficient or if the duct cannot be partitioned, then the bottom portion of the scrubber 38 may be partitioned to create Zones A and B for oxidation. If sulfur oxides are also present, the internal arrangements in the scrubber may be made necessary to avoid droplets from the spray section falling into the oxidation zone. If the physical partitioning of the bottom of the scrubber 38 is not an option, then ozone can be introduced in the section of the bottom if the oxidized portion of the gas stream rises to the scrubbing section vertically without mixing with remaining gas stream. In this manner a selective portion of gas stream is treated without physically partitioning gas flow. With the help of modern flow modeling tools, such as computational fluid dynamics (CFD), it is now possible to ensure that a substantial part of ozone mixed portion remains isolated until oxidized  $\text{NO}_x$  is captured in the scrubbing section. Thus the present invention can also be practiced without physically separating the gas stream for treating with ozone.

[0060] As further illustrated in Figure 4, the scrubber 38 is sprayed with an aqueous medium 36 from a sump 35 via pump 41 through the header spray assembly 37 and spray nozzles 39. Scrubbing medium sprayed in the gas stream removes

remaining contaminants such as SO<sub>2</sub>, HCl, etc. The sump 35 is supplied with an aqueous medium 36 made up of water, reagents, etc. Part of the scrubbing medium may be continuously or intermittently purged by stream 43 to maintain dissolved and suspended solids within the operating range. Nitrogen oxides scrubbing is insignificantly affected by pH in the range of 2 to 14 or the presence of dissolved or suspended solids content and, therefore, other parametric controls, such as pH control and purge control, are not described in detail herein. The scrubbed gas stream in the scrubber column 38 then flows through the mist removal/droplet separation device 42 and exits to the atmosphere treated gas as stream 40 from the outlet of scrubber 38. In a typical limestone based wet flue gas desulfurization (FGD), scrubber sump 35 is fitted with an air sparger, not shown, to oxidize calcium sulfite to sulfate.

[0061] Now referring to Figure 5, there is schematically illustrated a multi-Venturi wet scrubbing apparatus. Flue gas from a fluid catalytic cracking (FCC) regenerator off gas stream 44 is treated for up to 50% nitrogen oxides removal in the illustrated example. The scrubbing apparatus consists of four Venturis for gas-liquid contacting. The FCC regenerator off gas stream 44 is scrubbed in four Venturi scrubbers, each designated by the numeral 52, prior to admixing with ozone. The FCC regenerator off gas stream is conveyed to the four Venturi scrubbers 52. Each fluid gas stream 44 is brought into contact with a scrubbing medium in the Venturis to remove acid gas including sulfur oxides, HCl, etc. and particulate matter, such as coke and catalyst fines present in the FCC regenerator off gas. Output ducts from pairs of Venturi scrubbers 52 are united to form an elbow duct. Ozone is introduced and mixed by an injection system 46 into each elbow duct. A partition 48 divides each elbow duct into Zones A and B. The injection system 46 delivers ozone into duct 45 forming Zone B of each elbow duct to treat 50% of the flue gas stream conveyed from each pair of the Venturi scrubbers 52.

[0062] Ozone from injection system 46 is mixed with the portion of gas stream in the duct 45 forming an oxidation zone, designated Zone B which has a larger volume than Zone A. Contaminants including nitrogen oxides are completely oxidized in Zone

B prior to reaching aqueous medium sprays 53 at the end of the elbow duct. Both elbow ducts open into Zone C of a disengagement drum 58. Oxidized contaminants such as  $N_2O_5$  and  $HNO_3$  are readily captured in aqueous sprays 53. The gas streams exiting from the elbow ducts are allowed to mix in Zone C in the bottom section of the drum 58. If the residence time available in the elbow ducts is insufficient, the bottom portion of the drum 58 may also be partitioned to continue oxidation in the drum to allow nitrogen oxides absorbed in the coalescing droplets discharged from a mist eliminator 56.

[0063] The Venturi scrubbers 52 are supplied with an aqueous medium from the sump 49 via pump 55 through a header 51. The same medium is also routed to spray nozzles 53. Scrubbing medium sprayed into the gas stream also removes any remaining contaminants such as  $SO_2$ . The sump 49 is supplied with an aqueous medium 50 made up of water, reagents, etc. Some medium may be continuously or intermittently purged by stream 57 to maintain dissolved and suspended solids within operating range. Nitrogen oxides scrubbing is insignificantly affected by pH in the range of 2 to 14 or the presence of dissolved or suspended solids content and, therefore, other parametric controls, such as pH control and purge control, are not described in detail herein. The gas stream from the disengagement drum 58 flows through the tray and mist eliminator assembly 56 and exhausted to the atmosphere as treated gas stream 54.

[0064] In accordance with the present, nitrogen oxides emissions are lowered from 35 to 45 parts per million to less than 20 parts per million by treating 50% of the gas stream.

[0065] In the embodiment of the present invention shown in Figure 6, a flue gas stream 59 emitted from a combustion device 70 is scrubbed in spray dryer scrubber 63 with alkali or alkaline hydroxide, carbonate or bicarbonates or mixtures thereof in a reagent spray 64 for the removal of contaminants except nitrogen oxides. Environmental regulations mandate lowering the nitrogen oxides by 60 to 65% in two

steps.

[0066] In the spray dryer scrubber 63, the hot gas stream 59 is contacted with the aqueous reagent stream 64 to remove sulfur oxides, HCl, mercury and other contaminants. The aqueous reagent stream due to heat forms finely dusted solids in the gas stream. These solids are carried with the exiting gas stream via duct 60 to a bag house 65 containing bags made of fabric filter. The bag house 65 is generally modular with multiple chambers. Figure 6 illustrates three chambers for bag house 65. An ozone containing gas stream 61 is conveyed through a manifold 71 for mixing with a flue gas stream entering any one or all of the three chambers of bag house 65 depending on nitrogen oxides content and removal required. Assuming the flow of the flue gas stream is distributed equally, adding a slight excess of ozone in one chamber provides around 33% nitrogen oxides removal while adding ozone in any two out of the three chambers provides 66% nitrogen oxides removal. Oxidized nitrogen oxides are then adsorbed on solid reagent in the bag house 65.

[0067] Solids are retained inside the bags while the gas streams flow through the fabric filter medium. Solids retained and collected on the surface of bags eventually fall by pulsating flow and are collected in the bottom section of the bag house. Solids are periodically or continuously discharged as stream 66 for disposal.

[0068] All gas streams from the various chambers are reunited in the exhaust duct 67 forming a treated gas stream 69. On mixing the gas streams exiting various chambers in the duct, any residual ozone present is immediately consumed by the remaining nitrogen oxides in the treated gas stream 69 which is then vented to the atmosphere through stack 68.

[0069] Initially in the first stage, in order to meet the 30% emissions reduction, ozone is introduced only into one chamber of the bag house 65. At a later time, to meet the 60 to 65% reduction, gas streams in any two out of three chambers may be treated with a slight stoichiometric excess of ozone.

[0070] Now referring to Figure 7, there is schematically illustrated a partitioned horizontal spray scrubber. An untreated gas stream 72 is conveyed through duct manifold 73 to a horizontal wet spray scrubber 74. Two partitions 75 extending horizontally in the scrubber 74 divide the scrubber 74 into three equal chambers. The duct manifold 73 divides the gas stream 72 almost equally to three chambers. An ozone containing gas stream 76 is conveyed into manifold 73 via nozzles 84 for mixing with flue gas stream entering any one, two or all three chambers depending on NOx content and removal required.

[0071] For flue gas with 0.4 to 0.45 lb per MMBTU NOx content in the stream 72 requiring NOx reduction to 0.15 lb per MMBTU outlet in stream 77, gas entering two of the three chambers of scrubber 74 is admixed with ozone.

[0072] Ozone quickly oxidizes contaminants such as NOx, Hg etc in the duct entering the scrubber prior to reaching array of nozzles 78 that deliver an aqueous medium spray. Oxidized contaminants such as  $N_2O_5$  and  $HNO_3$  are readily captured in aqueous sprays along with SOx, HCl and other contaminants. If the scrubber volume upstream of the spray zone (spray array 78) is inadequate, the residence time requirement for almost complete removal of NOx can be compensated by using slight excess of ozone.

[0073] Scrubber 74 is sprayed with an aqueous medium 79 from a sump via pump 80 through header spray assembly 81 and the array of spray nozzles 78. The sump is supplied by an aqueous stream make up of water, reagents such as lime, limestone, soda ash, caustic, alkali, alkaline earth metal, ammonia hydroxides, carbonates, bicarbonates and mixtures thereof. Part of the scrubbing medium may be continuously or intermittently purged by stream 82 to maintain dissolved and suspended solids within the operating range. NOx scrubbing is very slightly affected by pH in the range of 2 to 14 or presence of dissolved or suspended solids content and, therefore, other parametric controls such as pH control and purge controls are not described in

detail herein. In a typical limestone based wet FGD (Flue Gas Desulfurization), scrubber sump may also be fitted with air sparger to oxidize of calcium sulfite to sulfate which is not shown in Figure 7.

[0074] The fine droplets and mist from flue gas leaving each of three chambers are removed in a mist removal device 83, and gas streams are reunited in the duct forming treated gas stream 77. Any residual ozone present in the various chambers is immediately consumed by remaining NOx in the treated gas stream 77.

[0075] With the present invention, consumption of ozone is 25 % less in lowering NOx content from 0.45 lb/MMBTU to 0.15 lb/MMBTU compared to what is reported in the prior art (U.S. Patent Nos. 6,162,409; 5,206,002; 6,649,132; and 7,303,735) under identical conditions.

[0076] In an another example, NOx emissions from a bio mass fired boiler is required to be lowered in a first stage from 0.7 lbs/MMBTU to 0.45 lbs and finally in the second stage to less than 0.3 lbs/MMBTU. Environmental regulations do not require scrubbing of any other pollutants. The proposed solution provides flexibility in stage wise reduction of NOx by treating required amount of gas stream with slight stoichiometric excess of ozone at each stage.

[0077] Referring to the embodiment shown in Figure 8, there is shown schematically a device for partial scrubbing of a flue gas stream. An untreated gas stream 85 is conveyed through main gas header 87. A portion of the gas stream in header 87 is diverted by a fan 89 into a duct 90 is almost directly proportional to NOx removal requirements. For 50% NOx removal, 50% gas stream 85 is directed by fan 89 into the duct 90. The flow of the gas is varied by a variable frequency drive control of the fan 89. Ozone supplied from a source 91 is conveyed to ozone injector nozzles 92 where ozone is mixed with the gas stream in duct 90. The amount of ozone injected is in slight excess of stoichiometric requirement based on amount of NOx present in this portion of the gas stream. Stoichiometric requirement is 1.5 moles of ozone per mole

of NO content and 0.5 moles of ozone per mole of NO<sub>2</sub> content in this portion of the flue gas stream.

[0078] The gas stream mixed with ozone is conveyed from duct 90 into a column scrubber 93. The ozone in duct 90 quickly oxidizes contaminants such as NO<sub>x</sub>, Hg etc. in the flue gas stream entering the scrubber 93 prior to reaching an aqueous spray from nozzles 94 vertically spaced apart in scrubber 93. Oxidized contaminants such as N<sub>2</sub>O<sub>5</sub> and HNO<sub>3</sub> are readily captured in the aqueous sprays from nozzles 94 along with any other contaminants, if present.

[0079] Scrubber 93 is supplied with an aqueous medium from scrubber sump 95 via recirculation 96 through a spray header assembly 97 to the array of spray nozzles 94 in scrubber 93. Sump 95 is supplied with an aqueous medium 98 made up with water, reagents such as lime limestone, soda ash, caustic, alkali, alkaline earth metal, ammonia hydroxides, carbonates, bicarbonates and mixtures thereof. Part of the scrubbing medium 98 may be continuously or intermittently purged by a stream 99 to maintain dissolved and suspended solids within the operating range. NO<sub>x</sub> scrubbing is very slightly affected by pH in the range of 2 to 14 or presence of dissolved or suspended solids content and therefore, other parametric controls such as pH control and purge controls are not described in detail herein.

[0080] Fine droplets and mist from the treated flue gas exiting the scrubber 93 after the aqueous sprays are removed by a mist removal device 100. Thereafter, the treated gas stream 101 is reunited with the untreated part of the flue gas stream 85 in the gas header 87. On mixing treated gas stream 101 with untreated gas stream 85 any residual ozone present is immediately consumed by NO<sub>x</sub> in the untreated portion of gas stream 85.

[081] While this invention has been described with respect to particular embodiments thereof, it is apparent that numerous other forms and modifications of the invention will be obvious to those skilled in the art. The appended claims in this

invention generally should be construed to cover all such obvious forms and modifications which are within the true spirit and scope of the present invention.

I claim:

1. A method for the partial removal of contaminants from a process gas stream

2 comprising the steps of:

4 separating a process gas stream into at least two process gas streams,

6 feeding ozone into contact with at least one of the separated process gas streams to oxidize the contaminants in the gas stream, and

8 feeding at least one of the process gas streams contacted by ozone to a 10 scrubber for removal of the oxidized contaminants from the gas streams.

2. A method as set forth in claim 1 which includes,

2 partitioning the scrubber into at least two chambers for receiving the process gas streams,

4 conveying the process gas stream into the partitioned scrubber to divide the gas stream proportionally based on desired NOx removal into at least two process gas 6 streams fed through the two chambers, and

8 selectively feeding ozone into at least one of the chambers for admixing with the process gas stream fed through the chamber to quickly oxidize the contaminants in the 10 gas stream.

3. A method as set forth in claim 1 which includes,

2 capturing the oxidized contaminants in the separated gas stream in a capture 4 device for removal of the oxidized contaminants from the separated gas stream.

4. A method as set forth in claim 1 which includes,

2 conditioning the process gas stream containing contaminants prior to admixing 4

4 with ozone by selectively cooling, quenching, and pre-scrubbing of the contaminants.

5. A method as set forth in claim 1 which includes,

2  
4  
8  
10  
12  
14  
16  
18  
20  
22  
24  
26  
28  
30  
32  
34  
36  
38  
40  
42  
44  
46  
48  
50  
52  
54  
56  
58  
60  
62  
64  
66  
68  
70  
72  
74  
76  
78  
80  
82  
84  
86  
88  
90  
92  
94  
96  
98  
100  
102  
104  
106  
108  
110  
112  
114  
116  
118  
120  
122  
124  
126  
128  
130  
132  
134  
136  
138  
140  
142  
144  
146  
148  
150  
152  
154  
156  
158  
160  
162  
164  
166  
168  
170  
172  
174  
176  
178  
180  
182  
184  
186  
188  
190  
192  
194  
196  
198  
200  
202  
204  
206  
208  
210  
212  
214  
216  
218  
220  
222  
224  
226  
228  
230  
232  
234  
236  
238  
240  
242  
244  
246  
248  
250  
252  
254  
256  
258  
260  
262  
264  
266  
268  
270  
272  
274  
276  
278  
280  
282  
284  
286  
288  
290  
292  
294  
296  
298  
300  
302  
304  
306  
308  
310  
312  
314  
316  
318  
320  
322  
324  
326  
328  
330  
332  
334  
336  
338  
340  
342  
344  
346  
348  
350  
352  
354  
356  
358  
360  
362  
364  
366  
368  
370  
372  
374  
376  
378  
380  
382  
384  
386  
388  
390  
392  
394  
396  
398  
400  
402  
404  
406  
408  
410  
412  
414  
416  
418  
420  
422  
424  
426  
428  
430  
432  
434  
436  
438  
440  
442  
444  
446  
448  
450  
452  
454  
456  
458  
460  
462  
464  
466  
468  
470  
472  
474  
476  
478  
480  
482  
484  
486  
488  
490  
492  
494  
496  
498  
500  
502  
504  
506  
508  
510  
512  
514  
516  
518  
520  
522  
524  
526  
528  
530  
532  
534  
536  
538  
540  
542  
544  
546  
548  
550  
552  
554  
556  
558  
560  
562  
564  
566  
568  
570  
572  
574  
576  
578  
580  
582  
584  
586  
588  
590  
592  
594  
596  
598  
600  
602  
604  
606  
608  
610  
612  
614  
616  
618  
620  
622  
624  
626  
628  
630  
632  
634  
636  
638  
640  
642  
644  
646  
648  
650  
652  
654  
656  
658  
660  
662  
664  
666  
668  
670  
672  
674  
676  
678  
680  
682  
684  
686  
688  
690  
692  
694  
696  
698  
700  
702  
704  
706  
708  
710  
712  
714  
716  
718  
720  
722  
724  
726  
728  
730  
732  
734  
736  
738  
740  
742  
744  
746  
748  
750  
752  
754  
756  
758  
760  
762  
764  
766  
768  
770  
772  
774  
776  
778  
780  
782  
784  
786  
788  
790  
792  
794  
796  
798  
800  
802  
804  
806  
808  
810  
812  
814  
816  
818  
820  
822  
824  
826  
828  
830  
832  
834  
836  
838  
840  
842  
844  
846  
848  
850  
852  
854  
856  
858  
860  
862  
864  
866  
868  
870  
872  
874  
876  
878  
880  
882  
884  
886  
888  
890  
892  
894  
896  
898  
900  
902  
904  
906  
908  
910  
912  
914  
916  
918  
920  
922  
924  
926  
928  
930  
932  
934  
936  
938  
940  
942  
944  
946  
948  
950  
952  
954  
956  
958  
960  
962  
964  
966  
968  
970  
972  
974  
976  
978  
980  
982  
984  
986  
988  
990  
992  
994  
996  
998  
1000  
1002  
1004  
1006  
1008  
1010  
1012  
1014  
1016  
1018  
1020  
1022  
1024  
1026  
1028  
1030  
1032  
1034  
1036  
1038  
1040  
1042  
1044  
1046  
1048  
1050  
1052  
1054  
1056  
1058  
1060  
1062  
1064  
1066  
1068  
1070  
1072  
1074  
1076  
1078  
1080  
1082  
1084  
1086  
1088  
1090  
1092  
1094  
1096  
1098  
1100  
1102  
1104  
1106  
1108  
1110  
1112  
1114  
1116  
1118  
1120  
1122  
1124  
1126  
1128  
1130  
1132  
1134  
1136  
1138  
1140  
1142  
1144  
1146  
1148  
1150  
1152  
1154  
1156  
1158  
1160  
1162  
1164  
1166  
1168  
1170  
1172  
1174  
1176  
1178  
1180  
1182  
1184  
1186  
1188  
1190  
1192  
1194  
1196  
1198  
1200  
1202  
1204  
1206  
1208  
1210  
1212  
1214  
1216  
1218  
1220  
1222  
1224  
1226  
1228  
1230  
1232  
1234  
1236  
1238  
1240  
1242  
1244  
1246  
1248  
1250  
1252  
1254  
1256  
1258  
1260  
1262  
1264  
1266  
1268  
1270  
1272  
1274  
1276  
1278  
1280  
1282  
1284  
1286  
1288  
1290  
1292  
1294  
1296  
1298  
1300  
1302  
1304  
1306  
1308  
1310  
1312  
1314  
1316  
1318  
1320  
1322  
1324  
1326  
1328  
1330  
1332  
1334  
1336  
1338  
1340  
1342  
1344  
1346  
1348  
1350  
1352  
1354  
1356  
1358  
1360  
1362  
1364  
1366  
1368  
1370  
1372  
1374  
1376  
1378  
1380  
1382  
1384  
1386  
1388  
1390  
1392  
1394  
1396  
1398  
1400  
1402  
1404  
1406  
1408  
1410  
1412  
1414  
1416  
1418  
1420  
1422  
1424  
1426  
1428  
1430  
1432  
1434  
1436  
1438  
1440  
1442  
1444  
1446  
1448  
1450  
1452  
1454  
1456  
1458  
1460  
1462  
1464  
1466  
1468  
1470  
1472  
1474  
1476  
1478  
1480  
1482  
1484  
1486  
1488  
1490  
1492  
1494  
1496  
1498  
1500  
1502  
1504  
1506  
1508  
1510  
1512  
1514  
1516  
1518  
1520  
1522  
1524  
1526  
1528  
1530  
1532  
1534  
1536  
1538  
1540  
1542  
1544  
1546  
1548  
1550  
1552  
1554  
1556  
1558  
1560  
1562  
1564  
1566  
1568  
1570  
1572  
1574  
1576  
1578  
1580  
1582  
1584  
1586  
1588  
1590  
1592  
1594  
1596  
1598  
1600  
1602  
1604  
1606  
1608  
1610  
1612  
1614  
1616  
1618  
1620  
1622  
1624  
1626  
1628  
1630  
1632  
1634  
1636  
1638  
1640  
1642  
1644  
1646  
1648  
1650  
1652  
1654  
1656  
1658  
1660  
1662  
1664  
1666  
1668  
1670  
1672  
1674  
1676  
1678  
1680  
1682  
1684  
1686  
1688  
1690  
1692  
1694  
1696  
1698  
1700  
1702  
1704  
1706  
1708  
1710  
1712  
1714  
1716  
1718  
1720  
1722  
1724  
1726  
1728  
1730  
1732  
1734  
1736  
1738  
1740  
1742  
1744  
1746  
1748  
1750  
1752  
1754  
1756  
1758  
1760  
1762  
1764  
1766  
1768  
1770  
1772  
1774  
1776  
1778  
1780  
1782  
1784  
1786  
1788  
1790  
1792  
1794  
1796  
1798  
1800  
1802  
1804  
1806  
1808  
1810  
1812  
1814  
1816  
1818  
1820  
1822  
1824  
1826  
1828  
1830  
1832  
1834  
1836  
1838  
1840  
1842  
1844  
1846  
1848  
1850  
1852  
1854  
1856  
1858  
1860  
1862  
1864  
1866  
1868  
1870  
1872  
1874  
1876  
1878  
1880  
1882  
1884  
1886  
1888  
1890  
1892  
1894  
1896  
1898  
1900  
1902  
1904  
1906  
1908  
1910  
1912  
1914  
1916  
1918  
1920  
1922  
1924  
1926  
1928  
1930  
1932  
1934  
1936  
1938  
1940  
1942  
1944  
1946  
1948  
1950  
1952  
1954  
1956  
1958  
1960  
1962  
1964  
1966  
1968  
1970  
1972  
1974  
1976  
1978  
1980  
1982  
1984  
1986  
1988  
1990  
1992  
1994  
1996  
1998  
2000  
2002  
2004  
2006  
2008  
2010  
2012  
2014  
2016  
2018  
2020  
2022  
2024  
2026  
2028  
2030  
2032  
2034  
2036  
2038  
2040  
2042  
2044  
2046  
2048  
2050  
2052  
2054  
2056  
2058  
2060  
2062  
2064  
2066  
2068  
2070  
2072  
2074  
2076  
2078  
2080  
2082  
2084  
2086  
2088  
2090  
2092  
2094  
2096  
2098  
2100  
2102  
2104  
2106  
2108  
2110  
2112  
2114  
2116  
2118  
2120  
2122  
2124  
2126  
2128  
2130  
2132  
2134  
2136  
2138  
2140  
2142  
2144  
2146  
2148  
2150  
2152  
2154  
2156  
2158  
2160  
2162  
2164  
2166  
2168  
2170  
2172  
2174  
2176  
2178  
2180  
2182  
2184  
2186  
2188  
2190  
2192  
2194  
2196  
2198  
2200  
2202  
2204  
2206  
2208  
2210  
2212  
2214  
2216  
2218  
2220  
2222  
2224  
2226  
2228  
2230  
2232  
2234  
2236  
2238  
2240  
2242  
2244  
2246  
2248  
2250  
2252  
2254  
2256  
2258  
2260  
2262  
2264  
2266  
2268  
2270  
2272  
2274  
2276  
2278  
2280  
2282  
2284  
2286  
2288  
2290  
2292  
2294  
2296  
2298  
2300  
2302  
2304  
2306  
2308  
2310  
2312  
2314  
2316  
2318  
2320  
2322  
2324  
2326  
2328  
2330  
2332  
2334  
2336  
2338  
2340  
2342  
2344  
2346  
2348  
2350  
2352  
2354  
2356  
2358  
2360  
2362  
2364  
2366  
2368  
2370  
2372  
2374  
2376  
2378  
2380  
2382  
2384  
2386  
2388  
2390  
2392  
2394  
2396  
2398  
2400  
2402  
2404  
2406  
2408  
2410  
2412  
2414  
2416  
2418  
2420  
2422  
2424  
2426  
2428  
2430  
2432  
2434  
2436  
2438  
2440  
2442  
2444  
2446  
2448  
2450  
2452  
2454  
2456  
2458  
2460  
2462  
2464  
2466  
2468  
2470  
2472  
2474  
2476  
2478  
2480  
2482  
2484  
2486  
2488  
2490  
2492  
2494  
2496  
2498  
2500  
2502  
2504  
2506  
2508  
2510  
2512  
2514  
2516  
2518  
2520  
2522  
2524  
2526  
2528  
2530  
2532  
2534  
2536  
2538  
2540  
2542  
2544  
2546  
2548  
2550  
2552  
2554  
2556  
2558  
2560  
2562  
2564  
2566  
2568  
2570  
2572  
2574  
2576  
2578  
2580  
2582  
2584  
2586  
2588  
2590  
2592  
2594  
2596  
2598  
2600  
2602  
2604  
2606  
2608  
2610  
2612  
2614  
2616  
2618  
2620  
2622  
2624  
2626  
2628  
2630  
2632  
2634  
2636  
2638  
2640  
2642  
2644  
2646  
2648  
2650  
2652  
2654  
2656  
2658  
2660  
2662  
2664  
2666  
2668  
2670  
2672  
2674  
2676  
2678  
2680  
2682  
2684  
2686  
2688  
2690  
2692  
2694  
2696  
2698  
2700  
2702  
2704  
2706  
2708  
2710  
2712  
2714  
2716  
2718  
2720  
2722  
2724  
2726  
2728  
2730  
2732  
2734  
2736  
2738  
2740  
2742  
2744  
2746  
2748  
2750  
2752  
2754  
2756  
2758  
2760  
2762  
2764  
2766  
2768  
2770  
2772  
2774  
2776  
2778  
2780  
2782  
2784  
2786  
2788  
2790  
2792  
2794  
2796  
2798  
2800  
2802  
2804  
2806  
2808  
2810  
2812  
2814  
2816  
2818  
2820  
2822  
2824  
2826  
2828  
2830  
2832  
2834  
2836  
2838  
2840  
2842  
2844  
2846  
2848  
2850  
2852  
2854  
2856  
2858  
2860  
2862  
2864  
2866  
2868  
2870  
2872  
2874  
2876  
2878  
2880  
2882  
2884  
2886  
2888  
2890  
2892  
2894  
2896  
2898  
2900  
2902  
2904  
2906  
2908  
2910  
2912  
2914  
2916  
2918  
2920  
2922  
2924  
2926  
2928  
2930  
2932  
2934  
2936  
2938  
2940  
2942  
2944  
2946  
2948  
2950  
2952  
2954  
2956  
2958  
2960  
2962  
2964  
2966  
2968  
2970  
2972  
2974  
2976  
2978  
2980  
2982  
2984  
2986  
2988  
2990  
2992  
2994  
2996  
2998  
3000  
3002  
3004  
3006  
3008  
3010  
3012  
3014  
3016  
3018  
3020  
3022  
3024  
3026  
3028  
3030  
3032  
3034  
3036  
3038  
3040  
3042  
3044  
3046  
3048  
3050  
3052  
3054  
3056  
3058  
3060  
3062  
3064  
3066  
3068  
3070  
3072  
3074  
3076  
3078  
3080  
3082  
3084  
3086  
3088  
3090  
3092  
3094  
3096  
3098  
3100  
3102  
3104  
3106  
3108  
3110  
3112  
3114  
3116  
3118  
3120  
3122  
3124  
3126  
3128  
3130  
3132  
3134  
3136  
3138  
3140  
3142  
3144  
3146  
3148  
3150  
3152  
3154  
3156  
3158  
3160  
3162  
3164  
3166  
3168  
3170  
3172  
3174  
3176  
3178  
3180  
3182  
3184  
3186  
3188  
3190  
3192  
3194  
3196  
3198  
3200  
3202  
3204  
3206  
3208  
3210  
3212  
3214  
3216  
3218  
3220  
3222  
3224  
3226  
3228  
3230  
3232  
3234  
3236  
3238  
3240  
3242  
3244  
3246  
3248  
3250  
3252  
3254  
3256  
3258  
3260  
3262  
3264  
3266  
3268  
3270  
3272  
3274  
3276  
3278  
3280  
3282  
3284  
3286  
3288  
3290  
3292  
3294  
3296  
3298  
3300  
3302  
3304  
3306  
3308  
3310  
3312  
3314  
3316  
3318  
3320  
3322  
3324  
3326  
3328  
3330  
3332  
3334  
3336  
3338  
3340  
3342  
3344  
3346  
3348  
3350  
3352  
3354  
3356  
3358  
3360  
3362  
3364  
3366  
3368  
3370  
3372  
3374  
3376  
3378  
3380  
3382  
3384  
3386  
3388  
3390  
3392  
3394  
3396  
3398  
3400  
3402  
3404  
3406  
3408  
3410  
3412  
3414  
3416  
3418  
3420  
3422  
3424  
3426  
3428  
3430  
3432  
3434  
3436  
3438  
3440  
3442  
3444  
3446  
3448  
3450  
3452  
3454  
3456  
3458  
3460  
3462  
3464  
3466  
3468  
3470  
3472  
3474  
3476  
3478  
3480  
3482  
3484  
3486  
3488  
3490  
3492  
3494  
3496  
3498  
3500  
3502  
3504  
3506  
3508  
3510  
3512  
3514  
3516  
3518  
3520  
3522  
3524  
3526  
3528  
3530  
3532  
3534  
3536  
3538  
3540  
3542  
3544  
3546  
3548  
3550  
3552  
3554  
3556  
3558  
3560  
3562  
3564  
3566  
3568  
3570  
3572  
3574  
3576  
3578  
3580  
3582  
3584  
3586  
3588  
3590  
3592  
3594  
3596  
3598  
3600  
3602  
3604  
3606  
3608  
3610  
3612  
3614  
3616  
3618  
3620  
3622  
3624  
3626  
3628  
3630  
3632  
3634  
3636  
3638  
3640  
3642  
3644  
3646  
3648  
3650  
3652  
3654  
3656  
3658  
3660  
3662  
3664  
3666  
3668  
3670  
3672  
3674  
3676  
3678  
3680  
3682  
3684  
3686  
3688  
3690  
3692  
3694  
3696  
3698  
3700  
3702  
3704  
3706  
3708  
3710  
3712  
3714  
3716  
3718  
3720  
3722  
3724  
3726  
3728  
3730  
3732  
3734  
3736  
3738  
3740  
3742  
3744  
3746  
3748  
3750  
3752  
3754  
3756  
3758  
3760  
3762  
3764  
3766  
3768  
3770  
3772  
3774  
3776  
3778  
3780  
3782  
3784  
3786  
3788  
3790  
3792  
3794  
3796  
3798  
3800  
3802  
3804  
3806  
3808  
3810  
3812  
3814  
3816  
3818  
3820  
3822  
3824  
3826  
3828  
3830  
3832  
3834  
3836  
3838  
3840  
3842

the gas stream containing contaminants, and

6

oxidizing the excess ozone in the unified gas stream upon contact with the gas  
8 stream containing contaminants to thereby remove excess ozone from the unified gas  
stream.

8. A method as set forth in claim 1 which includes,

2

mixing a preselected percentage of the process gas stream containing  
4 contaminants with a preselected percentage of the process gas stream free of  
contaminants and containing excess ozone to form a unified gas stream, and

6

8. consuming the excess ozone by the contaminants present in the unified gas  
stream.

9. A method as set forth in claim 1 which includes,

2

4. reducing the residence time of the separated process gas streams in the  
scrubber by adding an excess of ozone to the separated gas stream.

10. A method for the partial removal of contaminants from a process gas stream  
2 comprising the steps of:

4. conditioning the process gas stream emitted from a combustion process,

6. separating the process gas stream into at least two process gas streams,

8. injecting ozone into at least one of the separated process gas streams to provide  
mixing of the ozone with the contaminants including nitrogen oxides in the separated  
10 process gas stream,

12 oxidizing nitrogen oxides in the separated process gas stream by mixing with  
ozone,

14 capturing the oxidized nitrogen oxides in a capture device to remove the nitrogen  
16 oxides from the separated process gas stream, and

18 recombining the separated process gas stream substantially free of nitrogen  
oxides with the remainder of process gas stream containing contaminants.

11. A method as set forth in claim 10 which includes,

2 removing the oxidized nitrogen oxides in the separated gas stream on  
4 condensing surfaces selected from the group consisting of a heat exchanger, a  
condenser, and a coalescing device.

12. A method as set forth in claim 10 which includes,

2 capturing the oxidized contaminants removed from the gas stream in a capture  
4 device selected from the group consisting of a fabric filter, wet and dry electrostatic  
precipitators, a wet scrubber, a dry scrubber, a bag house, condensing surfaces, and a  
6 mist separator.

13. A method as set forth in claim 10 which includes,

2 removing a preselected percentage of the process gas from the process gas  
4 stream for oxidation of substantially the same percentage of nitrogen oxides in the  
process gas as the percentage of process gas removed from the gas stream.

14. A method as set forth in claim 10 which includes,

2 recombining the gas stream free of nitrogen oxides with the gas stream

4 containing nitrogen oxides, and

6 consuming any excess ozone present in the recombined gas streams by mixing  
the ozone with contaminants present in the recombined gas stream.

15. A method as set forth in claim 10 which includes,

2  
4  
6  
8  
10  
12  
14  
16  
18  
20  
22  
24  
26  
28  
30  
32  
34  
36  
38  
40  
42  
44  
46  
48  
50  
52  
54  
56  
58  
60  
62  
64  
66  
68  
70  
72  
74  
76  
78  
80  
82  
84  
86  
88  
90  
92  
94  
96  
98  
100  
102  
104  
106  
108  
110  
112  
114  
116  
118  
120  
122  
124  
126  
128  
130  
132  
134  
136  
138  
140  
142  
144  
146  
148  
150  
152  
154  
156  
158  
160  
162  
164  
166  
168  
170  
172  
174  
176  
178  
180  
182  
184  
186  
188  
190  
192  
194  
196  
198  
200  
202  
204  
206  
208  
210  
212  
214  
216  
218  
220  
222  
224  
226  
228  
230  
232  
234  
236  
238  
240  
242  
244  
246  
248  
250  
252  
254  
256  
258  
260  
262  
264  
266  
268  
270  
272  
274  
276  
278  
280  
282  
284  
286  
288  
290  
292  
294  
296  
298  
300  
302  
304  
306  
308  
310  
312  
314  
316  
318  
320  
322  
324  
326  
328  
330  
332  
334  
336  
338  
340  
342  
344  
346  
348  
350  
352  
354  
356  
358  
360  
362  
364  
366  
368  
370  
372  
374  
376  
378  
380  
382  
384  
386  
388  
390  
392  
394  
396  
398  
400  
402  
404  
406  
408  
410  
412  
414  
416  
418  
420  
422  
424  
426  
428  
430  
432  
434  
436  
438  
440  
442  
444  
446  
448  
450  
452  
454  
456  
458  
460  
462  
464  
466  
468  
470  
472  
474  
476  
478  
480  
482  
484  
486  
488  
490  
492  
494  
496  
498  
500  
502  
504  
506  
508  
510  
512  
514  
516  
518  
520  
522  
524  
526  
528  
530  
532  
534  
536  
538  
540  
542  
544  
546  
548  
550  
552  
554  
556  
558  
560  
562  
564  
566  
568  
570  
572  
574  
576  
578  
580  
582  
584  
586  
588  
590  
592  
594  
596  
598  
600  
602  
604  
606  
608  
610  
612  
614  
616  
618  
620  
622  
624  
626  
628  
630  
632  
634  
636  
638  
640  
642  
644  
646  
648  
650  
652  
654  
656  
658  
660  
662  
664  
666  
668  
670  
672  
674  
676  
678  
680  
682  
684  
686  
688  
690  
692  
694  
696  
698  
700  
702  
704  
706  
708  
710  
712  
714  
716  
718  
720  
722  
724  
726  
728  
730  
732  
734  
736  
738  
740  
742  
744  
746  
748  
750  
752  
754  
756  
758  
760  
762  
764  
766  
768  
770  
772  
774  
776  
778  
780  
782  
784  
786  
788  
790  
792  
794  
796  
798  
800  
802  
804  
806  
808  
810  
812  
814  
816  
818  
820  
822  
824  
826  
828  
830  
832  
834  
836  
838  
840  
842  
844  
846  
848  
850  
852  
854  
856  
858  
860  
862  
864  
866  
868  
870  
872  
874  
876  
878  
880  
882  
884  
886  
888  
890  
892  
894  
896  
898  
900  
902  
904  
906  
908  
910  
912  
914  
916  
918  
920  
922  
924  
926  
928  
930  
932  
934  
936  
938  
940  
942  
944  
946  
948  
950  
952  
954  
956  
958  
960  
962  
964  
966  
968  
970  
972  
974  
976  
978  
980  
982  
984  
986  
988  
990  
992  
994  
996  
998  
1000  
1002  
1004  
1006  
1008  
1010  
1012  
1014  
1016  
1018  
1020  
1022  
1024  
1026  
1028  
1030  
1032  
1034  
1036  
1038  
1040  
1042  
1044  
1046  
1048  
1050  
1052  
1054  
1056  
1058  
1060  
1062  
1064  
1066  
1068  
1070  
1072  
1074  
1076  
1078  
1080  
1082  
1084  
1086  
1088  
1090  
1092  
1094  
1096  
1098  
1100  
1102  
1104  
1106  
1108  
1110  
1112  
1114  
1116  
1118  
1120  
1122  
1124  
1126  
1128  
1130  
1132  
1134  
1136  
1138  
1140  
1142  
1144  
1146  
1148  
1150  
1152  
1154  
1156  
1158  
1160  
1162  
1164  
1166  
1168  
1170  
1172  
1174  
1176  
1178  
1180  
1182  
1184  
1186  
1188  
1190  
1192  
1194  
1196  
1198  
1200  
1202  
1204  
1206  
1208  
1210  
1212  
1214  
1216  
1218  
1220  
1222  
1224  
1226  
1228  
1230  
1232  
1234  
1236  
1238  
1240  
1242  
1244  
1246  
1248  
1250  
1252  
1254  
1256  
1258  
1260  
1262  
1264  
1266  
1268  
1270  
1272  
1274  
1276  
1278  
1280  
1282  
1284  
1286  
1288  
1290  
1292  
1294  
1296  
1298  
1300  
1302  
1304  
1306  
1308  
1310  
1312  
1314  
1316  
1318  
1320  
1322  
1324  
1326  
1328  
1330  
1332  
1334  
1336  
1338  
1340  
1342  
1344  
1346  
1348  
1350  
1352  
1354  
1356  
1358  
1360  
1362  
1364  
1366  
1368  
1370  
1372  
1374  
1376  
1378  
1380  
1382  
1384  
1386  
1388  
1390  
1392  
1394  
1396  
1398  
1400  
1402  
1404  
1406  
1408  
1410  
1412  
1414  
1416  
1418  
1420  
1422  
1424  
1426  
1428  
1430  
1432  
1434  
1436  
1438  
1440  
1442  
1444  
1446  
1448  
1450  
1452  
1454  
1456  
1458  
1460  
1462  
1464  
1466  
1468  
1470  
1472  
1474  
1476  
1478  
1480  
1482  
1484  
1486  
1488  
1490  
1492  
1494  
1496  
1498  
1500  
1502  
1504  
1506  
1508  
1510  
1512  
1514  
1516  
1518  
1520  
1522  
1524  
1526  
1528  
1530  
1532  
1534  
1536  
1538  
1540  
1542  
1544  
1546  
1548  
1550  
1552  
1554  
1556  
1558  
1560  
1562  
1564  
1566  
1568  
1570  
1572  
1574  
1576  
1578  
1580  
1582  
1584  
1586  
1588  
1590  
1592  
1594  
1596  
1598  
1600  
1602  
1604  
1606  
1608  
1610  
1612  
1614  
1616  
1618  
1620  
1622  
1624  
1626  
1628  
1630  
1632  
1634  
1636  
1638  
1640  
1642  
1644  
1646  
1648  
1650  
1652  
1654  
1656  
1658  
1660  
1662  
1664  
1666  
1668  
1670  
1672  
1674  
1676  
1678  
1680  
1682  
1684  
1686  
1688  
1690  
1692  
1694  
1696  
1698  
1700  
1702  
1704  
1706  
1708  
1710  
1712  
1714  
1716  
1718  
1720  
1722  
1724  
1726  
1728  
1730  
1732  
1734  
1736  
1738  
1740  
1742  
1744  
1746  
1748  
1750  
1752  
1754  
1756  
1758  
1760  
1762  
1764  
1766  
1768  
1770  
1772  
1774  
1776  
1778  
1780  
1782  
1784  
1786  
1788  
1790  
1792  
1794  
1796  
1798  
1800  
1802  
1804  
1806  
1808  
1810  
1812  
1814  
1816  
1818  
1820  
1822  
1824  
1826  
1828  
1830  
1832  
1834  
1836  
1838  
1840  
1842  
1844  
1846  
1848  
1850  
1852  
1854  
1856  
1858  
1860  
1862  
1864  
1866  
1868  
1870  
1872  
1874  
1876  
1878  
1880  
1882  
1884  
1886  
1888  
1890  
1892  
1894  
1896  
1898  
1900  
1902  
1904  
1906  
1908  
1910  
1912  
1914  
1916  
1918  
1920  
1922  
1924  
1926  
1928  
1930  
1932  
1934  
1936  
1938  
1940  
1942  
1944  
1946  
1948  
1950  
1952  
1954  
1956  
1958  
1960  
1962  
1964  
1966  
1968  
1970  
1972  
1974  
1976  
1978  
1980  
1982  
1984  
1986  
1988  
1990  
1992  
1994  
1996  
1998  
2000  
2002  
2004  
2006  
2008  
2010  
2012  
2014  
2016  
2018  
2020  
2022  
2024  
2026  
2028  
2030  
2032  
2034  
2036  
2038  
2040  
2042  
2044  
2046  
2048  
2050  
2052  
2054  
2056  
2058  
2060  
2062  
2064  
2066  
2068  
2070  
2072  
2074  
2076  
2078  
2080  
2082  
2084  
2086  
2088  
2090  
2092  
2094  
2096  
2098  
2100  
2102  
2104  
2106  
2108  
2110  
2112  
2114  
2116  
2118  
2120  
2122  
2124  
2126  
2128  
2130  
2132  
2134  
2136  
2138  
2140  
2142  
2144  
2146  
2148  
2150  
2152  
2154  
2156  
2158  
2160  
2162  
2164  
2166  
2168  
2170  
2172  
2174  
2176  
2178  
2180  
2182  
2184  
2186  
2188  
2190  
2192  
2194  
2196  
2198  
2200  
2202  
2204  
2206  
2208  
2210  
2212  
2214  
2216  
2218  
2220  
2222  
2224  
2226  
2228  
2230  
2232  
2234  
2236  
2238  
2240  
2242  
2244  
2246  
2248  
2250  
2252  
2254  
2256  
2258  
2260  
2262  
2264  
2266  
2268  
2270  
2272  
2274  
2276  
2278  
2280  
2282  
2284  
2286  
2288  
2290  
2292  
2294  
2296  
2298  
2300  
2302  
2304  
2306  
2308  
2310  
2312  
2314  
2316  
2318  
2320  
2322  
2324  
2326  
2328  
2330  
2332  
2334  
2336  
2338  
2340  
2342  
2344  
2346  
2348  
2350  
2352  
2354  
2356  
2358  
2360  
2362  
2364  
2366  
2368  
2370  
2372  
2374  
2376  
2378  
2380  
2382  
2384  
2386  
2388  
2390  
2392  
2394  
2396  
2398  
2400  
2402  
2404  
2406  
2408  
2410  
2412  
2414  
2416  
2418  
2420  
2422  
2424  
2426  
2428  
2430  
2432  
2434  
2436  
2438  
2440  
2442  
2444  
2446  
2448  
2450  
2452  
2454  
2456  
2458  
2460  
2462  
2464  
2466  
2468  
2470  
2472  
2474  
2476  
2478  
2480  
2482  
2484  
2486  
2488  
2490  
2492  
2494  
2496  
2498  
2500  
2502  
2504  
2506  
2508  
2510  
2512  
2514  
2516  
2518  
2520  
2522  
2524  
2526  
2528  
2530  
2532  
2534  
2536  
2538  
2540  
2542  
2544  
2546  
2548  
2550  
2552  
2554  
2556  
2558  
2560  
2562  
2564  
2566  
2568  
2570  
2572  
2574  
2576  
2578  
2580  
2582  
2584  
2586  
2588  
2590  
2592  
2594  
2596  
2598  
2600  
2602  
2604  
2606  
2608  
2610  
2612  
2614  
2616  
2618  
2620  
2622  
2624  
2626  
2628  
2630  
2632  
2634  
2636  
2638  
2640  
2642  
2644  
2646  
2648  
2650  
2652  
2654  
2656  
2658  
2660  
2662  
2664  
2666  
2668  
2670  
2672  
2674  
2676  
2678  
2680  
2682  
2684  
2686  
2688  
2690  
2692  
2694  
2696  
2698  
2700  
2702  
2704  
2706  
2708  
2710  
2712  
2714  
2716  
2718  
2720  
2722  
2724  
2726  
2728  
2730  
2732  
2734  
2736  
2738  
2740  
2742  
2744  
2746  
2748  
2750  
2752  
2754  
2756  
2758  
2760  
2762  
2764  
2766  
2768  
2770  
2772  
2774  
2776  
2778  
2780  
2782  
2784  
2786  
2788  
2790  
2792  
2794  
2796  
2798  
2800  
2802  
2804  
2806  
2808  
2810  
2812  
2814  
2816  
2818  
2820  
2822  
2824  
2826  
2828  
2830  
2832  
2834  
2836  
2838  
2840  
2842  
2844  
2846  
2848  
2850  
2852  
2854  
2856  
2858  
2860  
2862  
2864  
2866  
2868  
2870  
2872  
2874  
2876  
2878  
2880  
2882  
2884  
2886  
2888  
2890  
2892  
2894  
2896  
2898  
2900  
2902  
2904  
2906  
2908  
2910  
2912  
2914  
2916  
2918  
2920  
2922  
2924  
2926  
2928  
2930  
2932  
2934  
2936  
2938  
2940  
2942  
2944  
2946  
2948  
2950  
2952  
2954  
2956  
2958  
2960  
2962  
2964  
2966  
2968  
2970  
2972  
2974  
2976  
2978  
2980  
2982  
2984  
2986  
2988  
2990  
2992  
2994  
2996  
2998  
3000  
3002  
3004  
3006  
3008  
3010  
3012  
3014  
3016  
3018  
3020  
3022  
3024  
3026  
3028  
3030  
3032  
3034  
3036  
3038  
3040  
3042  
3044  
3046  
3048  
3050  
3052  
3054  
3056  
3058  
3060  
3062  
3064  
3066  
3068  
3070  
3072  
3074  
3076  
3078  
3080  
3082  
3084  
3086  
3088  
3090  
3092  
3094  
3096  
3098  
3100  
3102  
3104  
3106  
3108  
3110  
3112  
3114  
3116  
3118  
3120  
3122  
3124  
3126  
3128  
3130  
3132  
3134  
3136  
3138  
3140  
3142  
3144  
3146  
3148  
3150  
3152  
3154  
3156  
3158  
3160  
3162  
3164  
3166  
3168  
3170  
3172  
3174  
3176  
3178  
3180  
3182  
3184  
3186  
3188  
3190  
3192  
3194  
3196  
3198  
3200  
3202  
3204  
3206  
3208  
3210  
3212  
3214  
3216  
3218  
3220  
3222  
3224  
3226  
3228  
3230  
3232  
3234  
3236  
3238  
3240  
3242  
3244  
3246  
3248  
3250  
3252  
3254  
3256  
3258  
3260  
3262  
3264  
3266  
3268  
3270  
3272  
3274  
3276  
3278  
3280  
3282  
3284  
3286  
3288  
3290  
3292  
3294  
3296  
3298  
3300  
3302  
3304  
3306  
3308  
3310  
3312  
3314  
3316  
3318  
3320  
3322  
3324  
3326  
3328  
3330  
3332  
3334  
3336  
3338  
3340  
3342  
3344  
3346  
3348  
3350  
3352  
3354  
3356  
3358  
3360  
3362  
3364  
3366  
3368  
3370  
3372  
3374  
3376  
3378  
3380  
3382  
3384  
3386  
3388  
3390  
3392  
3394  
3396  
3398  
3400  
3402  
3404  
3406  
3408  
3410  
3412  
3414  
3416  
3418  
3420  
3422  
3424  
3426  
3428  
3430  
3432  
3434  
3436  
3438  
3440  
3442  
3444  
3446  
3448  
3450  
3452  
3454  
3456  
3458  
3460  
3462  
3464  
3466  
3468  
3470  
3472  
3474  
3476  
3478  
3480  
3482  
3484  
3486  
3488  
3490  
3492  
3494  
3496  
3498  
3500  
3502  
3504  
3506  
3508  
3510  
3512  
3514  
3516  
3518  
3520  
3522  
3524  
3526  
3528  
3530  
3532  
3534  
3536  
3538  
3540  
3542  
3544  
3546  
3548  
3550  
3552  
3554  
3556  
3558  
3560  
3562  
3564  
3566  
3568  
3570  
3572  
3574  
3576  
3578  
3580  
3582  
3584  
3586  
3588  
3590  
3592  
3594  
3596  
3598  
3600  
3602  
3604  
3606  
3608  
3610  
3612  
3614  
3616  
3618  
3620  
3622  
3624  
3626  
3628  
3630  
3632  
3634  
3636  
3638  
3640  
3642  
3644  
3646  
3648  
3650  
3652  
3654  
3656  
3658  
3660  
3662  
3664  
3666  
3668  
3670  
3672  
3674  
3676  
3678  
3680  
3682  
3684  
3686  
3688  
3690  
3692  
3694  
3696  
3698  
3700  
3702  
3704  
3706  
3708  
3710  
3712  
3714  
3716  
3718  
3720  
3722  
3724  
3726  
3728  
3730  
3732  
3734  
3736  
3738  
3740  
3742  
3744  
3746  
3748  
3750  
3752  
3754  
3756  
3758  
3760  
3762  
3764  
3766  
3768  
3770  
3772  
3774  
3776  
3778  
3780  
3782  
3784  
3786  
3788  
3790  
3792  
3794  
3796  
3798  
3800  
3802  
3804  
3806  
3808  
3810  
3812  
3814  
3816  
3818  
3820  
3822  
3824  
382

17. Apparatus for the partial removal of contaminants from a process gas stream  
2 comprising,

4 a duct for conveying a process gas stream from the exhaust of a combustion  
process,

6 a scrubber connected to said duct for receiving the process gas stream  
8 containing contaminants,

10 a source of ozone introduced into a first zone of the process gas stream in said  
scrubber for selective mixing with the process gas stream and a second zone of the  
12 process gas stream in said scrubber being free of ozone, and

14 the ozone mixed with the process gas stream in said first zone oxidizes the  
nitrogen oxides present in the process gas stream first zone.

18. Apparatus for the partial removal of contaminants from a process gas stream as  
2 set forth in claim 17 which includes,

4 said duct partitioned into a first chamber and a second chamber for receiving the  
process gas stream,

6 said duct first chamber being injected with ozone,

8 said duct first chamber receiving ozone for mixing with the process gas stream in  
10 to oxidize the contaminants therein,

12 a third chamber of said duct positioned downstream of the duct first and second  
chambers having an aqueous spray medium for capturing the oxidized contaminants in  
14 the process gas stream to remove the contaminants oxidized in the first zone of the  
process gas stream,

16

18        said duct third chamber conveying the process gas stream from the first zone  
18        free of contaminants and the process gas stream from the second zone containing  
contaminants to said scrubber,

20

22        said scrubber remixing the process gas streams from the first and second zones,  
and

24        said scrubber generating a spray of aqueous medium into the remixed process  
gas streams to remove any remaining contaminants oxidized by excess ozone  
26        remaining in the remixed process gas streams.

19.       Apparatus for the partial removal of contaminants from a process gas stream as  
2       set forth in claim 17 which includes,

4       said scrubber including a plurality of Venturi scrubbers for receiving a stream of  
process gas from the combustion process,

6       said Venturi scrubbers each provided with a scrubbing medium to contact the  
8       process gas stream flowing therethrough to remove acid gases and particulate matter  
from the process gas,

10       a duct partitioned into a first chamber and a second chamber for receiving the  
12       process gas discharged from said Venturi scrubbers,

14       said duct first chamber selectively injected with ozone for mixing with the process  
gas in said duct first chamber so that only a preselected percentage of the process gas  
16       flowing from said Venturi scrubbers is oxidized,

18       a capture device for receiving the process gas streams from said duct first and  
second chambers, and

22        said capture device provided with aqueous medium sprays for capturing the  
oxidized contaminants in the process gas to remove the oxidized contaminants from the  
24        process gas stream.

20.      Apparatus for the partial removal of contaminants from a process gas stream as  
2        set forth in claim 17 which includes,

4        an aqueous reagent stream contacting the process gas stream in said duct to  
form finely dusted solids in the process gas stream,

6        a modular capture device including a bag house having a plurality of chambers  
8        for receiving the gas stream containing the finely dusted solids,

10        an injector for supplying ozone into preselected chambers of said bag house  
having a solid reagent to obtain a preselected percentage of oxidation of contaminants  
12        in the gas stream,

14        said solid reagent in said chambers of said bag house absorbing oxidized solid  
contaminants while the gas stream free of solid contaminants exits said chamber,

16        an exit duct extending from each of said chambers to unite the gas streams  
18        flowing from each of said chambers forming a treated gas stream, and

20        said exit duct providing for mixing of the gas streams exiting said chambers so  
that any residual ozone is consumed by the contaminants remaining in the treated gas  
22        stream.

21. A method for the partial removal of contaminants from a process gas stream  
2 comprising the steps of:

4 conditioning the process gas stream emitted from a combustion process,

6 injecting ozone into a portion of process gas stream to provide mixing of the  
ozone with the contaminants including nitrogen oxides in the selected portion of the  
8 process gas stream,

10 oxidizing nitrogen oxides in the selected portion of the process gas stream by  
mixing with ozone,

12 capturing the oxidized nitrogen oxides in a capture device to remove the nitrogen  
14 oxides from the selected portion of the process gas stream, and

16 recombining the selected portion of the process gas stream with the remainder  
of process gas stream containing contaminants.

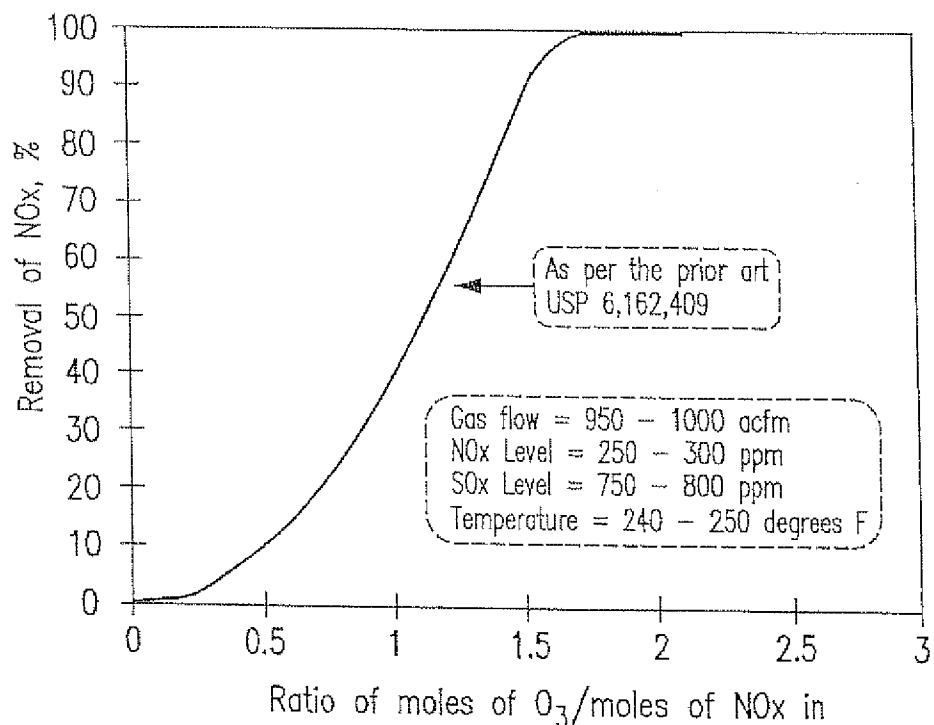


FIG. 1

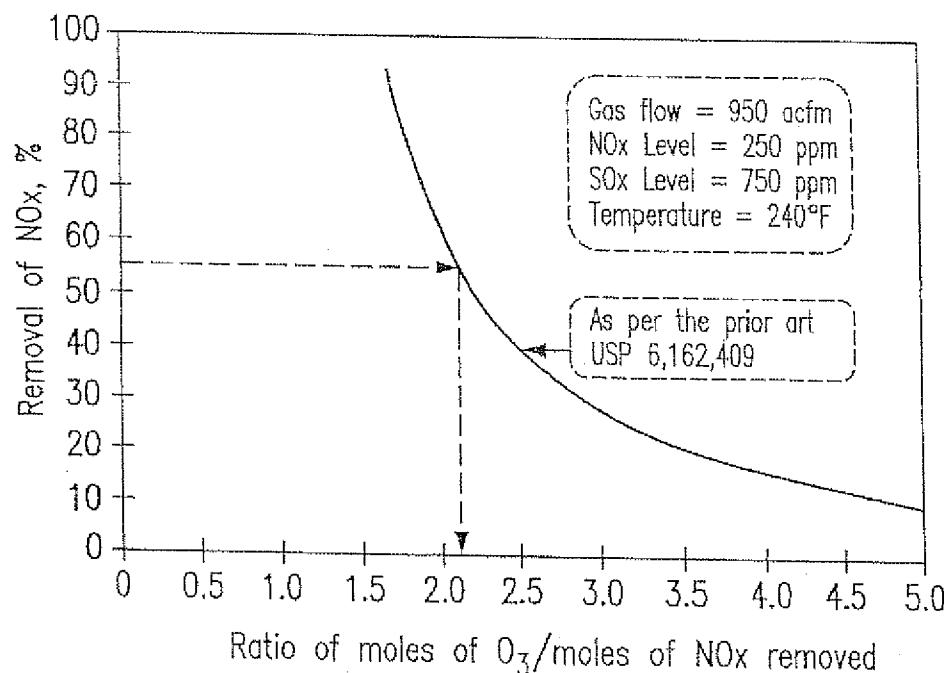


FIG. 2

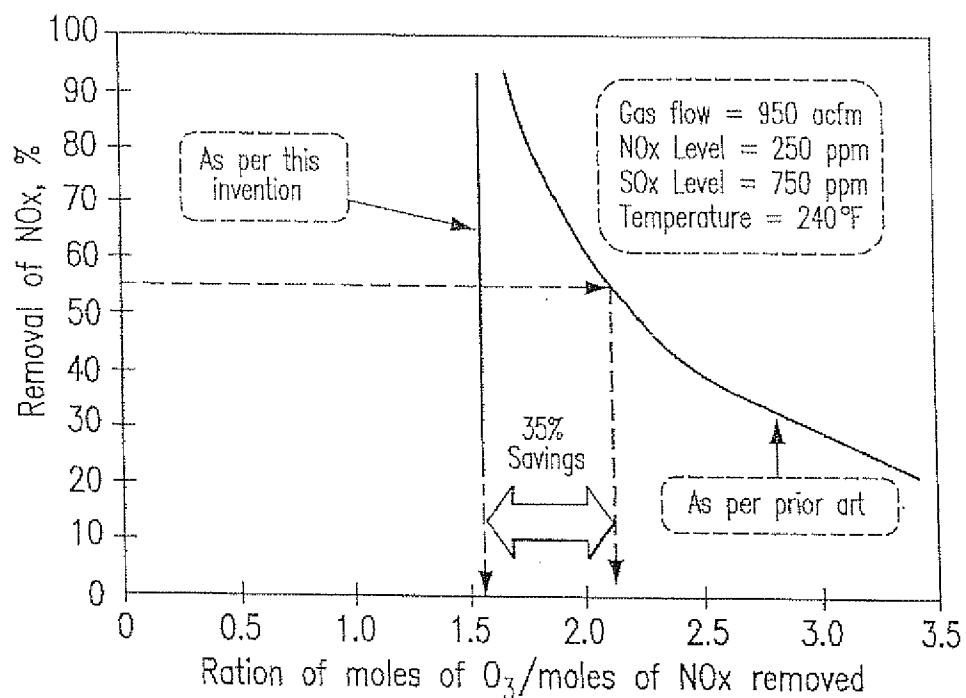


FIG. 3

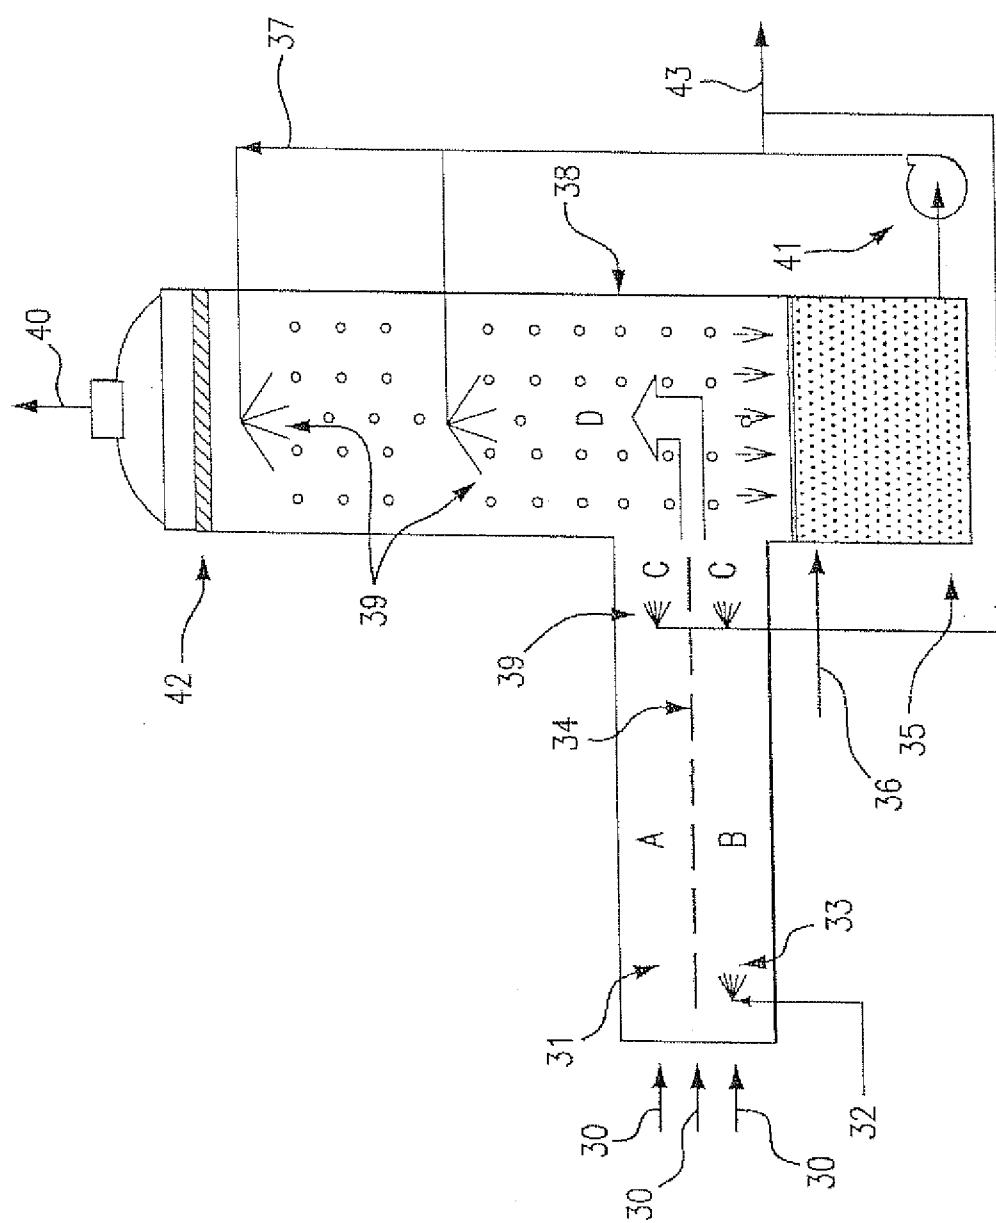


FIG. 4

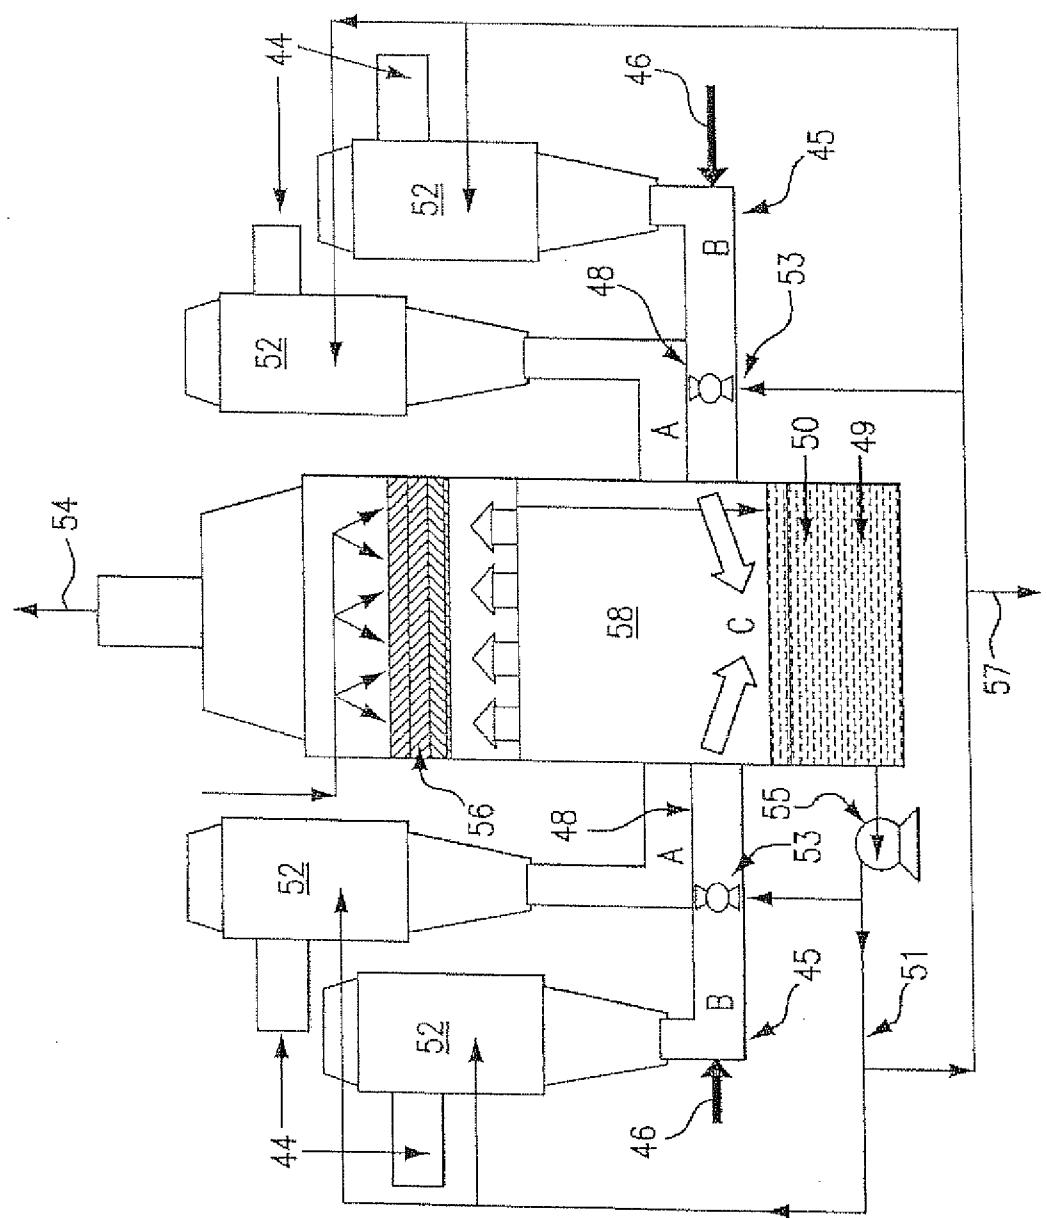


FIG. 5

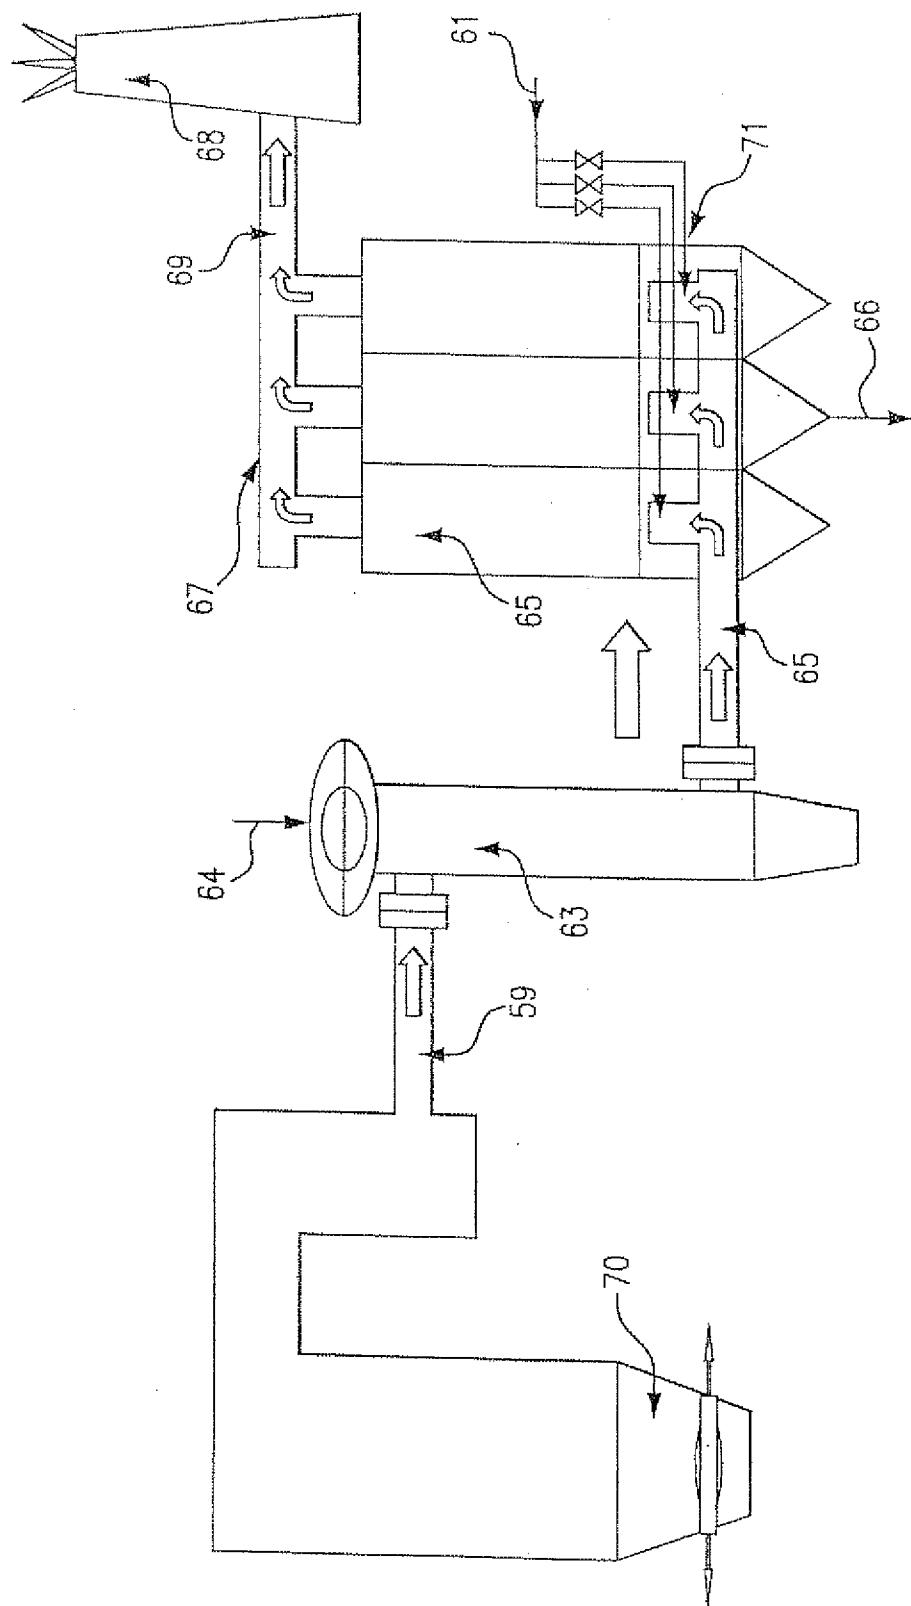


FIG. 6


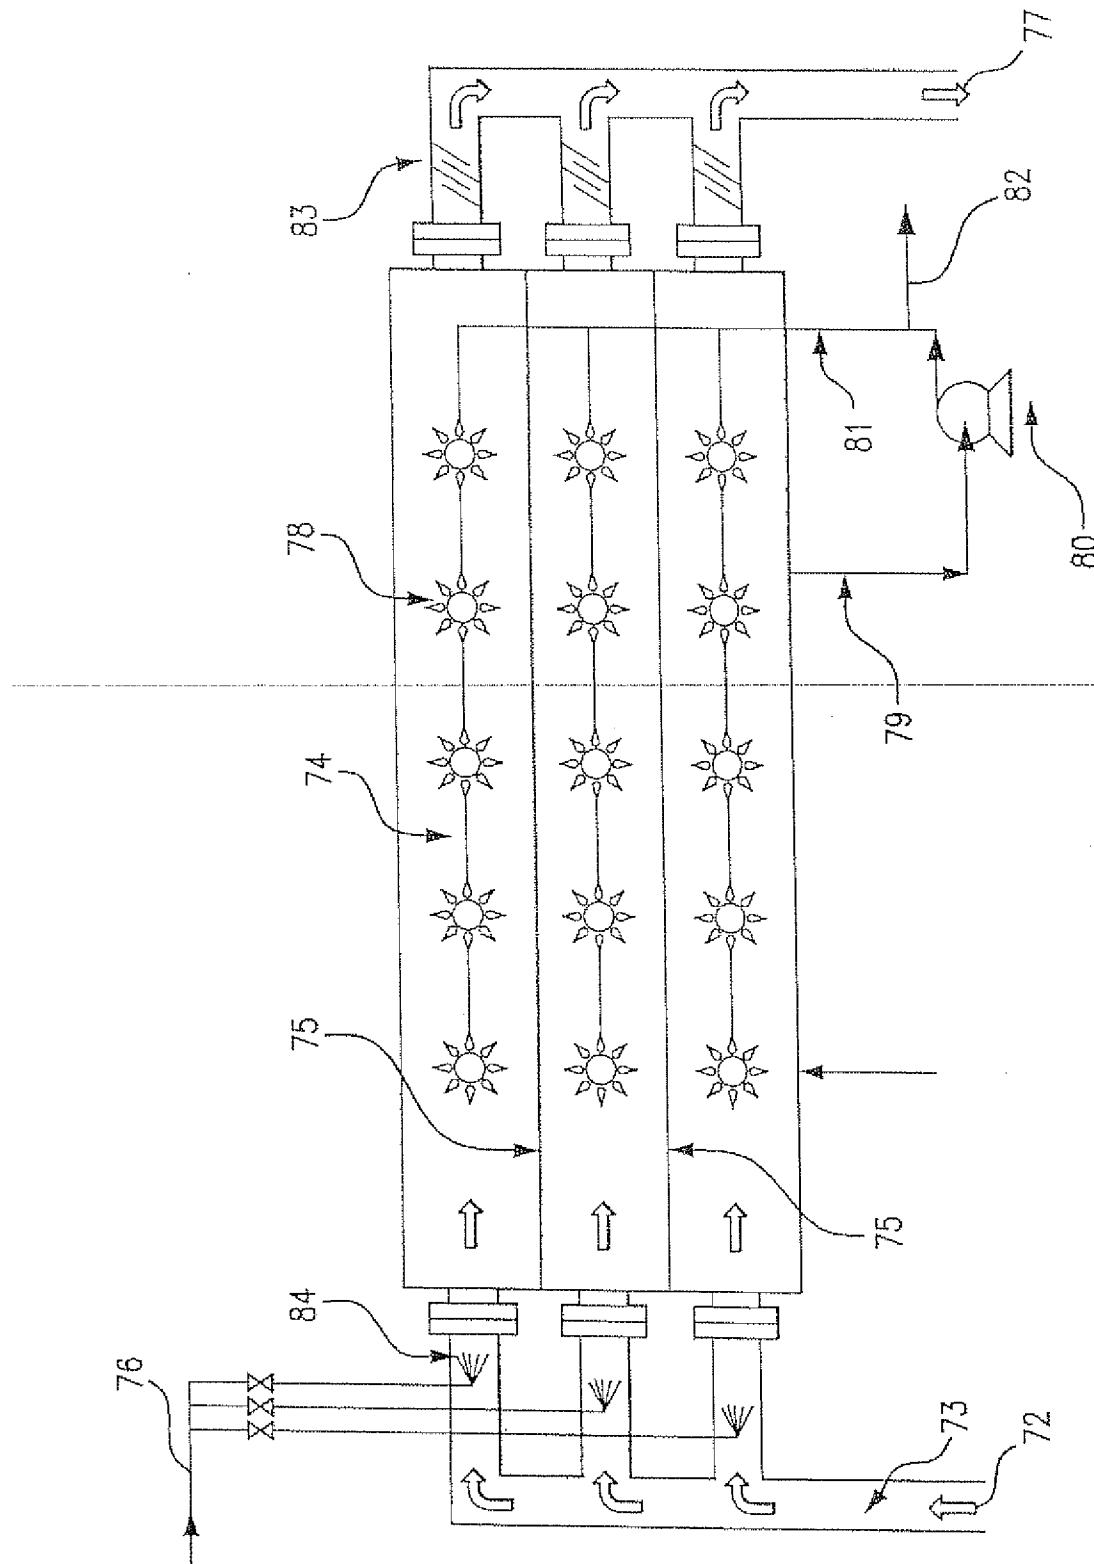


FIG. 7

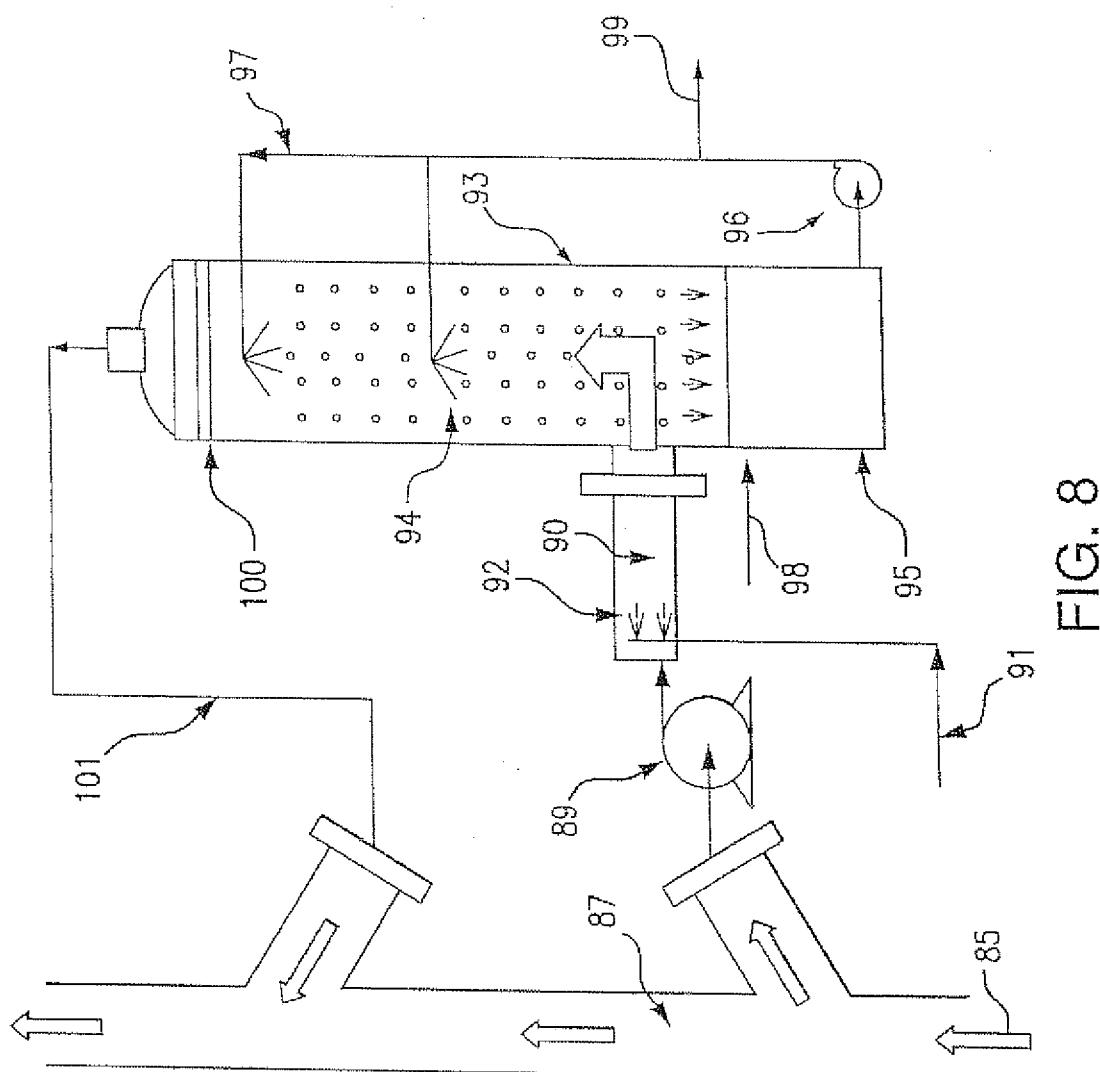

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2014/059416

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. B01D53/56 B01D53/75 B01D53/78  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 136 284 A (HWANG SHUEN-CHENG [US] ET AL) 24 October 2000 (2000-10-24) column 2, lines 55-62; figure 1 column 3, lines 16-62 -----	1-21
X	US 6 197 268 B1 (HWANG SHUEN-CHENG [US] ET AL) 6 March 2001 (2001-03-06) column 5, lines 19-50; figure 1 -----	1-21
X, P	EP 2 719 440 A1 (LINDE AG [DE]) 16 April 2014 (2014-04-16) the whole document -----	1-21
A	EP 1 852 172 A1 (BOC GROUP INC [US] LINDE LLC [US]) 7 November 2007 (2007-11-07) the whole document ----- -/-	1-21

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier application or patent but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
---	--

28 January 2015

05/02/2015

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer
--	--------------------

Gruber, Marco

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/US2014/059416

**C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 277 347 B1 (STEARNS RANALD [US] ET AL) 21 August 2001 (2001-08-21) figures 1,3,5 -----	1-21

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No

PCT/US2014/059416

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 6136284	A	24-10-2000	AU	771046 B2		11-03-2004
			AU	7210200 A		14-06-2001
			EP	1106238 A1		13-06-2001
			JP	4698819 B2		08-06-2011
			JP	2001187316 A		10-07-2001
			KR	20010062242 A		07-07-2001
			TW	586961 B		11-05-2004
			US	6136284 A		24-10-2000
			ZA	200007223 A		06-06-2001
<hr/>						
US 6197268	B1	06-03-2001	AT	277680 T		15-10-2004
			AU	764628 B2		28-08-2003
			AU	4379000 A		04-01-2001
			CA	2312652 A1		02-01-2001
			DE	60014248 D1		04-11-2004
			EP	1064981 A1		03-01-2001
			JP	4512238 B2		28-07-2010
			JP	2001025646 A		30-01-2001
			NZ	505573 A		30-11-2001
			US	6197268 B1		06-03-2001
			ZA	200003249 A		17-01-2001
<hr/>						
EP 2719440	A1	16-04-2014	EP	2719440 A1		16-04-2014
			US	2014127107 A1		08-05-2014
<hr/>						
EP 1852172	A1	07-11-2007	AU	2007201920 A1		22-11-2007
			EP	1852172 A1		07-11-2007
			HK	1117449 A1		07-06-2013
			TW	200808432 A		16-02-2008
			US	2008017590 A1		24-01-2008
<hr/>						
US 6277347	B1	21-08-2001	DE	69820312 D1		22-01-2004
			DE	69820312 T2		18-11-2004
			EP	0861683 A2		02-09-1998
			US	6277347 B1		21-08-2001
<hr/>						