




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : B60N 2/20</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/46413 (43) International Publication Date: 11 December 1997 (11.12.97)</p>
<p>(21) International Application Number: PCT/US97/09997 (22) International Filing Date: 9 June 1997 (09.06.97) (30) Priority Data: 660,523 7 June 1996 (07.06.96) US (71) Applicant: LEAR CORPORATION [US/US]; 21557 Telegraph Road, Southfield, MI 48034 (US). (72) Inventors: DUDASH, Eugene, S.; 933 Sycamore Court, Wixom, MI 48393 (US). STANISZ, Mark; 3671 Meadowleigh Lane, Waterford, MI 48329 (US). SMITTERBERG, Eric, A.; 2232 Harvard, Berkley, MI 48072 (US). HENSLEY, L., Keith; 33641 Lyncroft, Farmington Hills, MI 48331 (US). COOK, Sanford, E.; 45166 Harmony Lane, Belleville, MI 48111 (US). FUDALA, Kevin, J.; 5018 LaFayette, Dearborn, MI 48127 (US). (74) Agents: QUINN, Christopher, W. et al.; Brooks & Kushman, 22nd floor, 1000 Town Center, Southfield, MI 48075 (US).</p>		<p>(81) Designated States: DE, GB, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: MOTOR VEHICLE SEAT

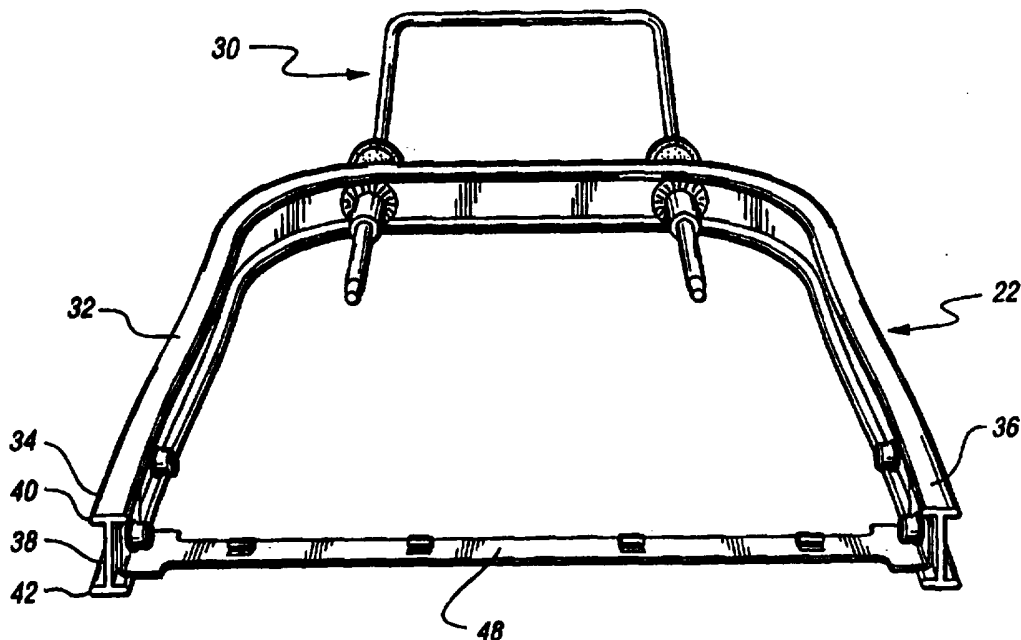

(57) Abstract

The present invention provides an apparatus for supporting a seat back (22) in a vehicle comprising an aluminum I-beam (32) formed in a generally U-shaped configuration, and having opposing ends (34, 36) supported with respect to the vehicle for forming a seat back frame. Also provided is a method of manufacturing a vehicle seat back frame, comprising: a) extruding an aluminum I-beam; b) cutting the I-beam to a desired length; c) age-hardening the I-beam; and d) bending the I-beam into a substantially U-shaped configuration to form a vehicle seat back frame.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

MOTOR VEHICLE SEAT

Technical Field

The present invention relates generally to motor vehicle seats, and more particularly to a seat
5 back frame.

Background of the Invention

Typically, vehicle seat assemblies include a recliner mechanism which supports a substantially U-shaped seat back frame with a cross-member extending
10 across the back frame, and head rest guide tubes extending through the back frame for supporting a head rest assembly. Normally, an aluminum back frame comprises a hollow aluminum tube bent into a U-shaped configuration. The tube is usually bent in an unheat-treated condition,
15 and then heat-treated after bending, or alternatively, the tube is annealed locally for bending. The heat-treating operation adds substantial manufacturing, handling, and shipping costs to the assembly.

The prior art bent tubes are deformed in the upper bending corners and have thin walls in the attachment areas, which results in a high shear stress. The thin attachment areas require a splint or insert to be inserted therein to reduce the shear stress. Furthermore, for attachment of the head rest guide tubes,
20 apertures must be bored through both sides of the back frame tube, which may be awkward and may unnecessarily increase manufacturing costs.

It is desirable to provide a seat assembly in which localized heat treatment is not required prior to

-2-

bending the seat back frame, heat treatment after frame completion is not rigid, and in which structural integrity is enhanced and manufacturing costs are reduced.

Disclosure Of The Invention

5 The present invention overcomes the above-referenced shortcomings of prior art seat assemblies by providing a seat back frame in the form of an extruded solid aluminum I-beam which does not require heat treatment for bending, localized heat treatment prior to
10 bending, or post-bending heat treatment.

 More specifically, the present invention provides an apparatus for supporting a seat back in a vehicle, comprising an aluminum I-beam formed in a generally U-shaped configuration, and having opposing
15 ends supported with respect to the vehicle. The I-beam forms a seat back frame for supporting a seat back.

 The present invention further provides a method of manufacturing a vehicle seat back frame, comprising the following steps: a) extruding an aluminum
20 I-beam comprising a center support positioned between first and second flanges extending the length of the I-beam; b) cutting the I-beam to a desired length; c) age-hardening the I-beam; and d) bending the I-beam into a substantially U-shaped configuration, such that the
25 center support and first and second flanges cooperate to form an inwardly-facing channel and an outwardly-facing channel.

 In a preferred embodiment, the assembly includes a cross-member extending across the U-shaped I-

-3-

beam, with the cross-member attached to the I-beam at opposing ends by a pair of swaged nuts.

5 The present invention also provides a method for attaching a head rest guide tube to a seat back frame having a substantially flat section with an aperture formed therethrough. The method comprises inserting the guide tube into the aperture and swaging (also termed "swedging") the guide tube on both sides of the flat section whereby to secure the guide tube within
10 the aperture.

Accordingly, an object of the present invention is to provide an aluminum seat back frame which does not require specialized heat treatment for bending.

15 Another object of the present invention is to provide a vehicle seat back frame with improved structural integrity.

Yet another object of the present invention is to provide a vehicle seat back frame with reduced manufacturing costs.

20 The above objects and other objects, features, and advantages of the present invention are readily apparent from the following detailed description of the best modes for carrying out the invention when taken in connection with the accompanying drawings.

Brief Description Of The Drawings

FIGURE 1 shows an exploded perspective view of a vehicle seat assembly in accordance with the present invention;

5 FIGURE 2 shows a perspective end view of a seat back frame assembly in accordance with the present invention;

FIGURE 3 shows a side perspective view of the seat back frame assembly shown in Figure 2;

10 FIGURE 4 shows a partial perspective view of a seat back frame and head rest assembly in accordance with the present invention;

15 FIGURE 5 shows a perspective view of a seat back frame with a swage-bolted cross-member in accordance with the present invention;

FIGURE 6 schematically illustrates method steps for manufacturing a vehicle seat back frame in accordance with the present invention;

20 FIGURE 7 shows a cutaway perspective view of a seat back frame with a head rest guide tube secured thereto;

FIGURE 8 shows a cross-sectional view of the seat back frame and head rest guide tube shown in FIG. 7; and

25 FIGURE 9 shows a vertical cross-sectional view of a lower attachment bolt secured to the back frame.

Detailed Description of the Preferred Embodiments

Figure 1 shows an exploded perspective view of a vehicle seat assembly 10 in accordance with the present invention. The assembly 10 includes a cushion frame 12 supported by a pair of support brackets 14,16. The support brackets 14,16 are mounted by the seat adjusters 18,20, which mount the assembly in the vehicle. The seat back frame 22 is pivotally mounted with respect to the cushion frame 12 by means of the recliner mechanism 24,26. The seat back frame 22 includes a lumbar support structure 28 mounted thereto, as well as a head rest support assembly 30 for supporting a head rest cushion with respect to the seat back frame 22.

The seat back frame 22 is more clearly shown in Figures 2 and 3. The seat back frame 22 comprises an aluminum I-beam 32 bent in a substantially U-shaped configuration. The I-beam 32 includes opposing ends 34,36 which are pivotally supported with respect to the vehicle by the recliner mechanisms 24,26. The I-beam 32 includes a center support 38 positioned between first and second flanges 40,42 extending the length of the I-beam 32. The center support 38 and first and second flanges 40,42 are more clearly shown in Figure 5. In this configuration, the I-beam 32 forms an outwardly-facing channel 44, and an inwardly-facing channel 46.

Returning to Figure 2, the seat back frame 22 includes a cross-member 48 extending between the opposing ends 34,36 of the I-beam 32. Turning back to Figure 5, the cross-member 48 is secured to the center support portion 38 of the I-beam 32 by the nuts 50. The bolts 50 include a flange 52 which is swaged against the dowel portion 54 of the cross-member 48 for securing the

-6-

cross-member 48 with respect to the I-beam 32. In this manner, a welding operation is eliminated from the seat back frame assembly process. As shown in FIG. 9, the center support portion 38 includes a countersink 39 on the outer surface 41 so that the nut 50 may be secured flush with the outer surface 41.

Referring to Figures 3 and 4, the head rest support assembly 30 is more clearly shown. The head rest support assembly 30 includes a pair of head rest guide tubes 56,58 which are welded into position within a pair of apertures formed in the center support section 38 of the I-beam 32. Alternatively, the head rest guide tubes 56,58 could be swaged into position for support with respect to the I-beam 32 (as discussed below with reference to FIGS. 7 and 8). Plastic head rest adjustment mechanisms 60,62 are supported within the guide tubes 56,58. A head rest support bar 64 is adjustably supported within the plastic adjustment mechanisms 60,62 for vertical adjustment of the head rest.

With this I-beam configuration, a substantial portion of the seat back frame 22 mass is away from the center of mass, which gives better moment of inertia characteristics, thereby reducing bending stress. A bending stress formula is illustrated below:

$$\sigma = \frac{My}{I}$$

where σ is the bending stress, M is the bending moment, y is the distance from the center of mass to the point of maximum stress, and I is the moment of inertia. Accordingly, as the moment of inertia (I) increases, bending stress is reduced. Therefore, structural

-7-

integrity of the seat back frame is improved in comparison to the prior art tubular back frames.

The present invention also provides a method of manufacturing a seat back frame, as illustrated in Figure 6. The method includes extruding an aluminum I-beam (step 70); cutting the I-beam to a desired length (step 72); age-hardening the I-beam (step 74); roll-bending the I-beam in a bend fixture (step 76); boring attachment apertures in the I-beam (step 78); and boring head rest guide tube apertures in the I-beam (step 80). The method further comprises welding guide tubes in the guide tube apertures (step 82), or swaging guide tubes in the guide tube apertures (step 82'); and swage-bolting a cross-member between opposing ends of the I-beam (step 84). In this manner, the aluminum I-beam may be purchased in a T6 (fully age-hardened) condition, rather than purchasing in a lower T4 condition, which would require post-bending of the I-beam and then shipping the I-beam back to an appropriate facility for age-hardening to the T-6 condition. Elimination of the step of locally annealing the back frame for bending, or bending the back frame in an unheat-treated condition, and then heat-treating after the bending operation, will significantly reduce manufacturing costs.

FIGS. 7 and 8 illustrate a double-swaging attachment of the guide tube 56 to the flat portion (center support) 38 of the I-beam 32. The guide tube 56 is inserted into an aperture 57 formed in the substantially flat center support 38, and is swaged on both sides of the flat section 38 whereby to secure the guide tube 56 within the aperture 57. The swaged portions 59,61 abut the flat center support 38 for securing the guide tube 56.

- 8 -

Preferably, the guide tube 56 has one swaged portion 59 pre-formed, then it is inserted into the aperture 57, and the second swaged portion 61 is formed after insertion. This configuration eliminates welding of the guide tubes, which would require aluminum guide tubes to cooperate with the aluminum back frame. By swaging rather than welding, a steel or other available headrest guide tube could be used.

While the best modes for carrying out the invention have been described in detail, those familiar with the art to which this invention relates will recognize various alternative designs and embodiments for practicing the invention within the scope of the appended claims.

What Is Claimed Is:

1. An apparatus for supporting a seat back in a vehicle, comprising an extruded solid aluminum I-beam formed in a generally U-shaped configuration and having opposing ends supported with respect to the vehicle, said I-beam forming a seat back frame for supporting a seat back.

2. The apparatus of claim 1, wherein said I-beam forms an outwardly-facing channel and an inwardly-facing channel continuously along the length thereof.

3. The apparatus of claim 1, wherein said I-beam comprises a center support positioned between first and second flanges extending the length thereof, and said center support comprises first and second apertures formed therethrough, and said apparatus further comprises a pair of head rest guide tubes disposed in said first and second apertures, and a head rest bar supported within said guide tubes.

4. The apparatus of claim 3, wherein said assembly further comprises a pair of head rest bar adjustment mechanisms supported by said pair of guide tubes.

5. The apparatus of claim 1, further comprising a pair of recliner mechanisms secured to said opposing ends.

6. The apparatus of claim 1, further comprising a cross-member extending between said opposing ends, and bolted to said opposing ends.

-10-

7. The apparatus of claim 6, further comprising a plurality of swaged bolts securing said cross-member to said opposing ends.

5 8. A method of manufacturing a vehicle seat back frame, comprising:

- a) extruding an aluminum I-beam comprising a center support positioned between first and second flanges extending the length of the I-beam;
- b) cutting the I-beam to a desired length;
- 10 c) age-hardening the I-beam; and
- d) bending the I-beam into a substantially U-shaped configuration, such that said center support and first and second flanges cooperate to form an inwardly-facing channel and an outwardly-facing channel.

15 9. The method of claim 8, further comprising boring first and second apertures through the I-beam and welding first and second guide tubes in the first and second apertures, respectively.

20 10. The method of claim 9, further comprising extending a cross-member between opposing ends of the I-beam and swaging bolts for attachment of the cross-member to the I-beam.

25 11. The method of claim 8, further comprising boring first and second apertures through the I-beam and swaging first and second guide tubes into the first and second apertures, respectively.

12. The method of claim 8, further comprising:

30 forming first and second attachment holes at opposing ends of the I-beam;

-11-

extending a cross-member between the opposing ends; and

swaging bolts within the attachment holes for securing the cross-member to the I-beam.

5 13. A method of attaching a head rest guide tube to a seat back frame having a substantially flat section having opposing sides with an aperture formed therethrough, the method comprising:

- 10 (a) inserting the guide tube into the aperture; and
- (b) swaging the guide tube over the flat section, whereby to secure the guide tube within the aperture.

1/5

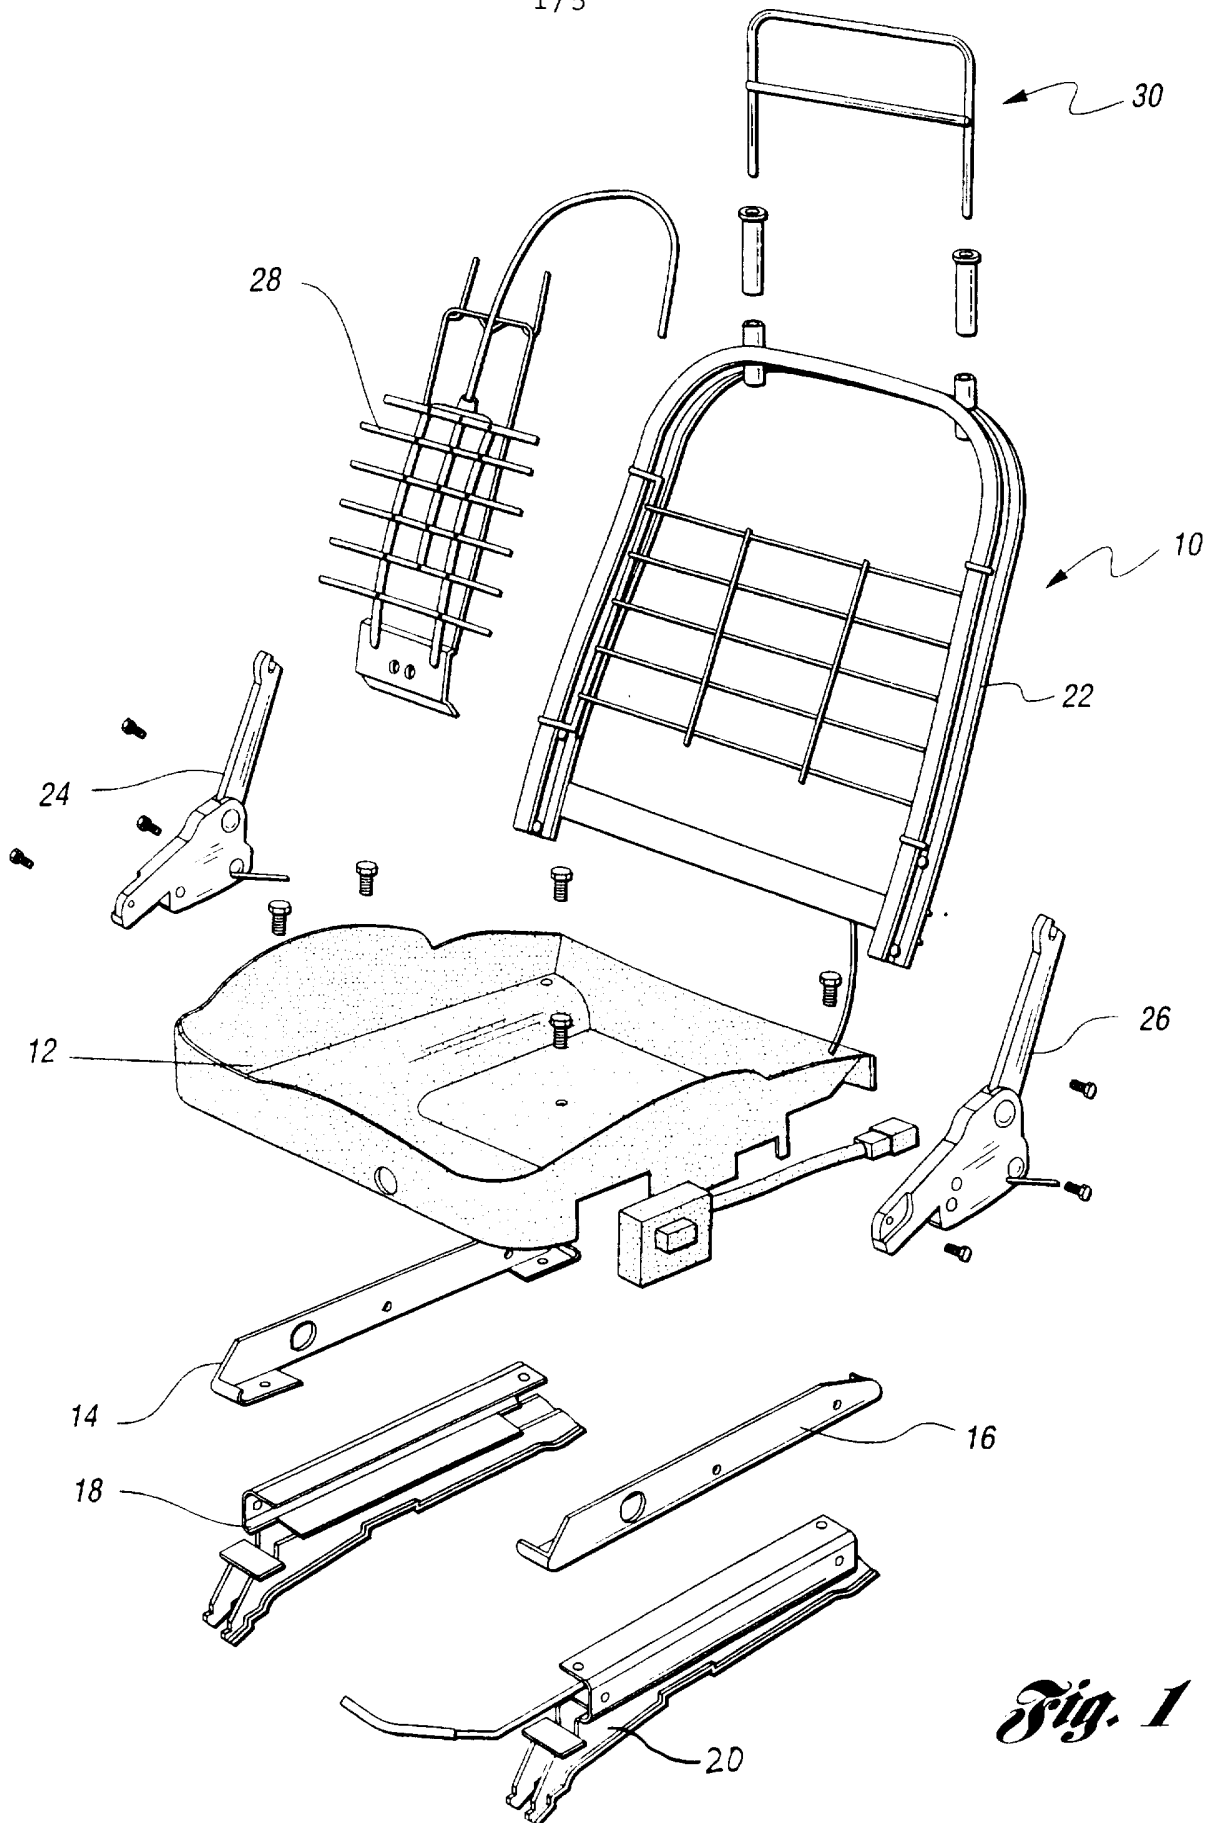


Fig. 1

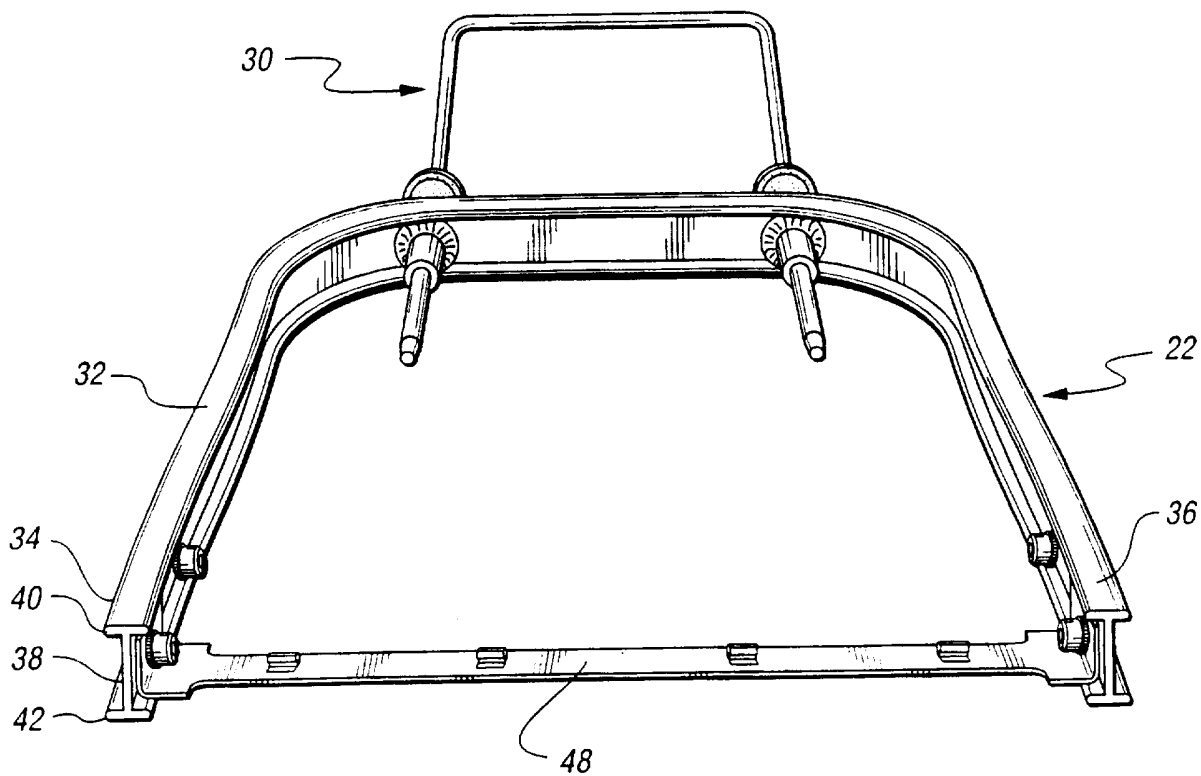


Fig. 2

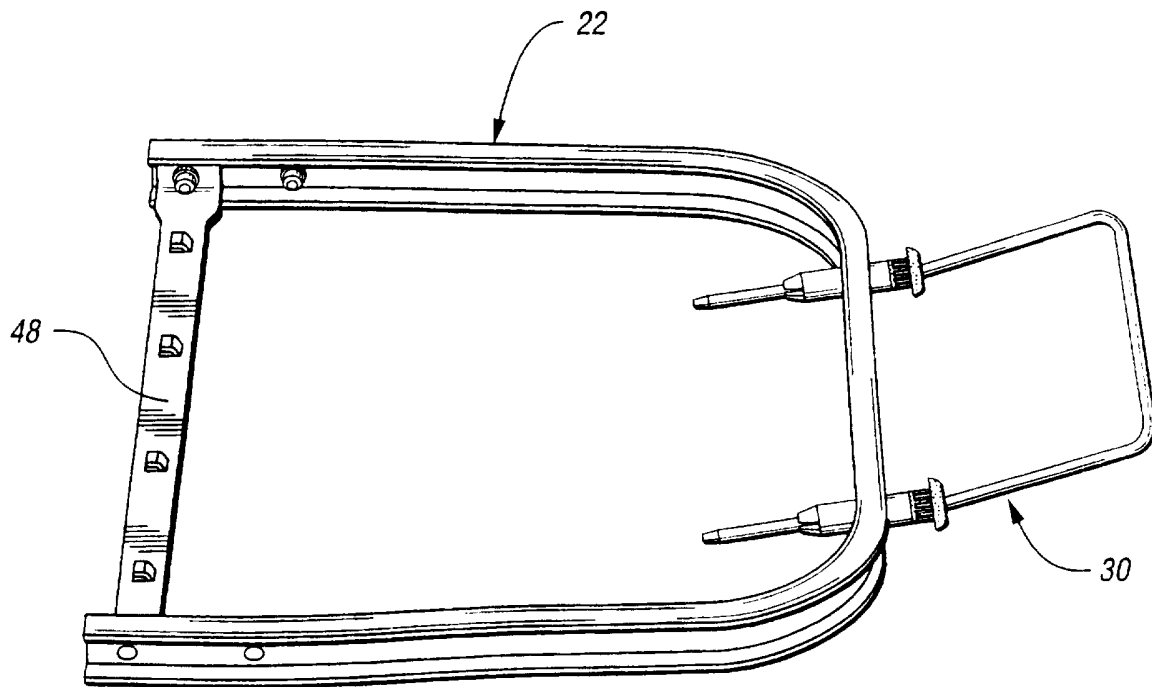


Fig. 3

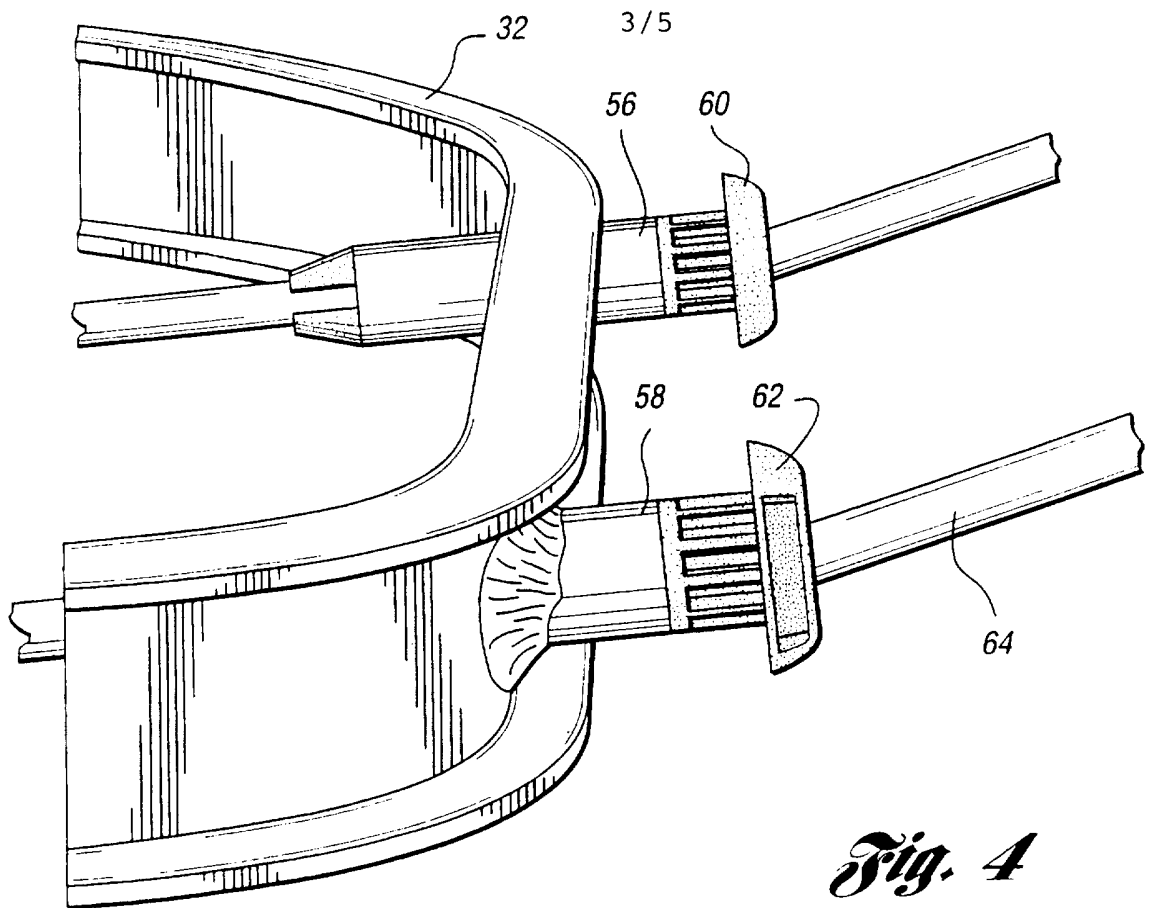
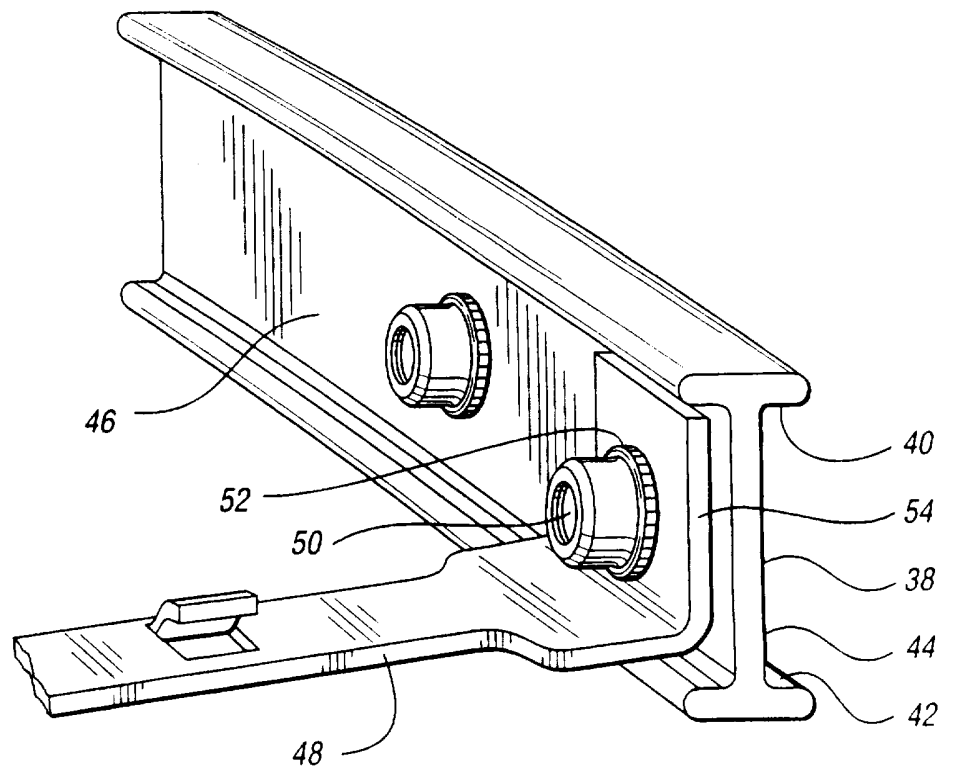


Fig. 5



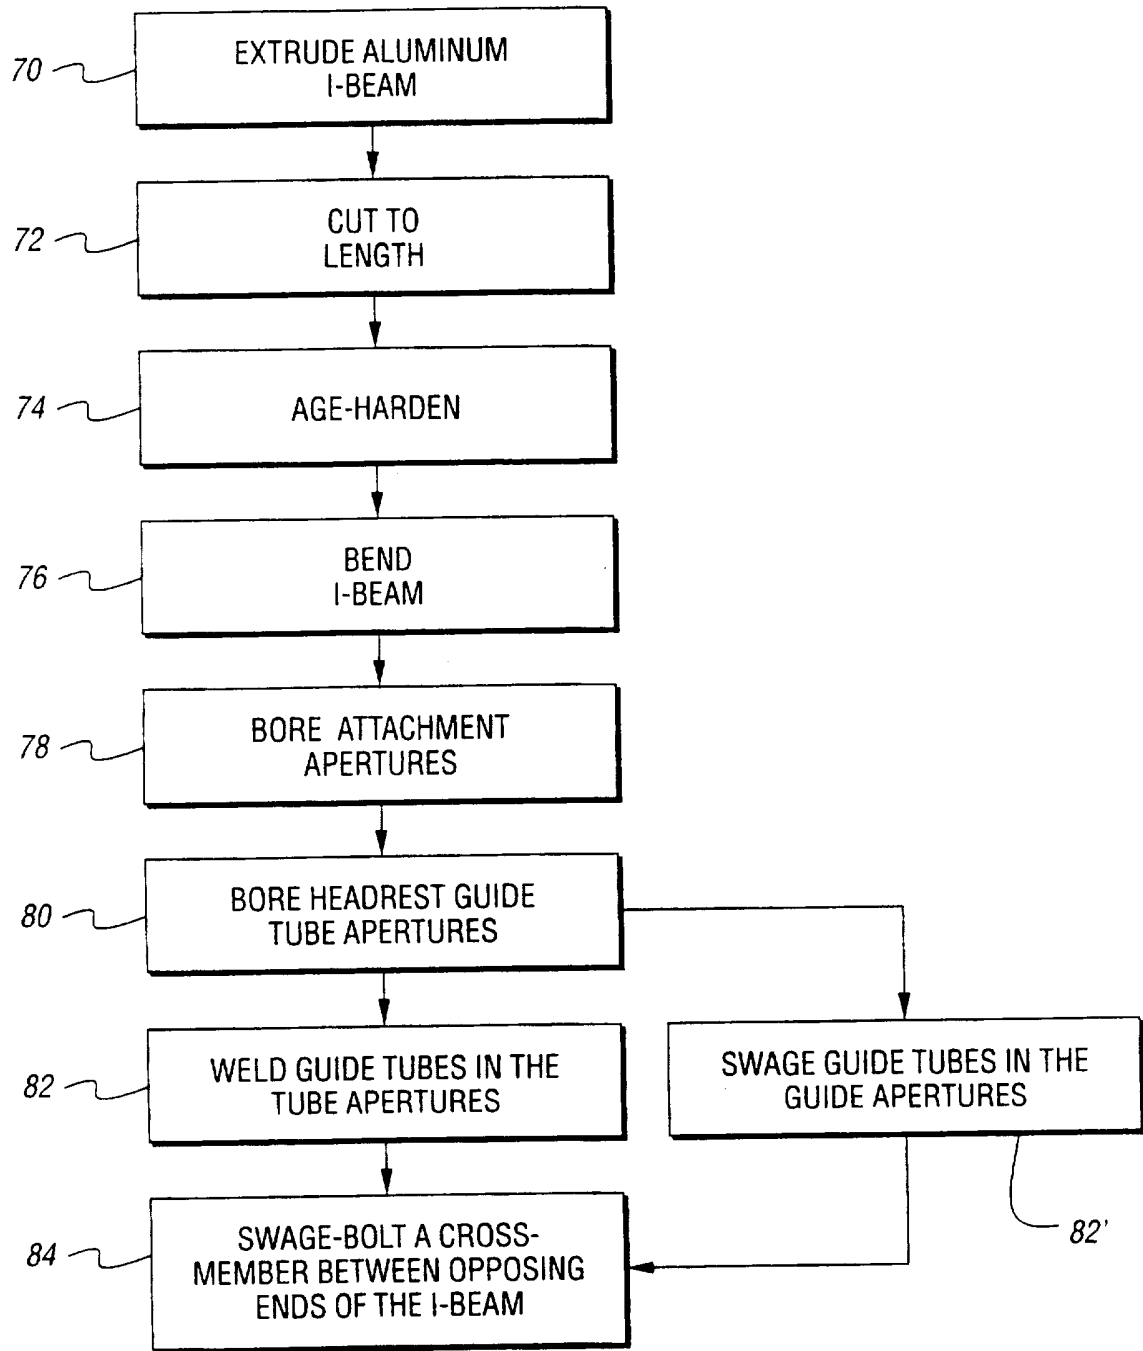


Fig. 6

5/5

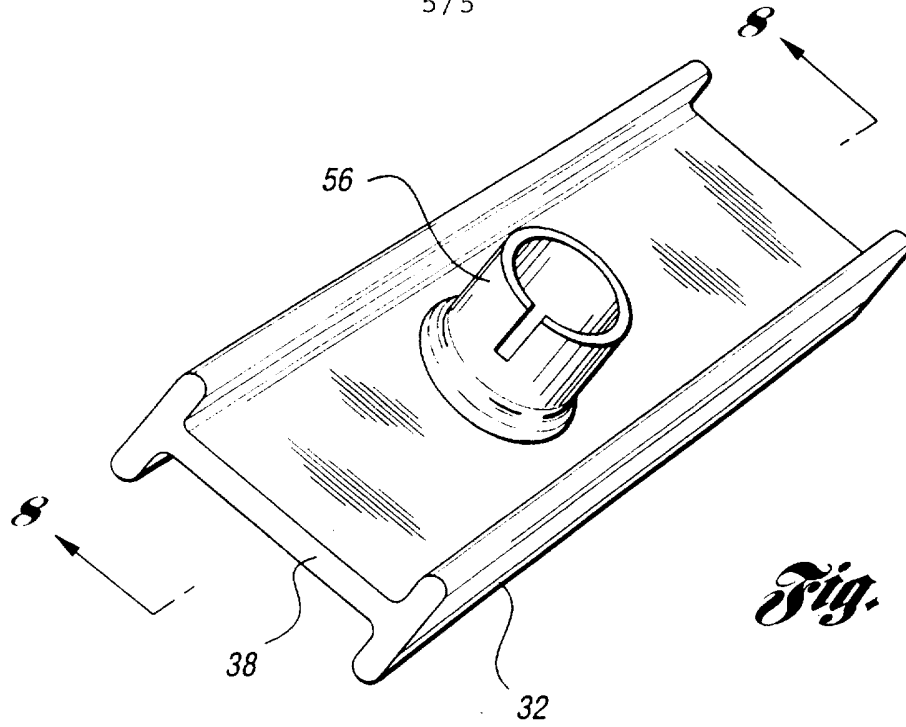


Fig. 7

Fig. 8

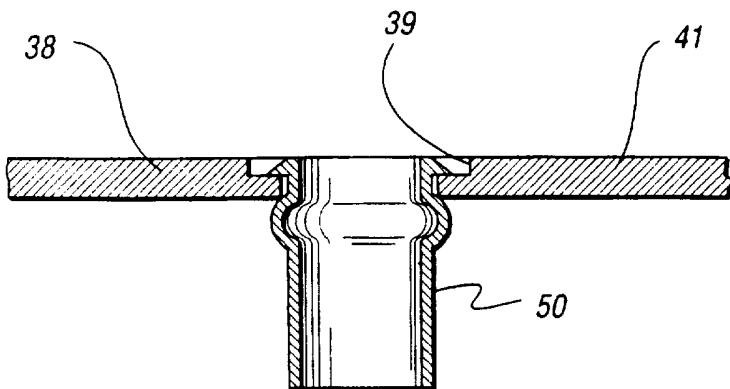
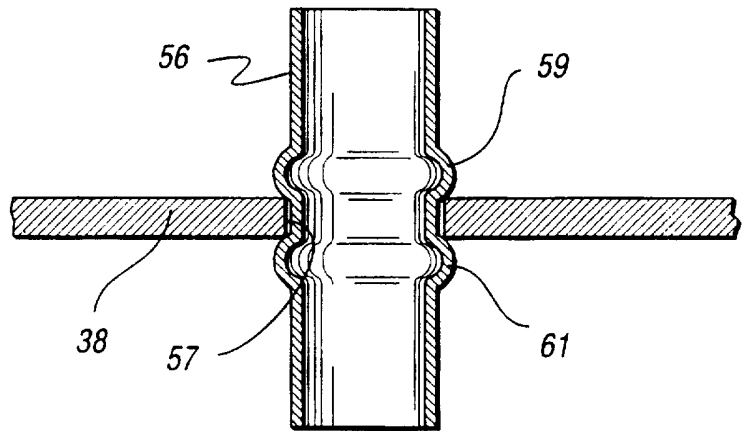



Fig. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/09997

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :B60N 2/20 US CL :297/391, 452.18; 29/417 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 297/215.12, 215.13, 391, 452.18, 452.20; 29/417, 523, 897; 72/411; 403/242 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) APS		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 5,401,072 A (FARRAND) 28 MARCH 1995 (28/03/95), COL. 1, LINES 41-45	1,2,5,8 ----- 3,4,6,7, 9-12
Y	US 4,844,545 A (ISHII) 04 JULY 1989 (14/07/89), SEE FIG. 1	3,4,9,13
Y	EP 233,822 A2 (CHARPENTIER ET AL) 26 AUGUST 1987 (26/08/87), SEE FIGURE 1	6,7,10,12
Y	US 3,345,730 A (LAVERTY) 10 OCTOBER 1967 (10/10/67), FIG. 2	7,10-13
A	US 4,923,250 A (HATTORI) 08 MAY 1990 (08/05/90), SEE FIG. 4	3,4,9,11,13
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents:		*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance		*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date		*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		*A* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means		
P document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 17 SEPTEMBER 1997	Date of mailing of the international search report 12 NOV 1997	
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer  PETER BROWN Telephone No. (703) 308-2168	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/09997

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	US 5,636,901 A (GRILLIOT ET AL) 10 June 1997 (10/06/97), see fig. 1	1