

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
7 August 2008 (07.08.2008)

PCT

(10) International Publication Number
WO 2008/094630 A2

(51) International Patent Classification: Not classified

(21) International Application Number: PCT/US2008/001267

(22) International Filing Date: 31 January 2008 (31.01.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/887,440 31 January 2007 (31.01.2007) US

(71) Applicant (for all designated States except US): INTER-DIGITAL TECHNOLOGY CORPORATION [US/US]; 3411 Silverside Road, Concord Plaza, Suite 105, Hagley Building, Wilmington, DE 19810 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WANG, Peter, S. [US/US]; 412 Pond Path, E. Setauket, NY 11733 (US). TERRY, Stephen, E. [US/US]; 15 Summit Avenue, Northport, NY 11768 (US). WANG, Jin [CN/US]; 34 Fairlawn Drive, Central Islip, NY 11722 (US).


(74) Agent: BALLARINI, Robert, J.; Volpe And Koenig, P.C., United Plaza, Suite 1600, 30 S. 17th Street, Philadelphia, PA 19103 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR PAGING GROUP HANDLING

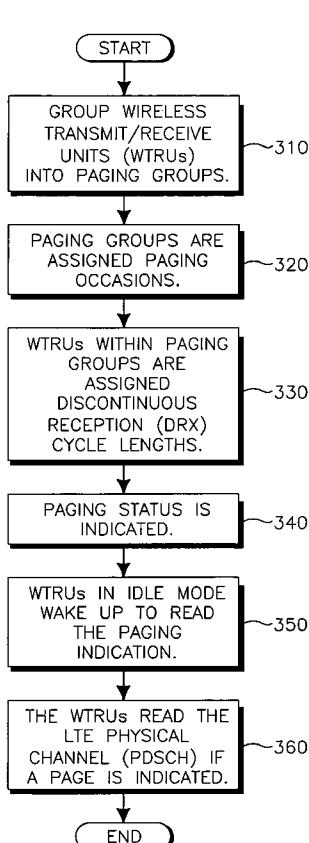

(57) Abstract: A method and apparatus for paging group handling includes grouping wireless transmit/receive units (WTRUs) into a paging group. The paging group is assigned a paging occasion, and an existence of a page is indicated to the WTRUs.

WO 2008/094630 A2

FIG.3



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *without international search report and to be republished upon receipt of that report*

[0001] **METHOD AND APPARATUS FOR PAGING GROUP HANDLING**

[0002] **FIELD OF INVENTION**

[0003] This application is related to wireless communications.

[0004] **BACKGROUND**

[0005] One of the efforts for the third generation partnership project (3GPP) long term evolution (LTE) program is to bring new technology, new architecture and new methods into the new LTE settings and configurations. The LTE program is undertaken in order to provide improved spectral efficiency, reduced latency, and better utilization of radio resources, thereby providing faster user experiences and richer applications and services with less associated cost.

[0006] With regard to mobile terminal idle mode paging reception, the LTE system may use the downlink layer 1 (L1) and layer 2 (L2) control signaling channel to signal paging indicators to groups of wireless transmit/receive units (WTRUs) with the same paging group identity. However, this may not be practical in the implementation of certain aspects of paging group handling with respect to idle mode paging fundamentals, (e.g., total system paging capacity, system paging load distribution, and flexibility in assigning WTRUs different discontinuous reception (DRX) cycle lengths within a single paging group of WTRUs).

[0007] It would therefore be beneficial to provide a method and apparatus for handling paging groups.

[0008] **SUMMARY**

[0009] A method and apparatus for paging group handling is disclosed. The method includes grouping wireless transmit/receive units (WTRUs) into a

paging group. The paging group is assigned a paging occasion, and an existence of a page is indicated to the WTRUs.

[0010] **BRIEF DESCRIPTION OF THE DRAWINGS**

[0011] A more detailed understanding may be had from the following description, given by way of example in conjunction with the accompanying drawings wherein:

[0012] Figure 1 shows an example wireless communication system including a plurality of WTRUs and a base station;

[0013] Figure 2 is a functional block diagram of a WTRU and the base station of Figure 1;

[0014] Figure 3 is a flow diagram of a method of paging group handling;

[0015] Figure 4 shows an example base paging occasion;

[0016] Figure 5 shows an example bitmap representation of paging groups; and

[0017] Figure 6 is a diagram of an example LTE paging message.

[0018] **DETAILED DESCRIPTION**

[0019] When referred to hereafter, the terminology "wireless transmit/receive unit (WTRU)" includes but is not limited to a user equipment (UE), a mobile station, a fixed or mobile subscriber unit, a pager, a cellular telephone, a personal digital assistant (PDA), a computer, or any other type of user device capable of operating in a wireless environment. When referred to hereafter, the terminology "base station" includes but is not limited to a Node-B, a site controller, an access point (AP), or any other type of interfacing device capable of operating in a wireless environment.

[0020] Figure 1 shows a wireless communication system 100 including a plurality of WTRUs 110 and a base station 120. As shown in Figure 1, the WTRUs 110 are separated, for purposes of example, into three paging groups designated "A" which includes WTRUs 110₁, "B" which includes WTRUs 110₂, and "C" which includes WTRUs 110₃. The WTRUs 110 are in communication

with the base station 120. It should be noted that, although an example configuration of WTRUs 110 and base station 120 is depicted in Figure 1, any combination of wireless and wired devices may be included in the wireless communication system 100.

[0021] Figure 2 is a functional block diagram 200 of a WTRU 110 and the base station 120 of the wireless communication system 100 of Figure 1. As shown in Figure 2, the WTRU 110 is in communication with the base station 120 and both are configured to perform a method of paging group handling.

[0022] In addition to the components that may be found in a typical WTRU, the WTRU 110 includes a processor 115, a receiver 116, a transmitter 117, and an antenna 118. The processor 115 is configured to perform a paging group handling procedure. The receiver 116 and the transmitter 117 are in communication with the processor 115. The antenna 118 is in communication with both the receiver 116 and the transmitter 117 to facilitate the transmission and reception of wireless data.

[0023] In addition to the components that may be found in a typical base station, the base station 120 includes a processor 125, a receiver 126, a transmitter 127, and an antenna 128. The processor 125 is configured to perform a paging group handling procedure. The receiver 126 and the transmitter 127 are in communication with the processor 125. The antenna 128 is in communication with both the receiver 126 and the transmitter 127 to facilitate the transmission and reception of wireless data.

[0024] The arrival of an incoming page at a WTRU 110 is a random event. This should be considered in light of the requirements to maintain the WTRU 110 in idle mode as long as practicable for power savings. The WTRU 110 should "wake up" regularly to check the arrival of a page. It may be desirable, therefore, to address a suitable amount of paging groups of WTRUs 110, while allowing different WTRUs 110 within a paging group to have different DRX cycle lengths.

In one example, a minimum paging occasion time unit is an LTE frame.

[0025] Accordingly, Figure 3 is a flow diagram of a method 300 of paging group handling. In step 310, WTRUs 110 are grouped into paging groups. For

example, referring back to Figure 1, WTRUs 110₁ are placed in paging group A, WTRUs 110₂ are placed in paging group B, and WTRUs 110₃ are placed in paging group C.

[0026] In an LTE network, a paging group having a paging group identity (PG-ID) may be defined in a number of ways. For example, WTRUs can be grouped numerically by the WTRU entity, such as the international mobile subscriber identity (IMSI), or the temporary mobile subscriber identity (TMSI). Due to the temporary nature of the TMSI, however, the IMSI may be a more stable identity to be used in LTE for paging handling in idle mode. Alternatively, the paging group can be grouped logically by the network operators for the purpose of service classification or distinction, network service treatment differential and paying customer prioritization.

[0027] Where the grouping is numerical, the following example methods may be utilized: $PG-ID = (IMSI \bmod DRX\text{-cycle\text{-}len}(gth))$, or $PG-ID = (IMSI \div DRX\text{-cycle\text{-}len}) + (IMSI \bmod DRX\text{-cycle\text{-}len})$. The resulting paging group, PG-ID, becomes the basic-paging-occasion-offset frame number when all the paging occasions for a particular WTRU are determined and a group of WTRUs with a similar numerical property of their IMSIs (or TMSI) with respect to the shortest DRX cycle length is defined by the LTE system. A WTRU 110 can derive its own PG-ID by the IMSI it is assigned to with one of the above equations. For example, For example if the a WTRU 110 is assigned an IMSI of 18922, and the DRX-cycle-len from the network, (e.g., published in a system information broadcast), is 32, then the PG-ID for that WTRU would be ten "10" in accordance with the first equation, (i.e., $18922 \bmod 32 = 10$).

[0028] Where the grouping is logical, network operators may want to group the WTRUs 110 into sets of WTRUs based upon certain priorities or those that require differential treatment. In this case, WTRUs 110 are assigned to different logical paging groups by the service/network provider within a particular service category, within a network origin, or using other properties. Example groupings may depend on the WTRU IMSI's mobile network code (MNC), mobile country code (MCC), or on certain attributes of the WTRU's IMSI's mobile station

identification number (MSIN). The network operators may use some of the following possible combinations to define the paging occasion group identity:

PG-ID = eUTRAN-Prefix || MNC || eUTRAN-suffix;

PG-ID = eUTRAN-Prefix || MCC || eUTRAN-suffix; or

PG-ID = eUTRAN-Prefix || (MSIN logical-partition) || eUTRAN-suffix,

where the eUTRAN-Prefix and eUTRAN-suffix can be any value, except one that is used for another PG-ID in subsequent operations. Alternatively, a PG-ID with other desired properties may be assigned.

[0029] Since idle mode WTRUs wake up periodically to check if the E-UTRAN network has sent, or is sending a particular paging indication to it and to its group of WTRUs, paging occasions are assigned to the paging groups (step 320). A paging occasion, which may occur at the beginning of an LTE frame, defines a particular time that a WTRU should wake up to check if it is being paged. The LTE system distributes these paging occasions in the time domain so that the paging load at any time is equalized, and the paged WTRU receives the paging with minimum delay with respect to its sleep/wake-up cycle, (i.e., DRX cycle).

[0030] In step 330, WTRUs within a paging group may be assigned different DRX cycle lengths. Accordingly, for a particular paging group, with respect to the PG-ID, the system will have to determine a base-paging-occasion-offset that would be equivalent to a frame number. The subsequent and continuous paging occasions are built on top of the base-paging-occasion-offset. This base-paging-occasion-offset may be referred to as the PO-GP.

[0031] In the total paging occasion distribution for different WTRUs having different DRX cycle lengths, the PO-GP indicates, at the beginning of the system frame, a number scale that is used as the offset frame number. This may be the shortest DRX cycle length by the LTE system due to the variable DRX cycle length assignment that a WTRU may have, regardless of the paging group in which it belongs. A particular WTRU 110 may have the shortest or longest DRX cycle. Figure 4 shows an example base paging occasion 400. Figure 4 shows a group of WTRUs 110 within the PG-ID "A" that also include the PO-GP of "1".

These WTRUs have different DRX-Cycle-lengths which are shown as 8 or 16. Accordingly, the WTRUs may expect their respective paging occasions in the time scale of system frame numbers (SFNs). For example, a WTRU with DRX-cycle-len = 8 would expect its paging at SFN 1, 9, 17, 25, 33, and the like, while a WTRU with DRX-cycle-len=16 may expect its paging at 1, 17, 33, and the like. A choice between DRX-cycle-lengths may include considerations of performance versus power savings. For example, the WTRU with a DRX cycle length of 8 may consume more power, but it may have more chances to receive paging, resulting in faster incoming call reception, and the like.

[0032] Similarly to the PG-ID, the PO-PG may be determined numerically or logically. For example, the PO-PG may be determined numerically in accordance with the equation: $PO-GP = PG-ID \bmod DRX-Cycle-Len$, where the DRX-cycle-len is the minimum DRX cycle length defined by the system.

[0033] The PG-OP can also be organized logically, especially for those paging groups formed logically. In this case, the PG-ID is converted to PO-GP via a mapping table if there is no short formula to numerically translate from PG-ID to PO-GP where, for instance, the PG-IDs are not consecutively sequenced. The mapping table may also be used to achieve the intended PO-GP distribution, or to retain the flexibility of assignment, so that, for example, reassignment can be arranged easily. Table 1 below shows an example mapping table of a PG-ID to a PO-GP.

Table 1

PG-ID (Allocated WTRU Group-Id)	PO-GP (Base Paging Occasion offset Group)
PG-ID A	0
PG-ID B	1
PG-ID C	2
PG-ID D	2
PG-ID E	3
⋮	⋮
PG-ID $N_{max-PG-ID}$	φ

[0034] It should be noted that $N_{\max\text{-PG-ID}}$ is the maximum number of paging groups the LTE system will be able to accommodate. The φ is an absolute value smaller or equal to the shortest DRX-cycle-len minus one ($\varphi < \text{shortest-DRX-cycle-len} - 1$). Multiple paging groups can be assigned to the same PO-GP.

[0035] From a system perspective, the PO-GP needs to be distributed to all the frame occasions covered in the shortest DRX cycle, so as to even the paging load as well as to maintain the paging performance. Additionally, more than one paging group can be assigned to the same PO-GP so that DRX cycle length flexibility can be maintained and system paging capability may be maximized.

[0036] In an LTE WTRU and system, the overall continuous paging occasions, (i.e., paging occasion frame numbers "PO-FN") with any DRX cycle lengths are calculated by $\text{PO-FN} = \text{PO-GP} + n * \text{DRX-cycle-len}$, where $n = 0, 1, 2, \dots$, such that the resulting PO-FN does not exceed the maximum system frame number limit and the DRX-cycle-len is assigned per WTRU. In this manner, the paging status for any particular WTRU 110 is indicated (step 340).

[0037] At each paging occasion, PO-FN, a WTRU 110 in idle mode DRX cycle, as well as WTRUs 110 in its paging occasion group or other groups with the same PO-GP, wake up to read the paging indication (step 350) based on the PO-GP it is in and DRX cycle length it is assigned to. Since more than one group of WTRUs 110 may be in the process of checking the paging indicator to find the paging status toward its group at the same time, the system may need to accommodate more paging groups in the limited space of the paging indicator, and, at the same time, efficiently organize the space for multiple paging group status indication.

[0038] One way to accommodate the requirements is to use a bitmap method for indicating the paging status of the paging-groups belonging to a paging-occasion (PO-GP). A bit in the map, or paging status bit, would indicate whether a particular paging group is either being paged, (e.g., bit value "1") or not paged, (e.g., bit value "0"). Figure 5 shows an example bitmap representation of paging groups 500. As shown in Figure 5, paging group ID "A" includes a PO-GP of 1, paging group ID "B" includes a PO-GP of 4, and paging group ID "C"

includes a PO-GP of 1. Each WTRU within a paging group reads the paging status bit in the bitmap during the group's paging occasion and in accordance with the WTRU's DRX-cycle-len, as indicated by the arrows shown in Figure 5, in order to determine whether or not a page exists for the WTRU.

[0039] The bitmap construction essentially is a line of up of N bits with bit-0 representing the paging group with the smallest PG-ID, bit-1 representing the group with the next value of PG-ID, and so on. Table 2, below shows an example bitmap for one PO-GP.

Table 2

Bit-0	Bit-1	Bit-2	;;;	Bit-n
PG-ID-a1	PG-ID-a2	PD-ID-a3	;;;	PG-ID-an

where G-ID-a1 < PG-ID-a2 < PD-ID-a3 < ... < PG-ID-an.

[0040] There will be N, (i.e., N = shortest DRX cycle length – 1), bitmaps in the system, with one for each PO-GP position. The E-UTRAN system broadcasts this PG-ID/PO-GP mapping in the system information broadcast. Table 3, below, shows a PG-ID mapping bitmap per paging occasion.

Table 3

	PO-GP 0	PO-GP 1	PO-GP 2	;;;	PO-GP N
Bit-0	PG-ID a	PG-ID x1	PG-ID y1		PG-ID z1
Bit-1	PG-ID b	PG-ID x2	PG-ID y2		PG-ID z2
;;;					;;;
Bit-K	PG-ID S	PG-ID xn	PG-ID yn		;;;

[0041] However, if the E-UTRAN system has adopted the approach described in Table 1, above, and published Table 1, then the WTRU 110 may calculate the bit position of its paging group based on the rule specified in Table 2 above.

[0042] As described previously, a WTRU 110 in idle mode wakes up at the paging occasions indicated by the PO-FN and checks on the paging indicator. Based on its assigned PG-ID and the bit position in the bitmap, the WTRU 110 checks whether its paging group, or groups, has an active page, which may include whether the bit position J in the paging-group-bitmap is set or not.

[0043] If the bit position is set, (i.e., a page is indicated), the WTRU 110 reads the LTE physical channel (PDSCH) (step 360), described by the radio bearer (RB)-allocation portion of the paging indicator, where a higher layer paging message will list the exact IMSI/TMSI of each of the WTRUs 110 being paged. If the WTRU 110 finds an exact match of its IMSI/TMSI, it indicates that a page exists for the WTRU 110.

[0044] Additionally, the bitmap is defined by the E-UTRAN and is broadcast for each of the PO-GPs in the system information when the PO-GP is given such information with respect to PG-IDs. Only one bitmap for each PO-GP needs to be broadcast. Accordingly, while the WTRUs in any particular group may have varying DRX-cycles, they are able to use the same bitmap for all PG-FNs.

[0045] In one example, an LTE Paging message may be used when a WTRU gets signaled for a definite page, and where the exact WTRU is directly addressed to reinstate the paging. Figure 6 is an example diagram of an example LTE paging message 600.

[0046] As shown in Figure 6, a WTRU at frame 9 receives a paging indicator (hatched), which contains a “Paging Status Bitmap” and an “RB (LTE resource block) allocation information” for the WTRU to receive the real paging message, (e.g., the LTE paging message), from another channel that carries the real paging message. This gives the timing and physical channel information. If

the bitmap status bit for its paging-group is not set, then the WTRU may not read the real paging message in order to conserve power.

[0047] The LTE paging message 600 contains the paging records, (i.e., the real WTRU IMSIs), for each really paged WTRUs. A WTRU checks the bitmap to see its PG-ID bit is set and uses the RB allocation information to read the LTE paging message 600. A WTRU ascertains that it is paged when it has confirmed that its IMSI is in the paging records.

[0048] The number of IMSIs capable of being addressed in an LTE paging message represents the LTE paging capacity at its maximum, and should be designed to take peak paging load into consideration. If the defined IMSI carrying capability is not big enough, then certain WTRUs 110 may be left out of the paging confirmation and may not receive incoming calls in time.

[0049] In addition, the LTE paging message paging record should contain as many paged WTRU IMSIs as possible. If allocated RB space is limited, extensions can be made to include all the paging records/IMSIMs. The extension could be made in the paging indicator RB-allocation part, where a pointer can indicate another, or auxiliary RB-allocation for the LTE paging message extension. Alternatively, the extended space may be resolved in the PCH domain, where extra space can be temporarily provided for the LTE Paging message extension.

[0050] Also, to accommodate the many IMSIs in the message as possible, signaling compression can be applied. The duplicated MCCs and MNCs do not need to be included in the message, resulting in direct list of MSINs of IMSIs in most instances, thus saving message space. The formatting of the IMSI may start with the MCC, and then move to the MNC, and lastly the MSIN. The MCC is the leading index, then the MNC. If the next MCC or MNC is not different than the previous one, then they do not need to be included. A WTRU search for an IMSI match can also take advantage of this formatting rule, skipping unmatched MCCs and MNCs by directly going to the matching MCC and MNC to increase matching process efficiency.

[0051] Although features and elements are described above in particular combinations, each feature or element can be used alone without the other features and elements or in various combinations with or without other features and elements. The methods or flow charts provided herein may be implemented in a computer program, software, or firmware incorporated in a computer-readable storage medium for execution by a general purpose computer or a processor. Examples of computer-readable storage mediums include a read only memory (ROM), a random access memory (RAM), a register, cache memory, semiconductor memory devices, magnetic media such as internal hard disks and removable disks, magneto-optical media, and optical media such as CD-ROM disks, and digital versatile disks (DVDs).

[0052] Suitable processors include, by way of example, a general purpose processor, a special purpose processor, a conventional processor, a digital signal processor (DSP), a plurality of microprocessors, one or more microprocessors in association with a DSP core, a controller, a microcontroller, Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs) circuits, any other type of integrated circuit (IC), and/or a state machine.

[0053] A processor in association with software may be used to implement a radio frequency transceiver for use in a wireless transmit receive unit (WTRU), user equipment (UE), terminal, base station, radio network controller (RNC), or any host computer. The WTRU may be used in conjunction with modules, implemented in hardware and/or software, such as a camera, a video camera module, a videophone, a speakerphone, a vibration device, a speaker, a microphone, a television transceiver, a hands free headset, a keyboard, a Bluetooth® module, a frequency modulated (FM) radio unit, a liquid crystal display (LCD) display unit, an organic light-emitting diode (OLED) display unit, a digital music player, a media player, a video game player module, an Internet browser, and/or any wireless local area network (WLAN) or Ultra Wide Band (UWB) module.

[0054] Embodiments:

1. A method for paging group handling.

2. The method of embodiment 1, further comprising grouping wireless transmit/receive units (WTRUs) into at least one paging group.
3. A method as in any preceding embodiment, further comprising assigning paging occasions to the at least one paging group.
4. A method as in any preceding embodiment, further comprising indicating an existence of a page to the WTRUs.
5. A method as in any preceding embodiment, further comprising assigning discontinuous reception (DRX) cycle lengths to WTRUs within the at least one paging group.
6. A method as in any preceding embodiment wherein the DRX cycle lengths of WTRUs are not identical.
7. A method as in any preceding embodiment wherein the at least one paging group is determined numerically.
8. A method as in any preceding embodiment wherein the at least one paging group is determined based upon an identity of a WTRU.
9. A method as in any preceding embodiment wherein the at least one paging group is determined based upon the international mobile subscriber identity (IMSI) of the WTRU.
10. A method as in any preceding embodiment wherein the at least one paging group is determined logically.
11. A method as in any preceding embodiment wherein a paging group is based upon a service category of the WTRU.
12. A method as in any preceding embodiment wherein a paging group is based upon a network origin of the WTRU.
13. A method as in any preceding embodiment, further comprising distributing the paging occasions to the WTRUs in the time domain.
14. A method as in any preceding embodiment, further comprising determining a base paging occasion offset.
15. A method as in any preceding embodiment wherein the base paging occasion offset is determined numerically.

16. A method as in any preceding embodiment wherein the base paging occasion offset is determined logically.

17. A method as in any preceding embodiment, further comprising mapping a paging group to a base paging offset location.

18. A method as in any preceding embodiment wherein the existence of a page is indicated by a value of a bit in a bitmap in a long term evolution (LTE) indicator.

19. A method as in any preceding embodiment wherein the existence of a page is indicated by a long term evolution (LTE) paging message.

20. A method as in any preceding embodiment wherein the LTE paging message includes an international mobile subscriber identity (IMSI) of a WTRU for which a page exists.

21. A base station configured to perform a method as in any preceding embodiment.

22. The base station of embodiment 21, further comprising a receiver.

23. A base station as in any of embodiments 21-22, further comprising a transmitter.

24. A base station as in any of embodiments 21-23, further comprising a processor in communication with the receiver and the transmitter.

25. A base station as in any of embodiments 21-24 wherein a processor is configured to group wireless transmit/receive units (WTRUs) into at least one paging group, assign paging occasions to the at least one paging group, and indicate an existence of a page to the WTRUs.

26. A base station as in any of embodiments 21-25 wherein a processor is further configured to assign discontinuous reception (DRX) cycle lengths to WTRUs within the at least one paging group.

27. A base station as in any of embodiments 21-26 wherein a processor is further configured to determine a base paging occasion offset.

28. A base station as in any of embodiments 21-27 wherein a processor is further configured to map a paging group to a base paging offset location.

29. A base station as in any of embodiments 21-28 wherein a processor is further configured to indicate the existence of a page by a value of a bit in a bitmap in a long term evolution (LTE) indicator.

30. A base station as in any of embodiments 21-29 wherein a processor is further configured to indicate the existence of a page by a long term evolution (LTE) paging message.

31. A wireless transmit/receive unit (WTRU) configured to perform a method as in any of embodiments 1-20.

32. The WTRU of embodiment 31, further comprising a receiver.

33. A WTRU as in any of embodiments 31-32, further comprising a transmitter.

34. A WTRU as in any of embodiments 31-33, further comprising a processor in communication with the receiver and the transmitter.

35. A WTRU as in any of embodiments 31-34 wherein a processor is configured to wake up during a paging occasion, determine whether or not a page exists for the WTRU, and read a long term evolution (LTE) physical channel (PDSCH) based upon the determination of whether the page exists.

36. A WTRU as in any of embodiments 31-35 wherein a processor is further configured to receive an LTE paging message and determine whether or not a page exists for the WTRU.

37. A WTRU as in any of embodiments 31-36 wherein a processor is further configured to read a value of a bit in a bitmap in an LTE indicator to determine whether a page exists for the WTRU.

* * *

CLAIMS

What is claimed is:

1. A method for paging group handling, comprising:
grouping wireless transmit/receive units (WTRUs) into at least one paging group;
assigning paging occasions to the at least one paging group; and
indicating an existence of a page to the WTRUs.
2. The method of claim 1, further comprising assigning discontinuous reception (DRX) cycle lengths to WTRUs within the at least one paging group.
3. The method of claim 2 wherein the DRX cycle lengths of WTRUs are not identical.
4. The method of claim 1 wherein the at least one paging group is determined numerically.
5. The method of claim 4 wherein the at least one paging group is determined based upon an identity of a WTRU.
6. The method of claim 5 wherein the at least one paging group is determined based upon the international mobile subscriber identity (IMSI) of the WTRU.
7. The method of claim 1 wherein the at least one paging group is determined logically.
8. The method of claim 7 wherein a paging group is based upon a service category of the WTRU.

9. The method of claim 7 wherein a paging group is based upon a network origin of the WTRU.

10. The method of claim 1, further comprising distributing the paging occasions to the WTRUs in the time domain.

11. The method of claim 10, further comprising determining a base paging occasion offset.

12. The method of claim 11 wherein the base paging occasion offset is determined numerically.

13. The method of claim 11 wherein the base paging occasion offset is determined logically.

14. The method of claim 13, further comprising mapping a paging group to a base paging offset location.

15. The method of claim 1 wherein the existence of a page is indicated by a value of a bit in a bitmap in a long term evolution (LTE) indicator.

16. The method of claim 1 wherein the existence of a page is indicated by a long term evolution (LTE) paging message.

17. The method of claim 16 wherein the LTE paging message includes an international mobile subscriber identity (IMSI) of a WTRU for which a page exists.

18. A base station, comprising:
a receiver;
a transmitter; and

a processor in communication with the receiver and the transmitter, the processor configured to group wireless transmit/receive units (WTRUs) into at least one paging group, assign paging occasions to the at least one paging group, and indicate an existence of a page to the WTRUs.

19. The base station of claim 18 wherein the processor is further configured to assign discontinuous reception (DRX) cycle lengths to WTRUs within the at least one paging group.

20. The base station of claim 18 wherein the processor is further configured to determine a base paging occasion offset.

21. The base station of claim 18 wherein the processor is further configured to a paging group to a base paging offset location.

22. The base station of claim 18 wherein the processor is further configured to indicate the existence of a page by a value of a bit in a bitmap in a long term evolution (LTE) indicator.

23. The base station of claim 18 wherein the processor is further configured to indicate the existence of a page by a long term evolution (LTE) paging message.

24. A wireless transmit/receive unit (WTRU), comprising:
a receiver;
a transmitter; and
a processor in communication with the receiver and the transmitter, the processor configured to wake up during a paging occasion, determine whether or not a page exists for the WTRU, and read a long term evolution (LTE) physical channel (PDSCH) based upon the determination of whether the page exists.

25. The WTRU of claim 24 wherein the processor is further configured to receive an LTE paging message and determine whether or not a page exists for the WTRU.

26. The WTRU of claim 24 wherein the processor is further configured to read a value of a bit in a bitmap in an LTE indicator to determine whether a page exists for the WTRU.

1/6

100

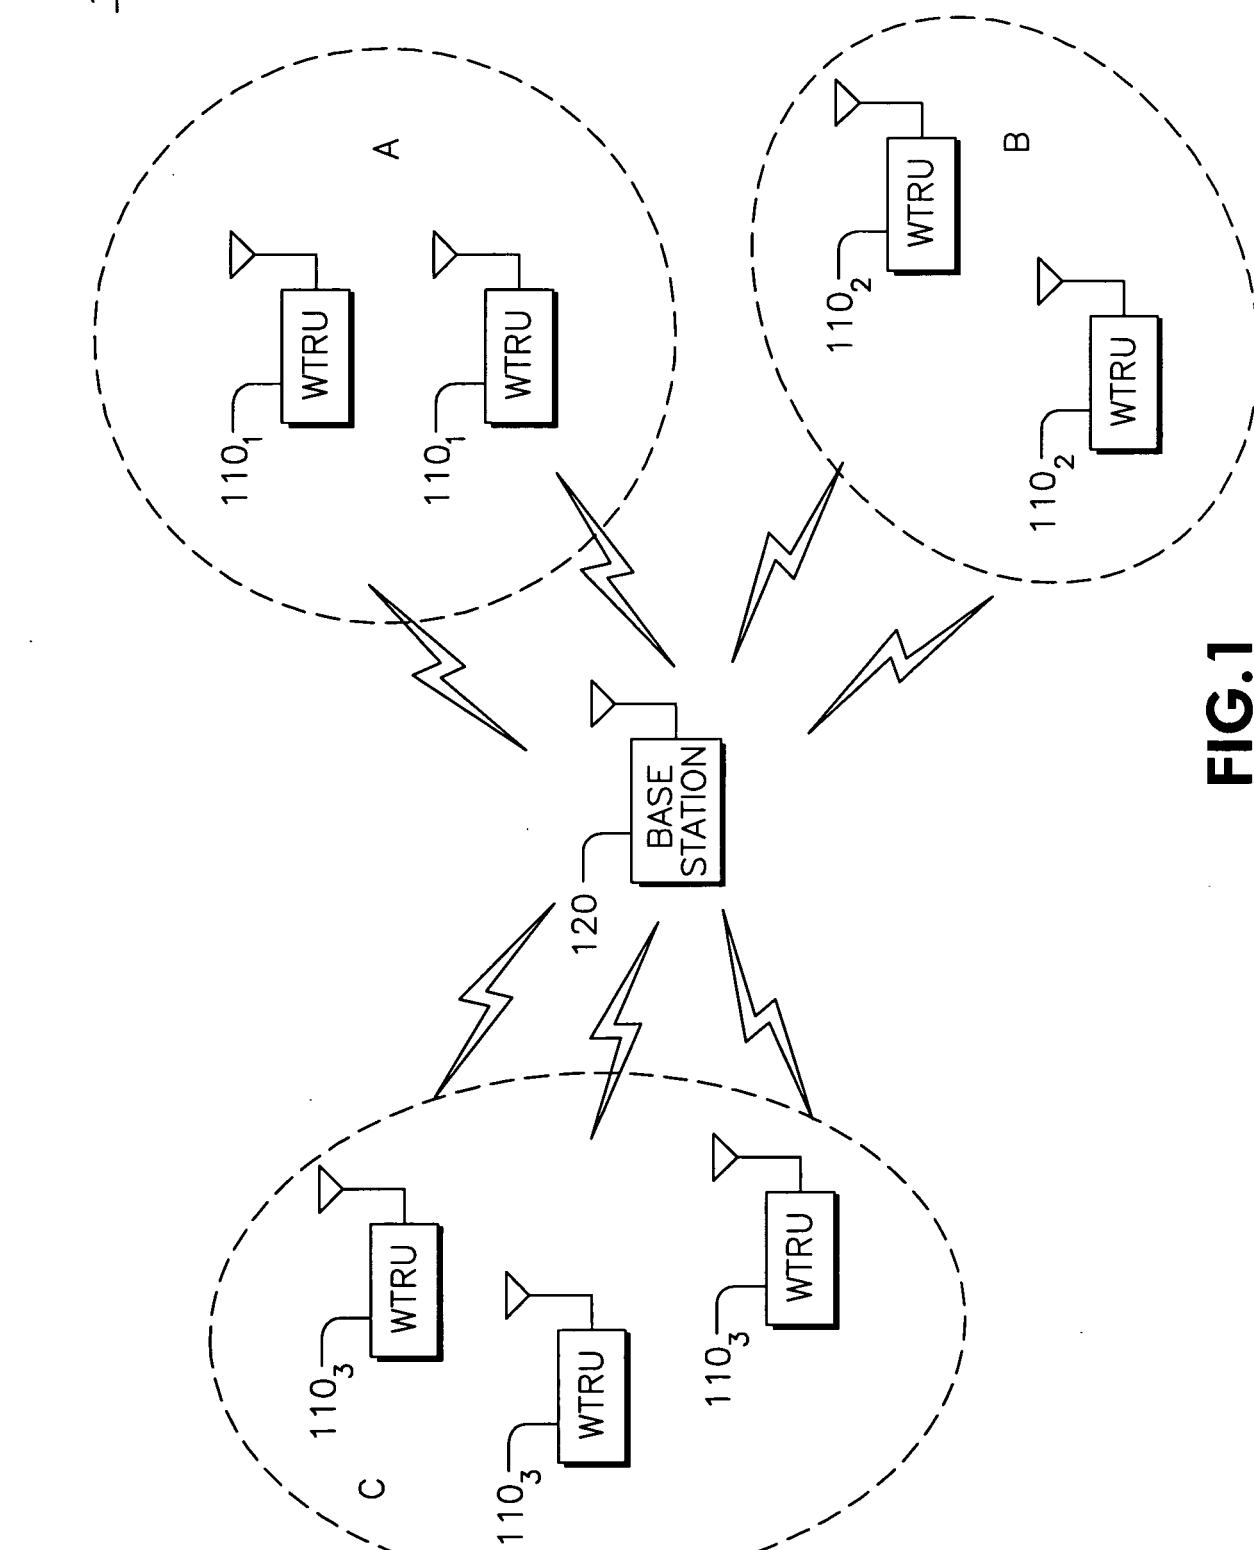


FIG. 1

1

+

200

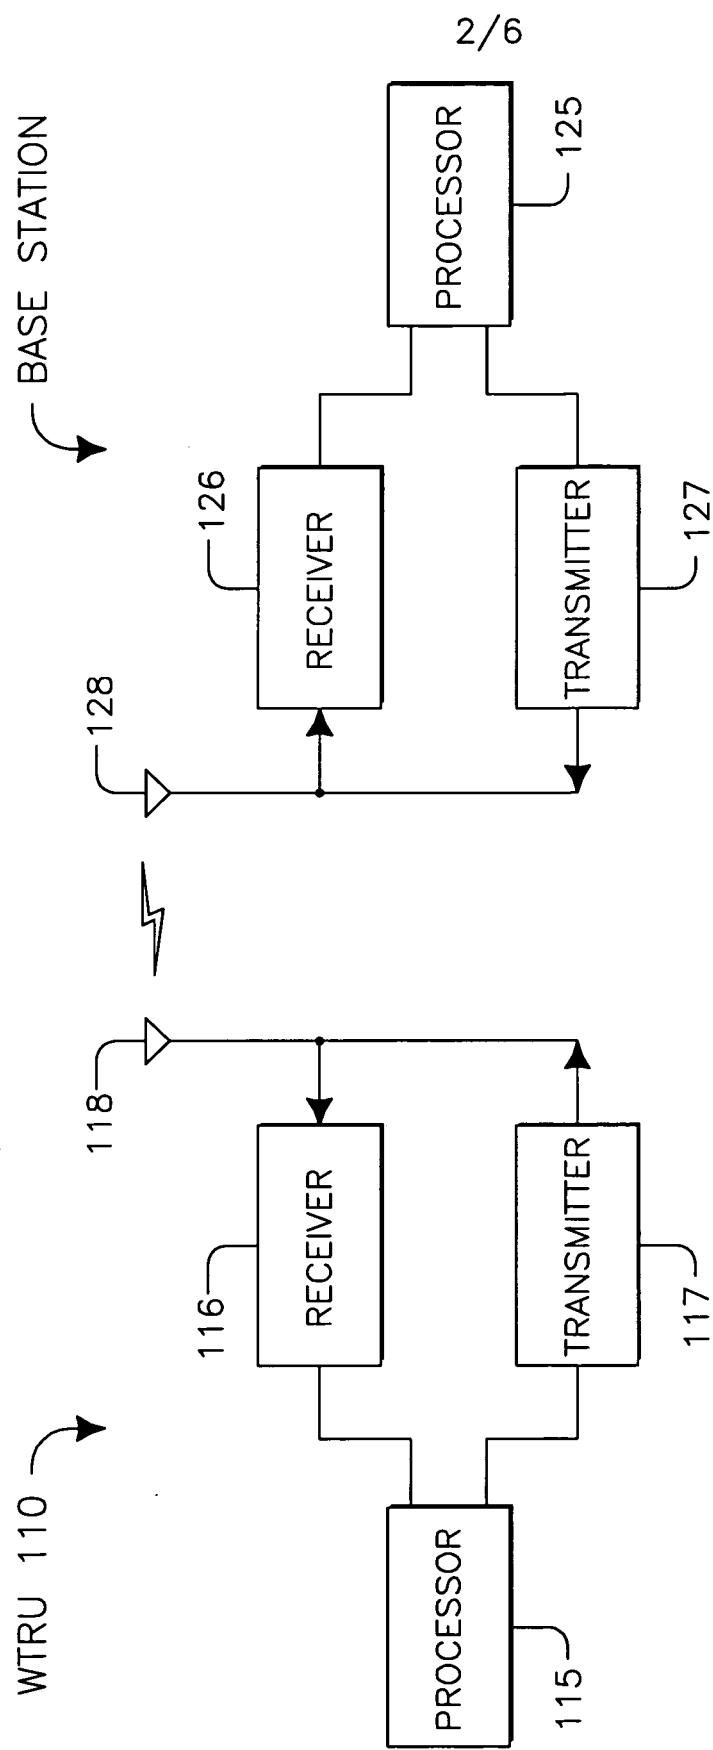
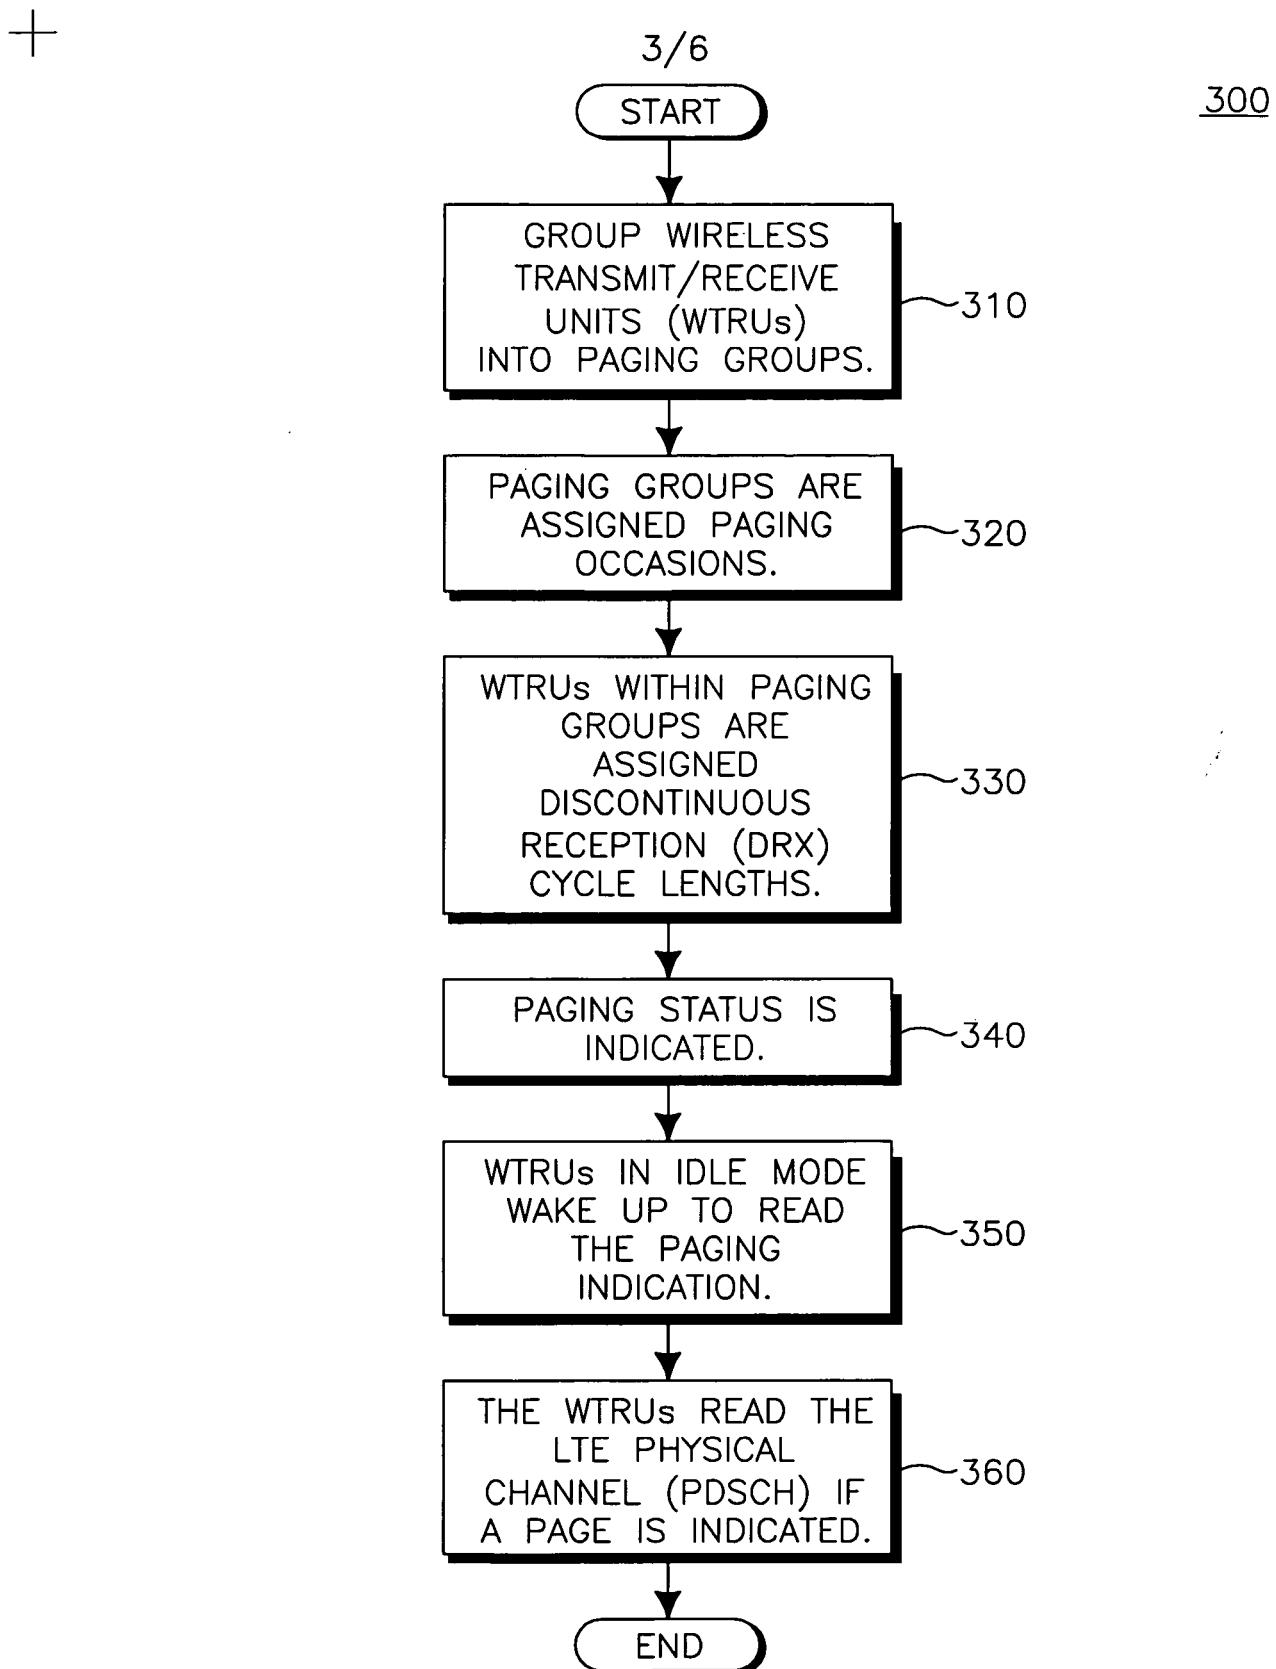


FIG.2

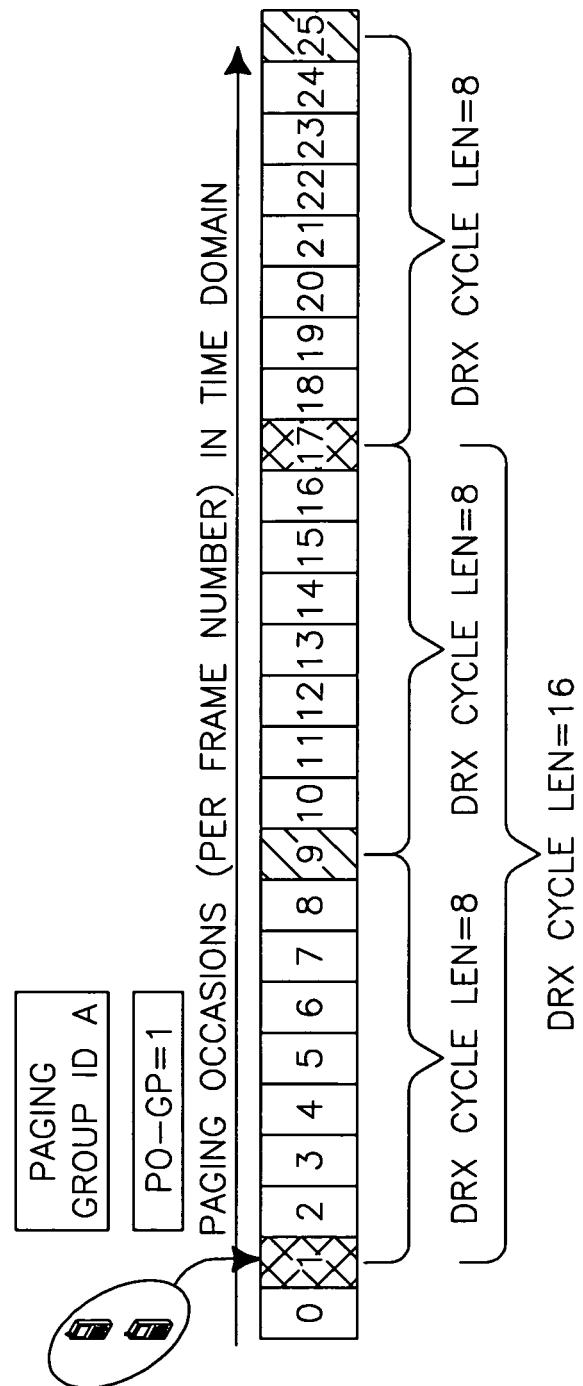
+

**FIG.3**

+

+

4/6


400**FIG.4**

+

+

500

5/6

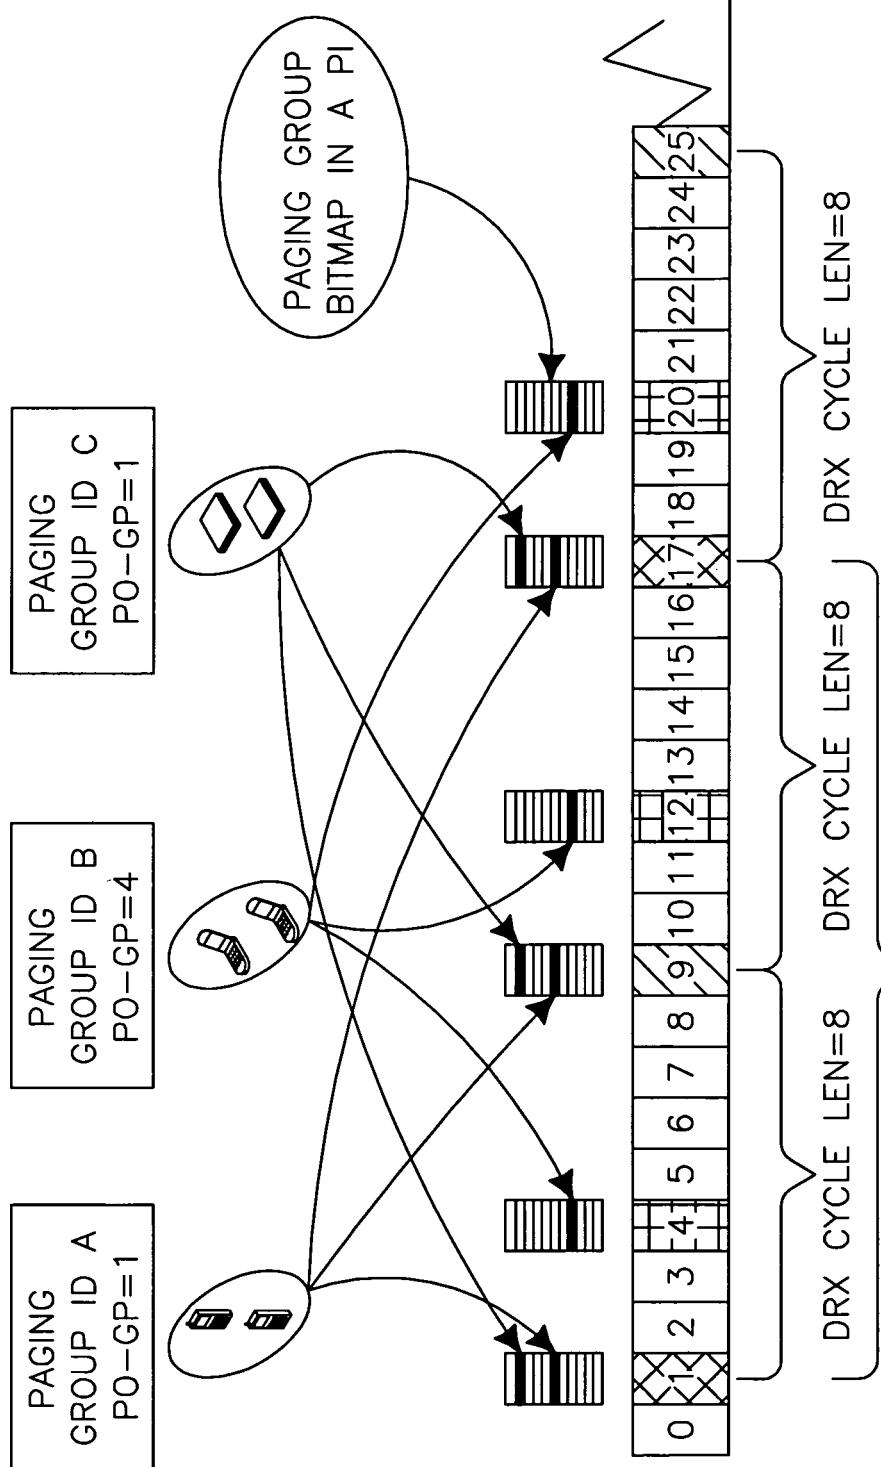
**FIG.5**

+

600

6/6

LTE PAGING MESSAGE IN PAGING MESSAGE TYPE		
PCH CHANNEL		
BCCH CHANGE INDICATION		
PAGING RECORDS (FLEXIBLE) #		
MCC MNC MSIN		
MSIN		
MNC MSIN		
MSIN		
MCC MNC MSIN		
MSIN		
MSIN		
MSIN		
MSIN		
MSIN		
EXT-INDICATOR		



PAGE-ACTIVE INDICATION	PG	PAGING RECORD RB ALLOCATION AND EXTENSION
	BITMAP	

L1/L2 CONTROL SIGNALING CHANNEL	6	7	8	9	10	11	12	13	14	
---------------------------------	---	---	---	---	----	----	----	----	----	--

PAGING OCCASIONS

FIG.6