



(51) International Patent Classification:
G02B 6/12 (2006.01)

(21) International Application Number:
PCT/US2019/039842

(22) International Filing Date:
28 June 2019 (28.06.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/691,143 28 June 2018 (28.06.2018) US
16/454,054 27 June 2019 (27.06.2019) US

(71) Applicant: NEC LABORATORIES AMERICA, INC.
[US/US]; Suite 200, 4 Independence Way, Princeton, New Jersey 08540 (US).

(72) Inventors: HUANG, Yue-Kai; 89 Hoover Avenue, Princeton, New Jersey 08540 (US). IP, Ezra; 6 Canoe Brook Drive, West Windsor, New Jersey 08550 (US). JI, Philip; 61 Cranbury Neck Drive, Cranbury, New Jersey 08512

(US). HUANG, Ming-Fang; 28G Chicopee Drive, Princeton, New Jersey 08540 (US).

(74) Agent: KOLODKA, Joseph; NEC Laboratories America, Inc., 4 Independence Way, Suite 200, Princeton, New Jersey 08540 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: BIDIRECTIONAL OPTICAL FIBER COMMUNICATION AND SENSING WDM ARCHITECTURE USING SAME FIBER TRANSMISSION BAND

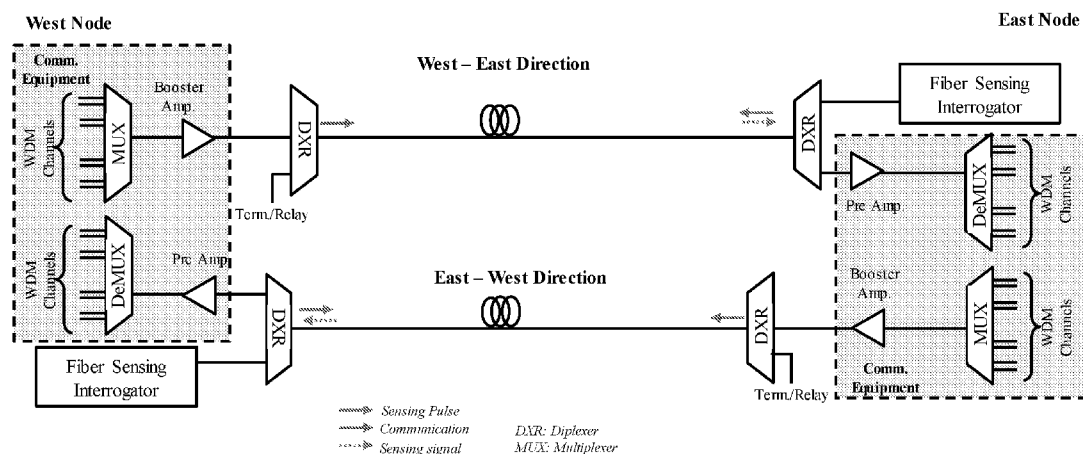


FIG. 1

(57) Abstract: Aspects of the present disclosure describe systems, methods and structures providing bidirectional optical fiber communication and sensing using the same fiber transmission band and bidirectional WDM fiber sharing such that communications channels and optical fiber sensing channel(s) coexist on the same fiber. As a result, nonlinear interaction between communications channels and interrogating pulse(s) of sensing are much reduced or eliminated.

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

BIDIRECTIONAL OPTICAL FIBER COMMUNICATION AND SENSING WDM ARCHITECTURE USING SAME FIBER TRANSMISSION BAND

CROSS REFERENCE TO RELATED APPLCIATIONS

[0001] This application claims the benefit of Untied States Provisional Patent Application Serial No. 62/691,143 filed 28-JUN-2018 the entire contents of which is incorporated by reference as if set forth at length herein.

TECHNICAL FIELD

[0002] This disclosure relates generally to optical systems, methods, and structures. More particularly, it describes bidirectional optical fiber communication and sensing WDM architecture using same fiber transmission band.

BACKGROUND

[0003] As is known in the optical arts, distributed fiber sensing (DFS) systems, methods, and structures – including distributed vibration sensing (DVS), distributed acoustic sensing (DTS), and Brillouin optical time domain reflectometry (BOTDR), changes in optical fiber may be detected and located by using optical pulse interrogation methods. In such operations, a single optical fiber is dedicated for use by a single sensing system, or switched between systems at different times if continuous, real-time updates are not required.

[0004] Presently, there is growing demand for in-service, commercial optical communications systems to perform optical fiber sensing. However, as communications channels require continuous operation – it remains quite difficult to integrate communications system(s) and sensing system(s) on a common (the same) optical fiber. One reason for such difficulty is that the instantaneous operating power of optical pulse reflectometry in fiber sensing systems is necessarily much higher as compared to communications channels, thus degrading communication performance as a result of any fiber nonlinearity. As a result, the art has employed separate optical fibers – which may be included in a common fiber bundle – for optical communications and optical sensing thereby avoiding interference problems altogether.

[0005] Accordingly, a continuing need exists in the art for systems, methods, and structures that provide simultaneous optical communications and optical sensing on a common optical fiber.

SUMMARY

[0006] The above problem is solved and an advance in the art is made according to aspects of the present disclosure directed to a bidirectional optical fiber communication and sensing WDM architecture using the same fiber transmission band. In sharp contrast to the prior art – systems, methods, and structures according to aspects of the present disclosure employ bidirectional WDM fiber sharing such that communications channels and optical fiber sensing channel(s) may coexist on the same fiber. Due to the bidirectional propagation taught and described by the present disclosure, nonlinear interaction between communications channels and interrogating pulse(s) of sensing are much reduced or eliminated.

[0007] Of particular advantage - systems, methods, and structures according to the present disclosure may advantageously combine two systems in the same fiber using standard WDM multiplexers and de-multiplexers. In such configurations according to the present disclosure, return sensing signal(s) for the distributed fiber sensing (DFS) system will propagate through the optical fiber in the same direction as the communication channels. In such configuration – the DFS signals may be affected by any asynchronous spontaneous emission (ASE) noise from in-line erbium-doped fiber amplifiers (EDFAs) used for communications. Accordingly, this disclosure provides structures and techniques to suppress in-band ASE noise(s) – advantageously, and surprisingly - using standard WDM optics.

[0008] As those skilled in the art will readily appreciate, combining fiber communications systems and DFS systems using standard WDM optics presents many advantages. More particularly, systems methods and structures according to the present disclosure eliminate the need for multiple fibers for communications and sensing. As those skilled in the art readily know and appreciate, optical fibers may be a limited resource in optical networks therefore eliminating the need for multiples is of great advantage over the prior art. Additionally – and as compared to the prior art – systems, methods, and structures according to the present disclosure present a much simpler

arrangement as standard WDM components may be employed without the need for additional computational and/or digital signal processing (DSP) resources.

[0009] As we shall describe in more detail, systems, methods, and structures according to the present disclosure – as compared to the prior art – exhibit significantly better performance characteristics as our systems, methods, and structures may employ band(s) having the lowest fiber loss (typically C-band) for both communications and sensing operation(s). Lastly, since more and more contemporary communications systems use multiple fiber bands due to increasing network capacity demands, using separate bands for DFS systems may be prohibitive in the future.

BRIEF DESCRIPTION OF THE DRAWING

[0010] A more complete understanding of the present disclosure may be realized by reference to the accompanying drawing in which:

[0011] **FIG. 1** is a schematic diagram illustrating a dual-use optical fiber communications/sensing system on a single fiber pair according to aspects of the present disclosure;

[0012] **FIG. 2** is a schematic diagram illustrating an experimental setup for testing 55-km DWDM bidirectional communication and sensing architecture according to aspects of the present disclosure;

[0013] **FIG. 3** shows a pair of spectrum plots illustrating bidirectional communication/sensing system signal spectrum map according to aspects of the present disclosure;

[0014] **FIG. 4** is a schematic illustrating a bidirectional test arrangement including PS-144QAM prototype transceiver according to aspects of the present disclosure;

[0015] **FIG. 5** is a pair of signal constellation plots showing received signal constellation from the PS-144QAM prototype transceiver arrangement of **FIG. 4** according to aspects of the present disclosure; and

[0016] **FIG. 6** is a plot depiction of a waterfall trace obtained by distributed vibrational sensing (DVS) showing ambient vibration signatures along a cable route according to aspects of the present disclosure.

[0017] The illustrative embodiments are described more fully by the Figures and detailed description. Embodiments according to this disclosure may, however, be embodied in various forms and are not limited to specific or illustrative embodiments described in the drawing and detailed description.

DESCRIPTION

[0018] The following merely illustrates the principles of the disclosure. It will thus be appreciated that those skilled in the art will be able to devise various arrangements which, although not explicitly described or shown herein, embody the principles of the disclosure and are included within its spirit and scope.

[0019] Furthermore, all examples and conditional language recited herein are intended to be only for pedagogical purposes to aid the reader in understanding the principles of the disclosure and the concepts contributed by the inventor(s) to furthering the art and are to be construed as being without limitation to such specifically recited examples and conditions.

[0020] Moreover, all statements herein reciting principles, aspects, and embodiments of the disclosure, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that such equivalents include both currently known equivalents as well as equivalents developed in the future, i.e., any elements developed that perform the same function, regardless of structure.

[0021] Thus, for example, it will be appreciated by those skilled in the art that any block diagrams herein represent conceptual views of illustrative circuitry embodying the principles of the disclosure.

[0022] Unless otherwise explicitly specified herein, the FIGs comprising the drawing are not drawn to scale.

[0023] By way of some additional background, we begin by noting that there exist prior art attempts directed to reducing instantaneous operation power of optical pulse reflectometry systems such that they can be applied to in-service fiber monitoring and fault detections. Illustrative examples of such systems generally employ long correlation codes or swept optical frequencies such that an instantaneous power of interrogating signals may be lowered without sacrificing sensing performance. Unfortunately – and as will be known and appreciated by those skilled in the art, such a prior art approach requires much more signal processing at the interrogator as compared to traditional pulse OTDR. Consequently, significantly more computational resources having higher implementation costs are required for these prior art approaches.

[0024] **FIG. 1** is a schematic diagram illustrating a dual-use optical fiber communications/sensing system on a single fiber pair according to aspects of the present disclosure. With reference to that figure, it may be observed that the communications channels and DFS system signals are carried on the same optical fiber.

[0025] Operationally, the overall system comprises of a fiber-pair which support two-way communication between two nodes. In a typical configuration, only one fiber sensing interrogator is needed for DFS for one fiber cable, however two DFS systems can be implemented in our design for back-up purposes if the fiber pair comprises two fibers within the same cable. The two DFS systems can also be used to for different parameter sensing, e.g. acoustic, vibrational, and temperature. If the fibers are part of different cables having different routes, two DFS systems can be used to capture sensing data along different routes.

[0026] As noted previously, since optical interrogation pulses in DFS systems exhibit high peak powers, they will interfere with communication channels if they are co-propagated together due to fiber nonlinearity. In our bi-direction launch architecture according to aspects of the present disclosure, the communication channels and sensing pulses are counter-propagated. In this inventive manner, the effective interaction time/length between the communication signal and sensing pulse is extremely short, thus dramatically reducing the signal interference due to fiber nonlinearity.

[0027] As may be observed from the figure, a reflected sensing signal in the DFS system will travel in the same direction as the communication channels, however the weak optical powers ($\sim$ -80 dB per nanosecond pulse) will advantageously not impact the performance of the communication channels.

[0028] Of further advantage, systems, methods, and structures according to the present disclosure advantageously use standard WDM diplexers at a transmitter end (for the communication channels) and at a receiver end to combine the two systems. Still further, wavelength use by DFS interrogator can be either in-band or out-of-band depending on diplexer design however, it is generally preferable to use the same band as the signal for lower cost component and better performance (in C-band).

[0029] Advantageously, the diplexers can be implemented using wavelength-selective switch (WSS) technologies to flexibly select the operation wavelengths for the DFS system. It can also be implemented using fixed optical filters for lower monetary cost and insertion loss if the operation wavelength of DFS is fixed. Other than multiplexing and demultiplexing function, the diplexer at the transmitter end also serves an important function of filtering out the in-band ASE noise generated by the EDFAs used for communication. Without optical diplexer at transmitter-end, the reflected sensing signal will be swamped by noise and DFS system will not operate properly. Finally, the demultiplexed interrogating pulse at the transmitter end can either be terminated or relayed to a subsequent fiber span after being amplified by a bidirectional amplifier, to potentially extend the sensing distance.

[0030] **FIG. 2** is a schematic diagram illustrating an experimental setup for testing 55-km DWDM bidirectional communication and sensing architecture according to aspects of the present disclosure. With reference to that figure, we note that our proof of concept was demonstrated in a field trial using that setup shown. For fiber communication systems, we used a full-C-band DWDM system using a probabilistic shaped (PS) 144-QAM transponder prototype, which supports transmission of 400Gb/s data rate at 50-GHz DWDM spacing, and additional neighbor WDM channels to fill up the transmission spectrum. We also used a DVS system in our trial bidirectional architecture to monitor ambient vibrations/disturbance along the fiber cable. The fiber used for transmission and sensing is a field installed fiber link within a customer's fiber

network connecting site A and site B with a length of 55-km. The transmitter for DWDM communication was placed at site B, while the receiver and the DVS interrogator was placed a site A.

[0031] The architecture for the DVS hardware design consists of laser, acoustic-optic modulator (AOM), EDFAs with band-pass filters (BPF), circulators, and photo-detector, with the retrieved data being processed by a real-time FPGA. Despite such specificity for evaluation/trial, we note that systems, methods, and structures according to the present disclosure are applicable to different DFS system design(s). For core/metro fiber communication system, it is typical to use WSS to multiplex and demultiplex channels, which is the de-facto technology used in commercial reconfigurable optical add/drop multiplexers (ROADM). To evaluate our concepts in the trials, we employed two WSSs - one at each node - for the communication system.

[0032] When combining the communication and sensing system in the same fiber, a receive WSS advantageously may also act as a diplexer for coupling in and out the sensing signal at the receiver end. At the transmitter side, however, one additional WSS was used as diplexer because it is necessary to filter out the ASE noise generated by the EDFA, which will compromise the operation of the DVS due to its relative high-power level compared to the reflected sensing signal.

[0033] The DVS signal is multiplexed with the DWDM communication channels in C-band.

[0034] **FIG. 3** shows a pair of spectrum plots illustrating bidirectional communication/sensing system signal spectrum map according to aspects of the present disclosure. As may be observed from those plots - in the forward direction - the C-band DWDM communication channels are multiplexed at 50-GHz spacing, with one channel left open for DVS signal operation. The reflected DVS signal is much lower in power compared to the communication channels, thus it won't degrade the transmission performance of the communication channels. The test channel of PS-144QAM was spaced 150-GHz apart from the sensing signal. At the backward direction, only the interrogating pulse spectrum is present. After reaching site B, the interrogating pulse

signal will be terminated after duplex WSS to prevent high backward reflection at the fiber end.

[0035] **FIG. 4** is a simplified schematic diagram illustrating the bidirectional test arrangement including PS-144QAM prototype transceiver according to aspects of the present disclosure.

[0036] After the both DWDM communication system and DVS system were setup according to the figure, we were able to achieve simultaneous operation of both systems on the same fiber. Distributed Raman amplification was applied in the backward direction to extend the sensing distance of the DVS to cover the entire 55-km fiber length.

[0037]

[0038] **FIG. 5** is a pair of signal constellation plots showing received signal constellation from the PS-144QAM prototype transceiver arrangement of **FIG. 4** according to aspects of the present disclosure. More specifically, **FIG. 5** shows a received PS-144 QAM signal constellation after coherent detection and DSP. Error free operation was achieved after FEC decoding for 400-Gb/s data rate. No perceptible signal degradation was observed before and after the DVS signal was inserted.

[0039] **FIG. 6** is a plot depiction of a waterfall trace obtained by distributed vibrational sensing (DVS) showing ambient vibration signatures along a cable route according to aspects of the present disclosure. As shown in the figure the ambient vibration intensity is shown along different time (vertical axis) and location (horizontal axis). Advantageously, the test system was able to capture all vibration events for the full 55-km fiber lengths while the DWDM communication system was in operation. The diagonal lines on the water-fall plot indicated vehicles moving along the roadways, where the customer's fiber cable was installed next to. Using the retrieved DVS data, one can determine traffic information such as vehicle moving direction, number of vehicles on road, vehicle speed, spacing between vehicles, etc.

[0040] **FIG. 6** is a plot depiction of a waterfall trace obtained by distributed vibrational sensing (DVS) showing ambient vibration signatures along a cable route according to aspects of the present disclosure.

[0041] At this point, while we have presented this disclosure using some specific examples, those skilled in the art will recognize that our teachings are not so limited. Accordingly, this disclosure should be only limited by the scope of the claims attached hereto.

Claims:

1. An improved optical fiber communication and sensing arrangement
CHARACTERIZED BY:

bidirectional optical fiber communication and optical fiber sensing employs a same optical fiber transmission band.

2. The improved optical fiber communication and sensing arrangement of claim 1,
FURTHER CHARACTERIZED BY:

counter-propagation of communication channels and optical interrogating pulse(s).

3. The improved optical fiber communication and sensing arrangement of claim 2,
FURTHER CHARACTERIZED BY:

a reduction in signal degradation caused by fiber nonlinearity resulting from the counter-propagation of the communication channels and optical interrogating pulse(s).

4. The improved optical fiber communication and sensing arrangement of claim 3
FURTHER CHARACTERIZED BY:

terminating sensing signals after de-multiplexing at a diplexer.

5. The improved optical fiber communication and sensing arrangement of claim 3
FURTHER CHARACTERIZED BY:

relaying the sensing signals after de-multiplexing at a diplexer such that sensing distance is extended.

6. The improved optical fiber communication and sensing arrangement of claim 3
FURTHER CHARACTERIZED BY:

removing in-band ASE noise from erbium-doped fiber amplifiers (EDFAs) by optical filtering communication channels such that sensing operations are unencumbered.

7. The improved optical fiber communication and sensing arrangement of claim 1

FURTHER CHARACTERIZED BY:

no allocation of separate fiber bands or application of coding/frequency sweeping employed in the sensing.

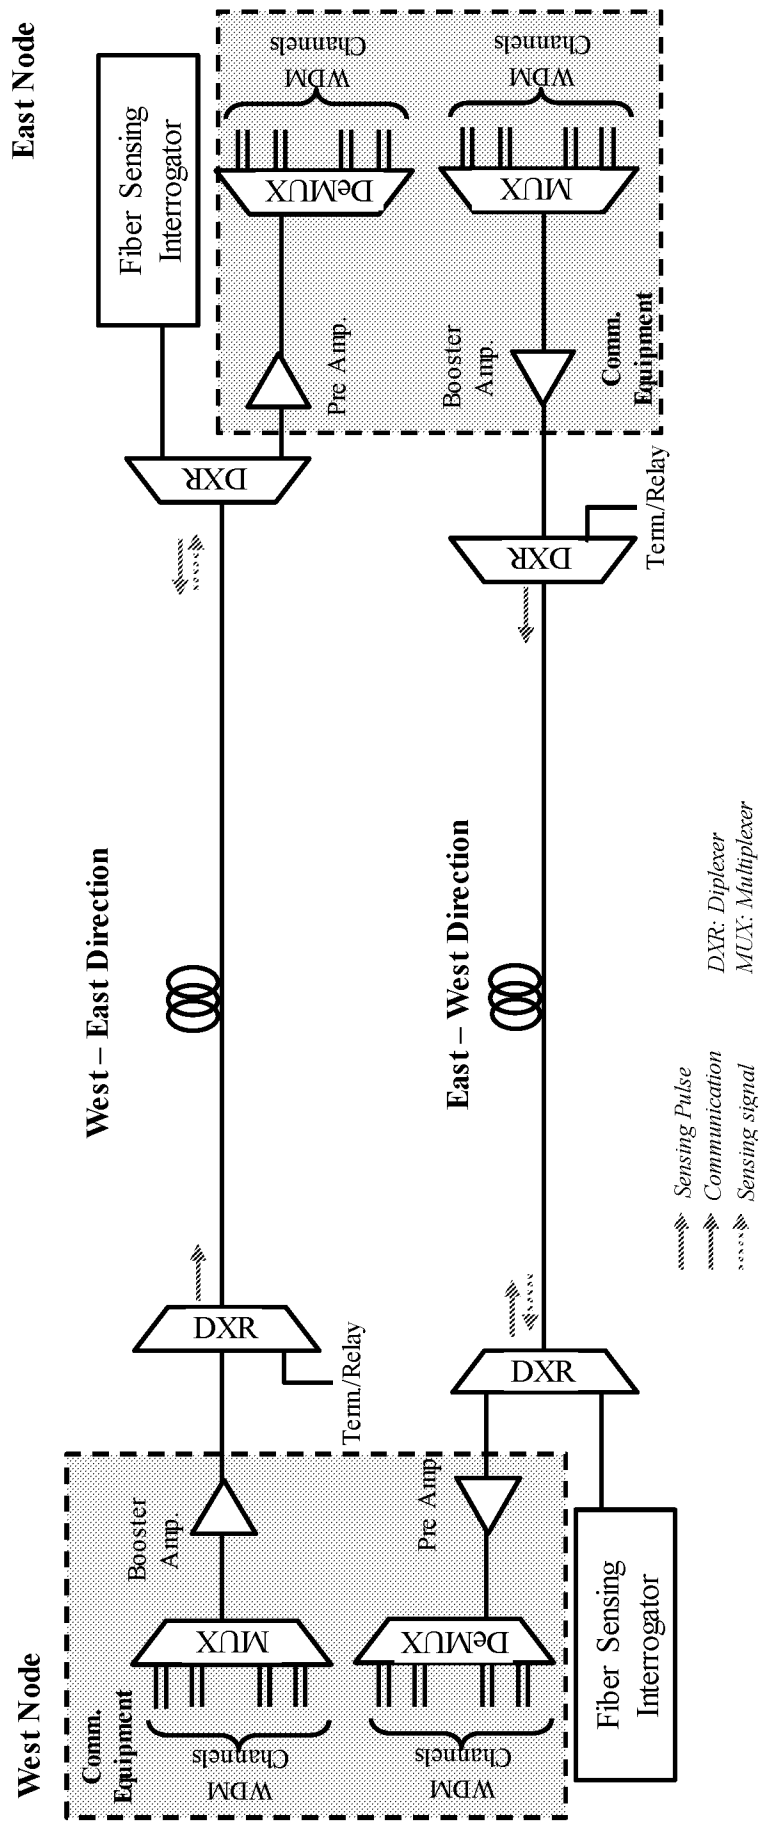


FIG. 1


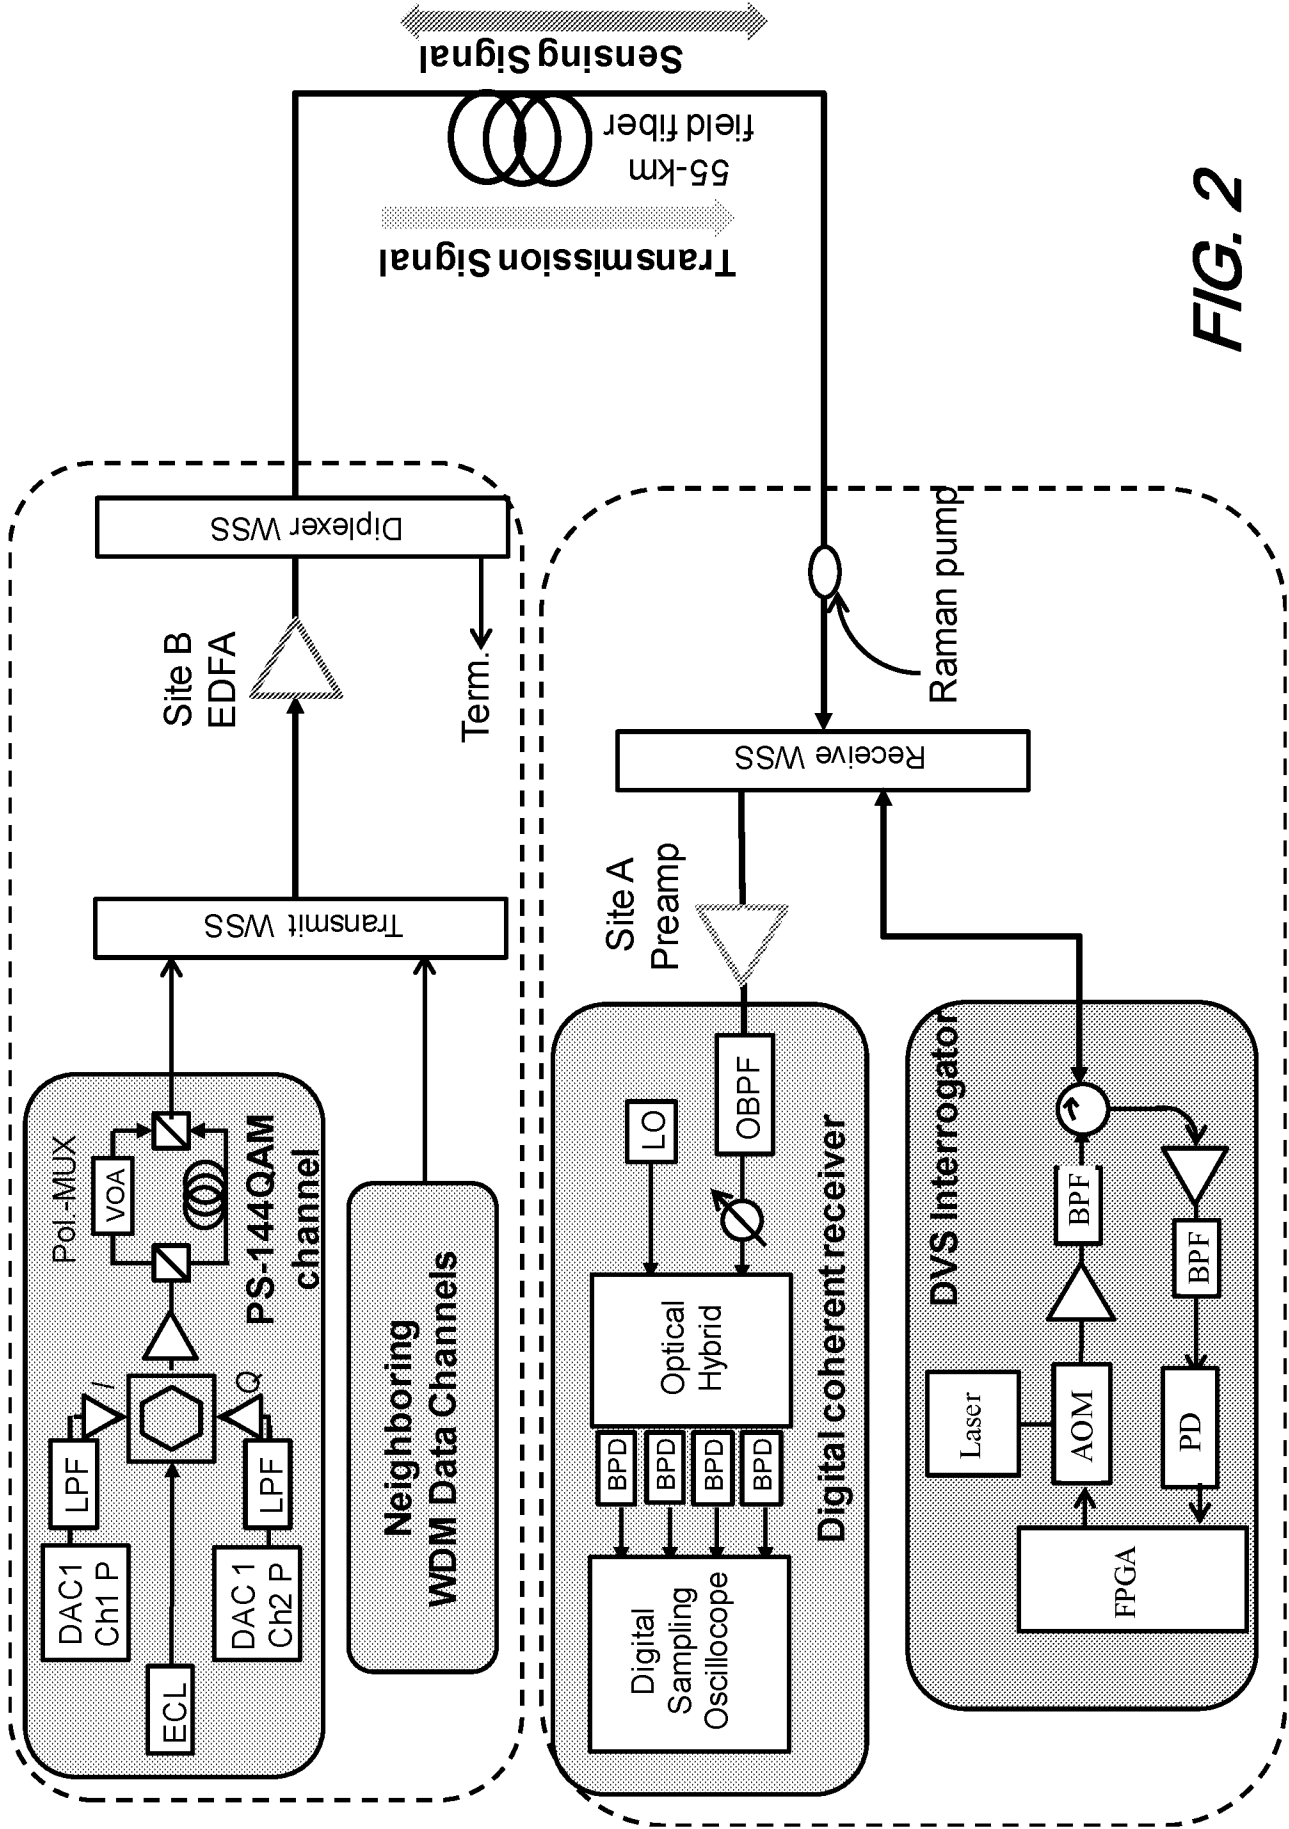


FIG. 2

Forward Direction
Spectrum

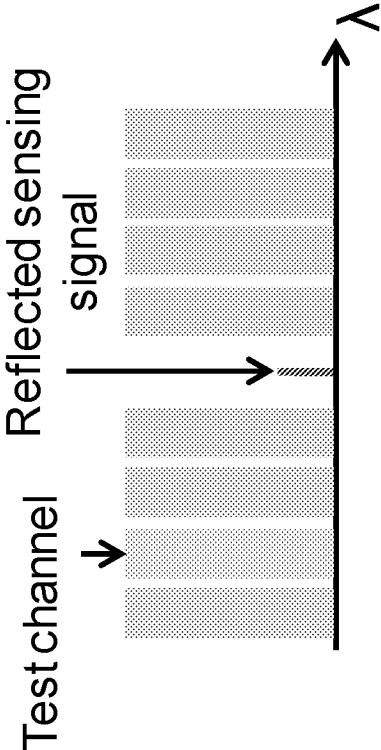

Backward Direction
Spectrum



FIG. 3

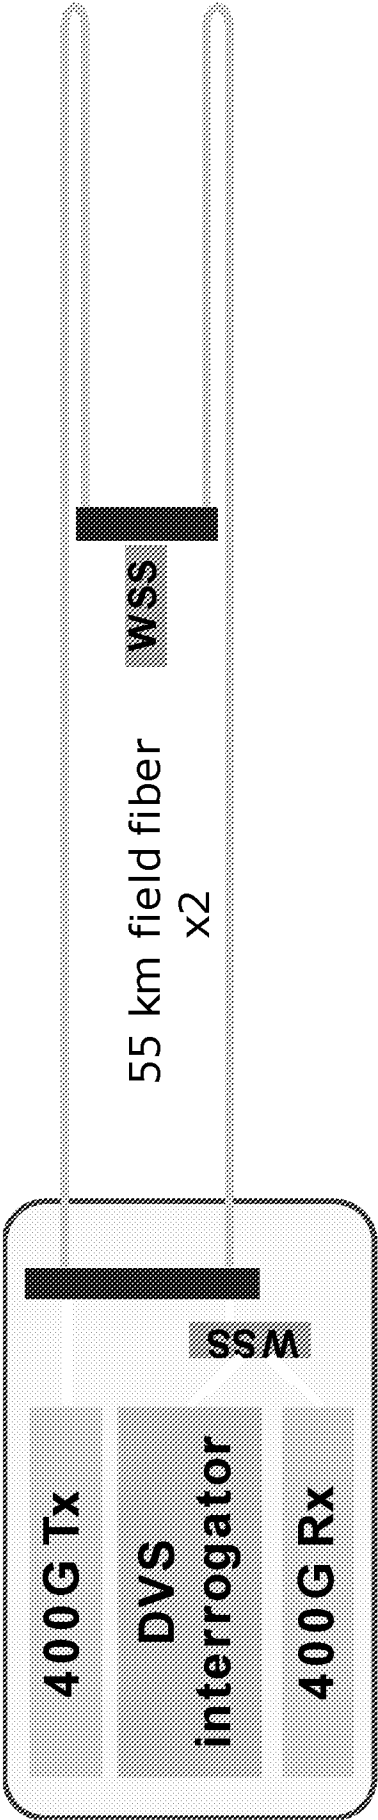


FIG. 4

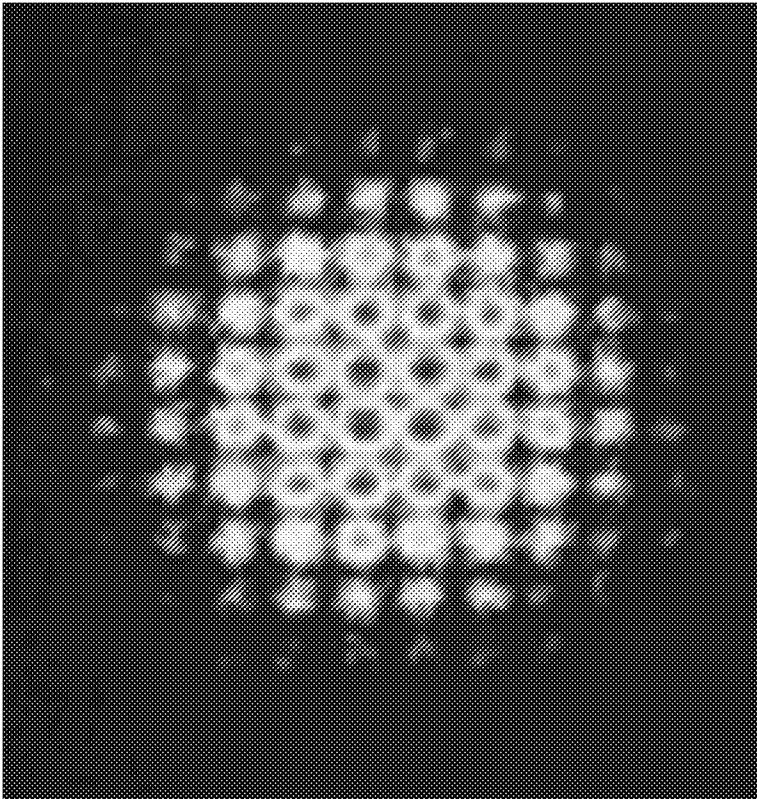
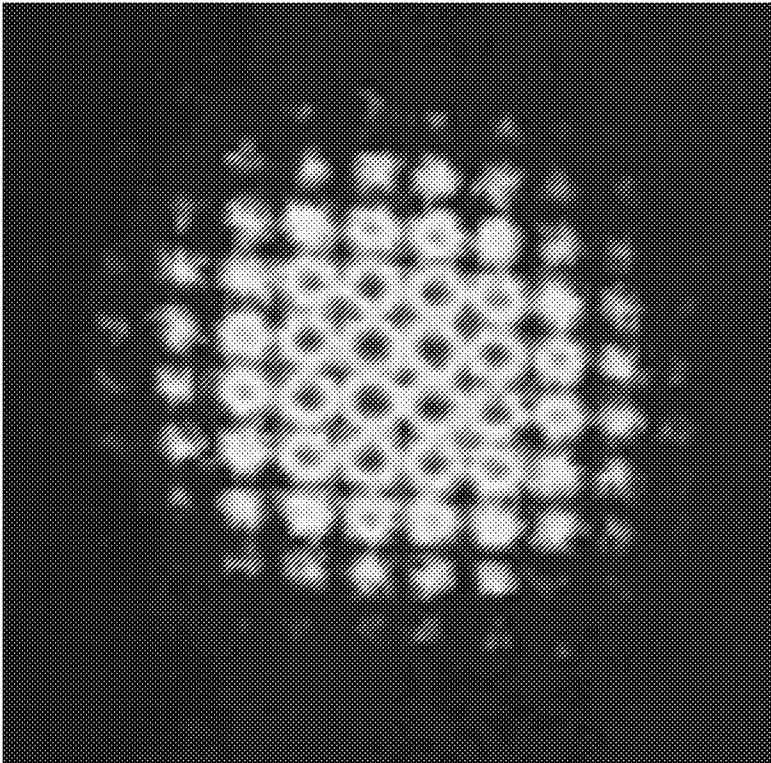


FIG. 5



FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2019/039842**A. CLASSIFICATION OF SUBJECT MATTER****G02B 6/12(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
G02B 6/12; G01D 5/353; G01N 21/00; G01V 1/18; H04B 10/00; H04B 10/20; H04J 14/00Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: communication, bidirection, optical, sensor, fiber**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009-0022489 A1 (WINSTON I. WAY) 22 January 2009 See paragraphs [0039]-[0042],[0099],[0134], claims 1-2 and figures 1-3D.	1,7
Y		2-6
Y	US 2011-0069302 A1 (DAVID JOHN HILL et al.) 24 March 2011 See paragraph [0072] and claim 1.	2-6
A	US 2009-0103915 A1 (ALDO APRILE et al.) 23 April 2009 See paragraphs [0017]-[0018] and figures 2A-2C.	1-7
A	US 2015-0377656 A1 (FILIPPO BASTIANINI) 31 December 2015 See claims 1-3 and figure 2.	1-7
A	US 2016-0003648 A1 (HALLIBURTON ENERGY SERVICES, INC.) 07 January 2016 See claims 1-3 and figure 2.	1-7



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 October 2019 (25.10.2019)

Date of mailing of the international search report

25 October 2019 (25.10.2019)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

KANG, Sung Chul

Telephone No. +82-42-481-8405



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2019/039842

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009-0022489 A1	22/01/2009	US 2012-0195588 A1 US 8175458 B2 WO 2009-012409 A2 WO 2009-012409 A3	02/08/2012 08/05/2012 22/01/2009 12/03/2009
US 2011-0069302 A1	24/03/2011	GB 2476449 A GB 2476449 B US 9435902 B2	29/06/2011 11/12/2013 06/09/2016
US 2009-0103915 A1	23/04/2009	US 8078052 B2	13/12/2011
US 2015-0377656 A1	31/12/2015	EP 2979064 A2 EP 2979064 B1 US 9410826 B2 WO 2014-155400 A2 WO 2014-155400 A3	03/02/2016 12/04/2017 09/08/2016 02/10/2014 31/12/2014
US 2016-0003648 A1	07/01/2016	AU 2013-397601 A1 AU 2013-397601 B2 GB 2534991 A GB 2534991 B US 9557195 B2 WO 2015-020642 A1	24/12/2015 27/10/2016 10/08/2016 13/09/2017 31/01/2017 12/02/2015