

(19)



(11)

EP 3 034 694 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
27.09.2017 Bulletin 2017/39

(51) Int Cl.:
E01C 9/08 (2006.01) E02D 17/10 (2006.01)

(21) Application number: **14199476.4**

(22) Date of filing: **19.12.2014**

(54) **Cover plate for a road hole**

Abdeckplatte für ein Straßenloch

Plaque de couverture pour un trou de route

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
22.06.2016 Bulletin 2016/25

(73) Proprietor: **WXSAFE AB**
831 34 Östersund (SE)

(72) Inventors:
• **Johansson, Pär**
831 46 Östersund (SE)

• **Holmbom, Patrick**
836 95 Ås (SE)

(74) Representative: **Awapatent AB**
P.O. Box 665
831 27 Östersund (SE)

(56) References cited:
WO-A1-01/21898 DE-A1- 1 484 458
DE-C- 658 543 US-A1- 2002 184 718

EP 3 034 694 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to the field of cover plates for covering a hole in a road.

BACKGROUND OF THE INVENTION

[0002] When a hole is dug in a road in order to do some ground work, lay down a pipe, etc., a cover plate is placed to cover the hole, in order to allow vehicles to pass. Conventional cover plates are simply made of a solid steel plate having a typical thickness of 30-50 mm and a size of several square meters. Such conventional cover plates are heavy and require a large amount of material to manufacture, and causes a high energy consumption for transporting them.

[0003] An effort to reduce the weight of the cover plate has been made as disclosed in DE 10215110. Basically DE 10215110 discloses a soft ground plate, wherein several soft ground plates are interconnected to form a road surface on top of soft ground. However, one embodiment is shown where the soft ground plate is used as a cover plate for covering a hole of a road. More particularly, DE 10215110 discloses a cover plate with several elongated open profiles each having a flat top portion and sloping side walls, which profiles are placed side by side, and are interconnected by means of opposite side angle steels connected to the respective ends of the profiles. The profiles extend transversally, with regard to a driving direction of a passing vehicle, i.e. the angle steels are arranged along the sides of the cover plate. Several cover plates are consecutively placed and are interconnected, by connecting their angle steels with each other, to form a road surface on soft ground. In one example disclosed in DE 10215110 the cover plates are used to cover a hole in the ground, and then a bottom portion is welded to each profile to cover the opening of the profile, and top stripes are welded between the top portions of the profiles, all in order to increase the bending strength and torsion strength to allow the cover plate to be used for covering a hole. This use of profiles decreases the weight of the cover plate relative to the solid steel plate for carrying a corresponding load of a passing vehicle. However, this prior art cover plate is cumbersome to manufacture.

[0004] DE 14 84 458 A1 discloses a further road cover plate made of metal profiles welded together.

SUMMARY OF THE INVENTION

[0005] It would be advantageous to provide a solution which simplifies the manufacture of the cover plate.

[0006] To better address this concern, the invention presents a cover plate for covering a hole of a road, as defined in claim 1. By using metal profiles which can be arranged to form the cover plate with bottom and top

surfaces, and which are easily attached to each other, the cover plate is more comfortably manufacturable than the prior art cover plate. By arranging the metal profiles longitudinally instead of transversally the bending resistance of the cover plate can be accurately pre-calculated. Furthermore, since typically the size of the cover plate along the driving direction exceeds the size perpendicular thereto, the assembly of the cover plate from separate metal profiles less time consuming than if they were mounted transversally of the driving direction. Additionally, the end pieces provide ramps facilitating driving onto the cover plate with a vehicle, in particular on hard ground surfaces, such as asphalt.

[0007] In accordance with an embodiment of the cover plate the metal profiles are arc shaped in their longitudinal direction. Thereby the cover plate is vault shaped and has a further increased strength. As understood by the person skilled in the art, the metal profiles are only bent to a minor extent.

[0008] In accordance with the invention of the cover plate, the metal profiles have been attached to each other by spot welded portions, where the welded portions are lengthwise intermittently situated alternately at upper edges and lower edges of the metal profiles. This provides an advantageous attachment between the profiles, which attachment is simple and strong.

[0009] In accordance with the invention of the cover plate the metal profiles have rectangular cross sections or are U-profiles. The rectangular cross-section facilitates the manufacture of the cover plate, where the profiles can simply be placed side by side and attached to each other.

[0010] In accordance with an embodiment of the cover plate each ramp comprises a U-shaped portion extending along the edge of the plate shaped entity embracing an end portion thereof, and a wedge portion protruding from the U-shaped portion and having an upper surface sloping downwards away from the U-shaped portion. The U-shaped portion provides a lid covering the open ends of the profiles, thereby preventing them from being filled with dirt.

[0011] In accordance with an embodiment of the cover plate each ramp comprises at least one road anchoring portion comprising an aperture providing vertical passage for a road anchoring element. Thereby it is ensured that the cover plate can be kept in place by being anchored to the ground.

[0012] In accordance with an embodiment of the cover plate it comprises two strip shaped elements extending laterally of the plate shaped entity at a bottom side thereof and being attached to the plate shaped entity at a distance from each other. The strip shaped elements mark a boarder of a minimum portion of the cover plate, at each respective end thereof, which has to rest on the ground. This embodiment has an increased security in use, since it is easy for a user to properly place the cover plate at the hole.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The invention will now be described in more detail and with reference to the appended drawings in which:

Fig. 1 is a perspective view from above of an embodiment of the cover plate according to the present invention;

Fig. 2 is a perspective view from below of the cover plate shown in Fig. 1;

Fig. 3 is a partly cross-sectional and perspective view of a part of the cover plate shown in Fig. 1;

Fig. 4 is a perspective view of a part of the cover plate of Fig. 1;

Figs. 5a and 5b are schematic illustrations of attachment principles;

Fig. 6 is a partly cross-sectional and perspective view of a part of another embodiment of the cover plate according to the present invention; and

Fig. 7 is a side view of another embodiment of the cover plate.

DESCRIPTION OF EMBODIMENTS

[0014] In a first embodiment the cover plate 1 comprises several elongated metal profiles 2, which are arranged side by side and form a plate shaped entity 3, and elongated wedge shaped end pieces 4 attached at opposite ends 5, 6 of the plate shaped entity 3. Each metal profile 2 has opposite side walls 7, 8; 7', 8'; 7'', 8''. The metal profiles 2 are placed such that the adjacent side walls 8, 7'; 8', 7'', of adjacent metal profiles abut on each other, wherein the metal profiles 2 have been attached to each other along the side walls 7, 8; 7', 8'; 7'', 8'' thereof. The plate shaped entity 3 has a bottom surface 9 and a top surface 10. It should be noted that the surfaces 9, 10 are not necessarily fully smooth and solid. Typically, the metal profiles have slightly rounded edges, and may have minor slits between them due to small irregularities of the side walls, but can still be considered to form a common top surface and a common bottom surface. In this embodiment, the cross-section of each metal profile is rectangular, and more particular it is square, but many other shapes are feasible as well, which will be further exemplified below.

[0015] The metal profiles 2 are typically made of steel, but other metals or alloys are feasible as well, such as aluminum.

[0016] The wedge shaped end pieces 4 extend perpendicularly to the metal profiles 2, and cover the ends 11 of the metal profiles 2. Each end piece 4 has a sloping top surface 13, which slopes downwardly from the top surface 10 to the ground in a direction away from the metal profile ends 11. The cover plate 1 is arranged to be placed with the metal profiles 2 extending along a driving direction of the road, and thereby the end pieces 4 constitute ramps facilitating the entering of the cover

plate 1 with a vehicle. In addition to eliminating a sharp edge which can be inconvenient for at least some vehicles, the risk of a vehicle moving the cover plate 1 by pushing it with the wheels is reduced.

[0017] It should be noted that US 2004 14 1809 discloses a kind of road plate, called road mat, comprising metal profiles having a rectangular cross-section. However, the road mat is exclusively arranged to be used for building a road surface on soft ground. As such the road mat does not fulfill strength requirements for a use as a cover plate for covering a hole of a road. For instance, the profiles are only interconnected with perpendicular stripes on the top surface of the road mat, and the profiles are arranged transversally of the driving direction. There is no teaching of any end pieces, etc. Consequently, there is no disclosure of a cover plate which can be compared with the cover plate according to this invention.

[0018] Returning to the first embodiment, each end piece 4 comprises an angle steel 14 having a first wall section 15, which covers the very ends 11 of the profiles 2, and a second perpendicular wall section 16, which covers an end surface portion of the top surface 10 of the plate shaped entity 3. The angle steel 14 is attached to the plate shaped entity 3, e.g. by welding. Furthermore, each end piece 4 comprises a V-shaped part 17, which has a longer leg portion 18 and a shorter leg portion 19. The longer leg portion 18 constitutes a bottom of the V-shaped part 17, covers an end surface portion of the bottom surface 9, and protrudes from the plate shaped entity 3. The longer leg portion 18 is attached to the plate shaped entity 3. The shorter leg portion 19 provides the sloping top surface 13 of the end piece 4, and is attached to the angle steel 14. In combination the angle steel 14 and the part of the longer leg portion that covers the end surface portion of the bottom surface 9 forms a U-shaped portion 20, which extends along the edge of the plate shaped entity 3, embracing an end portion 21 thereof. The rest of the V-shaped part 17 constitutes a wedge portion 22 protruding from the U-shaped portion 20 and having an upper surface, i.e. the top surface 13, sloping downwards away from the U-shaped portion 20.

[0019] Each end piece, or ramp, 4 comprises two road anchoring portions 23 arranged at the respective ends of the ramp 4. Each road anchoring portion 23 comprises an aperture 24 providing vertical passage through the ramp 4 for a road anchoring element, such as a ground screw.

[0020] The metal profiles 2 have been attached to each other by welded portions 29, 31 see Figs. 3, 5a and 5b, where the welded portions 29, 31 are lengthwise intermittently situated alternately at upper edges and lower edges of the metal profiles 2, as shown most schematically in Fig. 5a, or arranged in parallel on the top and bottom surfaces 10, 9, as shown in Fig. 5b. In addition to spot welding all-welding is feasible as well, and so are other kinds of attachment methods, though only spot welding is covered by the present invention as it is fast and strong enough.

[0021] The plate shaped entity 3 comprises four lifting portions 25 arranged in a square and comprising key-holes 26, arranged in pairs in the top surfaces of two spaced profiles 2.

[0022] Further, the cover plate 1 comprises two strip shaped elements 27 extending laterally of the plate shaped entity 3, i.e. perpendicular to the profiles 2, at the bottom side 10 thereof and being attached to the plate shaped entity 3 at a distance from each other. Each strip shaped element 27 marks a boarder of a minimum portion of the cover plate 1, at each respective end thereof, which has to rest on the ground. More particularly, the strip shaped elements 27 are typically positioned closer to each respective end 5, 6 of the plate shaped entity 3 than to its centre, but at a distance from the ends that is long enough to ensure that the cover plate 1 manages to carry a predetermined load.

[0023] In order to exemplify typical dimensions, the cover plates 1 are often made 4-6 m long, and they are made to carry several tons of load. For instance, in order to manage a load of 12 tons, a 6 meter cover plate 1 has a thickness of about 50 mm, i.e. the height of the profiles 2 is about 50 mm, and the profile wall thickness is 5 mm. Given these figures, it would be possible for a person skilled in the art to re-dimension the cover plate when appropriate. It is reasonable to believe that profile heights of 40-60 mm and wall thicknesses of 4-6 mm would be common.

[0024] In accordance with a second embodiment of the cover plate 30, it comprises a different kind of profiles than the first embodiment, and except for the profiles it has the same construction as in the first embodiment. Each profile 31, 32 is basically U-shaped. By arranging the profiles 31, 32 in two layers, a first layer of first profiles 31, and a second layer of second profiles 32, as described below, a plate shaped entity 33 having a substantially flat top surface and a substantially flat bottom surface, which have similar properties as the top and bottom surfaces 10, 9 of the first embodiment, is obtained. In each layer the profiles 31, 32 are arranged adjacent to each other, with the open side of the profiles 31, 32 turned in the same direction. The first and second layers are arranged in engagement with each other with the open sides facing each other. Further the first profiles 31 are laterally displaced relative to the second profiles 32 by half the width of the profiles 31, 32. Thereby the longitudinal edges 34, 35 at the mouths of the profile openings abut on the inner bottom surfaces 36, 37 of opposite profiles 31, 32. When the profiles 31, 32 are assembled to form the plate shaped entity 33 profiles 31, 32 of the first and second layers are alternately attached to each other, e.g. by spot welding along the edges 34, 35 of the profiles 31, 32 to the inner surfaces 36, 37 of the profiles 31, 32, and by spot welding of the adjacent profiles to each other at the top and bottom surfaces of the plate shaped entity 33, like in the first embodiment. After having attached all profiles with each other, the outermost profile at each side of the plate shaped entity 33

will have a residual open aperture which is covered by a strip, or the aperture is covered by arranging an additional profile 38 being a half U-profile, i.e. an angle steel shaped profile.

[0025] In accordance with a third embodiment of the cover plate 40, as shown in Fig. 7, the metal profiles 41 are arc shaped in their longitudinal direction. This means that the cover plate 40 is vault shaped, or concave, though to a minor extent. For example, when placed on flat ground, the bottom surface of a four meter long cover plate 40 has a maximum height D above ground that is about 10 mm. Thus, according to this example, the height above ground D is substantially smaller than the height of the metal profile 41 mentioned above.

[0026] While the invention has been illustrated and described in detail in the drawings and foregoing description, such illustration and description are to be considered illustrative or exemplary and not restrictive; the invention is not limited to the disclosed embodiments.

[0027] Other variations to the disclosed embodiments can be understood and effected by those skilled in the art in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims.

Claims

1. A cover plate for covering a hole of a road, the cover plate comprising several elongated metal profiles (2) arranged side by side, each metal profile (2) having opposite side walls (7, 8, 7', 8', 7'', 8''), the adjacent side walls of adjacent metal profiles abutting on each other, wherein the metal profiles have been attached to each other along the long sides thereof, the metal profiles thereby forming a plate shaped entity (3) having a bottom surface and a top surface (9, 10), **characterized in that** the cover plate further comprises elongated wedge shaped end pieces (4) attached at opposite ends of the plate shaped entity, extending perpendicularly to the metal profiles, covering the ends (11) of the metal profiles, and each having a sloping top surface (13), the cover plate thereby being arranged to be placed with the metal profiles extending along a driving direction of the road, wherein the shape of the metal profiles is selected from a group of shapes comprising metal profiles having a rectangular cross-section and U-profiles, wherein the metal profiles are attached to each other by spot welded portions (29, 31) lengthwise intermittently situated alternately at upper edges and lower edges of the metal profiles.
2. The cover plate according to claim 1, wherein the metal profiles (2) are arc shaped in their longitudinal direction.
3. the cover plate according to any one of the preceding claims, wherein each end piece (4) comprises a U-

shaped portion (20) extending along the edge of the plate shaped entity embracing an end portion (21) thereof, and a wedge portion (22) protruding from the U-shaped portion and having an upper surface (13) sloping downwards away from the U-shaped portion.

4. The cover plate according to any one of the preceding claims, wherein each end piece (4) comprises at least one road anchoring portion (23) comprising an aperture (24) providing vertical passage for a road anchoring element.
5. The cover plate according to any one of the preceding claims, comprising two strip shaped elements (27) extending laterally of the plate shaped entity (3) at a bottom side thereof and being attached to the plate shaped entity at a distance from each other, the strip shaped elements marking a boarder of a minimum portion of the cover plate, at each respective end thereof, which has to rest on the ground.
6. The cover plate according to any one of the preceding claims, wherein each end piece (4) comprises an angle steel (14) having a first wall section (15), which covers the very ends (11) of the profiles, and a second perpendicular wall section (16), which covers an end surface portion of the top surface (10) of the plate shaped entity (3), wherein the angle steel is attached to the plate shaped entity, wherein each end piece comprises a V-shaped part (17), which has a longer leg portion (18) and a shorter leg portion (19), wherein the longer leg portion constitutes a bottom of the V-shaped part, covers an end surface portion of the bottom surface, and protrudes from the plate shaped entity, wherein the longer leg portion is attached to the plate shaped entity, and wherein the shorter leg portion provides the sloping top surface (13) of the end piece (4), and is attached to the angle steel.
7. The cover plate according to any one of the preceding claims, wherein the metal profiles (2) are U-shaped in cross-section and arranged in a first layer of first metal profiles (31), and a second layer of second metal profiles (32), wherein the metal profiles of each layer are arranged adjacent to each other, with the open side of the metal profiles turned in the same direction, wherein the first and second layers are arranged in engagement with each other with the open sides facing each other, and wherein the first metal profiles (31) are laterally displaced relative to the second metal profiles (32) by half the width of the metal profiles, whereby the longitudinal edges (34, 35) at the mouths of the profile openings abut on the inner bottom surfaces (36, 37) of opposite profiles (31, 32).

Patentansprüche

1. Abdeckplatte zum Abdecken eines Straßenlochs, wobei die Abdeckplatte mehrere längliche Metallprofile (2) umfasst, die nebeneinander angeordnet sind, wobei jedes Metallprofil (2) gegenüberliegende Seitenwände (7, 8, 7', 8', 7'', 8'') aufweist, wobei die benachbarten Seitenwände von benachbarten Metallprofilen aneinander angrenzen, wobei die Metallprofile entlang ihrer langen Seiten aneinander befestigt wurden, wodurch die Metallprofile eine plattenförmige Einheit (3) mit einer unteren Fläche und einer oberen Fläche (9, 10) bilden, **dadurch gekennzeichnet, dass** die Abdeckplatte ferner längliche keilförmige Endstücke (4) umfasst, die an gegenüberliegenden Enden der plattenförmigen Einheit befestigt sind, sich senkrecht zu den Metallprofilen erstrecken, die Enden (11) der Metallprofile abdecken und jeweils eine schräge obere Fläche (13) aufweisen, wobei die Abdeckplatte dadurch so ausgelegt ist, dass sie so platziert wird, dass die Metallprofile sich entlang einer Fahrtrichtung der Straße erstrecken, wobei die Gestalt der Metallprofile ausgewählt ist aus einer Gruppe von Gestalten, die Metallprofile mit einem rechteckigen Querschnitt und U-Profilen umfasst, wobei die Metallprofile durch Punktschweißabschnitte (29, 31) aneinander befestigt sind, die sich in Längsrichtung in Abständen abwechselnd an Oberkanten und Unterkanten der Metallprofile befinden.
2. Abdeckplatte nach Anspruch 1, wobei die Metallprofile (2) in ihrer Längsrichtung bogenförmig sind.
3. Abdeckplatte nach einem der vorhergehenden Ansprüche, wobei jedes Endstück (4) einen U-förmigen Abschnitt (20), der sich entlang der Kante der plattenförmigen Einheit erstreckt und einen Endabschnitt (21) davon umspannt, und einen Keilabschnitt (22), der von dem U-förmigen Abschnitt hervorragt und eine obere Fläche (13) aufweist, die von dem U-förmigen Abschnitt schräg nach unten verläuft, umfasst.
4. Abdeckplatte nach einem der vorhergehenden Ansprüche, wobei jedes Endstück (4) mindestens einen Stabverankerungsabschnitt (23) umfasst, der eine Öffnung (24) umfasst, die einen vertikalen Durchlass für ein Stabverankerungselement bereitstellt.
5. Abdeckplatte nach einem der vorhergehenden Ansprüche, die zwei streifenförmige Elemente (27) umfasst, die sich seitlich der plattenförmigen Einheit (3) an einer Unterseite davon erstrecken und an der plattenförmigen Einheit in einem Abstand voneinander befestigt sind, wobei die streifenförmigen Elemente eine Begrenzung eines minimalen Abschnitts

der Abdeckplatte, der auf dem Boden aufliegen muss, an jedem jeweiligen Ende davon kennzeichnen.

6. Abdeckplatte nach einem der vorhergehenden Ansprüche, wobei jedes Endstück (4) ein Winkelprofil (14) umfasst, das einen ersten Wandabschnitt (15), der die letzten Enden (11) der Profile abdeckt, und einen zweiten senkrechten Wandabschnitt (16), der einen Endflächenabschnitt der oberen Fläche (10) der plattenförmigen Einheit (3) abdeckt, aufweist, wobei das Winkelprofil an der plattenförmigen Einheit befestigt ist, wobei jedes Endstück ein V-förmiges Teil (17) mit einem längeren Schenkelabschnitt (18) und einem kürzeren Schenkelabschnitt (19) umfasst, wobei der längere Schenkelabschnitt ein Unterteil des V-förmigen Teils darstellt, einen Endflächenabschnitt der unteren Fläche bedeckt und von der plattenförmigen Einheit hervorragt, wobei der längere Schenkelabschnitt an der plattenförmigen Einheit befestigt ist und wobei der kürzere Schenkelabschnitt die schräge obere Fläche (13) des Endstücks (4) bereitstellt und an dem Winkelprofil befestigt ist.
7. Abdeckplatte nach einem der vorhergehenden Ansprüche, wobei die Metallprofile (2) im Querschnitt U-förmig sind und in einer ersten Lage von ersten Metallprofilen (31) und einer zweiten Lage von zweiten Metallprofilen (32) angeordnet sind, wobei die Metallprofile jeder Schicht nebeneinander angeordnet sind, wobei die offene Seite der Metallprofile in die gleiche Richtung gedreht ist, wobei die erste und die zweite Schicht in Eingriff miteinander angeordnet sind, wobei die offenen Seiten einander zuweisen, und wobei die ersten Metallprofile (31) in Bezug auf die zweiten Metallprofile (32) um die halbe Breite der Metallprofile seitlich versetzt sind, wobei die Längskanten (34, 35) an den Mündungen der Profilöffnungen an die inneren unteren Flächen (36, 37) von gegenüberliegenden Profilen (31, 32) anstoßen.

Revendications

1. Plaque de couverture pour couvrir un trou d'une route, la plaque de couverture comprenant plusieurs profilés métalliques allongés (2) agencés côte à côte, chaque profilé métallique (2) ayant des parois latérales opposées (7, 8, 7', 8', 7'', 8''), les parois latérales adjacentes de profilés métalliques adjacents étant attenantes les unes aux autres, dans laquelle les profilés métalliques ont été fixés l'un à l'autre le long de leurs côtés longs, les profilés métalliques formant ainsi une entité en forme de plaque (3) ayant une surface inférieure et une surface supérieure (9, 10), **caractérisée en ce que** la plaque de couverture comprend en outre des pièces d'ex-

trémité en forme de coin allongées (4) fixées sur des extrémités opposées de l'entité en forme de plaque, s'étendant perpendiculairement aux profilés métalliques, couvrant les extrémités (11) des profilés métalliques et ayant chacune une surface supérieure pentue (13), la plaque de couverture étant ainsi agencée pour être placée avec les profilés métalliques s'étendant le long d'une direction de conduite de la route, dans laquelle la forme des profilés métalliques est sélectionnée parmi un groupe de formes comprenant des profilés métalliques ayant une section rectangulaire et des profilés en U, dans laquelle les profilés métalliques sont fixés l'un à l'autre par des parties soudées par points (29, 31) situées de façon intermittente longitudinalement en alternance à des bords supérieurs et des bords inférieurs des profilés métalliques.

2. Plaque de couverture selon la revendication 1, dans laquelle les profilés métalliques (2) sont arqués dans leur direction longitudinale.
3. Plaque de couverture selon l'une quelconque des revendications précédentes, dans laquelle chaque pièce d'extrémité (4) comprend une partie en U (20) s'étendant le long du bord de l'entité en forme de plaque englobant une partie d'extrémité (21) de celle-ci, et une partie en forme de coin (22) faisant saillie de la partie en U et ayant une surface supérieure (13) en pente descendante en s'éloignant de la partie en U.
4. Plaque de couverture selon l'une quelconque des revendications précédentes, dans laquelle chaque pièce d'extrémité (4) comprend au moins une partie d'ancrage de route (23) comprenant une ouverture (24) fournissant un passage vertical pour un élément d'ancrage de route.
5. Plaque de couverture selon l'une quelconque des revendications précédentes, comprenant deux éléments en forme de bande (27) s'étendant latéralement de l'entité en forme de plaque (3) sur un côté inférieur de celle-ci et étant fixés à l'entité en forme de plaque à distance l'un de l'autre, les éléments en forme de bande marquant une avancée d'une partie minimale de la plaque de couverture, à chaque extrémité respective de celle-ci, qui doit reposer sur le sol.
6. Plaque de couverture selon l'une quelconque des revendications précédentes, dans laquelle chaque pièce d'extrémité (4) comprend une cornière d'acier (14) ayant une première section de paroi (15), qui couvre les extrémités toute proches (11) des profilés, et une seconde section de paroi perpendiculaire (16) qui couvre une partie de surface d'extrémité de la surface supérieure (10) de l'entité en forme de pla-

que (3), dans laquelle la cornière d'angle est fixée sur l'entité en forme de plaque, dans laquelle chaque pièce d'extrémité comprend une partie en V (17) qui a une partie de patte plus longue (18) et une partie de patte plus courte (19), dans laquelle la partie de patte plus longue constitue un bas de la partie en V, couvre une partie de surface d'extrémité de la surface inférieure, et fait saillie de l'entité en forme de plaque, dans laquelle la partie de patte plus longue est fixée sur l'entité en forme de plaque, et dans laquelle la partie de patte plus courte fournit la surface supérieure pentue (13) de la pièce d'extrémité (4) et est fixée sur la cornière d'angle.

7. Plaque de couverture selon l'une quelconque des revendications précédentes, dans laquelle les profilés métalliques (2) ont une section en U et sont agencés dans une première couche de premiers profilés métalliques (31), et une seconde couche de seconds profilés métalliques (32), dans laquelle les profilés métalliques de chaque couche sont agencés adjacents l'un à l'autre avec le côté ouvert des profilés métalliques tourné dans la même direction, dans laquelle les première et seconde couches sont agencées en engagement l'une avec l'autre avec les côtés ouverts se faisant face, et dans laquelle les premiers profilés métalliques (31) sont déplacés latéralement par rapport aux seconds profilés métalliques (32) de moitié la largeur des profilés métalliques, ce par quoi les bords longitudinaux (34, 35) aux embouchures des ouvertures de profilé sont attenants aux surfaces inférieures intérieures (36, 37) de profilés opposés (31, 32).

35

40

45

50

55

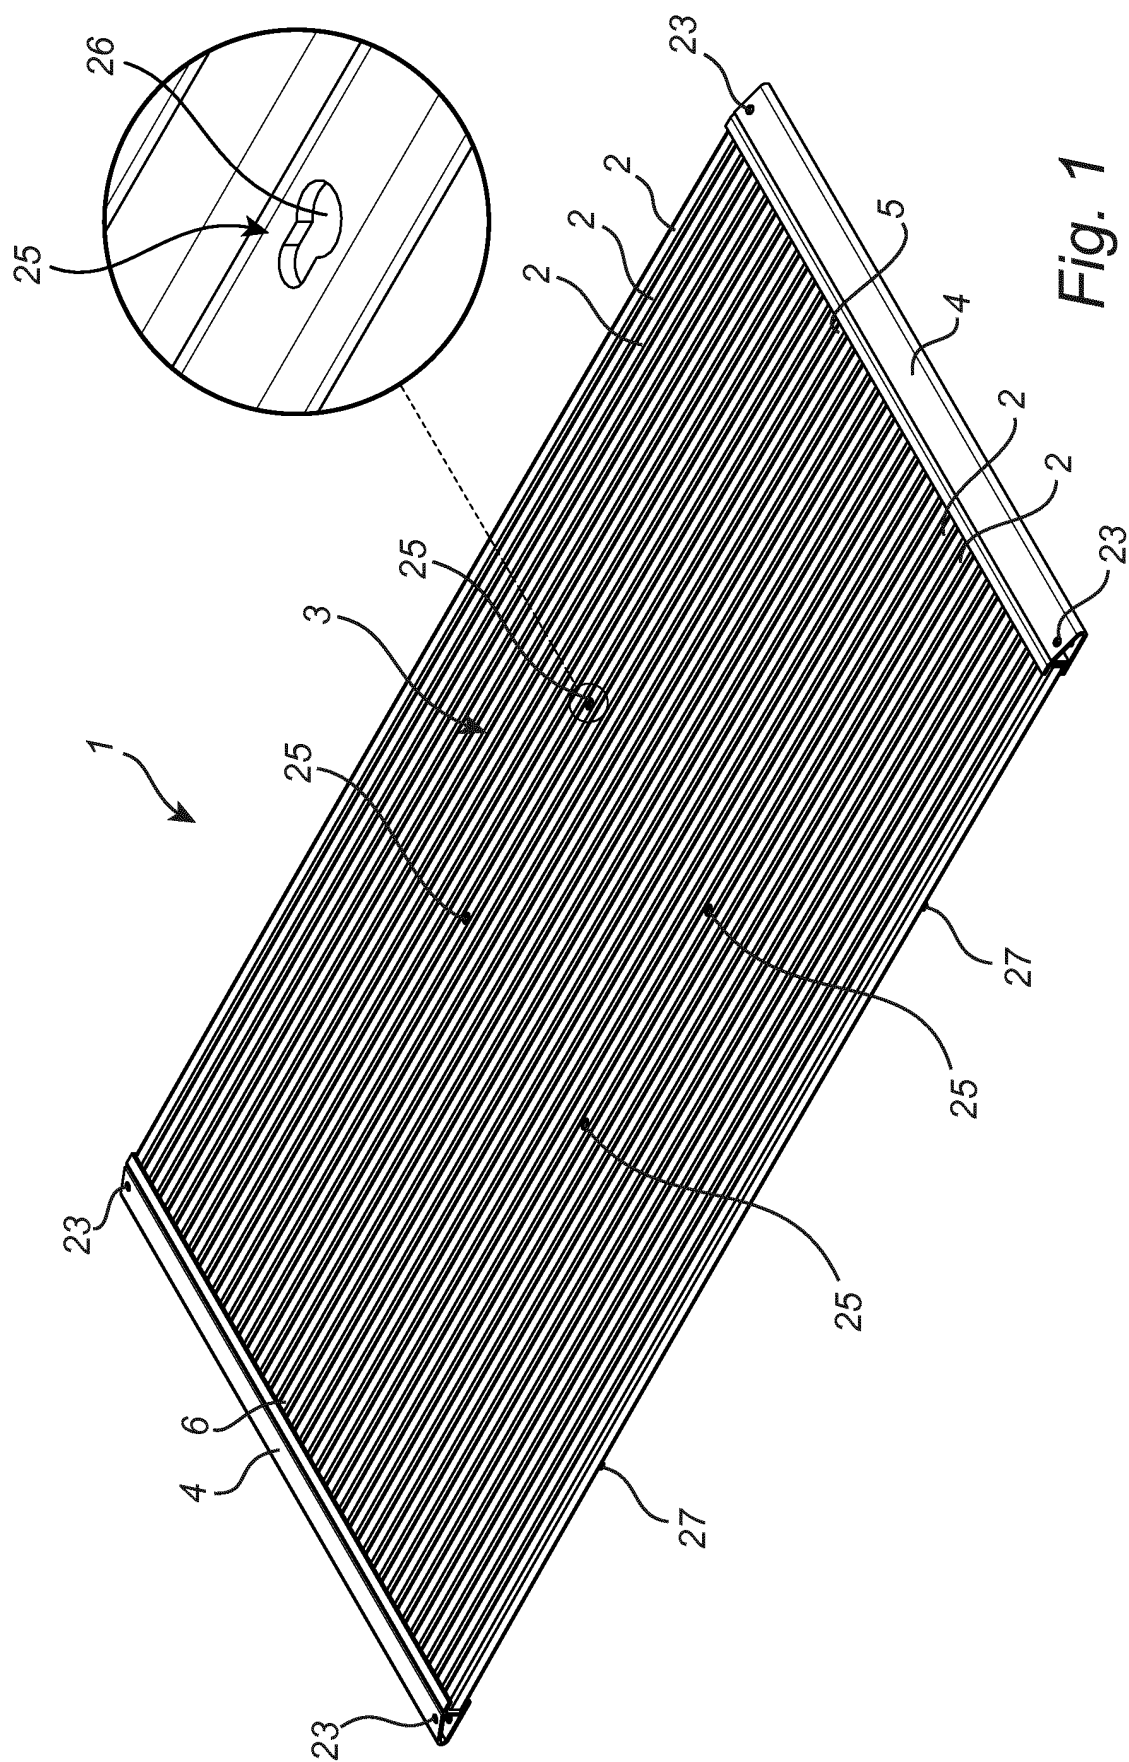


Fig. 1

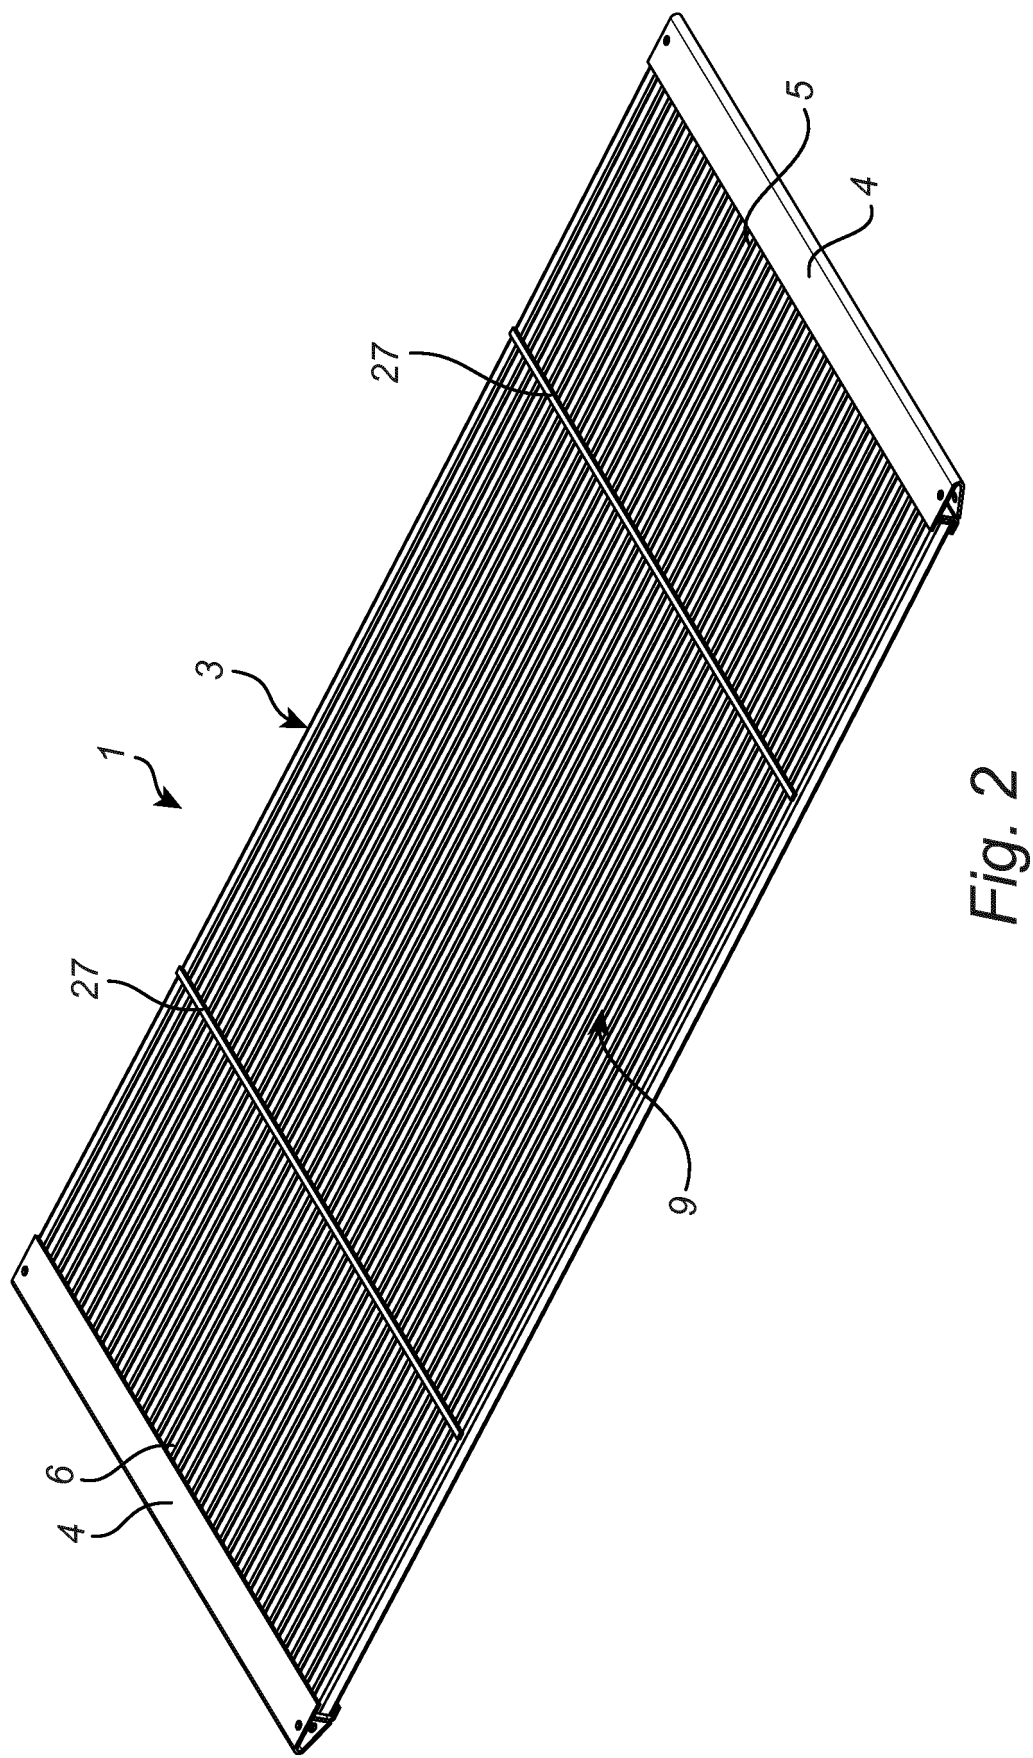


Fig. 2

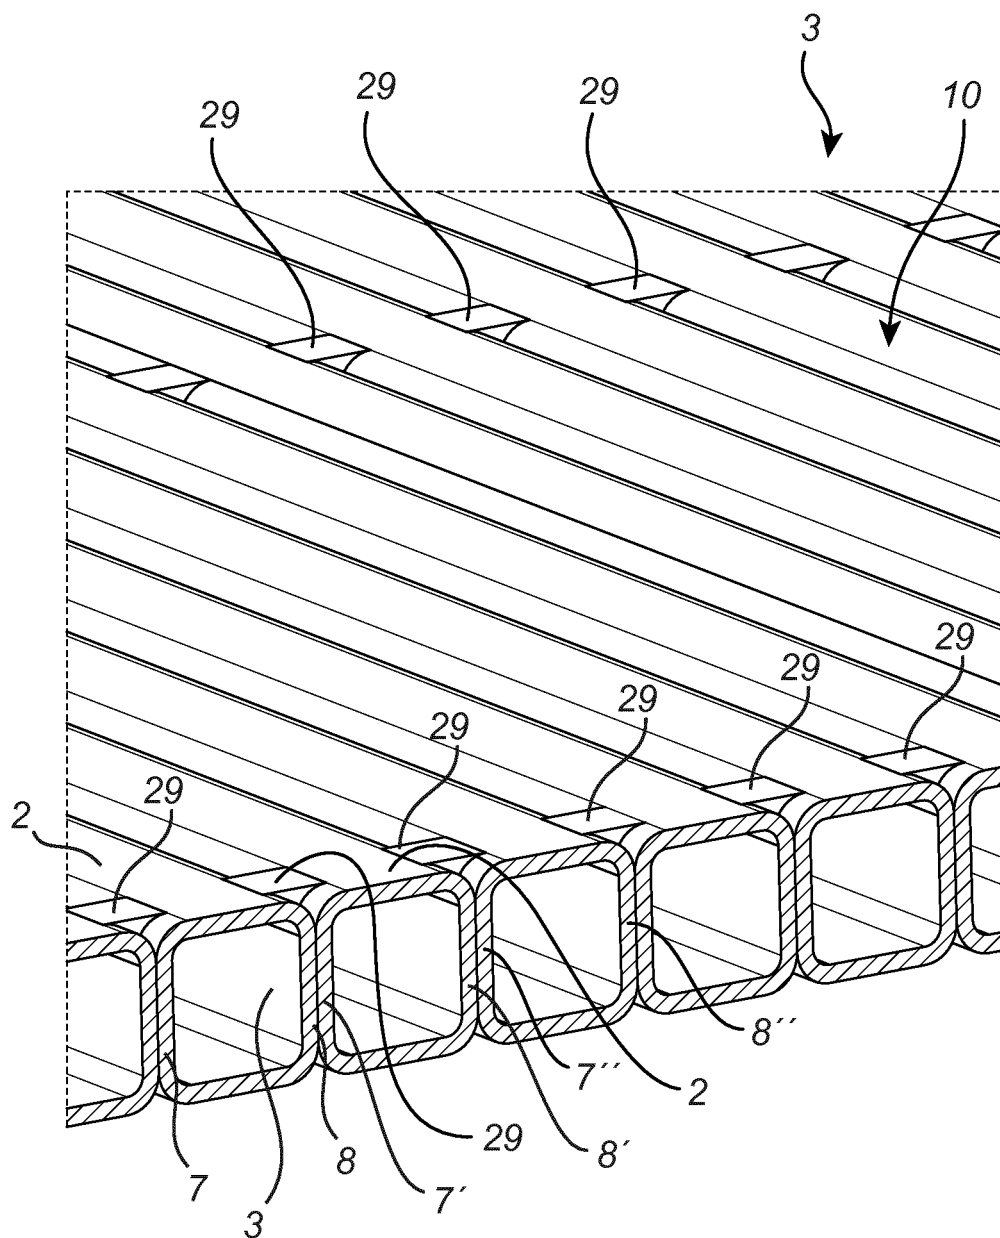
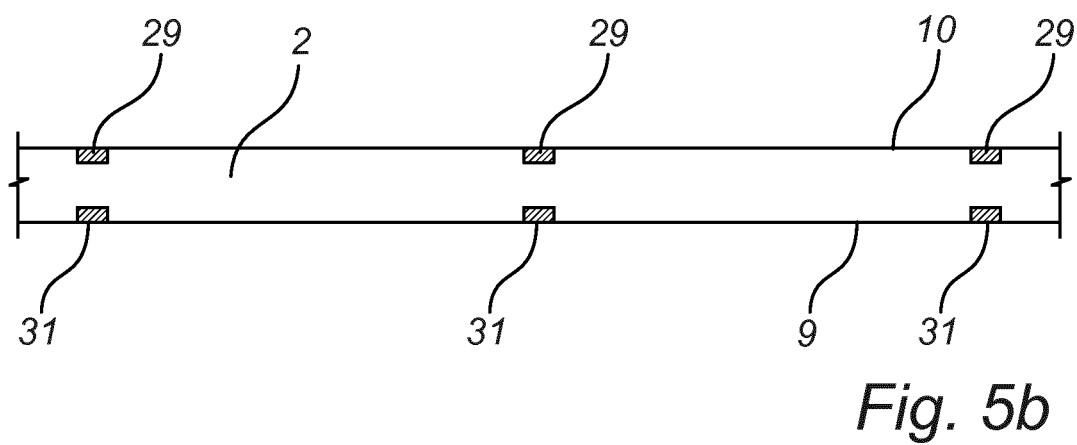
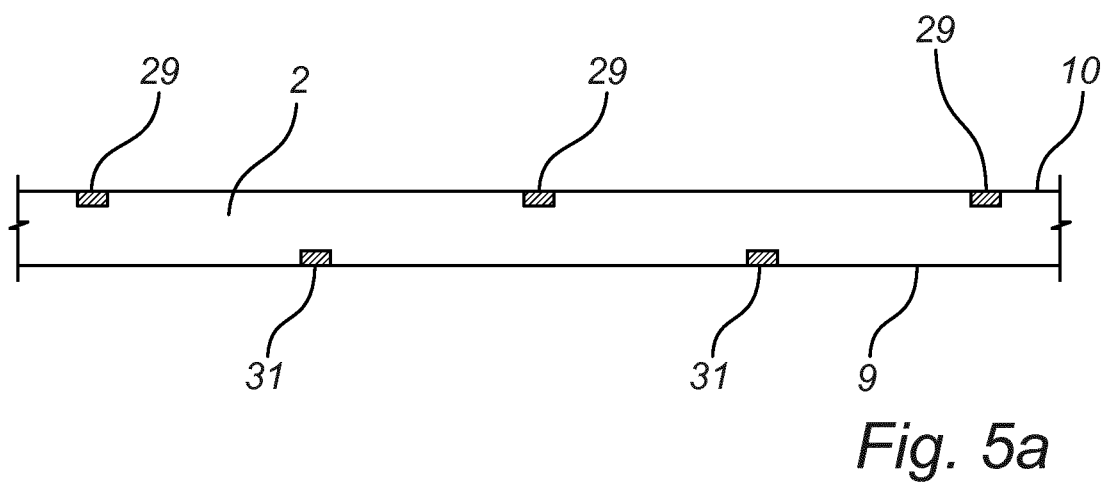
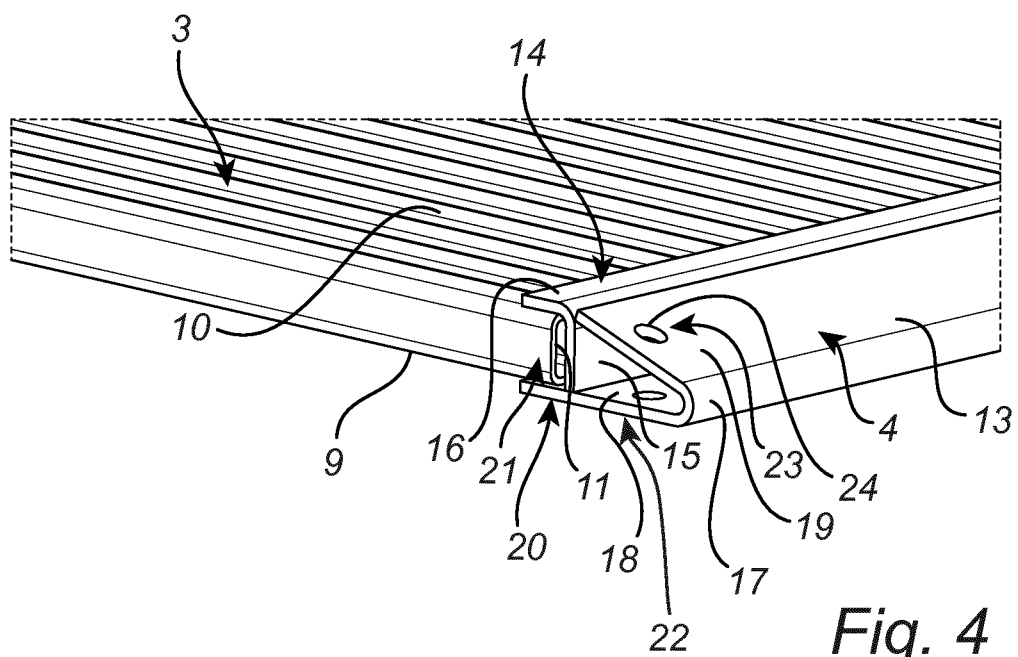
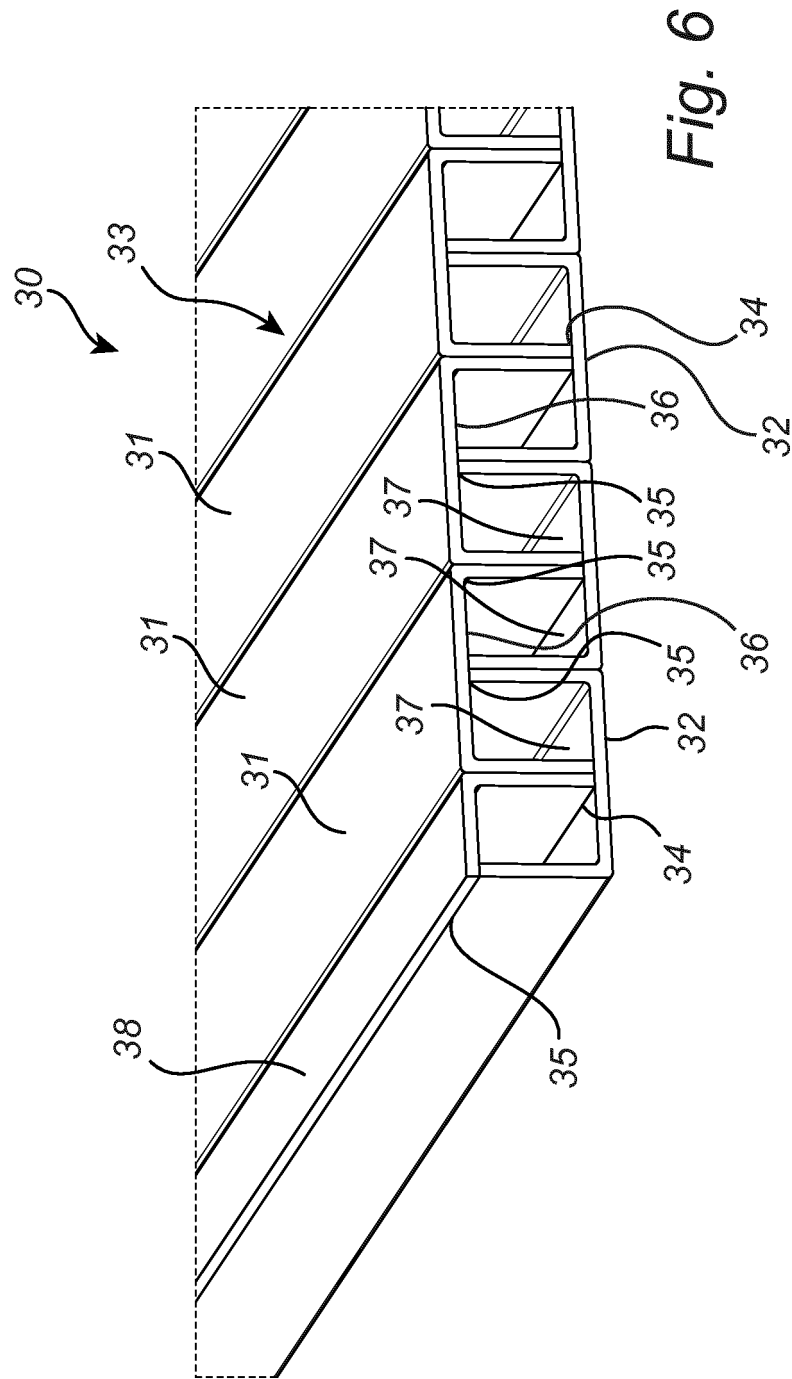


Fig. 3





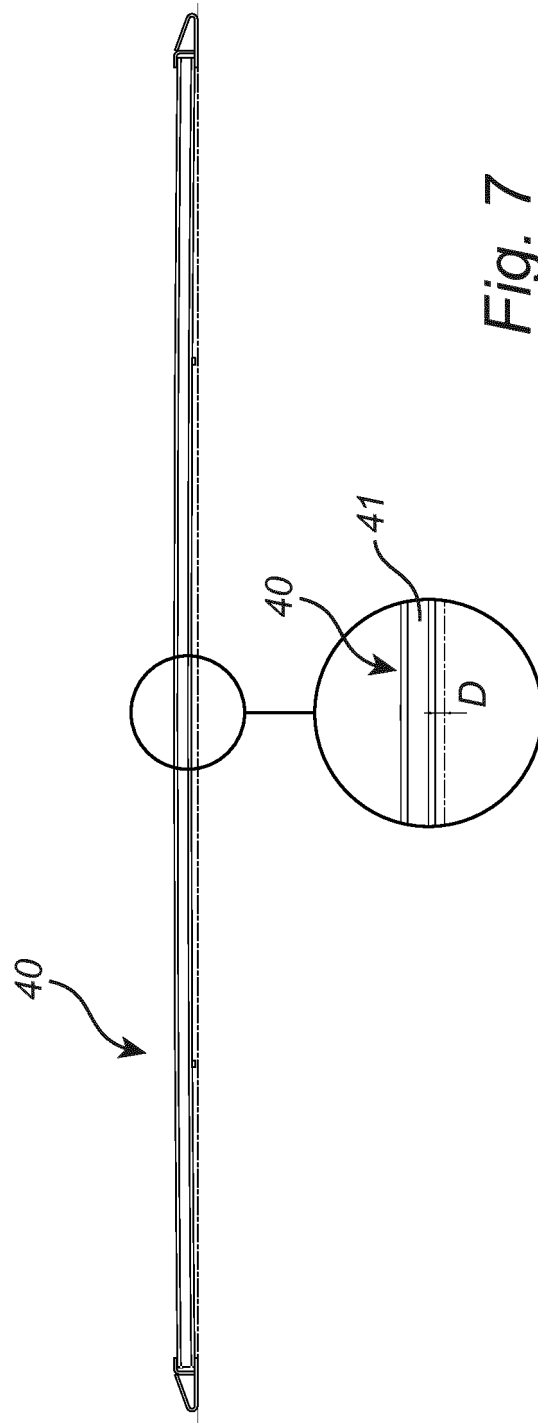


Fig. 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 10215110 [0003]
- DE 1484458 A1 [0004]
- US 2004141809 A [0017]